



# FCC RF Test Report

**APPLICANT** : Texas Instruments Incorporated  
**EQUIPMENT** : WiFi and Bluetooth Module  
**BRAND NAME** : Texas Instruments  
**MODEL NAME** : WL18MODGI  
**FCC ID** : Z64-WL18DBMOD  
**STANDARD** : FCC Part 15 Subpart C §15.247  
**CLASSIFICATION** : (DTS) Digital Transmission System

The product was received on Oct. 09, 2014 and testing was completed on Dec. 10, 2014. We, SPORTON INTERNATIONAL INC., would like to declare that the tested sample has been evaluated in accordance with the test procedures and has been in compliance with the applicable technical standards.

The test results in this report apply exclusively to the tested model / sample. Without written approval of SPORTON INTERNATIONAL INC., the test report shall not be reproduced except in full.

Reviewed by: Joseph Lin / Supervisor

Approved by: Jones Tsai / Manager



## **SPORTON INTERNATIONAL INC.**

**No. 52, Hwa Ya 1<sup>st</sup> Rd., Hwa Ya Technology Park, Kwei-Shan Hsiang, Tao Yuan Hsien, Taiwan, R.O.C.**



# TABLE OF CONTENTS

**REVISION HISTORY..... 3**

**SUMMARY OF TEST RESULT ..... 4**

**1 GENERAL DESCRIPTION..... 5**

    1.1 Applicant ..... 5

    1.2 Manufacturer..... 5

    1.3 Product Feature of Equipment Under Test..... 5

    1.4 Product Specification subjective to this standard ..... 5

    1.5 Modification of EUT ..... 6

    1.6 Testing Location ..... 6

    1.7 Applicable Standards..... 6

**2 TEST CONFIGURATION OF EQUIPMENT UNDER TEST..... 7**

    2.1 Descriptions of Test Mode ..... 7

    2.2 Test Mode..... 8

    2.3 Connection Diagram of Test System..... 9

    2.4 Support Unit used in test configuration and system ..... 10

    2.5 EUT Operation Test Setup ..... 10

    2.6 Measurement Results Explanation Example..... 10

**3 TEST RESULT ..... 11**

    3.1 6dB and 99% Bandwidth Measurement ..... 11

    3.2 Peak Output Power Measurement ..... 16

    3.3 Power Spectral Density Measurement ..... 18

    3.4 Conducted Band Edges and Spurious Emission Measurement ..... 24

    3.5 Band Edges and Spurious Emission in the Restricted Band ..... 33

    3.6 AC Conducted Emission Measurement..... 40

    3.7 Antenna Requirements ..... 44

**4 LIST OF MEASURING EQUIPMENT..... 45**

**5 UNCERTAINTY OF EVALUATION..... 46**

**APPENDIX A. TEST RESULT OF RADIATED TEST RESULTS**

**APPENDIX B. SETUP PHOTOGRAPHS**





### SUMMARY OF TEST RESULT

Report Section	FCC Rule	IC Rule	Description	Limit	Result	Remark
3.1	15.247(a)(2)	RSS-210 A8.2(a)	6dB Bandwidth	$\geq 0.5\text{MHz}$	Pass	-
3.1	-	RSS-Gen 4.6.1	99% Bandwidth	-	Pass	-
3.2	15.247(b)(1)	RSS-210 A8.1(b)	Peak Output Power	$\leq 30\text{dBm}$	Pass	-
3.3	15.247(e)	RSS-210 A8.2(b)	Power Spectral Density	$\leq 8\text{dBm}/3\text{kHz}$	Pass	-
3.4	15.247(d)	RSS-210 A8.5	Conducted Band Edges and Spurious Emission	$\leq 20\text{dBc}$	Pass	-
3.5	15.247(d)	RSS-210 A8.5	Radiated Band Edges and Spurious Emission	15.209(a) & 15.247(d)	Pass	Under limit 15.07 dB at 855.100 MHz
3.6	15.207	RSS-Gen 7.2.4	AC Conducted Emission	15.207(a)	Pass	Under limit 15.10 dB at 0.150 MHz
3.7	15.203 & 15.247(b)	RSS-210 A8.4	Antenna Requirement	N/A	Pass	-



# 1 General Description

## 1.1 Applicant

**Texas Instruments Incorporated**  
12500 TI Boulevard, M/S 8751, Dallas, TX 75243, USA

## 1.2 Manufacturer

**Jorjin Technologies Inc**  
17F, No.239, Sec. 1, Datong Rd., Xizhi Dist., New Taipei City 221, Taiwan

## 1.3 Product Feature of Equipment Under Test

Product Feature	
Equipment	WiFi and Bluetooth Module
Brand Name	Texas Instruments
Model Name	WL18MODGI
FCC ID	Z64-WL18DBMOD
EUT supports Radios application	WLAN 11 a/b/g/n HT20/HT40 Bluetooth v4.0 EDR/LE
HW Version	WG7837-T0B
EUT Stage	Identical Prototype

**Remark:** The above EUT's information was declared by manufacturer. Please refer to the specifications or user's manual for more detailed description.

## 1.4 Product Specification subjective to this standard

Product Specification subjective to this standard	
Tx/Rx Frequency Range	2402 MHz ~ 2480 MHz
Number of Channels	40
Carrier Frequency of Each Channel	40 Channel(37 hopping + 3 advertising channel)
Maximum Output Power to Antenna	6.92 dBm (0.0049 W)
99% Occupied Bandwidth	1.016MHz
Type of Modulation	Bluetooth LE : GFSK

Antenna Information			
Antenna Type	Brand	2.4GHz~2.5GHz	4.9GHz~5.8GHz
PCB	Ethertronics	-0.6	4.5
Dipole	LSR	2	2
PCB	Laird	2	4
Chip	Pulse	3.2	4.2
PIFA	LSR	2	3
Chip	TDK	2.4	3.96



### 1.5 Modification of EUT

No modifications are made to the EUT during all test items.

### 1.6 Testing Location

Sporton Lab is accredited to ISO 17025 by Taiwan Accreditation Foundation (TAF code : 1190) and the FCC designation No. TW1022 under the FCC 2.948(e) by Mutual Recognition Agreement (MRA) in FCC Test.

<b>Test Site</b>	SPORTON INTERNATIONAL INC.		
<b>Test Site Location</b>	No. 52, Hwa Ya 1 <sup>st</sup> Rd., Hwa Ya Technology Park, Kwei-Shan Hsiang, Tao Yuan Hsien, Taiwan, R.O.C. TEL: +886-3-327-3456 FAX: +886-3-328-4978		
<b>Test Site No.</b>	<b>Sporton Site No.</b>		
	TH02-HY	CO05-HY	03CH07-HY

**Note:** The test site complies with ANSI C63.4 2009 requirement.

### 1.7 Applicable Standards

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

- FCC Part 15 Subpart C §15.247
- FCC KDB Publication No. 558074 D01 DTS Meas. Guidance v03r02
- ANSI C63.10-2009

**Remark:**

1. All test items were verified and recorded according to the standards and without any deviation during the test.
2. This EUT has also been tested and complied with the requirements of FCC Part 15, Subpart B, recorded in a separate test report.



## 2 Test Configuration of Equipment Under Test

### 2.1 Descriptions of Test Mode

The RF output power was recorded in the following table:

Channel	Frequency	Bluetooth 4.0 – LE RF Output Power	
		Data Rate / Modulation	
		GFSK	
		1Mbps	
Ch00	2402MHz	6.92	dBm
Ch19	2440MHz	6.73	dBm
Ch39	2480MHz	6.28	dBm

- a. The EUT has been associated with peripherals and configuration operated in a manner tended to maximize its emission characteristics in a typical application. Frequency range investigated: conduction (150 kHz to 30 MHz), radiation (9 kHz to the 10th harmonic of the highest fundamental frequency or to 40 GHz, whichever is lower).
  
- b. AC power line Conducted Emission was tested under maximum output power.



## 2.2 Test Mode


The following summary table is showing all test modes to demonstrate in compliance with the standard.

Summary table of Test Cases	
Test Item	Data Rate / Modulation
	Bluetooth 4.0 – LE / GFSK
Conducted TCs	Mode 1: Bluetooth Tx CH00_2402 MHz_1Mbps Mode 2: Bluetooth Tx CH19_2440 MHz_1Mbps Mode 3: Bluetooth Tx CH39_2480 MHz_1Mbps
Radiated TCs	Mode 1: Bluetooth Tx CH00_2402 MHz_1Mbps Mode 2: Bluetooth Tx CH19_2440 MHz_1Mbps Mode 3: Bluetooth Tx CH39_2480 MHz_1Mbps
AC Conducted Emission	Mode 1: WLAN (2.4GHz) Link + Bluetooth Link + Adapter




## 2.3 Connection Diagram of Test System

### <Bluetooth 4.0 – LE Tx Mode>

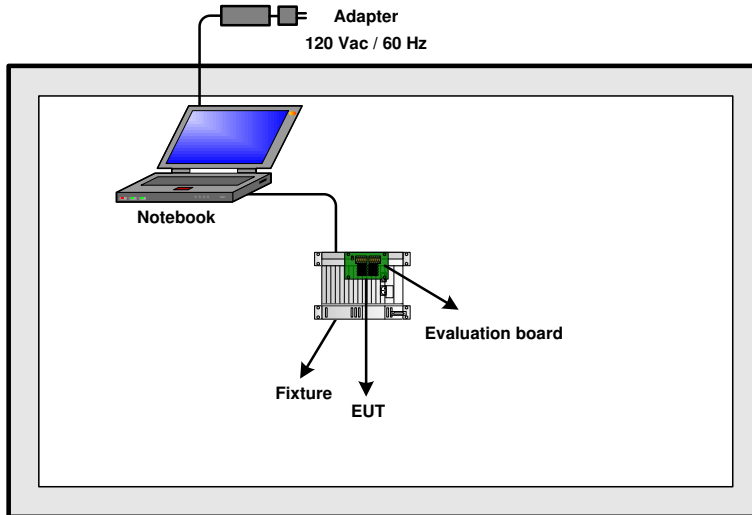

### <AC Conducted Emission Mode>

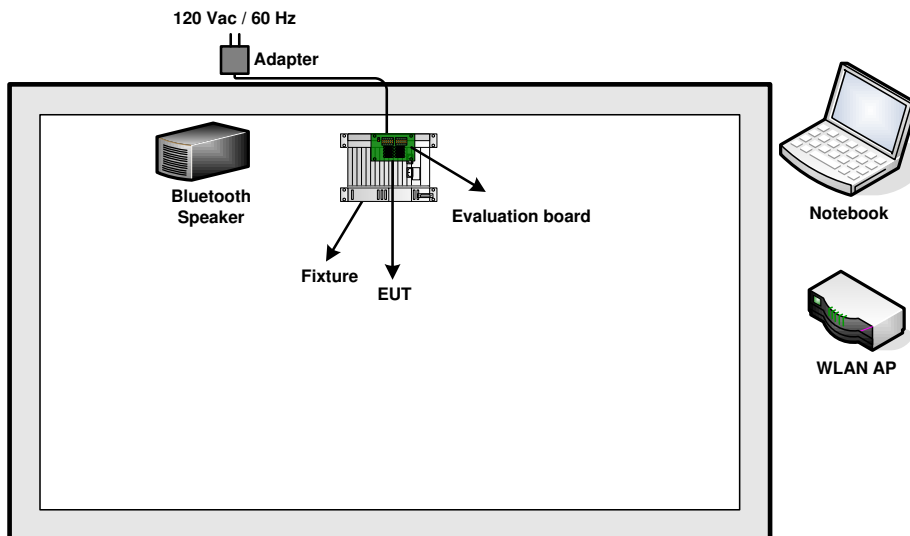



### 2.4 Support Unit used in test configuration and system

Item	Equipment	Trade Name	Model Name	FCC ID	Data Cable	Power Cord
1.	WLAN AP	D-Link	DIR-628	KA2DIR628A2	N/A	Unshielded, 1.8 m
2.	Notebook	DELL	Latitude E6320	FCC DoC/ Contains FCC ID: QDS-BRCM1054	N/A	AC I/P: Unshielded, 1.2 m DC O/P: Shielded, 1.8 m
3.	Notebook	Lenovo	M490S	FCC DoC	N/A	AC I/P: Unshielded, 1.2 m DC O/P: Shielded, 1.8 m
4.	Bluetooth Speaker	MI	MDZ-03-AC	N/A	N/A	N/A
5.	Fixture	N/A	N/A	N/A	N/A	N/A
6.	Evaluation board	N/A	WG1300BE00	N/A	N/A	N/A

### 2.5 EUT Operation Test Setup

For Bluetooth function, programmed RF utility, "HCI Tester" installed in the notebook make the EUT provide functions like channel selection and power level for continuous transmitting and receiving signals.

### 2.6 Measurement Results Explanation Example

For all conducted test items:

The offset level is set in the spectrum analyzer to compensate the RF cable loss and attenuator factor between EUT conducted output port and spectrum analyzer. With the offset compensation, the spectrum analyzer reading level is exactly the EUT RF output level.

Example :

The spectrum analyzer offset is derived from RF cable loss and attenuator factor.

*Offset = RF cable loss + attenuator factor.*

Following shows an offset computation example with cable loss 4.2 dB and 10dB attenuator.

$$\begin{aligned}
\text{Offset(dB)} &= \text{RF cable loss(dB)} + \text{attenuator factor(dB)}. \\
&= 4.2 + 10 = 14.2 \text{ (dB)}
\end{aligned}$$

### 3 Test Result

#### 3.1 6dB and 99% Bandwidth Measurement

##### 3.1.1 Limit of 6dB and 99% Bandwidth

The minimum 6 dB bandwidth shall be at least 500 kHz.

##### 3.1.2 Measuring Instruments

The section 4.0 of List of Measuring Equipment of this test report is used for test.

##### 3.1.3 Test Procedures

1. The testing follows FCC KDB Publication No. 558074 D01 DTS Meas. Guidance v03r02.
2. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.
3. Set to the maximum power setting and enable the EUT transmit continuously.
4. Make the measurement with the spectrum analyzer's resolution bandwidth (RBW) = 100 kHz. Set the Video bandwidth (VBW) = 300 kHz. In order to make an accurate measurement. The 6 dB bandwidth must be greater than 500 kHz.
5. For 99% Bandwidth Measurement, the spectrum analyzer's resolution bandwidth (RBW) is set 30kHz and set the Video bandwidth (VBW) = 100kHz.
6. Measure and record the results in the test report.

##### 3.1.4 Test Setup






### 3.1.5 Test Result of 6dB Bandwidth

Test Mode :	Bluetooth 4.0 - LE	Temperature :	22~25°C
Test Engineer :	Alex Lee	Relative Humidity :	51~55%

Channel	Frequency (MHz)	6dB Bandwidth (MHz)	6dB Bandwidth Min. Limit (MHz)	Pass/Fail
00	2402	0.660	0.5	Pass
19	2440	0.660	0.5	Pass
39	2480	0.664	0.5	Pass


6 dB Bandwidth Plot on Channel 00

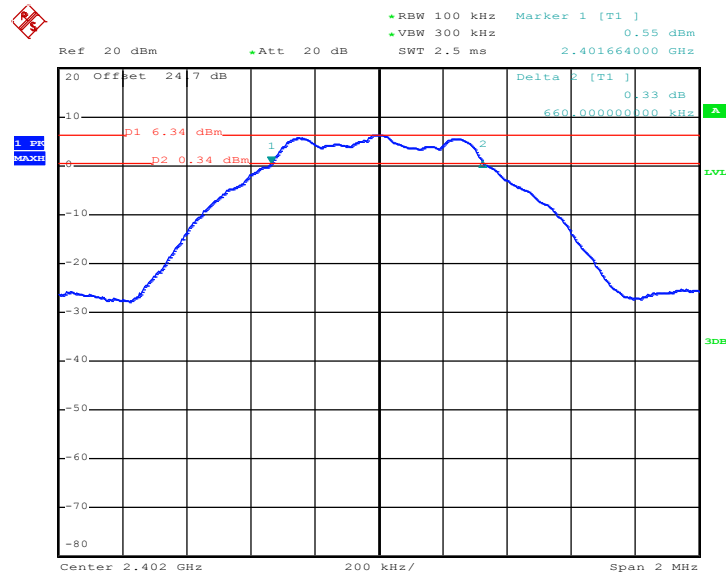

Date: 9.DEC.2014 20:53:24




6 dB Bandwidth Plot on Channel 19

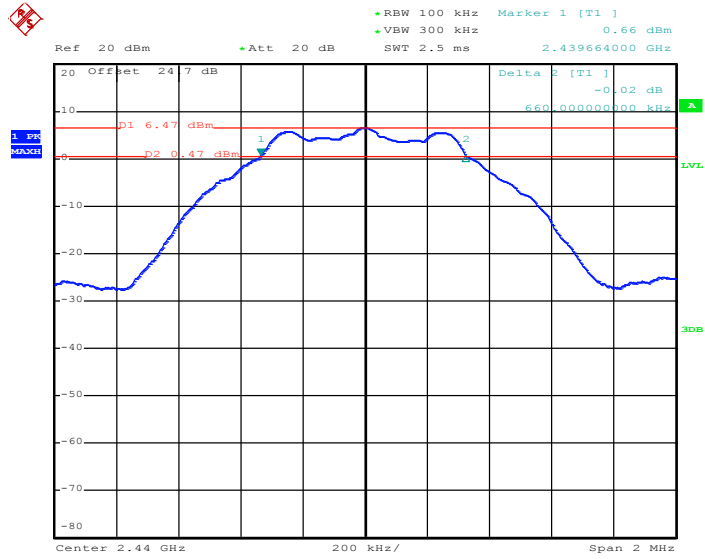

Date: 9.DEC.2014 21:01:08

6 dB Bandwidth Plot on Channel 39

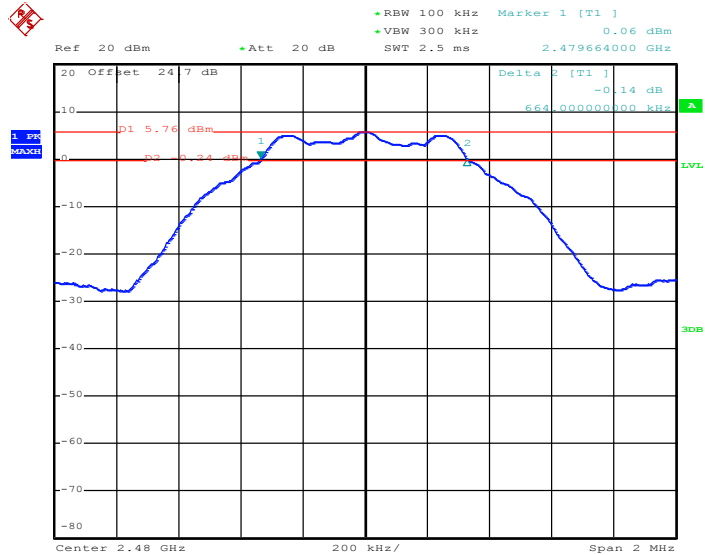

Date: 9.DEC.2014 21:08:37




3.1.6 Test Result of 99% Occupied Bandwidth

Test Mode :	Bluetooth 4.0 - LE	Temperature :	22~25°C
Test Engineer :	Alex Lee	Relative Humidity :	51~55%

Channel	Frequency (MHz)	99% Occupied Bandwidth (MHz)
00	2402	1.012
19	2440	1.012
39	2480	1.016


99% Bandwidth Plot on Channel 00

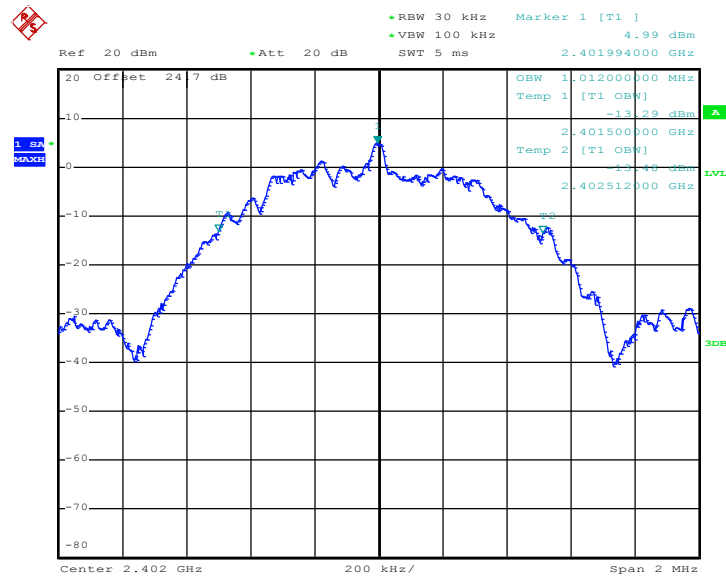

Date: 9.DEC.2014 20:55:35




99% Occupied Bandwidth Plot on Channel 19

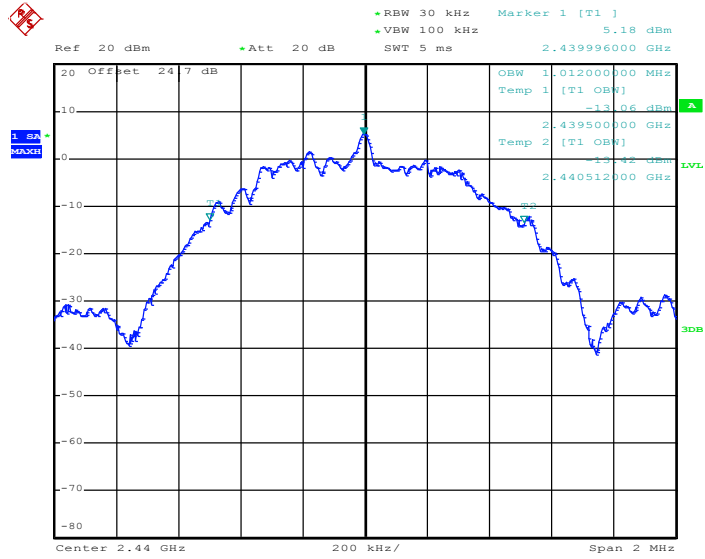

Date: 9.DEC.2014 21:03:30

99% Occupied Bandwidth Plot on Channel 39

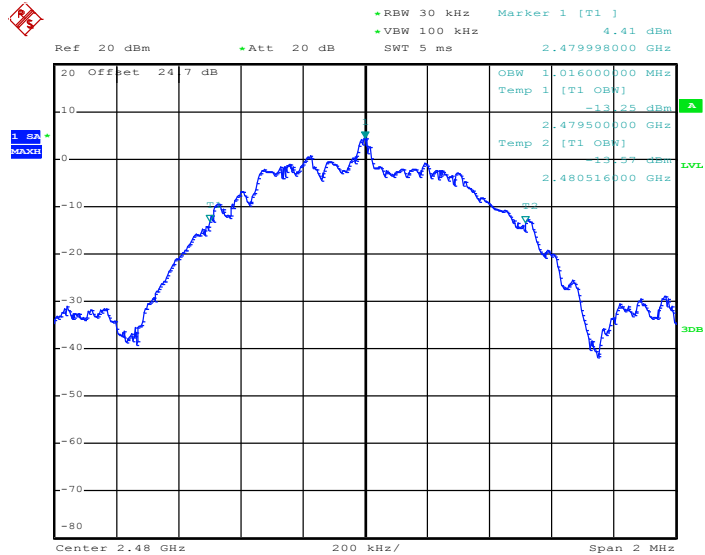

Date: 9.DEC.2014 21:10:59

**Note:** The occupied channel bandwidth is maintained within the band of operation for all of the modulations.

## 3.2 Peak Output Power Measurement

### 3.2.1 Limit of Peak Output Power

For systems using digital modulation in the 2400-2483.5MHz, the limit for peak output power is 30dBm. If transmitting antenna of directional gain greater than 6dBi is used, the peak output power from the intentional radiator shall be reduced below the above stated value by the amount in dB that the directional gain of the antenna exceeds 6 dBi. In case of point-to-point operation, the limit has to be reduced by 1dB for every 3dB that the directional gain of the antenna exceeds 6dBi.


### 3.2.2 Measuring Instruments

The section 4.0 of List of Measuring Equipment of this test report is used for test.

### 3.2.3 Test Procedures

1. The testing follows the Measurement Procedure of FCC KDB No. 558074 DTS D01 Meas. Guidance v03r02.
2. The RF output of EUT was connected to the power meter by RF cable and attenuator. The path loss was compensated to the results for each measurement.
3. Set to the maximum power setting and enable the EUT transmit continuously.
4. Measure the conducted output power and record the results in the test report.

### 3.2.4 Test Setup

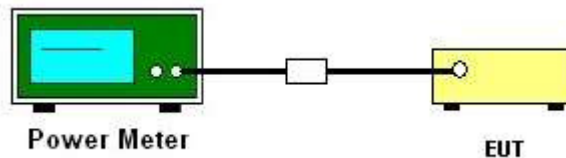





3.2.5 Test Result of Peak Output Power

Test Mode :	Bluetooth 4.0 - LE	Temperature :	22~25°C
Test Engineer :	Alex Lee	Relative Humidity :	51~55%

Channel	Frequency (MHz)	RF Power (dBm)		
		GFSK	Max. Limits (dBm)	Pass/Fail
		1 Mbps		
00	2402	6.920	30.00	Pass
19	2440	6.730	30.00	Pass
39	2480	6.280	30.00	Pass

### 3.3 Power Spectral Density Measurement

#### 3.3.1 Limit of Power Spectral Density

The peak power spectral density shall not be greater than 8dBm in any 3kHz band at any time interval of continuous transmission.


#### 3.3.2 Measuring Instruments

The section 4.0 of List of Measuring Equipment of this test report is used for test.

#### 3.3.3 Test Procedures

1. The testing follows Measurement Procedure 10.2 Method PKPSD of FCC KDB Publication No. 558074 D01 DTS Meas. Guidance v03r02
2. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.
3. Set to the maximum power setting and enable the EUT transmit continuously.
4. Make the measurement with the spectrum analyzer's resolution bandwidth (RBW) = 3 kHz. Video bandwidth VBW = 10 kHz In order to make an accurate measurement, set the span to 1.5 times DTS Channel Bandwidth. (6dB BW)
5. Detector = peak, Sweep time = auto couple, Trace mode = max hold, Allow trace to fully stabilize. Use the peak marker function to determine the maximum power level.
6. Measure and record the results in the test report.
7. The Measured power density (dBm)/ 100kHz is a reference level and used as 20dBc down limit line for Conducted Band Edges and Conducted Spurious Emission.

#### 3.3.4 Test Setup

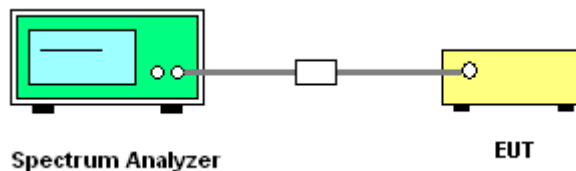



3.3.5 Test Result of Power Spectral Density

Test Mode :	Bluetooth 4.0 - LE	Temperature :	22~25°C
Test Engineer :	Alex Lee	Relative Humidity :	51~55%

Channel	Frequency (MHz)	Power Density		Max. Limits (dBm/3kHz)	Pass/Fail
		PSD/100kHz (dBm)	PSD/3kHz (dBm)		
00	2402	6.330	-9.220	8	Pass
19	2440	6.460	-9.230	8	Pass
39	2480	5.760	-9.850	8	Pass


Note:

1. Measured power density (dBm) has offset with cable loss.
2. The Measured power density (dBm)/ 100kHz is reference level and used as 20dBc down for Conducted Band Edges and Conducted Spurious Emission limit line.



### 3.3.6 Test Result of Power Spectral Density Plots (100kHz)


PSD 100kHz Plot on Channel 00

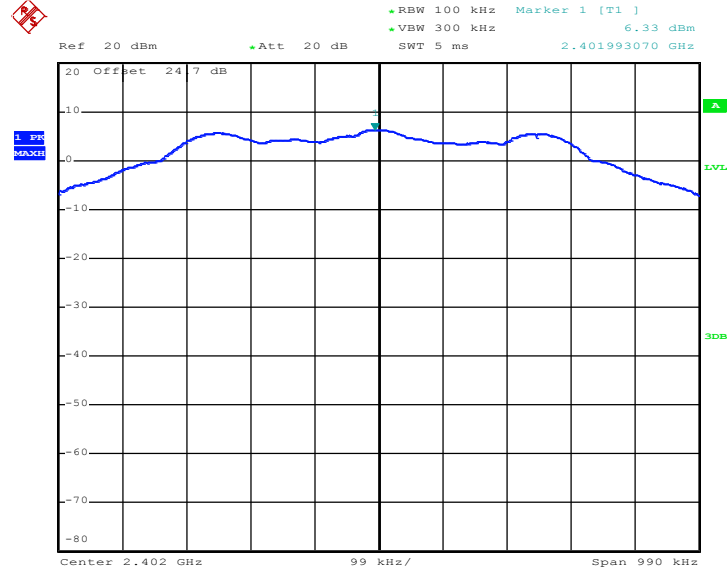

Date: 9.DEC.2014 20:54:07




PSD 100kHz Plot on Channel 19

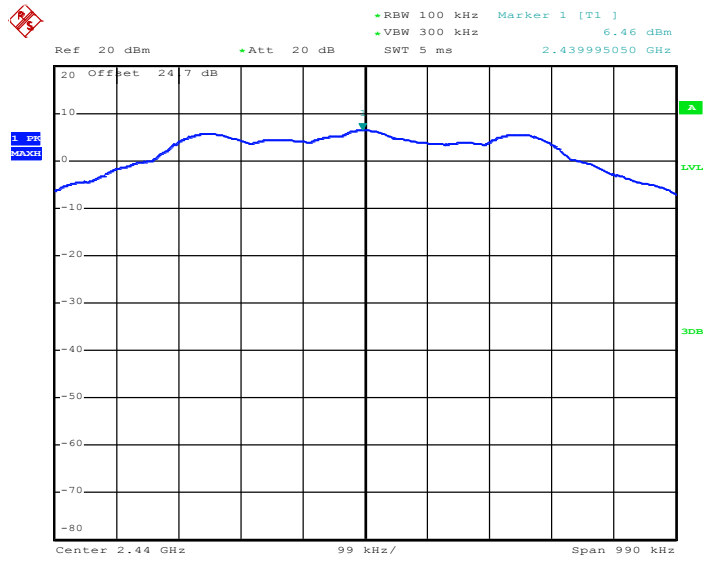

Date: 9.DEC.2014 21:02:24

PSD 100kHz Plot on Channel 39

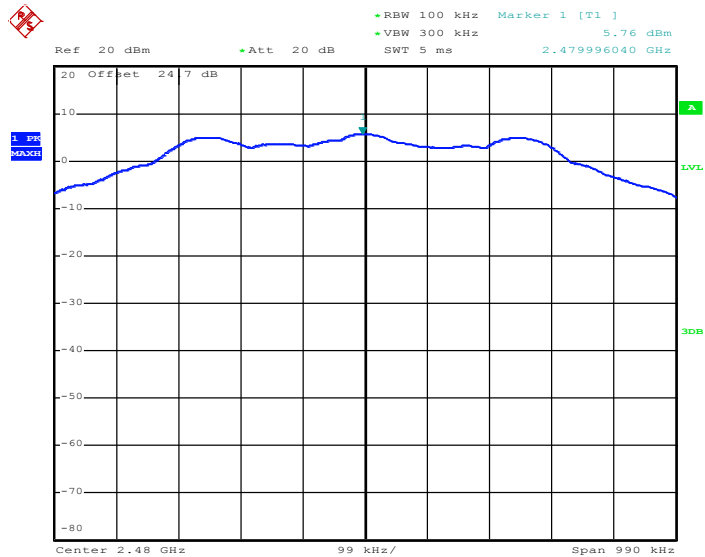


Date: 9.DEC.2014 21:09:38



### 3.3.7 Test Result of Power Spectral Density Plots (3kHz)


PSD 3kHz Plot on Channel 00

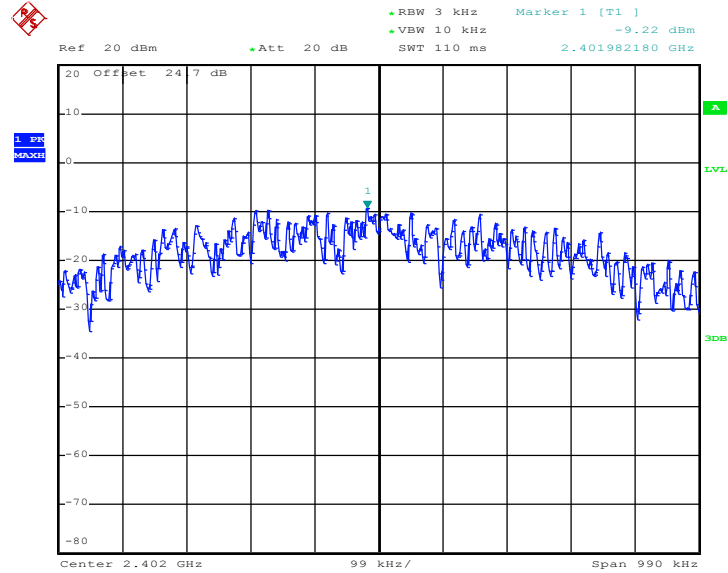

Date: 9.DEC.2014 20:53:45




PSD 3kHz Plot on Channel 19

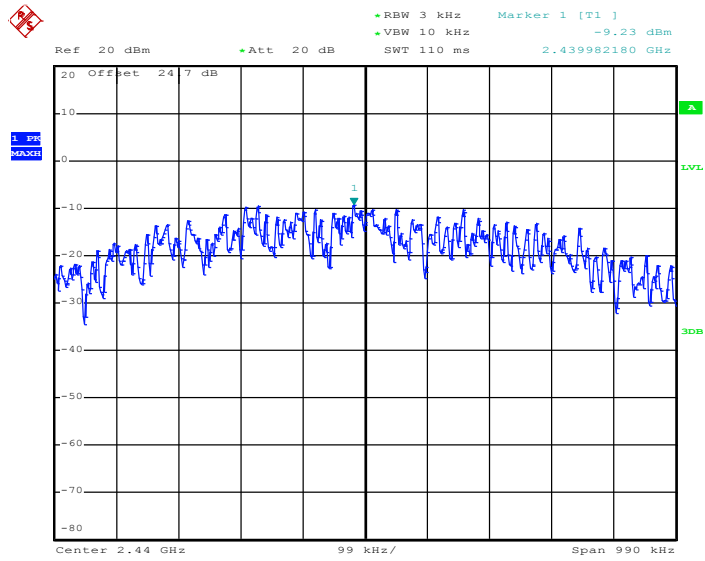

Date: 9.DEC.2014 21:01:30

PSD 3kHz Plot on Channel 39

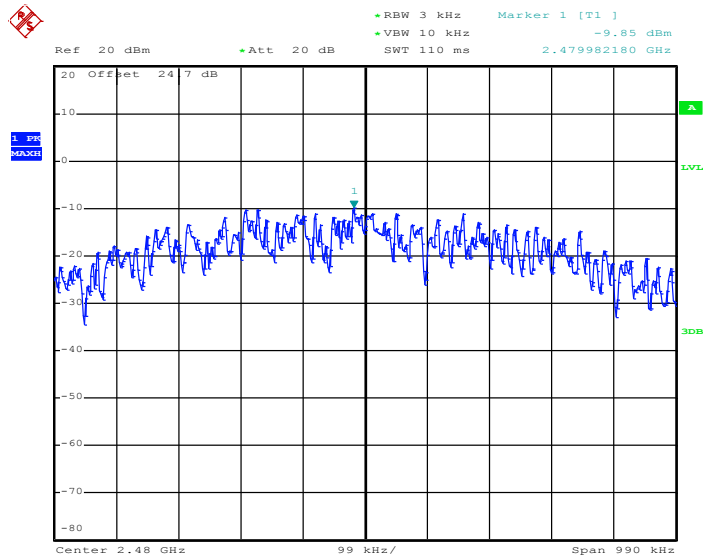

Date: 9.DEC.2014 21:09:02

## 3.4 Conducted Band Edges and Spurious Emission Measurement

### 3.4.1 Limit of Conducted Band Edges and Spurious Emission

All harmonics/spurious must be at least 20 dB down from the highest emission level within the authorized band.

### 3.4.2 Measuring Instruments

The section 4.0 of List of Measuring Equipment of this test report is used for test.

### 3.4.3 Test Procedure

1. The testing follows FCC KDB Publication No. 558074 D01 DTS Meas. Guidance v03r02.
2. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.
3. Set to the maximum power setting and enable the EUT transmit continuously.
4. Set RBW = 100 kHz, VBW=300 kHz, Peak Detector. Unwanted Emissions measured in any 100 kHz bandwidth outside of the authorized frequency band shall be attenuated by at least 20 dB relative to the maximum in-band peak PSD level in 100 kHz when maximum peak conducted output power procedure is used. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, the attenuation required under this paragraph shall be 30 dB instead of 20 dB per 15.247(d).
5. Measure and record the results in the test report.
6. The RF fundamental frequency should be excluded against the limit line in the operating frequency band.

### 3.4.4 Test Setup








### 3.4.5 Test Result of Conducted Band Edges

Test Mode :	Bluetooth 4.0 - LE	Temperature :	22~25°C
Test Channel :	00 and 39	Relative Humidity :	51~55%
		Test Engineer :	Alex Lee


Low Band Edge Plot on Channel 00

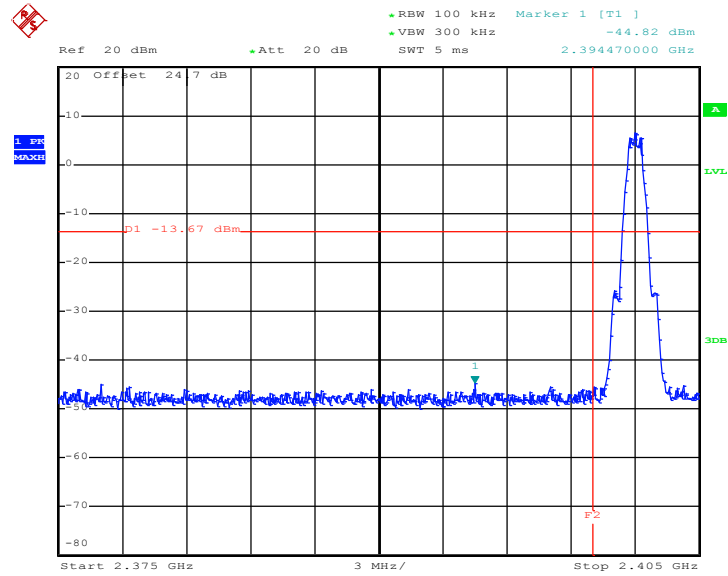

Date: 9.DEC.2014 20:54:28



High Band Edge Plot on Channel 39

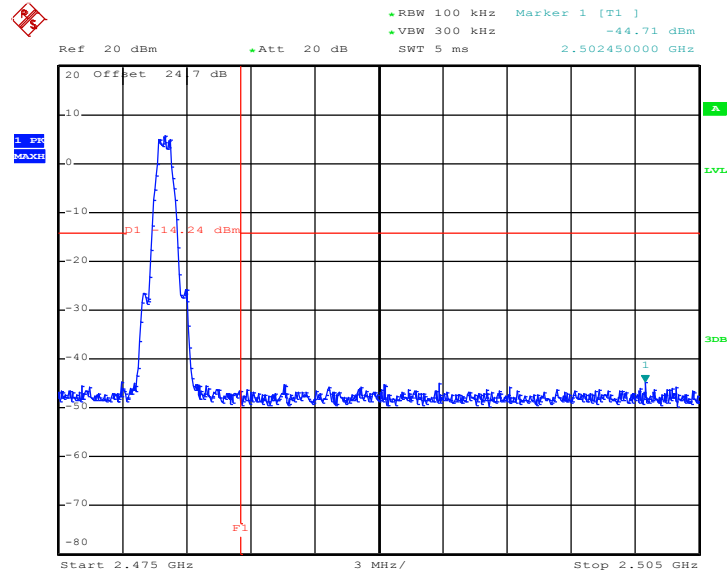


Date: 9.DEC.2014 21:10:00



### 3.4.6 Test Result of Conducted Spurious Emission

Test Mode :	Bluetooth 4.0 - LE	Temperature :	22~25°C
Test Channel :	00	Relative Humidity :	51~55%
		Test Engineer :	Alex Lee


#### Conducted Spurious Emission Plot on Bluetooth LE 1Mbps GFSK Channel 00

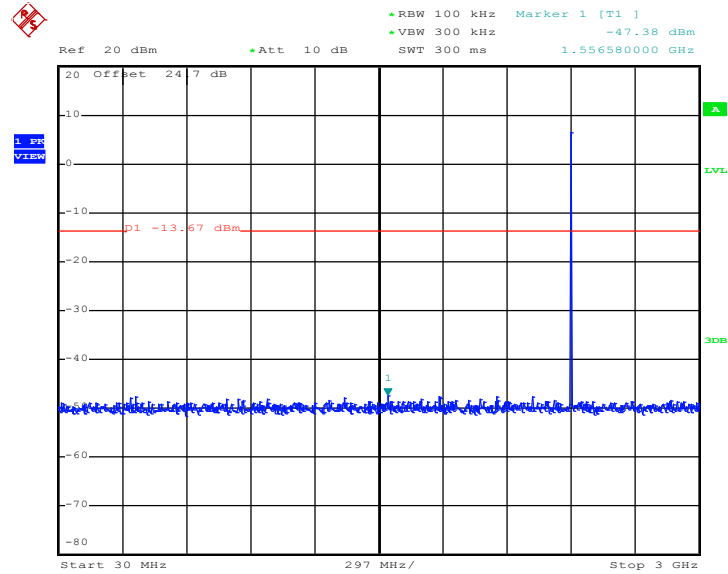

Date: 9.DEC.2014 20:54:50



Conducted Spurious Emission Plot on Bluetooth LE 1Mbps  
GFSK Channel 00

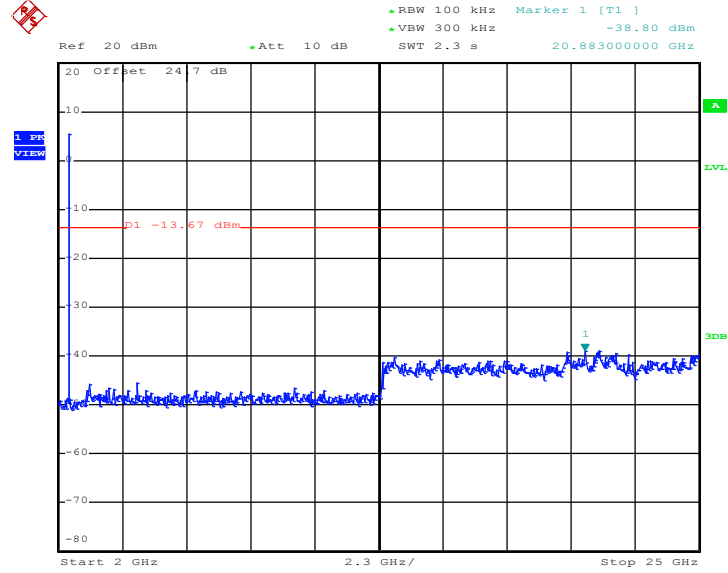


Date: 9.DEC.2014 20:55:08



Test Mode :	Bluetooth 4.0 - LE	Temperature :	22~25°C
Test Channel :	19	Relative Humidity :	51~55%
		Test Engineer :	Alex Lee


**Conducted Spurious Emission Plot on Bluetooth LE 1Mbps  
GFSK Channel 19**

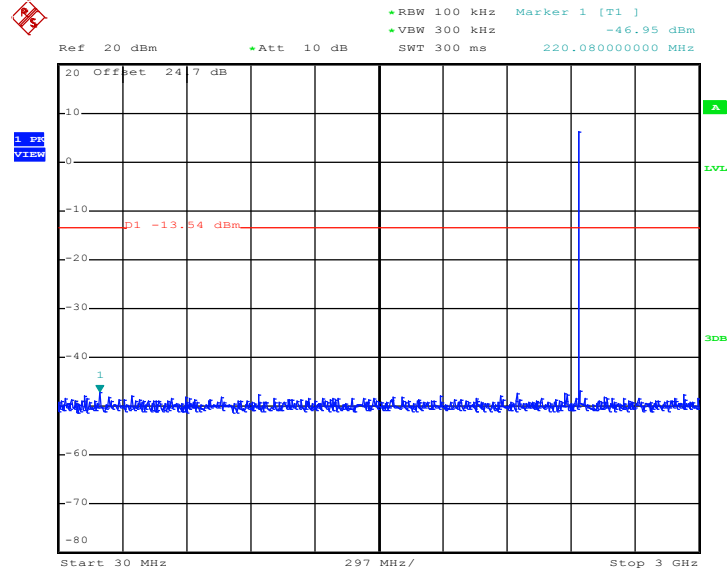

Date: 9.DEC.2014 21:02:46



Conducted Spurious Emission Plot on Bluetooth LE 1Mbps GFSK Channel 19

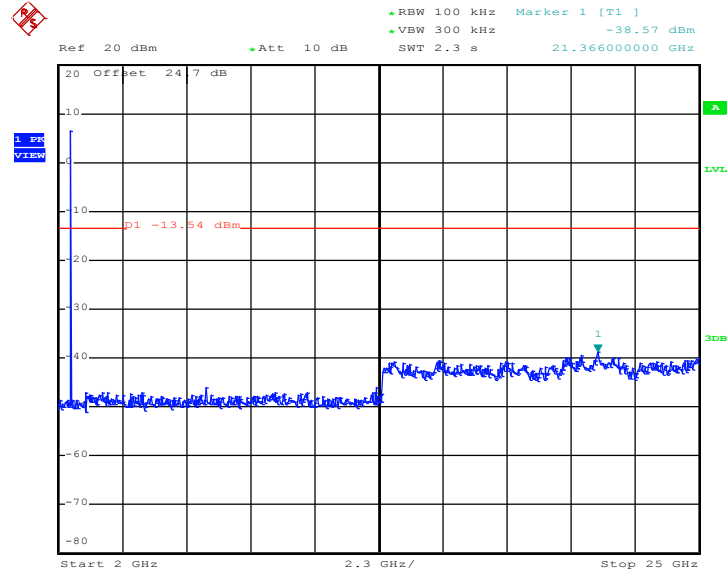


Date: 9.DEC.2014 21:03:04



Test Mode :	Bluetooth 4.0 - LE	Temperature :	22~25°C
Test Channel :	39	Relative Humidity :	51~55%
		Test Engineer :	Alex Lee


**Conducted Spurious Emission Plot on Bluetooth LE 1Mbps  
GFSK Channel 39**

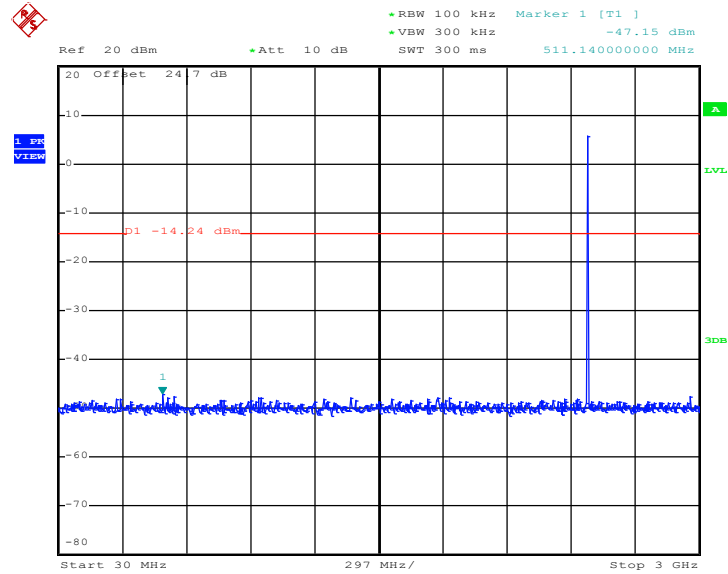

Date: 9.DEC.2014 21:10:23



Conducted Spurious Emission Plot on Bluetooth LE 1Mbps  
GFSK Channel 39

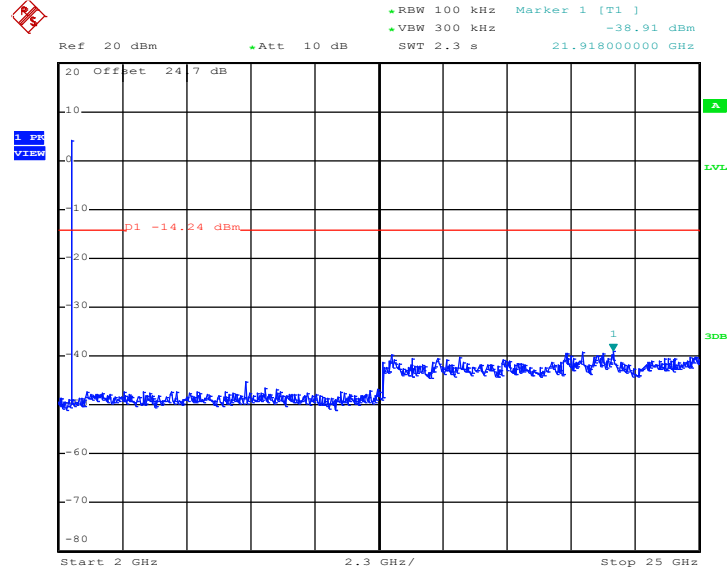

Date: 9.DEC.2014 21:10:41





### 3.5 Band Edges and Spurious Emission in the Restricted Band

#### 3.5.1 Limit of Band Edges and Spurious Emission in the Restricted Band

In any 100 kHz bandwidth outside the intentional radiator frequency band, all harmonics/spurious must be at least 20 dB below the highest emission level within the authorized band. If the output power of this device was measured by spectrum analyzer, the attenuation under this paragraph shall be 30 dB instead of 20 dB. In addition, radiated emissions which fall in the restricted bands must also comply with the FCC section 15.209 limits as below.

Frequency (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009 – 0.490	2400/F(kHz)	300
0.490 – 1.705	24000/F(kHz)	30
1.705 – 30.0	30	30
30 – 88	100	3
88 – 216	150	3
216 - 960	200	3
Above 960	500	3

#### 3.5.2 Measuring Instruments

The section 4.0 of List of Measuring Equipment of this test report is used for test.



3.5.3 Test Procedures

1. The testing follows FCC KDB Publication No. 558074 D01 DTS Meas. Guidance v03r02.
2. The EUT was arranged to its worst case and then tune the antenna tower (from 1 m to 4 m) and turntable (from 0 degree to 360 degrees) to find the maximum reading. A pre-amp and a high pass filter are used for the test in order to get better signal level.
3. The EUT was placed on a turntable with 0.8 meter above ground.
4. The EUT was set 3 meters from the interference receiving antenna, which was mounted on the top of a variable height antenna tower.
5. Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level
6. For measurement below 1GHz, If the emission level of the EUT measured by the peak detector is 3 dB lower than the applicable limit, the peak emission level will be reported. Otherwise, the emission measurement will be repeated using the quasi-peak detector and reported.
7. Use the following spectrum analyzer settings:
  - (1) Span shall wide enough to fully capture the emission being measured;
  - (2) Set RBW=100 kHz for  $f < 1$  GHz;  $VBW \geq RBW$ ; Sweep = auto; Detector function = peak; Trace = max hold;
  - (3) Set RBW = 1 MHz, VBW= 3MHz for  $f \geq 1$  GHz for peak measurement.


For average measurement:

  - $VBW = 10$  Hz, when duty cycle is no less than 98 percent.
  - $VBW \geq 1/T$ , when duty cycle is less than 98 percent where T is the minimum transmission duration over which the transmitter is on and is transmitting at its maximum power control level for the tested mode of operation.


Band	Duty Cycle(%)	T(μs)	1/T(kHz)	VBW Setting
Bluetooth 4.0 - LE	100	-	-	10Hz

### 3.5.4 Test Setup


For Conducted Measurement Setup:

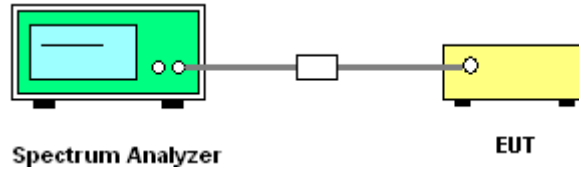


For radiated emissions below 30MHz

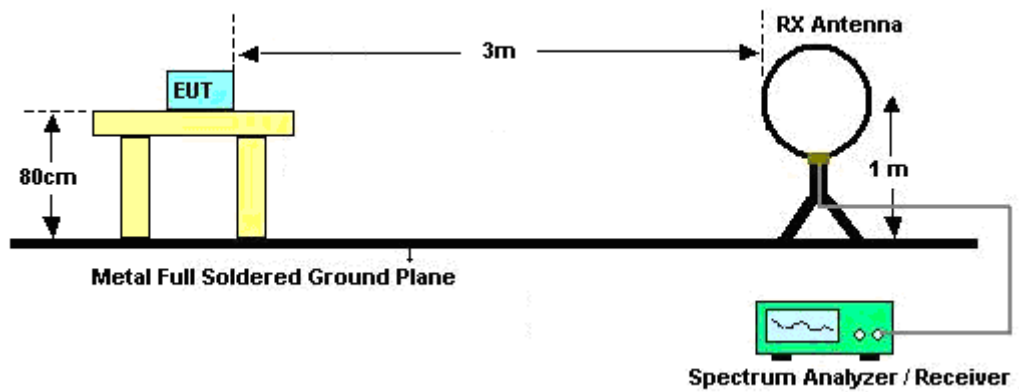

For radiated emissions from 30MHz to 1GHz

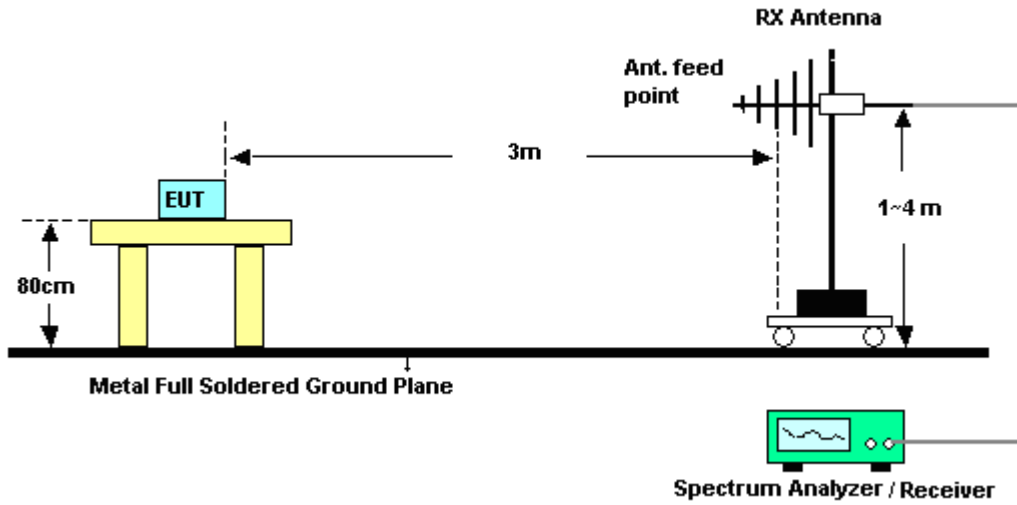

For radiated emissions above 1GHz

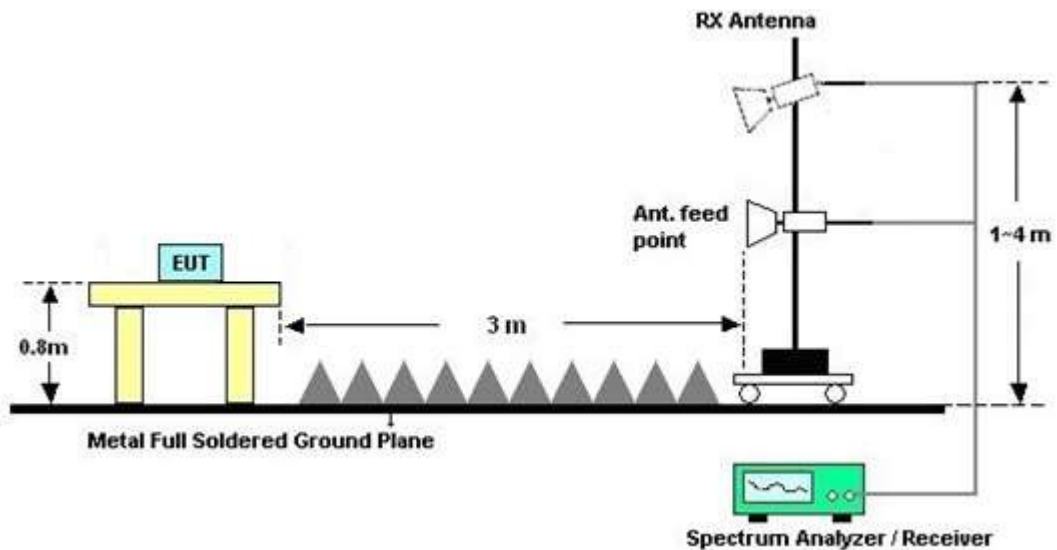

### 3.5.5 Test Results of Radiated Spurious Emissions (9 kHz ~ 30 MHz)

The low frequency, which started from 9 kHz to 30MHz, was pre-scanned and the result which was 20dB lower than the limit line per 15.31(o) was not reported.



3.5.6 Test Result of Conducted Spurious at Band Edges in the Restricted Band

BLE	Note	Frequency	Level	Over	Limit	Read	Antenna	Cable	Grounding	Peak
		( MHz )	( dB $\mu$ V/m )	( dB )	( dB $\mu$ V/m )	( dB $\mu$ V )	( dBi )	( dB )	( dB )	( P/A )
BLE CH00 2402MHz		2376.78	-35.02	-13.82	-21.2	-40.72	3.2	2.5	0	P
		2386.5	-51.31	-10.11	-41.2	-57.01	3.2	2.5	0	A
	*	2402.004	10.1	31.3	-21.2	4.4	3.2	2.5	0	P
	*	2402.004	9.68	50.88	-41.2	3.98	3.2	2.5	0	A
BLE CH19 2440MHz		2388.93	-41.72	-20.52	-21.2	-47.42	3.2	2.5	0	P
		2388.75	-60.3	-19.1	-41.2	-66	3.2	2.5	0	A
	*	2440.08	10.29	31.49	-21.2	4.59	3.2	2.5	0	P
	*	2439.997	9.88	51.08	-41.2	4.18	3.2	2.5	0	A
		2490.88	-40.9	-19.7	-21.2	-46.6	3.2	2.5	0	P
		2484.44	-60.21	-19.01	-41.2	-65.91	3.2	2.5	0	A
BLE CH39 2480MHz	*	2479.826	10.06	31.26	-21.2	4.36	3.2	2.5	0	P
	*	2479.993	9.64	50.84	-41.2	3.94	3.2	2.5	0	A
		2485.08	-39.13	-17.93	-21.2	-44.83	3.2	2.5	0	P
		2485.08	-48.99	-7.79	-41.2	-54.69	3.2	2.5	0	A



3.5.7 Test Result of Conducted Spurious Emission in the Restricted Band

BLE	Note	Frequency	Level	Over	Limit	Read	Antenna	Cable	Grounding	Peak
		( MHz )	( dBµV/m )	( dB )	( dBµV/m )	( dBµV )	( dBi )	( dB )	( dB )	( P/A )
BLE CH00 2402MHz		76.44	-69.72	-14.52	-55.2	-80.12	3.2	2.5	4.7	P
		132.87	-70.92	-19.22	-51.7	-81.32	3.2	2.5	4.7	P
		178.23	-69.62	-17.92	-51.7	-80.02	3.2	2.5	4.7	P
		557.6	-67.49	-18.29	-49.2	-77.89	3.2	2.5	4.7	P
		599.6	-63.81	-14.61	-49.2	-74.21	3.2	2.5	4.7	P
		801.2	-56.51	-7.31	-49.2	-66.91	3.2	2.5	4.7	P
		4806	-40.07	-18.87	-21.2	-45.77	3.2	2.5	0	P
		4806	-42.56	-1.36	-41.2	-48.26	3.2	2.5	0	A
BLE CH19 2440MHz		92.91	-70.6	-18.9	-51.7	-81	3.2	2.5	4.7	P
		163.65	-68.66	-16.96	-51.7	-79.06	3.2	2.5	4.7	P
		245.73	-69.57	-20.37	-49.2	-79.97	3.2	2.5	4.7	P
		425.3	-70.36	-21.16	-49.2	-80.76	3.2	2.5	4.7	P
		674.5	-64.86	-15.66	-49.2	-75.26	3.2	2.5	4.7	P
		813.8	-55.59	-6.39	-49.2	-65.99	3.2	2.5	4.7	P
		4881	-40.38	-19.18	-21.2	-46.08	3.2	2.5	0	P
		4881	-42.62	-1.42	-41.2	-48.32	3.2	2.5	0	A
BLE CH39 2480MHz		77.79	-70.99	-15.79	-55.2	-81.39	3.2	2.5	4.7	P
		164.19	-69.81	-18.11	-51.7	-80.21	3.2	2.5	4.7	P
		227.1	-68.46	-19.26	-49.2	-78.86	3.2	2.5	4.7	P
		407.1	-69.54	-20.34	-49.2	-79.94	3.2	2.5	4.7	P
		567.4	-68.71	-19.51	-49.2	-79.11	3.2	2.5	4.7	P
		827.1	-55.99	-6.79	-49.2	-66.39	3.2	2.5	4.7	P
		4962	-41.97	-20.77	-21.2	-47.67	3.2	2.5	0	P
		4962	-44.39	-3.19	-41.2	-50.09	3.2	2.5	0	A
		7440	-62.75	-41.55	-21.2	-68.45	3.2	2.5	0	P



**3.5.8 Test Result of Cabinet Radiated Spurious at Band Edges**

Please refer to Appendix A.

**3.5.9 Test Result of Cabinet Radiated Spurious Emission (30MHz ~ 10<sup>th</sup> Harmonic)**

Please refer to Appendix A.



### 3.6 AC Conducted Emission Measurement

#### 3.6.1 Limit of AC Conducted Emission

For equipment that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed the limits in the following table.

Frequency of emission (MHz)	Conducted limit (dBµV)	
	Quasi-peak	Average
0.15-0.5	66 to 56*	56 to 46*
0.5-5	56	46
5-30	60	50

\*Decreases with the logarithm of the frequency.

#### 3.6.2 Measuring Instruments


The section 4.0 of List of Measuring Equipment of this test report is used for test.

#### 3.6.3 Test Procedures

1. The EUT was placed 0.4 meter from the conducting wall of the shielding room was kept at least 80 centimeters from any other grounded conducting surface.
2. Connect EUT to the power mains through a line impedance stabilization network (LISN).
3. All the support units are connecting to the other LISN.
4. The LISN provides 50 ohm coupling impedance for the measuring instrument.
5. The FCC states that a 50 ohm, 50 microhenry LISN should be used.
6. Both sides of AC line were checked for maximum conducted interference.
7. The frequency range from 150 kHz to 30 MHz was searched.
8. Set the test-receiver system to Peak Detect Function and specified bandwidth (IF Bandwidth = 9kHz) with Maximum Hold Mode. Then measurement is also conducted by Average Detector and Quasi-Peak Detector Function respectively.



### 3.6.4 Test Setup

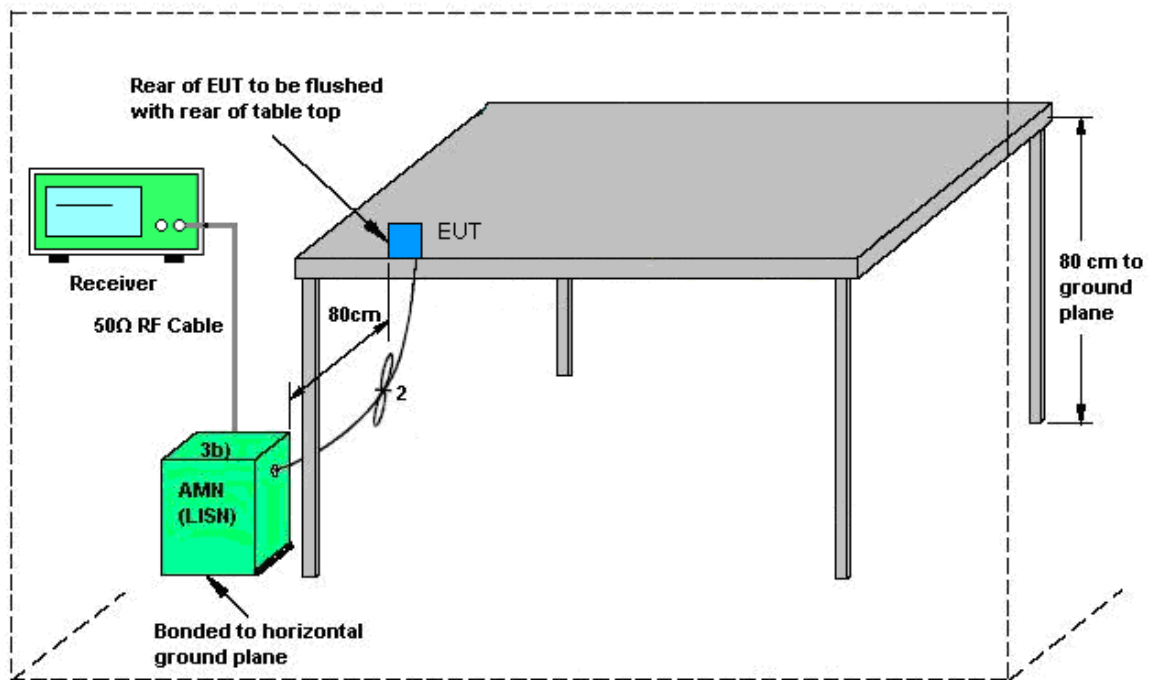


AMN = Artificial mains network (LISN)  
AE = Associated equipment  
EUT = Equipment under test  
ISN = Impedance stabilization network



3.6.5 Test Result of AC Conducted Emission

Test Mode :	Mode 1	Temperature :	20~22°C
Test Engineer :	Kai-Chun Chu	Relative Humidity :	46~48%
Test Voltage :	120Vac / 60Hz	Phase :	Line
Function Type :	WLAN (2.4GHz) Link + Bluetooth Link + Adapter		

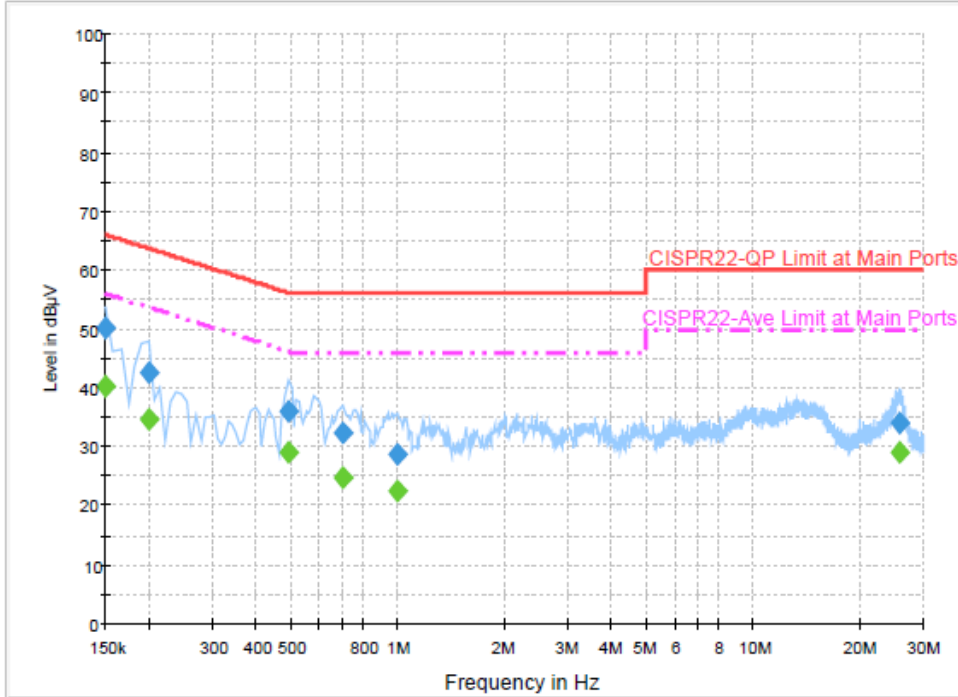

Final Result : Quasi-Peak


Frequency (MHz)	Quasi-Peak (dBµV)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dBµV)
0.150000	50.1	Off	L1	19.5	15.9	66.0
0.198000	42.5	Off	L1	19.4	21.2	63.7
0.494000	36.0	Off	L1	19.4	20.1	56.1
0.702000	32.5	Off	L1	19.6	23.5	56.0
0.990000	28.9	Off	L1	19.5	27.1	56.0
25.766000	34.0	Off	L1	19.9	26.0	60.0

Final Result : Average

Frequency (MHz)	Average (dBµV)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dBµV)
0.150000	40.3	Off	L1	19.5	15.7	56.0
0.198000	34.6	Off	L1	19.4	19.1	53.7
0.494000	29.2	Off	L1	19.4	16.9	46.1
0.702000	24.9	Off	L1	19.6	21.1	46.0
0.990000	22.5	Off	L1	19.5	23.5	46.0
25.766000	29.0	Off	L1	19.9	21.0	50.0



Test Mode :	Mode 1	Temperature :	20~22°C
Test Engineer :	Kai-Chun Chu	Relative Humidity :	46~48%
Test Voltage :	120Vac / 60Hz	Phase :	Neutral
Function Type :	WLAN (2.4GHz) Link + Bluetooth Link + Adapter		

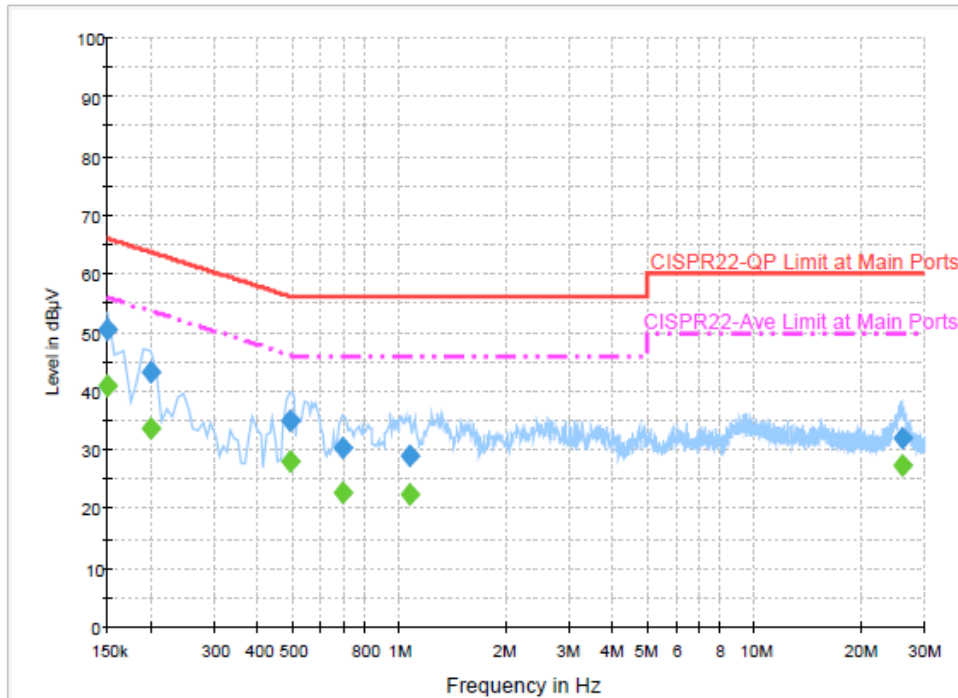

**Final Result : Quasi-Peak**

Frequency (MHz)	Quasi-Peak (dBµV)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dBµV)
0.150000	50.6	Off	N	19.5	15.4	66.0
0.198000	43.2	Off	N	19.4	20.5	63.7
0.494000	35.1	Off	N	19.4	21.0	56.1
0.694000	30.3	Off	N	19.6	25.7	56.0
1.070000	29.0	Off	N	19.6	27.0	56.0
25.982000	31.9	Off	N	20.1	28.1	60.0

**Final Result : Average**

Frequency (MHz)	Average (dBµV)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dBµV)
0.150000	40.9	Off	N	19.5	15.1	56.0
0.198000	33.7	Off	N	19.4	20.0	53.7
0.494000	28.1	Off	N	19.4	18.0	46.1
0.694000	22.7	Off	N	19.6	23.3	46.0
1.070000	22.4	Off	N	19.6	23.6	46.0
25.982000	27.3	Off	N	20.1	22.7	50.0



## **3.7 Antenna Requirements**

### **3.7.1 Standard Applicable**

If directional gain of transmitting antennas is greater than 6dBi, the power shall be reduced by the same level in dB comparing to gain minus 6dBi. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the FCC rule.

### **3.7.2 Antenna Anti-Replacement Construction**

Non-standard antenna connector is used.

### **3.7.3 Antenna Gain**

The antenna peak gain of EUT is less than 6 dBi. Therefore, it is not necessary to reduce maximum peak output power limit.



## 4 List of Measuring Equipment

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Test Date	Due Date	Remark
Spectrum Analyzer	Rohde & Schwarz	FSP40	100055	9kHz~40GHz	Jun. 09, 2014	Dec. 09, 2014	Jun. 08, 2015	Conducted (TH02-HY)
Power Meter	Agilent	E4416A	GB412923 44	300MHz~40GHz	Jan. 28, 2014	Dec. 09, 2014	Jan. 27, 2015	Conducted (TH02-HY)
Power Sensor	Agilent	E9327A	US404415 48	300MHz~40GHz	Jan. 28, 2014	Dec. 09, 2014	Jan. 27, 2015	Conducted (TH02-HY)
EMI Test Receiver	Rohde & Schwarz	ESCI 7	100724	9 kHz~7 GHz	Aug. 30, 2014	Dec. 05, 2014 ~ Dec. 10, 2014	Aug. 29, 2015	Radiation (03CH07-HY)
Spectrum Analyzer	Rohde & Schwarz	FSV30	101749	10Hz ~ 30GHz	Feb. 10, 2014	Dec. 05, 2014 ~ Dec. 10, 2014	Feb. 09, 2015	Radiation (03CH07-HY)
Loop Antenna	R&S	HFH2-Z2	100315	9 kHz~30 MHz	Jul. 28, 2014	Dec. 05, 2014 ~ Dec. 10, 2014	Jul. 27, 2015	Radiation (03CH07-HY)
Bilog Antenna	Schaffner	CBL6111C	2726	30MHz ~ 1GHz	Sep. 27, 2014	Dec. 05, 2014 ~ Dec. 10, 2014	Sep. 26, 2015	Radiation (03CH07-HY)
Double Ridge Horn Antenna	ESCO	3117	75962	1GHz~18GHz	Aug. 19, 2014	Dec. 05, 2014 ~ Dec. 10, 2014	Aug. 18, 2015	Radiation (03CH07-HY)
SHF-EHF Horn Antenna	SCHWARZBECK	BBHA 9170	BBHA9170 251	18GHz~40GHz	Oct. 02, 2014	Dec. 05, 2014 ~ Dec. 10, 2014	Oct. 01, 2015	Radiation (03CH07-HY)
Preamplifier	COM-POWER	PA-103A	161241	10 MHz ~ 1000MHz	Mar. 17, 2014	Dec. 05, 2014 ~ Dec. 10, 2014	Mar. 16, 2015	Radiation (03CH07-HY)
Preamplifier	Agilent	8449B	3008A023 62	1 GHz~26.5 GHz	Oct. 21, 2014	Dec. 05, 2014 ~ Dec. 10, 2014	Oct. 20, 2015	Radiation (03CH07-HY)
Preamplifier	MITEQ	AMF-7D-0010 1800-30-10P	1590074	DC~18 GHz	Jul. 07, 2014	Dec. 05, 2014 ~ Dec. 10, 2014	Jul. 06, 2015	Radiation (03CH07-HY)
Preamplifier	MITEQ	AMF-7D-0010 1800-30-10P	1590075	DC~18 GHz	Apr. 21, 2014	Dec. 05, 2014 ~ Dec. 10, 2014	Apr. 20, 2015	Radiation (03CH07-HY)
Turn Table	ChainTek	ChainTek 3000	N/A	0 ~ 360 degree	N/A	Dec. 05, 2014 ~ Dec. 10, 2014	N/A	Radiation (03CH07-HY)
Antenna Mast	ChainTek	ChainTek 3000	N/A	N/A	N/A	Dec. 05, 2014 ~ Dec. 10, 2014	N/A	Radiation (03CH07-HY)
EMI Test Receiver	Rohde & Schwarz	ESCS 30	100356	9kHz ~ 2.75GHz	Nov. 12, 2014	Dec. 10, 2014	Nov. 11, 2015	Conduction (CO05-HY)
LISN (for auxiliary equipment)	Rohde & Schwarz	ENV216	100081	9kHz ~ 30MHz	Dec. 12, 2013	Dec. 10, 2014	Dec. 11, 2014	Conduction (CO05-HY)
LISN	Rohde & Schwarz	ENV216	100080	9kHz ~ 30MHz	Dec. 02, 2014	Dec. 10, 2014	Dec. 01, 2015	Conduction (CO05-HY)
AC Power Source	ChainTek	APC-1000W	N/A	N/A	N/A	Dec. 10, 2014	N/A	Conduction (CO05-HY)



## 5 Uncertainty of Evaluation

### Uncertainty of Conducted Emission Measurement (150 kHz ~ 30 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ( $U = 2Uc(y)$ )	2.26
---	------

### Uncertainty of Radiated Emission Measurement (30 MHz ~ 1000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ( $U = 2Uc(y)$ )	4.50
---	------



## Appendix A. Radiated Spurious Emission

Test Engineer :	Derreck Chen	Temperature :	23~25°C
		Relative Humidity :	48~51%

### 15C 2.4GHz 2400~2483.5MHz

#### BLE (Band Edge @ 3m)

BLE	Note	Frequency	Level	Over	Limit	Read	Antenna	Cable	Preamp	Ant	Table	Peak	Pol.	
		( MHz )	( dBμV/m )	( dB )	Limit Line	Level	Factor	Loss	Factor	Pos	Pos	Avg.		
					( dBμV/m )	( dBμV )	( dB/m )	( dB )	( dB )	( cm )	( deg )	( P/A )	( H/V )	
BLE CH 00 2402MHz		2332.41	47.62	-26.38	74	42.91	32.09	6.84	34.22	100	0	P	H	
		2311.62	35.52	-18.48	54	30.84	32.07	6.8	34.19	100	0	A	H	
	*	2403.758	47.76	-	-	42.95	32.2	6.91	34.3	100	0	P	H	
	*	2402	34.54	-	-	29.75	32.18	6.91	34.3	100	0	P	H	
													H	
														H
			2366.07	48.04	-25.96	74	43.31	32.13	6.87	34.27	100	0	P	V
			2362.65	35.74	-18.26	54	30.99	32.13	6.87	34.25	100	0	A	V
	*		2402	44.71	-	-	39.92	32.18	6.91	34.3	100	0	P	V
	*		2402.004	34.42	-	-	29.63	32.18	6.91	34.3	100	0	P	V
														V
													V	
BLE CH 19 2440MHz		2359.77	47.89	-26.11	74	43.14	32.13	6.87	34.25	100	0	P	H	
		2362.29	35.41	-18.59	54	30.66	32.13	6.87	34.25	100	0	A	H	
	*	2440	45.31	-	-	40.47	32.24	6.95	34.35	100	0	P	H	
	*	2440	34.55	-	-	29.71	32.24	6.95	34.35	100	0	P	H	
			2491.08	47.66	-26.34	74	42.79	32.3	7	34.43	100	0	P	H
			2486.32	35.55	-18.45	54	30.7	32.28	7	34.43	100	0	A	H
			2340.24	47.43	-26.57	74	42.73	32.11	6.84	34.25	100	0	P	V
			2357.52	35.53	-18.47	54	30.78	32.13	6.87	34.25	100	0	A	V
	*		2440	45.61	-	-	40.77	32.24	6.95	34.35	100	0	P	V
	*		2440	34.55	-	-	29.71	32.24	6.95	34.35	100	0	P	V
			2484.88	47.88	-26.12	74	43.03	32.28	7	34.43	100	0	P	V
		2498.32	35.58	-18.42	54	30.76	32.3	7	34.48	100	0	A	V	



BLE	Note	Frequency	Level	Over	Limit	Read	Antenna	Cable	Preamp	Ant	Table	Peak	Pol.	
		( MHz )	( dBμV/m )	( dB )	( dBμV/m )	( dBμV )	( dB/m )	( dB )	( dB )	( cm )	( deg )	(P/A)	(H/V)	
BLE CH 39 2480MHz	*	2480	44.89	-	-	40.04	32.28	7	34.43	100	0	P	H	
	*	2480	34.63	-	-	29.78	32.28	7	34.43	100	0	P	H	
		2494.68	47.59	-26.41	74	42.77	32.3	7	34.48	100	0	P	H	
		2485.04	35.56	-18.44	54	30.71	32.28	7	34.43	100	0	A	H	
													H	
													H	
	*	2480	44.73	-	-	39.88	32.28	7	34.43				P	V
	*	2480	34.88	-	-	30.03	32.28	7	34.43				P	V
		2493.4	48.12	-25.88	74	43.3	32.3	7	34.48	100	0	P	V	
		2486	35.69	-18.31	54	30.84	32.28	7	34.43	100	0	A	V	
													V	
													V	
<b>Remark</b>	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.													





15C 2.4GHz 2400~2483.5MHz

BLE (Harmonic @ 3m)

BLE	Note	Frequency	Level	Over	Limit	Read	Antenna	Cable	Preamp	Ant	Table	Peak	Pol.	
				Limit	Line	Level	Factor	Loss	Factor	Pos	Pos	Avg.		
		( MHz )	( dBμV/m )	( dB )	( dBμV/m )	( dBμV )	( dB/m )	( dB )	( dB )	( cm )	( deg )	( P/A )	( H/V )	
BLE CH 00 2402MHz		4806	40.73	-33.27	74	54.33	34.25	11.11	58.96	100	0	P	H	
													H	
													H	
													H	
		4804	41.78	-32.22	74	55.38	34.25	11.11	58.96	100	0	P	V	
														V
														V
														V
BLE CH 19 2440MHz		4880	40.75	-33.25	74	54.07	34.3	11.21	58.83	100	0	P	H	
		7320	42.52	-31.48	74	49.58	35.6	15.08	57.74	100	0	P	H	
													H	
													H	
		4880	41.8	-32.2	74	55.12	34.3	11.21	58.83	100	0	P	V	
		7320	43.01	-30.99	74	50.07	35.6	15.08	57.74	100	0	P	V	
														V
														V
BLE CH 39 2480MHz		4962	40.7	-33.3	74	53.67	34.37	11.32	58.66	100	0	P	H	
		7440	42.72	-31.28	74	49.84	35.6	15.13	57.85	100	0	P	H	
													H	
													H	
		4962	41.12	-32.88	74	54.09	34.37	11.32	58.66	100	0	P	V	
		7440	42.65	-31.35	74	49.77	35.6	15.13	57.85	100	0	P	V	
														V
														V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.													



15C Emission below 1GHz

2.4GHz BLE (LF)

BLE	Note	Frequency	Level	Over	Limit	Read	Antenna	Cable	Preamp	Ant	Table	Peak	Pol.	
		( MHz )	( dBμV/m )	( dB )	( dBμV/m )	( dBμV )	( dB/m )	( dB )	( dB )	( cm )	( deg )	(P/A)	(H/V)	
2.4GHz BLE LF		85.89	10.69	-29.31	40	31.51	8.22	2.06	31.1			P	H	
		153.12	21.71	-21.79	43.5	39.49	10.74	2.61	31.13			P	H	
		255.45	17.3	-28.7	46	32.14	13.2	2.96	31			P	H	
		358.1	18.28	-27.72	46	31.34	14.64	3.39	31.09			P	H	
		582.1	22.66	-23.34	46	29.67	19.58	4.08	30.67			P	H	
		874	26.96	-19.04	46	29.69	22.96	4.66	30.35	128	21	P	H	
													H	
													H	
													H	
													H	
													H	
													H	
			66.45	9.05	-30.95	40	32.07	6.16	2.06	31.24			P	V
			153.39	15.97	-27.53	43.5	33.76	10.74	2.61	31.14			P	V
			266.79	29.39	-16.61	46	44	13.23	3.16	31			P	V
			423.2	19.53	-26.47	46	29.93	16.76	3.63	30.79			P	V
			602.4	22.07	-23.93	46	28.93	19.66	4.08	30.6			P	V
			855.1	30.93	-15.07	46	33.37	23.25	4.7	30.39	189	61	P	V
													V	
													V	
													V	
													V	
													V	
													V	
Remark	1. No other spurious found. 2. All results are PASS against limit line.													



**Note symbol**

*	<b>Fundamental Frequency</b> which can be ignored. However, the level of any unwanted emissions shall not exceed the level of the fundamental frequency per 15.209(c).
!	Test result is <b>over limit</b> line.
P/A	<b>Peak</b> or <b>Average</b>
H/V	<b>Horizontal</b> or <b>Vertical</b>



A calculation example for radiated spurious emission is shown as below:

WIFI	Note	Frequency	Level	Over	Limit	Read	Antenna	Cable	Preamp	Ant	Table	Peak	Pol.
Ant.				Limit	Line	Level	Factor	Loss	Factor	Pos	Pos	Avg.	
1+2		( MHz )	( dBμV/m )	( dB )	( dBμV/m )	( dBμV )	( dB/m )	( dB )	( dB )	( cm )	( deg )	( P/A )	( H/V )
802.11b		2390	55.45	-18.55	74	54.51	32.22	4.58	35.86	103	308	P	H
CH 01													
2412MHz		2390	43.54	-10.46	54	42.6	32.22	4.58	35.86	103	308	A	H

- Level(dBμV/m) =  
Antenna Factor(dB/m) + Cable Loss(dB) + Read Level(dBμV) - Preamp Factor(dB)
- Over Limit(dB) = Level(dBμV/m) – Limit Line(dBμV/m)

**For Peak Limit @ 2390MHz:**

- Level(dBμV/m)  
= Antenna Factor(dB/m) + Cable Loss(dB) + Read Level(dBμV) - Preamp Factor(dB)  
= 32.22(dB/m) + 4.58(dB) + 54.51(dBμV) – 35.86 (dB)  
= 55.45 (dBμV/m)
- Over Limit(dB)  
= Level(dBμV/m) – Limit Line(dBμV/m)  
= 55.45(dBμV/m) – 74(dBμV/m)  
= -18.55(dB)

**For Average Limit @ 2390MHz:**

- Level(dBμV/m)  
= Antenna Factor(dB/m) + Cable Loss(dB) + Read Level(dBμV) - Preamp Factor(dB)  
= 32.22(dB/m) + 4.58(dB) + 42.6(dBμV) – 35.86 (dB)  
= 43.54 (dBμV/m)
- Over Limit(dB)  
= Level(dBμV/m) – Limit Line(dBμV/m)  
= 43.54(dBμV/m) – 54(dBμV/m)  
= -10.46(dB)

Both peak and average measured complies with the limit line, so test result is “PASS”.

## Appendix B. Setup Photographs

### <Conducted Emission>



<Radiated Emission>

LF



HF

