



SPORTON International Inc.

No. 52, Hwa Ya 1st Rd., Hwa Ya Technology Park, Kwei-Shan Hsiang, Tao Yuan Hsien, Taiwan, R.O.C.
Ph: 886-3-327-3456 / FAX: 886-3-327-0973 / www.sporton.com.tw

FCC RADIO TEST REPORT

Applicant's company	Hitron Technologies
Applicant Address	No.1-8, Lising 1st Rd. Hsinchu Science Park, Hsinchu 300, Taiwan
FCC ID	U4P-CGNVM
Manufacturer's company	Hitron Technologies
Manufacturer Address	No.1-8, Lising 1st Rd. Hsinchu Science Park, Hsinchu 300, Taiwan

Product Name	Wireless Cable Gateway
Brand Name	hitron
Model No.	CGNVM-XXXX
Test Rule Part(s)	47 CFR FCC Part 15 Subpart E § 15.407
Test Freq. Range	5150 ~ 5250 MHz / 5725 ~ 5850 MHz
Received Date	May 19, 2015
Final Test Date	Jun. 30, 2015
Submission Type	Original Equipment

Statement

Test result included is for the IEEE 802.11n and IEEE 802.11a/ac of the product.

The test result in this report refers exclusively to the presented test model / sample.

Without written approval of SPORTON International Inc., the test report shall not be reproduced except in full.

The measurements and test results shown in this test report were made in accordance with the procedures and found in compliance with the limit given in ANSI C63.10-2013, 47 CFR FCC Part 15 Subpart E, KDB789033 D02 v01, KDB662911 D01 v02r01, KDB644545 D03 v01.

The test equipment used to perform the test is calibrated and traceable to NML/ROC.



Table of Contents

1. VERIFICATION OF COMPLIANCE	1
2. SUMMARY OF THE TEST RESULT	2
3. GENERAL INFORMATION	3
3.1. Product Details.....	3
3.2. Accessories.....	4
3.3. Table for Filed Antenna.....	5
3.4. Table for Carrier Frequencies	6
3.5. Table for Test Modes	7
3.6. Table for Testing Locations.....	8
3.7. Table for Multiple List.....	9
3.8. Table for Supporting Units	9
3.9. Table for Parameters of Test Software Setting	9
3.10. EUT Operation during Test	9
3.11. Duty Cycle.....	10
3.12. Test Configurations	11
4. TEST RESULT	13
4.1. AC Power Line Conducted Emissions Measurement.....	13
4.2. 26dB Bandwidth and 99% Occupied Bandwidth Measurement.....	17
4.3. 6dB Spectrum Bandwidth Measurement	28
4.4. Maximum Conducted Output Power Measurement.....	33
4.5. Power Spectral Density Measurement	36
4.6. Radiated Emissions Measurement	44
4.7. Band Edge Emissions Measurement	69
4.8. Frequency Stability Measurement	78
4.9. Antenna Requirements	82
5. LIST OF MEASURING EQUIPMENTS	83
6. MEASUREMENT UNCERTAINTY	85
APPENDIX A. TEST PHOTOS	A1 ~ A5
APPENDIX B. MAXIMUM PERMISSIBLE EXPOSURE	B1 ~ B3
APPENDIX C. RADIATED EMISSION CO-LOCATION REPORT	C1 ~ C3



History of This Test Report

REPORT NO.	VERSION	DESCRIPTION	ISSUED DATE
FR562321AB	Rev. 01	Initial issue of report	Sep. 01, 2015



1. VERIFICATION OF COMPLIANCE

Product Name : Wireless Cable Gateway
Brand Name : hitron
Model No. : CGNVM-XXXX
Applicant : Hitron Technologies
Test Rule Part(s) : 47 CFR FCC Part 15 Subpart E § 15.407

Sporton International as requested by the applicant to evaluate the EMC performance of the product sample received on May 19, 2015 would like to declare that the tested sample has been evaluated and found to be in compliance with the tested rule parts. The data recorded as well as the test configuration specified is true and accurate for showing the sample's EMC nature.

A handwritten signature in black ink, appearing to read "Sam Chen", is written over a horizontal line.

Sam Chen

SPORTON INTERNATIONAL INC.

2. SUMMARY OF THE TEST RESULT

Applied Standard: 47 CFR FCC Part 15 Subpart E				
Part	Rule Section	Description of Test	Result	Under Limit
4.1	15.207	AC Power Line Conducted Emissions	Complies	7.40 dB
4.2	15.407(a)	26dB Spectrum Bandwidth and 99% Occupied Bandwidth	Complies	-
4.3	15.407(e)	6dB Spectrum Bandwidth	Complies	-
4.4	15.407(a)	Maximum Conducted Output Power	Complies	1.12 dB
4.5	15.407(a)	Power Spectral Density	Complies	0.08 dB
4.6	15.407(b)	Radiated Emissions	Complies	0.02 dB
4.7	15.407(b)	Band Edge Emissions	Complies	0.07 dB
4.8	15.407(g)	Frequency Stability	Complies	-
4.9	15.203	Antenna Requirements	Complies	-

3. GENERAL INFORMATION

3.1. Product Details

Items	Description
Product Type	WLAN (3TX, 3RX)
Radio Type	Intentional Transceiver
Power Type	From AC Power
Modulation	IEEE 802.11a: OFDM IEEE 802.11n/ac: see the below table
Data Modulation	IEEE 802.11a/n: OFDM (BPSK / QPSK / 16QAM / 64QAM) IEEE 802.11ac: OFDM (BPSK / QPSK / 16QAM / 64QAM / 256QAM)
Data Rate (Mbps)	IEEE 802.11a: OFDM (6/9/12/18/24/36/48/54) IEEE 802.11n/ac: see the below table
Frequency Range	5150 ~ 5250 MHz / 5725 ~ 5850 MHz
Channel Number	9 for 20MHz bandwidth ; 4 for 40MHz bandwidth 2 for 80MHz bandwidth
Channel Band Width (99%)	Band 1: IEEE 802.11a: 16.93 MHz IEEE 802.11ac MCS0/Nss1 (VHT20): 18.41 MHz IEEE 802.11ac MCS0/Nss1 (VHT40): 37.19 MHz IEEE 802.11ac MCS0/Nss1 (VHT80): 75.83 MHz Band 4: IEEE 802.11a: 17.45 MHz IEEE 802.11ac MCS0/Nss1 (VHT20): 18.49 MHz IEEE 802.11ac MCS0/Nss1 (VHT40): 38.06 MHz IEEE 802.11ac MCS0/Nss1 (VHT80): 76.12 MHz
Maximum Conducted Output Power	Band 1: IEEE 802.11a: 27.30 dBm IEEE 802.11ac MCS0/Nss1 (VHT20): 27.23 dBm IEEE 802.11ac MCS0/Nss1 (VHT40): 28.88 dBm IEEE 802.11ac MCS0/Nss1 (VHT80): 20.02 dBm Band 4: IEEE 802.11a: 28.74 dBm IEEE 802.11ac MCS0/Nss1 (VHT20): 28.72 dBm IEEE 802.11ac MCS0/Nss1 (VHT40): 25.87 dBm IEEE 802.11ac MCS0/Nss1 (VHT80): 18.56 dBm
Carrier Frequencies	Please refer to section 3.4
Antenna	Please refer to section 3.3

Items	Description	
Communication Mode	<input checked="" type="checkbox"/> IP Based (Load Based)	<input type="checkbox"/> Frame Based
Beamforming Function	<input type="checkbox"/> With beamforming	<input checked="" type="checkbox"/> Without beamforming
Operating Mode	<input type="checkbox"/> Outdoor access point	
	<input checked="" type="checkbox"/> Indoor access point	
	<input type="checkbox"/> Fixed point-to-point access points	
	<input type="checkbox"/> Mobile and portable client devices	

Antenna and Band width

Antenna	Three (TX)		
	20 MHz	40 MHz	80 MHz
IEEE 802.11a	V	X	X
IEEE 802.11n	V	V	X
IEEE 802.11ac	V	V	V

IEEE 11n/ac Spec.

Protocol	Number of Transmit Chains (NTX)	Data Rate / MCS
802.11n (HT20)	3	MCS 0-23
802.11n (HT40)	3	MCS 0-23
802.11ac (VHT20)	3	MCS 0-9/Nss1-3
802.11ac (VHT40)	3	MCS 0-9/Nss1-3
802.11ac (VHT80)	3	MCS 0-9/Nss1-3

Note 1: IEEE Std. 802.11n modulation consists of HT20 and HT40 (HT: High Throughput).

Then EUT supports HT20 and HT40.

Note 2: IEEE Std. 802.11ac modulation consists of VHT20, VHT40, VHT80 and VHT160 (VHT: Very High Throughput). Then EUT supports VHT20, VHT40 and VHT80.

Note 3: Modulation modes consist of below configuration:

HT20/HT40: IEEE 802.11n, VHT20/VHT40/VHT80: IEEE 802.11ac

3.2. Accessories

Power Cable*1: Non-Shielded, 1.8m

3.3. Table for Filed Antenna

Ant.	Brand	P/N	Antenna Type	Connector	Gain (dBi)		
					2.4GHz	5GHz	
						Band 1	Band 4
1	Airgian	M2445J-T6-G100U	PIFA Ant.	I-PEX	3.1	-	-
2	Airgian	M2445J-T6-G100U	PIFA Ant.	I-PEX	3.4	-	-
3	Airgian	M2445J-T6-G100U	PIFA Ant.	I-PEX	2.9	-	-
4	Airgian	M5X10CM-T6-G100U	PIFA Ant.	I-PEX	-	2.4	4.5
5	Airgian	M5X10CM-T6-G100U	PIFA Ant.	I-PEX	-	3.8	3.7
6	Airgian	M5X10CM-T6-G100U	PIFA Ant.	I-PEX	-	4.1	5.8

Note: The EUT has six antennas.

<For 2.4GHz>

For IEEE 802.11b/g/n mode (3TX/3RX)

Chain 1, Chain 2 and Chain 3 can be used as transmitting/receiving antenna.



Chain 1, Chain 2 and Chain 3 could transmit/receive simultaneously.

<For 5GHz>

For IEEE 802.11a/n/ac mode (3TX/3RX)

Chain 4, Chain 5 and Chain 6 can be used as transmitting/receiving antenna.

Chain 4, Chain 5 and Chain 6 could transmit/receive simultaneously.

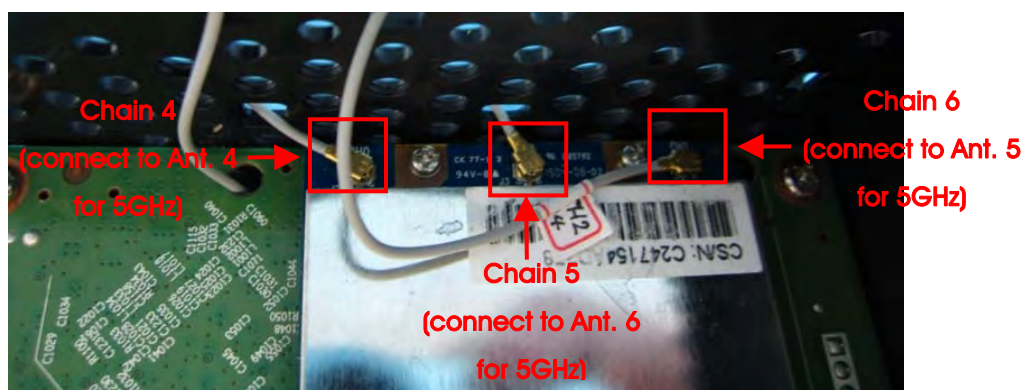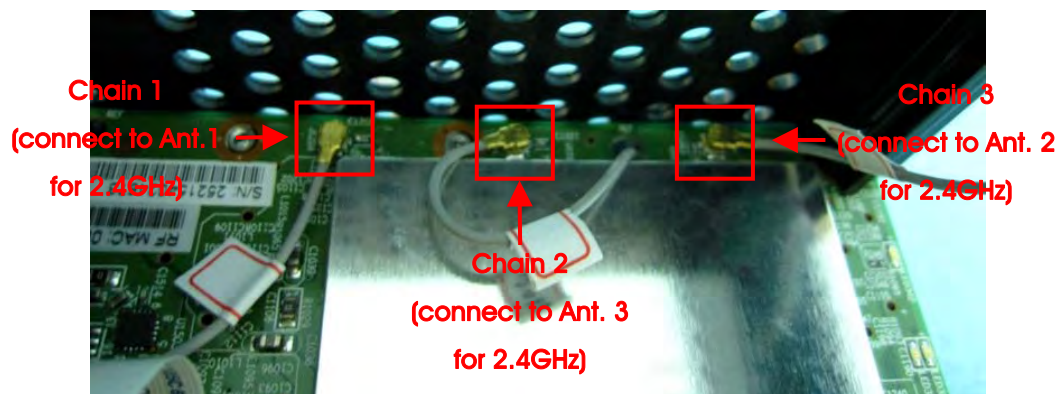

3.4. Table for Carrier Frequencies

There are three bandwidth systems.

For 20MHz bandwidth systems, use Channel 36, 40, 44, 48, 149, 153, 157, 161, 165.

For 40MHz bandwidth systems, use Channel 38, 46, 151, 159.

For 80MHz bandwidth systems, use Channel 42, 155.

Frequency Band	Channel No.	Frequency	Channel No.	Frequency
5150~5250 MHz Band 1	36	5180 MHz	44	5220 MHz
	38	5190 MHz	46	5230 MHz
	40	5200 MHz	48	5240 MHz
	42	5210 MHz	-	-
5725~5850 MHz Band 4	149	5745 MHz	157	5785 MHz
	151	5755 MHz	159	5795 MHz
	153	5765 MHz	161	5805 MHz
	155	5775 MHz	165	5825 MHz

3.5. Table for Test Modes

Preliminary tests were performed in different data rate to find the worst radiated emission. The data rate shown in the table below is the worst-case rate with respect to the specific test item. Investigation has been done on all the possible configurations for searching the worst cases. The following table is a list of the test modes shown in this test report.

Test Items	Mode		Data Rate	Channel	Chain
AC Power Conducted Emission	CTX		-	-	-
Max. Conducted Output Power	11a/BPSK	Band 1&4	6Mbps	36/40/48/149/1 57/165	4+5+6
	11ac VHT20	Band 1&4	MCS0/Nss1	36/40/48/149/1 57/165	4+5+6
	11ac VHT40	Band 1&4	MCS0/Nss1	38/46/151/159	4+5+6
	11ac VHT80	Band 1&4	MCS0/Nss1	42/155	4+5+6
Power Spectral Density	11a/BPSK	Band 1&4	6Mbps	36/40/48/149/1 57/165	4+5+6
	11ac VHT20	Band 1&4	MCS0/Nss1	36/40/48/149/1 57/165	4+5+6
	11ac VHT40	Band 1&4	MCS0/Nss1	38/46/151/159	4+5+6
	11ac VHT80	Band 1&4	MCS0/Nss1	42/155	4+5+6
26dB Spectrum Bandwidth & 99% Occupied Bandwidth Measurement	11a/BPSK	Band 1&4	6Mbps	36/40/48/149/1 57/165	4+5+6
	11ac VHT20	Band 1&4	MCS0/Nss1	36/40/48/149/1 57/165	4+5+6
	11ac VHT40	Band 1&4	MCS0/Nss1	38/46/151/159	4+5+6
	11ac VHT80	Band 1&4	MCS0/Nss1	42/155	4+5+6
6dB Spectrum Bandwidth Measurement	11a/BPSK	Band 4	6Mbps	149/157/165	4+5+6
	11ac VHT20	Band 4	MCS0/Nss1	149/157/165	4+5+6
	11ac VHT40	Band 4	MCS0/Nss1	151/159	4+5+6
	11ac VHT80	Band 4	MCS0/Nss1	155	4+5+6
Radiated Emission Below 1GHz	CTX		-	-	-
Radiated Emission Above 1GHz	11a/BPSK	Band 1&4	6Mbps	36/40/48/149/1 57/165	4+5+6
	11ac VHT20	Band 1&4	MCS0/Nss1	36/40/48/149/1 57/165	4+5+6
	11ac VHT40	Band 1&4	MCS0/Nss1	38/46/151/159	4+5+6
	11ac VHT80	Band 1&4	MCS0/Nss1	42/155	4+5+6

Band Edge Emission	11a/BPSK	Band 1&4	6Mbps	36/40/48/149/1 57/165	4+5+6
	11ac VHT20	Band 1&4	MCS0/Nss1	36/40/48/149/1 57/165	4+5+6
	11ac VHT40	Band 1&4	MCS0/Nss1	38/46/151/159	4+5+6
	11ac VHT80	Band 1&4	MCS0/Nss1	42/155	4+5+6
Frequency Stability	20 MHz	Band 1&4	-	40/157	4+5+6
	40 MHz	Band 1&4	-	38/151	4+5+6
	80 MHz	Band 1&4	-	42/155	4+5+6

Note 1: The EUT can only be used at Y axis.

Note 2: VHT20/VHT40 covers HT20/HT40, due to same modulation. The power setting for 802.11n HT20 and HT40 are the same or lower than 802.11ac VHT20 and VHT40.

The following test modes were performed for all tests:

For Conducted Emission test:

Mode 1. Place EUT in Y axis

For Radiated Emission test<Below 1GHz>:

Mode 1. Place EUT in Y axis (2.4GHz)

Mode 2. Place EUT in Y axis (5GHz)

Mode 1 is the worst case, so it was selected to record in this test report.

For Radiated Emission test<Above 1GHz>:

Mode 1. Place EUT in Y axis

For Co-location MPE and Radiated Emission Co-location Test:

The EUT could be applied with 2.4GHz WLAN function and 5GHz WLAN function; therefore Co-location Maximum Permissible Exposure (Please refer to Appendix B) and Radiated Emission Co-location (please refer to Appendix C) tests are added for simultaneously transmit between 2.4GHz WLAN function and 5GHz WLAN function.

3.6. Table for Testing Locations

Test Site Location					
Address:	No.8, Lane 724, Bo-ai St., Jhubei City, Hsinchu County 302, Taiwan, R.O.C.				
TEL:	886-3-656-9065				
FAX:	886-3-656-9085				
Test Site No.	Site Category	Location	FCC Reg. No.	IC File No.	VCCI Reg. No
03CH01-CB	SAC	Hsin Chu	262045	IC 4086D	-
CO01-CB	Conduction	Hsin Chu	262045	IC 4086D	-
TH01-CB	OVEN Room	Hsin Chu	-	-	-

Open Area Test Site (OATS); Semi Anechoic Chamber (SAC).

3.7. Table for Multiple List

The model number detail information for the following table:

Model No.	Description
CGNVM-XXXX	Where XXXX=any alpha character "a"-“z”, “A”-“Z”, or numeric character “0”-“9”, or combination of alpha and numeric characters.

3.8. Table for Supporting Units

Support Unit	Brand	Model	FCC ID
NB	DELL	E4300	DoC

3.9. Table for Parameters of Test Software Setting

During testing, Channel and Power Controlling Software provided by the customer was used to control the operating channel as well as the output power level. The RF output power selection is for the setting of RF output power expected by the customer and is going to be fixed on the firmware of the final end product.

Test Software Version	ART2-GUI 2.3					
Mode	Test Frequency (MHz)					
	NCB: 20MHz					
	5180 MHz	5200 MHz	5240 MHz	5745 MHz	5785 MHz	5825 MHz
802.11a	19	21	21	19	23	20
802.11ac MCS0/Nss1 VHT20	18.5	21	21	18.5	23	19
Mode	NCB: 40MHz					
	5190 MHz	5230 MHz		5755 MHz	5795 MHz	
802.11ac MCS0/Nss1 VHT40	18	23		17	20	
Mode	NCB: 80MHz					
	5210 MHz			5775 MHz		
802.11ac MCS0/Nss1 VHT80	15			13.5		

3.10. EUT Operation during Test


The EUT was programmed to be in continuously transmitting mode.

3.11. Duty Cycle

Mode	On Time (ms)	On+Off Time (ms)	Duty Cycle (%)	Duty Factor (dB)	1/T Minimum VBW (kHz)
802.11a	2.028	2.084	97.31%	0.12	0.49
802.11ac MCS0/Nss1 VHT20	1.910	2.010	95.02%	0.22	0.52
802.11ac MCS0/Nss1 VHT40	0.914	0.992	92.14%	0.36	1.09
802.11ac MCS0/Nss1 VHT80	0.428	0.524	81.68%	0.88	2.34


3.12. Test Configurations

3.12.1. AC Power Line Conduction Emissions Test Configuration

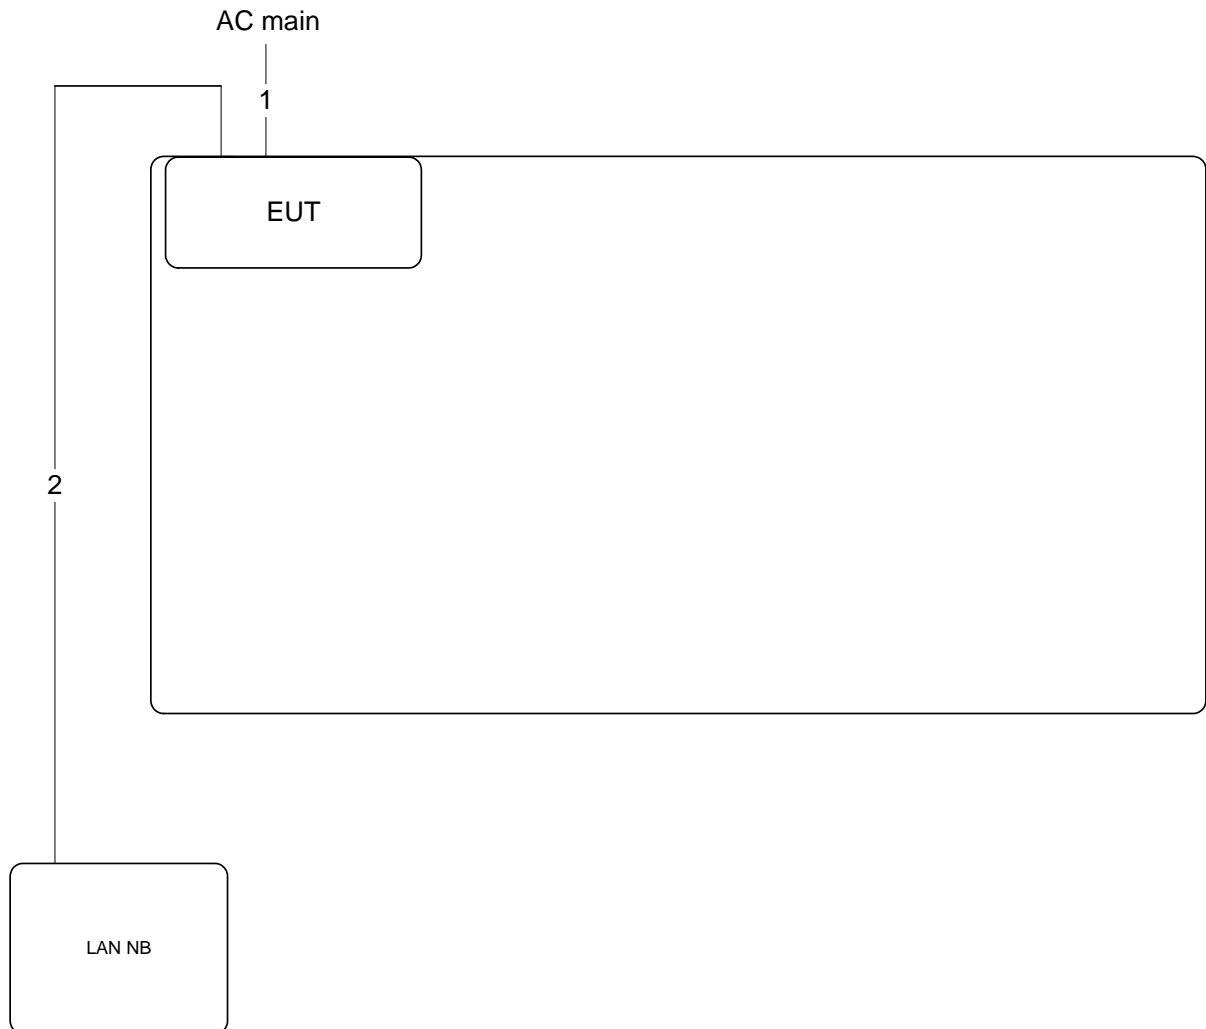

Item	Connection	Shielded	Length
1	Power cable	No	1.8m
2	RJ-45 cable	No	10m

3.12.2. Radiation Emissions Test Configuration

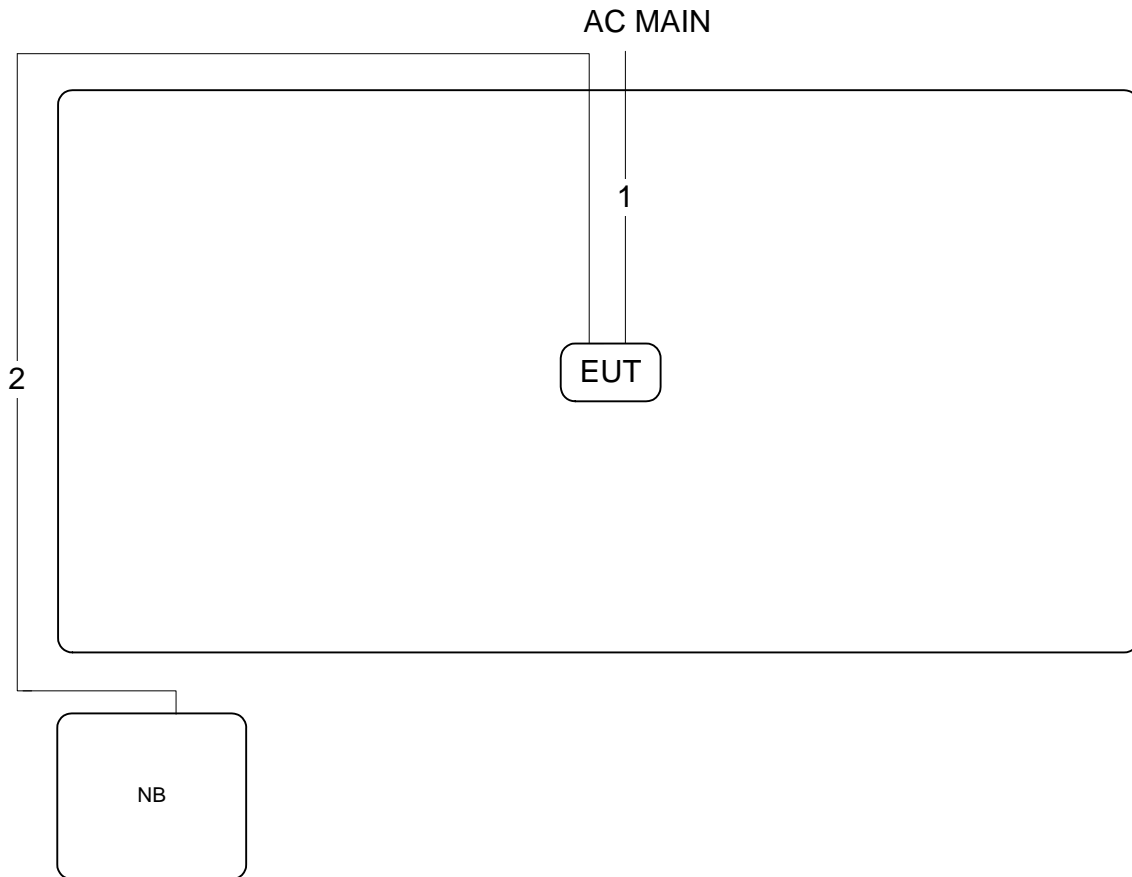

Item	Connection	Shielded	Length(m)
1	Power cable	No	1.8m
2	RJ-45 cable	No	10m

4. TEST RESULT

4.1. AC Power Line Conducted Emissions Measurement

4.1.1. Limit

For this product that is designed to connect to the AC power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed below limits table.

Frequency (MHz)	QP Limit (dBuV)	AV Limit (dBuV)
0.15~0.5	66~56	56~46
0.5~5	56	46
5~30	60	50

4.1.2. Measuring Instruments and Setting


Please refer to section 5 of equipments list in this report. The following table is the setting of the receiver.

Receiver Parameters	Setting
Attenuation	10 dB
Start Frequency	0.15 MHz
Stop Frequency	30 MHz
IF Bandwidth	9 kHz

4.1.3. Test Procedures

1. Configure the EUT according to ANSI C63.10. The EUT or host of EUT has to be placed 0.4 meter far from the conducting wall of the shielding room and at least 80 centimeters from any other grounded conducting surface.
2. Connect EUT or host of EUT to the power mains through a line impedance stabilization network (LISN).
3. All the support units are connected to the other LISNs. The LISN should provide 50uH/50ohms coupling impedance.
4. The frequency range from 150 kHz to 30 MHz was searched.
5. Set the test-receiver system to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
6. The measurement has to be done between each power line and ground at the power terminal.

4.1.4. Test Setup Layout

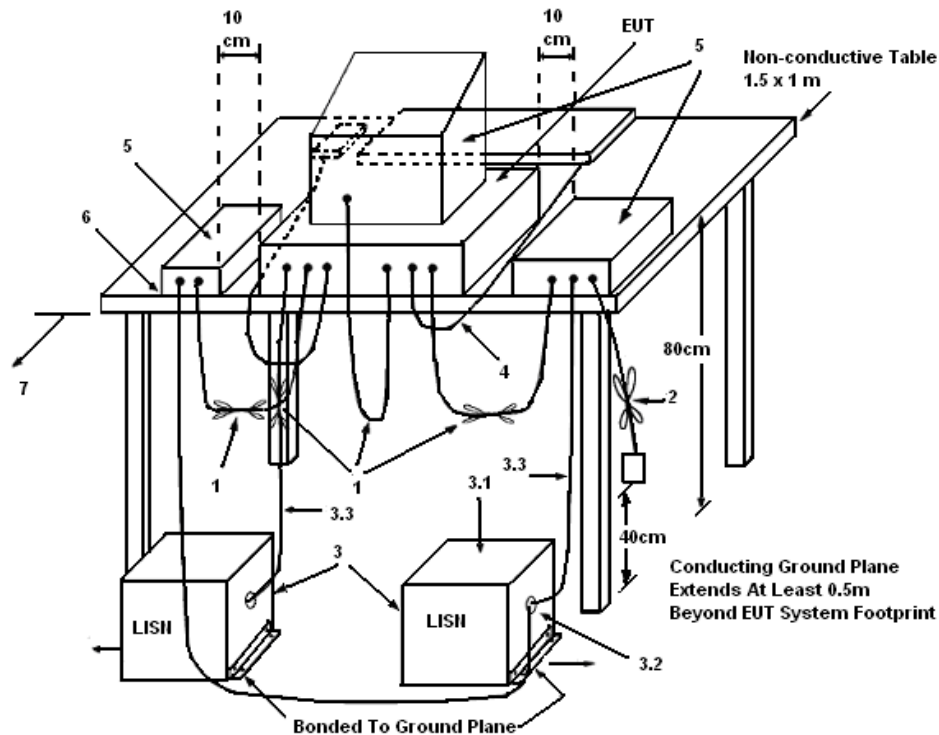

LEGEND:

- (1) Interconnecting cables that hang closer than 40 cm to the ground plane shall be folded back and forth in the center forming a bundle 30 to 40 cm long.
- (2) I/O cables that are not connected to a peripheral shall be bundled in the center. The end of the cable may be terminated, if required, using the correct terminating impedance. The overall length shall not exceed 1 m.
- (3) EUT connected to one LISN. Unused LISN measuring port connectors shall be terminated in 50 Ω . LISN can be placed on top of, or immediately beneath, reference ground plane.
 - (3.1) All other equipment powered from additional LISN(s).
 - (3.2) Multiple outlet strip can be used for multiple power cords of non-EUT equipment.
 - (3.3) LISN at least 80 cm from nearest part of EUT chassis.
- (4) Cables of hand-operated devices, such as keyboards, mice, etc., shall be placed as for normal use.
- (5) Non-EUT components of EUT system being tested.
- (6) Rear of EUT, including peripherals, shall all be aligned and flush with rear of tabletop.
- (7) Rear of tabletop shall be 40 cm removed from a vertical conducting plane that is bonded to the ground plane.

4.1.5. Test Deviation


There is no deviation with the original standard.

4.1.6. EUT Operation during Test

The EUT was placed on the test table and programmed in normal function.


4.1.7. Results of AC Power Line Conducted Emissions Measurement

Temperature	21°C	Humidity	57%
Test Engineer	Ryo Fan	Phase	Line
Configuration	CTX		

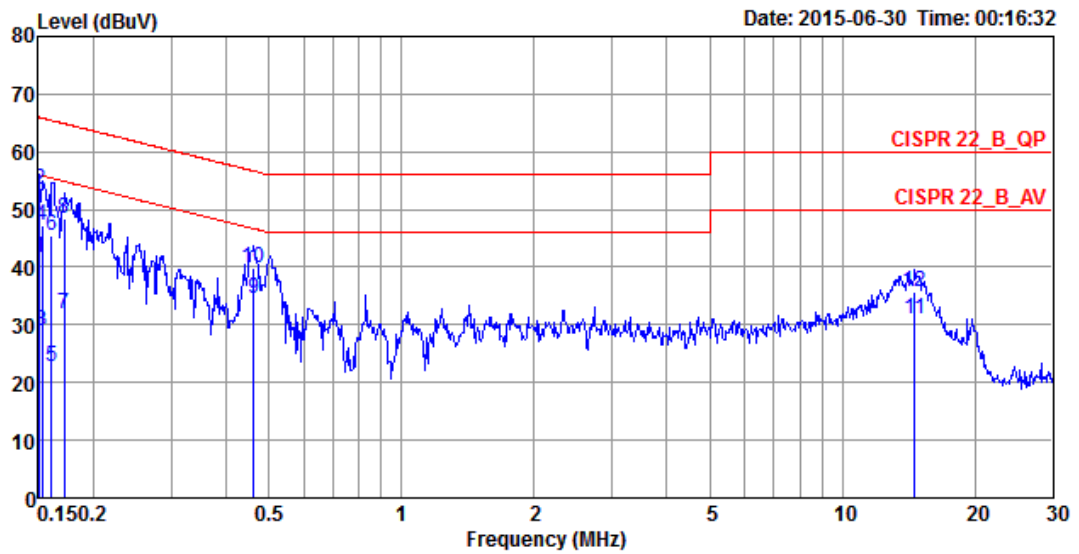

	Freq	Level	Over Limit	Limit Line	Read Level	LISM Factor	Cable Loss	Pol/Phase	Remark
	MHz	dBuV	dB	dBuV	dBuV	dB	dB		
1	0.1508	41.74	-14.22	55.96	31.79	9.93	0.02	LINE	Average
2	0.1508	53.50	-12.46	65.96	43.55	9.93	0.02	LINE	QP
3	0.1532	28.95	-26.87	55.82	19.00	9.93	0.02	LINE	Average
4	0.1532	47.30	-18.52	65.82	37.35	9.93	0.02	LINE	QP
5	0.1607	22.72	-32.71	55.43	12.77	9.93	0.02	LINE	Average
6	0.1607	45.34	-20.09	65.43	35.39	9.93	0.02	LINE	QP
7	0.1712	31.92	-22.98	54.90	21.97	9.93	0.02	LINE	Average
8	0.1712	48.44	-16.46	64.90	38.49	9.93	0.02	LINE	QP
9	0.4612	34.59	-12.08	46.67	24.62	9.93	0.04	LINE	Average
10	0.4612	39.95	-16.72	56.67	29.98	9.93	0.04	LINE	QP
11	14.5942	30.97	-19.03	50.00	20.39	10.32	0.26	LINE	Average
12	14.5942	35.82	-24.18	60.00	25.24	10.32	0.26	LINE	QP

Temperature	21°C	Humidity	57%
Test Engineer	Ryo Fan	Phase	Neutral
Configuration	CTX		

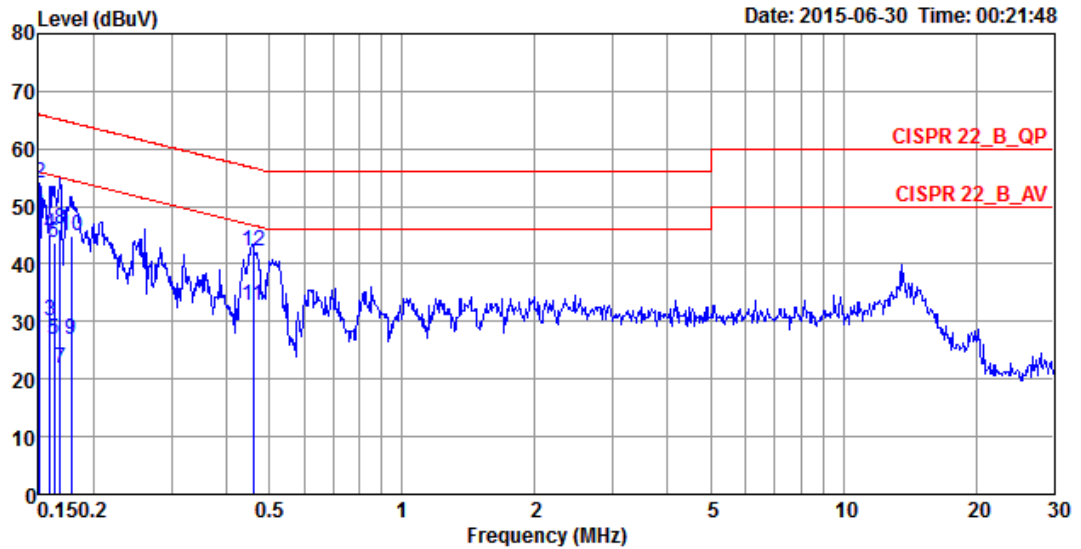

	Freq	Level	Over Limit	Limit Line	Read Level	LISN Factor	Cable Loss	Pol/Phase	Remark
	MHz	dBuV	dB	dBuV	dBuV	dB	dB		
1	0.1508	48.56	-7.40	55.96	38.76	9.78	0.02	NEUTRAL	Average
2	0.1508	54.09	-11.87	65.96	44.29	9.78	0.02	NEUTRAL	QP
3	0.1590	30.04	-25.48	55.52	20.24	9.78	0.02	NEUTRAL	Average
4	0.1590	45.07	-20.45	65.52	35.27	9.78	0.02	NEUTRAL	QP
5	0.1624	26.97	-28.37	55.34	17.17	9.78	0.02	NEUTRAL	Average
6	0.1624	43.65	-21.69	65.34	33.85	9.78	0.02	NEUTRAL	QP
7	0.1677	21.86	-33.22	55.08	12.06	9.78	0.02	NEUTRAL	Average
8	0.1677	46.10	-18.98	65.08	36.30	9.78	0.02	NEUTRAL	QP
9	0.1777	26.89	-27.70	54.59	17.08	9.79	0.02	NEUTRAL	Average
10	0.1777	44.93	-19.66	64.59	35.12	9.79	0.02	NEUTRAL	QP
11	0.4588	32.91	-13.80	46.71	23.08	9.79	0.04	NEUTRAL	Average
12	0.4588	42.33	-14.38	56.71	32.50	9.79	0.04	NEUTRAL	QP

Note:

Level = Read Level + LISN Factor + Cable Loss.

4.2. 26dB Bandwidth and 99% Occupied Bandwidth Measurement

4.2.1. Limit

No restriction limits.

4.2.2. Measuring Instruments and Setting

Please refer to section 5 of equipments list in this report. The following table is the setting of the spectrum analyzer.

26dB Bandwidth	
Spectrum Parameters	Setting
Attenuation	Auto
Span Frequency	> 26dB Bandwidth
RBW	Approximately 1% of the emission bandwidth
VBW	VBW > RBW
Detector	Peak
Trace	Max Hold
Sweep Time	Auto
99% Occupied Bandwidth	
Spectrum Parameters	Setting
Span	1.5 times to 5.0 times the OBW
RBW	1 % to 5 % of the OBW
VBW	$\geq 3 \times \text{RBW}$
Detector	Peak
Trace	Max Hold

4.2.3. Test Procedures

For Radiated 26dB Bandwidth and 99% Occupied Bandwidth Measurement:

1. The transmitter was radiated to the spectrum analyzer in peak hold mode.
2. Measure the maximum width of the emission that is 26 dB down from the peak of the emission. Compare this with the RBW setting of the analyzer. Readjust RBW and repeat measurement as needed until the RBW/EBW ratio is approximately 1%.

4.2.4. Test Setup Layout

For Radiated 26dB Bandwidth and 99% Occupied Bandwidth Measurement:

This test setup layout is the same as that shown in section 4.6.4.

4.2.5. Test Deviation

There is no deviation with the original standard.

4.2.6. EUT Operation during Test


The EUT was programmed to be in continuously transmitting mode.

4.2.7. Test Result of 26dB Bandwidth and 99% Occupied Bandwidth

Temperature	25°C	Humidity	45%
Test Engineer	Lucas Huang		


Mode	Frequency	26dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)
802.11a	5180 MHz	21.57	16.93
	5200 MHz	22.26	16.93
	5240 MHz	23.83	16.58
	5745 MHz	20.78	16.85
	5785 MHz	25.91	17.45
	5825 MHz	21.13	16.85
802.11ac MCS0/Nss1 VHT20	5180 MHz	22.96	18.41
	5200 MHz	25.91	17.89
	5240 MHz	24.09	18.06
	5745 MHz	21.22	17.45
	5785 MHz	30.09	17.89
	5825 MHz	22.96	18.49
802.11ac MCS0/Nss1 VHT40	5190 MHz	44.93	36.76
	5230 MHz	64.20	37.19
	5755 MHz	40.29	34.44
	5795 MHz	44.93	38.06
802.11ac MCS0/Nss1 VHT80	5210 MHz	89.28	75.83
	5775 MHz	86.09	76.12

26dB Bandwidth and 99% Occupied Bandwidth Plot on Configuration IEEE 802.11a / Chain 4 + Chain 5 + Chain 6 / 5180 MHz

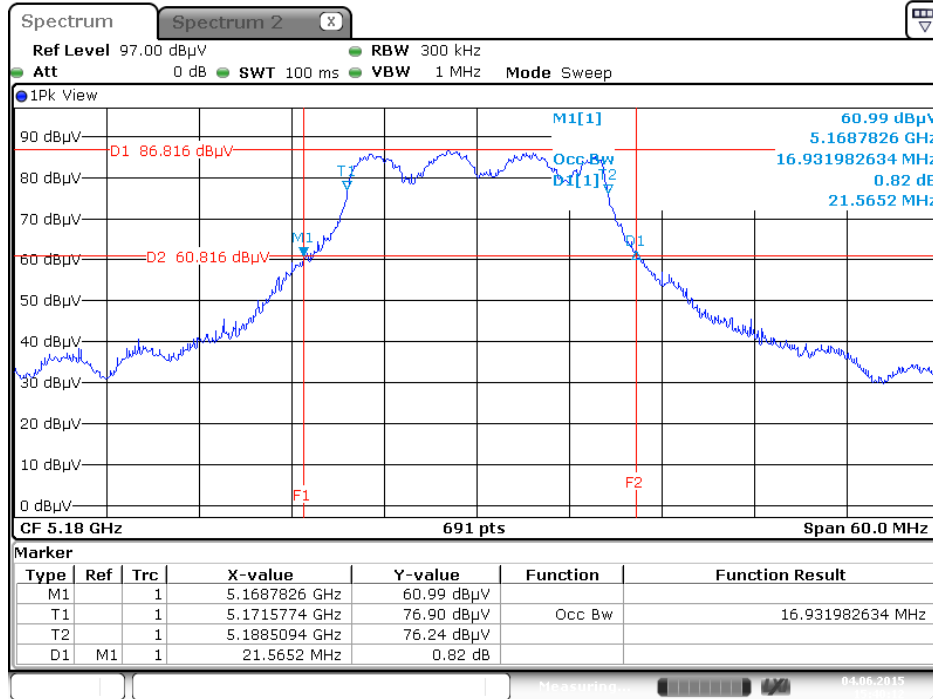


Date: 4 JUN .2015 15:40:12

26dB Bandwidth and 99% Occupied Bandwidth Plot on Configuration IEEE 802.11a / Chain 4 + Chain 5 + Chain 6 / 5200 MHz

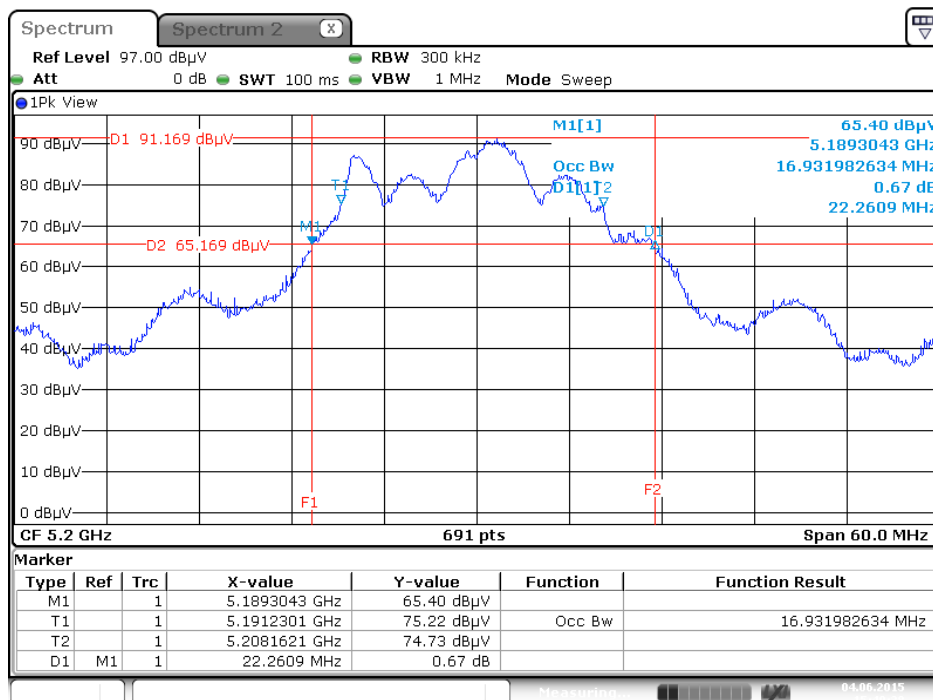


Date: 4 JUN .2015 15:40:38

26dB Bandwidth and 99% Occupied Bandwidth Plot on Configuration IEEE 802.11a / Chain 4 + Chain 5 + Chain 6 / 5240 MHz

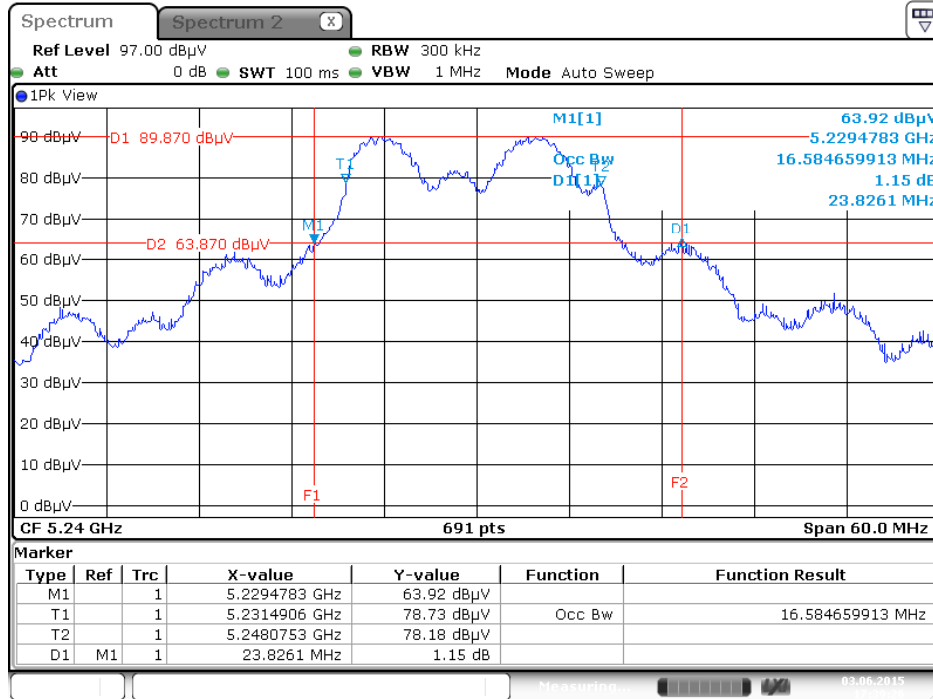


Date: 3 JUN 2015 17:39:26

26dB Bandwidth and 99% Occupied Bandwidth Plot on Configuration IEEE 802.11a / Chain 4 + Chain 5 + Chain 6 / 5745 MHz

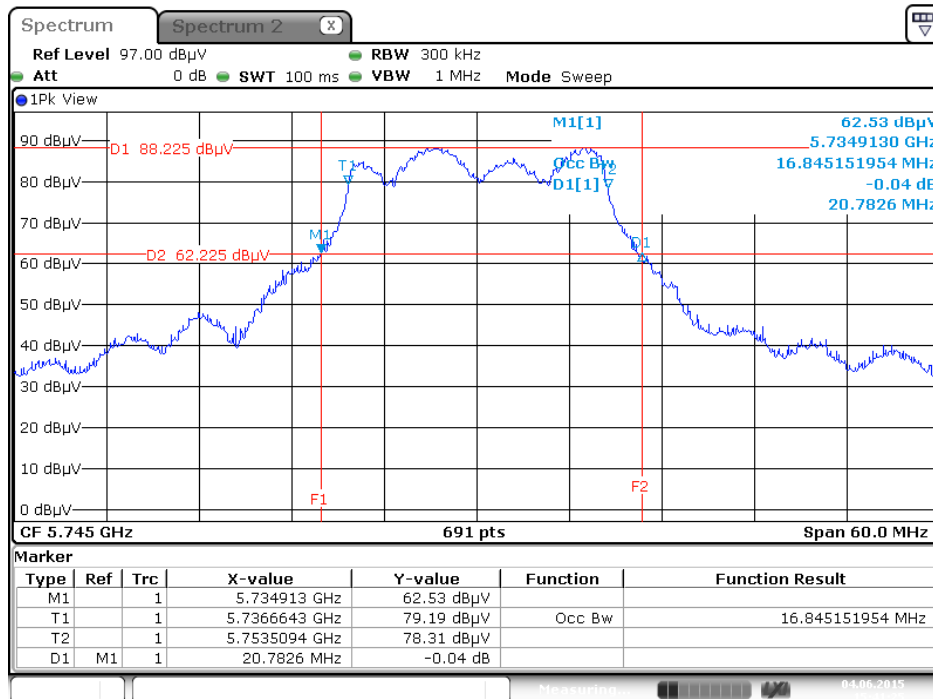


Date: 4 JUN 2015 15:41:25


26dB Bandwidth and 99% Occupied Bandwidth Plot on Configuration IEEE 802.11a / Chain 4 + Chain 5 + Chain 6 / 5785 MHz

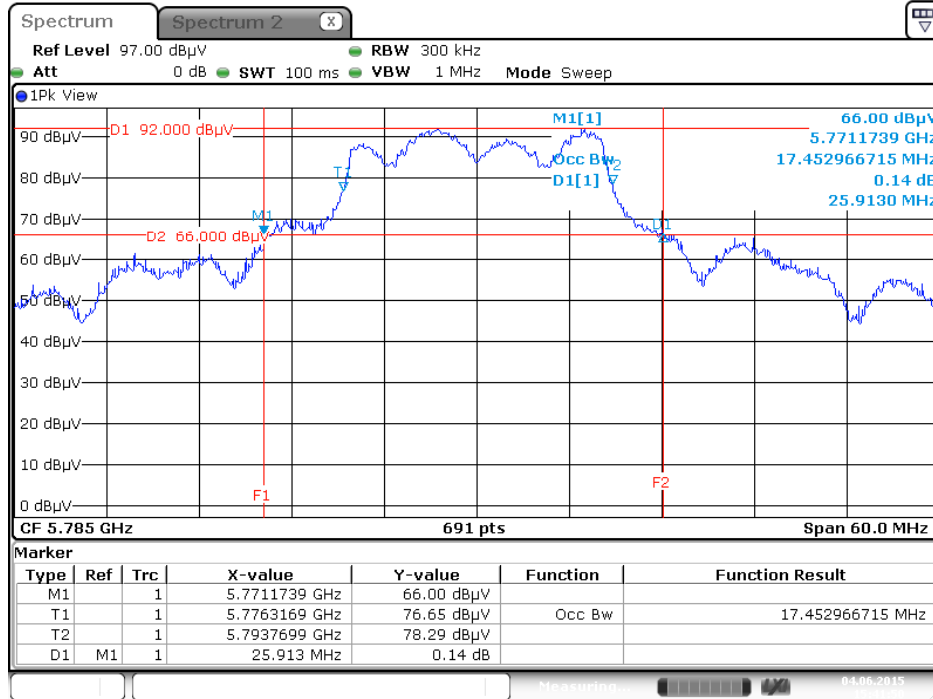

26dB Bandwidth and 99% Occupied Bandwidth Plot on Configuration IEEE 802.11a / Chain 4 + Chain 5 + Chain 6 / 5825 MHz

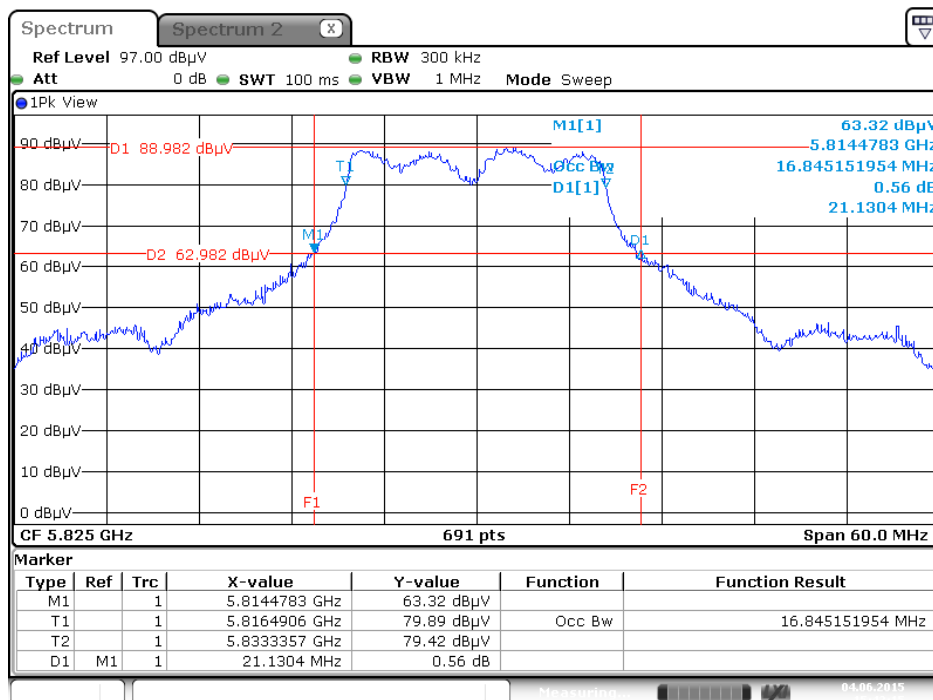


26dB Bandwidth and 99% Occupied Bandwidth Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT20 / Chain 4 + Chain 5 + Chain 6 / 5180 MHz

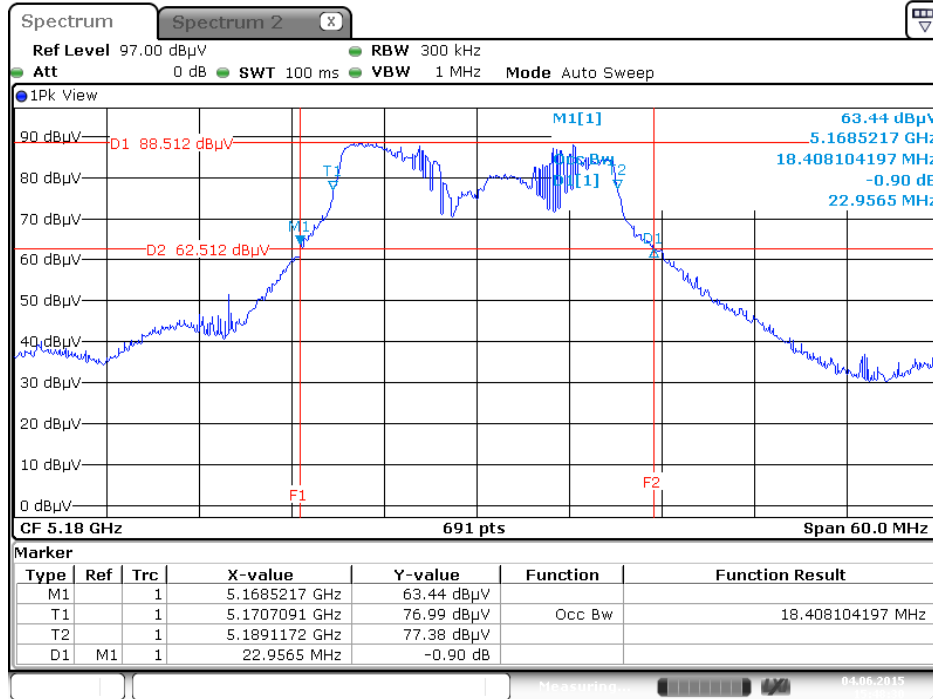


Date: 4 JUN 2015 15:48:30

26dB Bandwidth and 99% Occupied Bandwidth Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT20 / Chain 4 + Chain 5 + Chain 6 / 5200 MHz

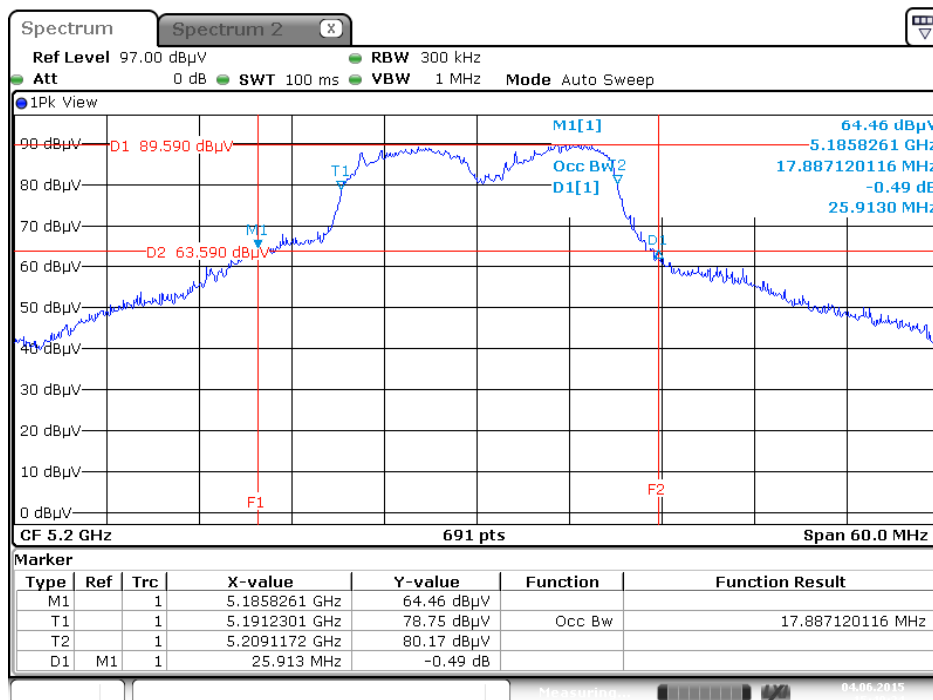


Date: 4 JUN 2015 15:49:24

26dB Bandwidth and 99% Occupied Bandwidth Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT20 / Chain 4 + Chain 5 + Chain 6 / 5240 MHz

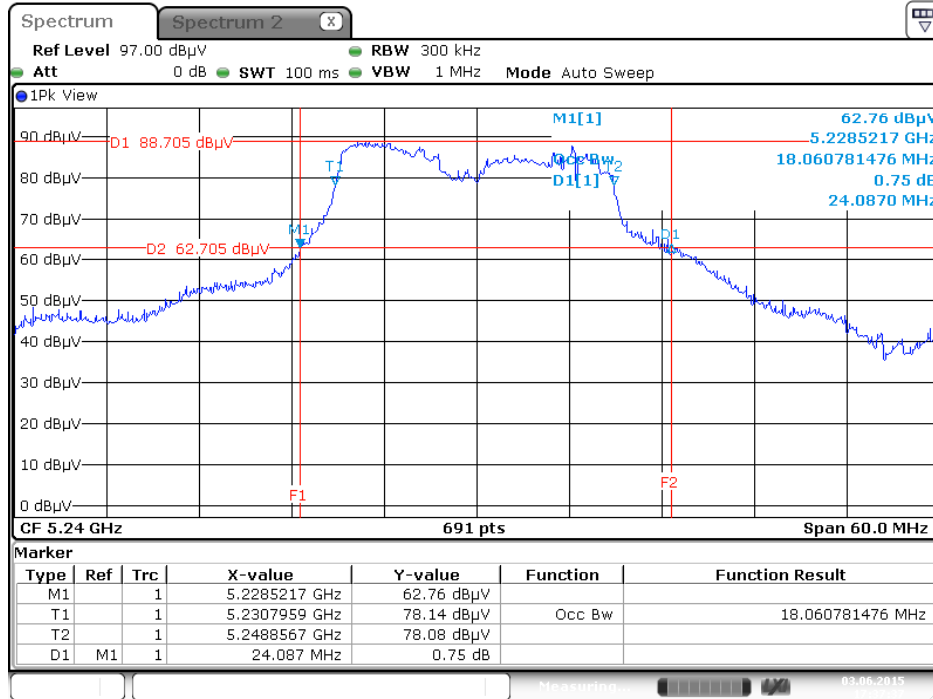


Date: 3 JUN 2015 17:37:38

26dB Bandwidth and 99% Occupied Bandwidth Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT20 / Chain 4 + Chain 5 + Chain 6 / 5745 MHz

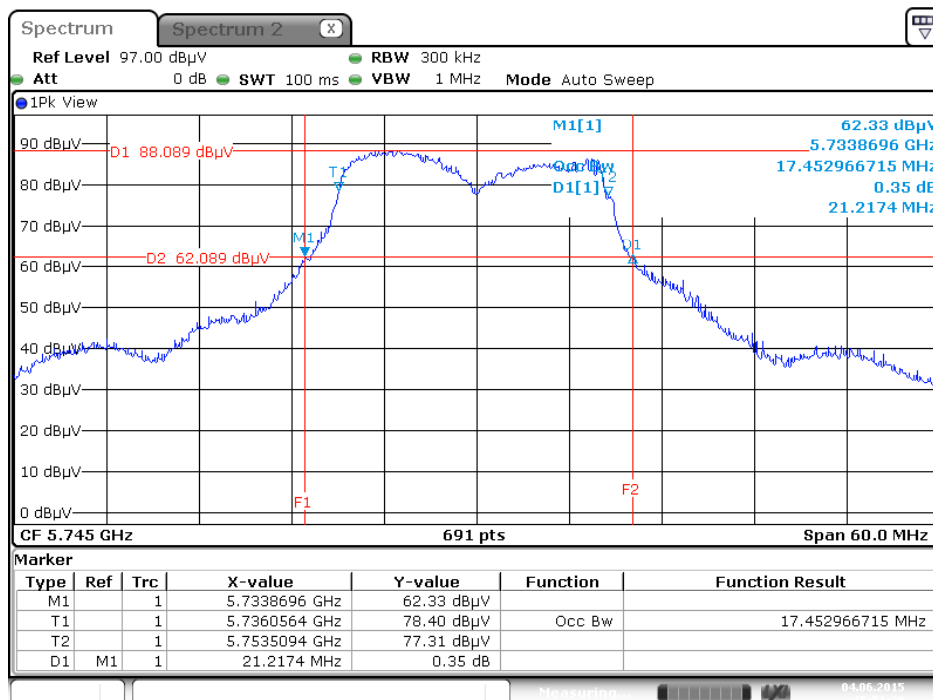


Date: 4 JUN 2015 15:51:29

26dB Bandwidth and 99% Occupied Bandwidth Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT20 / Chain 4 + Chain 5 + Chain 6 / 5785 MHz

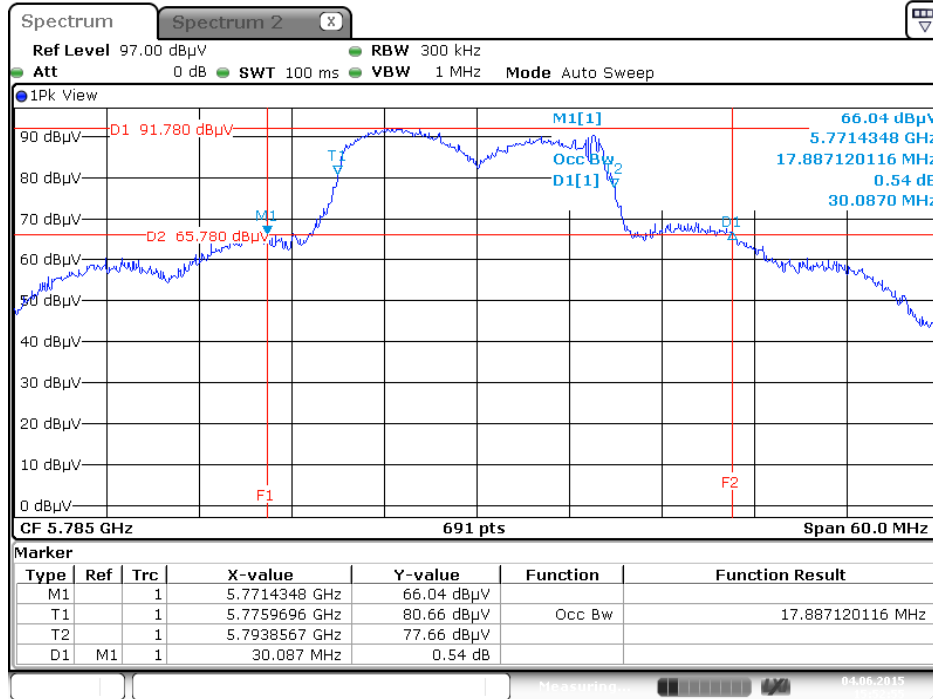


Date: 4 JUN 2015 15:52:55

26dB Bandwidth and 99% Occupied Bandwidth Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT20 / Chain 4 + Chain 5 + Chain 6 / 5825 MHz

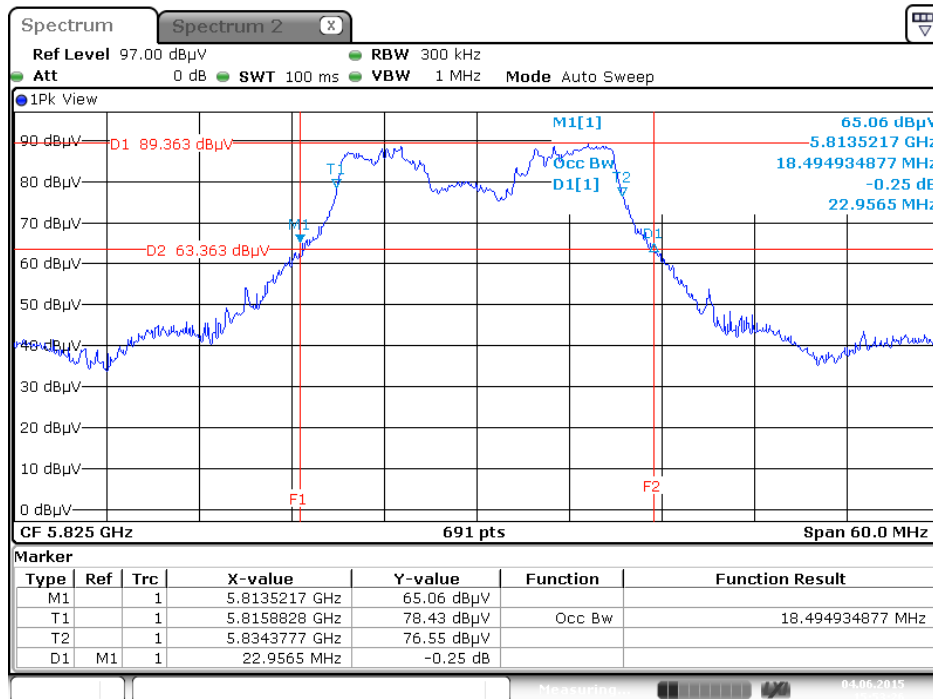


Date: 4 JUN 2015 15:53:26

26dB Bandwidth and 99% Occupied Bandwidth Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT40 / Chain 4 + Chain 5 + Chain 6 / 5190 MHz

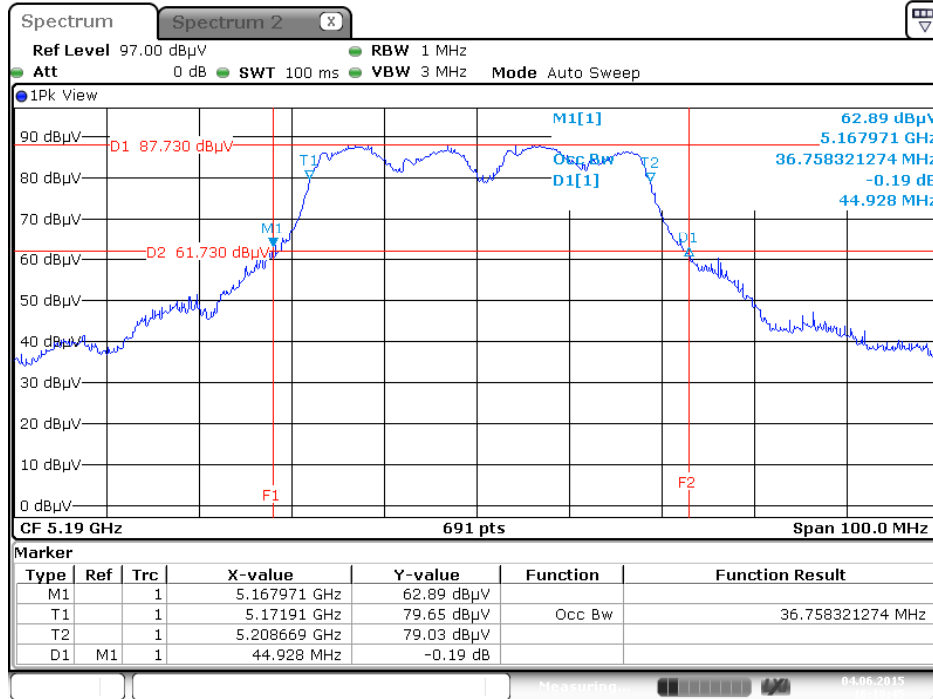


Date: 4 JUN 2015 16:18:45

26dB Bandwidth and 99% Occupied Bandwidth Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT40 / Chain 4 + Chain 5 + Chain 6 / 5230 MHz

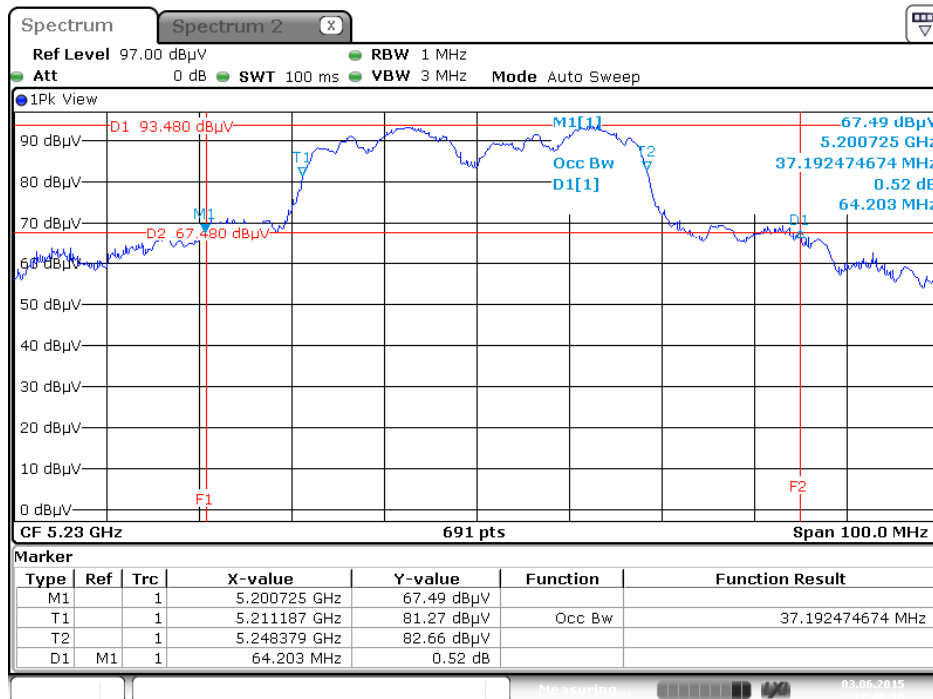


Date: 3 JUN 2015 17:40:11

26dB Bandwidth and 99% Occupied Bandwidth Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT40 / Chain 4 + Chain 5 + Chain 6 / 5755 MHz

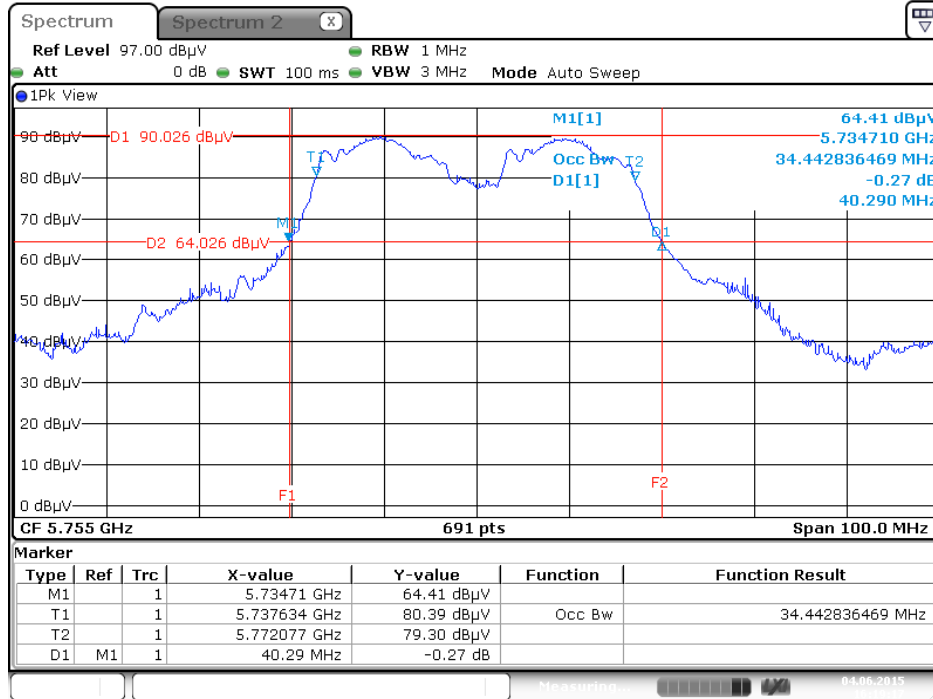


Date: 4 JUN 2015 16:19:17

26dB Bandwidth and 99% Occupied Bandwidth Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT40 / Chain 4 + Chain 5 + Chain 6 / 5795 MHz

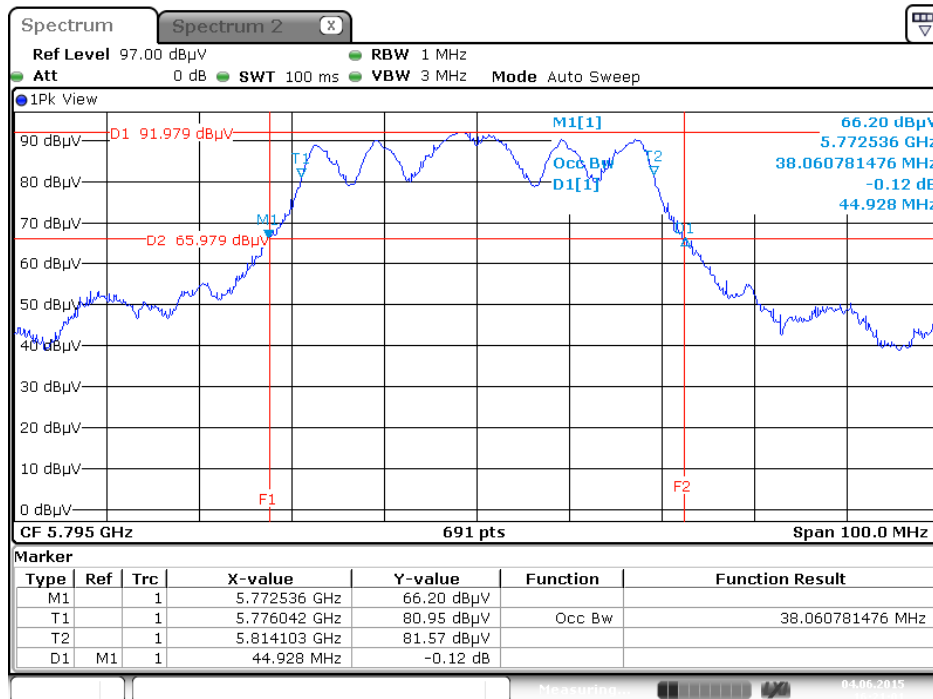


Date: 4 JUN 2015 16:21:01

26dB Bandwidth and 99% Occupied Bandwidth Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT80 / Chain 4 + Chain 5 + Chain 6 / 5210 MHz

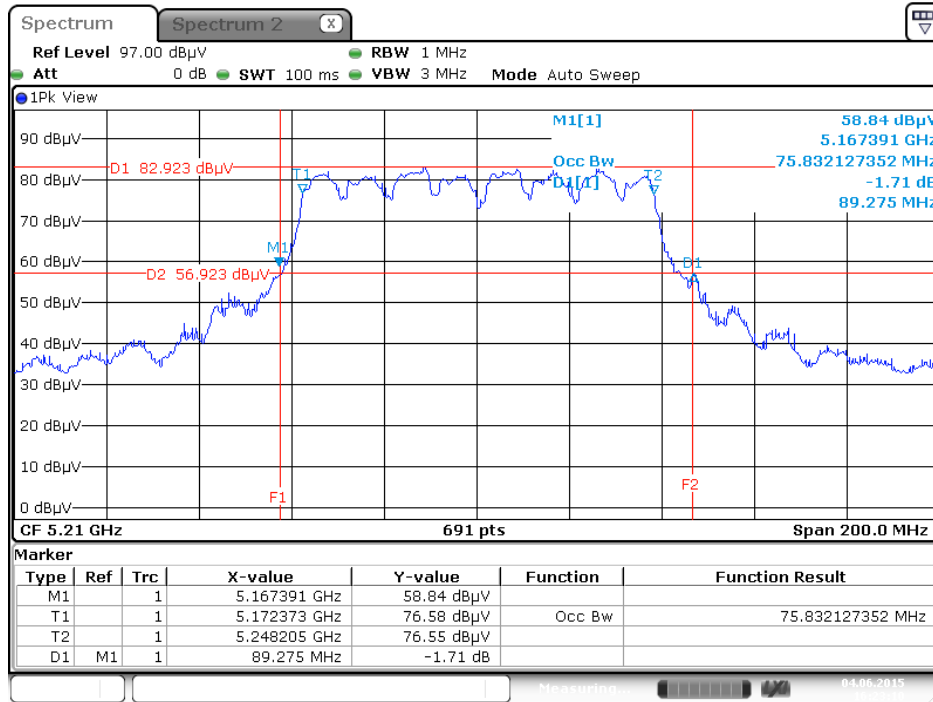

Date: 4 JUN 2015 16:23:10

26dB Bandwidth and 99% Occupied Bandwidth Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT80 / Chain 4 + Chain 5 + Chain 6 / 5775 MHz

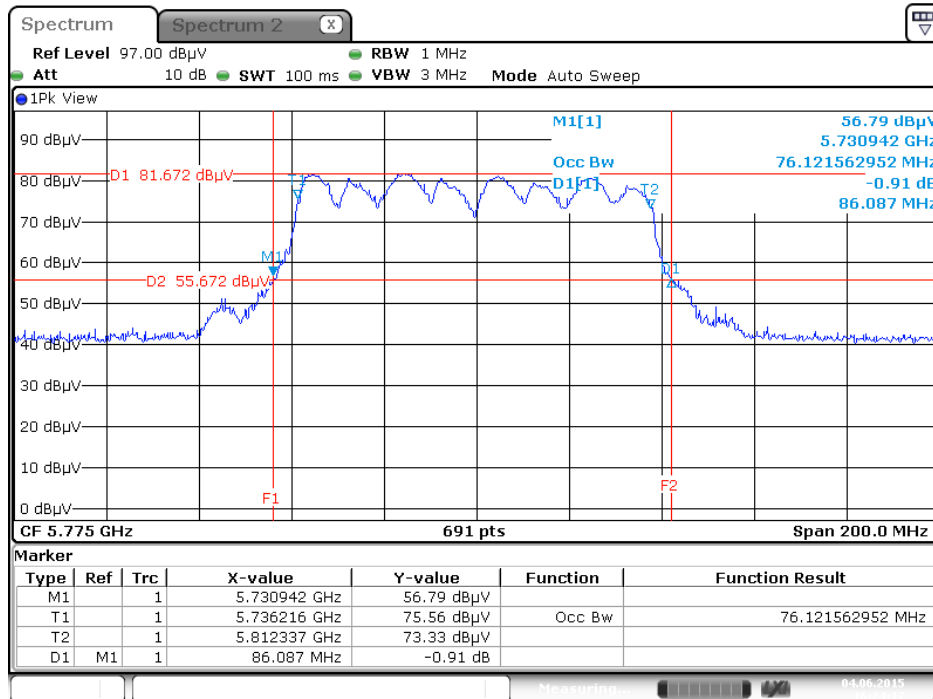

Date: 4 JUN 2015 16:24:17

4.3. 6dB Spectrum Bandwidth Measurement

4.3.1. Limit

For digital modulation systems, the minimum 6dB bandwidth shall be at least 500 kHz.

4.3.2. Measuring Instruments and Setting

Please refer to section 5 of equipments list in this report. The following table is the setting of spectrum analyzer.

6dB Spectrum Bandwidth	
Spectrum Parameters	Setting
Attenuation	Auto
Span Frequency	> 6dB Bandwidth
RBW	100kHz
VBW	$\geq 3 \times \text{RBW}$
Detector	Peak
Trace	Max Hold
Sweep Time	Auto

4.3.3. Test Procedures

For Radiated 6dB Bandwidth Measurement:

1. The transmitter was radiated to the spectrum analyzer in peak hold mode.
2. Test was performed in accordance with KDB789033 D02 v01 for Compliance Testing of Unlicensed National Information Infrastructure (U-NII) Devices - section (C) Emission Bandwidth.
3. Multiple antenna system was performed in accordance with KDB662911 D01 v02r01 Emissions Testing of Transmitters with Multiple Outputs in the Same Band.
4. Measured the spectrum width with power higher than 6dB below carrier.

4.3.4. Test Setup Layout

For Radiated 6dB Bandwidth Measurement:

This test setup layout is the same as that shown in section 4.6.4.

4.3.5. Test Deviation

There is no deviation with the original standard.

4.3.6. EUT Operation during Test

The EUT was programmed to be in continuously transmitting mode.

4.3.7. Test Result of 6dB Spectrum Bandwidth


Temperature	25°C	Humidity	45%
Test Engineer	Lucas Huang		

Mode	Frequency	6dB Bandwidth (MHz)	Min. Limit (kHz)	Test Result
802.11a	5745 MHz	13.16	500	Complies
	5785 MHz	15.94	500	Complies
	5825 MHz	16.12	500	Complies
802.11ac MCS0/Nss1 VHT20	5745 MHz	15.65	500	Complies
	5785 MHz	15.71	500	Complies
	5825 MHz	17.57	500	Complies
802.11ac MCS0/Nss1 VHT40	5755 MHz	32.58	500	Complies
	5795 MHz	36.40	500	Complies
802.11ac MCS0/Nss1 VHT80	5775 MHz	70.44	500	Complies


Note: All the test values were listed in the report.

For plots, only the channel with worse result was shown.


6 dB Bandwidth Plot on Configuration IEEE 802.11a / Chain 4 + Chain 5 + Chain 6 / 5745 MHz

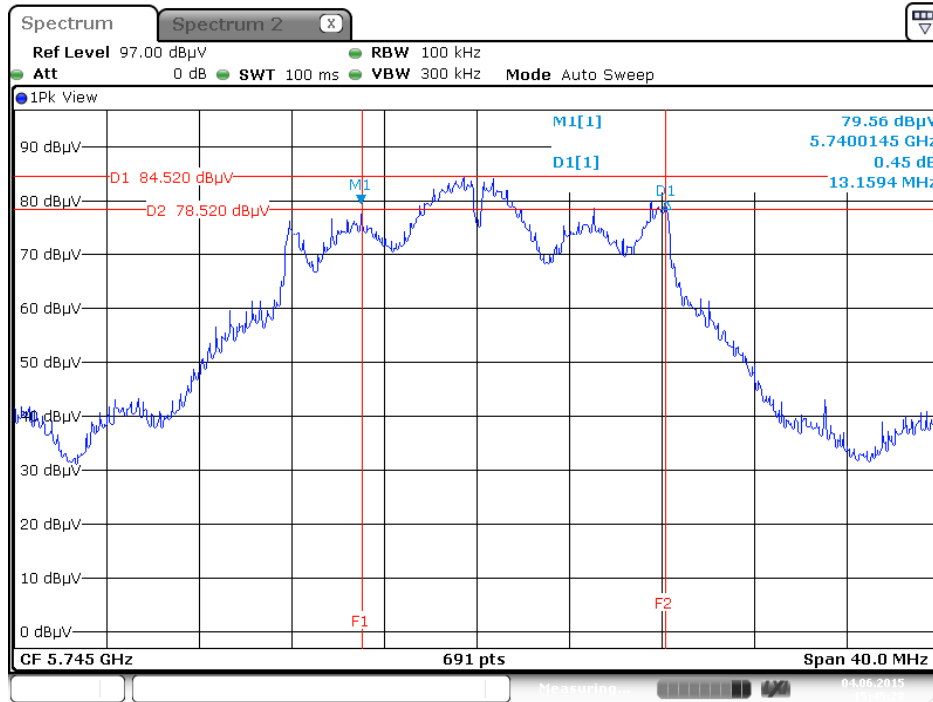


6 dB Bandwidth Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT20 / Chain 4 + Chain 5 + Chain 6 / 5745 MHz

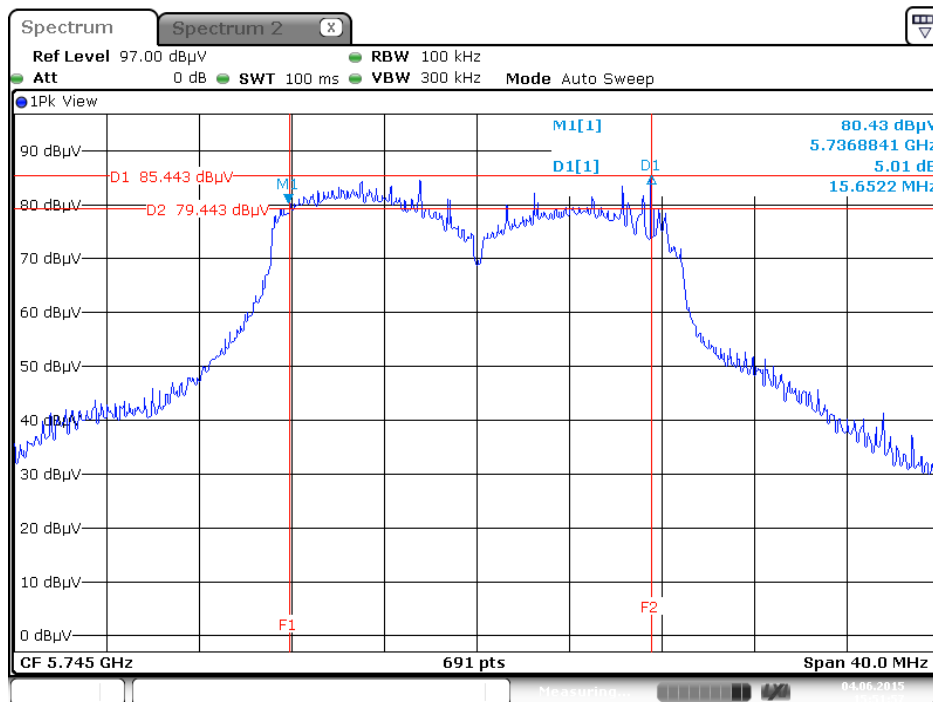

6 dB Bandwidth Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT40 / Chain 4 + Chain 5 + Chain 6 / 5755MHz

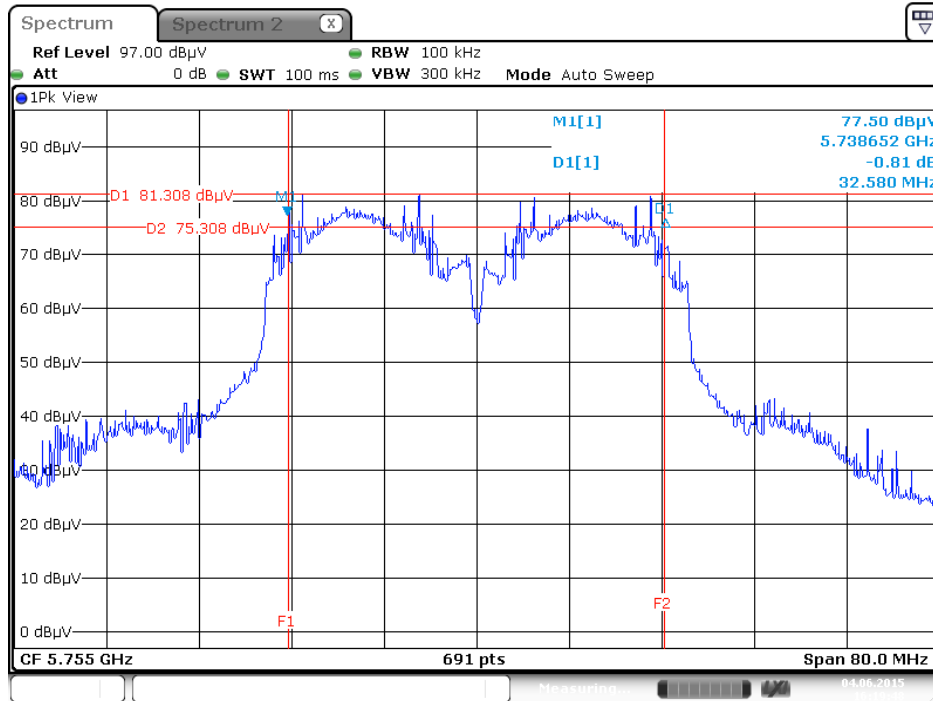

6 dB Bandwidth Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT80 / Chain 4 + Chain 5 + Chain 6 / 5775 MHz

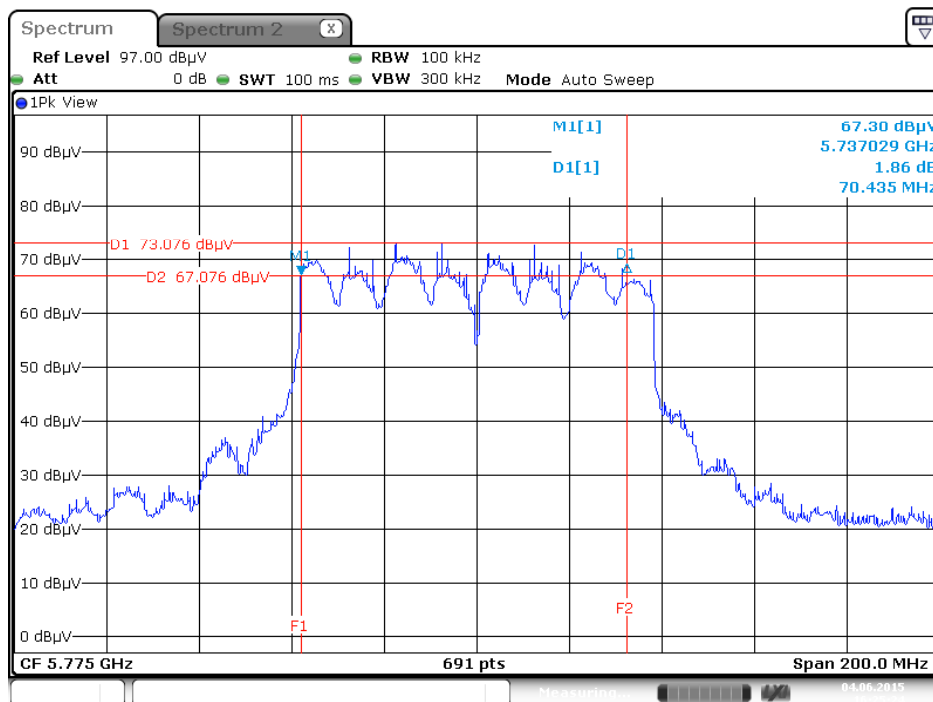

4.4. Maximum Conducted Output Power Measurement

4.4.1. Limit

Frequency Band	Limit
<input checked="" type="checkbox"/> 5.15~5.25 GHz	
Operating Mode	
<input type="checkbox"/> Outdoor access point	<p>The maximum conducted output power over the frequency band of operation shall not exceed 1 W (30dBm) provided the maximum antenna gain does not exceed 6 dBi. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi. The maximum e.i.r.p. at any elevation angle above 30 degrees as measured from the horizon must not exceed 125 mW (21 dBm).</p>
<input checked="" type="checkbox"/> Indoor access point	<p>The maximum conducted output power over the frequency band of operation shall not exceed 1 W (30dBm) provided the maximum antenna gain does not exceed 6 dBi. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.</p>
<input type="checkbox"/> Fixed point-to-point access points	<p>The maximum conducted output power over the frequency band of operation shall not exceed 1 W (30dBm). Fixed point-to-point U-NII devices may employ antennas with directional gain up to 23 dBi without any corresponding reduction in the maximum conducted output power or maximum power spectral density. For fixed point-to-point transmitters that employ a directional antenna gain greater than 23 dBi, a 1 dB reduction in maximum conducted output power and maximum power spectral density is required for each 1 dB of antenna gain in excess of 23 dBi.</p>
<input type="checkbox"/> Mobile and portable client devices	<p>The maximum conducted output power over the frequency band of operation shall not exceed 250 mW (24dBm) provided the maximum antenna gain does not exceed 6 dBi. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.</p>

☒	5.725~5.85 GHz	The maximum conducted output power over the frequency band of operation shall not exceed 1 W (30dBm). If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi. However, fixed point-to-point U-NII devices operating in this band may employ transmitting antennas with directional gain greater than 6 dBi without any corresponding reduction in transmitter conducted power.
---	----------------	--

4.4.2. Measuring Instruments and Setting


Please refer to section 5 of equipments list in this report. The following table is the setting of the power meter.

Power Meter Parameter	Setting
Detector	AVERAGE

4.4.3. Test Procedures

1. The transmitter output (antenna port) was connected to the power meter.
2. Test was performed in accordance with KDB789033 D02 v01 for Compliance Testing of Unlicensed National Information Infrastructure (U-NII) Devices - section (E) Maximum conducted output power =>3. Measurement using a Power Meter (PM) =>b) Method PM-G (Measurement using a gated RF average power meter).
3. Multiple antenna systems was performed in accordance with KDB662911 D01 v02r01 Emissions Testing of Transmitters with Multiple Outputs in the Same Band.
4. When measuring maximum conducted output power with multiple antenna systems, add every result of the values by mathematic formula.

4.4.4. Test Setup Layout



4.4.5. Test Deviation

There is no deviation with the original standard.

4.4.6. EUT Operation during Test

The EUT was programmed to be in continuously transmitting mode.

4.4.7. Test Result of Maximum Conducted Output Power

Temperature	25°C	Humidity	45%
Test Engineer	Lucas Huang	Test Date	Jun. 03, 2015

Mode	Frequency	Conducted Power (dBm)				Max. Limit (dBm)	Result
		Chain 4	Chain 5	Chain 6	Total		
802.11a	5180 MHz	21.48	20.67	21.10	25.87	30.00	Complies
	5200 MHz	23.09	22.32	22.10	27.30	30.00	Complies
	5240 MHz	22.81	22.35	22.05	27.19	30.00	Complies
	5745 MHz	21.42	20.62	20.43	25.62	30.00	Complies
	5785 MHz	24.62	23.52	23.67	28.74	30.00	Complies
	5825 MHz	22.18	21.63	22.11	26.75	30.00	Complies
802.11ac MCS0/Nss1 VHT20	5180 MHz	20.92	20.12	21.93	25.82	30.00	Complies
	5200 MHz	22.90	22.37	22.08	27.23	30.00	Complies
	5240 MHz	22.64	22.34	22.03	27.12	30.00	Complies
	5745 MHz	20.93	20.19	19.79	25.10	30.00	Complies
	5785 MHz	24.62	23.38	23.74	28.72	30.00	Complies
	5825 MHz	21.17	20.47	20.87	25.62	30.00	Complies
802.11ac MCS0/Nss1 VHT40	5190 MHz	19.26	18.75	19.23	23.86	30.00	Complies
	5230 MHz	24.64	23.30	24.27	28.88	30.00	Complies
	5755 MHz	18.64	17.95	18.11	23.01	30.00	Complies
	5795 MHz	21.93	20.29	20.91	25.87	30.00	Complies
802.11ac MCS0/Nss1 VHT80	5210 MHz	15.53	14.91	15.27	20.02	30.00	Complies
	5775 MHz	14.34	13.45	13.52	18.56	30.00	Complies

4.5. Power Spectral Density Measurement

4.5.1. Limit

The following table is power spectral density limits and decrease power density limit rule refer to section 4.4.1.

Frequency Band		Limit
<input checked="" type="checkbox"/>	5.15~5.25 GHz	
	Operating Mode	
<input type="checkbox"/>	Outdoor access point	17 dBm/MHz
<input checked="" type="checkbox"/>	Indoor access point	17 dBm/MHz
<input type="checkbox"/>	Fixed point-to-point access points	17 dBm/MHz
<input type="checkbox"/>	Mobile and portable client devices	11 dBm/MHz
<input checked="" type="checkbox"/>	5.725~5.85 GHz	30 dBm/500kHz

4.5.2. Measuring Instruments and Setting


Please refer to section 5 of equipments list in this report. The following table is the setting of the spectrum analyzer.

Spectrum Parameter	Setting
Attenuation	Auto
Span Frequency	Encompass the entire emissions bandwidth (EBW) of the signal
RBW	1000 kHz
VBW	3000 kHz
Detector	RMS
Trace	AVERAGE
Sweep Time	Auto
Trace Average	100 times
Note: If measurement bandwidth of Maximum PSD is specified in 500 kHz, add $10\log(500\text{kHz}/\text{RBW})$ to the measured result, whereas RBW (< 500 kHz) is the reduced resolution bandwidth of the spectrum analyzer set during measurement.	

4.5.3. Test Procedures

1. The transmitter output (antenna port) was connected RF switch to the spectrum analyzer.
2. Test was performed in accordance with KDB789033 D02 v01 for Compliance Testing of Unlicensed National Information Infrastructure (U-NII) Devices - section (F) Maximum Power Spectral Density (PSD).
3. Multiple antenna systems was performed in accordance KDB662911 D01 v02r01 in-Band Power Spectral Density (PSD) Measurements (a) Measure and sum the spectra across the outputs.
4. When measuring first spectral bin of output 1 is summed with that in the first spectral bin of output 2 and that from the first spectral bin of output 3 and so on up to the Nth output to obtain the value for the first frequency bin of the summed spectrum. The summed spectrum value for each of the other frequency bins is computed in the same way.
5. For 5.725~5.85 GHz, the measured result of PSD level must add $10\log(500\text{kHz}/\text{RBW})$ and the final result should ≤ 30 dBm.

4.5.4. Test Setup Layout

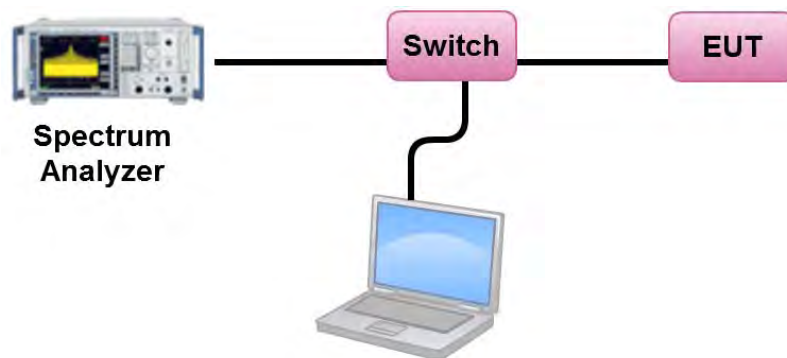

4.5.5. Test Deviation

There is no deviation with the original standard.

4.5.6. EUT Operation during Test

The EUT was programmed to be in continuously transmitting mode.

4.5.7. Test Result of Power Spectral Density

Temperature	25°C	Humidity	45%
Test Engineer	Lucas Huang	Test Data	Jun. 03, 2015

Configuration IEEE 802.11a / Chain 4 + Chain 5 + Chain 6

Channel	Frequency	Power Density (dBm/MHz)	Max. Limit (dBm/MHz)	Result
36	5180 MHz	12.71	14.73	Complies
40	5200 MHz	14.65	14.73	Complies
48	5240 MHz	14.59	14.73	Complies

Note: $DirectionalGain = 10 \cdot \log \left[\frac{\sum_{j=1}^{N_{SS}} \left(\sum_{k=1}^{N_{ANT}} g_{j,k} \right)^2}{N_{ANT}} \right] = 8.27\text{dBi}$, So Limit = $17 - (8.27 - 6) = 14.73\text{dBm}/3\text{kHz}$.

Channel	Frequency	Power Density (dBm/MHz)	10log(500kHz/RBW) Factor (dB)	Power Density (dBm/500kHz)	Power Density Limit (dBm/500kHz)	Result
149	5745 MHz	12.52	-3.01	9.51	26.47	Complies
157	5785 MHz	15.80	-3.01	12.79	26.47	Complies
165	5825 MHz	13.54	-3.01	10.53	26.47	Complies

Note: $DirectionalGain = 10 \cdot \log \left[\frac{\sum_{j=1}^{N_{SS}} \left(\sum_{k=1}^{N_{ANT}} g_{j,k} \right)^2}{N_{ANT}} \right] = 9.53\text{dBi}$, So Limit = $30 - (9.53 - 6) = 26.47\text{dBm}/3\text{kHz}$.

Configuration IEEE 802.11ac MCS0/Nss1 VHT20 / Chain 4 + Chain 5 + Chain 6

Channel	Frequency	Power Density (dBm/MHz)	Max. Limit (dBm/MHz)	Result
36	5180 MHz	12.15	14.73	Complies
40	5200 MHz	14.48	14.73	Complies
48	5240 MHz	14.28	14.73	Complies

Note: $DirectionalGain = 10 \cdot \log \left[\frac{\sum_{j=1}^{N_{SS}} \left(\sum_{k=1}^{N_{ANT}} g_{j,k} \right)^2}{N_{ANT}} \right] = 8.27\text{dBi}$, So Limit = $17 - (8.27 - 6) = 14.73\text{dBm}/3\text{kHz}$.

Channel	Frequency	Power Density (dBm/MHz)	10log(500kHz/RBW) Factor (dB)	Power Density (dBm/500kHz)	Power Density Limit (dBm/500kHz)	Result
149	5745 MHz	11.70	-3.01	8.69	26.47	Complies
157	5785 MHz	15.41	-3.01	12.40	26.47	Complies
165	5825 MHz	12.33	-3.01	9.32	26.47	Complies

Note: $DirectionalGain = 10 \cdot \log \left[\frac{\sum_{j=1}^{N_{SS}} \left(\sum_{k=1}^{N_{ANT}} g_{j,k} \right)^2}{N_{ANT}} \right] = 9.53\text{dBi}$, So Limit = $30 - (9.53 - 6) = 26.47\text{dBm}/3\text{kHz}$.

Configuration IEEE 802.11ac MCS0/Nss1 VHT40 / Chain 4 + Chain 5 + Chain 6

Channel	Frequency	Power Density (dBm/MHz)	Max. Limit (dBm/MHz)	Result
38	5190 MHz	7.70	14.73	Complies
46	5230 MHz	12.78	14.73	Complies

Note: $DirectionalGain = 10 \cdot \log \left[\frac{\sum_{j=1}^{N_{ch}} \left(\sum_{k=1}^{N_{ANT}} g_{j,k} \right)^2}{N_{ANT}} \right] = 8.27\text{dBi}$, So Limit = $17 - (8.27 - 6) = 14.73\text{dBm}/3\text{kHz}$.

Channel	Frequency	Power Density (dBm/MHz)	10log(500kHz/RBW) Factor (dB)	Power Density (dBm/500kHz)	Power Density Limit (dBm/500kHz)	Result
151	5755 MHz	6.52	-3.01	3.51	26.47	Complies
159	5795 MHz	9.52	-3.01	6.51	26.47	Complies

Note: $DirectionalGain = 10 \cdot \log \left[\frac{\sum_{j=1}^{N_{ch}} \left(\sum_{k=1}^{N_{ANT}} g_{j,k} \right)^2}{N_{ANT}} \right] = 9.53\text{dBi}$, So Limit = $30 - (9.53 - 6) = 26.47\text{dBm}/3\text{kHz}$.

Configuration IEEE 802.11ac MCS0/Nss1 VHT80 / Chain 4 + Chain 5 + Chain 6

Channel	Frequency	Power Density (dBm/MHz)	Max. Limit (dBm/MHz)	Result
42	5210 MHz	0.44	14.73	Complies

Note: $DirectionalGain = 10 \cdot \log \left[\frac{\sum_{j=1}^{N_{ch}} \left(\sum_{k=1}^{N_{ANT}} g_{j,k} \right)^2}{N_{ANT}} \right] = 8.27\text{dBi}$, So Limit = $17 - (8.27 - 6) = 14.73\text{dBm}/3\text{kHz}$.


Channel	Frequency	Power Density (dBm/MHz)	10log(500kHz/RBW) Factor (dB)	Power Density (dBm/500kHz)	Power Density Limit (dBm/500kHz)	Result
155	5775 MHz	-1.04	-3.01	-4.05	26.47	Complies

Note: $DirectionalGain = 10 \cdot \log \left[\frac{\sum_{j=1}^{N_{ch}} \left(\sum_{k=1}^{N_{ANT}} g_{j,k} \right)^2}{N_{ANT}} \right] = 9.53\text{dBi}$, So Limit = $30 - (9.53 - 6) = 26.47\text{dBm}/3\text{kHz}$.


Note: All the test values were listed in the report.

For plots, only the channel with worse result was shown.


Power Density Plot on Configuration IEEE 802.11a / Chain 4 + Chain 5 + Chain 6 / 5200 MHz

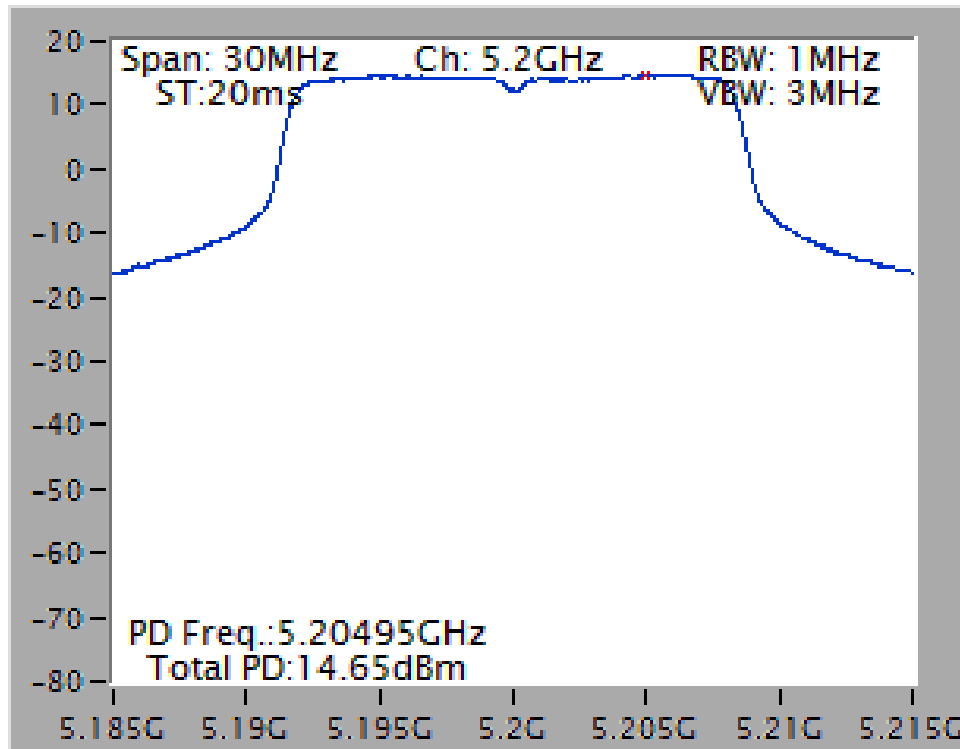


Power Density Plot on Configuration IEEE 802.11a / Chain 4 + Chain 5 + Chain 6 / 5785 MHz

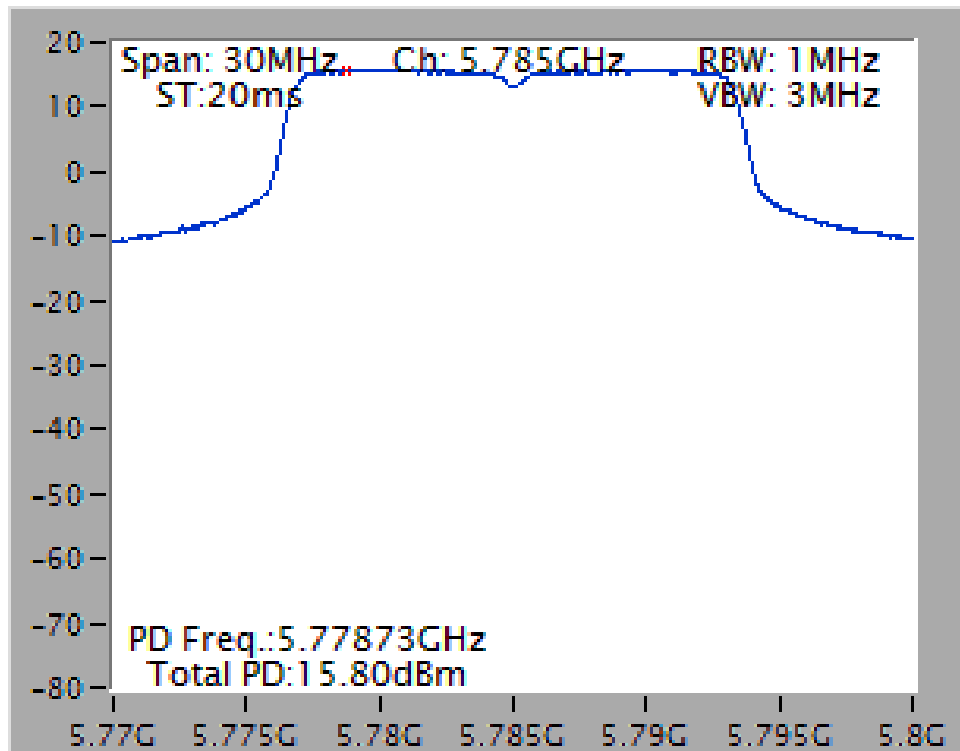


Power Density Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT20 / Chain 4 + Chain 5 + Chain 6 /
5200 MHz

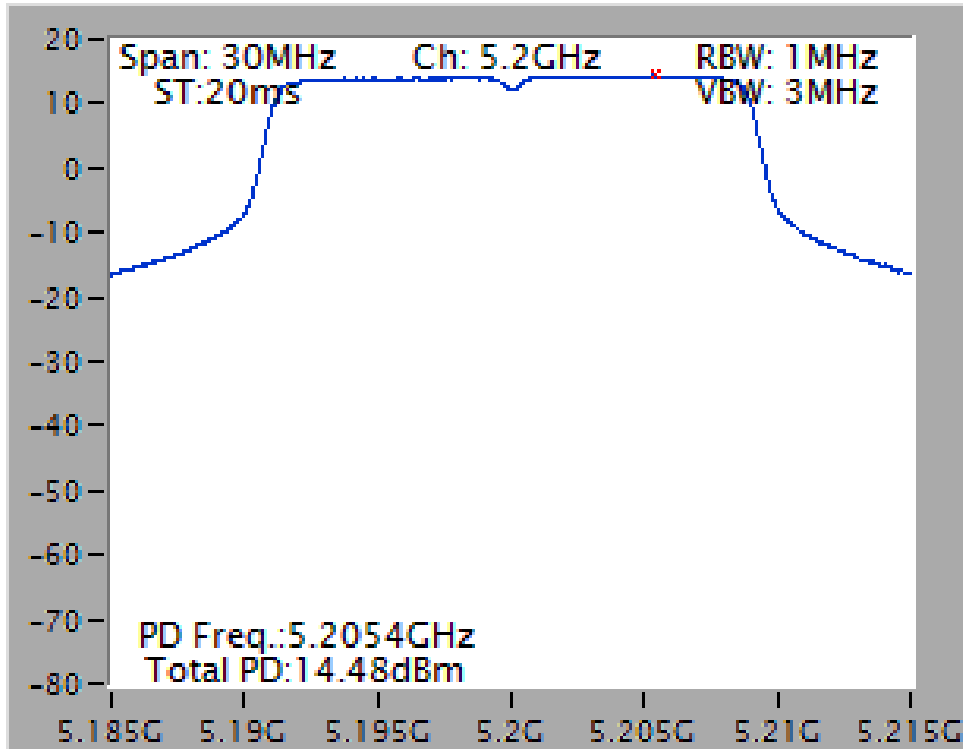


Power Density Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT20 / Chain 4 + Chain 5 + Chain 6 /
5785 MHz

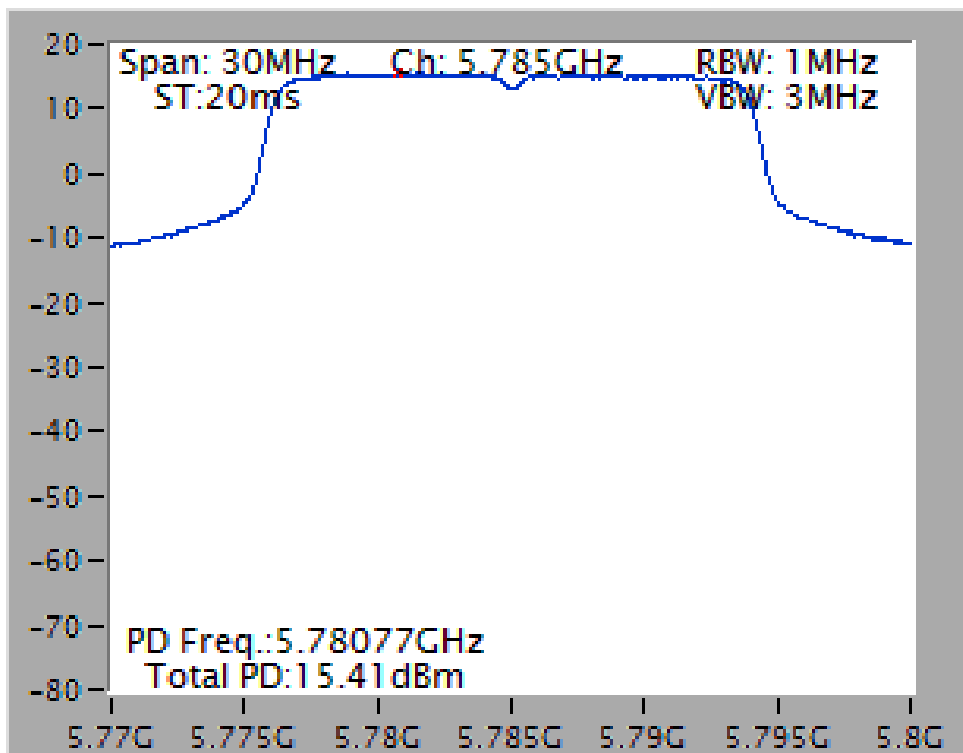


Power Density Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT40 / Chain 4 + Chain 5 + Chain 6 /
5230 MHz

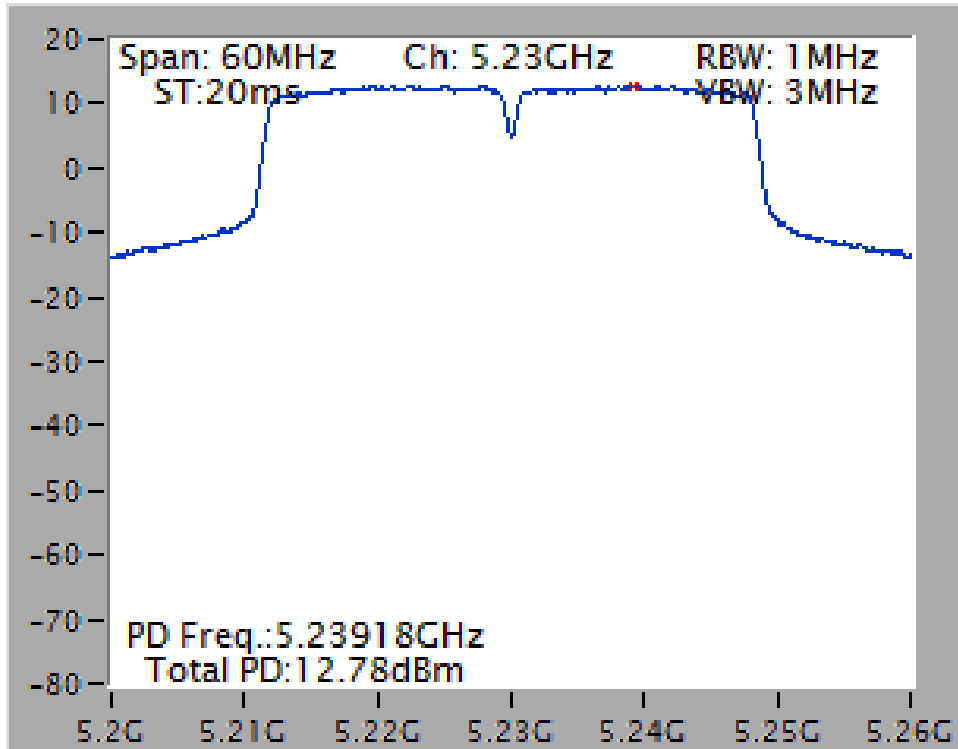


Power Density Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT40 / Chain 4 + Chain 5 + Chain 6 /
5795 MHz

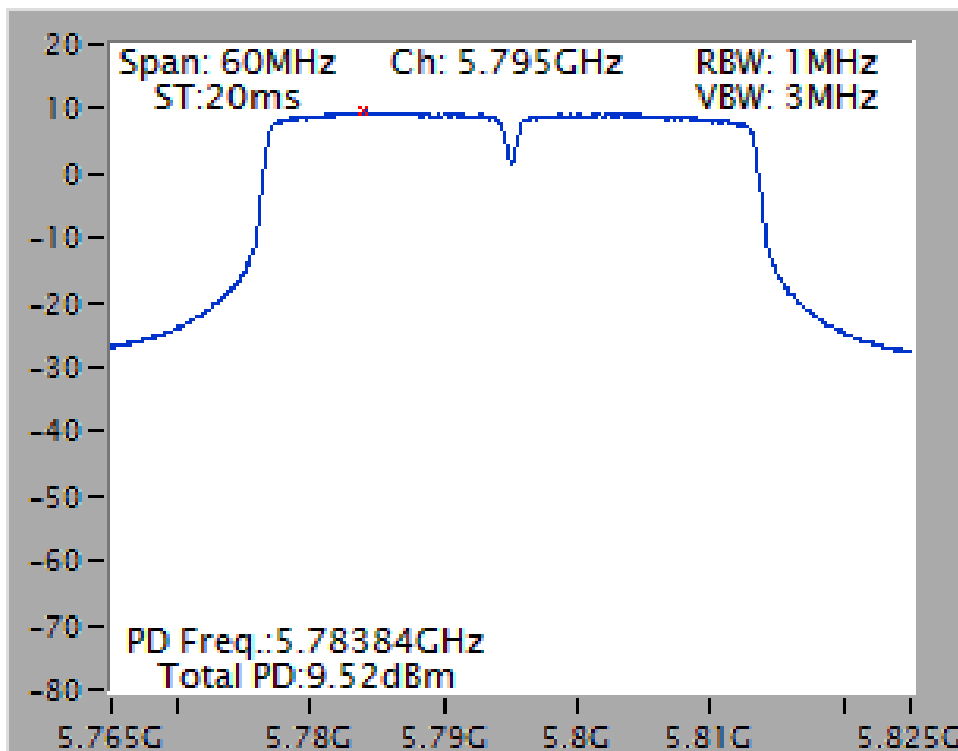

Power Density Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT80 / Chain 4 + Chain 5 + Chain 6 /
5210 MHz

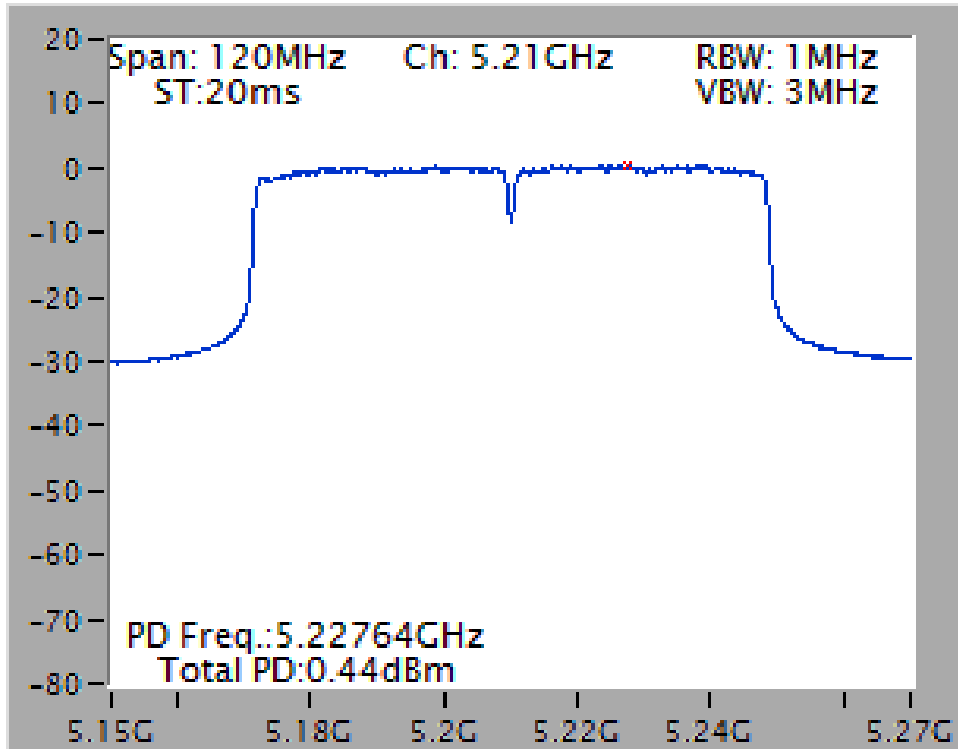

Power Density Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT80 / Chain 4 + Chain 5 + Chain 6 /
5775 MHz

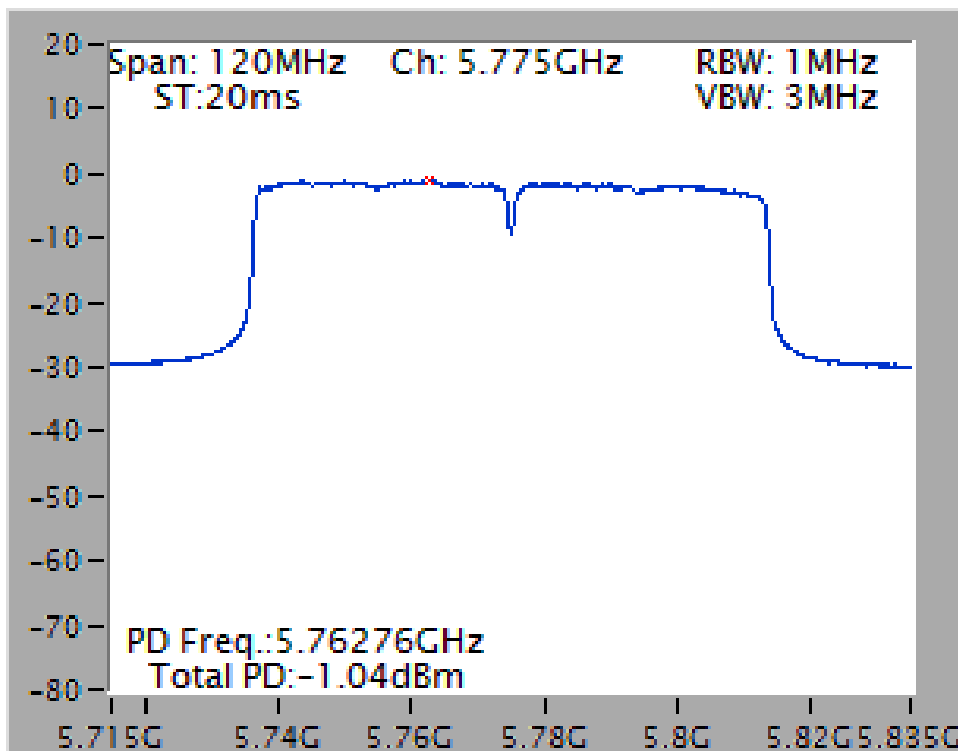

4.6. Radiated Emissions Measurement

4.6.1. Limit

For transmitters operating in the 5.15-5.25 GHz band: all emissions outside of the 5.15-5.35 GHz band shall not exceed an e.i.r.p. of -27 dBm/MHz.

For transmitters operating in the 5.725-5.85 GHz band: all emissions within the frequency range from the band edge to 10 MHz above or below the band edge shall not exceed an e.i.r.p. of -17 dBm/MHz; for frequencies 10 MHz or greater above or below the band edge, emissions shall not exceed an e.i.r.p. of -27 dBm/MHz.

In addition, In case the emission fall within the restricted band specified on 15.205(a), then the 15.209(a) limit in the table below has to be followed.

Frequencies (MHz)	Field Strength (micorvolts/meter)	Measurement Distance (meters)
0.009~0.490	2400/F(kHz)	300
0.490~1.705	24000/F(kHz)	30
1.705~30.0	30	30
30~88	100	3
88~216	150	3
216~960	200	3
Above 960	500	3

4.6.2. Measuring Instruments and Setting

Please refer to section 5 of equipments list in this report. The following table is the setting of spectrum analyzer and receiver.

Spectrum Parameter	Setting
Attenuation	Auto
Start Frequency	1000 MHz
Stop Frequency	40 GHz
RBW / VBW (Emission in restricted band)	1 MHz / 3MHz for Peak, 1 MHz / 1/T for Average
RBW / VBW (Emission in non-restricted band)	1 MHz / 3MHz for peak


Receiver Parameter	Setting
Attenuation	Auto
Start ~ Stop Frequency	9kHz~150kHz / RBW 200Hz for QP
Start ~ Stop Frequency	150kHz~30MHz / RBW 9kHz for QP
Start ~ Stop Frequency	30MHz~1000MHz / RBW 120kHz for QP

4.6.3. Test Procedures


1. Configure the EUT according to ANSI C63.10. The EUT was placed on the top of the turntable 1.5 meter above ground. The phase center of the receiving antenna mounted on the top of a height-variable antenna tower was placed 1m & 3m far away from the turntable.
2. Power on the EUT and all the supporting units. The turntable was rotated by 360 degrees to determine the position of the highest radiation.
3. The height of the broadband receiving antenna was varied between one meter and four meters above ground to find the maximum emissions field strength of both horizontal and vertical polarization.
4. For each suspected emissions, the antenna tower was scan (from 1 M to 4 M) and then the turntable was rotated (from 0 degree to 360 degrees) to find the maximum reading.
5. Set the test-receiver system to Peak or CISPR quasi-peak Detect Function with specified bandwidth under Maximum Hold Mode.
6. For emissions above 1GHz, use 1MHz VBW and 3MHz RBW for peak reading. Then 1MHz RBW and 1/T VBW for average reading in spectrum analyzer.
7. If the emissions level of the EUT in peak mode was 3 dB lower than the average limit specified, then testing will be stopped and peak values of EUT will be reported, otherwise, the emissions which do not have 3 dB margin will be repeated one by one using the quasi-peak method for below 1GHz.
8. For testing above 1GHz, the emissions level of the EUT in peak mode was lower than average limit (that means the emissions level in peak mode also complies with the limit in average mode), then testing will be stopped and peak values of EUT will be reported, otherwise, the emissions will be measured in average mode again and reported.
9. In case the emission is lower than 30MHz, loop antenna has to be used for measurement and the recorded data should be QP measured by receiver. High – Low scan is not required in this case.

4.6.4. Test Setup Layout


For Radiated Emissions: 9kHz ~30MHz

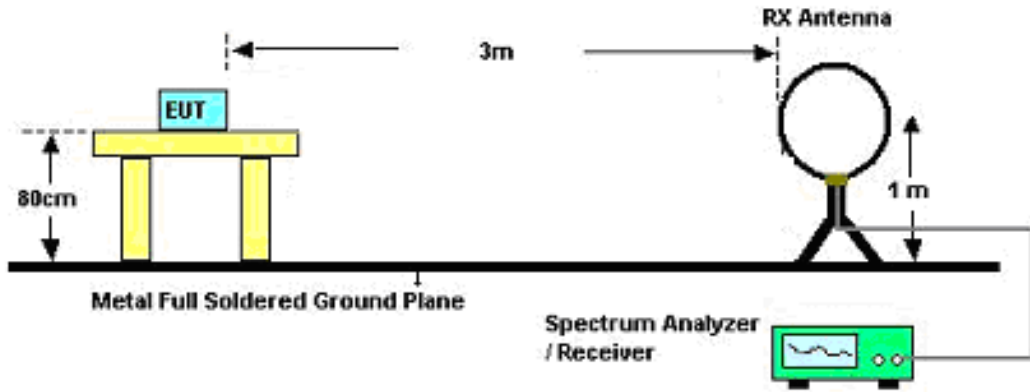

For Radiated Emissions: 30MHz~1GHz

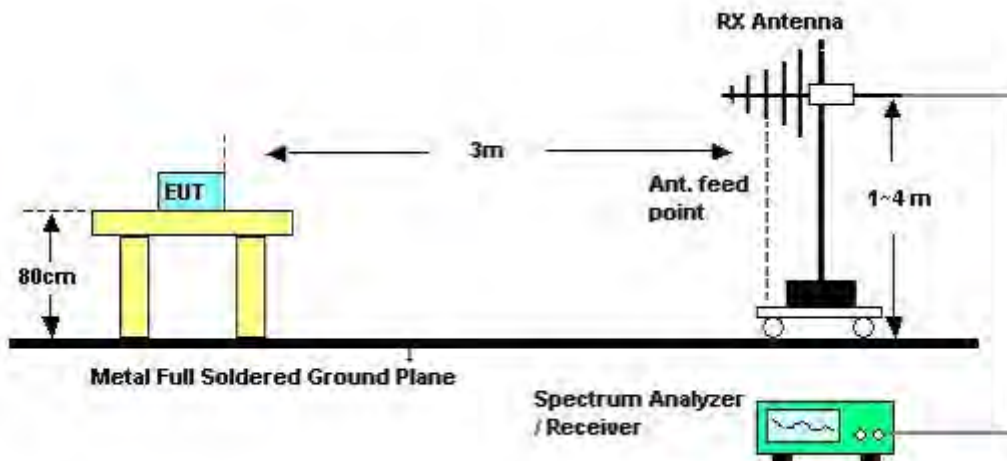

For Radiated Emissions: Above 1GHz

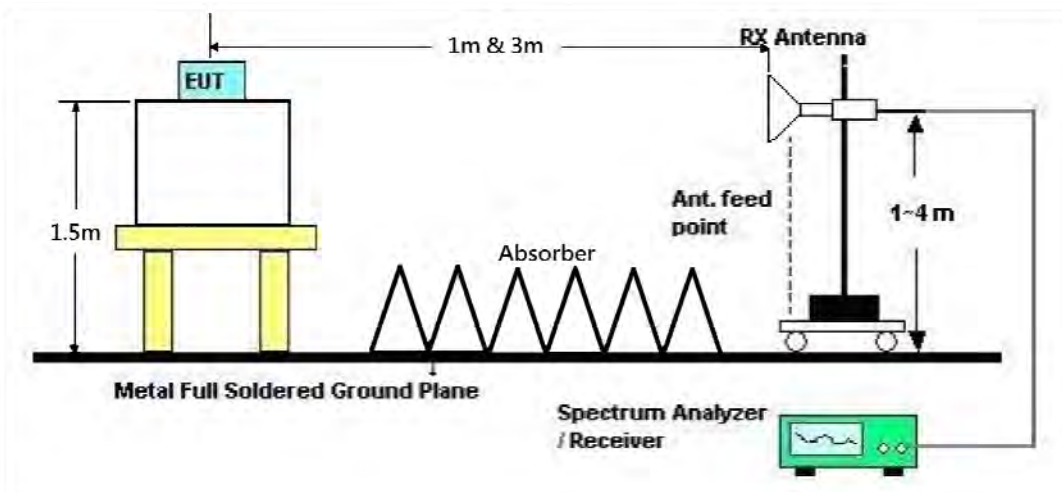

4.6.5. Test Deviation

There is no deviation with the original standard.

4.6.6. EUT Operation during Test

The EUT was programmed to be in continuously transmitting mode.

4.6.7. Results of Radiated Emissions (9kHz~30MHz)

Temperature	21°C	Humidity	65%
Test Engineer	Lucke Hsieh	Configurations	CTX
Test Date	Jun. 13, 2015	Test Mode	Mode 1

Freq. (MHz)	Level (dBuV)	Over Limit (dB)	Limit Line (dBuV)	Remark
-	-	-	-	See Note

Note:

The amplitude of spurious emissions which are attenuated by more than 20 dB below the permissible value has no need to be reported.


Distance extrapolation factor = $40 \log(\text{specific distance} / \text{test distance})$ (dB);

Limit line = specific limits (dBuV) + distance extrapolation factor.

4.6.8. Results of Radiated Emissions (30MHz~1GHz)


Temperature	21°C	Humidity	65%
Test Engineer	Lucke Hsieh	Configurations	CTX
Test Mode	Mode 1		

Horizontal

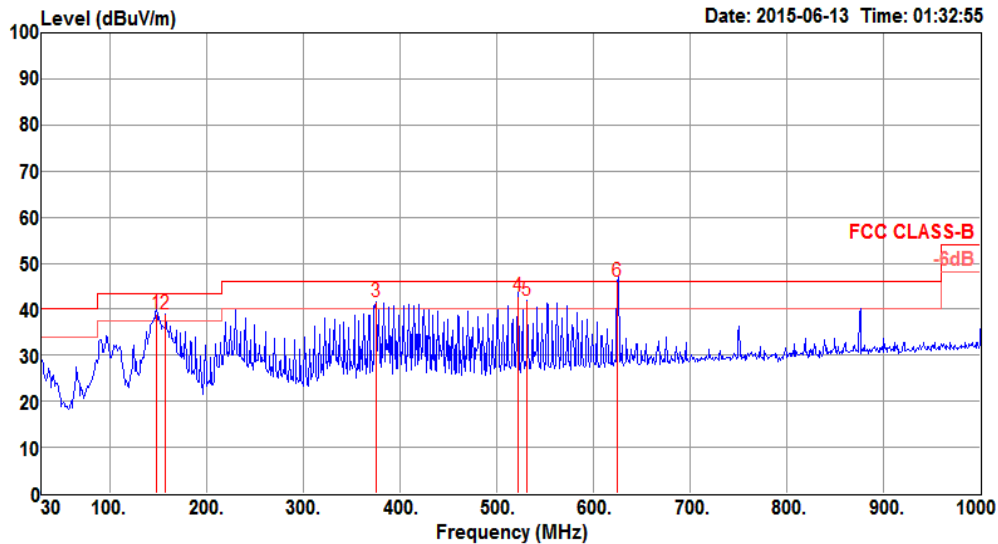

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Antenna Factor	Preamp Factor	A/Pos	T/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg		
1	148.34	38.97	43.50	-4.53	58.66	1.10	11.36	32.15	200	265	QP	HORIZONTAL
2	158.04	38.95	43.50	-4.55	59.07	1.17	10.88	32.17	200	101	Peak	HORIZONTAL
3	375.32	41.57	46.00	-4.43	56.07	1.68	15.91	32.09	100	325	Peak	HORIZONTAL
4	521.79	42.69	46.00	-3.31	54.75	1.94	18.19	32.19	150	241	QP	HORIZONTAL
5	531.49	41.87	46.00	-4.13	53.72	1.95	18.36	32.16	150	241	Peak	HORIZONTAL
6	625.01	45.95	46.00	-0.05	56.77	2.08	19.35	32.25	125	224	QP	HORIZONTAL

Vertical

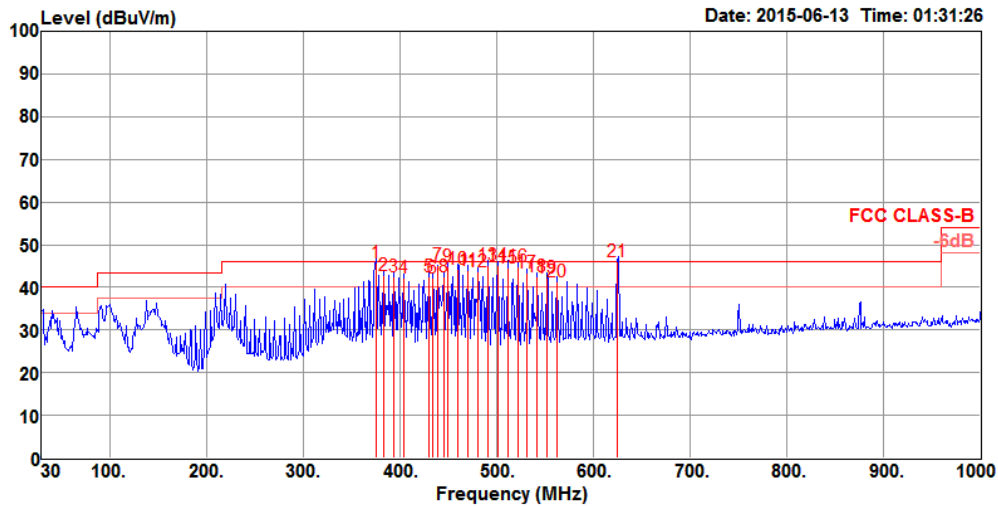

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Antenna Factor	Preamp Factor	A/Pos	T/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg		
1	375.01	45.82	46.00	-0.18	60.31	1.68	15.92	32.09	151	102	QP	VERTICAL
2	383.08	42.70	46.00	-3.30	56.94	1.69	16.11	32.04	150	108	QP	VERTICAL
3	393.75	42.41	46.00	-3.59	56.36	1.72	16.36	32.03	125	92	QP	VERTICAL
4	403.45	42.19	46.00	-3.81	55.98	1.74	16.54	32.07	125	264	QP	VERTICAL
5	429.64	42.45	46.00	-3.55	55.98	1.78	16.86	32.17	100	288	QP	VERTICAL
6	434.49	42.25	46.00	-3.75	55.66	1.79	16.92	32.12	125	120	QP	VERTICAL
7	439.34	45.11	46.00	-0.89	58.41	1.80	16.98	32.08	125	34	QP	VERTICAL
8	445.16	42.58	46.00	-3.42	55.83	1.81	17.04	32.10	125	107	QP	VERTICAL
9	450.01	44.77	46.00	-1.23	57.98	1.82	17.10	32.13	100	115	QP	VERTICAL
10	459.71	44.19	46.00	-1.81	57.13	1.84	17.24	32.02	125	112	QP	VERTICAL
11	470.38	44.07	46.00	-1.93	56.80	1.85	17.39	31.97	125	264	QP	VERTICAL
12	481.05	43.61	46.00	-2.39	56.22	1.87	17.54	32.02	100	43	QP	VERTICAL
13	490.75	45.13	46.00	-0.87	57.63	1.89	17.68	32.07	100	280	QP	VERTICAL
14	501.42	45.11	46.00	-0.89	57.53	1.90	17.83	32.15	100	275	QP	VERTICAL
15	511.39	44.57	46.00	-1.43	56.82	1.92	18.01	32.18	100	268	QP	VERTICAL
16	521.79	44.86	46.00	-1.14	56.91	1.94	18.20	32.19	100	62	QP	VERTICAL
17	531.49	43.23	46.00	-2.77	55.06	1.95	18.38	32.16	100	261	QP	VERTICAL
18	542.16	42.40	46.00	-3.60	54.00	1.97	18.56	32.13	100	122	QP	VERTICAL
19	551.86	42.30	46.00	-3.70	53.71	1.99	18.72	32.12	100	261	QP	VERTICAL
20	562.53	41.37	46.00	-4.63	52.69	2.00	18.80	32.12	100	256	QP	VERTICAL
21	625.02	45.98	46.00	-0.02	56.79	2.08	19.36	32.25	100	61	QP	VERTICAL

Note:

The amplitude of spurious emissions which are attenuated by more than 20 dB below the permissible value has no need to be reported.

Emission level (dBuV/m) = 20 log Emission level (uV/m).

Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level.

4.6.9. Results for Radiated Emissions (1GHz~40GHz)

Temperature	21°C	Humidity	65%
Test Engineer	Lucke Hsieh	Configurations	IEEE 802.11a CH 36 / Chain 4 + Chain 5 + Chain 6
Test Date	May 19, 2015		

Horizontal

	Freq	Level	Limit	Over	Read	Cable	Antenna	Preamp	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	deg	cm		
1	15535.42	62.84	74.00	-11.16	45.51	12.58	38.45	33.70	313	137	Peak	HORIZONTAL
2	15537.86	48.27	54.00	-5.73	30.94	12.58	38.45	33.70	313	137	Average	HORIZONTAL

Vertical

	Freq	Level	Limit	Over	Read	Cable	Antenna	Preamp	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	deg	cm		
1	15538.11	48.24	54.00	-5.76	30.91	12.58	38.45	33.70	257	162	Average	VERTICAL
2	15538.42	63.29	74.00	-10.71	45.96	12.58	38.45	33.70	257	162	Peak	VERTICAL

Temperature	21°C	Humidity	65%
Test Engineer	Lucke Hsieh	Configurations	IEEE 802.11a CH 40 / Chain 4 + Chain 5 + Chain 6
Test Date	May 27, 2015		

Horizontal

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Antenna Factor	Preamp Factor	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	deg	cm		
1	15586.54	66.43	74.00	-7.57	49.22	12.58	38.38	33.75	63	179	Peak	HORIZONTAL
2	15595.83	53.51	54.00	-0.49	36.32	12.58	38.36	33.75	63	179	Average	HORIZONTAL

Vertical

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Antenna Factor	Preamp Factor	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	deg	cm		
1	15596.47	51.14	54.00	-2.86	33.95	12.58	38.36	33.75	61	193	Average	VERTICAL
2	15611.30	63.53	74.00	-10.47	46.37	12.58	38.36	33.78	61	193	Peak	VERTICAL

Temperature	21°C	Humidity	65%
Test Engineer	Lucke Hsieh	Configurations	IEEE 802.11a CH 48 / Chain 4 + Chain 5 + Chain 6
Test Date	May 27, 2015		

Horizontal

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Antenna Factor	Preamp Factor	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	deg	cm		
1	15723.61	50.38	54.00	-3.62	33.50	12.57	38.19	33.88	119	175	Average	HORIZONTAL
2	15724.01	64.19	74.00	-9.81	47.31	12.57	38.19	33.88	119	175	Peak	HORIZONTAL

Vertical

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Antenna Factor	Preamp Factor	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	deg	cm		
1	15714.95	64.25	74.00	-9.75	47.37	12.57	38.19	33.88	93	169	Peak	VERTICAL
2	15723.53	53.10	54.00	-0.90	36.22	12.57	38.19	33.88	93	169	Average	VERTICAL



Temperature	21°C	Humidity	65%
Test Engineer	Lucke Hsieh	Configurations	IEEE 802.11a CH 149 / Chain 4 + Chain 5 + Chain 6
Test Date	May 27, 2015		

Horizontal

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Antenna Factor	Preamp Factor	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	deg	cm		
1	11490.99	61.62	74.00	-12.38	44.89	10.71	39.39	33.37	136	152	Peak	HORIZONTAL
2	11491.35	48.69	54.00	-5.31	31.96	10.71	39.39	33.37	136	152	Average	HORIZONTAL

Vertical

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Antenna Factor	Preamp Factor	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	deg	cm		
1	11492.77	46.18	54.00	-7.82	29.45	10.71	39.39	33.37	160	119	Average	VERTICAL
2	11493.75	58.95	74.00	-15.05	42.21	10.72	39.39	33.37	160	119	Peak	VERTICAL



Temperature	21°C	Humidity	65%
Test Engineer	Lucke Hsieh	Configurations	IEEE 802.11a CH 157 / Chain 4 + Chain 5 + Chain 6
Test Date	May 27, 2015		

Horizontal

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Antenna Factor	Preamp Factor	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	deg	cm		
1	11561.22	59.92	74.00	-14.08	43.12	10.75	39.43	33.38	245	179	Peak	HORIZONTAL
2	11570.54	47.73	54.00	-6.27	30.92	10.76	39.44	33.39	245	179	Average	HORIZONTAL

Vertical

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Antenna Factor	Preamp Factor	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	deg	cm		
1	11571.22	46.72	54.00	-7.28	29.91	10.76	39.44	33.39	356	192	Average	VERTICAL
2	11578.85	57.00	74.00	-17.00	40.19	10.76	39.44	33.39	356	192	Peak	VERTICAL



Temperature	21°C	Humidity	65%
Test Engineer	Lucke Hsieh	Configurations	IEEE 802.11a CH 165 / Chain 4 + Chain 5 + Chain 6
Test Date	May 27, 2015		

Horizontal

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Antenna Factor	Preamp Factor	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	deg	cm		
1	11650.16	60.73	74.00	-13.27	43.85	10.81	39.48	33.41	120	149	Peak	HORIZONTAL
2	11650.27	47.44	54.00	-6.56	30.56	10.81	39.48	33.41	120	149	Average	HORIZONTAL

Vertical

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Antenna Factor	Preamp Factor	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	deg	cm		
1	11646.52	58.02	74.00	-15.98	41.14	10.81	39.48	33.41	64	155	Peak	VERTICAL
2	11647.69	44.89	54.00	-9.11	28.01	10.81	39.48	33.41	64	155	Average	VERTICAL



Temperature	21°C	Humidity	65%
Test Engineer	Lucke Hsieh	Configurations	IEEE 802.11ac MCS0/Nss1 VHT20 CH 36 / Chain 4 + Chain 5 + Chain 6
Test Date	May 21, 2015		

Horizontal

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Antenna Factor	Preamp Factor	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	deg	cm		
1	15539.88	49.01	54.00	-4.99	31.68	12.58	38.45	33.70	86	178	Average	HORIZONTAL
2	15543.40	62.42	74.00	-11.58	45.09	12.58	38.45	33.70	86	178	Peak	HORIZONTAL

Vertical

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Antenna Factor	Preamp Factor	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	deg	cm		
1	15539.92	63.92	74.00	-10.08	46.59	12.58	38.45	33.70	192	163	Peak	VERTICAL
2	15542.26	49.18	54.00	-4.82	31.85	12.58	38.45	33.70	192	163	Average	VERTICAL



Temperature	21°C	Humidity	65%
Test Engineer	Lucke Hsieh	Configurations	IEEE 802.11ac MCS0/Nss1 VHT20 CH 40 / Chain 4 + Chain 5 + Chain 6
Test Date	May 29, 2015		

Horizontal

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Antenna Factor	Preamp Factor	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	deg	cm		
1	15597.04	63.19	74.00	-10.81	46.00	12.58	38.36	33.75	122	174	Peak	HORIZONTAL
2	15598.32	50.46	54.00	-3.54	33.27	12.58	38.36	33.75	122	174	Average	HORIZONTAL

Vertical

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Antenna Factor	Preamp Factor	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	deg	cm		
1	15597.76	53.59	54.00	-0.41	36.40	12.58	38.36	33.75	101	175	Average	VERTICAL
2	15598.48	68.26	74.00	-5.74	51.07	12.58	38.36	33.75	101	175	Peak	VERTICAL



Temperature	21°C	Humidity	65%
Test Engineer	Lucke Hsieh	Configurations	IEEE 802.11ac MCS0/Nss1 VHT20 CH 48 / Chain 4 + Chain 5 + Chain 6
Test Date	May 29, 2015		

Horizontal

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Antenna Factor	Preamp Factor	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	deg	cm		
1	15717.12	50.67	54.00	-3.33	33.79	12.57	38.19	33.88	106	176	Average	HORIZONTAL
2	15717.12	61.40	74.00	-12.60	44.52	12.57	38.19	33.88	106	176	Peak	HORIZONTAL

Vertical

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Antenna Factor	Preamp Factor	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	deg	cm		
1	15717.12	53.17	54.00	-0.83	36.29	12.57	38.19	33.88	97	163	Average	VERTICAL
2	15717.12	64.03	74.00	-9.97	47.15	12.57	38.19	33.88	97	163	Peak	VERTICAL



Temperature	21°C	Humidity	65%
Test Engineer	Lucke Hsieh	Configurations	IEEE 802.11ac MCS0/Nss1 VHT20 CH 149 / Chain 4 + Chain 5 + Chain 6
Test Date	May 29, 2015		

Horizontal

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Antenna Factor	Preamp Factor	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	deg	cm		
1	11491.12	61.74	74.00	-12.26	45.01	10.71	39.39	33.37	138	143	Peak	HORIZONTAL
2	11492.16	49.24	54.00	-4.76	32.51	10.71	39.39	33.37	138	143	Average	HORIZONTAL

Vertical

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Antenna Factor	Preamp Factor	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	deg	cm		
1	11493.85	47.88	54.00	-6.12	31.14	10.72	39.39	33.37	106	158	Average	VERTICAL
2	11494.73	60.29	74.00	-13.71	43.55	10.72	39.39	33.37	106	158	Peak	VERTICAL



Temperature	21°C	Humidity	65%
Test Engineer	Lucke Hsieh	Configurations	IEEE 802.11ac MCS0/Nss1 VHT20 CH 157 / Chain 4 + Chain 5 + Chain 6
Test Date	May 29, 2015		

Horizontal

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Antenna Factor	Preamp Factor	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	deg	cm		
1	11571.83	63.64	74.00	-10.36	46.83	10.76	39.44	33.39	133	140	Peak	HORIZONTAL
2	11572.15	50.12	54.00	-3.88	33.31	10.76	39.44	33.39	133	140	Average	HORIZONTAL

Vertical

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Antenna Factor	Preamp Factor	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	deg	cm		
1	11573.24	60.56	74.00	-13.44	43.75	10.76	39.44	33.39	108	156	Peak	VERTICAL
2	11574.13	48.58	54.00	-5.42	31.77	10.76	39.44	33.39	108	156	Average	VERTICAL



Temperature	21°C	Humidity	65%
Test Engineer	Lucke Hsieh	Configurations	IEEE 802.11ac MCS0/Nss1 VHT20 CH 165 / Chain 4 + Chain 5 + Chain 6
Test Date	May 25, 2015		

Horizontal

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Antenna Factor	Preamp Factor	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	deg	cm		
1	11649.76	61.08	74.00	-12.92	44.20	10.81	39.48	33.41	124	110	Peak	HORIZONTAL
2	11650.36	48.20	54.00	-5.80	31.32	10.81	39.48	33.41	124	110	Average	HORIZONTAL

Vertical

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Antenna Factor	Preamp Factor	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	deg	cm		
1	11652.84	46.44	54.00	-7.56	29.55	10.81	39.49	33.41	97	166	Average	VERTICAL
2	11654.48	58.75	74.00	-15.25	41.86	10.81	39.49	33.41	97	166	Peak	VERTICAL

Temperature	21°C	Humidity	65%
Test Engineer	Lucke Hsieh	Configurations	IEEE 802.11ac MCS0/Nss1 VHT40 CH 38 / Chain 4 + Chain 5 + Chain 6
Test Date	May 21, 2015		

Horizontal

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Antenna Factor	Preamp Factor	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	deg	cm		
1	15569.44	61.87	74.00	-12.13	44.62	12.58	38.40	33.73	46	173	Peak	HORIZONTAL
2	15571.90	48.89	54.00	-5.11	31.64	12.58	38.40	33.73	46	173	Average	HORIZONTAL

Vertical

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Antenna Factor	Preamp Factor	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	deg	cm		
1	15568.80	62.09	74.00	-11.91	44.84	12.58	38.40	33.73	20	136	Peak	VERTICAL
2	15568.92	49.06	54.00	-4.94	31.81	12.58	38.40	33.73	20	136	Average	VERTICAL



Temperature	21°C	Humidity	65%
Test Engineer	Lucke Hsieh	Configurations	IEEE 802.11ac MCS0/Nss1 VHT40 CH 46 / Chain 4 + Chain 5 + Chain 6
Test Date	May 27, 2015		

Horizontal

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Antenna Factor	Preamp Factor	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	deg	cm		
1	15691.54	61.41	74.00	-12.59	44.45	12.58	38.23	33.85	62	170	Peak	HORIZONTAL
2	15691.84	47.81	54.00	-6.19	30.85	12.58	38.23	33.85	62	170	Average	HORIZONTAL

Vertical

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Antenna Factor	Preamp Factor	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	deg	cm		
1	15685.10	47.17	54.00	-6.83	30.21	12.58	38.23	33.85	119	175	Average	VERTICAL
2	15685.16	60.18	74.00	-13.82	43.22	12.58	38.23	33.85	119	175	Peak	VERTICAL



Temperature	21°C	Humidity	65%
Test Engineer	Lucke Hsieh	Configurations	IEEE 802.11ac MCS0/Nss1 VHT40 CH 151 / Chain 4 + Chain 5 + Chain 6
Test Date	May 27, 2015		

Horizontal

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Antenna Factor	Preamp Factor	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	deg	cm		
1	11511.52	45.80	54.00	-8.20	29.05	10.72	39.40	33.37	317	196	Average	HORIZONTAL
2	11513.33	58.44	74.00	-15.56	41.69	10.72	39.40	33.37	317	196	Peak	HORIZONTAL

Vertical

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Antenna Factor	Preamp Factor	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	deg	cm		
1	11508.45	45.55	54.00	-8.45	28.80	10.72	39.40	33.37	123	139	Average	VERTICAL
2	11509.87	58.71	74.00	-15.29	41.96	10.72	39.40	33.37	123	139	Peak	VERTICAL



Temperature	21°C	Humidity	65%
Test Engineer	Lucke Hsieh	Configurations	IEEE 802.11ac MCS0/Nss1 VHT40 CH 159 / Chain 4 + Chain 5 + Chain 6
Test Date	May 27, 2015		

Horizontal

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Antenna Factor	Preamp Factor	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	deg	cm		
1	11592.07	58.21	74.00	-15.79	41.39	10.76	39.45	33.39	34	140	Peak	HORIZONTAL
2	11593.03	45.51	54.00	-8.49	28.69	10.76	39.45	33.39	34	140	Average	HORIZONTAL

Vertical

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Antenna Factor	Preamp Factor	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	deg	cm		
1	11587.63	45.04	54.00	-8.96	28.22	10.76	39.45	33.39	181	131	Average	VERTICAL
2	11591.35	57.77	74.00	-16.23	40.95	10.76	39.45	33.39	181	131	Peak	VERTICAL



Temperature	21°C	Humidity	65%
Test Engineer	Lucke Hsieh	Configurations	IEEE 802.11ac MCS0/Nss1 VHT80 CH 42 / Chain 4 + Chain 5 + Chain 6
Test Date	May 19, 2015		

Horizontal

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Antenna Factor	Preamp Factor	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	deg	cm		
1	15630.00	48.81	54.00	-5.19	31.72	12.58	38.31	33.80	100	149	Average	HORIZONTAL
2	15630.80	61.70	74.00	-12.30	44.61	12.58	38.31	33.80	100	149	Peak	HORIZONTAL

Vertical

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Antenna Factor	Preamp Factor	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	deg	cm		
1	15627.56	62.17	74.00	-11.83	45.06	12.58	38.33	33.80	201	162	Peak	VERTICAL
2	15628.46	49.36	54.00	-4.64	32.25	12.58	38.33	33.80	201	162	Average	VERTICAL



Temperature	21°C	Humidity	65%
Test Engineer	Lucke Hsieh	Configurations	IEEE 802.11ac MCS0/Nss1 VHT80 CH 155 / Chain 4 + Chain 5 + Chain 6
Test Date	May 21, 2015		

Horizontal

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Antenna Factor	Preamp Factor	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	deg	cm		
1	11552.20	45.02	54.00	-8.98	28.22	10.75	39.43	33.38	239	180	Average	HORIZONTAL
2	11553.60	59.03	74.00	-14.97	42.23	10.75	39.43	33.38	239	180	Peak	HORIZONTAL

Vertical

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Antenna Factor	Preamp Factor	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	deg	cm		
1	11554.40	58.11	74.00	-15.89	41.31	10.75	39.43	33.38	167	156	Peak	VERTICAL
2	11558.20	45.08	54.00	-8.92	28.28	10.75	39.43	33.38	167	156	Average	VERTICAL

Note:

The amplitude of spurious emissions that are attenuated by more than 20dB below the permissible value has no need to be reported.

Emission level (dBuV/m) = 20 log Emission level (uV/m).

Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level.

4.7. Band Edge Emissions Measurement

4.7.1. Limit

For transmitters operating in the 5.15-5.25 GHz band: all emissions outside of the 5.15-5.35 GHz band shall not exceed an e.i.r.p. of -27 dBm/MHz.

For transmitters operating in the 5.725-5.85 GHz band: all emissions within the frequency range from the band edge to 10 MHz above or below the band edge shall not exceed an e.i.r.p. of -17 dBm/MHz; for frequencies 10 MHz or greater above or below the band edge, emissions shall not exceed an e.i.r.p. of -27 dBm/MHz.

In addition, In case the emission fall within the restricted band specified on 15.205(a), then the 15.209(a) limit in the table below has to be followed.

Frequencies (MHz)	Field Strength (micorvolts/meter)	Measurement Distance (meters)
0.009~0.490	2400/F(kHz)	300
0.490~1.705	24000/F(kHz)	30
1.705~30.0	30	30
30~88	100	3
88~216	150	3
216~960	200	3
Above 960	500	3

4.7.2. Measuring Instruments and Setting

Please refer to section 5 of equipments list in this report. The following table is the setting of the spectrum analyzer.

Spectrum Parameter	Setting
Attenuation	Auto
Span Frequency	100 MHz
RBW / VBW (Emission in restricted band)	1 MHz / 3MHz for Peak, 1 MHz / 1/T for Average
RBW / VBW (Emission in non-restricted band)	1 MHz / 3MHz for Peak

4.7.3. Test Procedures

1. The test procedure is the same as section 4.6.3.

4.7.4. Test Setup Layout

This test setup layout is the same as that shown in section 4.6.4.

4.7.5. Test Deviation

There is no deviation with the original standard.

4.7.6. EUT Operation during Test

The EUT was programmed to be in continuously transmitting mode.

4.7.7. Test Result of Band Edge and Fundamental Emissions

Temperature	21°C	Humidity	65%
Test Engineer	Lucke Hsieh	Configurations	IEEE 802.11a CH 36, 40, 48 / Chain 4 + Chain 5 + Chain 6
Test Date	May 19, 2015 ~ May 25, 2015		

Channel 36

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Antenna Factor	Preamp Factor	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	deg	cm		
1	5148.40	68.73	74.00	-5.27	61.46	6.21	34.11	33.05	209	181	Peak	VERTICAL
2	5149.60	53.52	54.00	-0.48	46.25	6.21	34.11	33.05	209	181	Average	VERTICAL
3	5178.40	106.59			99.24	6.24	34.16	33.05	209	181	Average	VERTICAL
4	5178.40	116.50			109.15	6.24	34.16	33.05	209	181	Peak	VERTICAL

Item 3, 4 are the fundamental frequency at 5180 MHz.

Channel 40

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Preamp Factor	Antenna Factor	Pol/Phase	T/Pos	A/Pos	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB	dB/m		deg	cm	
1	5149.13	51.71	54.00	-2.29	46.44	7.33	33.58	31.52	VERTICAL	213	165	Average
2	5149.13	66.68	74.00	-7.32	61.41	7.33	33.58	31.52	VERTICAL	213	165	Peak
3	5197.83	118.95			113.57	7.38	33.56	31.56	VERTICAL	213	165	Peak
4	5198.26	108.97			103.59	7.38	33.56	31.56	VERTICAL	213	165	Average

Item 3, 4 are the fundamental frequency at 5200 MHz.

Channel 48

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Preamp Factor	Antenna Factor	Pol/Phase	T/Pos	A/Pos	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB	dB/m		deg	cm	
1	5148.84	59.00	74.00	-15.00	53.73	7.33	33.58	31.52	VERTICAL	334	192	Peak
2	5150.00	46.69	54.00	-7.31	41.42	7.33	33.58	31.52	VERTICAL	334	192	Average
3	5244.63	109.88			104.42	7.42	33.55	31.59	VERTICAL	334	192	Average
4	5245.21	119.42			113.96	7.42	33.55	31.59	VERTICAL	334	192	Peak
5	5350.00	47.36	54.00	-6.64	41.67	7.52	33.51	31.68	VERTICAL	334	192	Average
6	5353.47	60.37	74.00	-13.63	54.68	7.52	33.51	31.68	VERTICAL	334	192	Peak

Item 3, 4 are the fundamental frequency at 5240 MHz.

Temperature	21°C	Humidity	65%
Test Engineer	Lucke Hsieh	Configurations	IEEE 802.11a CH 149, 157, 165 / Chain 4 + Chain 5 + Chain 6
Test Date	May 27, 2015		

Channel 149

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Preamp Factor	Antenna Factor	Pol/Phase	T/Pos	A/Pos	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB	dB/m		deg	cm	
1	5715.00	67.41	68.20	-0.79	60.94	7.79	33.38	32.06	VERTICAL	326	150	Peak
2	5722.68	71.92	78.20	-6.28	65.42	7.79	33.37	32.08	VERTICAL	326	150	Peak
3	5747.03	107.28			100.74	7.81	33.37	32.10	VERTICAL	326	150	Average
4	5747.60	117.40			110.85	7.81	33.36	32.10	VERTICAL	326	150	Peak

Item 3, 4 are the fundamental frequency at 5745 MHz.

Channel 157

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Preamp Factor	Antenna Factor	Pol/Phase	T/Pos	A/Pos	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB	dB/m		deg	cm	
1	5705.74	66.34	68.20	-1.86	59.89	7.78	33.38	32.05	HORIZONTAL	41	169	Peak
2	5725.00	70.31	78.20	-7.89	63.81	7.79	33.37	32.08	HORIZONTAL	41	169	Peak
3	5780.08	119.44			112.82	7.83	33.35	32.14	HORIZONTAL	41	169	Peak
4	5789.92	109.33			102.70	7.83	33.35	32.15	HORIZONTAL	41	169	Average
5	5850.00	69.06	78.20	-9.14	62.29	7.87	33.33	32.23	HORIZONTAL	41	169	Peak
6	5860.00	67.81	68.20	-0.39	61.03	7.87	33.33	32.24	HORIZONTAL	41	169	Peak

Item 3, 4 are the fundamental frequency at 5785 MHz.

Channel 165

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Antenna Factor	Preamp Factor	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	deg	cm		
1	5830.13	115.45			106.96	6.92	34.73	33.16	39	169	Peak	HORIZONTAL
2	5830.45	104.98			96.49	6.92	34.73	33.16	39	169	Average	HORIZONTAL
3	5850.96	75.60	78.20	-2.60	67.08	6.95	34.74	33.17	39	169	Peak	HORIZONTAL
4	5860.00	68.13	68.20	-0.07	59.60	6.97	34.74	33.18	39	169	Peak	HORIZONTAL

Item 1, 2 are the fundamental frequency at 5825 MHz.

Temperature	21°C	Humidity	65%
Test Engineer	Lucke Hsieh	Configurations	IEEE 802.11ac MCS0/Nss1 VHT20 CH 36, 40, 48 / Chain 4 + Chain 5 + Chain 6
Test Date	May 21, 2015 ~ May 25, 2015		

Channel 36

	Freq	Level	Limit	Over	Read	Cable	Antenna	Preamp	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	deg	cm		
1	5150.00	53.30	54.00	-0.70	46.03	6.21	34.11	33.05	196	199	Average	VERTICAL
2	5150.00	66.54	74.00	-7.46	59.27	6.21	34.11	33.05	196	199	Peak	VERTICAL
3	5186.40	106.87			99.52	6.24	34.16	33.05	196	199	Average	VERTICAL
4	5187.00	116.73			109.38	6.24	34.16	33.05	196	199	Peak	VERTICAL

Item 3, 4 are the fundamental frequency at 5180 MHz.

Channel 40

	Freq	Level	Limit	Over	Read	Cable	Antenna	Preamp	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	deg	cm		
1	5142.95	63.73	74.00	-10.27	56.50	6.17	34.11	33.05	279	238	Peak	VERTICAL
2	5144.87	50.69	54.00	-3.31	43.42	6.21	34.11	33.05	279	238	Average	VERTICAL
3	5202.89	108.36			100.96	6.27	34.18	33.05	279	238	Average	VERTICAL
4	5202.89	118.09			110.69	6.27	34.18	33.05	279	238	Peak	VERTICAL

Item 3, 4 are the fundamental frequency at 5200 MHz.

Channel 48

	Freq	Level	Limit	Over	Read	Cable	Preamp	Antenna	Pol/Phase	T/Pos	A/Pos	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB	dB/m		deg	cm	
1	5146.53	59.80	74.00	-14.20	54.53	7.33	33.58	31.52	VERTICAL	3	171	Peak
2	5146.96	47.17	54.00	-6.83	41.90	7.33	33.58	31.52	VERTICAL	3	171	Average
3	5245.64	109.84			104.38	7.42	33.55	31.59	VERTICAL	3	171	Average
4	5246.08	119.53			114.07	7.42	33.55	31.59	VERTICAL	3	171	Peak
5	5350.00	47.93	54.00	-6.07	42.24	7.52	33.51	31.68	VERTICAL	3	171	Average
6	5351.30	60.68	74.00	-13.32	54.99	7.52	33.51	31.68	VERTICAL	3	171	Peak

Item 3, 4 are the fundamental frequency at 5240 MHz.

Temperature	21°C	Humidity	65%
Test Engineer	Lucke Hsieh	Configurations	IEEE 802.11ac MCS0/Nss1 VHT20 CH 149, 157, 165 / Chain 4 + Chain 5 + Chain 6
Test Date	May 21, 2015 ~ May 25, 2015		

Channel 149

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Preamp Factor	Antenna Factor	Pol/Phase	T/Pos	A/Pos	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB	dB/m		deg	cm	
1	5715.00	67.89	68.20	-0.31	61.42	7.79	33.38	32.06	VERTICAL	214	168	Peak
2	5722.68	71.13	78.20	-7.07	64.63	7.79	33.37	32.08	VERTICAL	214	168	Peak
3	5738.05	106.51			100.00	7.80	33.37	32.08	VERTICAL	214	168	Average
4	5750.79	116.73			110.18	7.81	33.36	32.10	VERTICAL	214	168	Peak

Item 3, 4 are the fundamental frequency at 5745 MHz.

Channel 157

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Preamp Factor	Antenna Factor	Pol/Phase	T/Pos	A/Pos	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB	dB/m		deg	cm	
1	5711.09	66.12	68.20	-2.08	59.65	7.79	33.38	32.06	VERTICAL	326	186	Peak
2	5719.79	69.87	78.20	-8.33	63.39	7.79	33.37	32.06	VERTICAL	326	186	Peak
3	5778.49	111.55			104.94	7.82	33.35	32.14	VERTICAL	326	186	Average
4	5778.49	121.62			115.01	7.82	33.35	32.14	VERTICAL	326	186	Peak
5	5859.57	69.56	78.20	-8.64	62.78	7.87	33.33	32.24	VERTICAL	326	186	Peak
6	5861.30	67.53	68.20	-0.67	60.75	7.87	33.33	32.24	VERTICAL	326	186	Peak

Item 3, 4 are the fundamental frequency at 5785 MHz.

Channel 165

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Antenna Factor	Preamp Factor	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	deg	cm		
1	5817.40	105.67			97.19	6.92	34.72	33.16	238	196	Average	VERTICAL
2	5830.60	116.03			107.54	6.92	34.73	33.16	238	196	Peak	VERTICAL
3	5854.20	71.68	78.20	-6.52	63.16	6.95	34.74	33.17	238	196	Peak	VERTICAL
4	5860.60	67.46	68.20	-0.74	58.93	6.97	34.74	33.18	238	196	Peak	VERTICAL

Item 1, 2 are the fundamental frequency at 5825 MHz.

Temperature	21°C	Humidity	65%
Test Engineer	Lucke Hsieh	Configurations	IEEE 802.11ac MCS0/Nss1 VHT40 CH 38, 46 / Chain 4 + Chain 5 + Chain 6
Test Date	May 21, 2015 ~ May 27, 2015		

Channel 38

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Antenna Factor	Preamp Factor	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	deg	cm		
1	5150.00	53.71	54.00	-0.29	46.44	6.21	34.11	33.05	7	200	Average	VERTICAL
2	5150.00	66.67	74.00	-7.33	59.40	6.21	34.11	33.05	7	200	Peak	VERTICAL
3	5181.20	110.84			103.49	6.24	34.16	33.05	7	200	Peak	VERTICAL
4	5182.00	100.38			93.03	6.24	34.16	33.05	7	200	Average	VERTICAL

Item 3, 4 are the fundamental frequency at 5190 MHz.

Channel 46

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Antenna Factor	Preamp Factor	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	deg	cm		
1	5142.98	52.85	54.00	-1.15	45.62	6.17	34.11	33.05	214	234	Average	HORIZONTAL
2	5144.90	66.23	74.00	-7.77	58.96	6.21	34.11	33.05	214	234	Peak	HORIZONTAL
3	5222.79	113.18			105.73	6.30	34.20	33.05	214	234	Peak	HORIZONTAL
4	5223.27	102.93			95.48	6.30	34.20	33.05	214	234	Average	HORIZONTAL

Item 3, 4 are the fundamental frequency at 5230 MHz.

Temperature	21°C	Humidity	65%
Test Engineer	Lucke Hsieh	Configurations	IEEE 802.11ac MCS0/Nss1 VHT40 CH 151, 159 / Chain 4 + Chain 5 + Chain 6
Test Date	May 25, 2015 ~ May 27, 2015		

Channel 151

	Freq	Level	Limit	Over	Read	Cable	Preamp	Antenna	T/Pos	A/Pos	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB	dB/m	deg	cm	
1	5708.63	67.80	68.20	-0.40	61.34	7.78	33.38	32.06	VERTICAL	206	179 Peak
2	5725.00	77.53	78.20	-0.67	71.03	7.79	33.37	32.08	VERTICAL	206	179 Peak
3	5744.00	103.66			97.13	7.80	33.37	32.10	VERTICAL	206	179 Average
4	5764.84	114.15			107.57	7.82	33.36	32.12	VERTICAL	206	179 Peak

Item 3, 4 are the fundamental frequency at 5755 MHz.

Channel 159

	Freq	Level	Limit	Over	Read	Cable	Antenna	Preamp	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	deg	cm		
1	5705.26	62.40	68.20	-5.80	54.02	6.83	34.68	33.13	319	161	Peak	HORIZONTAL
2	5724.49	63.83	78.20	-14.37	55.44	6.83	34.69	33.13	319	161	Peak	HORIZONTAL
3	5803.01	114.69			106.23	6.90	34.72	33.16	319	161	Peak	HORIZONTAL
4	5805.26	104.48			96.02	6.90	34.72	33.16	319	161	Average	HORIZONTAL
5	5850.00	68.13	78.20	-10.07	59.61	6.95	34.74	33.17	319	161	Peak	HORIZONTAL
6	5861.35	67.86	68.20	-0.34	59.33	6.97	34.74	33.18	319	161	Peak	HORIZONTAL

Item 3, 4 are the fundamental frequency at 5795 MHz.

Temperature	21°C	Humidity	65%
Test Engineer	Lucke Hsieh	Configurations	IEEE 802.11ac MCS0/Nss1 VHT80 CH 42, 155 / Chain 4 + Chain 5 + Chain 6
Test Date	May 19, 2015 ~ May 21, 2015		

Channel 42

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Antenna Factor	Preamp Factor	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	deg	cm		
1	5144.00	53.84	54.00	-0.16	46.57	6.21	34.11	33.05	349	174	Average	VERTICAL
2	5144.00	65.73	74.00	-8.27	58.46	6.21	34.11	33.05	349	174	Peak	VERTICAL
3	5197.00	107.60			100.20	6.27	34.18	33.05	349	174	Peak	VERTICAL
4	5205.00	97.12			89.72	6.27	34.18	33.05	349	174	Average	VERTICAL
5	5445.00	48.10	54.00	-5.90	40.09	6.56	34.51	33.06	349	174	Average	VERTICAL
6	5453.00	59.77	74.00	-14.23	51.70	6.60	34.53	33.06	349	174	Peak	VERTICAL

Item 3, 4 are the fundamental frequency at 5210 MHz.

Channel 155

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Antenna Factor	Preamp Factor	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	deg	cm		
1	5715.00	67.81	68.20	-0.39	59.43	6.83	34.68	33.13	222	201	Peak	VERTICAL
2	5725.00	73.71	78.20	-4.49	65.32	6.83	34.69	33.13	222	201	Peak	VERTICAL
3	5764.00	107.58			99.15	6.88	34.70	33.15	222	201	Peak	VERTICAL
4	5798.00	91.34			82.88	6.90	34.72	33.16	222	201	Average	VERTICAL
5	5859.00	63.72	78.20	-14.48	55.19	6.97	34.74	33.18	222	201	Peak	VERTICAL
6	5870.00	63.29	68.20	-4.91	54.76	6.97	34.74	33.18	222	201	Peak	VERTICAL

Item 3, 4 are the fundamental frequency at 5775 MHz.

Note:

Emission level (dBuV/m) = 20 log Emission level (uV/m)

Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level

4.8. Frequency Stability Measurement

4.8.1. Limit

In-band emission is maintained within the band of operation under all conditions of normal operation as specified in the user's manual.

The transmitter center frequency tolerance shall be ± 20 ppm maximum for the 5 GHz band (IEEE 802.11n specification).

4.8.2. Measuring Instruments and Setting


Please refer to section 5 of equipments list in this report. The following table is the setting of the spectrum analyzer.

Spectrum Parameter	Setting
Attenuation	Auto
Span Frequency	Entire absence of modulation emissions bandwidth
RBW	10 kHz
VBW	10 kHz
Sweep Time	Auto

4.8.3. Test Procedures

1. The transmitter output (antenna port) was connected to the spectrum analyzer.
2. EUT have transmitted absence of modulation signal and fixed channelize.
3. Set the spectrum analyzer span to view the entire absence of modulation emissions bandwidth.
4. Set RBW = 10 kHz, VBW = 10 kHz with peak detector and maxhold settings.
5. f_c is declaring of channel frequency. Then the frequency error formula is $(f_c - f)/f_c \times 10^6$ ppm and the limit is less than ± 20 ppm (IEEE 802.11n specification).
6. The test extreme voltage is to change the primary supply voltage from 85 to 115 percent of the nominal value
7. Extreme temperature is $-20^\circ\text{C} \sim 50^\circ\text{C}$.

4.8.4. Test Setup Layout

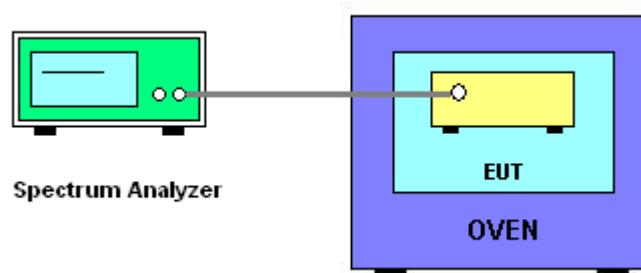

4.8.5. Test Deviation

There is no deviation with the original standard.

4.8.6. EUT Operation during Test

The EUT was programmed to be in continuously un-modulation transmitting mode.

4.8.7. Test Result of Frequency Stability

Temperature	25°C	Humidity	45%
Test Engineer	Lucke Hsieh	Test Date	Jun. 03, 2015

Mode: 20 MHz

Voltage vs. Frequency Stability

Voltage	Measurement Frequency (MHz)	
	5200 MHz	5785 MHz
(V)		
126.50	5199.9924	5784.9956
110.00	5199.9965	5784.9966
93.50	5199.9935	5784.9956
Max. Deviation (MHz)	0.007600	0.004400
Max. Deviation (ppm)	1.46	0.76

Temperature vs. Frequency Stability

Temperature	Measurement Frequency (MHz)	
	5200 MHz	5785 MHz
(°C)		
-20	5199.9963	5784.9966
-10	5199.9965	5784.9954
0	5199.9963	5784.9950
10	5199.9945	5784.9986
20	5199.9956	5784.9997
30	5199.9960	5784.9956
40	5199.9956	5784.9966
50	5199.9946	5784.9956
Max. Deviation (MHz)	0.005500	0.005000
Max. Deviation (ppm)	1.06	0.86

Mode: 40 MHz

Voltage vs. Frequency Stability

Voltage	Measurement Frequency (MHz)	
	5190 MHz	5755 MHz
(V)	5189.9963	5754.9960
126.50	5189.9946	5754.9986
110.00	5189.9956	5754.9960
93.50	5189.9956	5754.9960
Max. Deviation (MHz)	0.005400	0.004000
Max. Deviation (ppm)	1.04	0.70

Temperature vs. Frequency Stability

Temperature	Measurement Frequency (MHz)	
	5190 MHz	5755 MHz
(°C)	5189.9956	5754.9986
-20	5189.9966	5754.9974
-10	5189.9946	5754.9986
0	5189.9956	5754.9966
10	5189.9966	5754.9986
20	5189.9965	5754.9965
30	5189.9965	5754.9988
40	5189.9966	5754.9963
50	5189.9966	5754.9963
Max. Deviation (MHz)	0.005400	0.003700
Max. Deviation (ppm)	1.04	0.64

Mode: 80 MHz

Voltage vs. Frequency Stability

Voltage	Measurement Frequency (MHz)	
(V)	5210 MHz	5775 MHz
126.50	5209.9967	5774.9966
110.00	5209.9965	5774.9986
93.50	5209.9946	5774.9985
Max. Deviation (MHz)	0.005400	0.003400
Max. Deviation (ppm)	1.04	0.59

Temperature vs. Frequency Stability

Temperature	Measurement Frequency (MHz)	
(°C)	5210 MHz	5775 MHz
-20	5209.9995	5774.9985
-10	5209.9965	5774.9986
0	5209.9966	5774.9986
10	5209.9946	5774.9958
20	5209.9965	5774.9986
30	5209.9966	5774.9956
40	5209.9976	5774.9965
50	5209.9986	5774.9996
Max. Deviation (MHz)	0.005400	0.004400
Max. Deviation (ppm)	1.04	0.76

4.9. Antenna Requirements

4.9.1. Limit

Except for special regulations, the Low-power Radio-frequency Devices must not be equipped with any jacket for installing an antenna with extension cable. An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this Section. The manufacturer may design the unit so that the user can replace a broken antenna, but the use of a standard antenna jack or electrical connector is prohibited. Further, this requirement does not apply to intentional radiators that must be professionally installed.

4.9.2. Antenna Connector Construction

Please refer to section 3.3 in this test report; antenna connector complied with the requirements.

5. LIST OF MEASURING EQUIPMENTS

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Remark
EMI Test Receiver	R&S	ESCS 30	100355	9kHz ~ 2.75GHz	Apr. 22, 2015	Conduction (CO01-CB)
LISN	F.C.C.	FCC-LISN-50-16-2	04083	150kHz ~ 100MHz	Dec. 02, 2014	Conduction (CO01-CB)
LISN	Schwarzbeck	NSLK 8127	8127647	9kHz ~ 30MHz	Dec. 02, 2014	Conduction (CO01-CB)
COND Cable	Woken	Cable	01	150kHz ~ 30MHz	Dec. 03, 2014	Conduction (CO01-CB)
Software	Audix	E3	5.410e	-	N.C.R.	Conduction (CO01-CB)
BILOG ANTENNA	Schaffner	CBL6112D	22021	20MHz ~ 2GHz	May 06, 2015	Radiation (03CH01-CB)
Loop Antenna	Teseq	HLA 6120	24155	9kHz - 30 MHz	Mar. 12, 2015	Radiation (03CH01-CB)
Horn Antenna	EMCO	3115	00075790	750MHz ~ 18GHz	Oct. 28, 2014	Radiation (03CH01-CB)
Horn Antenna	Schwarzbeck	BBHA 9170	BBHA9170252	15GHz ~ 40GHz	Aug. 22, 2014	Radiation (03CH01-CB)
Pre-Amplifier	Agilent	8447D	2944A10991	0.1MHz ~ 1.3GHz	Feb. 24, 2015	Radiation (03CH01-CB)
Pre-Amplifier	Agilent	8449B	3008A02310	1GHz ~ 26.5GHz	Jan. 12, 2015	Radiation (03CH01-CB)
Pre-Amplifier	WM	TF-130N-R1	923365	26GHz ~ 40GHz	Nov. 25, 2014	Radiation (03CH01-CB)
Spectrum Analyzer	R&S	FSP40	100056	9kHz ~ 40GHz	Nov. 06, 2014	Radiation (03CH01-CB)
EMI Receiver	Agilent	N9038A	MY52260123	9kHz ~ 8.4GHz	Jan. 21, 2015	Radiation (03CH01-CB)
RF Cable-low	Woken	Low Cable-1	N/A	30 MHz ~ 1 GHz	Nov. 15, 2014	Radiation (03CH01-CB)
RF Cable-high	Woken	High Cable-40G-1	N/A	1 GHz ~ 40 GHz	Nov. 15, 2014	Radiation (03CH01-CB)
RF Cable-high	Woken	High Cable-40G-2	N/A	1 GHz ~ 40 GHz	Nov. 15, 2014	Radiation (03CH01-CB)
Spectrum analyzer	R&S	FSV40	100979	9kHz~40GHz	Dec. 12, 2014	Conducted (TH01-CB)
Temp. and Humidity Chamber	Ten Billion	TTH-D3SP	TBN-931011	-30~100 degree	Jun. 02, 2015	Conducted (TH01-CB)
RF Cable-high	Woken	RG402	High Cable-7	1 GHz – 26.5 GHz	Nov. 15, 2014	Conducted (TH01-CB)
RF Cable-high	Woken	RG402	High Cable-8	1 GHz – 26.5 GHz	Nov. 15, 2014	Conducted (TH01-CB)
RF Cable-high	Woken	RG402	High Cable-9	1 GHz – 26.5 GHz	Nov. 15, 2014	Conducted (TH01-CB)
RF Cable-high	Woken	RG402	High Cable-10	1 GHz – 26.5 GHz	Nov. 15, 2014	Conducted (TH01-CB)
RF Cable-high	Woken	RG402	High Cable-6	1 GHz – 26.5 GHz	Nov. 15, 2014	Conducted (TH01-CB)



Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Remark
Power Sensor	Agilent	U2021XA	MY53410001	50MHz~18GHz	Nov. 03, 2014	Conducted (TH01-CB)

Note: Calibration Interval of instruments listed above is one year.

N.C.R. means Non-Calibration required.

6. MEASUREMENT UNCERTAINTY

Test Items	Uncertainty	Remark
Conducted Emission (150kHz ~ 30MHz)	2.4 dB	Confidence levels of 95%
Radiated Emission (30MHz ~ 1,000MHz)	3.6 dB	Confidence levels of 95%
Radiated Emission (1GHz ~ 18GHz)	3.7 dB	Confidence levels of 95%
Radiated Emission (18GHz ~ 40GHz)	3.5 dB	Confidence levels of 95%
Conducted Emission	1.7 dB	Confidence levels of 95%