

# TEST REPORT

**Applicant:** FCC: Magtek Incorporated  
IC: MagTek Inc

**Address of Applicant:** FCC: 1710 Apollo Court, seal beach, California 90740, United States  
IC: 1710 Apollo Court Seal Beach CA 90740 United States

**Manufacturer:** FCC: Magtek Incorporated  
IC: MagTek Inc

**Address of Manufacturer:** FCC: 1710 Apollo Court, seal beach, California 90740, United States  
IC: 1710 Apollo Court Seal Beach CA 90740 United States

**Equipment Under Test (EUT)**

Product Name: DynaGlass

Model No.: 40000102, 40000101

Trade Mark: MAGTEK

**FCC ID:** U73-40000102

**IC:** 23169-40000102

**Applicable standards:** FCC CFR Title 47 Part 15 Subpart C Section 15.247  
RSS-247 Issue 2  
RSS-Gen Issue 5

**Date of sample receipt:** July 07, 2020

**Date of Test:** July 08, 2020-August 31, 2020

**Date of report issued:** August 31, 2020

**Test Result :** PASS \*

\* In the configuration tested, the EUT complied with the standards specified above.

Authorized Signature:



**Robinson Lo**

**Laboratory Manager**

This results shown in this test report refer only to the sample(s) tested, this test report cannot be reproduced, except in full, without prior written permission of the company. The report would be invalid without specific stamp of test institute and the signatures of compiler and approver.

## 2 Version

Version No.	Date	Description
00	August 31, 2020	Original

**Prepared By:** Tiger Chen **Date:** August 31, 2020  
**Project Engineer**

**Check By:** Robinson **Date:** August 31, 2020  
**Reviewer**

## 3 Contents

	Page
<b>1 COVER PAGE</b> .....	<b>1</b>
<b>2 VERSION</b> .....	<b>2</b>
<b>3 CONTENTS</b> .....	<b>3</b>
<b>4 TEST SUMMARY</b> .....	<b>4</b>
<b>5 GENERAL INFORMATION</b> .....	<b>5</b>
5.1 GENERAL DESCRIPTION OF EUT .....	5
5.2 TEST MODE .....	7
5.3 DESCRIPTION OF SUPPORT UNITS .....	7
5.4 DEVIATION FROM STANDARDS .....	7
5.5 ABNORMALITIES FROM STANDARD CONDITIONS .....	7
5.6 TEST FACILITY .....	7
5.7 TEST LOCATION .....	7
<b>6 TEST INSTRUMENTS LIST</b> .....	<b>8</b>
<b>7 TEST RESULTS AND MEASUREMENT DATA</b> .....	<b>10</b>
7.1 ANTENNA REQUIREMENT .....	10
7.2 CONDUCTED EMISSIONS .....	11
7.3 CONDUCTED PEAK OUTPUT POWER .....	14
7.4 20dB EMISSION BANDWIDTH & 99% OCCUPY BANDWIDTH .....	18
7.5 CARRIER FREQUENCIES SEPARATION .....	22
7.6 HOPPING CHANNEL NUMBER .....	26
7.7 DWELL TIME .....	28
7.8 BAND EDGE .....	30
7.8.1 <i>Conducted Emission Method</i> .....	30
7.8.2 <i>Radiated Emission Method</i> .....	34
7.9 SPURIOUS EMISSION .....	37
7.9.1 <i>Conducted Emission Method</i> .....	37
7.9.2 <i>Radiated Emission Method</i> .....	39
7.10 FREQUENCY STABILITY .....	47
<b>8 TEST SETUP PHOTO</b> .....	<b>49</b>
<b>9 EUT CONSTRUCTIONAL DETAILS</b> .....	<b>49</b>

## 4 Test Summary

Test Item	Section in CFR 47	Result
Antenna Requirement	15.203/15.247 (c) RSS-Gen Section 6.8	Pass
AC Power Line Conducted Emission	15.207 RSS-Gen Section 8.8	Pass
Conducted Peak Output Power	15.247 (b)(1) RSS-247 Section 5.4(b)	Pass
20dB Occupied Bandwidth & 99% Occupy Bandwidth	15.247 (a)(1) RSS-247 Section 5.1(a) RSS-Gen Section 6.7	Pass
Carrier Frequencies Separation	15.247 (a)(1) RSS-247 Section 5.1(b)	Pass
Hopping Channel Number	15.247 (a)(1) RSS-247 Section 5.1(d)	Pass
Dwell Time	15.247 (a)(1) RSS-247 Section 5.1(d)	Pass
Pseudorandom Frequency Hopping Sequence	15.247(b)(4) RSS-247 Section 5.1	Pass
Radiated Emission	15.205/15.209 Section 3.3 & RSS-Gen Section 8.9	Pass
Band Edge	15.247(d) RSS-247 Section 5.5	Pass
Frequency stability	RSS-Gen Section 6.11& Section 8.11	Pass

**Remarks:**

1. Pass: The EUT complies with the essential requirements in the standard.
2. Test according to ANSI C63.10:2013 and RSS-Gen.

### Measurement Uncertainty

Test Item	Frequency Range	Measurement Uncertainty	Notes
Radiated Emission	30MHz-200MHz	3.8039dB	(1)
Radiated Emission	200MHz-1GHz	3.9679dB	(1)
Radiated Emission	1GHz-18GHz	4.29dB	(1)
Radiated Emission	18GHz-40GHz	3.30dB	(1)
AC Power Line Conducted Emission	0.15MHz ~ 30MHz	3.44dB	(1)

Note (1): The measurement uncertainty is for coverage factor of k=2 and a level of confidence of 95%.

## 5 General Information

### 5.1 General Description of EUT

Product Name:	DynaGlass
Model No.:	40000102, 40000101
Test Model No:	40000102
Remark: All above models are identical in the same PCB layout, interior structure and electrical circuits. The differences are appearance color and model name for commercial purpose.	
Test sample(s) ID:	GTS202007000071-1
Sample(s) Status:	Engineer sample
S/N:	B90A998
Hardware Version:	DynaGlass_AND_V040 DynaGlass_PAY_V040
Software Version:	Android:0.9.05; Max32550-LCS+:1.0.0
Operation Frequency:	2402MHz~2480MHz
Channel numbers:	79
Channel separation:	1MHz
Modulation type:	GFSK, $\pi/4$ -DQPSK, 8-DPSK
Antenna Type:	Integral Antenna
Antenna gain:	1.67dBi(declare by applicant)
Power supply:	DC 5V or DC 7.4V 1850mAh 13.69Wh by Li-ion battery

Operation Frequency each of channel							
Channel	Frequency	Channel	Frequency	Channel	Frequency	Channel	Frequency
1	2402MHz	21	2422MHz	41	2442MHz	61	2462MHz
2	2403MHz	22	2423MHz	42	2443MHz	62	2463MHz
3	2404MHz	23	2424MHz	43	2444MHz	63	2464MHz
4	2405MHz	24	2425MHz	44	2445MHz	64	2465MHz
5	2406MHz	25	2426MHz	45	2446MHz	65	2466MHz
6	2407MHz	26	2427MHz	46	2447MHz	66	2467MHz
7	2408MHz	27	2428MHz	47	2448MHz	67	2468MHz
8	2409MHz	28	2429MHz	48	2449MHz	68	2469MHz
9	2410MHz	29	2430MHz	49	2450MHz	69	2470MHz
10	2411MHz	30	2431MHz	50	2451MHz	70	2471MHz
11	2412MHz	31	2432MHz	51	2452MHz	71	2472MHz
12	2413MHz	32	2433MHz	52	2453MHz	72	2473MHz
13	2414MHz	33	2434MHz	53	2454MHz	73	2474MHz
14	2415MHz	34	2435MHz	54	2455MHz	74	2475MHz
15	2416MHz	35	2436MHz	55	2456MHz	75	2476MHz
16	2417MHz	36	2437MHz	56	2457MHz	76	2477MHz
17	2418MHz	37	2438MHz	57	2458MHz	77	2478MHz
18	2419MHz	38	2439MHz	58	2459MHz	78	2479MHz
19	2420MHz	39	2440MHz	59	2460MHz	79	2480MHz
20	2421MHz	40	2441MHz	60	2461MHz		

**Note:**

In section 15.31(m), regards to the operating frequency range over 10 MHz, the Lowest frequency, the middle frequency, and the highest frequency of channel were selected to perform the test, and the selected channel see below:

Channel	Frequency
The lowest channel	2402MHz
The middle channel	2441MHz
The Highest channel	2480MHz

## 5.2 Test mode

Transmitting mode	Keep the EUT in continuously transmitting mode.
-------------------	---

## 5.3 Description of Support Units

Manufacturer	Description	Model	Serial Number
Lenovo	Notebook PC	E40-80	N/A
Apple	PC	A1278	C1MN99ERDTY3

## 5.4 Deviation from Standards

None.
-------

## 5.5 Abnormalities from Standard Conditions

None.
-------

## 5.6 Test Facility

<p>The test facility is recognized, certified, or accredited by the following organizations:</p> <ul style="list-style-type: none"> <li>● <b>FCC —Registration No.: 381383</b> Global United Technology Services Co., Ltd., Shenzhen EMC Laboratory has been registered and fully described in a report filed with the (FCC) Federal Communications Commission. The acceptance letter from the FCC is maintained in files. Registration 381383.</li> <li>● <b>IC —Registration No.: 9079A</b> The 3m Semi-anechoic chamber of Global United Technology Services Co., Ltd. has been registered by Certification and Engineering Bureau of Industry Canada for radio equipment testing with Registration No.: 9079A</li> <li>● <b>NVLAP (LAB CODE:600179-0)</b> Global United Technology Services Co., Ltd., is accredited by the National Voluntary Laboratory Accreditation Program (NVLAP). LAB CODE:600179-0</li> </ul>
---

## 5.7 Test Location

All tests were performed at:
<p>Global United Technology Services Co., Ltd. Address: No. 123-128, Tower A, Jinyuan Business Building, No.2, Laodong Industrial Zone, Xixiang Road, Baoan District, Shenzhen, Guangdong, China 518102 Tel: 0755-27798480 Fax: 0755-27798960</p>

## 6 Test Instruments list

Radiated Emission:						
Item	Test Equipment	Manufacturer	Model No.	Inventory No.	Cal.Date (mm-dd-yy)	Cal.Due date (mm-dd-yy)
1	3m Semi- Anechoic Chamber	ZhongYu Electron	9.2(L)*6.2(W)* 6.4(H)	GTS250	July. 02 2020	July. 01 2025
2	Control Room	ZhongYu Electron	6.2(L)*2.5(W)* 2.4(H)	GTS251	N/A	N/A
3	EMI Test Receiver	Rohde & Schwarz	ESU26	GTS203	June. 25 2020	June. 24 2021
4	BiConiLog Antenna	SCHWARZBECK MESS-ELEKTRONIK	VULB9163	GTS214	June. 25 2020	June. 24 2021
5	Double -ridged waveguide horn	SCHWARZBECK MESS-ELEKTRONIK	BBHA 9120 D	GTS208	June. 25 2020	June. 24 2021
6	Horn Antenna	ETS-LINDGREN	3160	GTS217	June. 25 2020	June. 24 2021
7	EMI Test Software	AUDIX	E3	N/A	N/A	N/A
8	Coaxial Cable	GTS	N/A	GTS213	June. 25 2020	June. 24 2021
9	Coaxial Cable	GTS	N/A	GTS211	June. 25 2020	June. 24 2021
10	Coaxial cable	GTS	N/A	GTS210	June. 25 2020	June. 24 2021
11	Coaxial Cable	GTS	N/A	GTS212	June. 25 2020	June. 24 2021
12	Amplifier(100kHz-3GHz)	HP	8347A	GTS204	June. 25 2020	June. 24 2021
13	Amplifier(2GHz-20GHz)	HP	84722A	GTS206	June. 25 2020	June. 24 2021
14	Amplifier (18-26GHz)	Rohde & Schwarz	AFS33-18002 650-30-8P-44	GTS218	June. 25 2020	June. 24 2021
15	Band filter	Amindeon	82346	GTS219	June. 25 2020	June. 24 2021
16	Power Meter	Anritsu	ML2495A	GTS540	June. 25 2020	June. 24 2021
17	Power Sensor	Anritsu	MA2411B	GTS541	June. 25 2020	June. 24 2021
18	Wideband Radio Communication Tester	Rohde & Schwarz	CMW500	GTS575	June. 25 2020	June. 24 2021
19	Splitter	Agilent	11636B	GTS237	June. 25 2020	June. 24 2021
20	Loop Antenna	ZHINAN	ZN30900A	GTS534	June. 25 2020	June. 24 2021
21	Breitband hornantenne	SCHWARZBECK	BBHA 9170	GTS579	Oct. 19 2019	Oct. 18 2020
22	Amplifier	TDK	PA-02-02	GTS574	Oct. 19 2019	Oct. 18 2020
23	Amplifier	TDK	PA-02-03	GTS576	Oct. 19 2019	Oct. 18 2020
24	PSA Series Spectrum Analyzer	Rohde & Schwarz	FSP	GTS578	June. 25 2020	June. 24 2021



Conducted Emission						
Item	Test Equipment	Manufacturer	Model No.	Inventory No.	Cal.Date (mm-dd-yy)	Cal.Due date (mm-dd-yy)
1	Shielding Room	ZhongYu Electron	7.3(L)x3.1(W)x2.9(H)	GTS252	May.15 2019	May.14 2022
2	EMI Test Receiver	R&S	ESCI 7	GTS552	June. 25 2020	June. 24 2021
3	Coaxial Switch	ANRITSU CORP	MP59B	GTS225	June. 25 2020	June. 24 2021
4	ENV216 2-L-V-NETZNACHB.DE	ROHDE&SCHWARZ	ENV216	GTS226	June. 25 2020	June. 24 2021
5	Coaxial Cable	GTS	N/A	GTS227	N/A	N/A
6	EMI Test Software	AUDIX	E3	N/A	N/A	N/A
7	Thermo meter	KTJ	TA328	GTS233	June. 25 2020	June. 24 2021
8	Absorbing clamp	Elektronik-Feinmechanik	MDS21	GTS229	June. 25 2020	June. 24 2021
9	ISN	SCHWARZBECK	NTFM 8158	GTD565	June. 25 2020	June. 24 2021

RF Conducted Test:						
Item	Test Equipment	Manufacturer	Model No.	Serial No.	Cal.Date (mm-dd-yy)	Cal.Due date (mm-dd-yy)
1	MXA Signal Analyzer	Agilent	N9020A	GTS566	June. 25 2020	June. 24 2021
2	EMI Test Receiver	R&S	ESCI 7	GTS552	June. 25 2020	June. 24 2021
3	Spectrum Analyzer	Agilent	E4440A	GTS533	June. 25 2020	June. 24 2021
4	MXG vector Signal Generator	Agilent	N5182A	GTS567	June. 25 2020	June. 24 2021
5	ESG Analog Signal Generator	Agilent	E4428C	GTS568	June. 25 2020	June. 24 2021
6	USB RF Power Sensor	DARE	RPR3006W	GTS569	June. 25 2020	June. 24 2021
7	RF Switch Box	Shongyi	RFSW3003328	GTS571	June. 25 2020	June. 24 2021
8	Programmable Constant Temp & Humi Test Chamber	WEWON	WHTH-150L-40-880	GTS572	June. 25 2020	June. 24 2021

General used equipment:						
Item	Test Equipment	Manufacturer	Model No.	Inventory No.	Cal.Date (mm-dd-yy)	Cal.Due date (mm-dd-yy)
1	Humidity/ Temperature Indicator	KTJ	TA328	GTS243	June. 25 2020	June. 24 2021
2	Barometer	ChangChun	DYM3	GTS255	June. 25 2020	June. 24 2021

## 7 Test results and Measurement Data

### 7.1 Antenna requirement


<b>Standard requirement:</b>	FCC Part15 C Section 15.203 /247(c)
<p><b>15.203 requirement:</b></p> <p>An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.</p> <p><b>15.247(c) (1)(i) requirement:</b></p> <p>(i) Systems operating in the 2400-2483.5 MHz band that is used exclusively for fixed. Point-to-point operations may employ transmitting antennas with directional gain greater than 6dBi provided the maximum conducted output power of the intentional radiator is reduced by 1 dB for every 3 dB that the directional gain of the antenna exceeds 6dBi.</p>	
<b>Standard requirement:</b>	RSS-Gen Section 6.8
<p>A transmitter can only be sold or operated with antennas with which it was approved. When a measurement at the antenna connector is used to determine RF output power, the effective gain of the device's antenna shall be stated, based on measurement or on data from the antenna manufacturer. For transmitters of RF output power of 10 milliwatts or less, only the portion of the antenna gain that is in excess of 6 dBi (6 dB above isotropic gain) shall be added to the measured RF output power to demonstrate compliance with the radiated power limits specified in the applicable standard. For transmitters of output power greater than 10 milliwatts, the total antenna gain shall be added to the measured RF output power to demonstrate compliance to the specified radiated power</p>	
<b>E.U.T Antenna:</b>	
<p><i>The antenna is Integral antenna, the best case gain of the antenna is 1.67dBi, reference to the appendix II for details</i></p>	

## 7.2 Conducted Emissions

Test Requirement:	FCC Part15 C Section 15.207 RSS-Gen Section 8.8					
Test Method:	ANSI C63.10:2013 and RSS-Gen					
Test Frequency Range:	150KHz to 30MHz					
Class / Severity:	Class B					
Receiver setup:	RBW=9KHz, VBW=30KHz, Sweep time=auto					
Limit:	Frequency range (MHz)	Limit (dBuV)				
		Quasi-peak		Average		
	0.15-0.5	66 to 56*		56 to 46*		
	0.5-5	56		46		
	5-30	60		50		
* Decreases with the logarithm of the frequency.						
Test setup:	<p>Remark: E.U.T: Equipment Under Test LISN: Line Impedance Stabilization Network Test table height=0.8m</p>					
Test procedure:	<ol style="list-style-type: none"> <li>1. The E.U.T and simulators are connected to the main power through a line impedance stabilization network (L.I.S.N.). This provides a 50ohm/50uH coupling impedance for the measuring equipment.</li> <li>2. The peripheral devices are also connected to the main power through a LISN that provides a 50ohm/50uH coupling impedance with 50ohm termination. (Please refer to the block diagram of the test setup and photographs).</li> <li>3. Both sides of A.C. line are checked for maximum conducted interference. In order to find the maximum emission, the relative positions of equipment and all of the interface cables must be changed according to ANSI C63.10:2013 on conducted measurement.</li> </ol>					
Test Instruments:	Refer to section 6.0 for details					
Test mode:	Refer to section 5.2 for details					
Test environment:	Temp.:	25 °C	Humid.:	52%	Press.:	1012mbar
Test results:	Pass					


**Measurement data:**

Line:

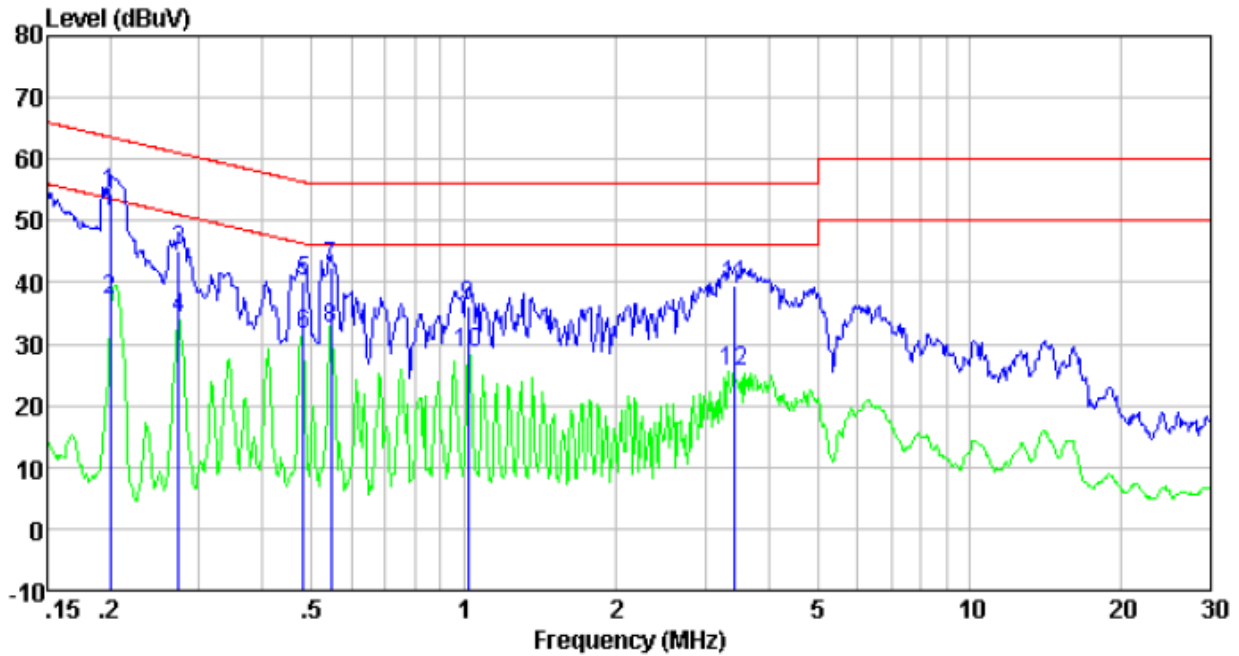

Freq. MHz	Read Level dBuV	Factor dB/m	Level dBuV	Limit Line dBuV	Over Limit dB	Remark
0.20	33.76	20.51	54.27	63.62	-9.35	QP
0.20	16.55	20.51	37.06	53.62	-16.56	Average
0.27	24.56	20.50	45.06	61.03	-15.97	QP
0.27	13.55	20.50	34.05	51.03	-16.98	Average
0.48	19.81	20.43	40.24	56.32	-16.08	QP
0.48	11.13	20.43	31.56	46.32	-14.76	Average
0.55	22.02	20.42	42.44	56.00	-13.56	QP
0.55	12.21	20.42	32.63	46.00	-13.37	Average
1.02	15.91	20.35	36.26	56.00	-19.74	QP
1.02	8.07	20.35	28.42	46.00	-17.58	Average
3.44	19.13	20.38	39.51	56.00	-16.49	QP
3.44	5.22	20.38	25.60	46.00	-20.40	Average

**Neutral:**

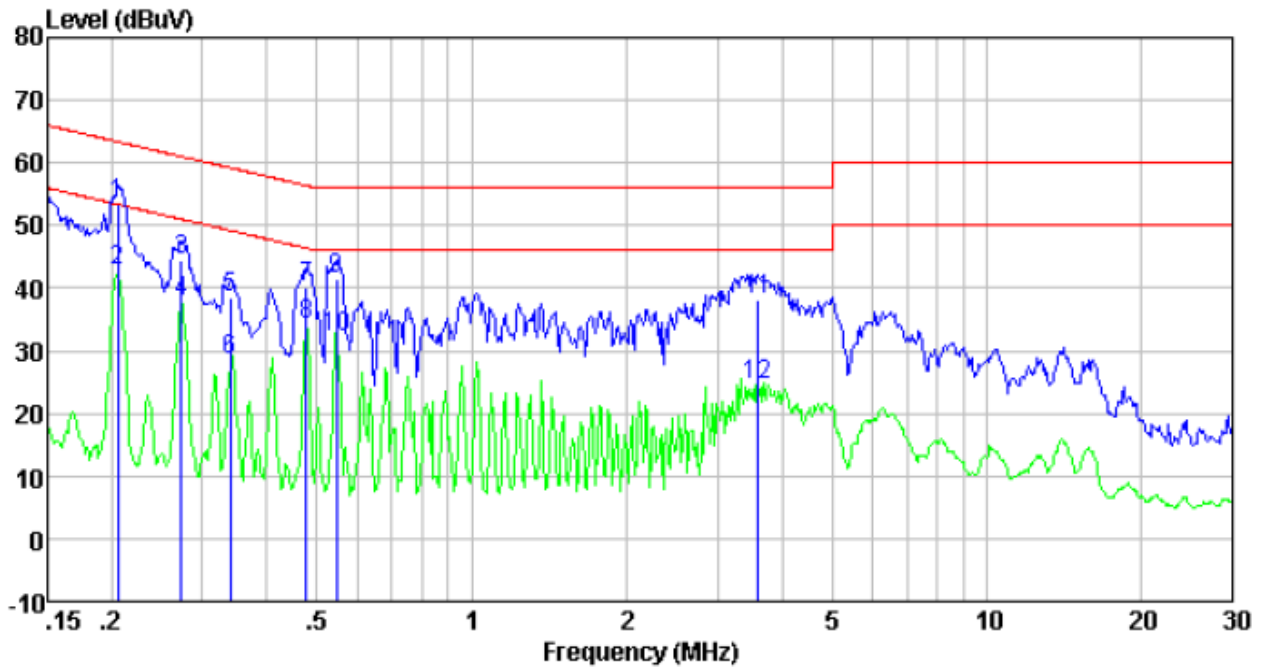


Freq. MHz	Read Level dBuV	Factor dB/m	Level dBuV	Limit Line dBuV	Over Limit dB	Remark
0.21	32.83	20.51	53.34	63.40	-10.06	QP
0.21	22.32	20.51	42.83	53.40	-10.57	Average
0.27	24.04	20.50	44.54	61.03	-16.49	QP
0.27	17.42	20.50	37.92	51.03	-13.11	Average
0.34	17.99	20.48	38.47	59.22	-20.75	QP
0.34	7.92	20.48	28.40	49.22	-20.82	Average
0.48	19.79	20.43	40.22	56.41	-16.19	QP
0.48	13.83	20.43	34.26	46.41	-12.15	Average
0.55	20.96	20.42	41.38	56.00	-14.62	QP
0.55	11.65	20.42	32.07	46.00	-13.93	Average
3.60	17.82	20.38	38.20	56.00	-17.80	QP
3.60	4.10	20.38	24.48	46.00	-21.52	Average

*Notes:*

1. An initial pre-scan was performed on the line and neutral lines with peak detector.
2. Quasi-Peak and Average measurement were performed at the frequencies with maximized peak emission.
3. Final Level = Receiver Read level + LISN Factor + Cable Loss

### 7.3 Conducted Peak Output Power

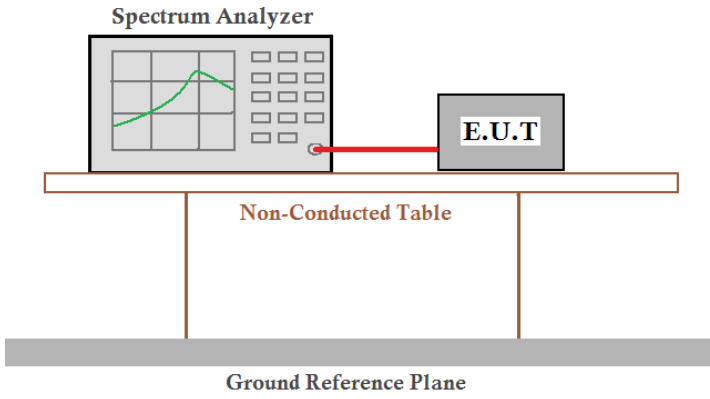
Test Requirement:	FCC Part15 C Section 15.247 (b)(3) RSS-247 Section 5.4(b)
Test Method:	ANSI C63.10:2013 and RSS-Gen
Limit:	20.97dBm 36dBm(4W for e.i.r.p.)
Test setup:	
Test Instruments:	Refer to section 6.0 for details
Test mode:	Refer to section 5.2 for details
Test results:	Pass

#### Measurement Data


Mode	Test channel	Peak Output Power (dBm)	e.i.r.p. (dBm)	Limit (dBm)	e.i.r.p. (dBm)	Result
GFSK	Lowest	0.98	2.65	20.97	36	Pass
	Middle	1.20	2.87			
	Highest	0.73	2.40			
$\pi/4$ -DQPSK	Lowest	1.00	2.67	20.97	36	Pass
	Middle	1.02	2.69			
	Highest	0.73	2.40			
8-DPSK	Lowest	1.39	3.06	20.97	36	Pass
	Middle	1.47	3.14			
	Highest	1.08	2.75			

Test plot as follows:


Test mode:	GFSK mode
------------	-----------

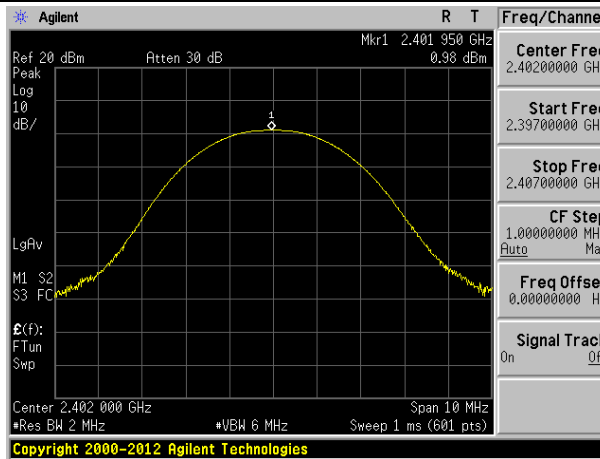

Lowest channel

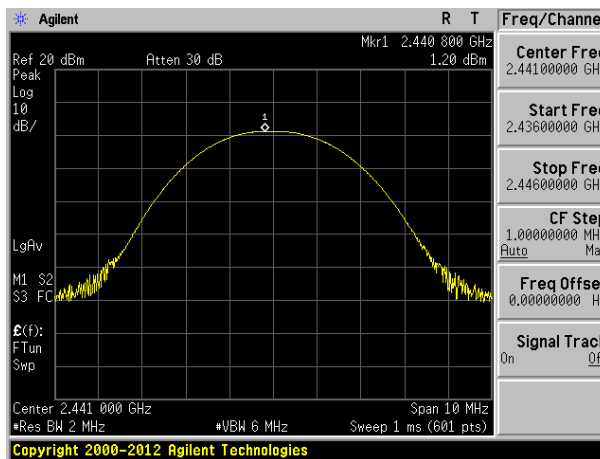


Middle channel

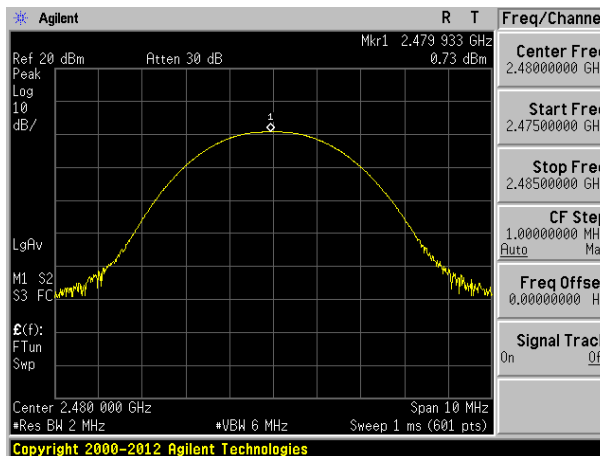


Highest channel


Test mode: π/4-DQPSK mode

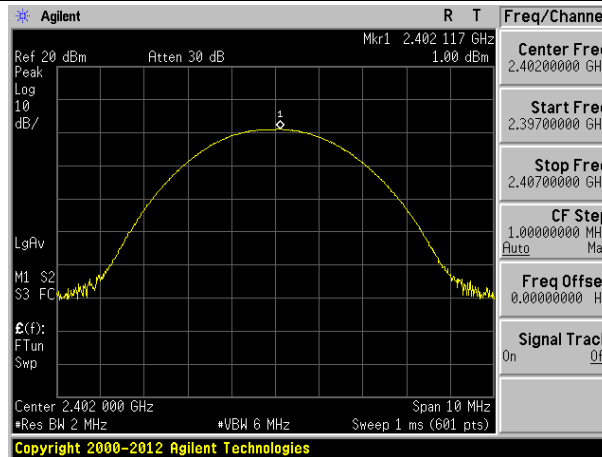

Lowest channel

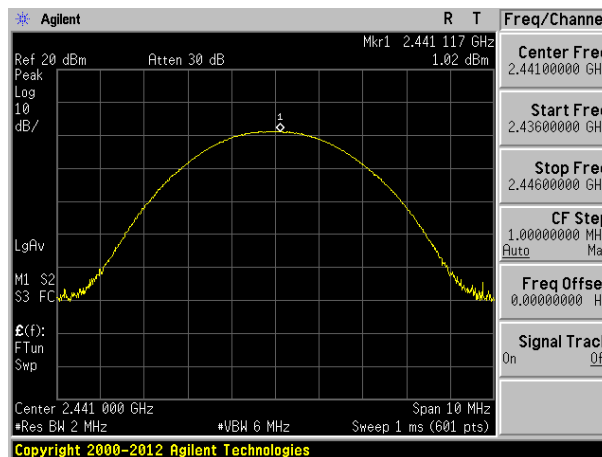


Middle channel

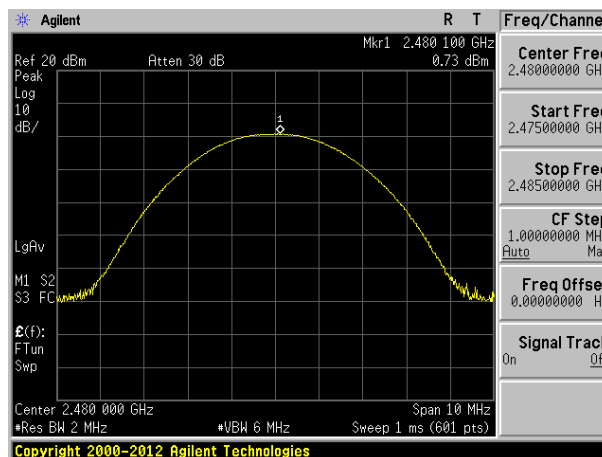


Highest channel




Test mode: 8-DPSK mode

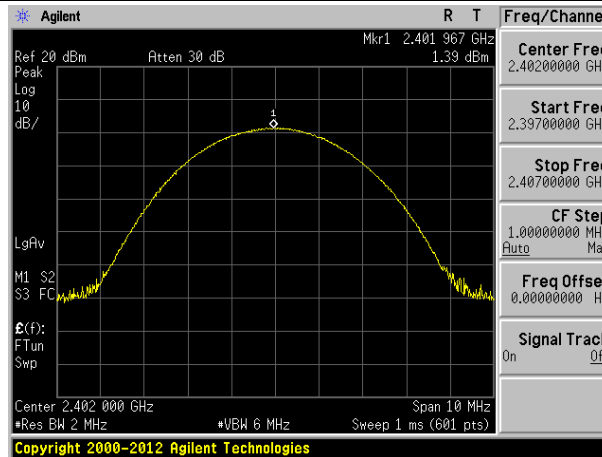

Lowest channel

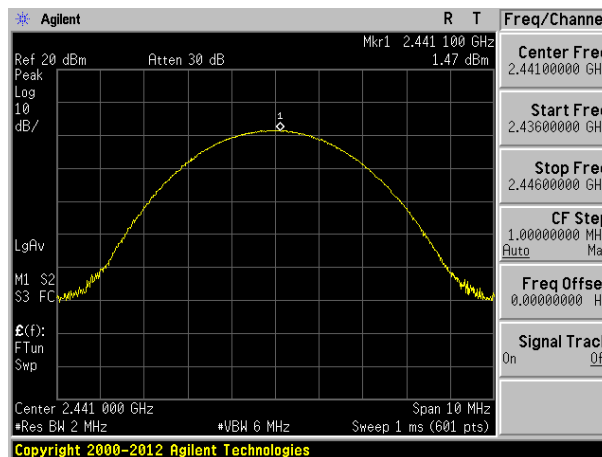


Middle channel

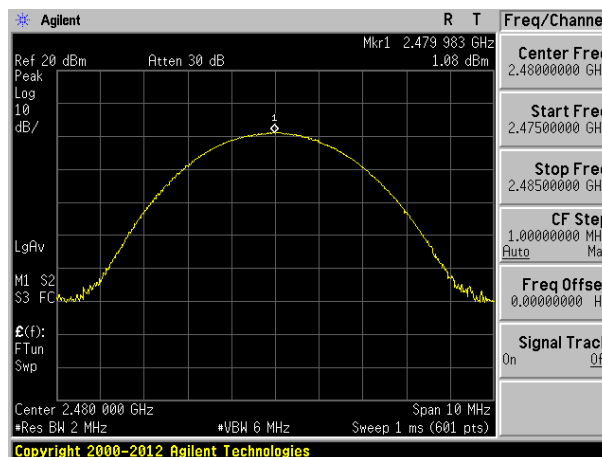

Highest channel

## 7.4 20dB Emission Bandwidth & 99% Occupy Bandwidth

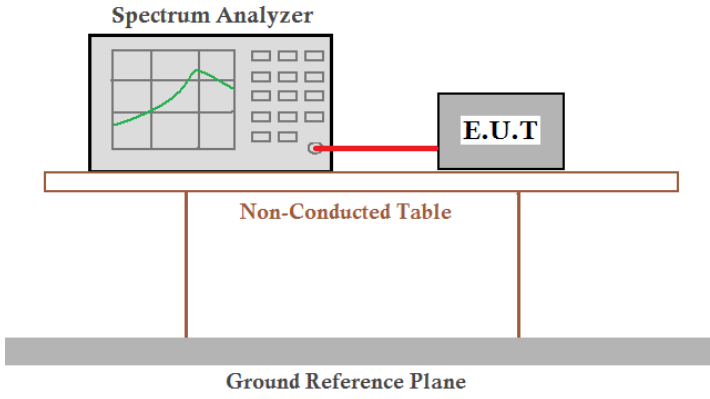
Test Requirement:	FCC Part15 C Section 15.247 (a)(2) RSS-Gen Section 6.7 & RSS-247 Section 5.1(a)
Test Method:	ANSI C63.10:2013 and RSS-Gen
Limit:	N/A
Test setup:	
Test Instruments:	Refer to section 6.0 for details
Test mode:	Refer to section 5.2 for details
Test results:	Pass

### Measurement Data

Test CH	20dB Emission Bandwidth (MHz)			Result
	GFSK	$\pi/4$ -DQPSK	8-DPSK	
Lowest	1.105	1.352	1.355	Pass
Middle	1.109	1.365	1.348	
Highest	1.111	1.348	1.350	

Test CH	99% Occupy Bandwidth (MHz)			Result
	GFSK	$\pi/4$ -DQPSK	8-DPSK	
Lowest	0.866	1.0637	1.0899	Pass
Middle	0.865	1.0628	1.1021	
Highest	0.865	1.0621	1.0997	


Test plot as follows:

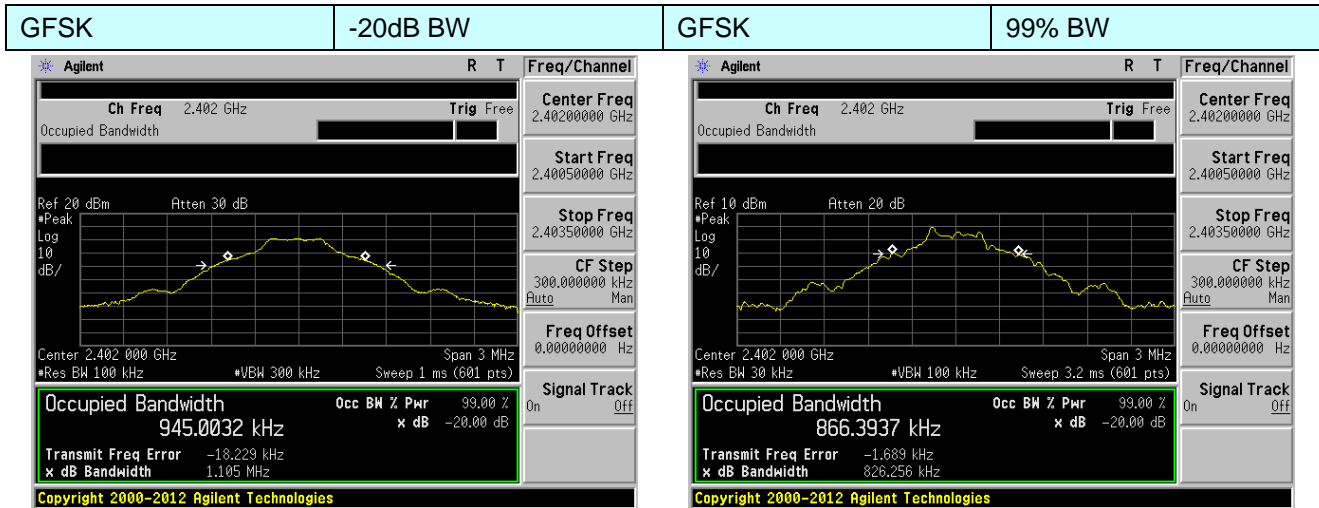


Lowest channel




Middle channel

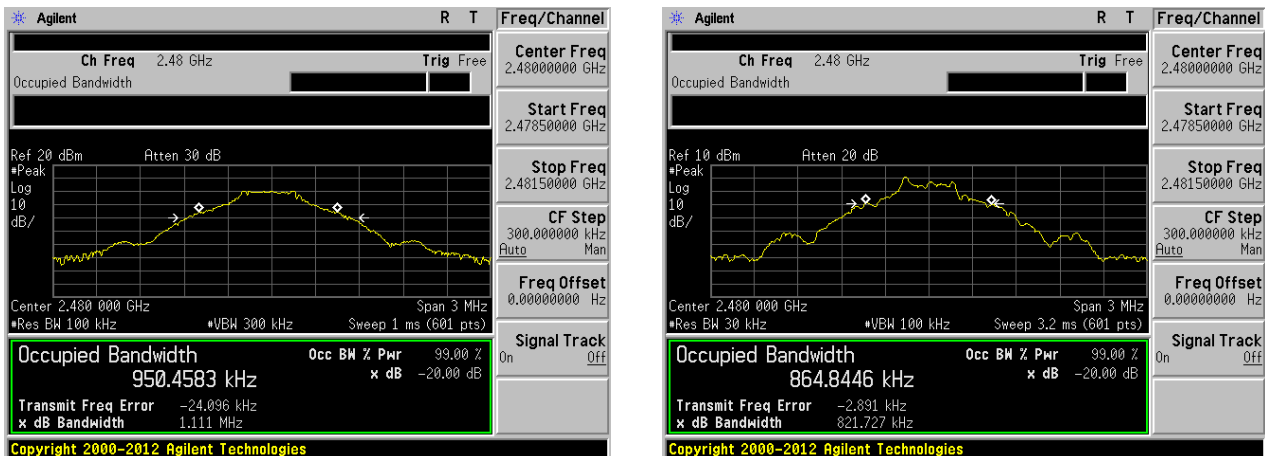


Highest channel

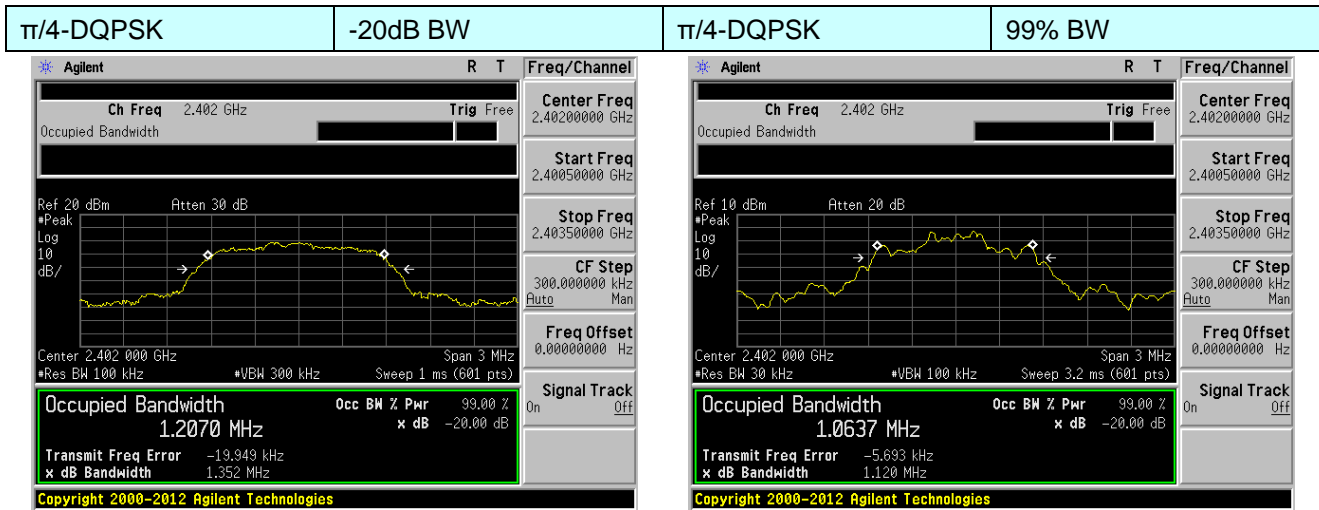


Lowest channel

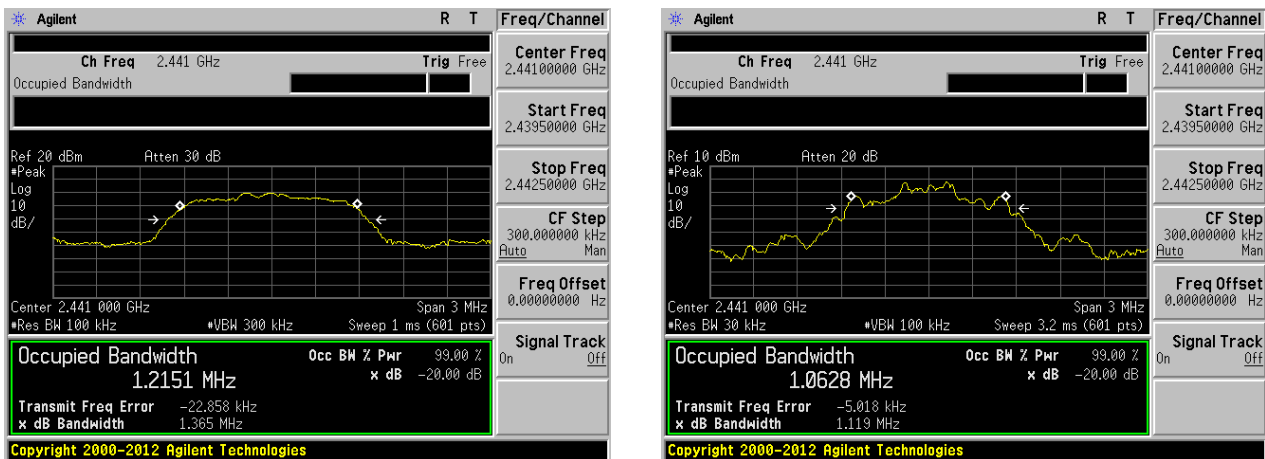


Middle channel

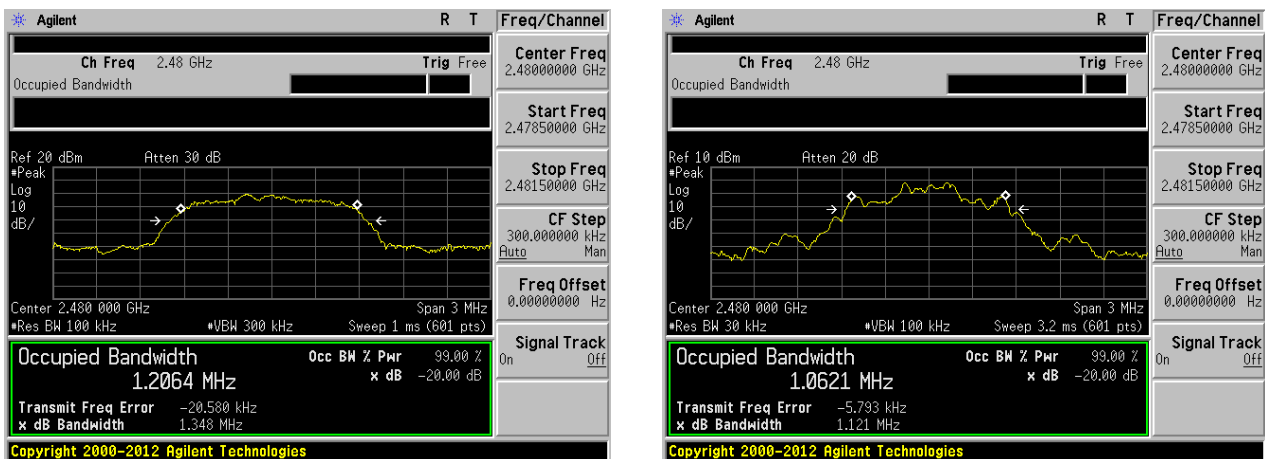


Highest channel

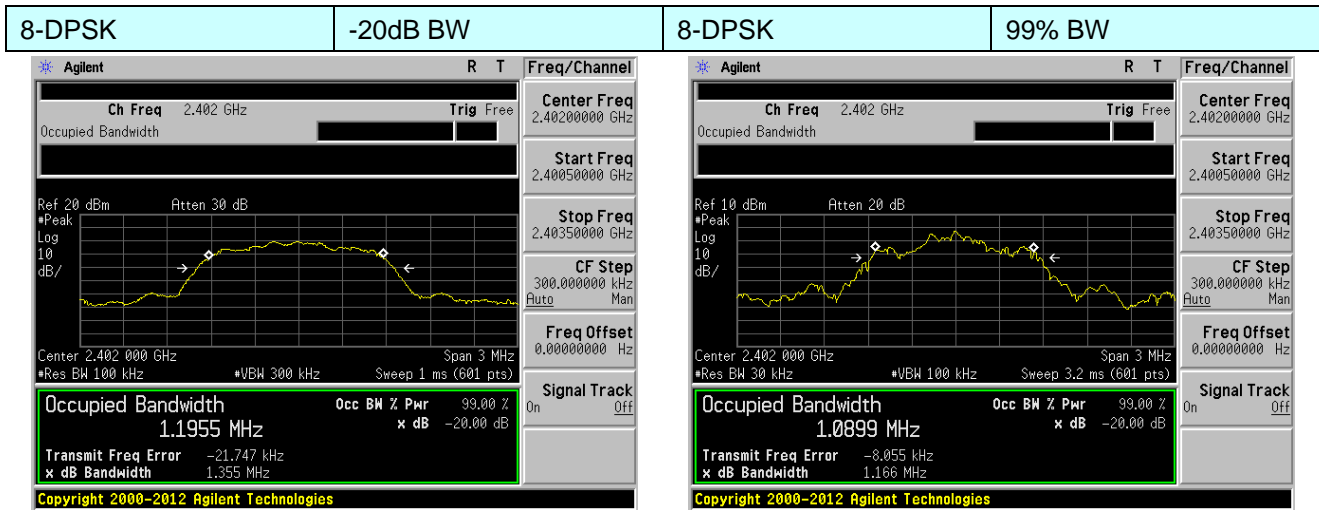

Lowest channel

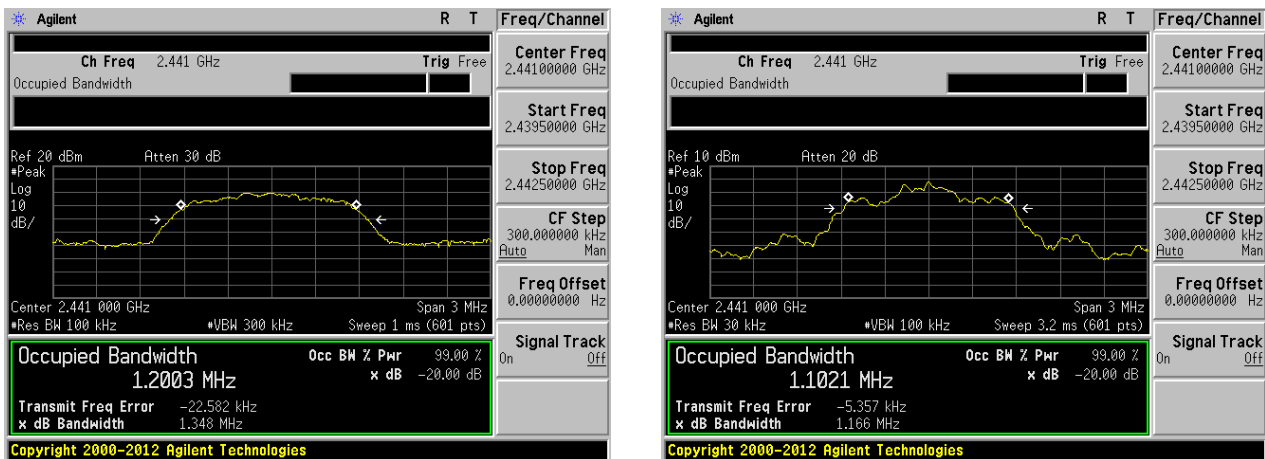


Middle channel

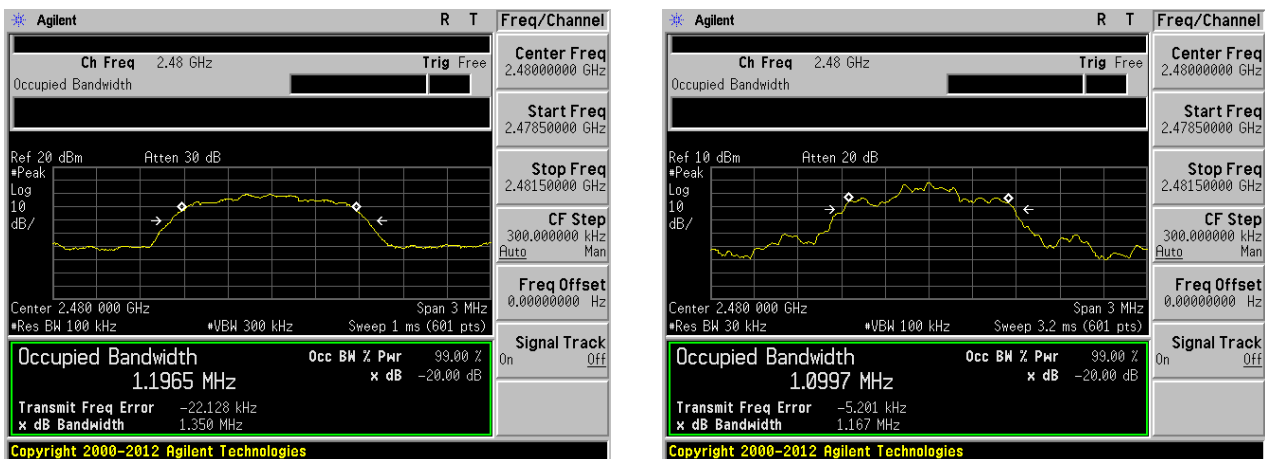

Highest channel

## 7.5 Carrier Frequencies Separation

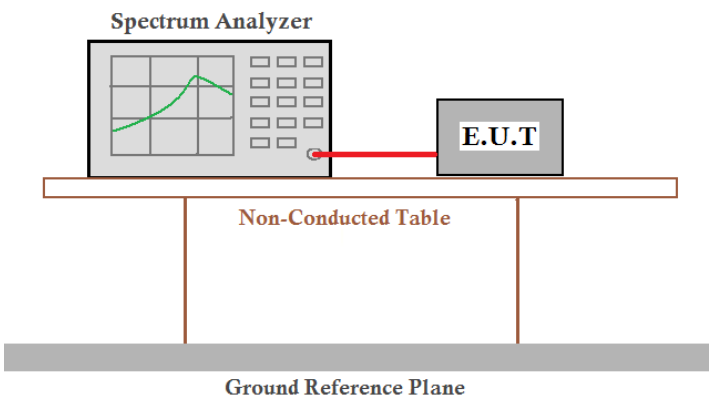Test Requirement:	FCC Part15 C Section 15.247 (a)(1) RSS-247 Section 5.1(b)
Test Method:	ANSI C63.10:2013 and RSS-Gen
Receiver setup:	RBW=100KHz, VBW=300KHz, detector=Peak
Limit:	0.025MHz or 2/3 of the 20dB bandwidth (whichever is greater)
Test setup:	
Test Instruments:	Refer to section 6.0 for details
Test mode:	Refer to section 5.2 for details
Test results:	Pass

### Measurement Data


Mode	Test channel	Carrier Frequencies Separation (kHz)	Limit (kHz)	Result
GFSK	Lowest	1005	633	Pass
	Middle	1005	633	Pass
	Highest	1010	633	Pass
$\pi/4$ -DQPSK	Lowest	1005	910	Pass
	Middle	1005	910	Pass
	Highest	1005	910	Pass
8-DPSK	Lowest	1005	903	Pass
	Middle	1005	903	Pass
	Highest	1005	903	Pass

Note: According to section 7.4


Mode	20dB bandwidth (kHz) (worse case)	Limit (kHz) (Carrier Frequencies Separation)
GFSK	950	633
$\pi/4$ -DQPSK	1365	910
8-DPSK	1355	903

Test plot as follows:


Test mode:	GFSK mode
------------	-----------

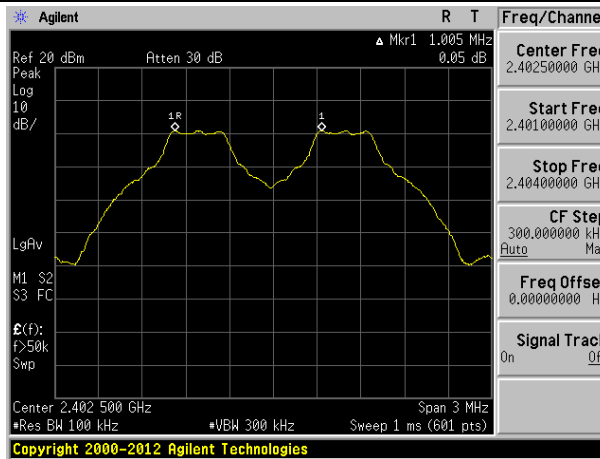

Lowest channel

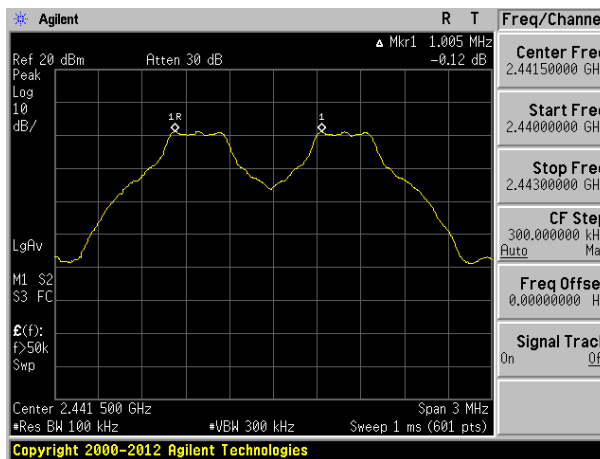


Middle channel

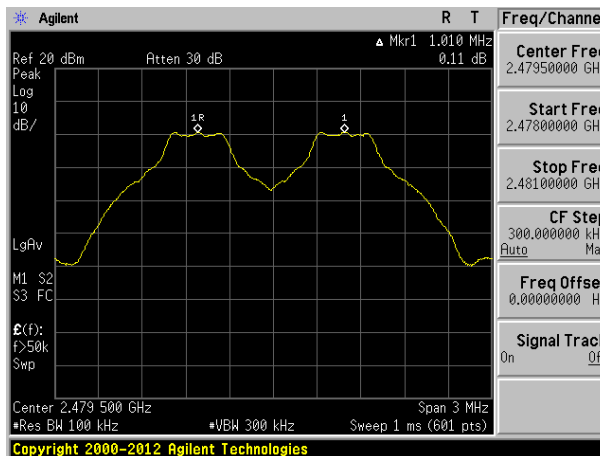


Highest channel


Test mode: π/4-DQPSK mode

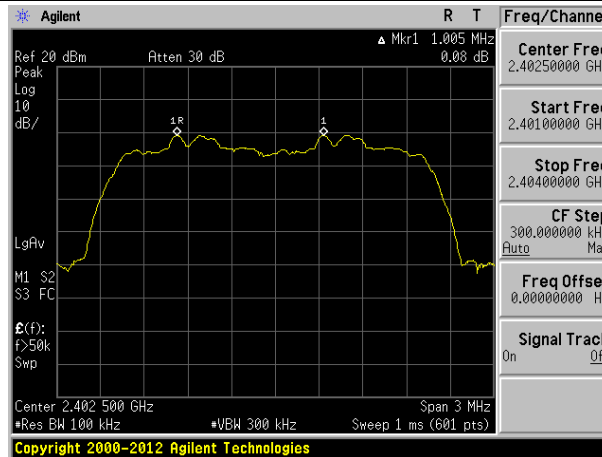

Lowest channel

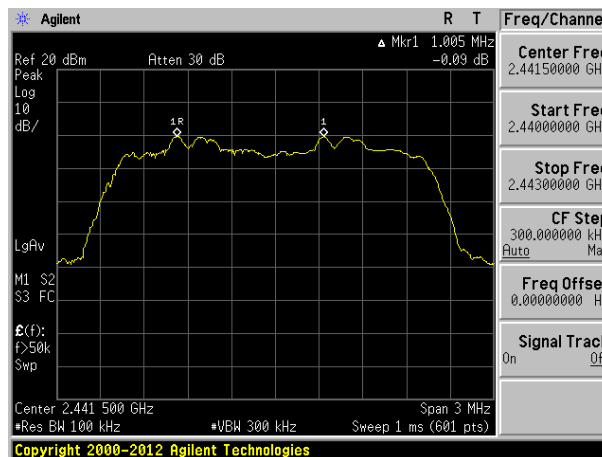


Middle channel

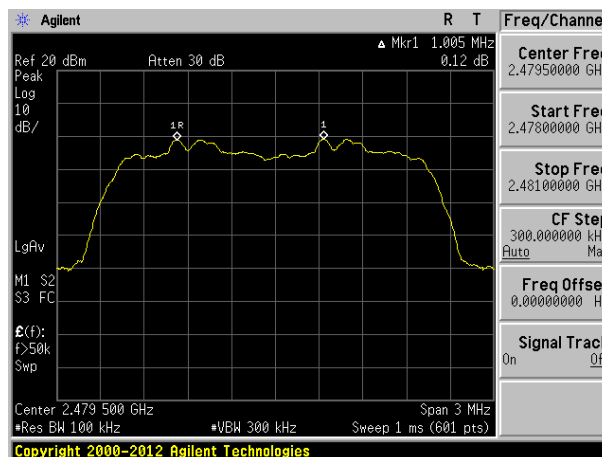


Highest channel




Test mode: 8-DPSK mode

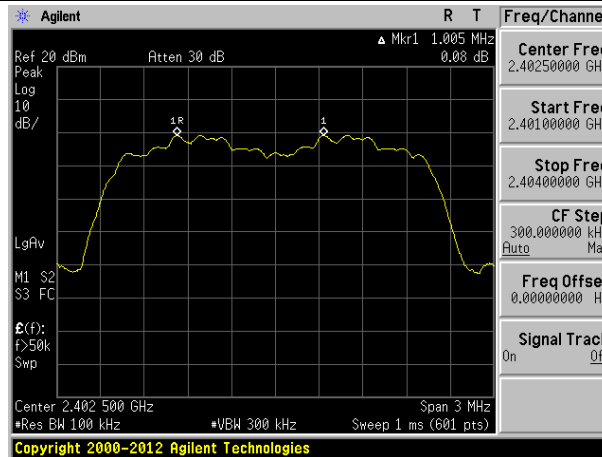

Lowest channel

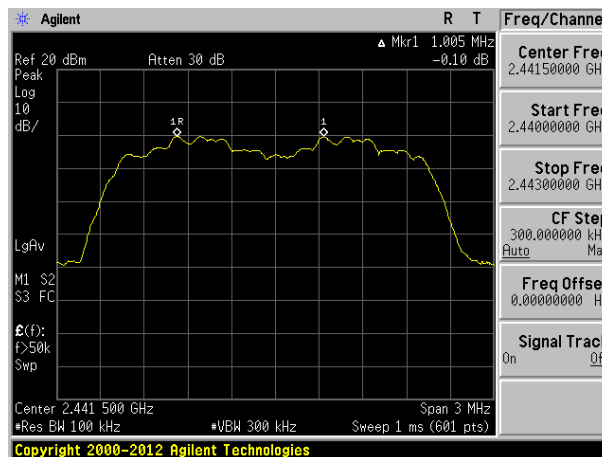


Middle channel

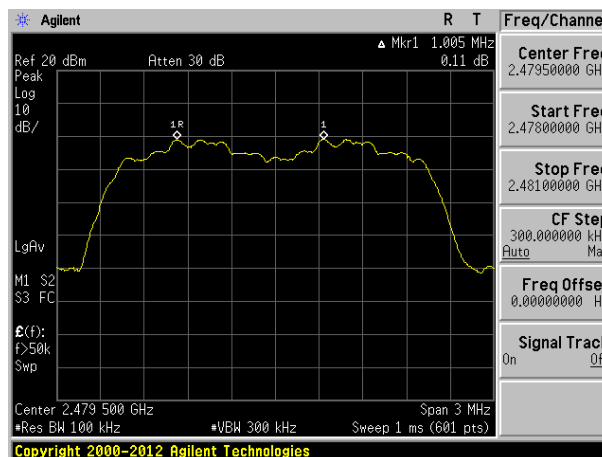

Highest channel


## 7.6 Hopping Channel Number

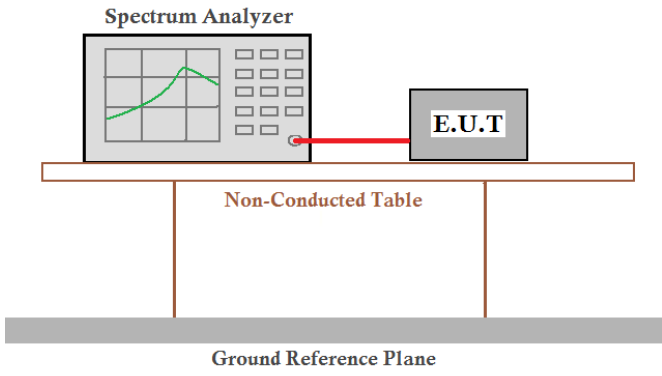Test Requirement:	FCC Part15 C Section 15.247 (a)(1) RSS-247 Section 5.1(d)
Test Method:	ANSI C63.10:2013 and RSS-Gen
Receiver setup:	RBW=100kHz, VBW=300kHz, Frequency range=2400MHz-2483.5MHz, Detector=Peak
Limit:	15 channels
Test setup:	 <p>The diagram illustrates the test setup. A Spectrum Analyzer is connected via a red cable to an E.U.T. (Equipment Under Test). Both are placed on a Non-Conducted Table. Below the table is a Ground Reference Plane.</p>
Test Instruments:	Refer to section 6.0 for details
Test mode:	Refer to section 5.2 for details
Test results:	Pass


### Measurement Data:

Mode	Hopping channel numbers	Limit	Result
GFSK	79	15	Pass
$\pi/4$ -DQPSK	79	15	Pass
8-DPSK	79	15	Pass


Test mode: **GFSK mode**

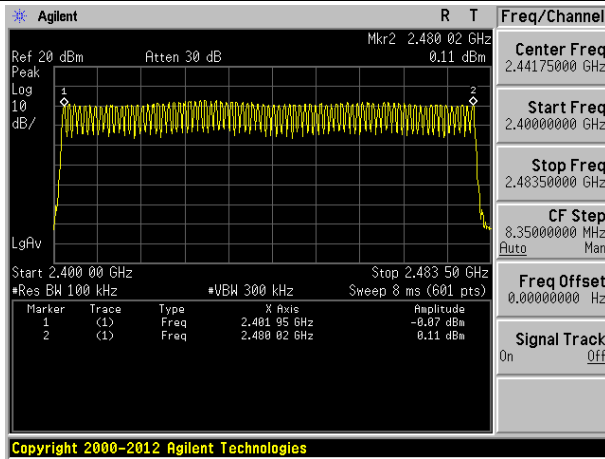


Test mode:  **$\pi/4$ -DQPSK mode**

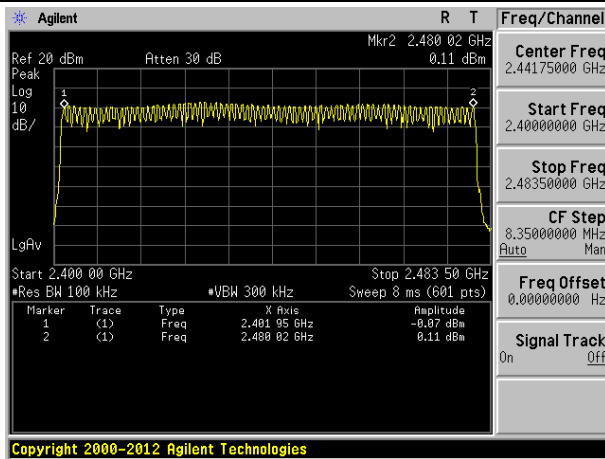

Test mode: **8-DPSK mode**

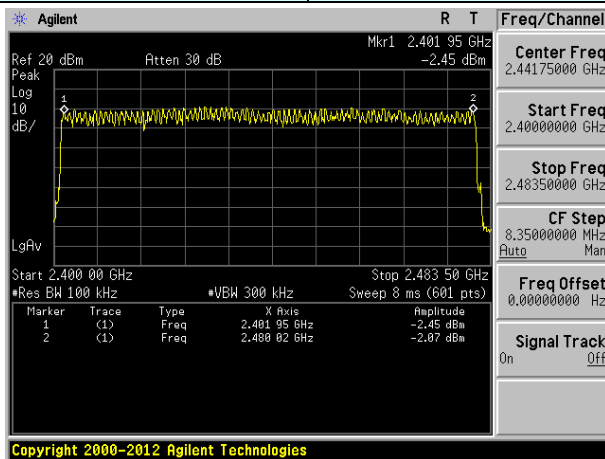

## 7.7 Dwell Time

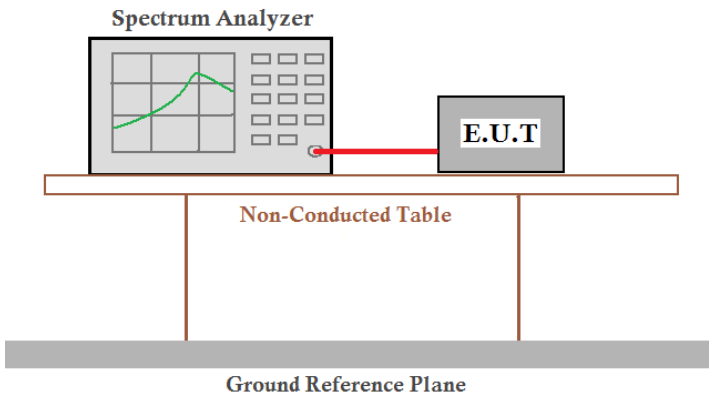Test Requirement:	FCC Part15 C Section 15.247 (a)(1) RSS-247 Section 5.1(d)
Test Method:	ANSI C63.10:2013 and RSS-Gen
Receiver setup:	RBW=1MHz, VBW=1MHz, Span=0Hz, Detector=Peak
Limit:	0.4 Second
Test setup:	 <p>The diagram illustrates the test setup. A Spectrum Analyzer is connected via a red cable to an E.U.T. (Equipment Under Test). Both are placed on a Non-Conducted Table. Below the table is a Ground Reference Plane.</p>
Test Instruments:	Refer to section 6.0 for details
Test mode:	Refer to section 5.2 for details
Test results:	Pass

### Measurement Data

Frequency	Packet	Dwell time(ms)	Limit(ms)	Result
2441MHz	DH1	121.60	400	Pass
2441MHz	DH3	261.28	400	Pass
2441MHz	DH5	305.81	400	Pass

The test period:  $T = 0.4 \text{ Second/Channel} \times 79 \text{ Channel} = 31.6 \text{ s}$

Test channel: 2441MHz as blow

DH1 time slot =  $0.380(\text{ms}) \times (1600 / (2 \times 79)) \times 31.6 = 121.60\text{ms}$


DH3 time slot =  $1.633(\text{ms}) \times (1600 / (4 \times 79)) \times 31.6 = 261.28\text{ms}$

DH5 time slot =  $2.867(\text{ms}) \times (1600 / (6 \times 79)) \times 31.6 = 305.81\text{ms}$


The test data shows only the worst case GFSK mode

Test plot as follows:


Test channel:	2441MHz
---------------	---------

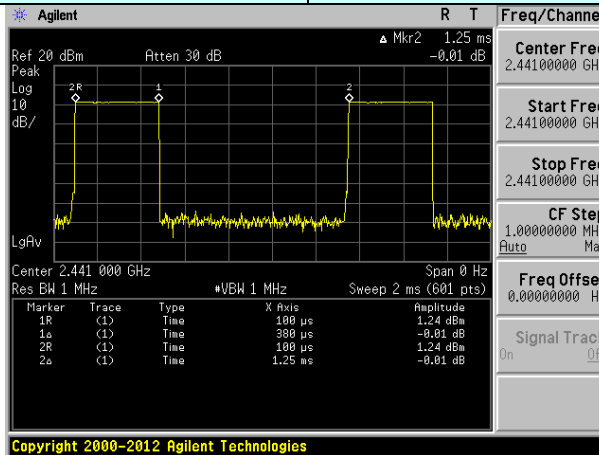

DH1

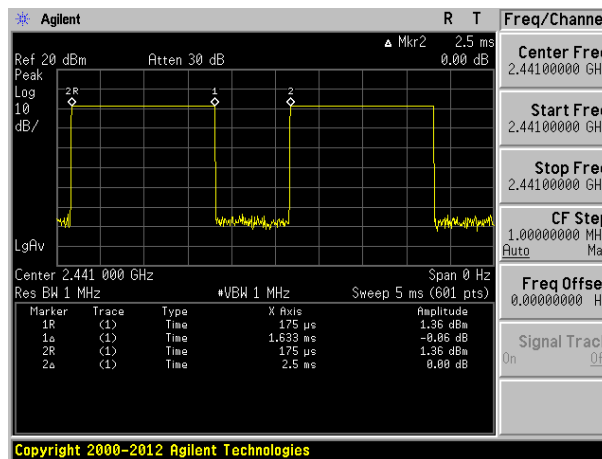


DH3

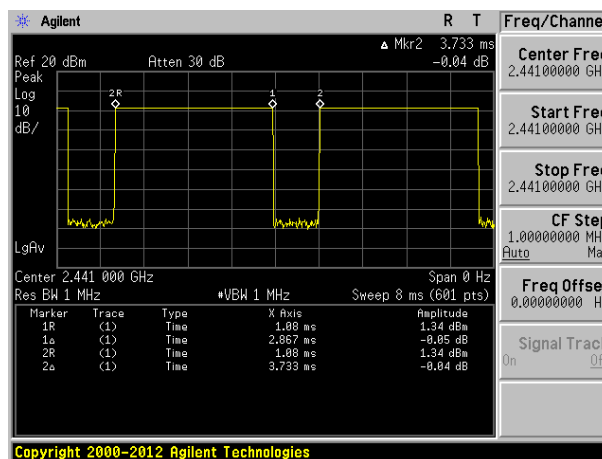

DH5

## 7.8 Band Edge


### 7.8.1 Conducted Emission Method

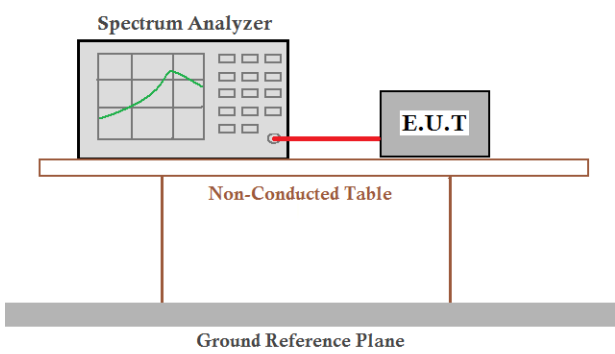Test Requirement:	FCC Part15 C Section 15.247 (d) RSS-247 Section 5.5
Test Method:	ANSI C63.10:2013 & RSS-Gen
Receiver setup:	RBW=100kHz, VBW=300kHz, Detector=Peak
Limit:	In any 100 kHz bandwidth outside the frequency band in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement.
Test setup:	 <p>The diagram illustrates the test setup. A Spectrum Analyzer is connected to an E.U.T. (Equipment Under Test) via a red cable. Both are placed on a Non-Conducted Table, which is supported by two legs. Below the table is a Ground Reference Plane.</p>
Test Instruments:	Refer to section 6.0 for details
Test mode:	Refer to section 5.2 for details
Test results:	Pass


Test plot as follows:

GFSK Mode:

Test channel: Lowest channel

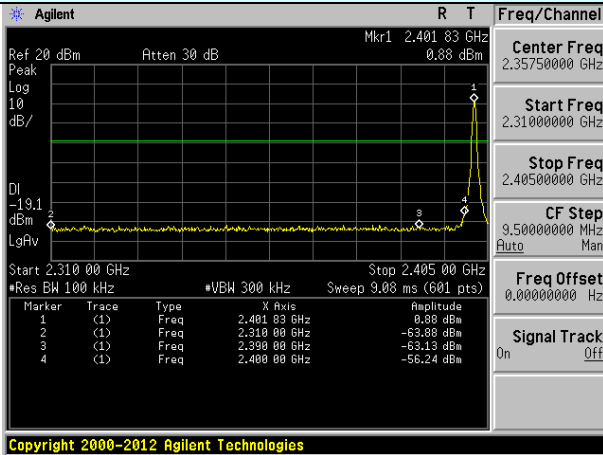


No-hopping mode

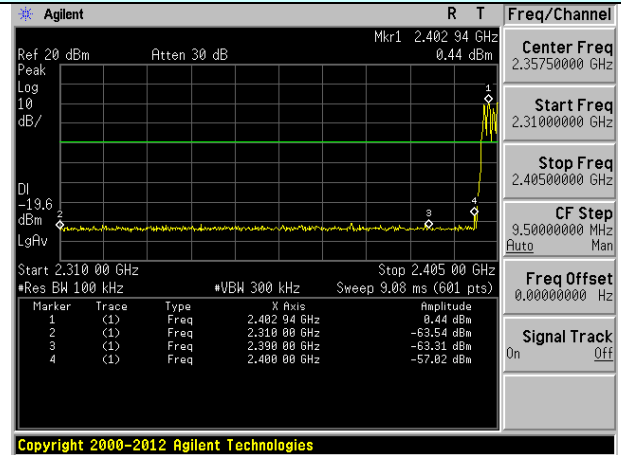


Hopping mode

Test channel: Highest channel

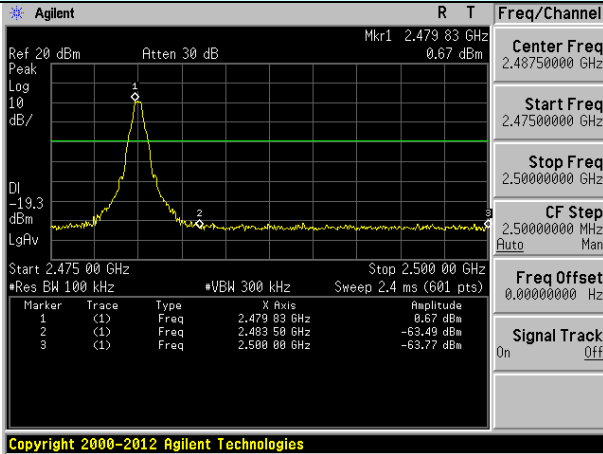


No-hopping mode

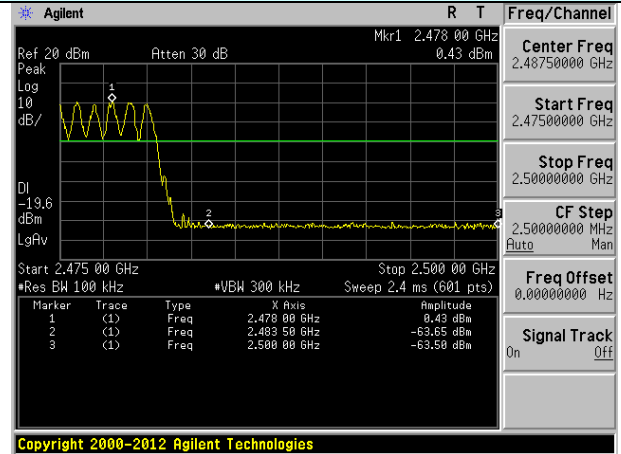


Hopping mode

**$\pi/4$ -DQPSK Mode:**

Test channel: Lowest channel

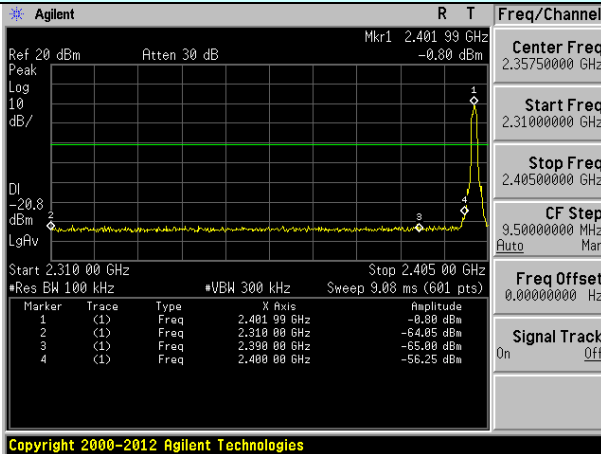


No-hopping mode

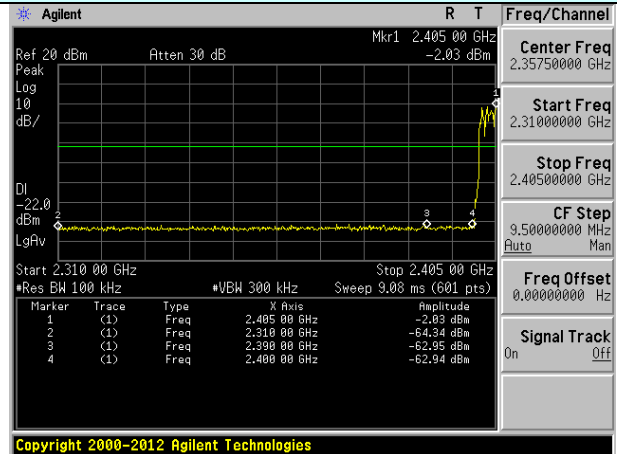


Hopping mode

Test channel: Highest channel

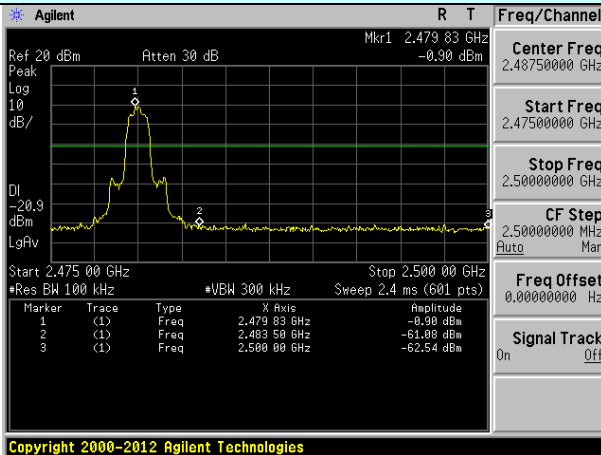

No-hopping mode

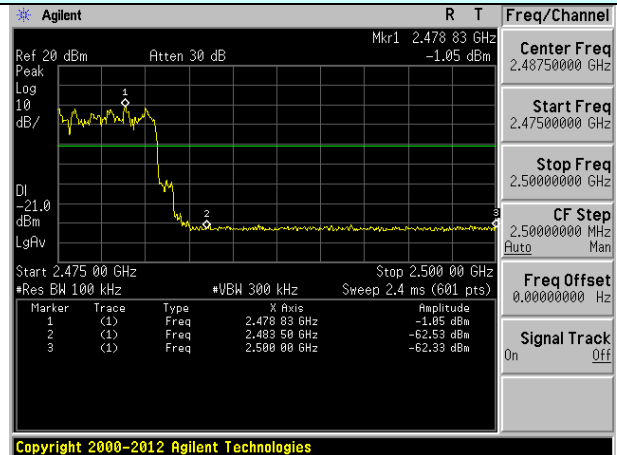


Hopping mode




## 8-DPSK Mode:

Test channel: Lowest channel

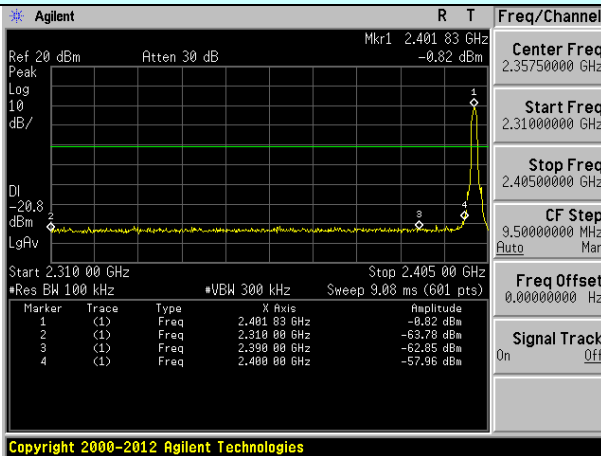


No-hopping mode

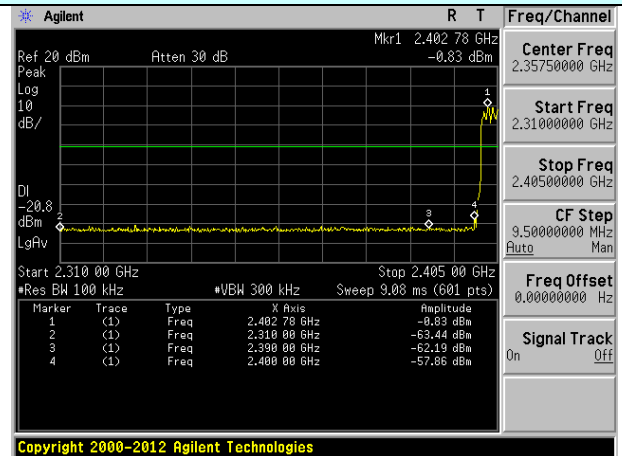


Hopping mode

Test channel: Highest channel

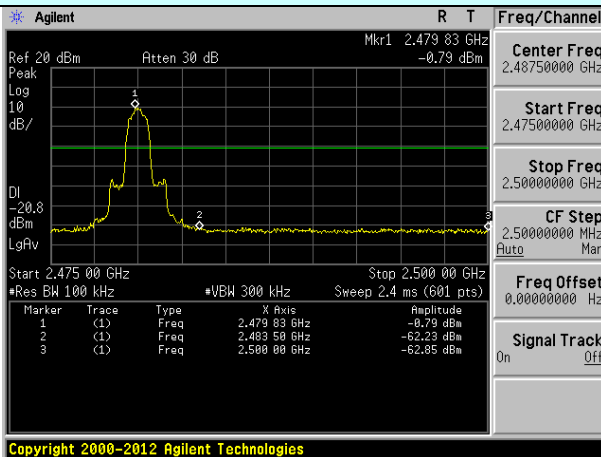

No-hopping mode

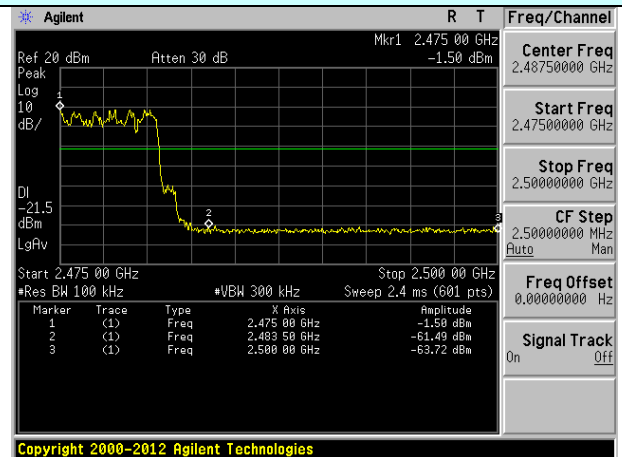

Hopping mode

## 7.8.2 Radiated Emission Method

Test Requirement:	FCC Part15 C Section 15.209 and 15.205 Section 3.3 & RSS-Gen Section 8.9				
Test Method:	ANSI C63.10:2013 & RSS-Gen				
Test Frequency Range:	All of the restrict bands were tested, only the worst band's (2310MHz to 2500MHz) data was showed.				
Test site:	Measurement Distance: 3m				
Receiver setup:	Frequency	Detector	RBW	VBW	Remark
	Above 1GHz	Peak	1MHz	3MHz	Peak Value
		Peak	1MHz	10Hz	Average Value
Limit:	Frequency		Limit (dBuV/m @3m)		Remark
	Above 1GHz		54.00		Average Value
			74.00		Peak Value
Test setup:					
Test Procedure:	<ol style="list-style-type: none"> <li>1. The EUT was placed on the top of a rotating table 1.5 meters above the ground at a 3 meter camber. The table was rotated 360 degrees to determine the position of the highest radiation.</li> <li>2. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.</li> <li>3. The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.</li> <li>4. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rota table was turned from 0 degrees to 360 degrees to find the maximum reading.</li> <li>5. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.</li> <li>6. If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.</li> </ol>				
Test Instruments:	Refer to section 6.0 for details				
Test mode:	Refer to section 5.2 for details				
Test results:	Pass				

## Measurement Data

Test channel:	Lowest channel
---------------	----------------

Peak value:

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
2310.00	44.21	27.91	5.30	24.64	52.78	74.00	-21.22	Horizontal
2390.00	48.19	27.59	5.38	24.71	56.45	74.00	-17.55	Horizontal
2400.00	49.10	27.41	5.39	24.72	57.18	74.00	-16.82	Horizontal
2310.00	44.88	27.91	5.30	24.64	53.45	74.00	-20.55	Vertical
2390.00	48.37	27.59	5.38	24.71	56.63	74.00	-17.37	Vertical
2400.00	49.48	27.41	5.39	24.72	57.56	74.00	-16.44	Vertical

Average value:

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
2310.00	34.46	27.91	5.30	24.64	43.03	54.00	-10.97	Horizontal
2390.00	35.77	27.59	5.38	24.71	44.03	54.00	-9.97	Horizontal
2400.00	36.10	27.41	5.39	24.72	44.18	54.00	-9.82	Horizontal
2310.00	34.50	27.91	5.30	24.64	43.07	54.00	-10.93	Vertical
2390.00	36.55	27.59	5.38	24.71	44.81	54.00	-9.19	Vertical
2400.00	37.37	27.41	5.39	24.72	45.45	54.00	-8.55	Vertical

Test channel:	Highest channel
---------------	-----------------

Peak value:

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
2483.50	46.47	27.53	5.47	24.80	54.67	74.00	-19.33	Horizontal
2500.00	45.39	27.55	5.49	24.86	53.57	74.00	-20.43	Horizontal
2483.50	47.54	27.53	5.47	24.80	55.74	74.00	-18.26	Vertical
2500.00	46.52	27.55	5.49	24.86	54.70	74.00	-19.30	Vertical

Average value:


Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
2483.50	34.67	27.53	5.47	24.80	42.87	54.00	-11.13	Horizontal
2500.00	34.59	27.55	5.49	24.86	42.77	54.00	-11.23	Horizontal
2483.50	35.31	27.53	5.47	24.80	43.51	54.00	-10.49	Vertical
2500.00	34.56	27.55	5.49	24.86	42.74	54.00	-11.26	Vertical

Remarks:

1. Final Level = Receiver Read level + Antenna Factor + Cable Loss – Preamplifier Factor
2. The emission levels of other frequencies are very lower than the limit and not show in test report.
3. The pre-test were performed on lowest, middle and highest frequencies, only the worst case's (lowest and highest frequencies) data was showed.
4. During the test, pre-scan the GFSK,  $\pi/4$ -DQPSK, 8-DPSK modulation, and found the GFSK modulation which it is worse case.

## 7.9 Spurious Emission


### 7.9.1 Conducted Emission Method

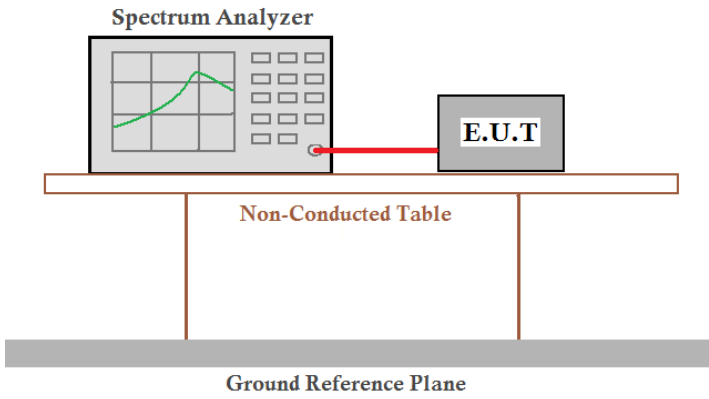Test Requirement:	FCC Part15 C Section 15.247 (d) RSS-247 Section 5.5
Test Method:	ANSI C63.10:2013 & RSS-Gen
Limit:	In any 100 kHz bandwidth outside the frequency band in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement.
Test setup:	 <p>The diagram illustrates the test setup. A Spectrum Analyzer is connected to an E.U.T. (Equipment Under Test) via a red cable. Both are placed on a Non-Conducted Table, which is supported by two vertical legs. Below the table is a Ground Reference Plane, represented by a grey horizontal bar.</p>
Test Instruments:	Refer to section 6.0 for details
Test mode:	Refer to section 5.2 for details
Test results:	Pass

**Remark:**


During the test, pre-scan the GFSK,  $\pi/4$ -DQPSK, 8-DPSK modulation, and found the GFSK modulation which it is worse case.

Test channel: Lowest channel

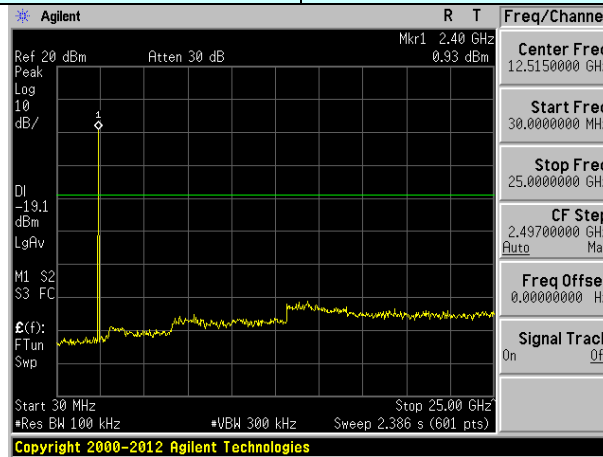


30MHz~25GHz

Test channel: Middle channel

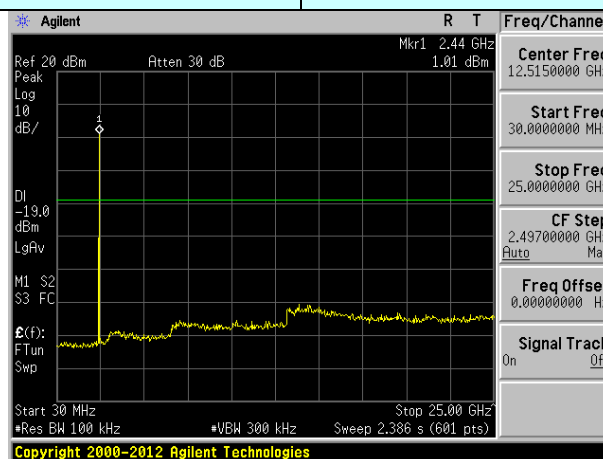

30MHz~25GHz




Test channel: Highest channel

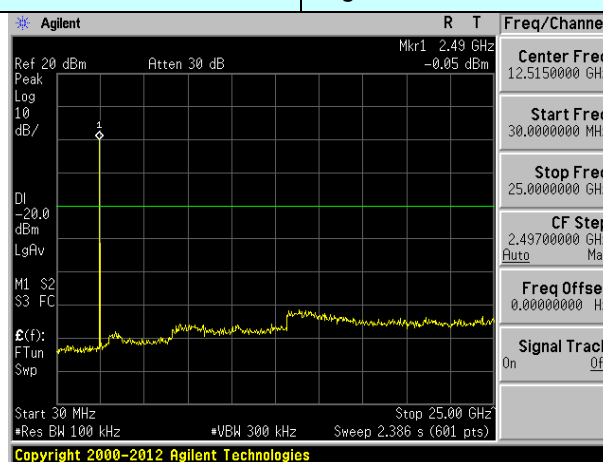

30MHz~25GHz

## 7.9.2 Radiated Emission Method

Test Requirement:	FCC Part15 C Section 15.209 Section 3.3 & RSS-Gen Section 8.9																												
Test Method:	ANSI C63.10:2013 & RSS-Gen																												
Test Frequency Range:	9kHz to 25GHz																												
Test site:	Measurement Distance: 3m																												
Receiver setup:	Frequency	Detector	RBW	VBW	Value																								
	9KHz-150KHz	Quasi-peak	200Hz	600Hz	Quasi-peak																								
	150KHz-30MHz	Quasi-peak	9KHz	30KHz	Quasi-peak																								
	30MHz-1GHz	Quasi-peak	120KHz	300KHz	Quasi-peak																								
	Above 1GHz	Peak	1MHz	3MHz	Peak																								
Peak		1MHz	10Hz	Average																									
FCC Limit:	<table border="1"> <thead> <tr> <th>Frequency (MHz)</th> <th>Field strength (microvolts/meter)</th> <th>Measurement distance (meters)</th> </tr> </thead> <tbody> <tr> <td>0.009-0.490</td> <td>2400/F(kHz)</td> <td>300</td> </tr> <tr> <td>0.490-1.705</td> <td>24000/F(kHz)</td> <td>30</td> </tr> <tr> <td>1.705-30.0</td> <td>30</td> <td>30</td> </tr> <tr> <td>30-88</td> <td>100**</td> <td>3</td> </tr> <tr> <td>88-216</td> <td>150**</td> <td>3</td> </tr> <tr> <td>216-960</td> <td>200**</td> <td>3</td> </tr> <tr> <td>Above 960</td> <td>500</td> <td>3</td> </tr> </tbody> </table> <p>The emission limits shown in the above table are based on measurements employing a CISPR quasi-peak detector except for the frequency bands 9-90 kHz, 110-490 kHz and above 1000 MHz. Radiated emission limits in these three bands are based on measurements employing an average detector.</p>					Frequency (MHz)	Field strength (microvolts/meter)	Measurement distance (meters)	0.009-0.490	2400/F(kHz)	300	0.490-1.705	24000/F(kHz)	30	1.705-30.0	30	30	30-88	100**	3	88-216	150**	3	216-960	200**	3	Above 960	500	3
	Frequency (MHz)	Field strength (microvolts/meter)	Measurement distance (meters)																										
0.009-0.490	2400/F(kHz)	300																											
0.490-1.705	24000/F(kHz)	30																											
1.705-30.0	30	30																											
30-88	100**	3																											
88-216	150**	3																											
216-960	200**	3																											
Above 960	500	3																											
IC Limit:	<p><b>Table 5 – General field strength limits at frequencies above 30 MHz</b></p> <table border="1"> <thead> <tr> <th>Frequency (MHz)</th> <th>Field strength (µV/m at 3 m)</th> </tr> </thead> <tbody> <tr> <td>30 – 88</td> <td>100</td> </tr> <tr> <td>88 – 216</td> <td>150</td> </tr> <tr> <td>216 – 960</td> <td>200</td> </tr> <tr> <td>Above 960</td> <td>500</td> </tr> </tbody> </table> <p><b>Table 6 – General field strength limits at frequencies below 30 MHz</b></p> <table border="1"> <thead> <tr> <th>Frequency</th> <th>Magnetic field strength (H-Field) (µA/m)</th> <th>Measurement distance (m)</th> </tr> </thead> <tbody> <tr> <td>9 - 490 kHz<sup>1</sup></td> <td>6.37/F (F in kHz)</td> <td>300</td> </tr> <tr> <td>490 - 1705 kHz</td> <td>63.7/F (F in kHz)</td> <td>30</td> </tr> <tr> <td>1.705 - 30 MHz</td> <td>0.08</td> <td>30</td> </tr> </tbody> </table> <p><b>Note 1:</b> The emission limits for the ranges 9-90 kHz and 110-490 kHz are based on measurements employing a linear average detector.</p>					Frequency (MHz)	Field strength (µV/m at 3 m)	30 – 88	100	88 – 216	150	216 – 960	200	Above 960	500	Frequency	Magnetic field strength (H-Field) (µA/m)	Measurement distance (m)	9 - 490 kHz <sup>1</sup>	6.37/F (F in kHz)	300	490 - 1705 kHz	63.7/F (F in kHz)	30	1.705 - 30 MHz	0.08	30		
Frequency (MHz)	Field strength (µV/m at 3 m)																												
30 – 88	100																												
88 – 216	150																												
216 – 960	200																												
Above 960	500																												
Frequency	Magnetic field strength (H-Field) (µA/m)	Measurement distance (m)																											
9 - 490 kHz <sup>1</sup>	6.37/F (F in kHz)	300																											
490 - 1705 kHz	63.7/F (F in kHz)	30																											
1.705 - 30 MHz	0.08	30																											
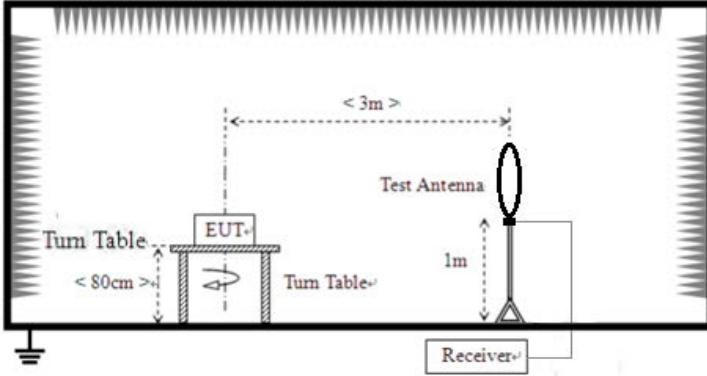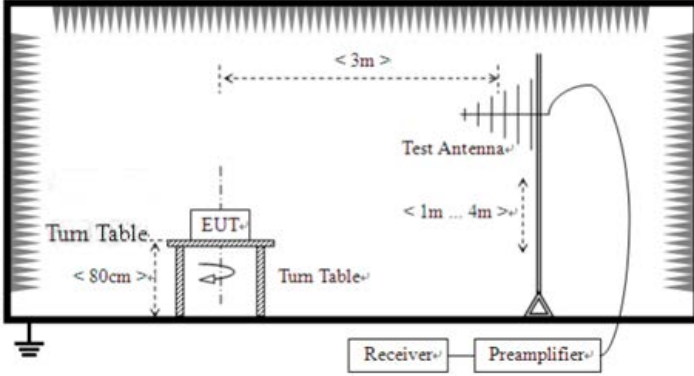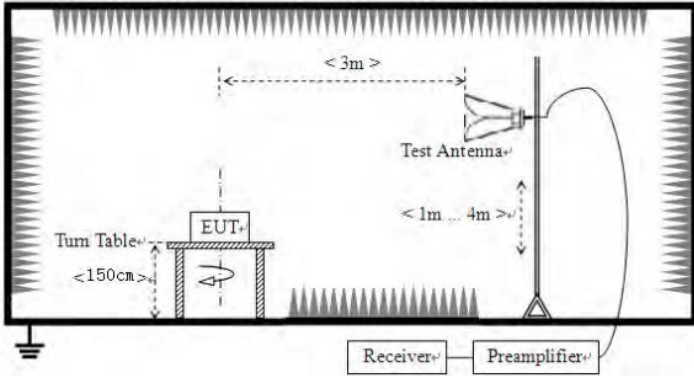
<p>Test setup:</p>	<p>For radiated emissions from 9kHz to 30MHz</p>  <p>For radiated emissions from 30MHz to 1GHz</p>  <p>For radiated emissions above 1GHz</p> 
<p>Test Procedure:</p>	<ol style="list-style-type: none"> <li>1. The EUT was placed on the top of a rotating table (0.8m for below 1G and 1.5m for above 1G) above the ground at a 3 meter camber. The table was rotated 360 degrees to determine the position of the highest radiation.</li> <li>2. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.</li> <li>3. The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the</li> </ol>



	<p>measurement.</p> <p>4. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rota table was turned from 0 degrees to 360 degrees to find the maximum reading.</p> <p>5. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.</p> <p>6. If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.</p>						
Test Instruments:	Refer to section 6.0 for details						
Test mode:	Refer to section 5.2 for details						
Test environment:	<table border="1"> <tr> <td>Temp.:</td> <td>25 °C</td> <td>Humid.:</td> <td>52%</td> <td>Press.:</td> <td>1012mbar</td> </tr> </table>	Temp.:	25 °C	Humid.:	52%	Press.:	1012mbar
Temp.:	25 °C	Humid.:	52%	Press.:	1012mbar		
Test results:	Pass						

**Measurement data:**

*Remarks:*

1. *During the test, pre-scan the GFSK,  $\pi/4$ -DQPSK, 8-DPSK modulation, and found the GFSK modulation which it is worse case.*
2. *Pre-scan all kind of the place mode (X-axis, Y-axis, Z-axis), and found the Y-axis which it is worse case.*


■ **9kHz~30MHz**

The low frequency, which started from 9 kHz to 30 MHz, was pre-scanned and the result which was 20 dB lower than the limit line per 15.31(o) was not reported.

■ Below 1GHz


Pre-scan all test modes, found worst case at GFSK 2480MHz, and so only show the test result of GFSK 2480MHz

Horizontal:

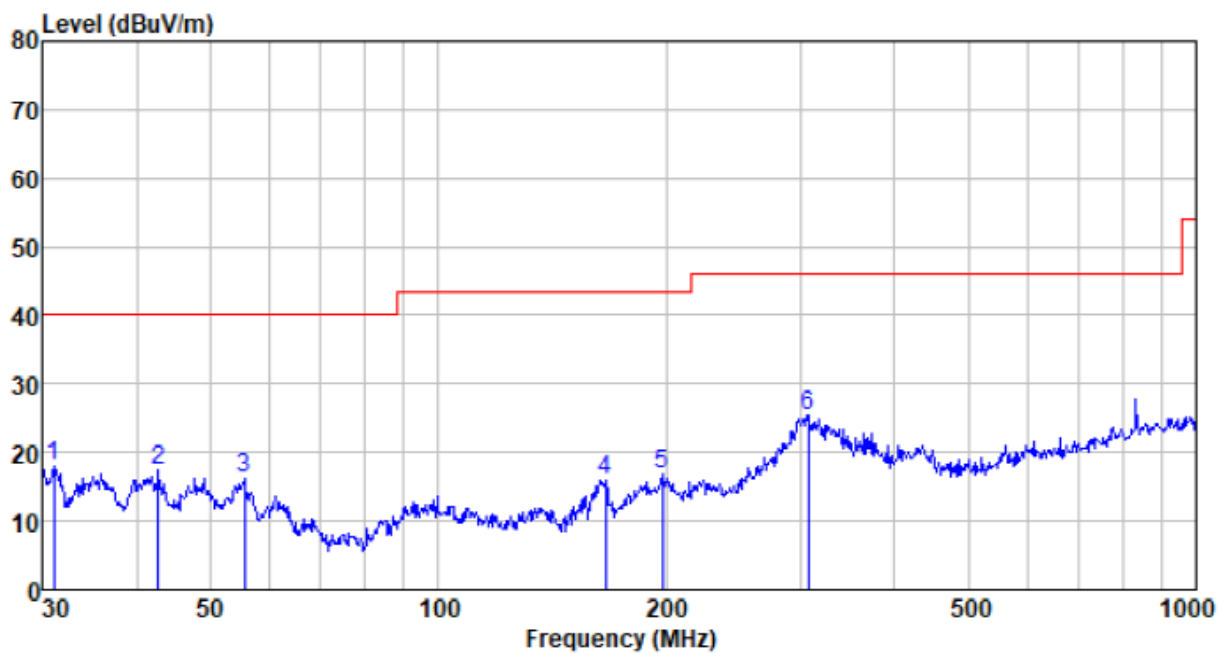

Freq MHz	Reading level dBuV	Antenna factor dB/m	Cable loss dB	Preamp factor dB	level dBuV/m	Limit level dBuV/m	Over limit dB	Remark
31.071	41.36	11.22	0.56	35.08	18.06	40.00	-21.94	QP
42.750	40.28	12.23	0.69	35.82	17.38	40.00	-22.62	QP
55.415	39.79	11.75	0.82	36.26	16.10	40.00	-23.90	QP
166.068	43.12	8.43	1.66	37.17	16.04	43.50	-27.46	QP
197.200	42.01	10.26	1.82	37.32	16.77	43.50	-26.73	QP
307.831	46.64	13.76	2.40	37.43	25.37	46.00	-20.63	QP

**Vertical:**

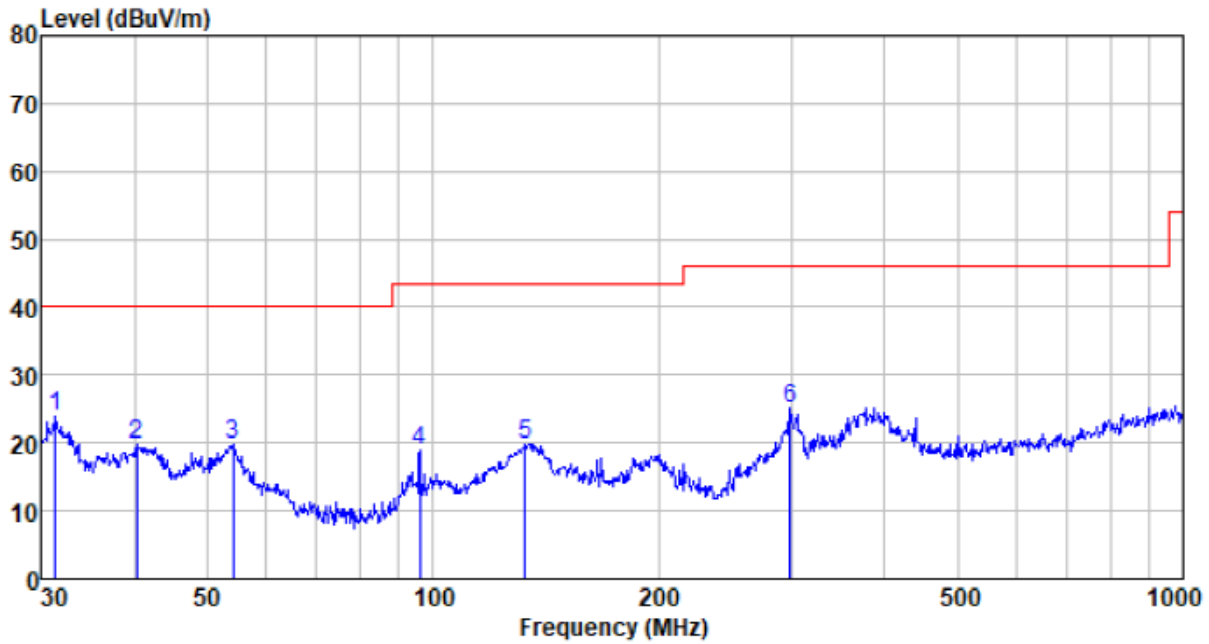

Freq MHz	Reading level dBuV	Antenna factor dB/m	Cable loss dB	Preamp factor dB	level dBuV/m	Limit level dBuV/m	Over limit dB	Remark
31.399	47.30	11.23	0.57	35.11	23.99	40.00	-16.01	QP
40.276	42.51	12.20	0.66	35.68	19.69	40.00	-20.31	QP
54.071	43.29	11.88	0.81	36.24	19.74	40.00	-20.26	QP
96.099	42.89	11.65	1.16	36.69	19.01	43.50	-24.49	QP
132.685	47.47	7.96	1.45	36.97	19.91	43.50	-23.59	QP
299.316	46.67	13.60	2.35	37.42	25.20	46.00	-20.80	QP

■ Above 1GHz

Test channel:	Lowest channel
---------------	----------------

Peak value:

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
4804.00	34.83	31.78	8.60	32.09	43.12	74.00	-30.88	Vertical
7206.00	30.19	36.15	11.65	32.00	45.99	74.00	-28.01	Vertical
9608.00	30.01	37.95	14.14	31.62	50.48	74.00	-23.52	Vertical
12010.00	*					74.00		Vertical
14412.00	*					74.00		Vertical
4804.00	38.61	31.78	8.60	32.09	46.90	74.00	-27.10	Horizontal
7206.00	31.72	36.15	11.65	32.00	47.52	74.00	-26.48	Horizontal
9608.00	29.19	37.95	14.14	31.62	49.66	74.00	-24.34	Horizontal
12010.00	*					74.00		Horizontal
14412.00	*					74.00		Horizontal

Average value:

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
4804.00	24.11	31.78	8.60	32.09	32.40	54.00	-21.60	Vertical
7206.00	19.15	36.15	11.65	32.00	34.95	54.00	-19.05	Vertical
9608.00	18.39	37.95	14.14	31.62	38.86	54.00	-15.14	Vertical
12010.00	*					54.00		Vertical
14412.00	*					54.00		Vertical
4804.00	28.06	31.78	8.60	32.09	36.35	54.00	-17.65	Horizontal
7206.00	21.16	36.15	11.65	32.00	36.96	54.00	-17.04	Horizontal
9608.00	17.91	37.95	14.14	31.62	38.38	54.00	-15.62	Horizontal
12010.00	*					54.00		Horizontal
14412.00	*					54.00		Horizontal

Test channel:	Middle channel
---------------	----------------

**Peak value:**

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
4882.00	34.99	31.85	8.67	32.12	43.39	74.00	-30.61	Vertical
7323.00	30.29	36.37	11.72	31.89	46.49	74.00	-27.51	Vertical
9764.00	30.10	38.35	14.25	31.62	51.08	74.00	-22.92	Vertical
12205.00	*					74.00		Vertical
14646.00	*					74.00		Vertical
4882.00	38.80	31.85	8.67	32.12	47.20	74.00	-26.80	Horizontal
7323.00	31.85	36.37	11.72	31.89	48.05	74.00	-25.95	Horizontal
9764.00	29.30	38.35	14.25	31.62	50.28	74.00	-23.72	Horizontal
12205.00	*					74.00		Horizontal
14646.00	*					74.00		Horizontal

**Average value:**

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
4882.00	24.24	31.85	8.67	32.12	32.64	54.00	-21.36	Vertical
7323.00	19.24	36.37	11.72	31.89	35.44	54.00	-18.56	Vertical
9764.00	18.47	38.35	14.25	31.62	39.45	54.00	-14.55	Vertical
12205.00	*					54.00		Vertical
14646.00	*					54.00		Vertical
4882.00	28.22	31.85	8.67	32.12	36.62	54.00	-17.38	Horizontal
7323.00	21.26	36.37	11.72	31.89	37.46	54.00	-16.54	Horizontal
9764.00	18.00	38.35	14.25	31.62	38.98	54.00	-15.02	Horizontal
12205.00	*					54.00		Horizontal
14646.00	*					54.00		Horizontal

Test channel:	Highest channel
---------------	-----------------

**Peak value:**

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
4960.00	35.11	31.93	8.73	32.16	43.61	74.00	-30.39	Vertical
7440.00	30.37	36.59	11.79	31.78	46.97	74.00	-27.03	Vertical
9920.00	30.17	38.81	14.38	31.88	51.48	74.00	-22.52	Vertical
12400.00	*					74.00		Vertical
14880.00	*					74.00		Vertical
4960.00	38.95	31.93	8.73	32.16	47.45	74.00	-26.55	Horizontal
7440.00	31.93	36.59	11.79	31.78	48.53	74.00	-25.47	Horizontal
9920.00	29.39	38.81	14.38	31.88	50.70	74.00	-23.30	Horizontal
12400.00	*					74.00		Horizontal
14880.00	*					74.00		Horizontal


**Average value:**

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
4960.00	24.36	31.93	8.73	32.16	32.86	54.00	-21.14	Vertical
7440.00	19.32	36.59	11.79	31.78	35.92	54.00	-18.08	Vertical
9920.00	18.53	38.81	14.38	31.88	39.84	54.00	-14.16	Vertical
12400.00	*					54.00		Vertical
14880.00	*					54.00		Vertical
4960.00	28.34	31.93	8.73	32.16	36.84	54.00	-17.16	Horizontal
7440.00	21.35	36.59	11.79	31.78	37.95	54.00	-16.05	Horizontal
9920.00	18.08	38.81	14.38	31.88	39.39	54.00	-14.61	Horizontal
12400.00	*					54.00		Horizontal
14880.00	*					54.00		Horizontal

*Remarks:*

1. *Final Level = Receiver Read level + Antenna Factor + Cable Loss – Pre-amplifier Factor*
2. *“\*”, means this data is too weak instrument of signal is unable to test.*
3. *The emission levels of other frequencies are very lower than the limit and not show in test report.*
4. *The test data shows only the worst case GFSK mode*

## 7.10 Frequency Stability

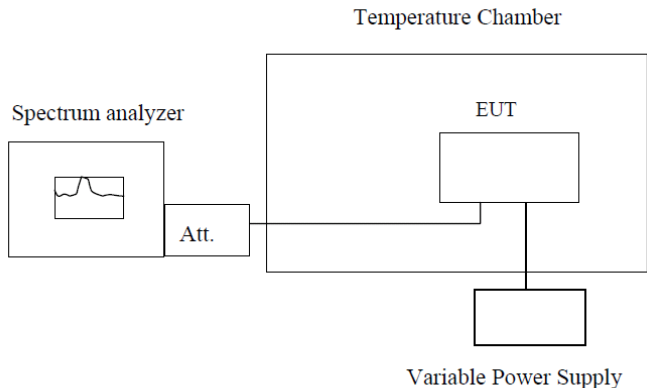Test Requirement:	RSS-Gen Section 6.11& Section 8.11
Test Method:	ANSI C63.10: 2013 & RSS-Gen
Limit:	Manufactures of devices are responsible for ensuring frequency stability such that an emission is maintained within the band of operation under all conditions of normal operation as specified
Test Procedure:	The EUT was setup to ANSI C63.10, 2013; tested to 2.1055 for compliance to RSS-Gen requirements.
Test setup:	 <p style="text-align: center;"><b>Note :</b> Measurement setup for testing on Antenna connector</p>
Test Instruments:	Refer to section 6.0 for details
Test mode:	Refer to section 5.2 for details
Test results:	Pass

Remark: Set the EUT transmits at un-modulation mode to test frequency stability.

**Measurement data:**

<b>Frequency stability versus Temp.</b>						
<b>Power Supply: DC 7.4V</b>						
Temp. (°C)	Operating Frequency (MHz)	0 minute	2 minute	5 minute	10 minute	Pass /Fail
		Measured Frequency (MHz)	Measured Frequency (MHz)	Measured Frequency (MHz)	Measured Frequency (MHz)	
-30	2402	2402.403	2402.325	2402.359	2402.403	Pass
	2441	2441.304	2440.298	2440.550	2441.304	Pass
	2480	2480.690	2480.503	2480.096	2480.690	Pass
-20	2402	2402.058	2402.128	2402.821	2402.058	Pass
	2441	2441.354	2440.592	2440.414	2441.354	Pass
	2480	2480.737	2480.734	2480.501	2480.737	Pass
-10	2402	2402.495	2402.976	2402.713	2402.495	Pass
	2441	2441.801	2440.740	2440.529	2441.801	Pass
	2480	2480.956	2480.248	2480.512	2480.956	Pass
0	2402	2402.979	2402.281	2402.447	2402.979	Pass
	2441	2441.767	2440.810	2440.965	2441.767	Pass
	2480	2480.556	2480.883	2480.309	2480.556	Pass
10	2402	2402.840	2402.474	2402.221	2402.840	Pass
	2441	2441.354	2440.777	2440.679	2441.354	Pass
	2480	2480.125	2480.708	2480.947	2480.125	Pass
20	2402	2402.245	2402.330	2402.628	2402.245	Pass
	2441	2441.083	2440.757	2440.433	2441.083	Pass
	2480	2480.650	2480.730	2480.707	2480.650	Pass
30	2402	2402.379	2402.896	2402.584	2402.379	Pass
	2441	2441.940	2440.299	2440.023	2441.940	Pass
	2480	2480.696	2480.076	2480.012	2480.696	Pass
40	2402	2402.489	2402.816	2402.030	2402.489	Pass
	2441	2441.219	2440.617	2440.002	2441.219	Pass
	2480	2480.253	2480.245	2480.902	2480.253	Pass
50	2402	2402.097	2402.449	2402.137	2402.097	Pass
	2441	2441.960	2440.216	2440.575	2441.960	Pass
	2480	2480.037	2480.902	2480.222	2480.037	Pass
<b>Frequency stability versus Voltage</b>						
<b>Temperature: 25°C</b>						
Power Supply (VDC)	Operating Frequency (MHz)	0 minute	2 minute	5 minute	10 minute	Pass /Fail
		Measured Frequency (MHz)	Measured Frequency (MHz)	Measured Frequency (MHz)	Measured Frequency (MHz)	
7.8	2402	2402.732	2402.128	2402.888	2402.732	Pass
	2441	2441.710	2440.591	2440.260	2441.710	Pass
	2480	2480.539	2480.084	2480.864	2480.539	Pass
6.6	2402	2402.721	2402.440	2402.242	2402.721	Pass
	2441	2441.754	2440.907	2440.972	2441.754	Pass
	2480	2480.698	2480.125	2480.729	2480.698	Pass



## 8 Test Setup Photo

Reference to the **appendix I** for details.

## 9 EUT Constructional Details

Reference to the **appendix II** for details.

-----End-----