

# **FCC Test Report**

Report No.: AGC05036230701FR02

FCC ID : U94SONUMAXX020723

**APPLICATION PURPOSE**: Original Equipment

**PRODUCT DESIGNATION**: 2.4GHz wireless digital headset

BRAND NAME : ARKON® TIVITON SONUMAXX

**MODEL NAME** : Sonumaxx NX RX

**APPLICANT** : Adec & Partner AG

**DATE OF ISSUE** : Aug. 25, 2023

**STANDARD(S)** : FCC Part 15.247

**REPORT VERSION**: V1.0

Attestation of Global Compliance (Shenzhen) Co., Ltd



Page 2 of 42

#### REPORT REVISE RECORD

Report Version	Revise Time	Issued Date	Valid Version	Notes
V1.0	/	Aug. 25, 2023	Valid	Initial Release



#### **TABLE OF CONTENTS**

1. VERIFICATION OF COMPLIANCE	5
2. GENERAL INFORMATION	6
2.1. PRODUCT DESCRIPTION 2.2. TABLE OF CARRIER FREQUENCYS 2.3. RELATED SUBMITTAL(S)/GRANT(S) 2.4. TEST METHODOLOGY 2.5. SPECIAL ACCESSORIES 2.6. EQUIPMENT MODIFICATIONS 2.7. ANTENNA REQUIREMENT	
3. MEASUREMENT UNCERTAINTY	8
4. DESCRIPTION OF TEST MODES	g
5. SYSTEM TEST CONFIGURATION	
5.1. CONFIGURATION OF TESTED SYSTEM	10
6. TEST FACILITY	
7. PEAK OUTPUT POWER	
7.1. MEASUREMENT PROCEDURE 7.2. TEST SET-UP (BLOCK DIAGRAM OF CONFIGURATION) 7.3. LIMITS AND MEASUREMENT RESULT	12 13
8. BANDWIDTH	15
8.1. MEASUREMENT PROCEDURE8.2. TEST SET-UP (BLOCK DIAGRAM OF CONFIGURATION)8.3. LIMITS AND MEASUREMENT RESULTS	
9. CONDUCTED SPURIOUS EMISSION	19
9.1. MEASUREMENT PROCEDURE	
10. MAXIMUM CONDUCTED OUTPUT POWER SPECTRAL DENSITY	26
10.1. MEASUREMENT PROCEDURE	
11. RADIATED EMISSION	28
11.1. MEASUREMENT PROCEDURE	
12. LINE CONDUCTED EMISSION TEST	40
12.1 LIMITS OF LINE CONDUCTED EMISSION TEST	40



Report No.: AGC05036230701FR02 Page 4 of 42

12.2. BLOCK DIAGRAM OF LINE CONDUCTED EMISSION TEST	40
12.3. PRELIMINARY PROCEDURE OF LINE CONDUCTED EMISSION TEST	41
12.4. FINAL PROCEDURE OF LINE CONDUCTED EMISSION TEST	4′
12.5. TEST RESULT OF LINE CONDUCTED EMISSION TEST	4′
APPENDIX I: PHOTOGRAPHS OF TEST SETUP	42
APPENDIX II: PHOTOGRAPHS OF FUT	43



Page 5 of 42

#### 1. VERIFICATION OF COMPLIANCE

Applicant	Adec & Partner AG	
Address	Staldenbachstrasse 30 CH-8808, Pfaffikon, Switzerland	
Manufacturer	ARKON ELECTRONICS (HUIZHOU) CO., LIMITED	
Address	NO. 4 Taihao Road, High-tech Industrial Park, Sandong Town, Huicheng District, Huizhou, Guangdong, China	
Factory	ARKON ELECTRONICS (HUIZHOU) CO., LIMITED	
Address	NO. 4 Taihao Road, High-tech Industrial Park, Sandong Town, Huicheng District, Huizhou, Guangdong, China	
<b>Product Designation</b>	2.4GHz wireless digital headset	
Brand Name	ARKON® tiviton <sup>NX</sup> sonumaxx <sup>NX</sup>	
Test Model	Sonumaxx NX RX	
Date of receipt of test item	Jul. 17, 2023	
Date of test	Jul. 17, 2023 to Aug. 25, 2023	
Deviation	No any deviation from the test method	
Condition of Test Sample	Normal	
Test Result	Pass	
Report Template	AGCRT-US-BLE/RF	

Note: The model name of the transmitter is Sonumaxx NX TX. The model name of the receiver is Sonumaxx NX RX .The model name of the suit for transmitter and receiver is Sonumaxx NX Set or Tiviton NX Set. We hereby certify that:

The above equipment was tested by Attestation of Global Compliance (Shenzhen) Co., Ltd. The test data, data evaluation, test procedures, and equipment configurations shown in this report were made in accordance with the procedures given in ANSI C63.10 (2013) and the energy emitted by the sample EUT tested as described in this report is in compliance with radiated emission limits of FCC part 15.247.

Prepared By	Bibo zhay	
	Bibo Zhang (Project Engineer)	Aug. 25, 2023
Reviewed By	Calvin Lin	
	Calvin Liu (Reviewer)	Aug. 25, 2023
Approved By	Max Zhang	,
	Max Zhang (Authorized Officer)	Aug. 25, 2023



Page 6 of 42

#### 2. GENERAL INFORMATION

#### 2.1. PRODUCT DESCRIPTION

The EUT is designed as a "2.4GHz wireless digital headset". It is designed by way of utilizing the GFSK technology to achieve the system operation.

A major technical description of EUT is described as following

A trial joint to different and the december as tell or trial trial joint and the second as tell or trial joint and trial joint		
Operation Frequency	2402MHz to 2480MHz	
2.4G ISM band	2400MHz-2483.5MHz	
RF Output Power	-0.905dBm (Max)	
Modulation	GFSK	
Number of channels	40 Channel	
Antenna Designation	PCB Antenna (Comply with requirements of the FCC part 15.203)	
Antenna Gain	0dBi	
Hardware Version	V1.0	
Software Version	V1.0	
Power Supply	DC 3.7V 350mAh by battery	

#### 2.2. TABLE OF CARRIER FREQUENCYS

Frequency Band	Channel Number	Frequency
	0	2402 MHz
	1	2404 MHz
2400~2483.5MHz	:	:
	38	2478 MHz
	39	2480 MHz



Page 7 of 42

#### 2.3. RELATED SUBMITTAL(S)/GRANT(S)

This submittal(s) (test report) is intended for **FCC ID: U94SONUMAXX020723** filing to comply with the FCC Part 15.247 requirements.

#### 2.4. TEST METHODOLOGY

Both conducted and radiated testing was performed according to the procedures in ANSI C63.10 (2013). Radiated testing was performed at an antenna to EUT distance 3 meters.

#### 2.5. SPECIAL ACCESSORIES

Refer to section 5.2.

#### 2.6. EQUIPMENT MODIFICATIONS

Not available for this EUT intended for grant.


#### 2.7. ANTENNA REQUIREMENT

This intentional radiator is designed with a permanently attached antenna of an antenna to ensure that no antenna other than that furnished by the responsible party shall be used with the device. For more information of the antenna, please refer to the APPENDIX II: PHOTOGRAPHS OF EUT.

#### 2.8 DUTY CYCLE

The maximum achievable duty cycles for all modes were determined based on measurements performed on a spectrum analyzer in zero-span mode with RBW=8MHz, VBW=50MHz. The RBW and VBW were both greater than 50/T, where T is the minimum transmission duration, and the number of sweep points across T was greater than 100. The duty cycles are as follows:

Test Mode	Frequency	Duty Cycle
GFSK	2402MHz	85.62%

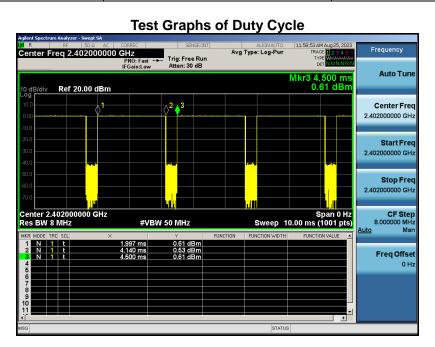



Page 8 of 42

#### 3. MEASUREMENT UNCERTAINTY

The reported uncertainty of measurement y ±U, where expended uncertainty U is based on a standard uncertainty multiplied by a coverage factor of k=2, providing a level of confidence of approximately 95%.

Item	Measurement Uncertainty
Uncertainty of Conducted Emission for AC Port	$U_c = \pm 2.9 \text{ dB}$
Uncertainty of Radiated Emission below 1GHz	$U_c = \pm 3.9 \text{ dB}$
Uncertainty of Radiated Emission above 1GHz	$U_c = \pm 4.9 \text{ dB}$
Uncertainty of total RF power, conducted	$U_c = \pm 0.8 \text{ dB}$
Uncertainty of RF power density, conducted	$U_c = \pm 2.6 \text{ dB}$
Uncertainty of spurious emissions, conducted	$U_c = \pm 2.7 \%$
Uncertainty of Occupied Channel Bandwidth	U <sub>c</sub> = ±2 %



Report No.: AGC05036230701FR02 Page 9 of 42


#### 4. DESCRIPTION OF TEST MODES

NO.	TEST MODE DESCRIPTION	
1	Low channel GFSK(2402MHz)	
2	Middle channel GFSK(2440MHz)	
3	High channel GFSK(2480MHz)	

#### Note:

- 1. Only the result of the worst case was recorded in the report, if no other cases.
- 2. For Radiated Emission, 3axis were chosen for testing for each applicable mode.
- 3. For Conducted Test method, a temporary antenna connector is provided by the manufacture.

Software Setting

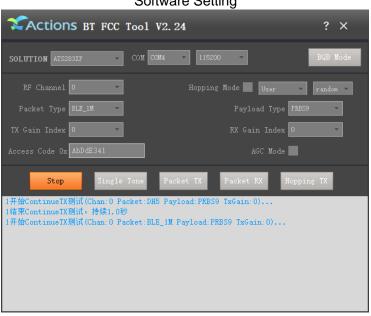




Page 10 of 42

#### 5. SYSTEM TEST CONFIGURATION

#### **5.1. CONFIGURATION OF TESTED SYSTEM**

Radiated Emission Configure:



Conducted Emission Configure:

EUT	AE

#### **5.2. EQUIPMENT USED IN TESTED SYSTEM**

Item	Equipment	Model No.	ID or Specification	Remark
1	2.4GHz wireless digital headset	Sonumaxx NX RX	U94SONUMAXX020723	EUT
2	Control Box	N/A	USB-TTL	AE

#### 5.3. SUMMARY OF TEST RESULTS

FCC RULES	DESCRIPTION OF TEST	RESULT
15.247 (b)(3)	Peak Output Power	Compliant
15.247 (a)(2)	6 dB Bandwidth	Compliant
15.247 (d)	Conducted Spurious Emission	Compliant
15.247 (e)	Maximum Conducted Output Power Density	Compliant
15.209	Radiated Emission	Compliant
15.207	Conducted Emission	Not applicable



Page 11 of 42

#### **6. TEST FACILITY**

Test Site	Attestation of Global Compliance (Shenzhen) Co., Ltd
Location	1-2/F, Building 19, Junfeng Industrial Park, Chongqing Road, Heping Community, Fuhai Street, Bao'an District, Shenzhen, Guangdong, China
Designation Number	CN1259
FCC Test Firm Registration Number	975832
A2LA Cert. No.	5054.02
Description	Attestation of Global Compliance (Shenzhen) Co., Ltd is accredited by A2LA

#### **TEST EQUIPMENT OF RADIATED EMISSION TEST**

Equipment	Manufacturer	Model	S/N	Cal. Date	Cal. Due
TEST RECEIVER	R&S	ESCI	10096	Feb. 18, 2023	Feb. 17, 2024
EXA Signal Analyzer	Aglient	N9010A	MY53470504	Jun. 01, 2023	May 31, 2024
2.4GHz Filter	EM Electronics	2400-2500MHz	N/A	Jun. 01, 2023	May 31, 2024
Horn antenna	SCHWARZBECK	BBHA 9170	#768	Oct. 31, 2021	Oct. 30, 2023
Active loop antenna (9K-30MHz)	ZHINAN	ZN30900C	18051	Mar. 12, 2022	Mar. 11, 2024
Double-Ridged Waveguide Horn	ETS LINDGREN	3117	00034609	Mar. 23, 2023	Mar. 22, 2024
Broadband Preamplifier	ETS LINDGREN	3117-PA	00246148	Aug. 04, 2022	Aug. 03, 2024
ANTENNA	SCHWARZBECK	VULB9168	494	Jan. 05, 2023	Jan. 04, 2025
Test software	Tonscend	JS32-RE (Ver.2.5)	N/A	N/A	N/A



Page 12 of 42

#### 7. PEAK OUTPUT POWER


#### 7.1. MEASUREMENT PROCEDURE


For peak power test:

- 1. Connect EUT RF output port to the Spectrum Analyzer
- 2. RBW ≥ DTS bandwidth
- 3. VBW≥3\*RBW.
- 4. SPAN≥VBW.
- 5. Sweep: Auto.
- 6. Detector function: Peak.
- 7. Trace: Max hold.

Allow trace to stabilize. Use the marker-to-peak function to set the marker to the peak of the emission. The indicated level is the peak output power, after any corrections for external cables.

## 7.2. TEST SET-UP (BLOCK DIAGRAM OF CONFIGURATION) PEAK POWER TEST SETUP

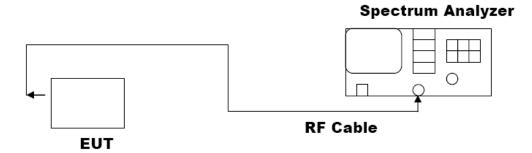







#### 7.3. LIMITS AND MEASUREMENT RESULT

1101 2111111 0 71112 1112/1001(211112111 1/2002)							
	Test Data of Conducted Output Power						
Test Mode Test Channel (MHz) Peak Power (dBm) Limits (dBm) Pass or Fail							
	2402	-0.905	≤30	Pass			
GFSK	2440	-1.060	≤30	Pass			
	2480	-1.048	≤30	Pass			

**Test Graphs of Conducted Output Power** 

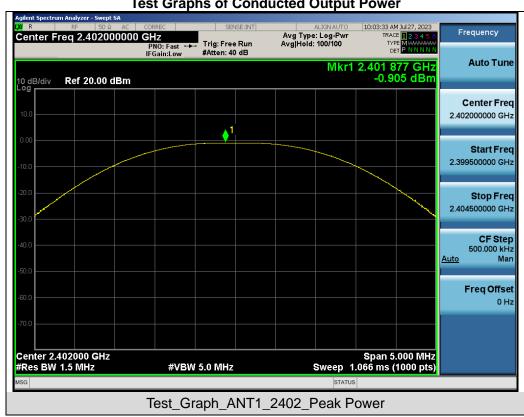











Page 15 of 42

#### 8. BANDWIDTH

#### **8.1. MEASUREMENT PROCEDURE**

#### 6dB bandwidth:

- 1. Connect EUT RF output port to the Spectrum Analyzer
- 2. Set the EUT Work on the top, the middle and the bottom operation frequency individually.
- 3. Set SPA Centre Frequency = Operation Frequency, RBW= 100 kHz, VBW ≥ 3×RBW.
- 4. Set SPA Trace 1 Max hold, then View.

#### Occupied bandwidth:

- 1. Connect EUT RF output port to the Spectrum Analyzer
- 2, Set the EUT Work on the top, the middle and the bottom operation frequency individually.
- 3. Set Span = approximately 2 to 5 times the 20 dB bandwidth, centered on a hoping channel
  The nominal IF filter bandwidth (3 dB RBW) shall be in the range of 1% to 5% of the OBW and video
  bandwidth (VBW) shall be approximately three times RBW; Sweep = auto; Detector function = peak
- 4. Set SPA Trace 1 Max hold, then View.


**Note:** The EUT was tested according to ANSI C63.10 for compliance to FCC PART 15.247 requirements.

#### 8.2. TEST SET-UP (BLOCK DIAGRAM OF CONFIGURATION)


The same as described in section 7.2.


#### 8.3. LIMITS AND MEASUREMENT RESULTS

Test Data of Occupied Bandwidth and DTS Bandwidth							
Test Mode  Test Channel (MHz)  99% Occupied Bandwidth (MHz)  -6dB Bandwidth Bandwidth(MHz)  -6dB Bandwidth Limits (MHz)  Pass or Fail							
	2402	1.059	0.715	≥0.5	Pass		
GFSK	2440	1.059	0.719	≥0.5	Pass		
	2480	1.060	0.723	≥0.5	Pass		






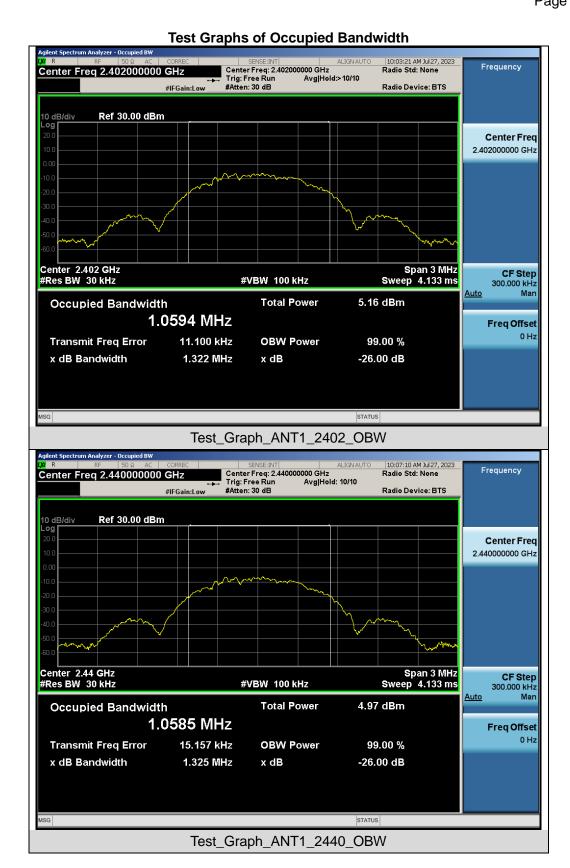








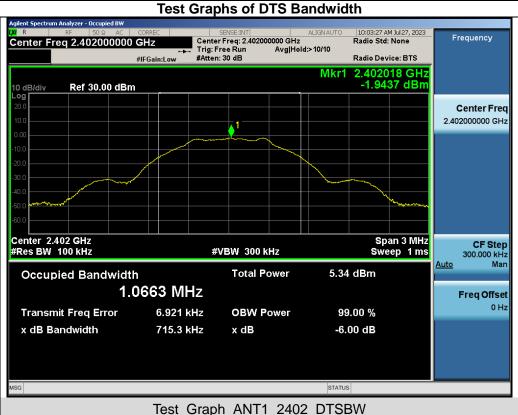









Page 19 of 42

#### 9. CONDUCTED SPURIOUS EMISSION

#### 9.1. MEASUREMENT PROCEDURE

- 1. Connect EUT RF output port to the Spectrum Analyzer
- 2, Set the EUT Work on the top, the middle and the bottom operation frequency individually.
- 3. Set SPA Trace 1 Max hold, then View.

Note: The EUT was tested according to ANSI C63.10 for compliance to FCC PART 15.247 requirements.

#### 9.2. TEST SET-UP (BLOCK DIAGRAM OF CONFIGURATION)


The same as described in section 7.2.

#### 9.3. MEASUREMENT EQUIPMENT USED

The same as described in section 6.

#### 9.4. LIMITS AND MEASUREMENT RESULT

J. I. Elimit o Alto Interconcentent i Regot.						
LIMITS AND MEASUREMENT RESULT						
Applicable Limite	Measurement Result					
Applicable Limits	Test Data	Criteria				
In any 100 kHz Bandwidth Outside the frequency band in which the spread spectrum intentional radiator is operating, the radio frequency power that is produce by the intentional radiator shall be at least 20 dB below that in 100KHz bandwidth within the band that contains the highest level of the desired power.	At least -20dBc than the reference level	PASS				






Test Graphs of Spurious Emissions in Non-Restricted Frequency Bands




Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc01@agccert.com.


Test\_Graph\_ANT1\_2402\_Lower Band Emissions






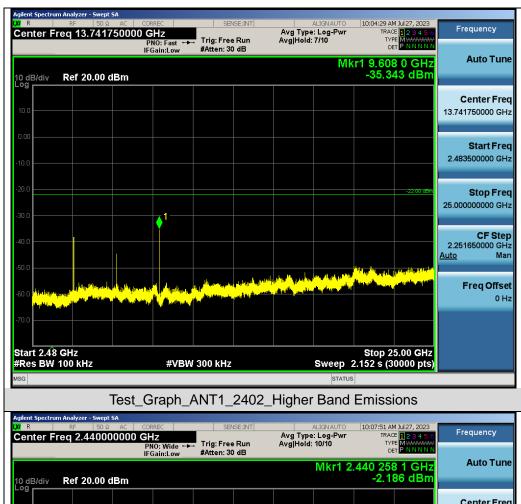









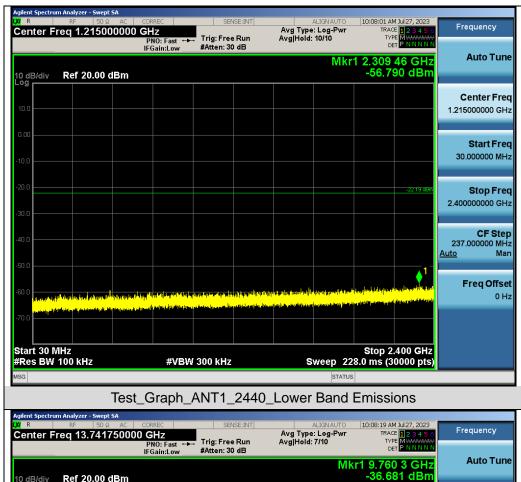


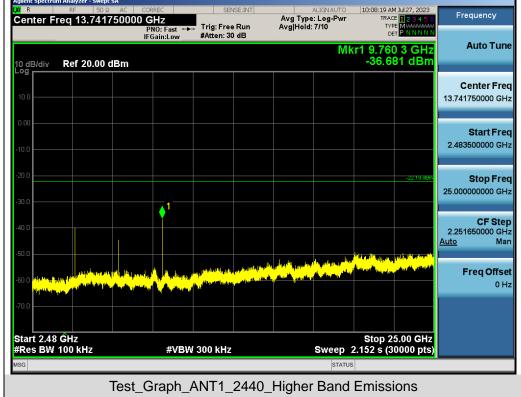










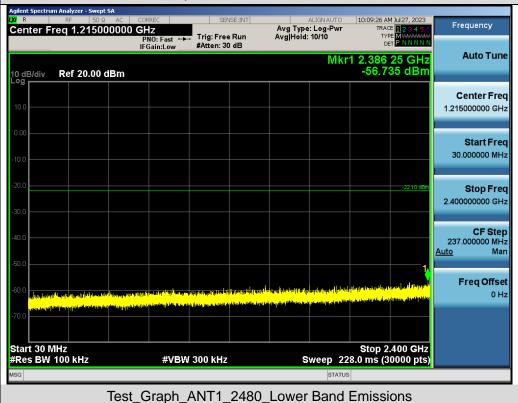





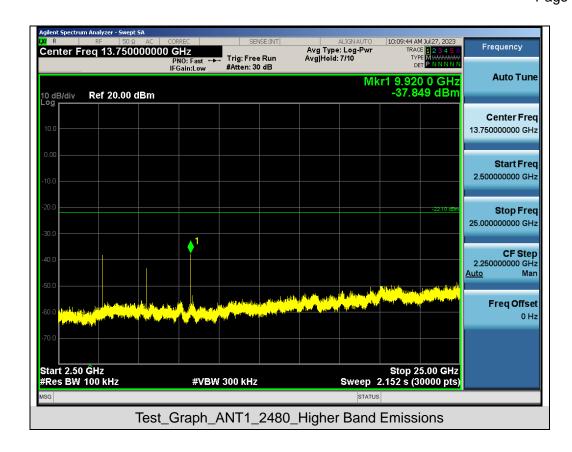





Test Graphs of Band Edge Emissions in Non-Restricted Frequency Bands 10:04:51 AM Jul 27, 2023 Frequency Center Freq 2.398500000 GHz Avg Type: Log-Pwr Avg|Hold: 100/100 Trig: Free Run #Atten: 30 dB **Auto Tune** Mkr2 2.400 000 0 GHz -54.054 dBm Ref 20.00 dBm Center Freq  $\triangle^1$ 2.398500000 GHz Start Freq 2.390000000 GHz Stop Freq 2.407000000 GHz **CF Step** 1.700000 MHz Start 2.390000 GHz #Res BW 100 kHz Stop 2.407000 GHz Sweep 2.000 ms (30000 pts) **#VBW** 300 kHz Man FUNCTION FUNCTION WIDTH 2.402 248 3 GHz 2.400 000 0 GHz -1.831 dBm -54.054 dBm Freq Offset 0 Hz Test\_Graph\_ANT1\_2402\_Lower Band Edge Emissions Frequency Avg Type: Log-Pwr Avg|Hold: 100/100 Center Freq 2.487500000 GHz Trig: Free Run #Atten: 30 dB **Auto Tune** Mkr2 2.483 500 0 GHz -57.895 dBm Ref 20.00 dBm Center Freq 2.487500000 GHz Start Freq 2.475000000 GHz Stop Freq 2.500000000 GHz Stop 2.50000 GHz Sweep 4.000 ms (30000 pts) **CF Step** 2.500000 MHz Start 2.47500 GHz #Res BW 100 kHz #VBW 300 kHz Man FUNCTION FUNCTION WIDTH Freq Offset Test\_Graph\_ANT1\_2480\_Higher Band Edge Emissions



Page 26 of 42

#### 10. MAXIMUM CONDUCTED OUTPUT POWER SPECTRAL DENSITY

#### 10.1. MEASUREMENT PROCEDURE

- (1). Connect EUT RF output port to the Spectrum Analyzer
- (2). Set the EUT Work on the top, the middle and the bottom operation frequency individually.
- (3). Set the SPA Trace 1 Max hold, then View.

Note: The method of PKPSD in the KDB 558074 item 8.4 was used in this testing.

#### 10.2. TEST SET-UP (BLOCK DIAGRAM OF CONFIGURATION)

Refer to Section 7.2.

#### 10.3. MEASUREMENT EQUIPMENT USED


Refer to Section 6.

#### 10.4. LIMITS AND MEASUREMENT RESULT

Test Data of Conducted Output Power Spectral Density							
Test Mode Test Channel Power density Limit (MHz) (dBm/3kHz) Pass or Fail							
	2402	-16.561	<b>≤8</b>	Pass			
GFSK	2440	-16.744	≤8	Pass			
	2480	-16.707	≪8	Pass			

Test Graphs of Conducted Output Power Spectral Density






Freq Offset 0 Hz

Span 1.085 MHz Sweep 114.4 ms (1000 pts)



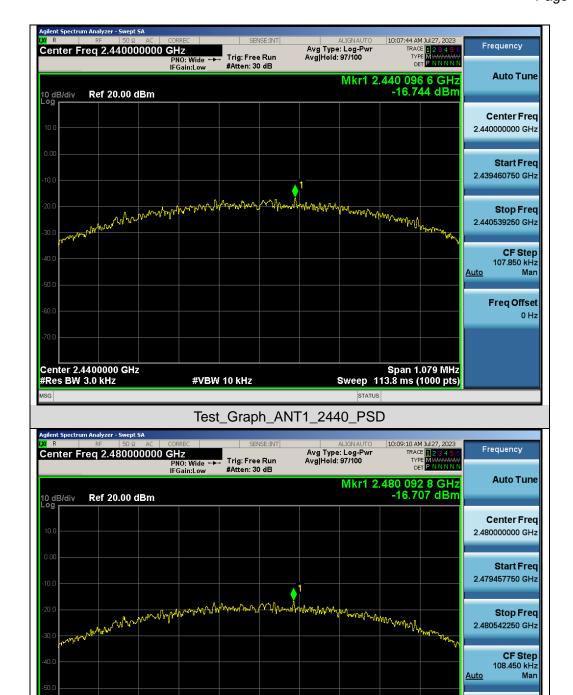

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc01@agccert.com.

Test\_Graph\_ANT1\_2480\_PSD

#VBW 10 kHz

Center 2.4800000 GHz #Res BW 3.0 kHz



Page 28 of 42

#### 11. RADIATED EMISSION


#### 11.1. MEASUREMENT PROCEDURE

- 1. The EUT was placed on the top of the turntable 0.8 or 1.5 meter above ground. The phase center of the receiving antenna mounted on the top of a height-variable antenna tower was placed 3 meters far away from the turntable.
- 2. Power on the EUT and all the supporting units. The turntable was rotated by 360 degrees to determine the position of the highest radiation.
- 3. The height of the broadband receiving antenna was varied between one meter and four meters above ground to find the maximum emissions field strength of both horizontal and vertical polarization.
- 4. For each suspected emission, the antenna tower was scan (from 1 M to 4 M) and then the turntable was rotated (from 0 degree to 360 degrees) to find the maximum reading.
- 5. Set the test-receiver system to Peak or CISPR quasi-peak Detect Function with specified bandwidth under Maximum Hold Mode.
- 6. For emissions above 1GHz, use 1MHz RBW and 3MHz VBW for peak reading. Place the measurement antenna away from each area of the EUT determined to be a source of emissions at the specified measurement distance, while keeping the measurement antenna aimed at the source of emissions at each frequency of significant emissions, with polarization oriented for maximum response. The measurement antenna may have to be higher or lower than the EUT, depending on the radiation pattern of the emission and staying aimed at the emission source for receiving the maximum signal. The final measurement antenna elevation shall be that which maximizes the emissions. The measurement antenna elevation for maximum emissions shall be restricted to a range of heights of from 1 m to 4 m above the ground or reference ground plane.
- 7. When the radiated emissions limits are expressed in terms of the average value of the emissions, and pulsed operation is employed, the measurement field strength shall be determined by averaging over one complete pulse train, including blanking intervals, as long as the pulse train does not exceed 0.1 seconds. As an alternative (provided the transmitter operates for longer than 0.1 seconds) or in cases where the pulse train exceeds 0.1 seconds, the measured field strength shall be determined from the average absolute voltage during a 0.1 second interval during which the field strength is at its maximum values.
- 8.If the emissions level of the EUT in peak mode was 3 dB lower than the average limit specified, then testing will be stopped and peak values of EUT will be reported, otherwise, the emissions which do not have 3 dB margin will be repeated one by one using the quasi-peak method for below 1GHz.
- 9. For testing above 1GHz, the emissions level of the EUT in peak mode was lower than average limit (that means the emissions level in peak mode also complies with the limit in average mode), then testing will be stopped and peak values of EUT will be reported, otherwise, the emissions will be measured in average mode again and reported.
- 10. In case the emission is lower than 30MHz, loop antenna has to be used for measurement and the recorded data should be QP measured by receiver. High Low scan is not required in this case.




#### 11.2. TEST SETUP


#### Radiated Emission Test-Setup Frequency Below 30MHz

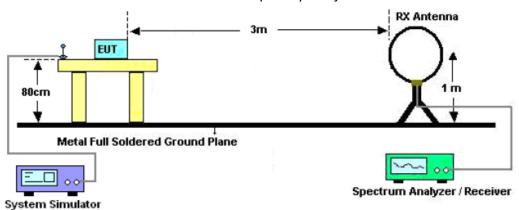

#### RADIATED EMISSION TEST SETUP 30MHz-1000MHz

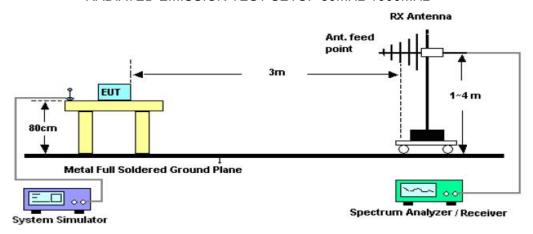

#### RADIATED EMISSION TEST SETUP ABOVE 1000MHz

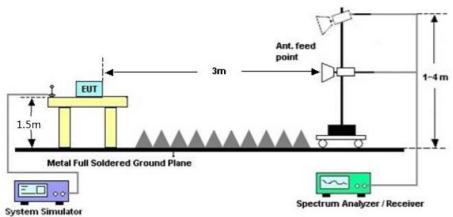



Page 30 of 42

#### 11.3. LIMITS AND MEASUREMENT RESULT

15.209 Limit in the below table has to be followed

Frequencies (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009~0.490	2400/F(kHz)	300
0.490~1.705	24000/F(kHz)	30
1.705~30.0	30	30
30~88	100	3
88~216	150	3
216~960	200	3
Above 960	500	3

Note: All modes were tested for restricted band radiated emission, the test records reported below are the worst result compared to other modes.

#### 11.4. TEST RESULT

#### Radiated emission below 30MHz


The amplitude of spurious emissions from 9kHz to 30MHz which are attenuated more than 20 dB below the permissible value need not be reported.



Page 31 of 42


#### Radiated emission from 30MHz to 1000MHz

EUT	2.4GHz wireless digital headset	Model Name	Sonumaxx NX RX
Temperature	24.4° C	Relative Humidity	60.3%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	Mode 1	Antenna	Horizontal

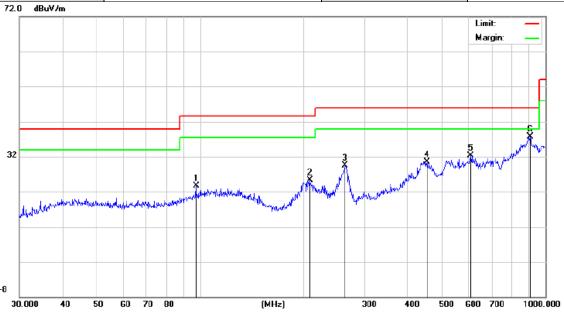


No.	Mk. F	req.	Reading Level	Correct Factor	Measure- ment	Limit	Over	
	1	MHz	dBuV	dB	dBuV/m	dB/m	dB	Detector
1	97.4	4560	7.94	15.81	23.75	43.50	-19.75	peak
2	207.	B501	10.81	14.46	25.27	43.50	-18.23	peak
3	262.	B955	14.90	14.67	29.57	46.00	-16.43	peak
4	454.3	3100	5.97	24.60	30.57	46.00	-15.43	peak
5	607.	7867	7.13	25.14	32.27	46.00	-13.73	peak
6	* 903.	3094	6.38	31.34	37.72	46.00	-8.28	peak

**RESULT: PASS** 





EUT	2.4GHz wireless digital headset	Model Name	Sonumaxx NX RX
Temperature	24.4° C	Relative Humidity	60.3%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	Mode 1	Antenna	Vertical

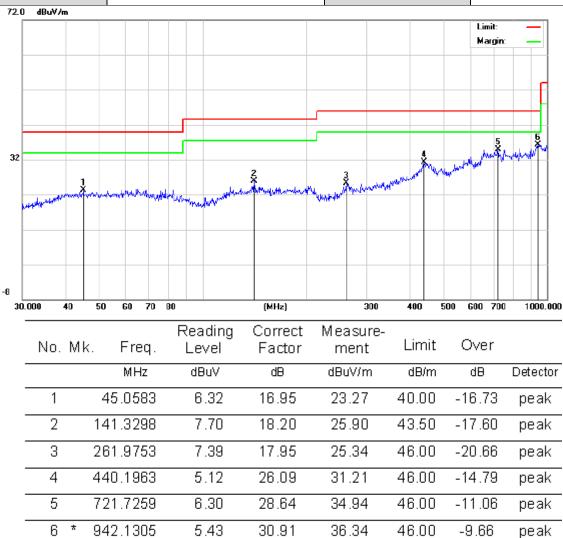

### RESULT: PASS Note:

- 1. Factor=Antenna Factor + Cable loss, Over=Measure-Limit.
- 2. All test modes had been tested. The mode 1 is the worst case and recorded in the report.



Page 33 of 42

#### Radiated emission above 1GHz

EUT	2.4GHz wireless digital headset	Model Name	Sonumaxx NX RX
Temperature	24.4° C	Relative Humidity	60.3%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	Mode 1	Antenna	Horizontal

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Value Type
(MHz)	(dBµV)	(dB)	(dBµV/m)	(dBµV/m)	(dB)	value Type
4804.000	43.42	0.08	43.5	74	-30.5	peak
4804.000	35.36	0.08	35.44	54	-18.56	AVG
7206.000	38.55	2.21	40.76	74	-33.24	peak
7206.000	31.78	2.21	33.99	54	-20.01	AVG
				_		

Remark:

Factor = Antenna Factor + Cable Loss – Pre-amplifier.

EUT	2.4GHz wireless digital headset	Model Name	Sonumaxx NX RX
Temperature	24.4° C	Relative Humidity	60.3%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	Mode 1	Antenna	Vertical

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Value Type
(MHz)	(dBµV)	(dB)	(dBµV/m)	(dBµV/m)	(dB)	value Type
4804.000	44.26	0.08	44.34	74	-29.66	peak
4804.000	34.58	0.08	34.66	54	-19.34	AVG
7206.000	38.75	2.21	40.96	74	-33.04	peak
7206.000	30.48	2.21	32.69	54	-21.31	AVG

Factor = Antenna Factor + Cable Loss - Pre-amplifier.



Page 34 of 42

EUT	2.4GHz wireless digital headset	Model Name	Sonumaxx NX RX
Temperature	24.4° C	Relative Humidity	60.3%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	Mode 2	Antenna	Horizontal

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Value Type
(MHz)	(dBµV)	(dB)	(dBµV/m)	(dBµV/m)	(dB)	value Type
4880.000	44.44	0.14	44.58	74	-29.42	peak
4880.000	35.28	0.14	35.42	54	-18.58	AVG
7320.000	39.73	2.36	42.09	74	-31.91	peak
7320.000	31.65	2.36	34.01	54	-19.99	AVG
emark:						

EUT	2.4GHz wireless digital headset	Model Name	Sonumaxx NX RX
Temperature	24.4° C	Relative Humidity	60.3%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	Mode 2	Antenna	Vertical

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Value Type
(MHz)	(dBµV)	(dB)	(dBµV/m)	(dBµV/m)	(dB)	value Type
4880.000	45.36	0.14	45.5	74	-28.5	peak
4880.000	38.59	0.14	38.73	54	-15.27	AVG
7320.000	40.37	2.36	42.73	74	-31.27	peak
7320.000	32.86	2.36	35.22	54	-18.78	AVG

#### Remark:

Factor = Antenna Factor + Cable Loss - Pre-amplifier.



Page 35 of 42

EUT	2.4GHz wireless digital headset	Model Name	Sonumaxx NX RX
Temperature	24.4° C	Relative Humidity	60.3%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	Mode 3	Antenna	Horizontal

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Value Type
(MHz)	(dBµV)	(dB)	(dBµV/m)	(dBµV/m)	(dB)	value Type
4960.000	44.38	0.22	44.6	74	-29.4	peak
4960.000	35.55	0.22	35.77	54	-18.23	AVG
7440.000	38.24	2.64	40.88	74	-33.12	peak
7440.000	29.33	2.64	31.97	54	-22.03	AVG
Remark:						

Factor = Antenna Factor + Cable Loss – Pre-amplifier.

EUT	2.4GHz wireless digital headset	Model Name	Sonumaxx NX RX
Temperature	24.4° C	Relative Humidity	60.3%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	Mode 3	Antenna	Vertical

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Value Type
(MHz)	(dBµV)	(dB)	(dBµV/m)	(dBµV/m)	(dB)	value Type
4960.000	42.8	0.22	43.02	74	-30.98	peak
4960.000	34.56	0.22	34.78	54	-19.22	AVG
7440.000	38.44	2.64	41.08	74	-32.92	peak
7440.000	29.39	2.64	32.03	54	-21.97	AVG
Remark:						

#### **RESULT: PASS**


The amplitude of other spurious emissions from 1G to 25 GHz which are attenuated more than 20 dB below the permissible value need not be reported.

Factor = Antenna Factor + Cable loss - Amplifier gain, Margin= Emission Level-Limit.

The "Factor" value can be calculated automatically by software of measurement system.

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report.  $Further\ enquiry\ of\ validity\ or\ verification\ of\ the\ test\ report\ should\ be\ addressed\ to\ AGC\ by\ agc 01@agccert.com.$ 

Factor = Antenna Factor + Cable Loss – Pre-amplifier.







Test result for band edge emission at restricted bands

EUT	2.4GHz wireless digital headset	Model Name	Sonumaxx NX RX
Temperature	24.4° C	Relative Humidity	60.3%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	Mode 1	Antenna	Horizontal


Test Graph for Peak Measurement

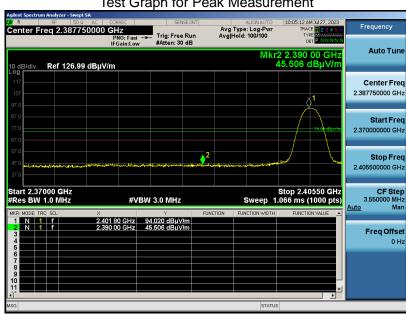



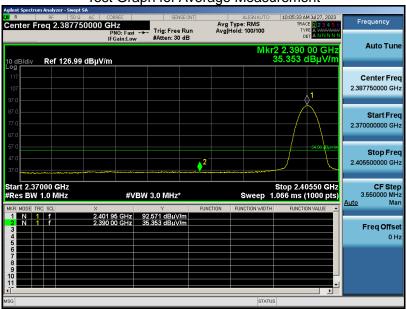


**RESULT: PASS** 






**EUT** 2.4GHz wireless digital headset **Model Name** Sonumaxx NX RX 24.4° C **Temperature Relative Humidity** 60.3% 960hPa **Test Voltage** Normal Voltage **Pressure Test Mode** Mode 1 **Antenna** Vertical


Test Graph for Peak Measurement

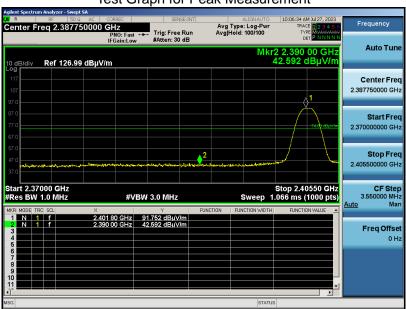



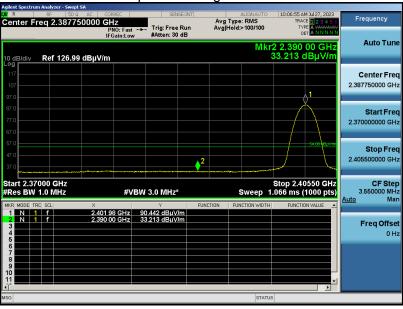

**RESULT: PASS** 






**EUT** 2.4GHz wireless digital headset **Model Name** Sonumaxx NX RX 24.4° C **Temperature Relative Humidity** 60.3% 960hPa **Test Voltage** Normal Voltage **Pressure Test Mode** Mode 3 **Antenna** Horizontal


Test Graph for Peak Measurement





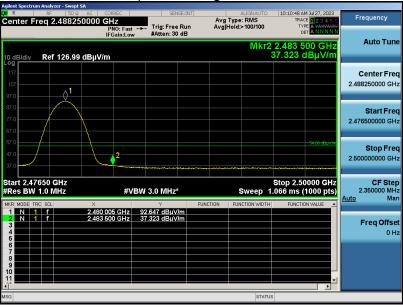


**RESULT: PASS** 






**EUT** Sonumaxx NX RX 2.4GHz wireless digital headset **Model Name** 24.4° C **Temperature Relative Humidity** 60.3% 960hPa Normal Voltage **Pressure Test Voltage Test Mode** Mode 3 **Antenna** Vertical

Test Graph for Peak Measurement

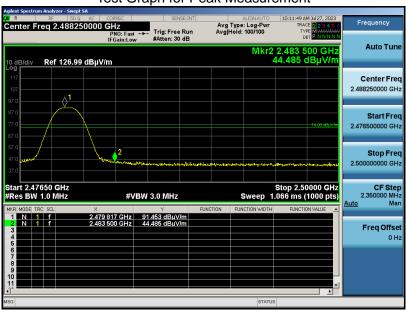



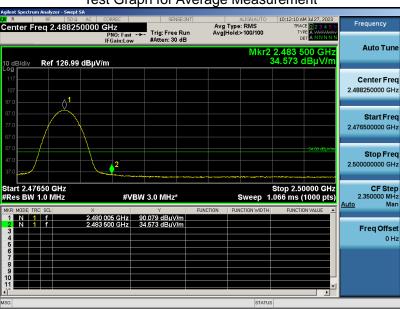

#### **RESULT: PASS**

Note: The factor had been edited in the "Input Correction" of the Spectrum Analyzer.



Page 40 of 42

#### 12. LINE CONDUCTED EMISSION TEST


#### 12.1. LIMITS OF LINE CONDUCTED EMISSION TEST

Frequency	Maximum RF Line Voltage	
	Q.P.( dBuV)	Average( dBuV)
150kHz~500kHz	66-56	56-46
500kHz~5MHz	56	46
5MHz~30MHz	60	50

#### Note:

- 1. The lower limit shall apply at the transition frequency.
- 2. The limit decreases linearly with the logarithm of the frequency in the range 0.15 MHz to 0.50 MHz.

#### 12.2. BLOCK DIAGRAM OF LINE CONDUCTED EMISSION TEST

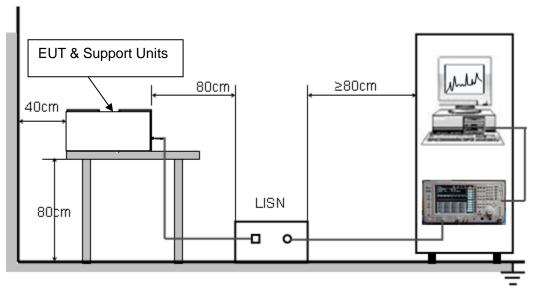



Page 41 of 42

#### 12.3. PRELIMINARY PROCEDURE OF LINE CONDUCTED EMISSION TEST

- 1. The equipment was set up as per the test configuration to simulate typical actual usage per the user's manual. When the EUT is a tabletop system, a wooden table with a height of 0.8 meters is used and is placed on the ground plane as per ANSI C63.10 (see Test Facility for the dimensions of the ground plane used). When the EUT is a floor-standing equipment, it is placed on the ground plane which has a 3-12 mm non-conductive covering to insulate the EUT from the ground plane.
- 2. Support equipment, if needed, was placed as per ANSI C63.10.
- 3. All I/O cables were positioned to simulate typical actual usage as per ANSI C63.10.
- 4. All support equipment received AC120V/60Hz power from a LISN, if any.
- 5. The EUT received DC 5V power from adapter which received AC120V/60Hz power from a LISN.
- 6. The test program was started. Emissions were measured on each current carrying line of the EUT using a spectrum Analyzer / Receiver connected to the LISN powering the EUT. The LISN has two monitoring points: Line 1 (Hot Side) and Line 2 (Neutral Side). Two scans were taken: one with Line 1 connected to Analyzer / Receiver and Line 2 connected to a 50 ohm load; the second scan had Line 1 connected to a 50 ohm load and Line 2 connected to the Analyzer / Receiver.
- 7. Analyzer / Receiver scanned from 150 kHz to 30MHz for emissions in each of the test modes.
- 8. During the above scans, the emissions were maximized by cable manipulation.
- 9. The test mode(s) were scanned during the preliminary test.

Then, the EUT configuration and cable configuration of the above highest emission level were recorded for reference of final testing.

#### 12.4. FINAL PROCEDURE OF LINE CONDUCTED EMISSION TEST

- 1. EUT and support equipment was set up on the test bench as per step 2 of the preliminary test.
- 2. A scan was taken on both power lines, Line 1 and Line 2, recording at least the six highest emissions. Emission frequency and amplitude were recorded into a computer in which correction factors were used to calculate the emission level and compare reading to the applicable limit. If EUT emission level was less 2dB to the A.V. limit in Peak mode, then the emission signal was re-checked using Q.P and Average detector.
- 3. The test data of the worst case condition(s) was reported on the Summary Data page.

#### 12.5. TEST RESULT OF LINE CONDUCTED EMISSION TEST

N/A

Note: The conducted emission tests at AC port are not required for devices which only employ battery power for operation.



Page 42 of 42

#### **APPENDIX I: PHOTOGRAPHS OF TEST SETUP**

Refer to the Report No.: AGC05036230701AP02

**APPENDIX II: PHOTOGRAPHS OF EUT** 

Refer to the Report No.: AGC05036230701AP03

----END OF REPORT----



### Conditions of Issuance of Test Reports

- 1. All samples and goods are accepted by the Attestation of Global Compliance (Shenzhen) Co., Ltd (the "Company") solely for testing and reporting in accordance with the following terms and conditions. The company provides its services on the basis that such terms and conditions constitute express agreement between the company and any person, firm or company requesting its services (the "Clients").
- 2. Any report issued by Company as a result of this application for testing services (the "Report") shall be issued in confidence to the Clients and the Report will be strictly treated as such by the Company. It may not be reproduced either in its entirety or in part and it may not be used for advertising or other unauthorized purposes without the written consent of the Company. The Clients to whom the Report is issued may, however, show or send it, or a certified copy thereof prepared by the Company to its customer, supplier or other persons directly concerned. The Company will not, without the consent of the Clients, enter into any discussion or correspondence with any third party concerning the contents of the Report, unless required by the relevant governmental authorities, laws or court orders.
- 3. The Company shall not be called or be liable to be called to give evidence or testimony on the Report in a court of law without its prior written consent, unless required by the relevant governmental authorities, laws or court orders.
- 4. In the event of the improper use of the report as determined by the Company, the Company reserves the right to withdraw it, and to adopt any other additional remedies which may be appropriate.
- 5. Samples submitted for testing are accepted on the understanding that the Report issued cannot form the basis of, or be the instrument for, any legal action against the Company.
- 6. The Company will not be liable for or accept responsibility for any loss or damage however arising from the use of information contained in any of its Reports or in any communication whatsoever about its said tests or investigations.
- 7.Clients wishing to use the Report in court proceedings or arbitration shall inform the Company to that effect prior to submitting the sample for testing.
- 8. The Company is not responsible for recalling the electronic version of the original report when any revision is made to them. The Client assumes the responsibility to providing the revised version to any interested party who uses them.
- 9. Subject to the variable length of retention time for test data and report stored hereinto as otherwise specifically required by individual accreditation authorities, the Company will only keep the supporting test data and information of the test report for a period of six years. The data and information will be disposed of after the aforementioned retention period has elapsed. Under no circumstances shall we provide any data and information which has been disposed of after retention period. Under no circumstances shall we be liable for damage of any kind, including (but not limited to) compensatory damages, lost profits, lost data, or any form of special, incidental, indirect, consequential or punitive damages of any kind, whether based on breach of contract of warranty, tort (including negligence), product liability or otherwise, even if we are informed in advance of the possibility of such damages.