

NORTHWEST EMC


Awarepoint Corporation

BLET

FCC 15.247:2016

Bluetooth Low Energy Radio

Report # AWAR0021.5

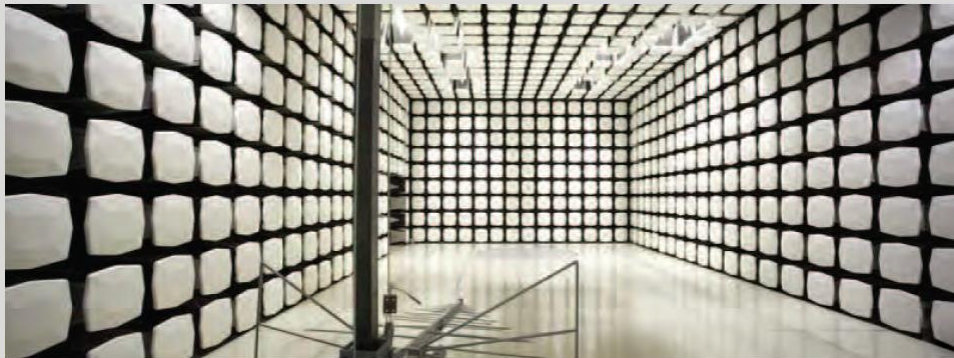

NVLAP Lab Code: 200676-0

This report must not be used to claim product certification, approval, or endorsement by NVLAP, NIST, or any agency of the federal government of the United States of America.

CERTIFICATE OF TEST

Last Date of Test: August 9, 2016
Awarepoint Corporation
Model: BLET

Radio Equipment Testing

Standards

Specification	Method
FCC 15.247:2016	ANSI C63.10:2013, KDB 558074


Results

Method Clause	Test Description	Applied	Results	Comments
6.2	Powerline Conducted Emissions	No	N/A	Not required for a battery powered EUT.
6.5, 6.6, 11.12.1, 11.13.2	Spurious Radiated Emissions	Yes	Pass	
11.6	Duty Cycle	Yes	N/A	Characterization of radio operation.
11.8.2	Occupied Bandwidth	Yes	Pass	
11.9.1.1	Output Power	Yes	Pass	
11.10.2	Power Spectral Density	Yes	Pass	
11.11	Band Edge Compliance	Yes	Pass	
11.11	Spurious Conducted Emissions	Yes	Pass	

Deviations From Test Standards

None

Approved By:

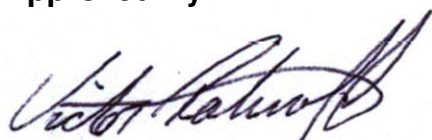

Victor Ratnoff, Operations Manager

Product compliance is the responsibility of the client; therefore, the tests and equipment modes of operation represented in this report were agreed upon by the client, prior to testing. The results of this test pertain only to the sample(s) tested. The specific description is noted in each of the individual sections of the test report supporting this certificate of test. This report reflects only those tests from the referenced standards shown in the certificate of test. It does not include inspection or verification of labels, identification, marking or user information.

REVISION HISTORY

Revision Number		Description	Date	Page Number
00		None		

ACCREDITATIONS AND AUTHORIZATIONS

United States

FCC - Designated by the FCC as a Telecommunications Certification Body (TCB). Certification chambers, Open Area Test Sites, and conducted measurement facilities are listed with the FCC.

A2LA - Accredited by A2LA to ISO / IEC 17065 as a product certifier. This allows Northwest EMC to certify transmitters to FCC and IC specifications.

NVLAP - Each laboratory is accredited by NVLAP to ISO 17025

Canada

ISED - Recognized by Innovation, Science and Economic Development Canada as a Certification Body (CB). Certification chambers and Open Area Test Sites are filed with ISED.

European Union

European Commission – Validated by the European Commission as a Notified Body under the R&TTE Directive.

Australia/New Zealand

ACMA - Recognized by ACMA as a CAB for the acceptance of test data.

Korea

MSIP / RRA - Recognized by KCC's RRA as a CAB for the acceptance of test data.

Japan

VCCI - Associate Member of the VCCI. Conducted and radiated measurement facilities are registered.

Taiwan

BSMI – Recognized by BSMI as a CAB for the acceptance of test data.

NCC - Recognized by NCC as a CAB for the acceptance of test data.

Singapore

IDA – Recognized by IDA as a CAB for the acceptance of test data.

Israel

MOC – Recognized by MOC as a CAB for the acceptance of test data.

Hong Kong

OFCA – Recognized by OFCA as a CAB for the acceptance of test data.

Vietnam

MIC – Recognized by MIC as a CAB for the acceptance of test data.

SCOPE

For details on the Scopes of our Accreditations, please visit:

<http://www.nwemc.com/accreditations/>
<http://gsi.nist.gov/global/docs/cabs/designations.html>

MEASUREMENT UNCERTAINTY

Measurement Uncertainty


When a measurement is made, the result will be different from the true or theoretically correct value. The difference is the result of tolerances in the measurement system that cannot be completely eliminated. To the extent that technology allows us, it has been our aim to minimize this error. Measurement uncertainty is a statistical expression of measurement error qualified by a probability distribution.

A measurement uncertainty estimation has been performed for each test per our internal quality document QM205.4.6. The estimation is used to compare the measured result with its "true" or theoretically correct value. The expanded measurement uncertainty ($K=2$) can be found included as part of the applicable test description page. Our measurement data meets or exceeds the measurement uncertainty requirements of the applicable specification; therefore, the test data can be compared directly to the specification limit to determine compliance. The calculations for estimating measurement uncertainty are based upon ETSI TR 100 028 (or CISPR 16-4-2 as applicable), and are available upon request.


The following table represents the Measurement Uncertainty (MU) budgets for each of the tests that may be contained in this report.

Test	+ MU	- MU
Frequency Accuracy (Hz)	0.0007%	-0.0007%
Amplitude Accuracy (dB)	1.2 dB	-1.2 dB
Conducted Power (dB)	0.3 dB	-0.3 dB
Radiated Power via Substitution (dB)	0.7 dB	-0.7 dB
Temperature (degrees C)	0.7°C	-0.7°C
Humidity (% RH)	2.5% RH	-2.5% RH
Voltage (AC)	1.0%	-1.0%
Voltage (DC)	0.7%	-0.7%
Field Strength (dB)	5.2 dB	-5.2 dB
AC Powerline Conducted Emissions (dB)	2.4 dB	-2.4 dB

FACILITIES

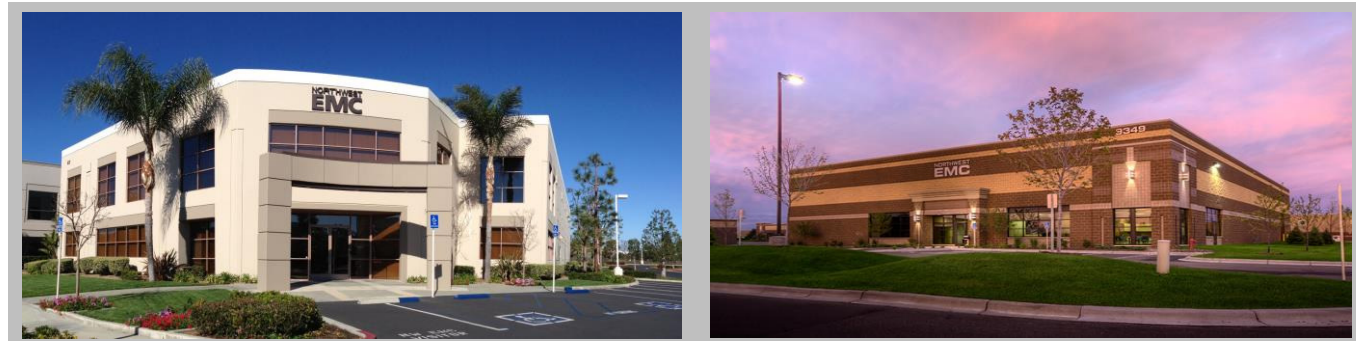


California Labs OC01-13 41 Tesla Irvine, CA 92618 (949) 861-8918	Minnesota Labs MN01-08, MN10 9349 W Broadway Ave. Brooklyn Park, MN 55445 (612)-638-5136	New York Labs NY01-04 4939 Jordan Rd. Elbridge, NY 13060 (315) 554-8214	Oregon Labs EV01-12 22975 NW Evergreen Pkwy Hillsboro, OR 97124 (503) 844-4066	Texas Labs TX01-09 3801 E Plano Pkwy Plano, TX 75074 (469) 304-5255	Washington Labs NC01-05 19201 120 th Ave NE Bothell, WA 98011 (425)984-6600
NVLAP					
NVLAP Lab Code: 200676-0	NVLAP Lab Code: 200881-0	NVLAP Lab Code: 200761-0	NVLAP Lab Code: 200630-0	NVLAP Lab Code:201049-0	NVLAP Lab Code: 200629-0
Innovation, Science and Economic Development Canada					
2834B-1, 2834B-3	2834E-1	N/A	2834D-1, 2834D-2	2834G-1	2834F-1
BSMI					
SL2-IN-E-1154R	SL2-IN-E-1152R	N/A	SL2-IN-E-1017	SL2-IN-E-1158R	SL2-IN-E-1153R
VCCI					
A-0029	A-0109	N/A	A-0108	A-0201	A-0110
Recognized Phase I CAB for ACMA, BSMI, IDA, KCC/RRR, MIC, MOC, NCC, OFCA					
US0158	US0175	N/A	US0017	US0191	US0157

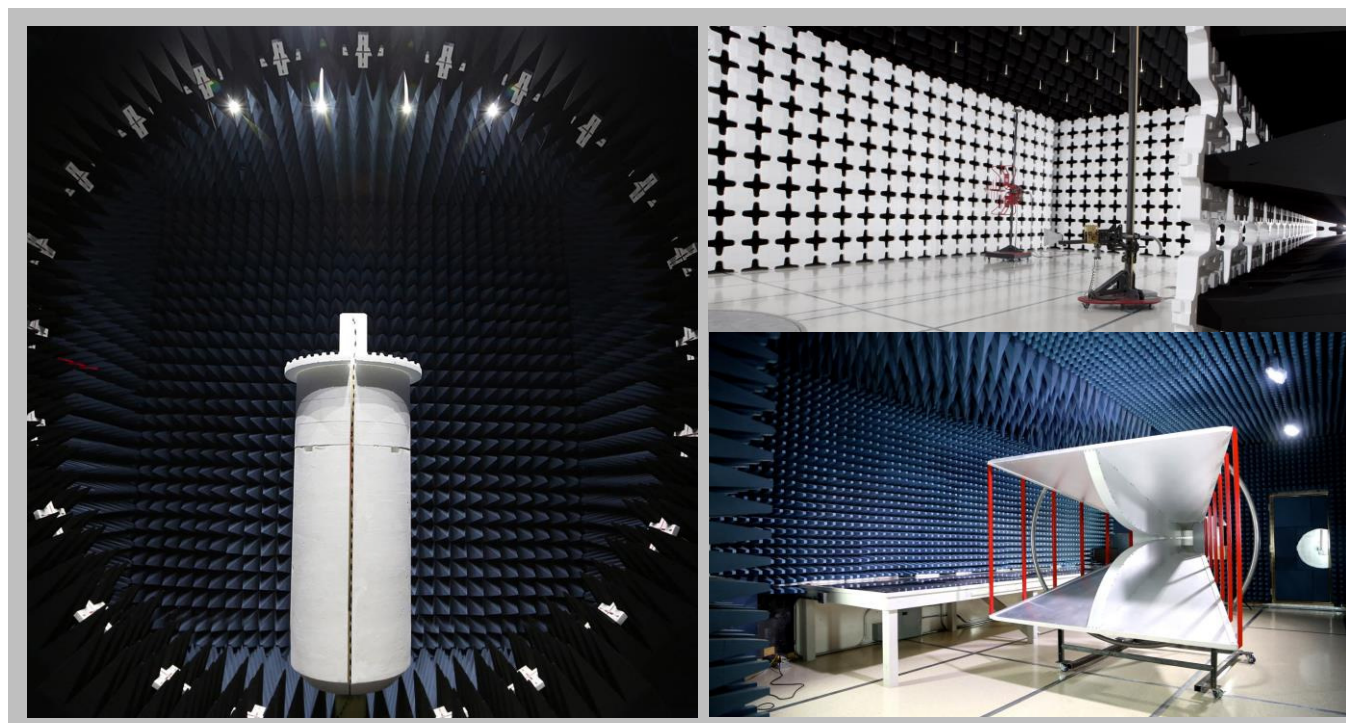


Test Setup Block Diagrams


Antenna Port Conducted Measurements

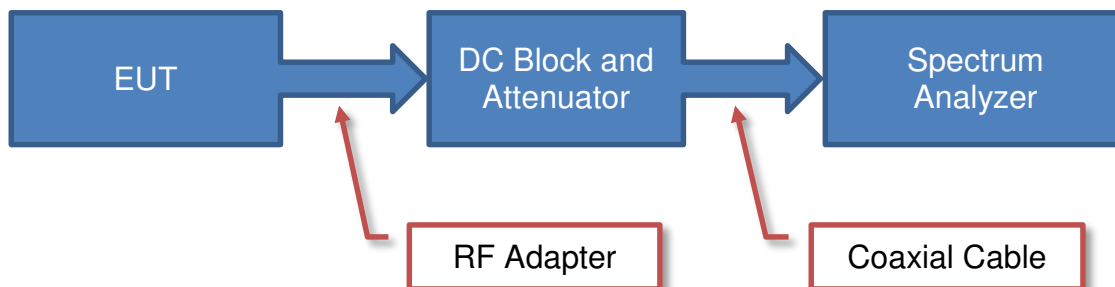

Near Field Test Fixture Measurements

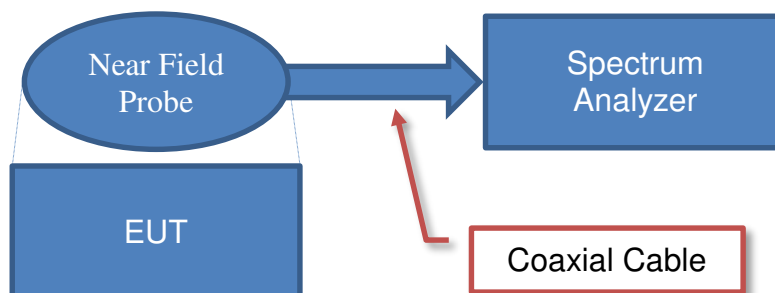

Spurious Radiated Emissions

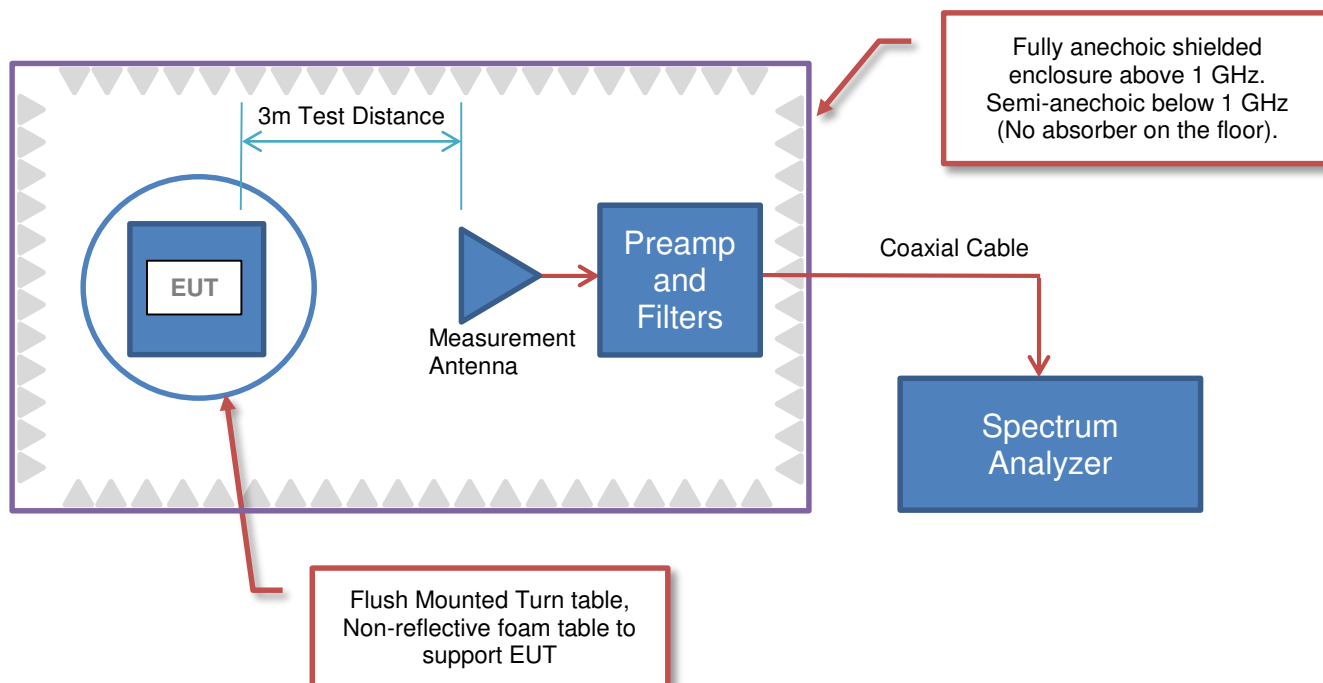

PRODUCT DESCRIPTION

Client and Equipment Under Test (EUT) Information

Company Name:	Awarepoint Corporation
Address:	600 W. Broadway Suite 250
City, State, Zip:	San Diego, CA 92101
Test Requested By:	John Taylor
Model:	BLET
First Date of Test:	July 27, 2016
Last Date of Test:	August 09, 2016
Receipt Date of Samples:	July 25, 2016
Equipment Design Stage:	Production
Equipment Condition:	No Damage

Information Provided by the Party Requesting the Test

Functional Description of the EUT:
Bluetooth Low Energy scanner (Receiver) that measures RSSI of BLE beacons and then periodically connects with a WiFi access point to transmit collected BLE scans for the purpose of location tracking or for configuration and firmware updates.
Testing Objective:
To demonstrate compliance of the Bluetooth radio to FCC 15.247 requirements.

CONFIGURATIONS

Configuration AWAR0021- 3

Software/Firmware Running during test	
Description	Version
SmartRF Studio 7	2.3.1

EUT			
Description	Manufacturer	Model/Part Number	Serial Number
WiFi and Bluetooth Radio	Awarepoint Corporation	BLET	E358720

Peripherals in test setup boundary			
Description	Manufacturer	Model/Part Number	Serial Number
Laptop	Dell	VOSTRO 3550	FJRVLR1
AC/DC Power Supply	Dell	LA90PS0-00	CN-0DF266-71615-73O-0B34
BLE Interface Board	Texas Instruments	SmartRF06EB	0x00321

Cables					
Cable Type	Shield	Length (m)	Ferrite	Connection 1	Connection 2
AC Cable	No	.75m	No	AC mains	AC/DC Power Supply
DC Cable	No	1.5m	Yes	AC/DC Power Supply	Laptop
Ribbon Cable	No	0.1m	No	BLE Interface Board	WiFi and Bluetooth Radio
Micro USB Cable	No	1.0m	No	BLE Interface Board	Laptop

MODIFICATIONS

Equipment Modifications

Item	Date	Test	Modification	Note	Disposition of EUT
1	7/27/2016	Spurious Radiated Emissions	Tested as delivered to Test Station.	No EMI suppression devices were added or modified during this test.	EUT remained at Northwest EMC following the test.
2	8/9/2016	Occupied Bandwidth	Tested as delivered to Test Station.	No EMI suppression devices were added or modified during this test.	EUT remained at Northwest EMC following the test.
3	8/9/2016	Output Power	Tested as delivered to Test Station.	No EMI suppression devices were added or modified during this test.	EUT remained at Northwest EMC following the test.
4	8/9/2016	Power Spectral Density	Tested as delivered to Test Station.	No EMI suppression devices were added or modified during this test.	EUT remained at Northwest EMC following the test.
5	8/9/2016	Band Edge Compliance	Tested as delivered to Test Station.	No EMI suppression devices were added or modified during this test.	EUT remained at Northwest EMC following the test.
6	8/9/2016	Spurious Conducted Emissions	Tested as delivered to Test Station.	No EMI suppression devices were added or modified during this test.	Scheduled testing was completed.

SPURIOUS RADIATED EMISSIONS

Testing was performed using the mode(s) of operation and configuration(s) noted within the report. The individuals and/or the organization requesting the test provided the modes, configurations and settings used to complete the evaluation. The actual test parameters are specified in the test data, this includes items such as investigated frequency range (scanned) and test levels. The testing methods and performance specifications, as well as the test site used for the evaluation are indicated in the test data. The test data represents the configuration / operating mode/ model that produced the highest emission levels as compared to the specification limit.

MODES OF OPERATION

Transmitting BLE at Low Channel 0(2402MHz), Mid Channel 20(2442MHz), and High Channel 39(2480MHz)

POWER SETTINGS INVESTIGATED

USB Powered

CONFIGURATIONS INVESTIGATED

AWAR0021 - 3

FREQUENCY RANGE INVESTIGATED

Start Frequency	30 MHz	Stop Frequency	26000 MHz
-----------------	--------	----------------	-----------

SAMPLE CALCULATIONS

Radiated Emissions: Field Strength = Measured Level + Antenna Factor + Cable Factor - Amplifier Gain + Distance Adjustment Factor + External Attenuation

TEST EQUIPMENT

Description	Manufacturer	Model	ID	Last Cal.	Interval
Filter - Low Pass	Micro-Tronics	LPM50004	LFC	11/3/2015	12 mo
Attenuator	Coaxicom	66702 3910AF-20	TKI	3/3/2016	12 mo
Cable	Northwest EMC	8-18GHz RE Cables	OCO	8/26/2015	12 mo
Cable	Northwest EMC	18-26GHz RE Cables	OCK	1/6/2016	12 mo
Cable	Northwest EMC	1-8GHz RE Cables	OCJ	8/26/2015	12 mo
Cable	Northwest EMC	10kHz-1GHz RE Cables	OCH	3/3/2016	12 mo
Filter - High Pass	Micro-Tronics	HPM50111	HFM	2/9/2016	12 mo
Antenna - Biconilog	EMCO	3142B	AXK	10/6/2014	24 mo
Amplifier - Pre-Amplifier	Miteq	AMF-4D-010120-30-10P-1	AOP	8/26/2015	12 mo
Amplifier - Pre-Amplifier	Miteq	AM-1064-9079	AOO	3/3/2016	12 mo
Amplifier - Pre-Amplifier	Miteq	AMF-6F-18002650-25-10P	AOI	1/6/2016	12 mo
Amplifier - Pre-Amplifier	Miteq	AMF-6F-12001800-30-10P	AOF	8/31/2015	12 mo
Amplifier - Pre-Amplifier	Miteq	AMF-6F-08001200-30-10P	AOE	8/31/2015	12 mo
Antenna - Standard Gain	ETS Lindgren	3160-08	AHT	NCR	0 mo
Antenna - Standard Gain	ETS Lindgren	3160-07	AHR	NCR	0 mo
Antenna - Standard Gain	ETS Lindgren	3160-09	AHN	NCR	0 mo
Antenna - Double Ridge	EMCO	3115	AHB	3/21/2016	24 mo
Analyzer - Spectrum Analyzer	Agilent	N9010A	AFJ	2/9/2016	12 mo

TEST DESCRIPTION

The highest gain of each type of antenna to be used with the EUT was tested. The EUT was configured for low, mid, and high band transmit frequencies. For each configuration, the spectrum was scanned throughout the specified range. In addition, measurements were made in the restricted bands to verify compliance. While scanning, emissions from the EUT were maximized by rotating the EUT on a turntable, adjusting the position of the EUT and the EUT antenna in three orthogonal axis, and adjusting measurement antenna height and polarization. A preamp and high pass filter were used for this test in order to provide sufficient measurement sensitivity.

SPURIOUS RADIATED EMISSIONS




PSA-ESCI 2016.04.26.1
EmiR5 2016.04.26.1

Work Order:	AWAR0021	Date:	07/27/16	
Project:	None	Temperature:	22 °C	
Job Site:	OC10	Humidity:	44.7% RH	
Serial Number:	E358720	Barometric Pres.:	1015 mbar	
Tested by:				Mike Tran
EUT:	BLET			
Configuration:	3			
Customer:	Awarepoint Corporation			
Attendees:	None			
EUT Power:	USB Powered			
Operating Mode:	Transmitting BLE at Low Channel 0(2402MHz), Mid Channel 20(2442MHz), and High Channel 39(2480MHz)			
Deviations:	None			
Comments:	None			

Test Specifications	Test Method
FCC 15.247:2016	ANSI C63.10:2013

Run #	21	Test Distance (m)	3	Antenna Height(s)	1 to 4(m)	Results	Pass
-------	----	-------------------	---	-------------------	-----------	---------	------

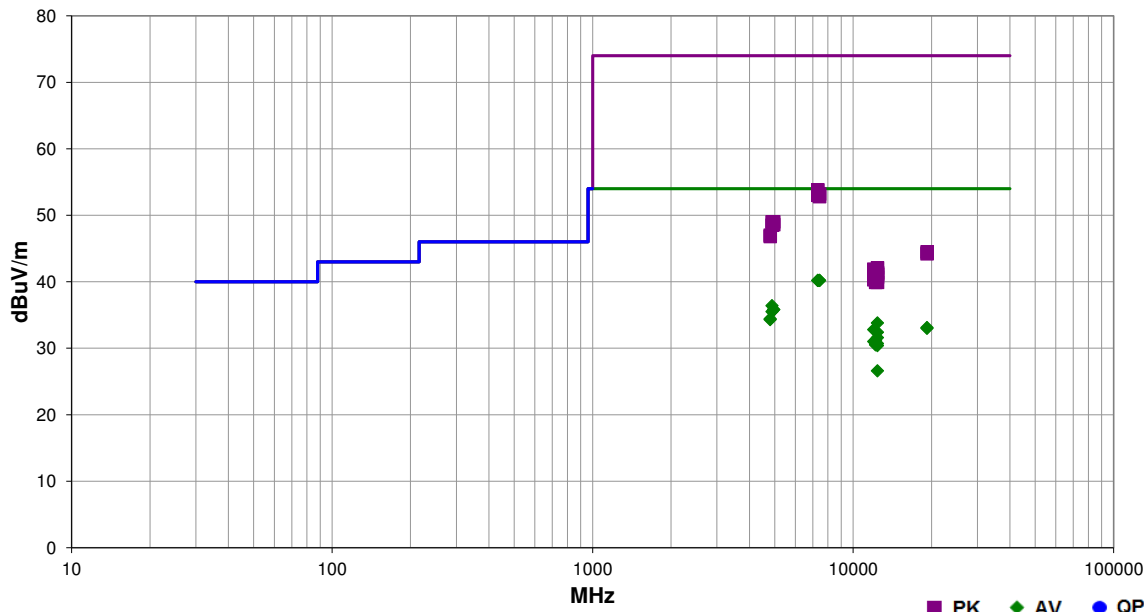

Freq (MHz)	Amplitude (dBuV)	Factor (dB)	Antenna Height (meters)	Azimuth (degrees)	Test Distance (meters)	External Attenuation (dB)	Polarity/Transducer Type	Detector	Distance Adjustment (dB)	Adjusted (dBuV/m)	Spec. Limit (dBuV/m)	Compared to Spec. (dB)	Comments
7440.542	23.8	16.4	1.5	23.0	3.0	0.0	Horz	AV	0.0	40.2	54.0	-13.8	EUT Vert, High Ch 2480MHz
7440.392	23.8	16.4	1.5	96.0	3.0	0.0	Vert	AV	0.0	40.2	54.0	-13.8	EUT Vert, High Ch 2480MHz
7323.925	24.0	16.2	3.3	198.0	3.0	0.0	Horz	AV	0.0	40.2	54.0	-13.8	EUT Vert, Mid Ch 2442MHz
7324.167	24.0	16.2	1.5	100.0	3.0	0.0	Vert	AV	0.0	40.2	54.0	-13.8	EUT Vert, Mid Ch 2442MHz
4884.333	25.8	10.6	1.5	208.0	3.0	0.0	Horz	AV	0.0	36.4	54.0	-17.6	EUT Vert, Mid Ch 2442MHz
4960.417	25.0	10.8	1.5	69.0	3.0	0.0	Horz	AV	0.0	35.8	54.0	-18.2	EUT Vert, High Ch 2480MHz
4960.383	25.0	10.8	1.5	101.0	3.0	0.0	Vert	AV	0.0	35.8	54.0	-18.2	EUT Vert, High Ch 2480MHz
4884.417	24.9	10.6	1.5	209.0	3.0	0.0	Vert	AV	0.0	35.5	54.0	-18.5	EUT Vert, Mid Ch 2442MHz
4804.383	24.0	10.4	1.5	45.0	3.0	0.0	Horz	AV	0.0	34.4	54.0	-19.6	EUT Vert, Low Ch 2402MHz
4804.467	23.9	10.4	1.1	258.0	3.0	0.0	Vert	AV	0.0	34.3	54.0	-19.7	EUT Vert, Mid Ch 2442MHz
12398.930	41.5	-7.7	2.3	256.0	3.0	0.0	Vert	AV	0.0	33.8	54.0	-20.2	EUT Vert, High Ch 2480MHz
7327.075	37.6	16.2	3.3	198.0	3.0	0.0	Horz	PK	0.0	53.8	74.0	-20.2	EUT Vert, Mid Ch 2442MHz
7440.533	36.8	16.4	1.5	96.0	3.0	0.0	Vert	PK	0.0	53.2	74.0	-20.8	EUT Vert, High Ch 2480MHz
19214.480	38.7	-5.6	1.5	8.0	3.0	0.0	Vert	AV	0.0	33.1	54.0	-20.9	EUT Vert, Low Ch 2402MHz
7324.083	36.8	16.2	1.5	100.0	3.0	0.0	Vert	PK	0.0	53.0	74.0	-21.0	EUT Vert, Mid Ch 2442MHz
19213.850	38.6	-5.6	1.5	274.0	3.0	0.0	Horz	AV	0.0	33.0	54.0	-21.0	EUT Vert, Low Ch 2402MHz
12009.010	41.1	-8.3	2.1	93.0	3.0	0.0	Vert	AV	0.0	32.8	54.0	-21.2	EUT Vert, Low Ch 2402MHz
7438.375	36.4	16.4	1.5	23.0	3.0	0.0	Horz	PK	0.0	52.8	74.0	-21.2	EUT Vert, High Ch 2480MHz
12398.910	40.1	-7.7	2.3	242.0	3.0	0.0	Horz	AV	0.0	32.4	54.0	-21.6	EUT Vert, High Ch 2480MHz
12399.000	39.3	-7.7	2.7	163.0	3.0	0.0	Horz	AV	0.0	31.6	54.0	-22.4	EUT on Side, High Ch 2480MHz
12209.030	39.2	-8.0	2.9	61.0	3.0	0.0	Vert	AV	0.0	31.2	54.0	-22.8	EUT Vert, Mid Ch 2442MHz
12008.930	39.3	-8.3	1.5	72.0	3.0	0.0	Horz	AV	0.0	31.0	54.0	-23.0	EUT Vert, Low Ch 2402MHz

Freq (MHz)	Amplitude (dBuV)	Factor (dB)	Antenna Height (meters)	Azimuth (degrees)	Test Distance (meters)	External Attenuation (dB)	Polarity/ Transducer Type	Detector	Distance Adjustment (dB)	Adjusted (dBuV/m)	Spec. Limit (dBuV/m)	Compared to Spec. (dB)	Comments
12398.940	38.4	-7.7	1.1	120.0	3.0	0.0	Vert	AV	0.0	30.7	54.0	-23.3	EUT Horz, High Ch 2480MHz
12208.980	38.5	-8.0	1.5	79.0	3.0	0.0	Horz	AV	0.0	30.5	54.0	-23.5	EUT Vert, Mid Ch 2442MHz
12398.960	38.1	-7.7	1.9	123.0	3.0	0.0	Vert	AV	0.0	30.4	54.0	-23.6	EUT on Side, High Ch 2480MHz
4961.633	38.2	10.8	1.5	69.0	3.0	0.0	Horz	PK	0.0	49.0	74.0	-25.0	EUT Vert, High Ch 2480MHz
4884.008	38.4	10.6	1.5	208.0	3.0	0.0	Horz	PK	0.0	49.0	74.0	-25.0	EUT Vert, Mid Ch 2442MHz
4959.967	37.8	10.8	1.5	101.0	3.0	0.0	Vert	PK	0.0	48.6	74.0	-25.4	EUT Vert, High Ch 2480MHz
4885.992	37.9	10.6	1.5	209.0	3.0	0.0	Vert	PK	0.0	48.5	74.0	-25.5	EUT Vert, Mid Ch 2442MHz
4806.125	36.6	10.4	1.5	45.0	3.0	0.0	Horz	PK	0.0	47.0	74.0	-27.0	EUT Vert, Low Ch 2402MHz
4803.017	36.4	10.4	1.1	258.0	3.0	0.0	Vert	PK	0.0	46.8	74.0	-27.2	EUT Vert, Low Ch 2402MHz
12398.910	34.3	-7.7	1.5	228.0	3.0	0.0	Horz	AV	0.0	26.6	54.0	-27.4	EUT Horz, High Ch 2480MHz
19215.900	50.1	-5.6	1.5	8.0	3.0	0.0	Vert	PK	0.0	44.5	74.0	-29.5	EUT Vert, Low Ch 2402MHz
19215.970	49.8	-5.6	1.5	274.0	3.0	0.0	Horz	PK	0.0	44.2	74.0	-29.8	EUT Vert, Low Ch 2402MHz
12398.750	49.8	-7.7	2.3	256.0	3.0	0.0	Vert	PK	0.0	42.1	74.0	-31.9	EUT Vert, High Ch 2480MHz
12009.080	50.2	-8.3	2.1	93.0	3.0	0.0	Vert	PK	0.0	41.9	74.0	-32.1	EUT Vert, Low Ch 2402MHz
12399.080	49.1	-7.7	1.5	190.0	3.0	0.0	Horz	PK	0.0	41.4	74.0	-32.6	EUT Horz, High Ch 2480MHz
12398.830	48.9	-7.7	2.3	242.0	3.0	0.0	Horz	PK	0.0	41.2	74.0	-32.8	EUT Vert, High Ch 2480MHz
12398.750	48.8	-7.7	1.9	123.0	3.0	0.0	Vert	PK	0.0	41.1	74.0	-32.9	EUT on Side, High Ch 2480MHz
12398.940	48.4	-7.7	2.7	163.0	3.0	0.0	Horz	PK	0.0	40.7	74.0	-33.3	EUT on Side, High Ch 2480MHz
12211.620	48.4	-8.0	1.5	79.0	3.0	0.0	Horz	PK	0.0	40.4	74.0	-33.6	EUT Vert, Mid Ch 2442MHz
12008.890	48.6	-8.3	1.5	72.0	3.0	0.0	Horz	PK	0.0	40.3	74.0	-33.7	EUT Vert, Low Ch 2402MHz
12398.840	47.6	-7.7	1.8	268.0	3.0	0.0	Vert	PK	0.0	39.9	74.0	-34.1	EUT Horz, High Ch 2480MHz
12208.990	47.9	-8.0	2.9	61.0	3.0	0.0	Vert	PK	0.0	39.9	74.0	-34.1	EUT Vert, Mid Ch 2442MHz

SPURIOUS RADIATED EMISSIONS




PSA-ESCI 2016.04.26.1
EmiR5 2016.04.26.1

Work Order:	AWAR0021	Date:	07/27/16	
Project:	None	Temperature:	22 °C	
Job Site:	OC10	Humidity:	44.7% RH	
Serial Number:	E358720	Barometric Pres.:	1015 mbar	
Tested by:				Mike Tran
EUT:	BLET			
Configuration:	3			
Customer:	Awarepoint Corporation			
Attendees:	None			
EUT Power:	USB Powered			
Operating Mode:	Transmitting BLE at Low Channel 0(2402MHz) and High Channel 39(2480MHz)			
Deviations:	None			
Comments:	None			

Test Specifications	Test Method
FCC 15.247:2016	ANSI C63.10:2013

Run #	24	Test Distance (m)	3	Antenna Height(s)	1 to 4(m)	Results	Pass
-------	----	-------------------	---	-------------------	-----------	---------	------

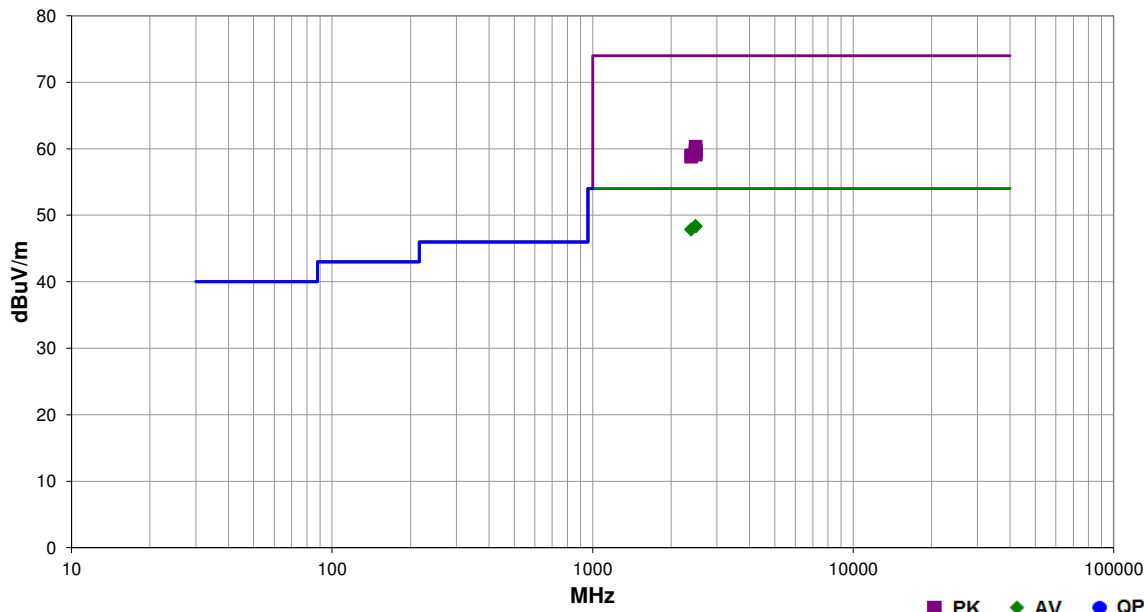

Freq (MHz)	Amplitude (dBuV)	Factor (dB)	Antenna Height (meters)	Azimuth (degrees)	Test Distance (meters)	External Attenuation (dB)	Polarity/Transducer Type	Detector	Distance Adjustment (dB)	Adjusted (dBuV/m)	Spec. Limit (dBuV/m)	Compared to Spec. (dB)	Comments
2483.583	26.6	1.8	1.5	107.0	3.0	20.0	Horz	AV	0.0	48.4	54.0	-5.6	EUT Horz, High Ch 2480MHz
2484.000	26.6	1.8	1.5	101.0	3.0	20.0	Vert	AV	0.0	48.4	54.0	-5.6	EUT Horz, High Ch 2480MHz
2483.563	26.5	1.8	1.5	0.0	3.0	20.0	Horz	AV	0.0	48.3	54.0	-5.7	EUT Vert, High Ch 2480MHz
2484.167	26.5	1.8	1.5	321.0	3.0	20.0	Vert	AV	0.0	48.3	54.0	-5.7	EUT Vert, High Ch 2480MHz
2485.033	26.5	1.8	1.5	31.0	3.0	20.0	Horz	AV	0.0	48.3	54.0	-5.7	EUT on Side, High Ch 2480MHz
2485.353	26.5	1.8	1.5	287.0	3.0	20.0	Vert	AV	0.0	48.3	54.0	-5.7	EUT on Side, High Ch 2480MHz
2388.003	26.6	1.3	1.5	306.0	3.0	20.0	Horz	AV	0.0	47.9	54.0	-6.1	EUT Horz, Low Ch 2402MHz
2389.197	26.5	1.3	1.5	3.0	3.0	20.0	Vert	AV	0.0	47.8	54.0	-6.2	EUT Horz, Low Ch 2402MHz
2484.767	38.5	1.8	1.5	321.0	3.0	20.0	Vert	PK	0.0	60.3	74.0	-13.7	EUT Vert, High Ch 2480MHz
2483.787	38.0	1.8	1.5	31.0	3.0	20.0	Horz	PK	0.0	59.8	74.0	-14.2	EUT on Side, High Ch 2480MHz
2485.290	37.9	1.8	1.5	101.0	3.0	20.0	Vert	PK	0.0	59.7	74.0	-14.3	EUT Horz, High Ch 2480MHz
2484.410	37.7	1.8	1.5	0.0	3.0	20.0	Horz	PK	0.0	59.5	74.0	-14.5	EUT Vert, High Ch 2480MHz
2484.390	37.4	1.8	1.5	107.0	3.0	20.0	Horz	PK	0.0	59.2	74.0	-14.8	EUT Horz, High Ch 2480MHz
2483.627	37.3	1.8	1.5	287.0	3.0	20.0	Vert	PK	0.0	59.1	74.0	-14.9	EUT on Side, High Ch 2480MHz
2388.483	37.7	1.3	1.5	3.0	3.0	20.0	Vert	PK	0.0	59.0	74.0	-15.0	EUT Horz, Low Ch 2402MHz
2389.783	37.5	1.3	1.5	306.0	3.0	20.0	Horz	PK	0.0	58.8	74.0	-15.2	EUT Horz, Low Ch 2402MHz

DUTY CYCLE

TEST DESCRIPTION

The Duty Cycle (x) were measured for each of the EUT operating modes. The measurements were made using a zero span on the spectrum analyzer to see the pulses in the time domain. The transmit power was set to its default maximum.

The duty cycle was calculated by dividing the transmission pulse duration (T) by the total period of a single on and total off time.

The EUT operates at 100% Duty Cycle.

OCCUPIED BANDWIDTH

Testing was performed using the mode(s) of operation and configuration(s) noted within the report. The individuals and/or the organization requesting the test provided the modes, configurations and settings used to complete the evaluation. The actual test parameters are specified in the test data, this includes items such as investigated frequency range (scanned) and test levels. The testing methods and performance specifications, as well as the test site used for the evaluation are indicated in the test data.

TEST EQUIPMENT


Description	Manufacturer	Model	ID	Last Cal.	Cal. Due
Analyzer - Spectrum Analyzer	Agilent	E4440A	AFA	11/19/2015	11/19/2016
Generator - Signal	Keysight	N5182B	TFX	4/16/2015	4/16/2018
Cable	Fairview Microwave	SCA1814-0101-120	OCZ	NCR	NCR
Attenuator	Fairview Microwave	SA18E-20	TKS	4/4/2016	4/4/2017
Block - DC	Aeroflex	INMET 8535	AMO	4/4/2016	4/4/2017

TEST DESCRIPTION

The measurement was made using a direct connection between the RF output of the EUT and a spectrum analyzer. The EUT was set to the channels and modes listed in the datasheet.


The 6dB occupied bandwidth was measured using 100 kHz resolution bandwidth and 300 kHz video bandwidth. The 99.0% occupied bandwidth was also measured at the same time which can be needed during Output Power depending on the applicable method.

OCCUPIED BANDWIDTH


EUT: BLET		Work Order: AWAR0021	
Serial Number: E358720		Date: 08/09/16	
Customer: Awarepoint Corporation		Temperature: 23.8 °C	
Attendees: None		Humidity: 46.7% RH	
Project: None		Barometric Pres.: 1013 mbar	
Tested by: Mike Tran		Power: USB Powered	
		Job Site: OC13	
TEST SPECIFICATIONS		Test Method	
FCC 15.247:2016		ANSI C63.10:2013	
COMMENTS			
Total reference level offset: DC Block + 20dB attenuator + RF Cable + Patch Cable = 22.75 dB. Power setting = -9.			
DEVIATIONS FROM TEST STANDARD			
None			
Configuration #	3	Signature 	
		Value	Limit (±) Result
BLE/GFSK Low Channel, 2402 MHz		729.576 kHz	500 kHz Pass
BLE/GFSK Mid Channel, 2442 MHz		711.723 kHz	500 kHz Pass
BLE/GFSK High Channel, 2480 MHz		745.192 kHz	500 kHz Pass

OCCUPIED BANDWIDTH

BLE/GFSK Low Channel, 2402 MHz						
				Value	Limit (≥)	Result
				729.576 kHz	500 kHz	Pass

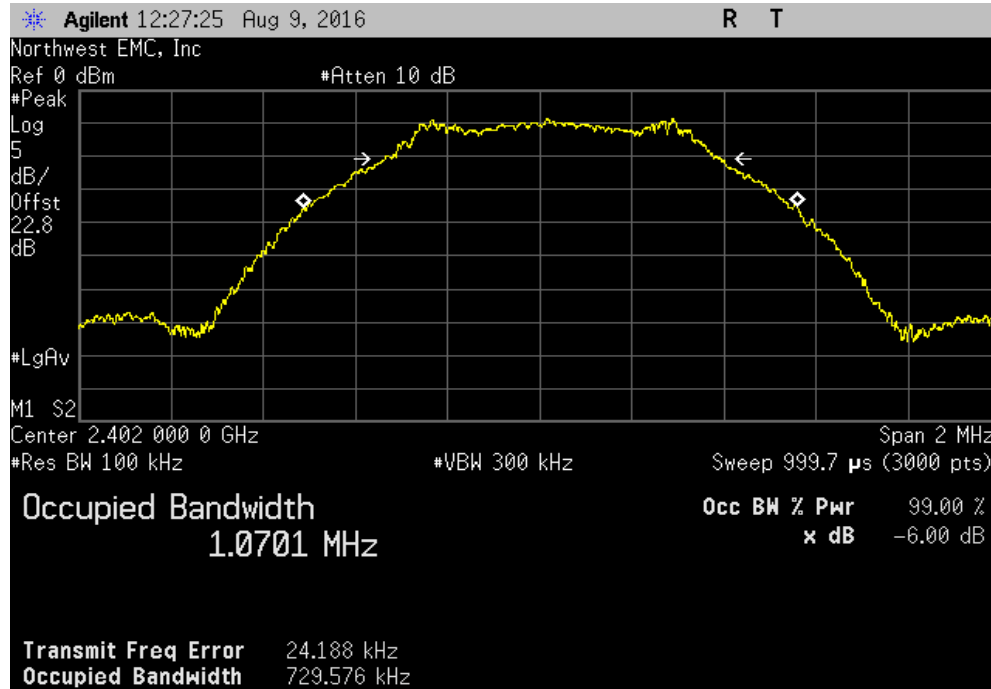


BLE/GFSK Mid Channel, 2442 MHz						
				Value	Limit (≥)	Result
				711.723 kHz	500 kHz	Pass

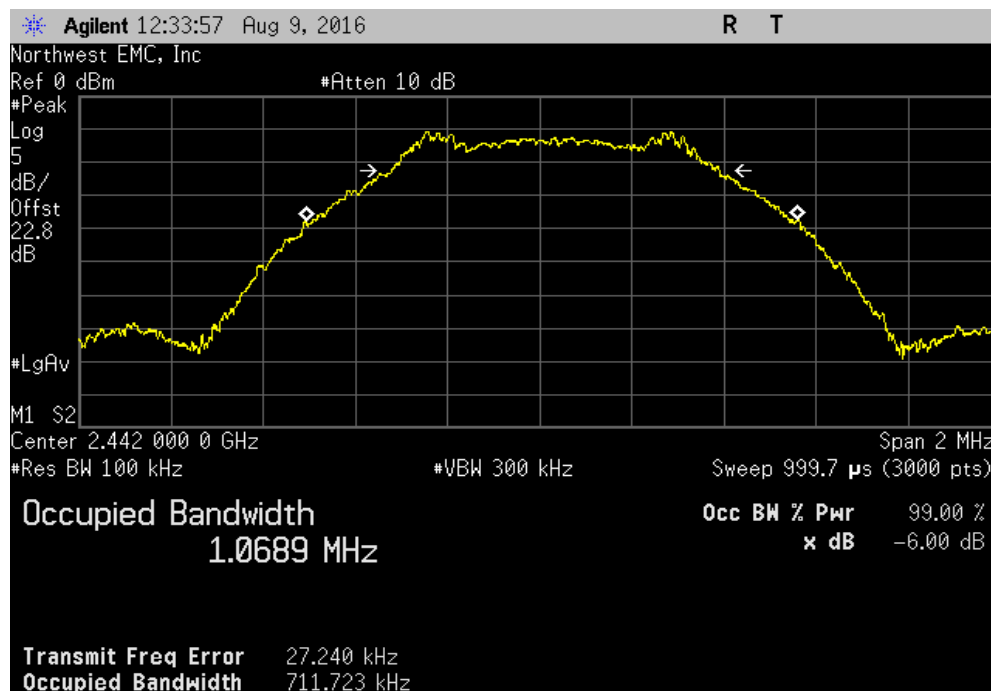

OCCUPIED BANDWIDTH

BLE/GFSK High Channel, 2480 MHz						
Value				Limit (≥)	Result	
745.192 kHz				500 kHz	Pass	

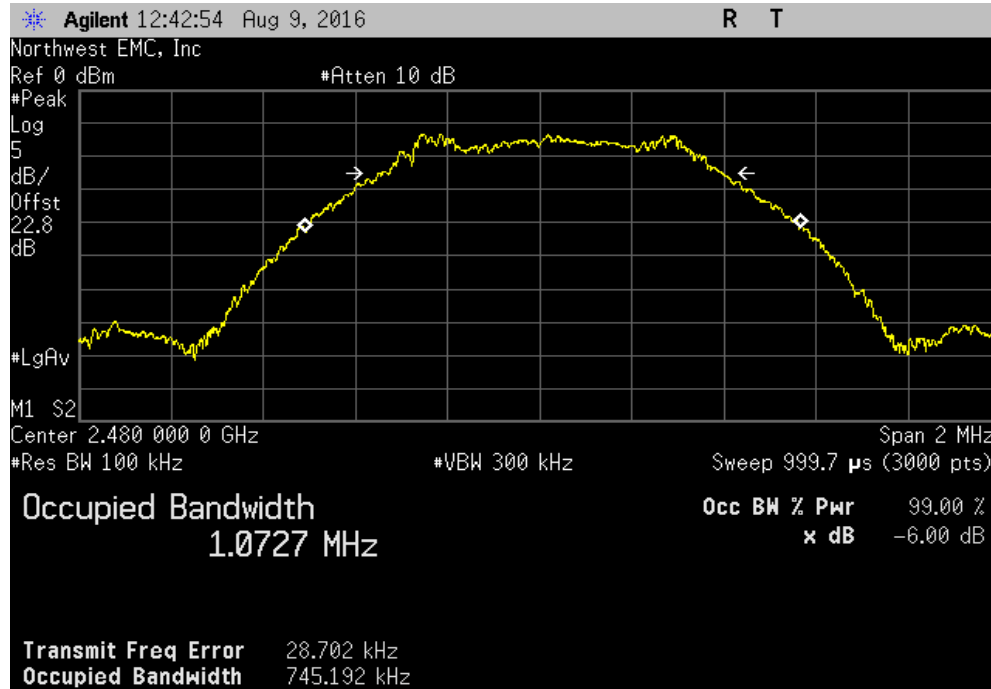

OUTPUT POWER

Testing was performed using the mode(s) of operation and configuration(s) noted within the report. The individuals and/or the organization requesting the test provided the modes, configurations and settings used to complete the evaluation. The actual test parameters are specified in the test data, this includes items such as investigated frequency range (scanned) and test levels. The testing methods and performance specifications, as well as the test site used for the evaluation are indicated in the test data.

TEST EQUIPMENT

Description	Manufacturer	Model	ID	Last Cal.	Cal. Due
Analyzer - Spectrum Analyzer	Agilent	E4440A	AFA	11/19/2015	11/19/2016
Generator - Signal	Keysight	N5182B	TFX	4/16/2015	4/16/2018
Cable	Fairview Microwave	SCA1814-0101-120	OCZ	NCR	NCR
Attenuator	Fairview Microwave	SA18E-20	TKS	4/4/2016	4/4/2017
Block - DC	Aeroflex	INMET 8535	AMO	4/4/2016	4/4/2017

TEST DESCRIPTION


The measurement was made using a direct connection between the RF output of the EUT and a spectrum analyzer. The transmit frequency was set to the required channels in each band. The transmit power was set to its default maximum.

Prior to measuring peak transmit power the DTS bandwidth (B) and the transmission pulse duration (T) were measured. Both are required to determine the method of measuring Maximum Conducted Output Power. The transmission pulse duration (T) was measured using a zero span on the spectrum analyzer to see the pulses in the time domain.

The method found in ANSI C63.10:2013 Section 11.9.1.1 was used because the RBW on the analyzer was greater than the DTS Bandwidth of the radio..


De Facto EIRP Limit: The EUT meets the de facto EIRP limit of +36 dBm.

OUTPUT POWER


EUT: BLET		Work Order: AWAR0021	
Serial Number: E358720		Date: 08/09/16	
Customer: Awarepoint Corporation		Temperature: 23.8 °C	
Attendees: None		Humidity: 46.7% RH	
Project: None		Barometric Pres.: 1013 mbar	
Tested by: Mike Tran		Power: USB Powered	
		Job Site: OC13	
TEST SPECIFICATIONS		Test Method	
FCC 15.247:2016		ANSI C63.10:2013	
COMMENTS			
Total reference level offset: DC Block + 20dB attenuator + RF Cable + Patch Cable = 22.75 dB. Power setting = -9.			
DEVIATIONS FROM TEST STANDARD			
None			
Configuration #	3	Signature 	
		Value	Limit (<)
BLE/GFSK Low Channel, 2402 MHz		441.876 uW	1 W
BLE/GFSK Mid Channel, 2442 MHz		322.849 uW	1 W
BLE/GFSK High Channel, 2480 MHz		250.957 uW	1 W
			Result
			Pass
			Pass
			Pass

OUTPUT POWER

BLE/GFSK Low Channel, 2402 MHz						
				Value	Limit (<)	Result
				441.876 uW	1 W	Pass

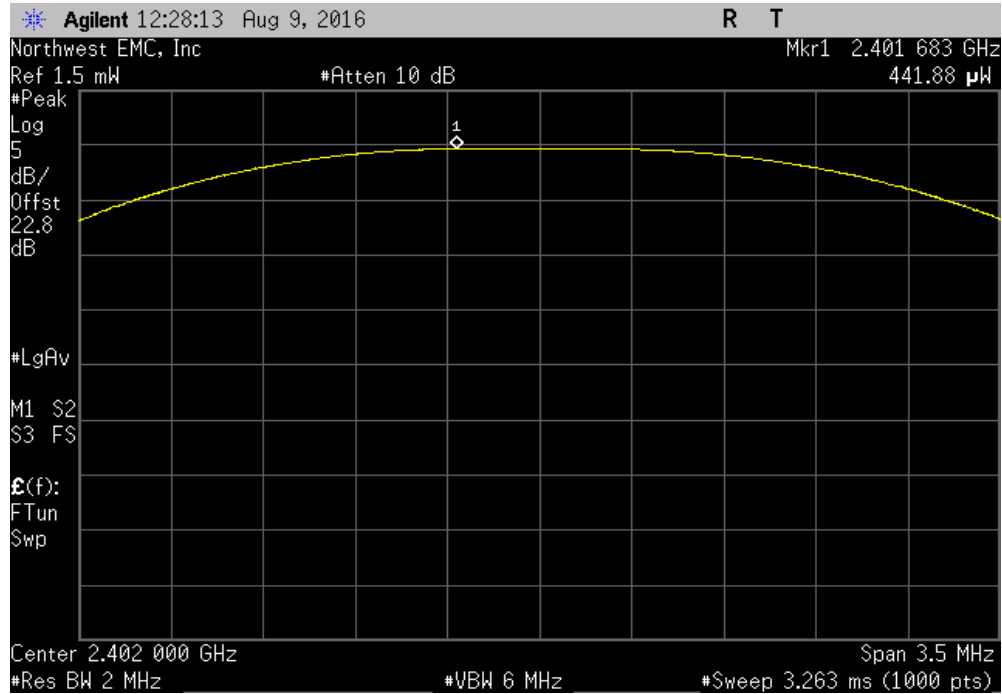


BLE/GFSK Mid Channel, 2442 MHz						
				Value	Limit (<)	Result
				322.849 uW	1 W	Pass

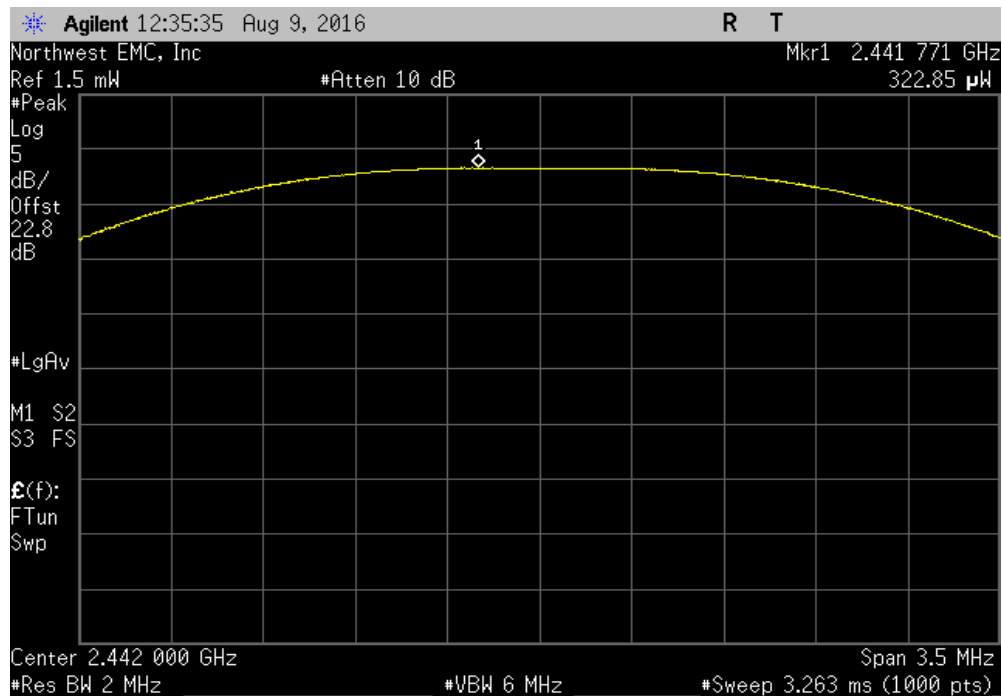

OUTPUT POWER

BLE/GFSK High Channel, 2480 MHz						
				Value	Limit (<)	Result
				250.957 uW	1 W	Pass

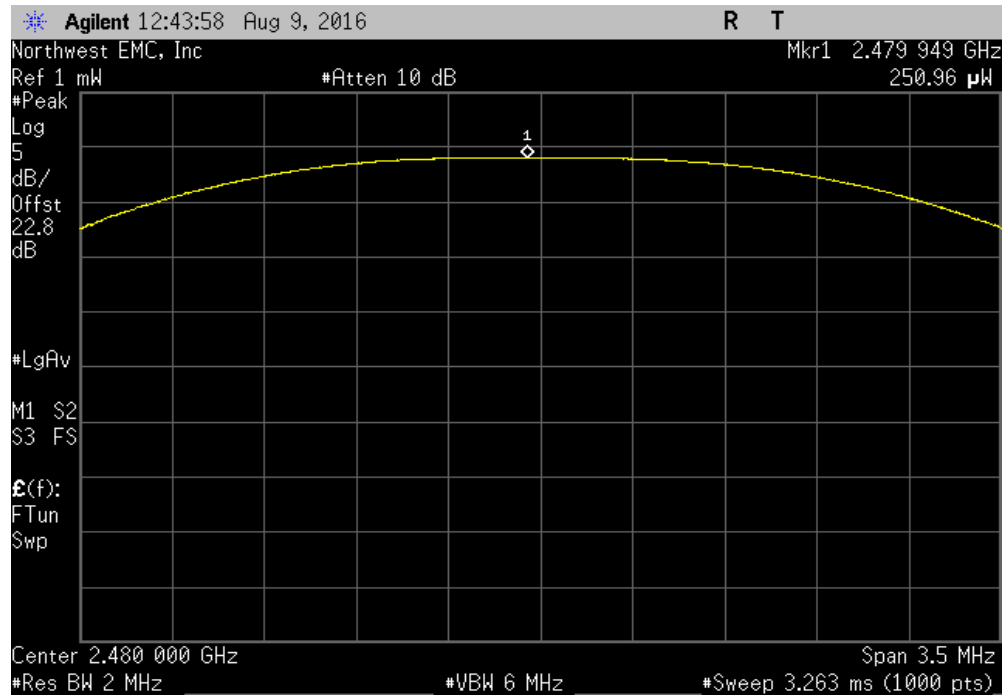

POWER SPECTRAL DENSITY

Testing was performed using the mode(s) of operation and configuration(s) noted within the report. The individuals and/or the organization requesting the test provided the modes, configurations and settings used to complete the evaluation. The actual test parameters are specified in the test data, this includes items such as investigated frequency range (scanned) and test levels. The testing methods and performance specifications, as well as the test site used for the evaluation are indicated in the test data.

TEST EQUIPMENT


Description	Manufacturer	Model	ID	Last Cal.	Cal. Due
Analyzer - Spectrum Analyzer	Agilent	E4440A	AFA	11/19/2015	11/19/2016
Generator - Signal	Keysight	N5182B	TFX	4/16/2015	4/16/2018
Cable	Fairview Microwave	SCA1814-0101-120	OCZ	NCR	NCR
Attenuator	Fairview Microwave	SA18E-20	TKS	4/4/2016	4/4/2017
Block - DC	Aeroflex	INMET 8535	AMO	4/4/2016	4/4/2017

TEST DESCRIPTION

The measurement was made using a direct connection between the RF output of the EUT and a spectrum analyzer. The maximum power spectral density measurements was measured using the channels and modes as called out on the following data sheets.


Per the procedure outlined in ANSI C63.10 the peak power spectral density was measured in a 3 kHz RBW.

POWER SPECTRAL DENSITY


EUT: BLET		Work Order: AWAR0021	
Serial Number: E358720		Date: 08/09/16	
Customer: Awarepoint Corporation		Temperature: 23.8 °C	
Attendees: None		Humidity: 46.7% RH	
Project: None		Barometric Pres.: 1013 mbar	
Tested by: Mike Tran		Power: USB Powered	
		Job Site: OC13	
TEST SPECIFICATIONS		Test Method	
FCC 15.247:2016		ANSI C63.10:2013	
COMMENTS			
Total reference level offset: DC Block + 20dB attenuator + RF Cable + Patch Cable = 22.75 dB. Power setting = -9.			
DEVIATIONS FROM TEST STANDARD			
None			
Configuration #	3	Signature 	
		Value dBm/3kHz	Limit < dBm/3kHz
BLE/GFSK Low Channel, 2402 MHz		-16.001	8
BLE/GFSK Mid Channel, 2442 MHz		-13.819	8
BLE/GFSK High Channel, 2480 MHz		-16.001	8
			Results
			Pass
			Pass
			Pass

POWER SPECTRAL DENSITY

BLE/GFSK Low Channel, 2402 MHz						
				Value dBm/3kHz	Limit < dBm/3kHz	Results
				-16.001	8	Pass

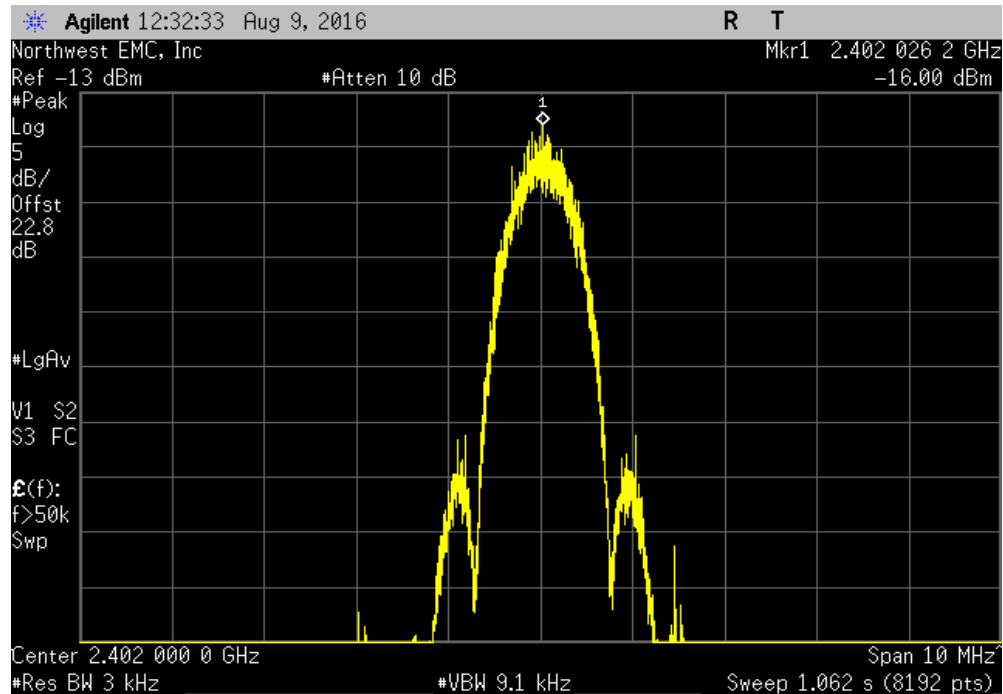


BLE/GFSK Mid Channel, 2442 MHz						
				Value dBm/3kHz	Limit < dBm/3kHz	Results
				-13.819	8	Pass

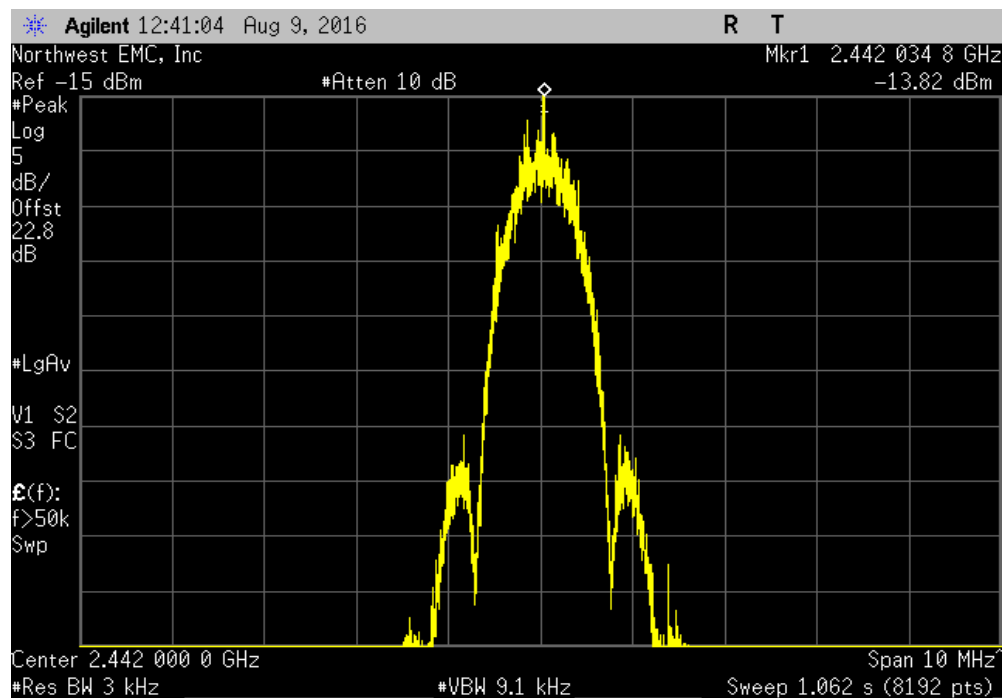

POWER SPECTRAL DENSITY

BLE/GFSK High Channel, 2480 MHz						
				Value dBm/3kHz	Limit < dBm/3kHz	Results
				-16.001	8	Pass

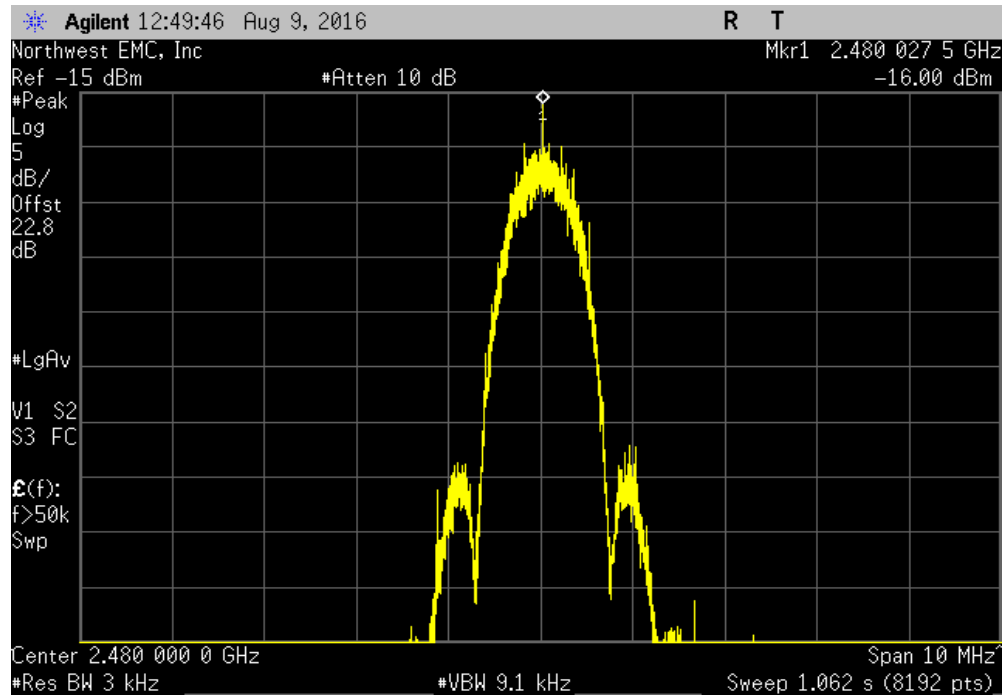

BAND EDGE COMPLIANCE

Testing was performed using the mode(s) of operation and configuration(s) noted within the report. The individuals and/or the organization requesting the test provided the modes, configurations and settings used to complete the evaluation. The actual test parameters are specified in the test data, this includes items such as investigated frequency range (scanned) and test levels. The testing methods and performance specifications, as well as the test site used for the evaluation are indicated in the test data.

TEST EQUIPMENT


Description	Manufacturer	Model	ID	Last Cal.	Cal. Due
Analyzer - Spectrum Analyzer	Agilent	E4440A	AFA	11/19/2015	11/19/2016
Generator - Signal	Keysight	N5182B	TFX	4/16/2015	4/16/2018
Cable	Fairview Microwave	SCA1814-0101-120	OCZ	NCR	NCR
Attenuator	Fairview Microwave	SA18E-20	TKS	4/4/2016	4/4/2017
Block - DC	Aeroflex	INMET 8535	AMO	4/4/2016	4/4/2017

TEST DESCRIPTION

The measurement was made using a direct connection between the RF output of the EUT and a spectrum analyzer. The spurious RF conducted emissions at the edges of the authorized bands were measured with the EUT set to low and high transmit frequencies in each available band. The channels closest to the band edges were selected. The EUT was transmitting at the data rate(s) listed in the datasheet.


The spectrum was scanned below the lower band edge and above the higher band edge.

BAND EDGE COMPLIANCE


EUT: BLET		Work Order: AWAR0021	
Serial Number: E358720		Date: 08/09/16	
Customer: Awarepoint Corporation		Temperature: 23.8 °C	
Attendees: None		Humidity: 46.7% RH	
Project: None		Barometric Pres.: 1013 mbar	
Tested by: Mike Tran		Power: USB Powered	
		Job Site: OC13	
TEST SPECIFICATIONS		Test Method	
FCC 15.247:2016		ANSI C63.10:2013	
COMMENTS			
Total reference level offset: DC Block + 20dB attenuator + RF Cable + Patch Cable = 22.75 dB. Power setting = -9.			
DEVIATIONS FROM TEST STANDARD			
None			
Configuration #	3	Signature 	
		Value (dBc)	Limit ≤ (dBc) Result
BLE/GFSK Low Channel, 2402 MHz		-49	-20 Pass
BLE/GFSK High Channel, 2480 MHz		-52.78	-20 Pass

BAND EDGE COMPLIANCE

BLE/GFSK Low Channel, 2402 MHz						
				Value (dBc)	Limit ≤ (dBc)	Result
				-49	-20	Pass

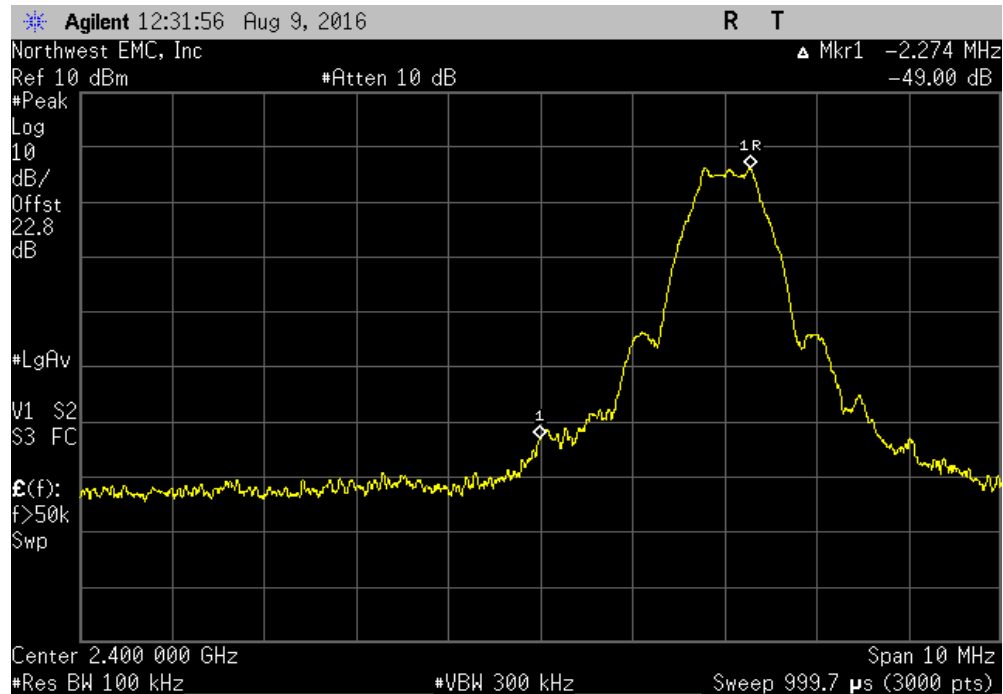

BLE/GFSK High Channel, 2480 MHz						
				Value (dBc)	Limit ≤ (dBc)	Result
				-52.78	-20	Pass

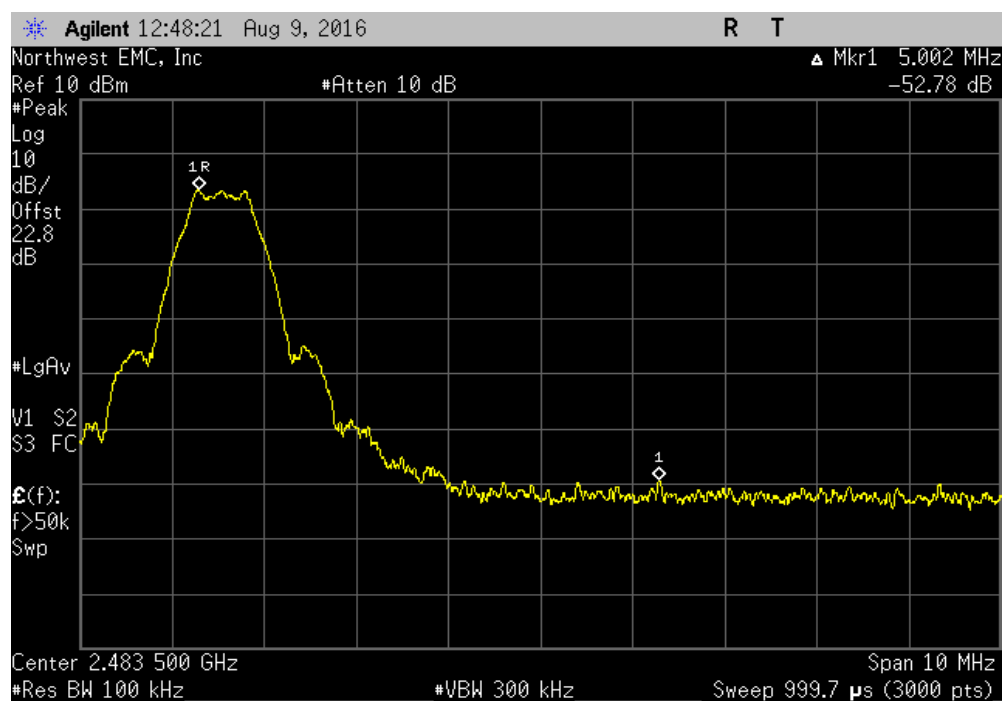

SPURIOUS CONDUCTED EMISSIONS

Testing was performed using the mode(s) of operation and configuration(s) noted within the report. The individuals and/or the organization requesting the test provided the modes, configurations and settings used to complete the evaluation. The actual test parameters are specified in the test data, this includes items such as investigated frequency range (scanned) and test levels. The testing methods and performance specifications, as well as the test site used for the evaluation are indicated in the test data.


TEST EQUIPMENT

Description	Manufacturer	Model	ID	Last Cal.	Cal. Due
Analyzer - Spectrum Analyzer	Agilent	E4440A	AFA	11/19/2015	11/19/2016
Generator - Signal	Keysight	N5182B	TFX	4/16/2015	4/16/2018
Cable	Fairview Microwave	SCA1814-0101-120	OCZ	NCR	NCR
Attenuator	Fairview Microwave	SA18E-20	TKS	4/4/2016	4/4/2017
Block - DC	Aeroflex	INMET 8535	AMO	4/4/2016	4/4/2017

TEST DESCRIPTION


The measurement was made using a direct connection between the RF output of the EUT and a spectrum analyzer. The spurious RF conducted emissions were measured with the EUT set to low, medium and high transmit frequencies. The EUT was transmitting at the data rate(s) listed in the datasheet. For each transmit frequency, the spectrum was scanned throughout the specified frequency range.

SPURIOUS CONDUCTED EMISSIONS


EUT: BLET		Work Order: AWAR0021	
Serial Number: E358720		Date: 08/09/16	
Customer: Awarepoint Corporation		Temperature: 23.8 °C	
Attendees: None		Humidity: 46.7% RH	
Project: None		Barometric Pres.: 1013 mbar	
Tested by: Mike Tran		Power: USB Powered	
		Job Site: OC13	
TEST SPECIFICATIONS		Test Method	
FCC 15.247:2016		ANSI C63.10:2013	
COMMENTS			
Total reference level offset: DC Block + 20dB attenuator + RF Cable + Patch Cable = 22.75 dB. Power setting = -9.			
DEVIATIONS FROM TEST STANDARD			
None			
Configuration #	3	Signature 	
	Frequency Range	Max Value (dBc)	Limit ≤ (dBc) Result
BLE/GFSK Low Channel, 2402 MHz	Fundamental	N/A	N/A N/A
BLE/GFSK Low Channel, 2402 MHz	30 MHz - 12.5 GHz	-52.49	-20 Pass
BLE/GFSK Low Channel, 2402 MHz	12.5 GHz - 25 GHz	-48.33	-20 Pass
BLE/GFSK Mid Channel, 2442 MHz	Fundamental	N/A	N/A N/A
BLE/GFSK Mid Channel, 2442 MHz	30 MHz - 12.5 GHz	-50.41	-20 Pass
BLE/GFSK Mid Channel, 2442 MHz	12.5 GHz - 25 GHz	-47.28	-20 Pass
BLE/GFSK High Channel, 2480 MHz	Fundamental	N/A	N/A N/A
BLE/GFSK High Channel, 2480 MHz	30 MHz - 12.5 GHz	-47.73	-20 Pass
BLE/GFSK High Channel, 2480 MHz	12.5 GHz - 25 GHz	-46.29	-20 Pass

SPURIOUS CONDUCTED EMISSIONS

BLE/GFSK Low Channel, 2402 MHz					
Frequency Range		Max Value (dBc)	Limit ≤ (dBc)	Result	
Fundamental		N/A	N/A	N/A	

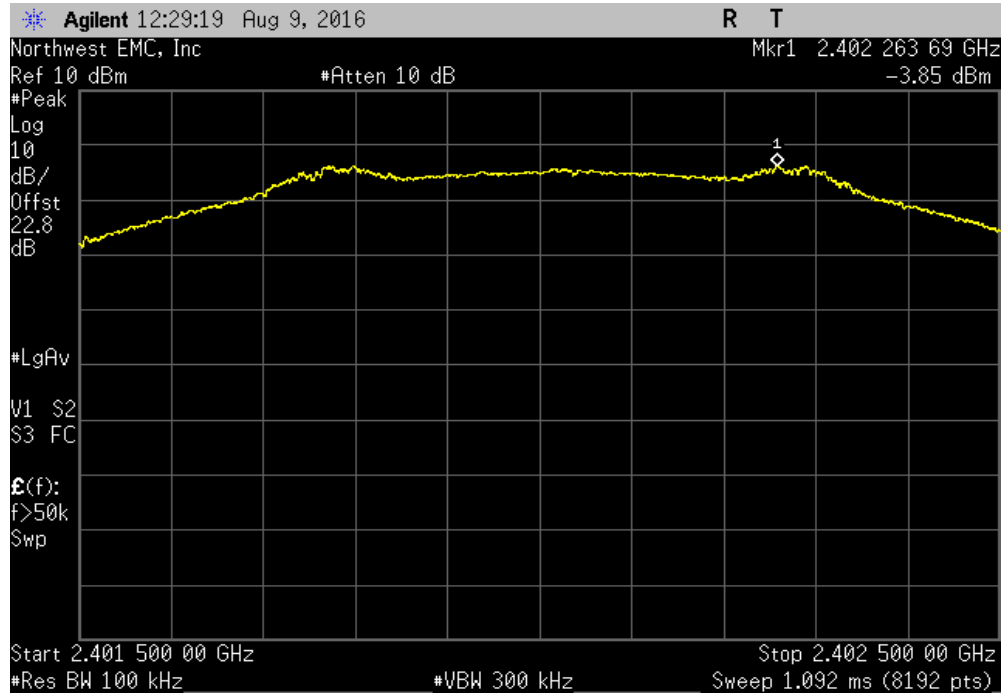


BLE/GFSK Low Channel, 2402 MHz					
Frequency Range		Max Value (dBc)	Limit ≤ (dBc)	Result	
30 MHz - 12.5 GHz		-52.49	-20	Pass	

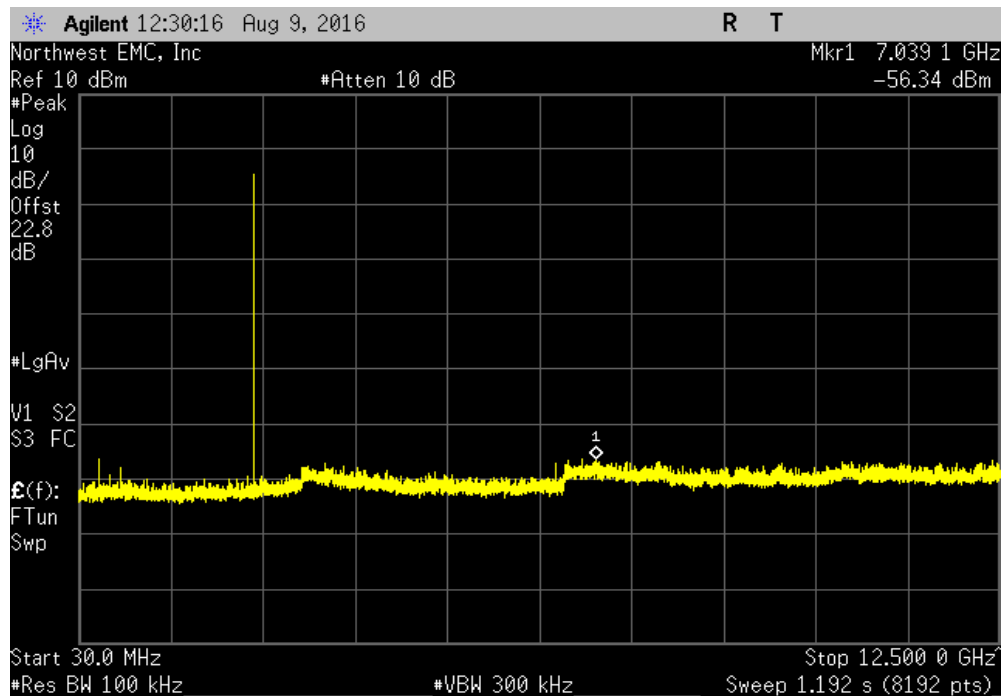


SPURIOUS CONDUCTED EMISSIONS

BLE/GFSK Low Channel, 2402 MHz				
Frequency Range	Max Value (dBc)	Limit ≤ (dBc)	Result	
12.5 GHz - 25 GHz	-48.33	-20	Pass	

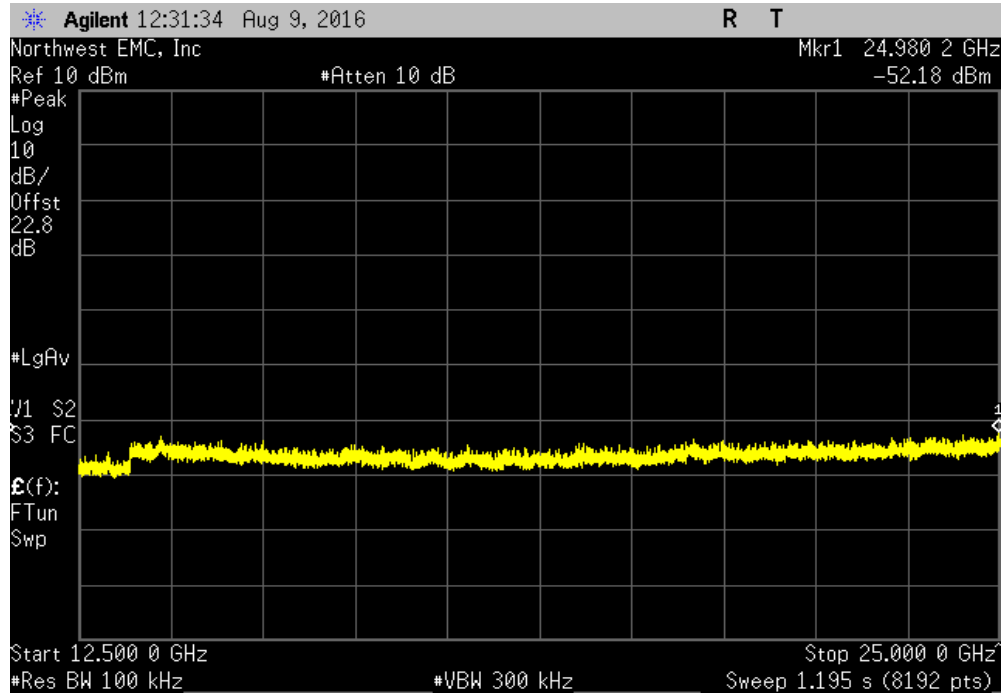


BLE/GFSK Mid Channel, 2442 MHz				
Frequency Range	Max Value (dBc)	Limit ≤ (dBc)	Result	
Fundamental	N/A	N/A	N/A	

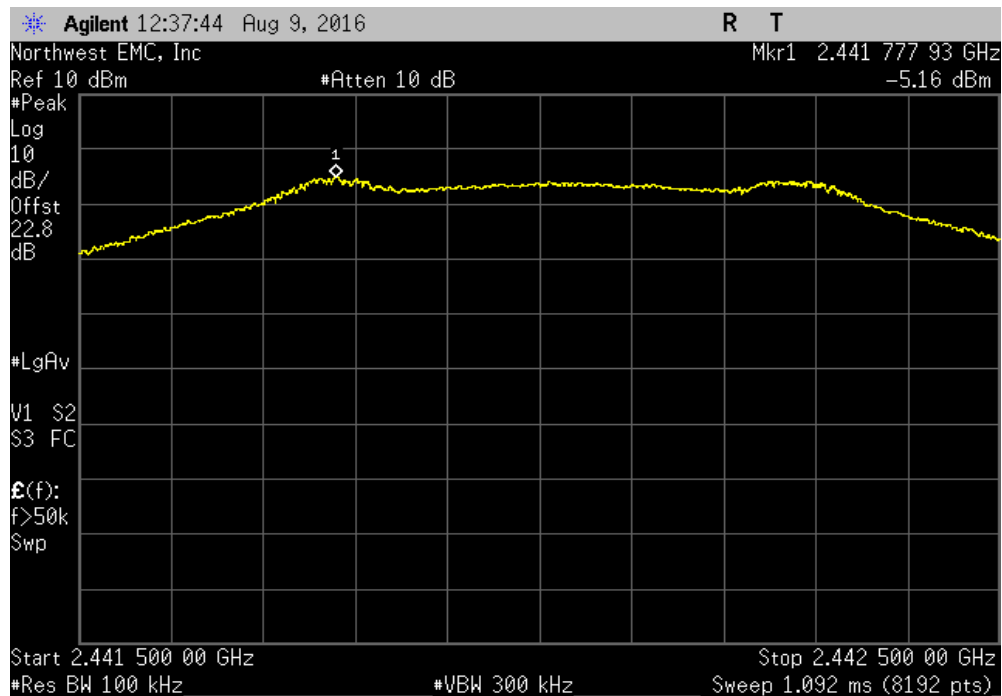


SPURIOUS CONDUCTED EMISSIONS

BLE/GFSK Mid Channel, 2442 MHz				
Frequency Range	Max Value (dBc)	Limit ≤ (dBc)	Result	
30 MHz - 12.5 GHz	-50.41	-20	Pass	

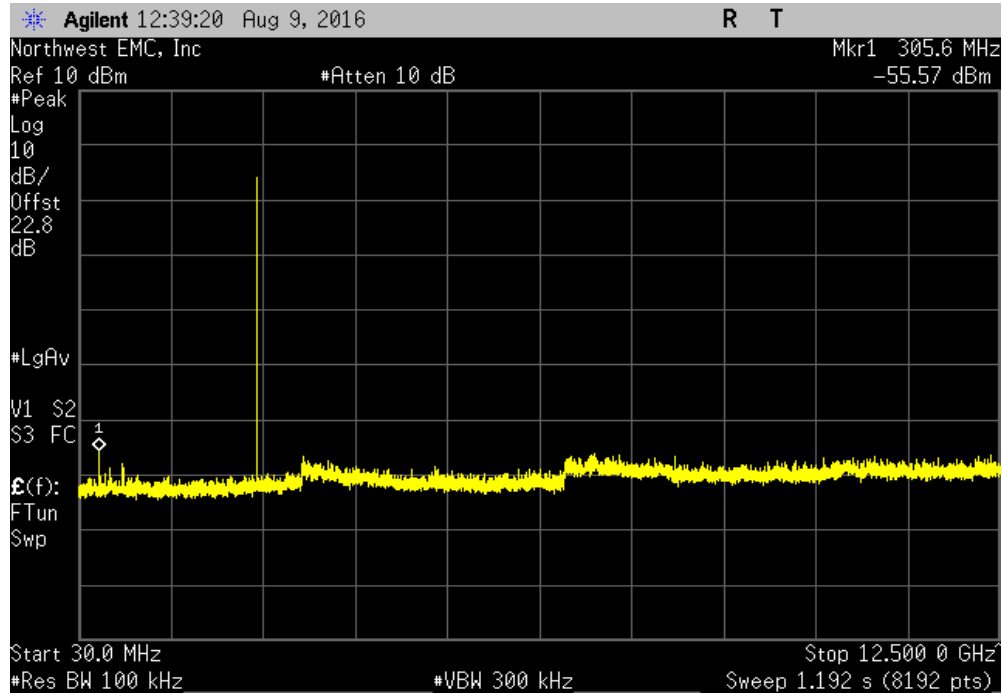


BLE/GFSK Mid Channel, 2442 MHz				
Frequency Range	Max Value (dBc)	Limit ≤ (dBc)	Result	
12.5 GHz - 25 GHz	-47.28	-20	Pass	

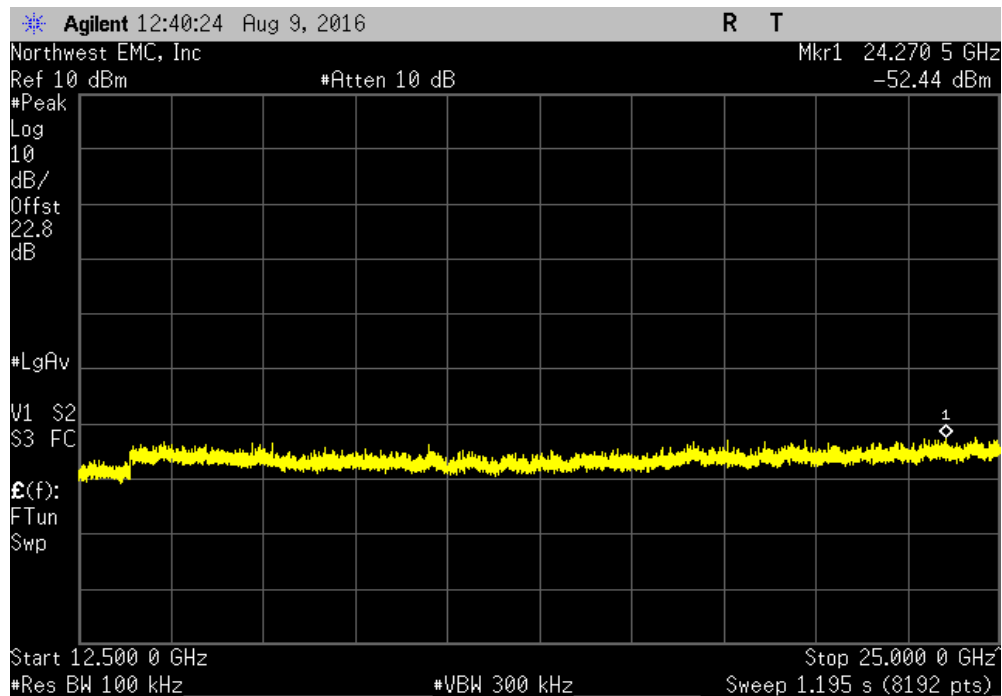


SPURIOUS CONDUCTED EMISSIONS

BLE/GFSK High Channel, 2480 MHz						
Frequency Range			Max Value (dBc)	Limit ≤ (dBc)	Result	
Fundamental			N/A	N/A	N/A	

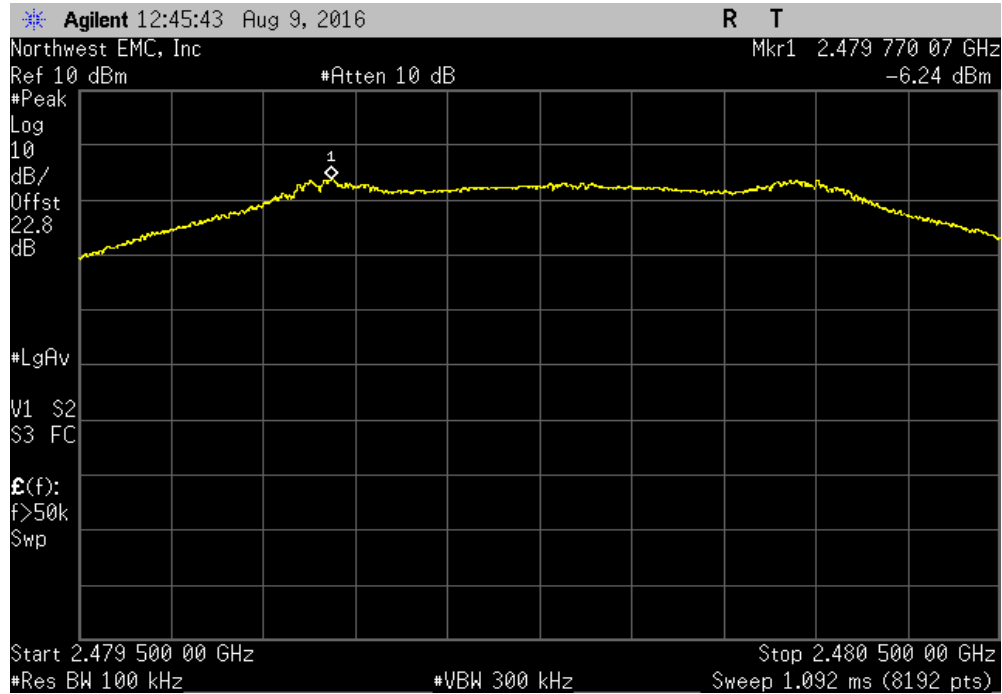

BLE/GFSK High Channel, 2480 MHz						
Frequency Range			Max Value (dBc)	Limit ≤ (dBc)	Result	
30 MHz - 12.5 GHz			-47.73	-20	Pass	

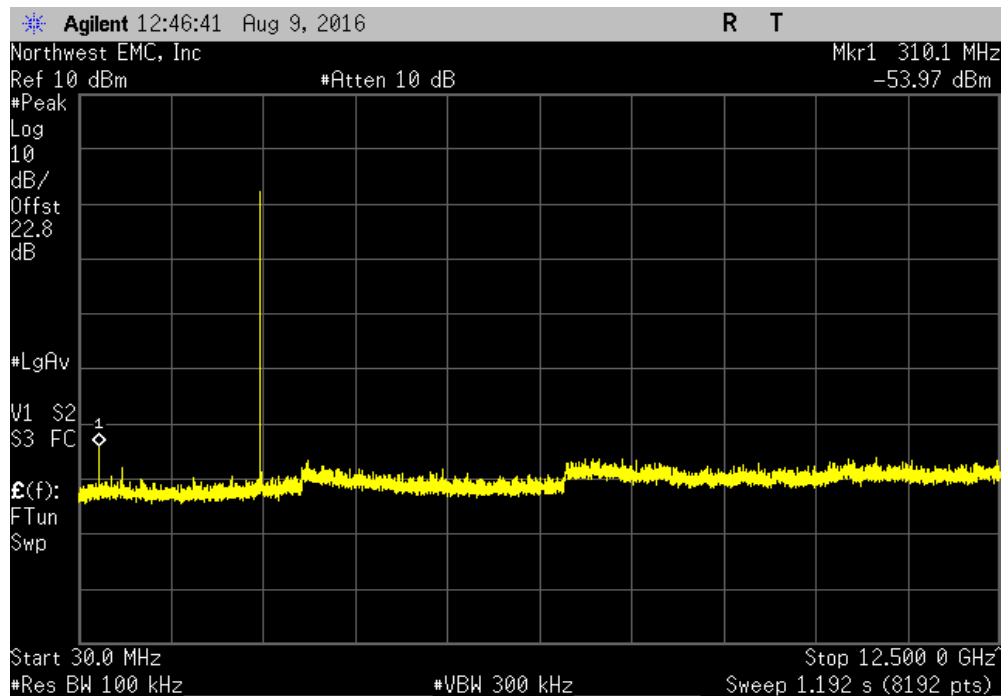

SPURIOUS CONDUCTED EMISSIONS

BLE/GFSK High Channel, 2480 MHz				
Frequency Range	Max Value (dBc)	Limit ≤ (dBc)	Result	
12.5 GHz - 25 GHz	-46.29	-20	Pass	

