

Awarepoint Corporation

T3E Tag Device

Report No. AWAR0013.2

Report Prepared By



www.nwemc.com
1-888-EMI-CERT

© 2011 Northwest EMC, Inc

RF Exposure



22975 NW Evergreen Parkway
Suite 400
Hillsboro, Oregon 97124

Certificate of Evaluation
Evaluation Date: December 13, 2011
Awarepoint Corporation
Model: T3E Tag Device

Emissions			
Test Description	Specification	Test Method	Pass/Fail
RF Exposure	FCC 15.247(i): 2011	OET Bulletin 65, Supplement C Ed 01-01	Pass

Modifications made to the product
See the Modifications section of this report

Approved By:

Don Facteau, IS Manager

This report must not be used to claim product certification, approval, or endorsement by NVLAP, NIST, or any agency of the federal government of the United States of America.

Product compliance is the responsibility of the client, therefore the tests and equipment modes of operation represented in this report were agreed upon by the client, prior to testing. This Report may only be duplicated in its entirety. The results of this test pertain only to the sample(s) tested. The specific description is noted in each of the individual sections of the test report supporting this certificate of test.

Revision Number	Description	Date	Page Number
00	None		



Accreditations and Authorizations

FCC

Accredited by NVLAP for performance of FCC radio, digital, and ISM device testing. Our Open Area Test Sites, certification chambers, and conducted measurement facilities have been fully described in reports filed with the FCC and accepted by the FCC in letters maintained in our files. Northwest EMC has been accredited by ANSI to ISO / IEC Guide 65 as a product certifier. We have been designated by the FCC as a Telecommunications Certification Body (TCB). This allows Northwest EMC to certify transmitters to FCC specifications in accordance with 47 CFR 2.960 and 2.962.

NVLAP

Northwest EMC, Inc. is accredited under the National Voluntary Laboratory Accreditation Program (NVLAP) for satisfactory compliance with the requirements of ISO/IEC 17025 for Testing Laboratories. NVLAP is administered by the National Institute of Standards and Technology (NIST), an agency of the U.S. Commerce Department. The NVLAP accreditation encompasses Electromagnetic Compatibility Testing in accordance with the European Union EMC Directive 2004/108/EC, and ANSI C63.4. Additionally, Northwest EMC is accredited by NVLAP to perform radio testing in accordance with the European Union R&TTE Directive 1999/5/EEC, the requirements of FCC, and the RSS radio standards for Industry Canada.

Industry Canada

Accredited by NVLAP for performance of Industry Canada RSS and ICES testing. Our Open Area Test Sites and certification chambers comply with RSS-Gen, Issue 2 and have been filed with Industry Canada and accepted. Northwest EMC has been accredited by ANSI to ISO / IEC Guide 65 as a product certifier. We have been designated by NIST and recognized by Industry Canada as a Certification Body (CB) per the APEC Mutual Recognition Arrangement (MRA). This allows Northwest EMC to certify transmitters to Industry Canada technical requirements. (*Site Filing Numbers - Hillsboro: 2834D-1, 2834D-2, Sultan: 2834C-1, Irvine: 2834B-1, 2834B-2, Brooklyn Park: 2834E-1*)

CAB

Designated by NIST and validated by the European Commission as a Conformity Assessment Body (CAB) to conduct tests and approve products to the EMC directive and transmitters to the R&TTE directive, as described in the U.S. - EU Mutual Recognition Agreement.

Australia/New Zealand

The National Association of Testing Authorities (NATA), Australia has been appointed by the ACA as an accreditation body to accredit test laboratories and competent bodies for EMC standards. Accredited test reports or assessments by competent bodies must carry the NATA logo. Test reports made by an overseas laboratory that has been accredited for the relevant standards by an overseas accreditation body that has a Mutual Recognition Agreement (MRA) with NATA are also accepted as technical grounds for product conformity. The report should be endorsed with the respective logo of the accreditation body (NVLAP).



Accreditations and Authorizations

VCCI

Accepted as an Associate Member to the VCCI, Acceptance No. 564. Conducted and radiated measurement facilities have been registered in accordance with Regulations for Voluntary Control Measures, Article 8. *(Registration Numbers. - Hillsboro: C-1071, R-1025, G-84, C-2687, T-1658, and R-2318, Irvine: R-1943, G-85, C-2766, and T-1659, Sultan: R-871, G-83, C-1784, and T-1511, Brooklyn Park: R-3125, G-86, G-141, C-3464, and T-1634).*

BSMI

Northwest EMC has been designated by NIST and validated by C-Taipei (BSMI) as a CAB to conduct tests as described in the APEC Mutual Recognition Agreement (US0017).

GOST

Northwest EMC, Inc. has been assessed and accredited by the Russian Certification bodies Certinform VNIINMASH, CERTINFO, SAMTES, and Federal CHEC, to perform EMC and Hygienic testing for Information Technology Products. As a result of their laboratory assessment, they will accept test results from Northwest EMC, Inc. for product certification

KCC

Northwest EMC, Inc is a CAB designated by MRA partners and recognized by Korea. *(Assigned Lab Numbers: Hillsboro: US0017, Irvine: US0158, Sultan: US0157, Brooklyn Park: US0175)*

VIETNAM

Vietnam MIC has approved Northwest EMC as an accredited test lab. Per Decision No. 194/QD-QLCL (dated December 15, 2009), Northwest EMC test reports can be used for Vietnam approval submissions.

SCOPE

For details on the Scopes of our Accreditations, please visit:

<http://www.nwemc.com/accreditations/>



Northwest EMC Locations





Oregon
Labs EV01-EV12
22975 NW Evergreen Pkwy
Suite 400
Hillsboro, OR 97124
(503) 844-4066

California
Labs OC01-OC13
41 Tesla
Irvine, CA 92618
(949) 861-8918

Minnesota
Labs MN01-MN08
9349 W Broadway Ave.
Brooklyn Park,
MN 55445
(763) 425-2281

Washington
Labs SU01-SU07
14128 339th Ave. SE
Sultan, WA 98294
(360) 793-8675

New York
Labs WA01-WA04
4939 Jordan Rd.
Elbridge, NY 13060
(315) 685-0796

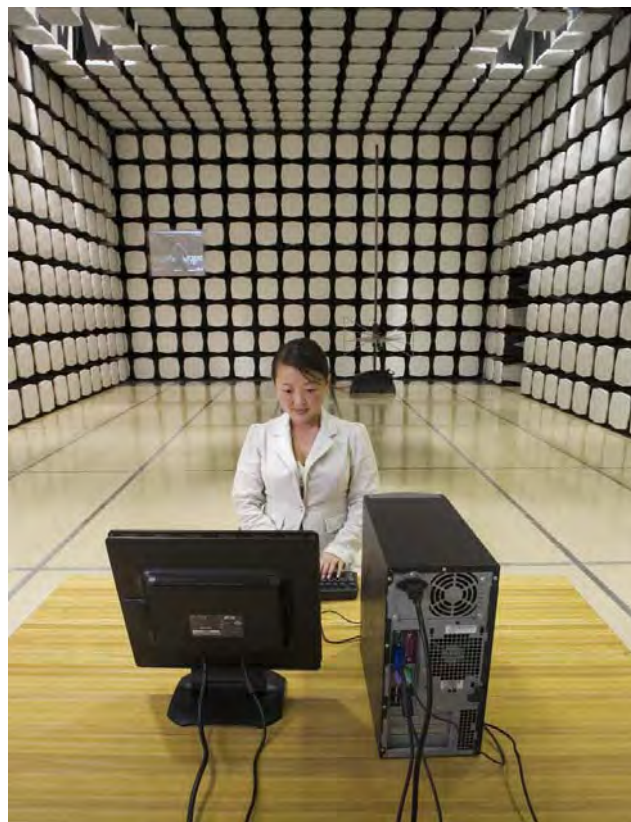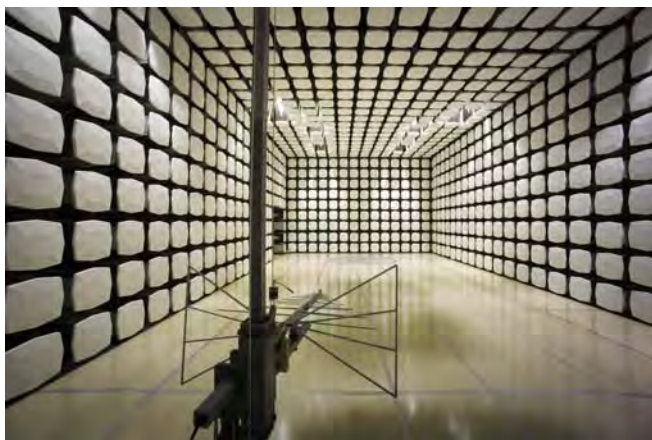

Party Requesting the Test

Company Name:	Awarepoint Corporation
Address:	600 W. Broadway Suite 250
City, State, Zip:	San Diego, CA 92101 USA
Test Requested By:	John Taylor
Model:	T3E Tag Device
Date of Evaluation:	December 13, 2011

Information Provided by the Party Requesting the Test**Functional Description of the EUT (Equipment Under Test):**

Tag device that contains a 2.4 GHz DTS radio and a 125 kHz inductive radio.

Evaluation Objective:

To demonstrate compliance with FCC requirements for RF exposure.

OVERVIEW

The FCC defines portable devices, for purposes of these requirements, as transmitters whose radiating structures are designed to be used within 20 centimeters of the body of the user. Portable devices are to be evaluated with respect to limits for specific absorption rate (SAR). Calculations can be made to predict RF field strength and power density levels around typical RF sources. For example, in the case of a single radiating antenna, a prediction for power density in the far-field of the antenna can be made by use of the general Equation:

$$S = \frac{PG}{4\pi R^2}$$

where: S = power density (in appropriate units, e.g. mW/cm²)
 P = power input to the antenna (in appropriate units, e.g., mW)
 G = power gain of the antenna in the direction of interest relative to an isotropic radiator
 R = distance to the center of radiation of the antenna (appropriate units, e.g., cm)

This equation is generally accurate in the far-field of an antenna but will over-predict power density in the near field, where it could be used for making a "worst case" or conservative prediction (see following page for power density estimate at 20cm.)

COMPLIANCE WITH 47 CFR 15.247(i)

"Systems operating under the provisions of this section shall be operated in a manner that ensures that the public is not exposed to radio frequency energy levels in excess of the Commission's guidelines. See § 1.1307(b)(1) of this chapter."

The radio is compliant with FCC 15.247(i) based upon compliance with FCC KDB 447498 D01 Mobile Portable RF Exposure V04. See the following:

COMPLIANCE WITH FCC KDB 447498 D01 Mobile Portable RF Exposure V04

The radio is a portable transmitter and its antenna is used closer than 20cm to the user's torso.


"KDB 447498 D01 Mobile Portable RF Exposure v04" provides the procedures, requirements, and authorization policies for mobile and portable devices. Item #2a best fits the exposure condition described in this report. The maximum peak radiated power is 0.559 mW EIRP. The transmit frequency is 2405 to 2480 MHz, therefore the EUT does not require routine SAR evaluation because it falls below the low power threshold of 60/f(GHz)mW. Please see this excerpt from KDB 447498D01 Mobile Portable RF Exposure v04, item 2)(a)(i):

"a device may be used in portable exposure conditions with no restrictions on host platforms when either the source-based time-averaged output power is <=60/f(GHz)mW or all measured 1-g SAR are <0.4W/kg."

The radio is compliant with FCC RF Exposure requirements.

EMC

RF Exposure

EUT: T3E Tag Device		Work Order: AWAR0013
Serial Number: none		Date: 12/13/11
Customer: Awarepoint Corporation		Temperature: n/a
Attendees: None		Humidity: n/a
Project: None		Barometric Pres.: n/a
Evaluated by: Greg Kiemel	Power: n/a	Job Site: EV06
SPECIFICATIONS		Method
15.247(i): 2011		OET Bulletin 65, Supplement C Ed 01-01
COMMENTS		
None		
DEVIATIONS FROM TEST STANDARD		
No Deviations		
		Signature 

Antenna Type	Antenna Manufacturer	Antenna Part No.	Transmit Frequency (MHz)	Max Peak Radiated Output Power (mW) EIRP	Power Density @ 20 cm (mW/cm ²)	General Population Exposure Limit from 1.1310 (mW/cm ²)
Chip	Antenova	A5645	2400	0.559	0.00011	1