

FCC/ISED

RF

TEST REPORT


ISSUED BY
Shenzhen BALUN Technology Co., Ltd.



FOR
RFID Reader

ISSUED TO
CONVERGENCE SYSTEMS LIMITED

11/F., Tower 1, Tern Centre, 237 Queen's Road, Central, Hong Kong

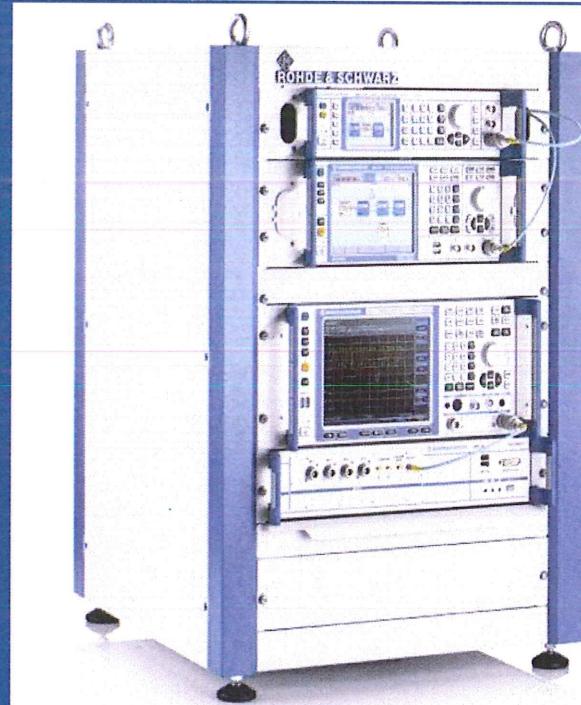

Report No.:	BL-SZ20A0402-601
EUT Name:	RFID Reader
Model Name:	CS203X-2
Brand Name:	Convergence Systems Limited
Test Standard:	47 CFR Part 15 Subpart C RSS-Gen (Issue 5, March 2019) RSS-247 (Issue 2, February 2017)
FCC ID:	UB4CS203XC1GEN2
ISED Number:	8073A-CS203X2CA
Test Conclusion:	Pass
Test Date:	Nov. 02, 2020 ~ Nov. 13, 2020
Date of Issue:	Dec. 03, 2020

NOTE: This test report of test results only related to testing samples, which can be duplicated completely for the legal use with the approval of the applicant; it shall not be reproduced except in full, without the written approval of Shenzhen BALUN Technology Co., Ltd. Any objections should be raised within thirty days from the date of issue. To validate the report, please contact us.

Block B, 1st FL, Baisha Science and Technology Park, Shahe Xi Road, Nanshan District, Shenzhen, Guangdong, P. R. China 518055
TEL: +86-755-66850100, FAX: +86-755-61824271

Email: qc@baluntek.com
www.baluntek.com

Revision History

Version	Issue Date	Revisions Content
Rev. 01	Dec. 03, 2020	Initial Issue

TABLE OF CONTENTS

1	ADMINISTRATIVE DATA (GENERAL INFORMATION)	5
1.1	Identification of the Testing Laboratory	5
1.2	Identification of the Responsible Testing Location	5
1.3	Laboratory Condition	5
1.4	Announce	6
2	PRODUCT INFORMATION.....	7
2.1	Applicant Information.....	7
2.2	Manufacturer Information	7
2.3	Factory Information	7
2.4	General Description for Equipment under Test (EUT)	7
2.5	Technical Information	8
2.6	Additional Instructions	10
3	SUMMARY OF TEST RESULTS.....	11
3.1	Test Standards	11
3.2	Verdict	12
4	GENERAL TEST CONFIGURATIONS.....	13
4.1	Test Environments	13
4.2	Test Equipment List.....	13
4.3	Measurement Uncertainty	14
4.4	Description of Test Setup	14
4.4.1	For Antenna Port Test	14
4.4.2	For AC Power Supply Port Test	15
4.4.3	For Radiated Test (Below 30 MHz)	15
4.4.4	For Radiated Test (30 MHz-1 GHz)	16
4.4.5	For Radiated Test (Above 1 GHz)	16
4.5	Measurement Results Explanation Example.....	17
4.5.1	For conducted test items:	17

5 TEST ITEMS.....	18
5.1 Antenna Requirements.....	18
5.1.1 Relevant Standards.....	18
5.1.2 Antenna Anti-Replacement Construction	18
5.1.3 Antenna Gain	18
5.2 Number of Hopping Frequencies	19
5.2.1 Limit.....	19
5.2.2 Test Procedure.....	19
5.2.3 Test Result	19
5.3 Peak Output Power and E.I.R.P.....	20
5.3.1 Test Limit.....	20
5.3.2 Test Setup	20
5.3.3 Test Procedure.....	20
5.3.4 Test Result	20
5.4 Occupied Bandwidth	21
5.4.1 Limit.....	21
5.4.2 Test Setup	21
5.4.3 Test Procedure.....	21
5.4.4 Test Result	21
5.5 Carrier Frequency Separation.....	22
5.5.1 Limit.....	22
5.5.2 Test Setup	22
5.5.3 Test Procedure.....	22
5.5.4 Test Result	22
5.6 Time of Occupancy (Dwell time)	23
5.6.1 Limit.....	23
5.6.2 Test Setup	23
5.6.3 Test Procedure.....	23
5.6.4 Test Result	23
5.7 Conducted Spurious Emission & Authorized-band band-edge	24
5.7.1 Limit.....	24
5.7.2 Test Setup	24

5.7.3	Test Procedure.....	24
5.7.4	Test Result	24
5.8	Conducted Emission	25
5.8.1	Limit.....	25
5.8.2	Test Setup	25
5.8.3	Test Procedure.....	25
5.8.4	Test Result	25
5.9	Radiated Spurious Emission	26
5.9.1	Limit.....	26
5.9.2	Test Setup	26
5.9.3	Test Procedure.....	26
5.9.4	Test Result	27
5.10	Band Edge (Restricted-band band-edge).....	28
5.10.1	Limit.....	28
5.10.2	Test Setup	28
5.10.3	Test Procedure.....	28
5.10.4	Test Result	28
ANNEX A	TEST RESULT	29
A.1	Number of Hopping Frequency	29
A.2	Peak Output Power and E.I.R.P	30
A.3	20 dB and 99% bandwidth	32
A.4	Hopping Frequency Separation.....	34
A.5	Average Time of Occupancy	35
A.6	Conducted Spurious Emissions & Authorized-band band-edge	36
A.7	Conducted Emissions.....	40
A.8	Radiated Spurious Emission	42
A.9	Band Edge (Restricted-band band-edge).....	62
ANNEX B	TEST SETUP PHOTOS	64
ANNEX C	EUT EXTERNAL PHOTOS	64
ANNEX D	EUT INTERNAL PHOTOS	64

1 ADMINISTRATIVE DATA (GENERAL INFORMATION)

1.1 Identification of the Testing Laboratory

Company Name	Shenzhen BALUN Technology Co., Ltd.
Address	Block B, 1st FL, Baisha Science and Technology Park, Shahe Xi Road, Nanshan District, Shenzhen, Guangdong Province, P. R. China
Phone Number	+86 755 6685 0100
Fax Number	+86 755 6182 4271

1.2 Identification of the Responsible Testing Location

Test Location	Shenzhen BALUN Technology Co., Ltd.
Address	Block B, 1st FL, Baisha Science and Technology Park, Shahe Xi Road, Nanshan District, Shenzhen, Guangdong Province, P. R. China
Accreditation Certificate	The laboratory has been listed by Industry Canada to perform electromagnetic emission measurements. The recognition numbers of test site are 11524A-1. The laboratory is a testing organization accredited by FCC as a accredited testing laboratory. The designation number is CN1196. The laboratory is a testing organization accredited by American Association for Laboratory Accreditation (A2LA) according to ISO/IEC 17025. The accreditation certificate is 4344.01. The laboratory is a testing organization accredited by China National Accreditation Service for Conformity Assessment (CNAS) according to ISO/IEC 17025. The accreditation certificate number is L6791.
Description	All measurement facilities used to collect the measurement data are located at Block B, FL 1, Baisha Science and Technology Park, Shahe Xi Road, Nanshan District, Shenzhen, Guangdong Province, P. R. China 518055

1.3 Laboratory Condition

Ambient Temperature	20°C to 25°C
Ambient Relative Humidity	45% to 55%
Ambient Pressure	100 kPa to 102 kPa

1.4 Announce

- (1) The test report reference to the report template version v2.2.
- (2) The test report is invalid if not marked with the signatures of the persons responsible for preparing and approving the test report.
- (3) The test report is invalid if there is any evidence and/or falsification.
- (4) The results documented in this report apply only to the tested sample, under the conditions and modes of operation as described herein.
- (5) This document may not be altered or revised in any way unless done so by BALUN and all revisions are duly noted in the revisions section.
- (6) Content of the test report, in part or in full, cannot be used for publicity and/or promotional purposes without prior written approval from the laboratory.
- (7) The laboratory is only responsible for the data released by the laboratory, except for the part provided by the applicant.

2 PRODUCT INFORMATION

2.1 Applicant Information

Applicant	CONVERGENCE SYSTEMS LIMITED
Address	11/F., Tower 1, Tern Centre, 237 Queen's Road, Central, Hong Kong

2.2 Manufacturer Information

Manufacturer	DongGuan DongHongXingYe Electronics Science and Technology Limited
Address	1 Jianxiang Street, Hanxishui, Chashan Town Dongguan, China

2.3 Factory Information

Factory	DongGuan DongHongXingYe Electronics Science and Technology Limited
Address	1 Jianxiang Street, Hanxishui, Chashan Town Dongguan, China

2.4 General Description for Equipment under Test (EUT)

EUT Type	RFID Reader
Model Name Under Test	CS203X-2
Series Model Name	N/A
Description of Model name differentiation	N/A
Serial Number	VCH2092ES0012
Hardware Version	V2.8
Software Version	4.14.78
Dimensions (Approx.)	N/A
Weight (Approx.)	N/A

2.5 Technical Information

Network and Wireless connectivity	RFID
-----------------------------------	------

The requirement for the following technical information of the EUT was tested in this report:

Modulation Technology	Digital
Modulation Type	ASK
Product Type	<input type="checkbox"/> Mobile <input type="checkbox"/> Portable <input checked="" type="checkbox"/> Fix Location
Frequency Range	The frequency range used is 902 MHz to 928 MHz.
Number of channel	50
Tested Channel	0 (902.75 MHz), 26 (915.25 MHz), 50 (927.25 MHz)
Antenna Type	Patch Antenna
Antenna Gain	5 dBi (In test items related to antenna gain, the final results reflect this figure. This value is provided by the applicant.)
Antenna System(MIMO Smart Antenna)	N/A

All channel was listed on the following table:

Channel number	Freq. (MHz)	Channel number	Freq. (MHz)
1	902.75	26	915.25
2	903.25	27	915.75
3	903.75	28	916.25
4	904.25	29	916.75
5	904.75	30	917.25
6	905.25	31	917.75
7	905.75	32	918.25
8	906.25	33	918.75
9	906.75	34	919.25
10	907.25	35	919.75
11	907.75	36	920.25
12	908.25	37	920.75
13	908.75	38	921.25
14	909.25	39	921.75
15	909.75	40	922.25
16	910.25	41	922.75
17	910.75	42	923.25
18	911.25	43	923.75
19	911.75	44	924.25
20	912.25	45	924.75
21	912.75	46	925.25
22	913.25	47	925.75
23	913.75	48	926.25
24	914.25	49	926.75
25	914.75	50	927.25

2.6 Additional Instructions


EUT Software Settings:

Mode	<input checked="" type="checkbox"/> Special software is used. The software provided by client to enable the EUT under transmission condition continuously at specific channel frequencies individually.
------	--

During testing, Channel and Power Controlling Software provided by the customer was used to control the operating channel as well as the output power level. The RF output power selection is for the setting of RF output power expected by the customer and is going to be fixed on the firmware of the final end product.

Power level setup in software			
Test Software Version	CSL		
Support Units (Software installation media)	Description	Manufacturer	Model
	Notebook	DELL	N/A
Mode	Channel		Soft Set
RFID	ALL		29

Run Software

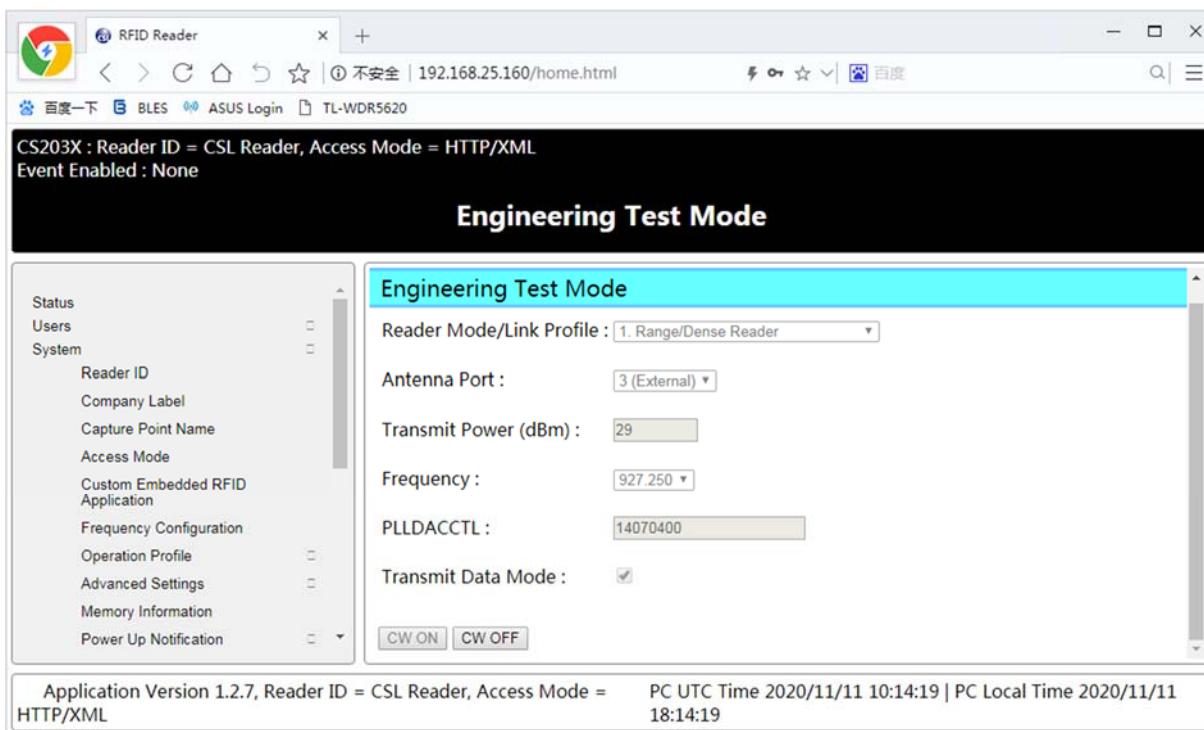

3 SUMMARY OF TEST RESULTS

3.1 Test Standards

No.	Identity	Document Title
1	47 CFR Part 15, Subpart C	Miscellaneous Wireless Communications Services
2	RSS-Gen (Issue 5, Mar. 2019)	General Requirements for Compliance of Radio Apparatus
3	RSS-247 (Issue 2, February 2017)	Digital Transmission Systems (DTSs), Frequency Hopping Systems(FHSs) and Licence-Exempt Local Area Network (LE-LAN) Devices
4	FCC PUBLIC NOTICE DA 00-705 (Mar. 30, 2000)	Filling and Measurement Guidelines for Frequency Hopping Spread Spectrum Systems
5	ANSI C63.10-2013	American National Standard for Testing Unlicensed Wireless Devices
6	KDB Publication 558074 D01v05r02	GUIDANCE FOR COMPLIANCE MEASUREMENTS ON DIGITAL TRANSMISSION SYSTEM, FREQUENCY HOPPING SPREAD SPECTRUM SYSTEM, AND HYBRID SYSTEM DEVICES OPERATING UNDER SECTION 15.247 OF THE FCC RULES

3.2 Verdict

No.	Description	FCC Part No.	ISED Part No.	Modulation Technology	Channel	Test Result	Verdict
1	Antenna Requirement	15.203	RSS-247, 5.4 (f)	N/A	N/A	--	Pass ^{Note1}
2	Number of Hopping Frequencies	15.247(a)	RSS-GEN, 6.7; RSS-247, 5.2 (a)	Frequency hopping system	Hopping Mode	ANNEX A.1	Pass
3	Peak Output Power	15.247(b)	RSS-247, 5.4 (d)	Frequency hopping system, Hybrid system	Low/Middle /High	ANNEX A.2	Pass
4	Occupied Bandwidth	15.247(a)	RSS-GEN, 6.7; RSS-247, 5.2 (a)	Frequency hopping system, Hybrid system	Low/Middle /High	ANNEX A.3	Pass
5	Carrier Frequency Separation	15.247(a)	RSS-GEN, 6.7; RSS-247, 5.2 (a)	Frequency hopping system, Hybrid system	Hopping Mode	ANNEX A.4	Pass
6	Time of Occupancy (Dwell time)	15.247(a)	RSS-GEN, 6.7; RSS-247, 5.2 (a)	Frequency hopping system, Hybrid system	Hopping Mode	ANNEX A.5	Pass
7	Conducted Spurious Emission & Authorized-band band-edge	15.247(d)	RSS-247, 5.5;	Frequency hopping system, Hybrid system	Low/Middle /High, Hopping Mode	ANNEX A.6	Pass
8	Conducted Emission	15.207	RSS-GEN, 8.8	Frequency hopping system, Hybrid system	Low/Middle /High	ANNEX A.7	Pass
9	Radiated Spurious Emission	15.209 15.247(d)	RSS-247, 5.5	Frequency hopping system, Hybrid system	Low/Middle/ High, Hopping Mode	ANNEX A.8	Pass
10	Band Edge(Restricted-band band-edge)	15.209 15.247(d)	RSS-247, 5.5	Frequency hopping system, Hybrid system	Low/Middle /High, Hopping Mode	ANNEX A.9	Pass

Note ¹: Please refer to section 5.1

4 GENERAL TEST CONFIGURATIONS

4.1 Test Environments

During the measurement, the normal environmental conditions were within the listed ranges:

Relative Humidity	45% to 55%				
Atmospheric Pressure	100 kPa to 102 kPa				
Temperature	NT (Normal Temperature)				+22°C to +25°C
Working Voltage of the EUT	NV (Normal Voltage)				12 V

4.2 Test Equipment List

Description	Manufacturer	Model	Serial No.	Cal. Date	Cal. Due
Spectrum Analyzer	ROHDE&SCHWARZ	FSV-30	103118	2020.06.08	2021.06.07
Switch Unit with OSP-B157	ROHDE&SCHWARZ	OSP120	101270	2020.06.08	2021.06.07
EMI Receiver	KEYSIGHT	N9038A	MY53220118	2020.06.09	2021.06.08
EMI Receiver	ROHDE&SCHWARZ	ESRP	101036	2020.06.09	2021.06.08
LISN	SCHWARZBECK	NSLK 8127	8127-687	2020.06.09	2021.06.08
Bluetooth Tester	ROHDE&SCHWARZ	CBT	101005	2020.06.08	2021.06.07
DC Power Supply	ROHDE&SCHWARZ	HMP2020	018141664	2020.06.08	2021.06.07
Power Splitter	KMW	DCPD-LDC	1305003215	--	--
Power Sensor	ROHDE&SCHWARZ	NRP-Z21	103971	2020.06.08	2021.06.07
Attenuator (20 dB)	KMW	ZA-S1-201	110617091	--	--
Attenuator (6 dB)	KMW	ZA-S1-61	1305003189	--	--
Temperature Chamber	AHK	SP20	1412	2020.06.10	2021.06.09
Test Antenna-Loop(9 kHz-30 MHz)	SCHWARZBECK	FMZB 1519	1519-037	2019.10.29	2021.10.28
Test Antenna-Bi-Log(30 MHz-3 GHz)	SCHWARZBECK	VULB 9163	9163-624	2019.07.02	2021.07.01
Test Antenna-Horn(1-18 GHz)	SCHWARZBECK	BBHA 9120D	9120D-1917	2019.07.02	2021.07.01
Test Antenna-Horn (18-40 GHz)	A-INFO	LB-180400KF	J211060273	2019.01.06	2021.01.05
Anechoic Chamber	RAINFORD	9m*6m*6m	N/A	2017.02.21	2022.02.20
Anechoic Chamber	EMC Electronic Co., Ltd	20.10*11.60 *7.35m	N/A	2018.08.08	2021.08.07
Shielded Enclosure	ChangNing	CN-130701	130703	--	--
Signal Generator	ROHDE&SCHWARZ	SMB100A	177746	2020.06.08	2021.06.07
Power Amplifier	OPHIR RF	5225F	1037	2020.02.19	2021.02.18
Power Amplifier	OPHIR RF	5273F	1016	2020.02.19	2021.02.18
Directional Coupler	Werlantone	C5982-10	109275	N/A	N/A
Directional Coupler	Werlantone	CHP-273E	S00801z-01	N/A	N/A
Sound Level Meter	B&K	NL-20	00844023	2020.10.23	2021.10.22
Ear Simulator	B&K	4192-L-001	3038758	2020.02.19	2021.02.18
Audio analyzer	B&K	UPL 16	100129	2020.02.28	2021.02.27

4.3 Measurement Uncertainty

The following measurement uncertainty levels have been estimated for tests performed on the EUT as specified in CISPR 16-4-2.

This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.


Measurement	Value
Occupied Channel Bandwidth	$\pm 4\%$
RF output power, conducted	$\pm 1.4 \text{ dB}$
Power Spectral Density, conducted	$\pm 2.5 \text{ dB}$
Unwanted Emissions, conducted	$\pm 2.8 \text{ dB}$
All emissions, radiated	$\pm 5.4 \text{ dB}$
Temperature	$\pm 1^\circ\text{C}$
Humidity	$\pm 4\%$

4.4 Description of Test Setup

4.4.1 For Antenna Port Test


Conducted value (dBm) = Measurement value (dBm) + cable loss (dB)

For example: the measurement value is 10 dBm and the cable 0.5dBm used, then the final result of EUT:
Conducted value (dBm) = 10 dBm + 0.5 dB = 10.5 dBm

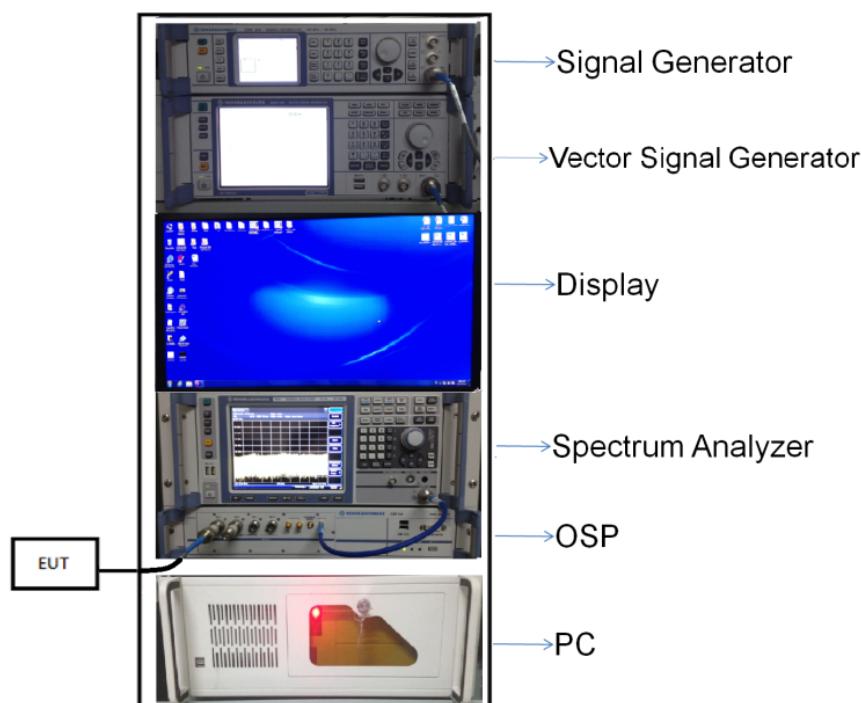


(Diagram 1)

4.4.2 For AC Power Supply Port Test

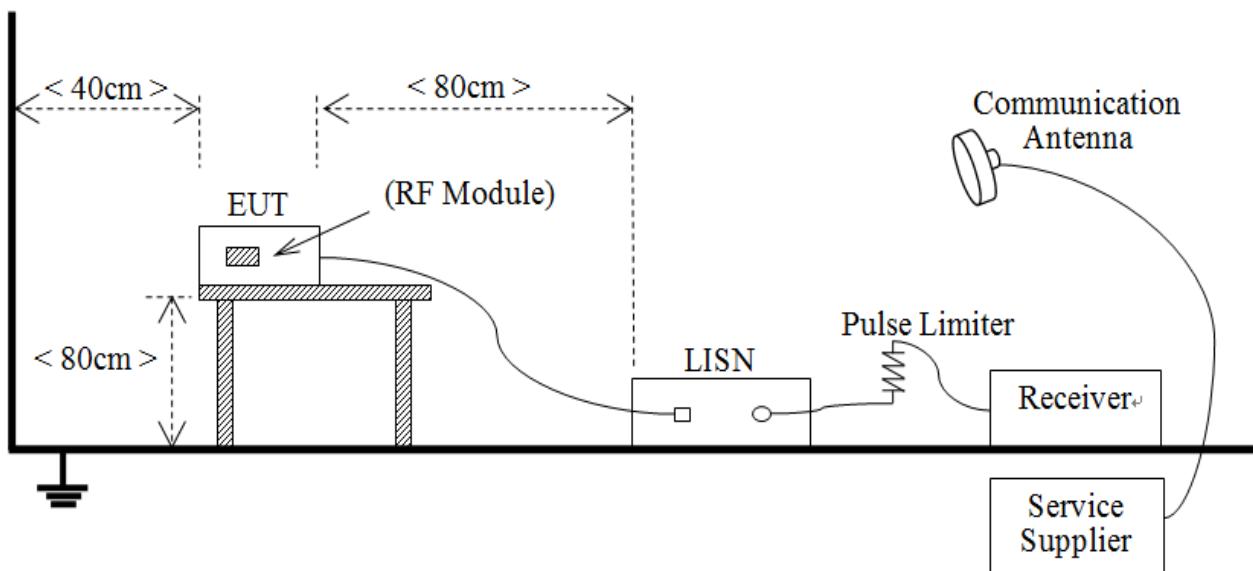


(Diagram 2)

4.4.3 For Radiated Test (Below 30 MHz)

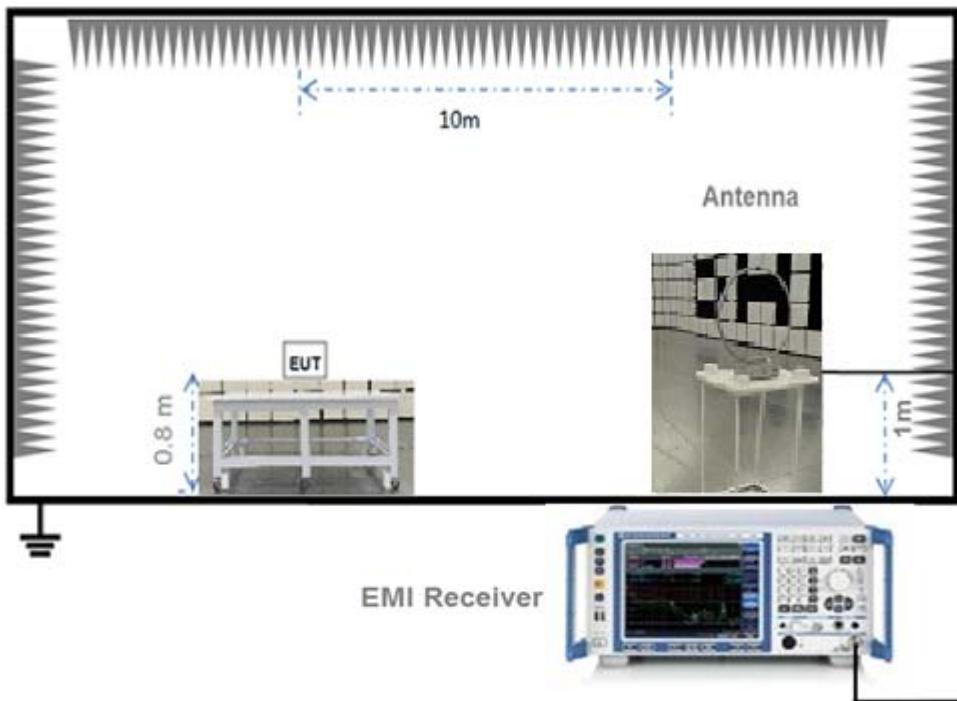


(Diagram 3)

4.4.4 For Radiated Test (30 MHz-1 GHz)

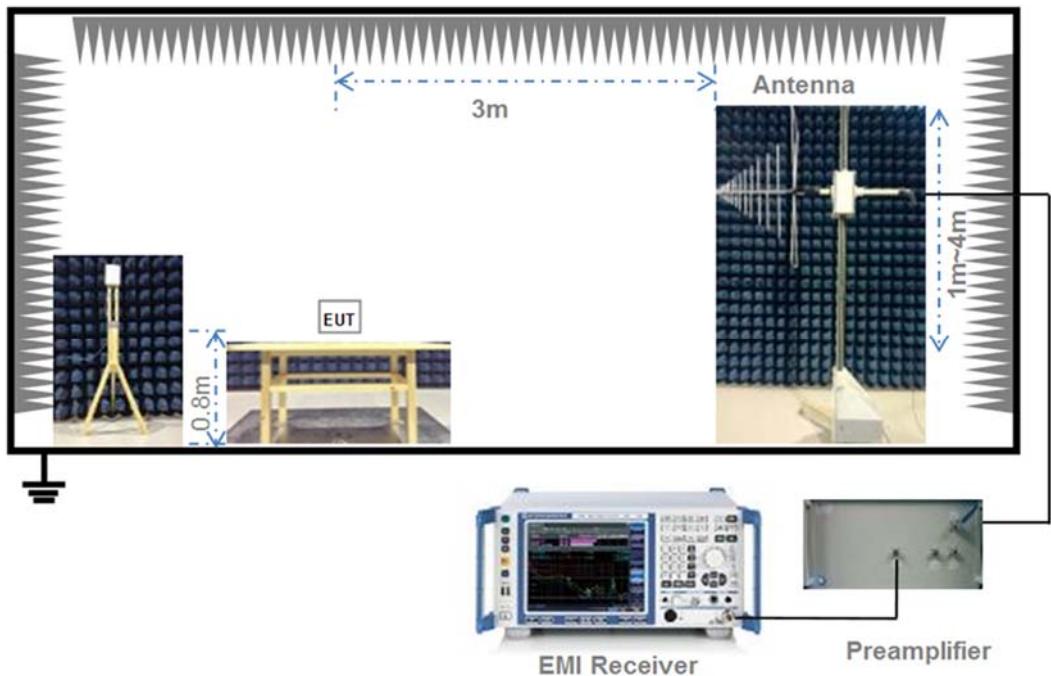

(Diagram 4)

4.4.5 For Radiated Test (Above 1 GHz)

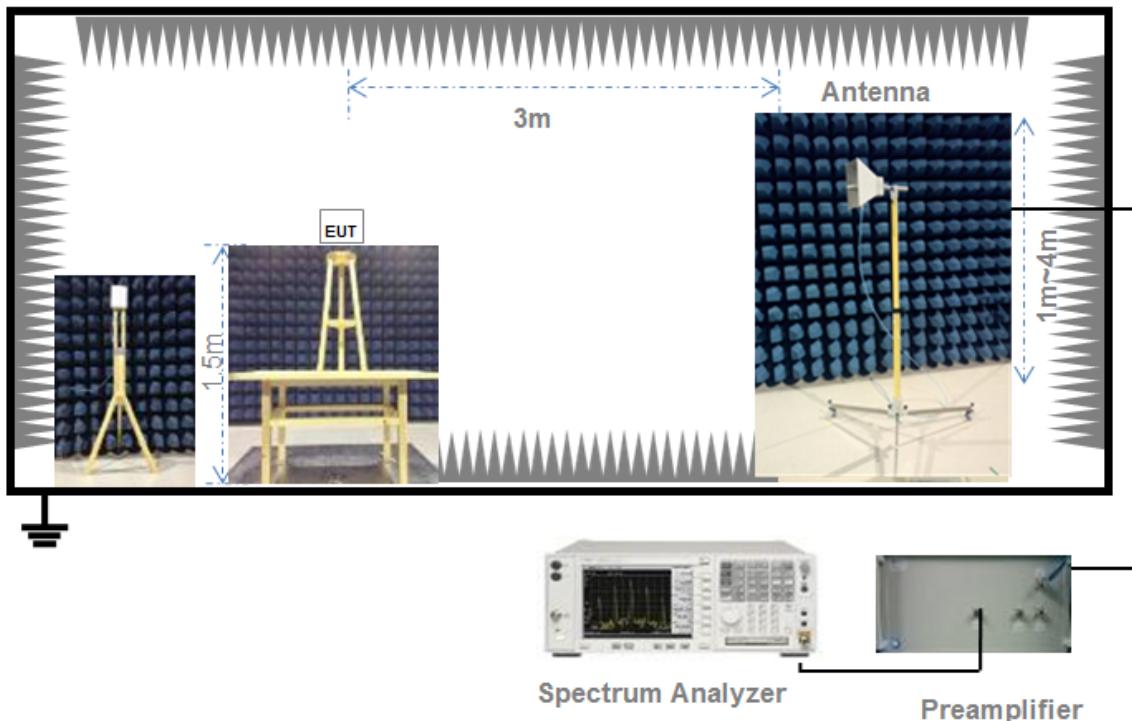

(Diagram 5)

4.5 Measurement Results Explanation Example

4.5.1 For conducted test items:

The offset level is set in the spectrum analyzer to compensate the RF cable loss and attenuator between EUT conducted output port and spectrum analyzer. With the offset compensation, the spectrum analyzer reading level is exactly the EUT RF output level.

The spectrum analyzer offset is derived from RF cable loss and attenuator factor.

Offset = RF cable loss + attenuator factor.

5 TEST ITEMS

5.1 Antenna Requirements

5.1.1 Relevant Standards

FCC §15.203 & 15.247(b); RSS-247, 5.4 (6)

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited. This requirement does not apply to carrier current devices or to devices operated under the provisions of § 15.211, § 15.213, § 15.217, § 15.219, or § 15.221. Further, this requirement does not apply to intentional radiators that must be professionally installed, such as perimeter protection systems and some field disturbance sensors, or to other intentional radiators which, in accordance with § 15.31(d), must be measured at the installation site. However, the installer shall be responsible for ensuring that the proper antenna is employed so that the limits in this part are not exceeded.

If directional gain of transmitting antennas is greater than 6 dBi, the power shall be reduced by the same level in dB comparing to gain minus 6 dBi. For the fixed point-to-point operation, the power shall be reduced by one dB for every 3 dB that the directional gain of the antenna exceeds 6 dBi. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the FCC rule.

5.1.2 Antenna Anti-Replacement Construction

The Antenna Anti-Replacement as following method:

Protected Method	Description
The antenna is embedded in the product	The antenna is welded on the mainboard, can't be replaced by the consumer

Reference Documents	Item
Photo	Please refer to the EUT Photo documents.

5.1.3 Antenna Gain

The antenna peak gain of EUT is less than 6 dBi. Therefore, it is not necessary to reduce maximum peak output power limit.

5.2 Number of Hopping Frequencies

5.2.1 Limit

FCC §15.247(a) (1) (i); RSS-247, 5.1 (4)

For frequency hopping systems operating in the 902-928 MHz band: the system shall use at least 50 hopping frequencies.

Test Setup

See section 4.4.1 for test setup description for the antenna port. The photo of test setup please refer to ANNEX B.

5.2.2 Test Procedure

The EUT must have its hopping function enabled. Use the following spectrum analyzer settings:

Span = the frequency band of operation

RBW \geq 1% of the span

VBW \geq RBW

Sweep = auto

Detector function = peak

Trace = max hold

Allow the trace to stabilize

5.2.3 Test Result

Please refer to ANNEX A.1.

5.3 Peak Output Power and E.I.R.P

5.3.1 Test Limit

FCC § 15.247(b)(1)

For frequency hopping systems operating in the 902-928 MHz band: 1 watt for systems employing at least 50 hopping channels; and, 0.25 watts for systems employing less than 50 hopping channels, but at least 25 hopping channels, as permitted under paragraph (a)(1)(i) of this section.

RSS-247, 5.4 (2)

For FHSs operating in the band 902-928 MHz, the maximum peak conducted output power shall not exceed 1.0 W and the e.i.r.p. shall not exceed 4 W if the hopset uses 75 or more hopping channels; the maximum peak conducted output power shall not exceed 0.125 W and the e.i.r.p. shall not exceed 0.5 W if the hopset uses less than 75 hopping channels (see Section 5.4(5) for exceptions).

5.3.2 Test Setup

See section 4.4.1 for test setup description for the antenna port. The photo of test setup please refer to ANNEX B.

5.3.3 Test Procedure

The Module operates at hopping-off test mode. The lowest, middle and highest channels are selected to perform testing to verify the conducted RF output peak power of the Module.

Use the following spectrum analyzer settings:

Span = approximately 5 times the 20 dB bandwidth, centered on a hopping channel

RBW > the 20 dB bandwidth of the emission being measured

VBW \geq RBW

Sweep = auto

Detector function = peak

Trace = max hold

Allow the trace to stabilize.

5.3.4 Test Result

Please refer to ANNEX A.2.

5.4 Occupied Bandwidth

5.4.1 Limit

FCC §15.247(a)(1)(i); RSS-247, 5.1 (1)

Measurement of the 20dB bandwidth of the modulated signal. The maximum allowed 20 dB bandwidth of the hopping channel is 500 kHz.

5.4.2 Test Setup

See section 4.4.1 for test setup description for the antenna port. The photo of test setup please refer to ANNEX B.

5.4.3 Test Procedure

Use the following spectrum analyzer settings:

Span = approximately 2 to 3 times the 20 dB bandwidth, centered on a hopping channel

RBW = in the range of 1% to 5% of the OBW

VBW \geq RBW

Sweep = auto

Detector function = peak

Trace = max hold

The EUT should be transmitting at its maximum data rate, Allow the trace to stabilize.

5.4.4 Test Result

Please refer to ANNEX A.3.

5.5 Carrier Frequency Separation

5.5.1 Limit

FCC §15.247(a)(1); RSS-247, 5.1 (2)

Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater.

5.5.2 Test Setup

See section 4.4.1 for test setup description for the antenna port. The photo of test setup please refer to ANNEX B.

5.5.3 Test Procedure

The EUT must have its hopping function enabled. Use the following spectrum analyzer settings:

Span = wide enough to capture the peaks of two adjacent channels

Resolution (or IF) Bandwidth (RBW) \geq 1% of the span

Video (or Average) Bandwidth (VBW) \geq RBW

Sweep = auto

Detector function = peak

Trace = max hold

Allow the trace to stabilize. Use the marker-delta function to determine the separation between the peaks of the adjacent channels.

5.5.4 Test Result

Please refer to ANNEX A.4.

5.6 Time of Occupancy (Dwell time)

5.6.1 Limit

FCC §15.247(a)(1)(i); RSS-247, 5.1 (4)

For frequency hopping systems operating in the 902-928 MHz band: if the 20 dB bandwidth of the hopping channel is less than 250 kHz, the system shall use at least 50 hopping frequencies and the average time of occupancy on any frequency shall not be greater than 0.4 seconds within a 20 second period; if the 20 dB bandwidth of the hopping channel is 250 kHz or greater, the system shall use at least 25 hopping frequencies and the average time of occupancy on any frequency shall not be greater than 0.4 seconds within a 10 second period.

5.6.2 Test Setup

See section 4.4.1 for test setup description for the antenna port. The photo of test setup please refer to ANNEX B.

5.6.3 Test Procedure

The lowest, middle and highest channels are selected to perform testing to record the dwell time of each occupation measured in this channel, which is called Pulse Time here.

5.6.4 Test Result

Please refer to ANNEX A.5

5.7 Conducted Spurious Emission & Authorized-band band-edge

5.7.1 Limit

FCC §15.247(d); RSS-247, 5.5

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement.

5.7.2 Test Setup

See section 4.4.1 for test setup description for the antenna port. The photo of test setup please refer to ANNEX B.

5.7.3 Test Procedure

Use the following spectrum analyzer settings:

Span = wide enough to capture the peak level of the in-band emission and all spurious emissions (e.g., harmonics) from the lowest frequency generated in the EUT up through the 10th harmonic. Typically, several plots are required to cover this entire span.

RBW = 100 kHz

VBW \geq RBW

Sweep = auto

Detector function = peak

Trace = max hold

Allow the trace to stabilize

5.7.4 Test Result

Please refer to ANNEX A.6 and A.7

5.8 Conducted Emission

5.8.1 Limit

FCC §15.207; RSS-GEN, 8.8

For an intentional radiator that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency within the band 150 kHz to 30 MHz shall not exceed the limits in the following table, as measured using a 50 μ H/50 Ω line impedance stabilization network (LISN).

Frequency range (MHz)	Conducted Limit (dB μ V)	
	Quai-peak	Average
0.15 - 0.50	66 to 56	56 to 46
0.50 - 5	56	46
0.50 - 30	60	50

5.8.2 Test Setup

See section 4.4.2 for test setup description for the AC power supply port. The photo of test setup please refer to ANNEX B.

5.8.3 Test Procedure

The maximum conducted interference is searched using Peak (PK), if the emission levels more than the AV and QP limits, and that have narrow margins from the AV and QP limits will be re-measured with AV and QP detectors. Tests for both L phase and N phase lines of the power mains connected to the EUT are performed. Refer to recorded points and plots below.

Devices subject to Part 15 must be tested for all available U.S. voltages and frequencies (such as a nominal 120 VAC, 50/60 Hz and 240 VAC, 50/60 Hz) for which the device is capable of operation. A device rated for 50/60 Hz operation need not be tested at both frequencies provided the radiated and line conducted emissions are the same at both frequencies.

5.8.4 Test Result

Please refer to ANNEX A.7.

5.9 Radiated Spurious Emission

5.9.1 Limit

FCC §15.209&15.247(d); RSS-247, 5.5

Radiated emission outside the frequency band attenuation below the general limits specified in FCC section 15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in FCC section 15.205(a), must also comply with the radiated emission limits specified in FCC section 15.209(a).

According to FCC section 15.209 (a), except as provided elsewhere in this subpart, the emissions from an intentional radiator shall not exceed the field strength levels specified in the following table:

Frequency (MHz)	Field Strength (μ V/m)	Measurement Distance (m)
0.009 - 0.490	$902/F(\text{kHz})$	300
0.490 - 1.705	$9020/F(\text{kHz})$	30
1.705 - 30.0	30	30
30 - 88	100	3
88 - 216	150	3
216 - 960	200	3
Above 960	500	3

Note:

1. Field Strength ($\text{dB}\mu\text{V}/\text{m}$) = $20*\log[\text{Field Strength } (\mu\text{V}/\text{m})]$.
2. In the emission tables above, the tighter limit applies at the band edges.
3. For Above 1000 MHz, the emission limit in this paragraph is based on measurement instrumentation employing an average detector, measurement using instrumentation with a peak detector function, corresponding to 20dB above the maximum permitted average limit.
4. For above 1000 MHz, limit field strength of harmonics: 54dB μ V/m@3m (AV) and 74dB μ V/m@3m (PK).

5.9.2 Test Setup

See section 4.4.3 to 4.4.5 for test setup description for the antenna port. The photo of test setup please refer to ANNEX B.

5.9.3 Test Procedure

The measurement frequency range is from 9 kHz to the 10th harmonic of the fundamental frequency. The Turn Table is actuated to turn from 0° to 360°, and both horizontal and vertical polarizations of the Test Antenna are used to find the maximum radiated power. Mid channels on all channel bandwidth verified. Only the worst RB size/offset presented.

The power of the EUT transmitting frequency should be ignored.

All Spurious Emission tests were performed in X, Y, Z axis direction. And only the worst axis test condition was recorded in this test report.

Use the following spectrum analyzer settings:

Span = wide enough to fully capture the emission being measured

RBW = 1 MHz for $f \geq 1$ GHz, 100 kHz for $f < 1$ GHz

VBW \geq RBW

Sweep = auto

Detector function = peak

Trace = max hold

For measurement below 1GHz, If the emission level of the EUT measured by the peak detector is 3 dB lower than the applicable limit, the peak emission level will be reported, Otherwise, the emission measurement will be repeated using the quasi-peak detector and reported.

5.9.4 Test Result

Please refer to ANNEX A.8.

5.10 Band Edge (Restricted-band band-edge)

5.10.1 Limit

FCC §15.209&15.247(d)

Radiated emission outside the frequency band attenuation below the general limits specified in FCC section 15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in FCC section 15.205(a), must also comply with the radiated emission limits specified in FCC section 15.209(a).

5.10.2 Test Setup

See section 4.4.3 to 4.4.5 for test setup description for the antenna port. The photo of test setup please refer to ANNEX B.

5.10.3 Test Procedure

The measurement frequency range is from 9 kHz to the 10th harmonic of the fundamental frequency. The Turn Table is actuated to turn from 0° to 360°, and both horizontal and vertical polarizations of the Test Antenna are used to find the maximum radiated power. Mid channels on all channel bandwidth verified. Only the worst RB size/offset presented.

The power of the EUT transmitting frequency should be ignored.

All Spurious Emission tests were performed in X, Y, Z axis direction. And only the worst axis test condition was recorded in this test report.

Use the following spectrum analyzer settings:

Span = wide enough to fully capture the emission being measured

RBW = 1 MHz for $f \geq 1$ GHz, 100 kHz for $f < 1$ GHz

VBW \geq RBW

Sweep = auto

Detector function = peak

Trace = max hold

For measurement below 1GHz, If the emission level of the EUT measured by the peak detector is 3 dB lower than the applicable limit, the peak emission level will be reported, Otherwise, the emission measurement will be repeated using the quasi-peak detector and reported.

5.10.4 Test Result

Please refer to ANNEX A.9.

ANNEX A TEST RESULT


A.1 Number of Hopping Frequency

Test Data

Test Mode	Frequency Block (MHz)	Measured Channel Numbers	Min. Limit	Verdict
RFID	902-928	50	50	Pass

Test plots

RFID

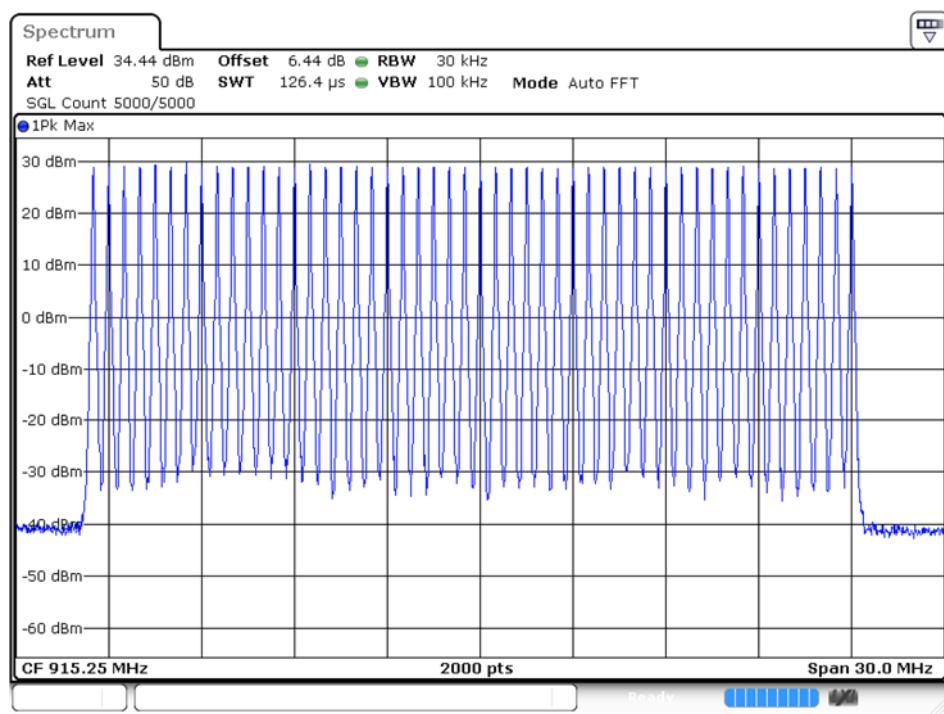

A.2 Peak Output Power and E.I.R.P

Peak Power Test Data

Channel	Measured Output Peak Power		Limit		Verdict	
	RFID		dBm	mW		
	dBm	mW				
Low	29.18	827.94	30	1000	Pass	
Middle	29.18	827.94			Pass	
High	28.87	770.90			Pass	

E.I.R.P Test Data (For ISED)

Channel	E.I.R.P		Limit		Verdict	
	RFID		dBm	mW		
	dBm	mW				
Low	34.18	2618.18	36	4000	Pass	
Middle	34.18	2618.18			Pass	
High	33.87	2437.81			Pass	

Test plots

LOW CHANNEL




Date: 11.NOV.2020 17:02:58

MIDDLE CHANNEL



Date: 11.NOV.2020 17:07:38

HIGH CHANNEL

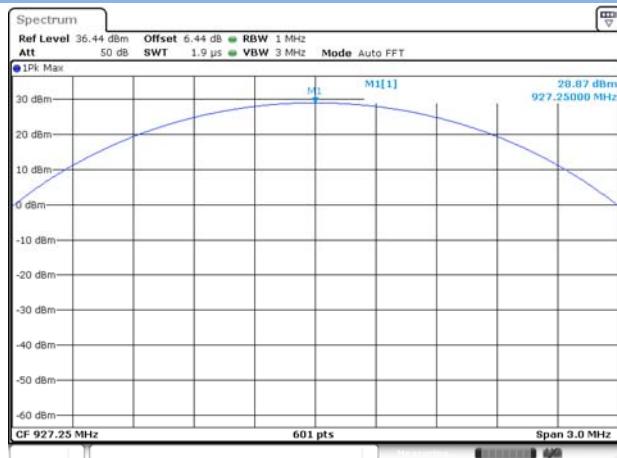

Date: 11.NOV.2020 17:10:59

A.3 20 dB and 99% bandwidth

Test Data

RFID			
Channel	20 dB Bandwidth (MHz)	99% Bandwidth (MHz)	Verdict
Low	0.082642	0.077800	Pass
Middle	0.082336	0.077600	Pass
High	0.081726	0.079200	Pass

Test plots (20 dB Bandwidth)

LOW CHANNEL



MIDDLE CHANNEL




HIGH CHANNEL



Test plots (99% Bandwidth)

LOW CHANNEL

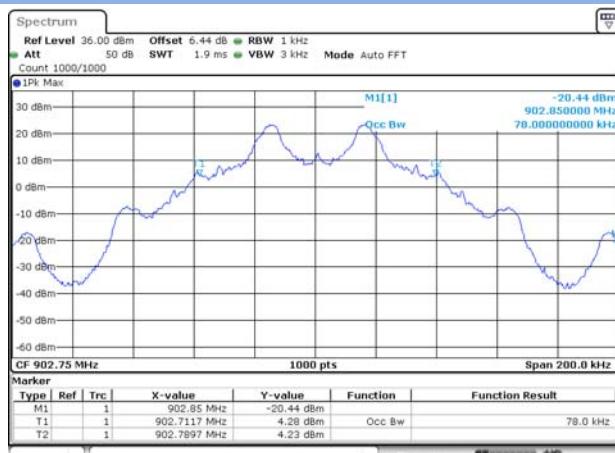

MIDDLE CHANNEL



Date: 11.NOV.2020 17:01:52

Date: 11.NOV.2020 17:07:09

HIGH CHANNEL



Date: 11.NOV.2020 17:10:23


A.4 Hopping Frequency Separation

Test Data

Mode	Frequency separation (MHz)	Max 20 dB Bandwidth (MHz)	Verdict
RFID	0.4992	0.082642	Pass

Test Plots

RFID

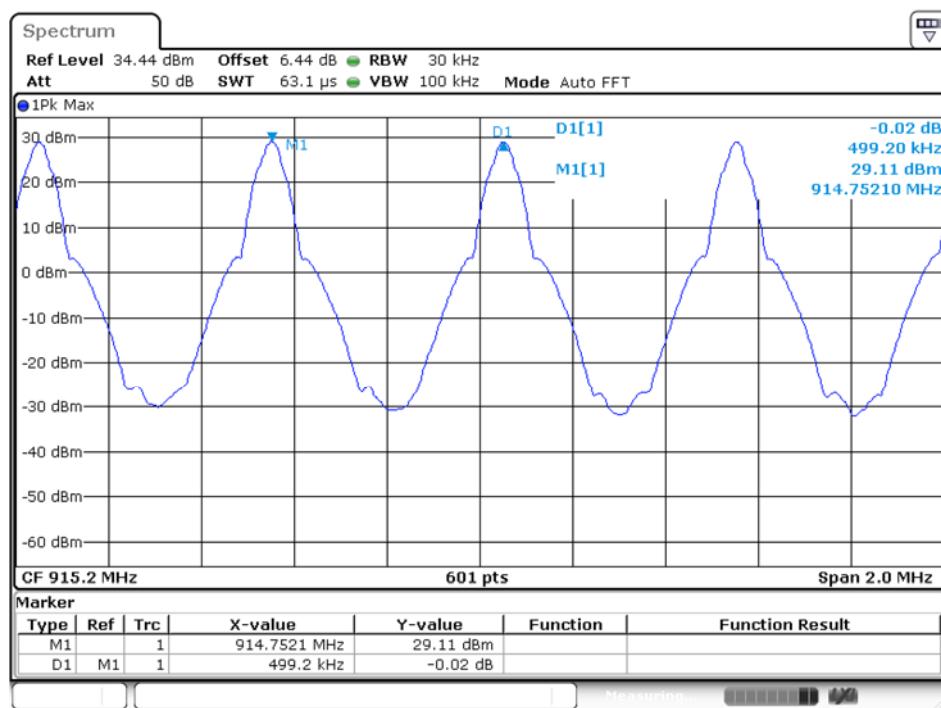


Date: 11.NOV.2020 16:47:19

A.5 Average Time of Occupancy

Test Data

Total of Dwell (ms)	Limit (sec)	Verdict
0.3985	0.4	Pass

RFID

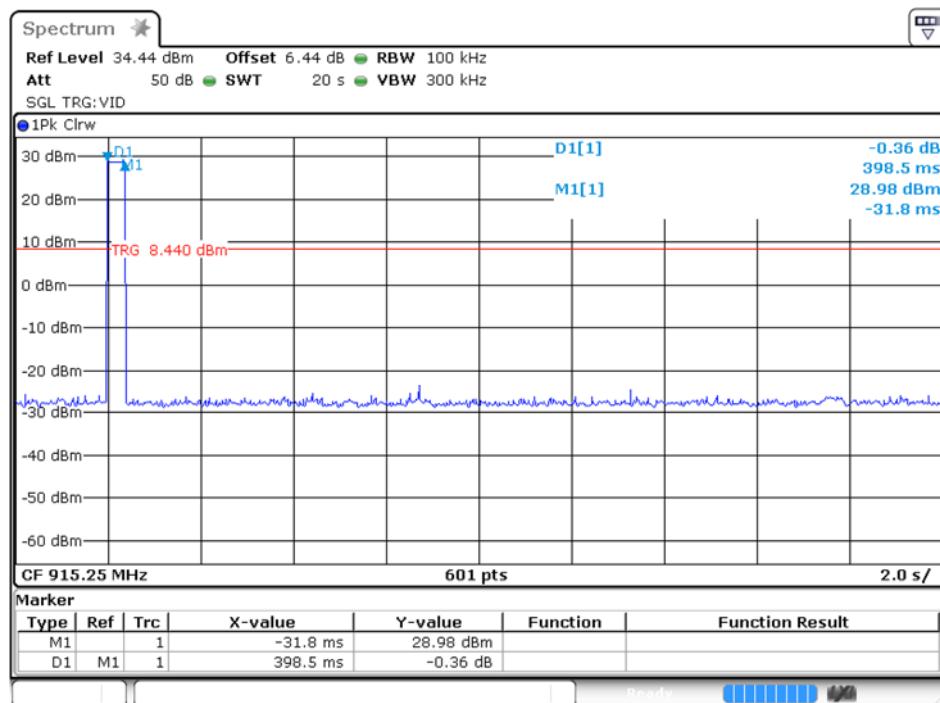

A.6 Conducted Spurious Emissions & Authorized-band band-edge


Test Data

RFID				
Channel	Measured Max. Out of Band Emission (dBm)	Limit (dBm)		Verdict
		Carrier Level	Calculated 20 dBc Limit	
Low	-21.98	29.11	9.11	Pass
Middle	-21.74	29.12	9.12	Pass
High	-22.33	28.81	8.81	Pass


RFID				
Mode	Measured Max. Out of Band Emission (dBm)	Limit (dBm)		Verdict
		Carrier Level	Calculated 20 dBc Limit	
Hopping	-23.53	29.51	9.51	Pass

Test Plots


LOW CHANNEL, CARRIER LEVEL

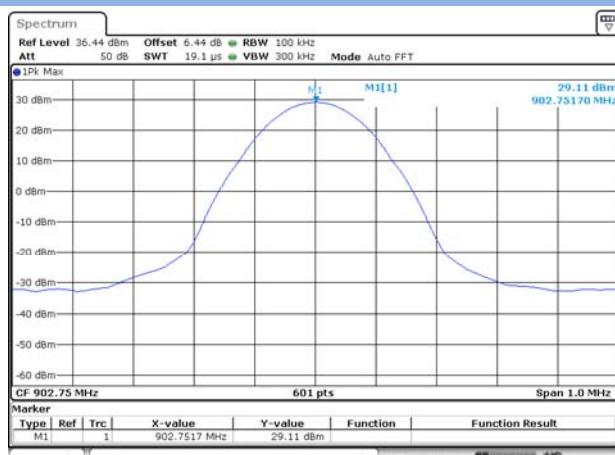


LOW CHANNEL, Band Edge

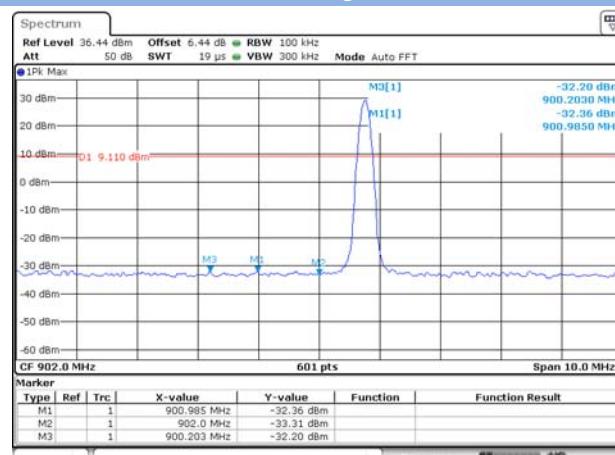


LOW CHANNEL , SPURIOUS 30 MHz ~ 3 GHz

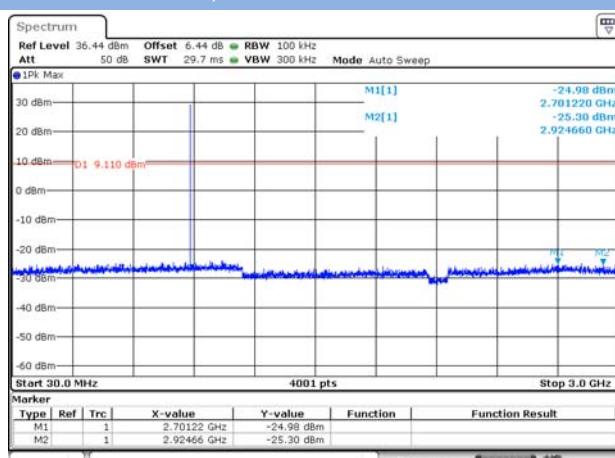


LOW CHANNEL , SPURIOUS 3 GHz ~ 25 GHz

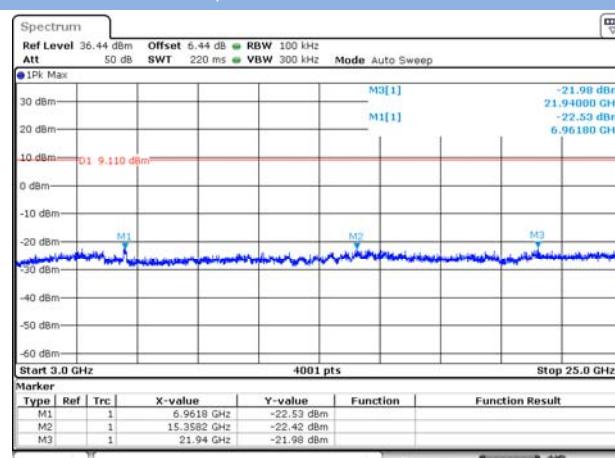

MIDDLE CHANNEL, CARRIER LEVEL

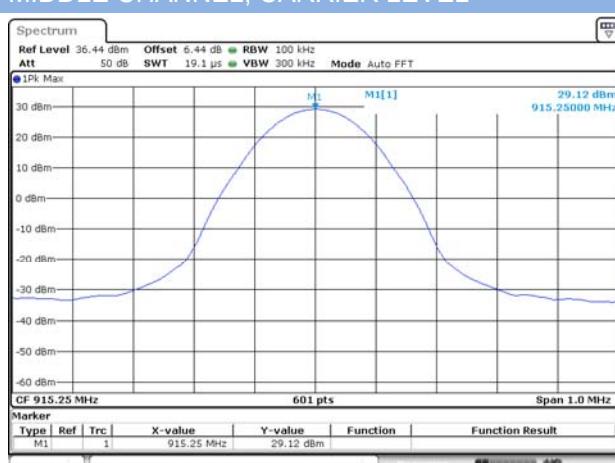


MIDDLE CHANNEL , SPURIOUS 30 MHz ~ 3 GHz

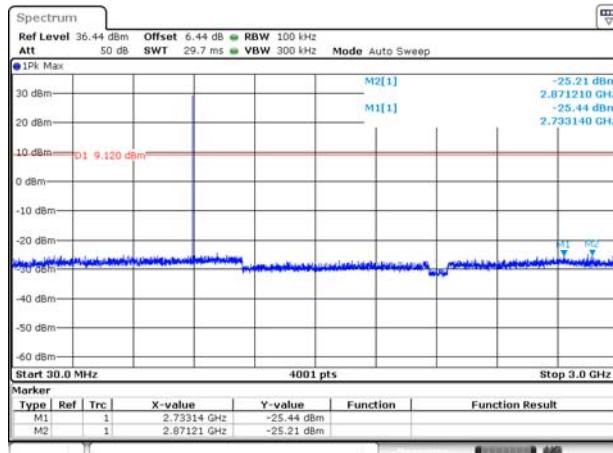

Date: 11.NOV.2020 17:08:29

MIDDLE CHANNEL , SPURIOUS 3 GHz ~ 25 GHz

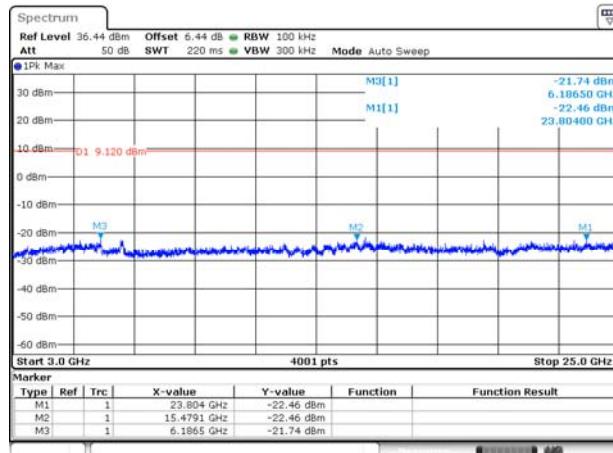


Date: 11.NOV.2020 17:08:48

HIGH CHANNEL, CARRIER LEVEL




Date: 11.NOV.2020 17:12:12

HIGH CHANNEL , BAND EDGE

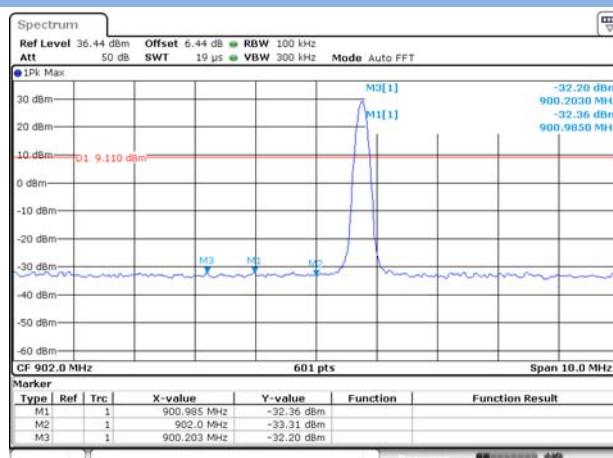


Date: 11.NOV.2020 17:05:55

HIGH CHANNEL , SPURIOUS 30 MHz ~ 3 GHz

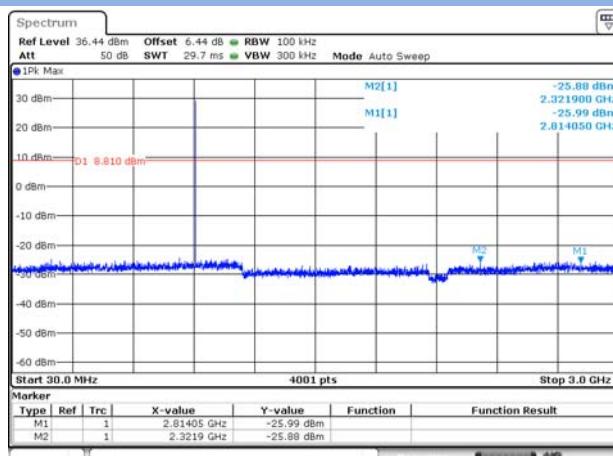


Date: 11.NOV.2020 17:12:55

HIGH CHANNEL , SPURIOUS 3 GHz ~ 25 GHz

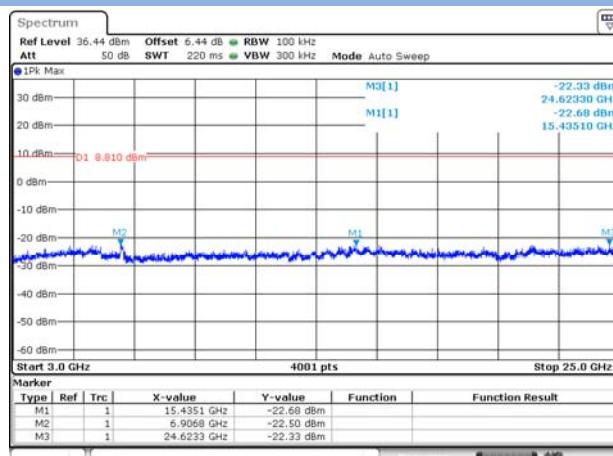


Date: 11.NOV.2020 17:12:58


HOPPING, CARRIER LEVEL

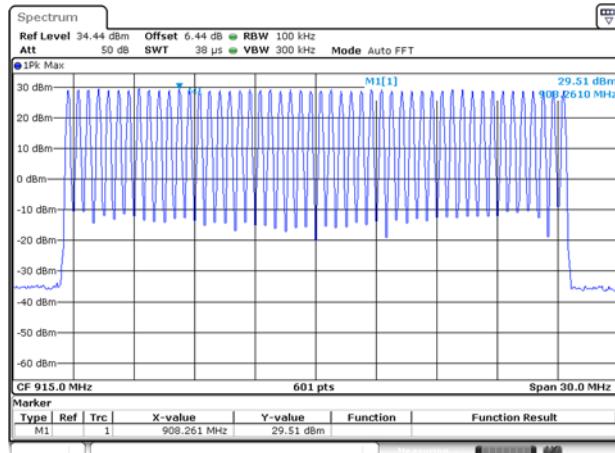


Hopping BAND EDGE (LOW)

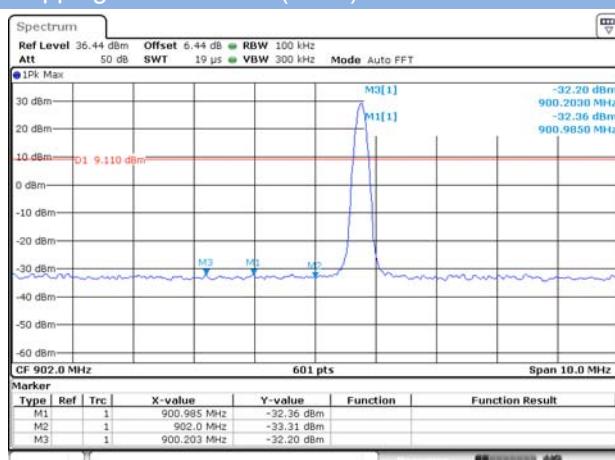


Hopping BAND EDGE (HIGH)

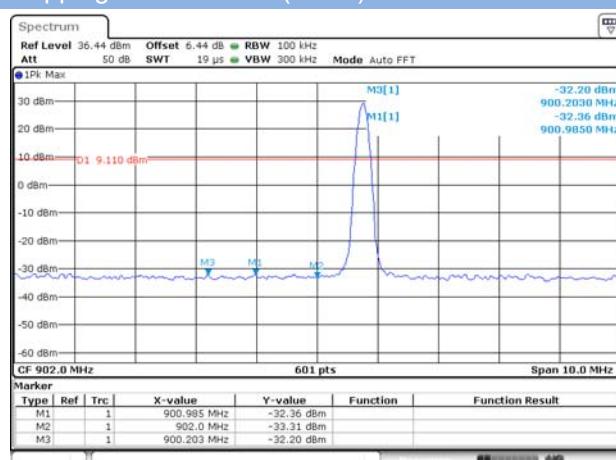

Hopping Mode, SPURIOUS 30 MHz ~ 3 GHz

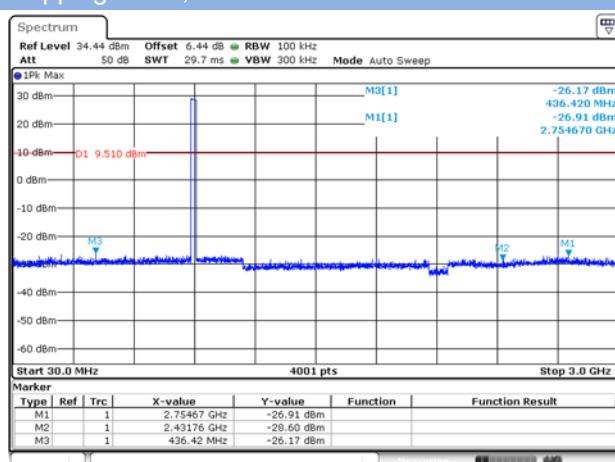

Hopping Mode, SPURIOUS 3 GHz ~ 25 GHz

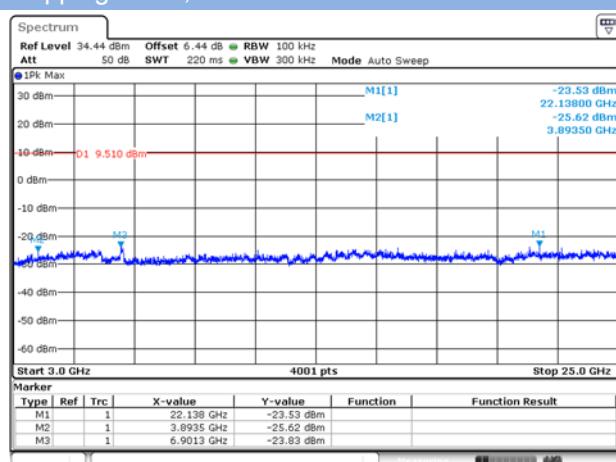


A.7 Conducted Emissions

Note ¹: The EUT is working in the Normal link mode. All modes have been tested and normal link mode is worst.

Note ²: Devices subject to Part 15 must be tested for all available U.S. voltages and frequencies (such as a nominal 120 VAC, 60 Hz and 240 VAC, 50 Hz) for which the device is capable of operation. So, The configuration 120 VAC, 60 Hz and 240 VAC, 50 Hz were tested respectively, but only the worst configuration (120 VAC, 60 Hz) shown here.


Test Data and Plots

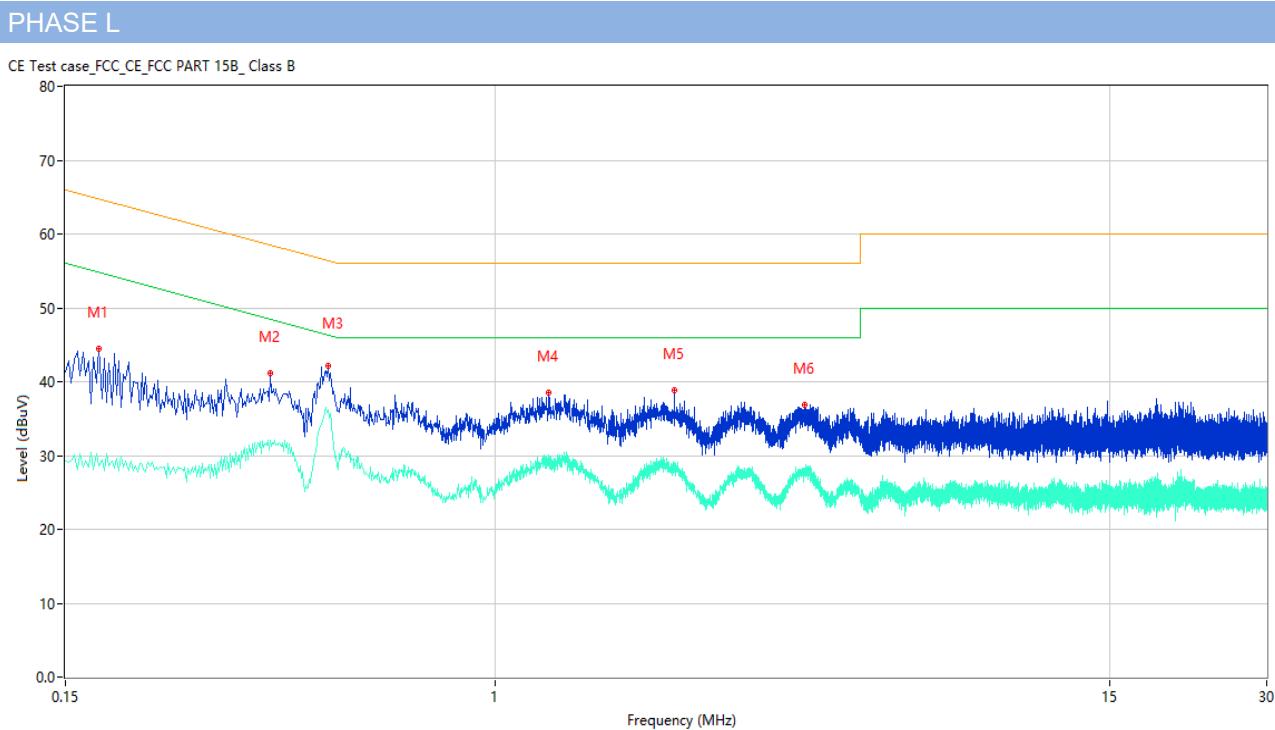

No.	Frequency (MHz)	Results (dBuV)	Factor (dB)	Limit (dBuV)	Over Limit (dB)	Detector	Line	Verdict
1	0.174	44.46	10.39	64.77	-20.31	Peak	L	Pass
1**	0.174	28.63	10.39	54.77	-26.14	AV	L	Pass
2	0.370	41.12	10.30	58.50	-17.38	Peak	L	Pass
2**	0.370	32.04	10.30	48.50	-16.46	AV	L	Pass
3	0.478	42.12	10.29	56.37	-14.25	Peak	L	Pass
3**	0.478	36.27	10.29	46.37	-10.10	AV	L	Pass
4	1.266	38.49	10.25	56.00	-17.51	Peak	L	Pass
4**	1.266	29.64	10.25	46.00	-16.36	AV	L	Pass
5	2.200	38.92	10.26	56.00	-17.08	Peak	L	Pass
5**	2.200	28.66	10.26	46.00	-17.34	AV	L	Pass
6	3.904	36.79	10.30	56.00	-19.21	Peak	L	Pass
6**	3.904	28.11	10.30	46.00	-17.89	AV	L	Pass

PHASE N

CE Test case_FCC_CE_FCC PART 15B_Class B

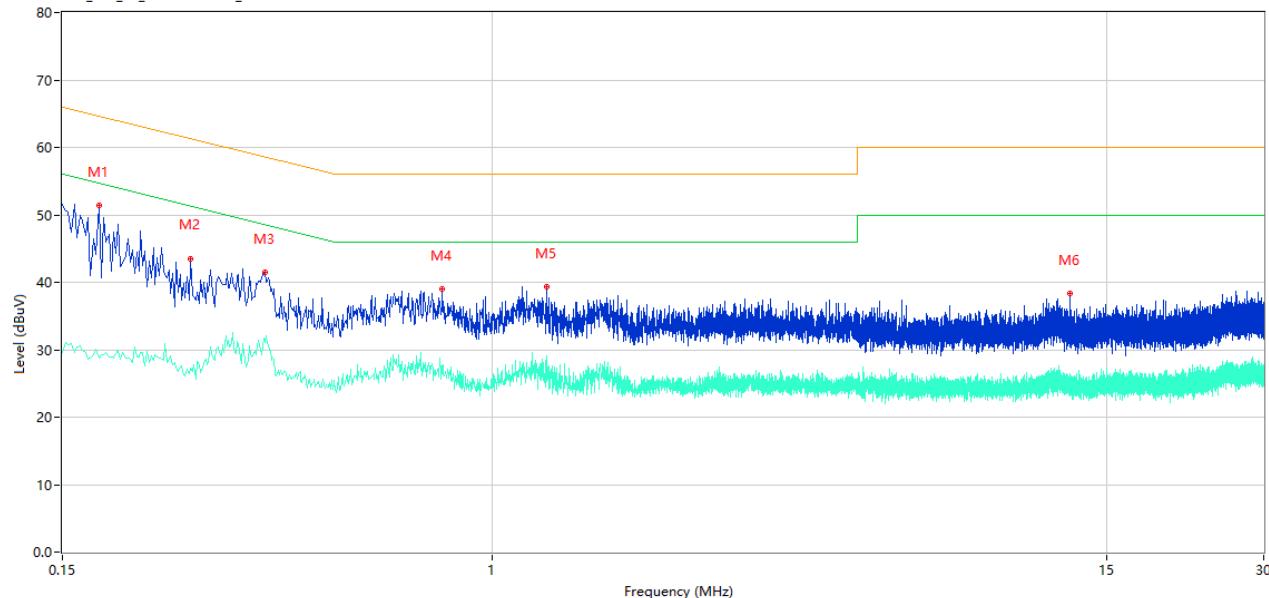

No.	Frequency (MHz)	Results (dBuV)	Factor (dB)	Limit (dBuV)	Over Limit (dB)	Detector	Line	Verdict
1	0.176	51.34	10.39	64.67	-13.33	Peak	N	Pass
1**	0.176	28.69	10.39	54.67	-25.98	AV	N	Pass
2	0.264	43.53	10.34	61.30	-17.77	Peak	N	Pass
2**	0.264	27.33	10.34	51.30	-23.97	AV	N	Pass
3	0.366	41.51	10.30	58.59	-17.08	Peak	N	Pass
3**	0.366	31.14	10.30	48.59	-17.45	AV	N	Pass
4	0.802	38.96	10.27	56.00	-17.04	Peak	N	Pass
4**	0.802	27.61	10.27	46.00	-18.39	AV	N	Pass
5	1.270	39.32	10.25	56.00	-16.68	Peak	N	Pass
5**	1.270	26.93	10.25	46.00	-19.07	AV	N	Pass
6	12.742	38.28	10.39	60.00	-21.72	Peak	N	Pass
6**	12.742	26.18	10.39	50.00	-23.82	AV	N	Pass

A.8 Radiated Spurious Emission


Note ¹: The symbol of “--” in the table which means not application.

Note ²: For the test data above 1 GHz, according the ANSI C63.10-2013, where limits are specified for both average and peak (or quasi-peak) detector functions, if the peak (or quasi-peak) measured value complies with the average limit, it is unnecessary to perform an average measurement.

Note ³: The low frequency, which started from 9 kHz to 30 MHz, was pre-scanned and the result which was 20 dB lower than the limit line per 15.31(o) was not reported.

Test Data and Plots


Low Channel, 30 MHz to 1 GHz, ANT H

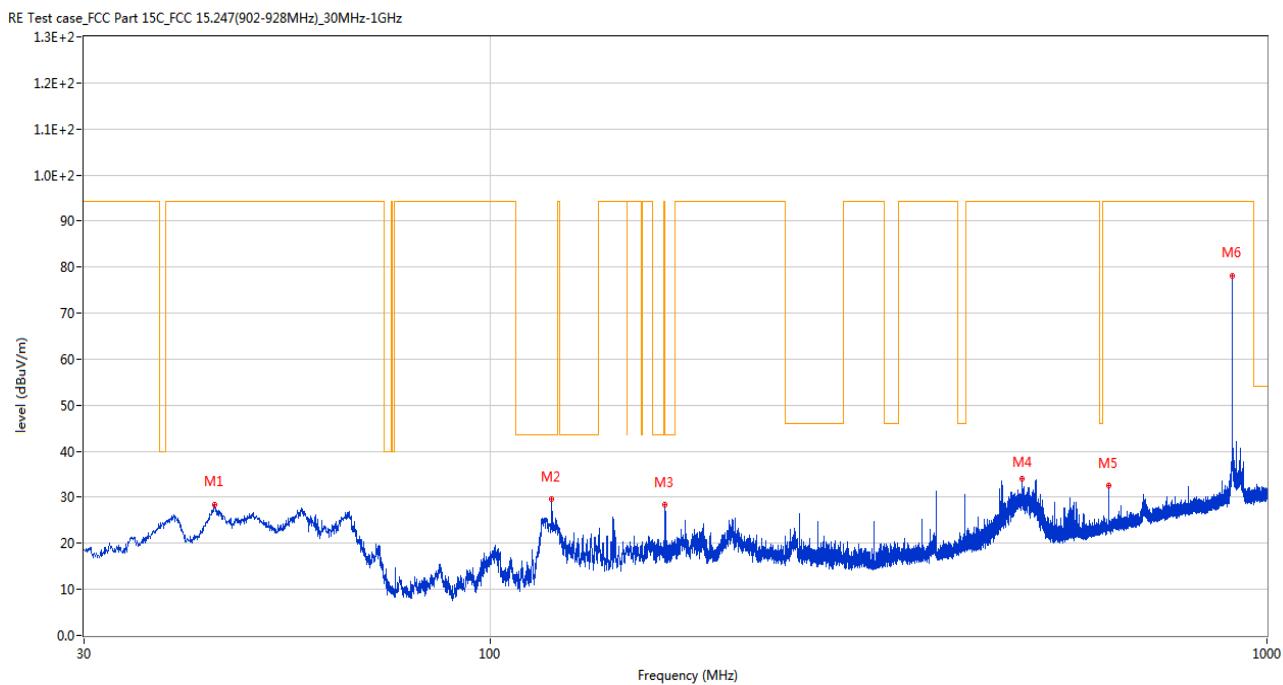

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	44.211	28.47	-26.02	94.3	-65.83	Peak	360.00	200	Horizontal	Pass
2	120.016	29.75	-26.04	43.5	-13.75	Peak	122.00	100	Horizontal	Pass
3	167.982	28.29	-24.11	43.5	-15.21	Peak	107.00	100	Horizontal	Pass
4	484.299	34.11	-16.66	94.3	-60.19	Peak	87.00	200	Horizontal	Pass
5	624.950	32.49	-12.81	94.3	-61.81	Peak	313.00	100	Horizontal	Pass
6	902.758	78.14	-7.52	94.3	-16.16	Peak	3.00	200	Horizontal	N/A

Low Channel, 30 MHz to 1 GHz, ANT V


RE Test case_FCC Part 15C_FCC 15.247(902-928MHz)_30MHz-1GHz

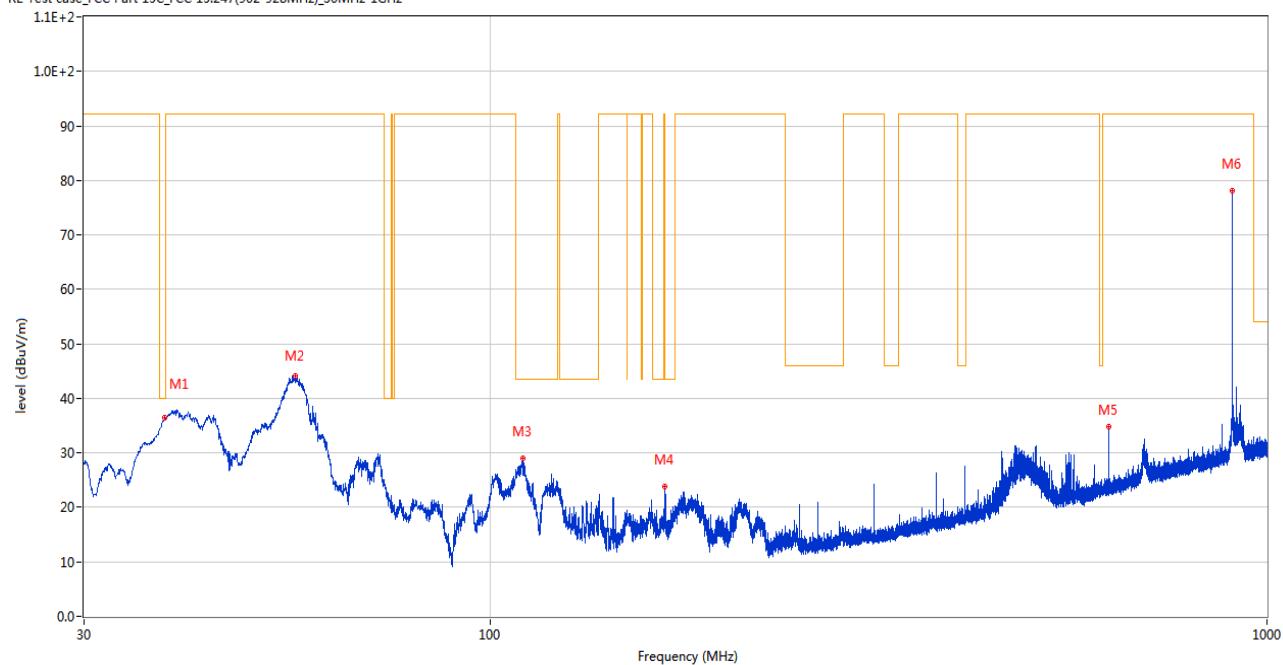

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	38.148	36.55	-25.90	40.0	-3.45	Peak	187.00	100	Vertical	Pass
2	56.044	44.08	-26.44	92.2	-48.12	Peak	232.00	100	Vertical	Pass
3	110.025	29.06	-27.38	43.5	-14.44	Peak	0.00	100	Vertical	Pass
4	167.982	23.84	-24.11	43.5	-19.66	Peak	100.00	100	Vertical	Pass
5	624.950	34.87	-12.81	92.2	-57.33	Peak	157.00	100	Vertical	Pass
6	902.758	78.02	-7.52	92.2	-14.18	Peak	144.00	200	Vertical	N/A

Middle Channel, 30 MHz to 1 GHz, ANT H


RE Test case_FCC Part 15C_FCC 15.247(902-928MHz)_30MHz-1GHz

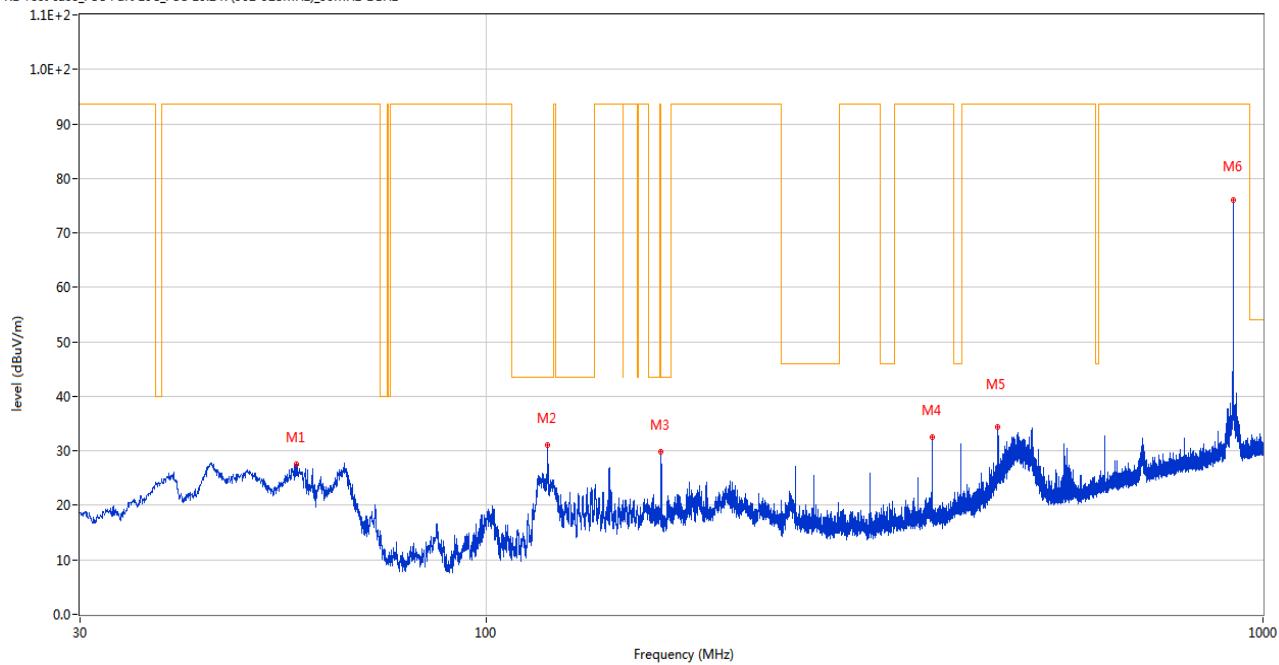

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	57.014	27.51	-26.29	93.7	-66.19	Peak	317.00	200	Horizontal	Pass
2	120.016	31.09	-26.04	43.5	-12.41	Peak	113.00	200	Horizontal	Pass
3	167.982	29.92	-24.11	43.5	-13.58	Peak	106.00	200	Horizontal	Pass
4	374.981	32.50	-19.93	93.7	-61.20	Peak	254.00	100	Horizontal	Pass
5	455.975	34.30	-17.28	93.7	-59.40	Peak	75.00	200	Horizontal	Pass
6	915.271	75.96	-7.15	93.7	-17.74	Peak	200.00	200	Horizontal	N/A

Middle Channel, 30 MHz to 1 GHz, ANT V


RE Test case_FCC Part 15C_FCC 15.247(902-928MHz)_30MHz-1GHz

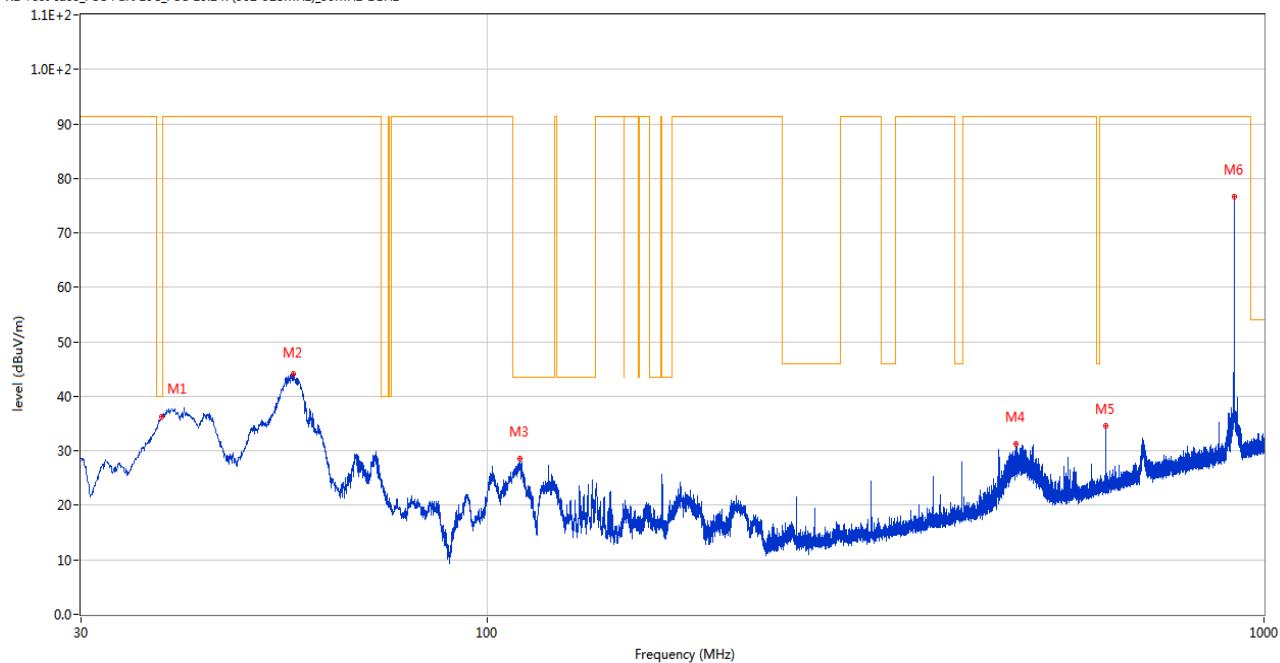

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	38.148	36.33	-25.90	40.0	-3.67	Peak	195.00	100	Vertical	Pass
2	56.336	44.04	-26.40	91.4	-47.36	Peak	277.00	100	Vertical	Pass
3	110.074	28.62	-27.37	43.5	-14.88	Peak	21.00	100	Vertical	Pass
4	478.770	31.34	-16.47	91.4	-60.06	Peak	127.00	100	Vertical	Pass
5	624.950	34.50	-12.81	91.4	-56.90	Peak	150.00	100	Vertical	Pass
6	915.222	76.62	-7.15	91.4	-14.78	Peak	150.00	200	Vertical	N/A

High Channel, 30 MHz to 1 GHz, ANT H


RE Test case_FCC Part 15C_FCC 15.247(902-928MHz)_30MHz-1GHz

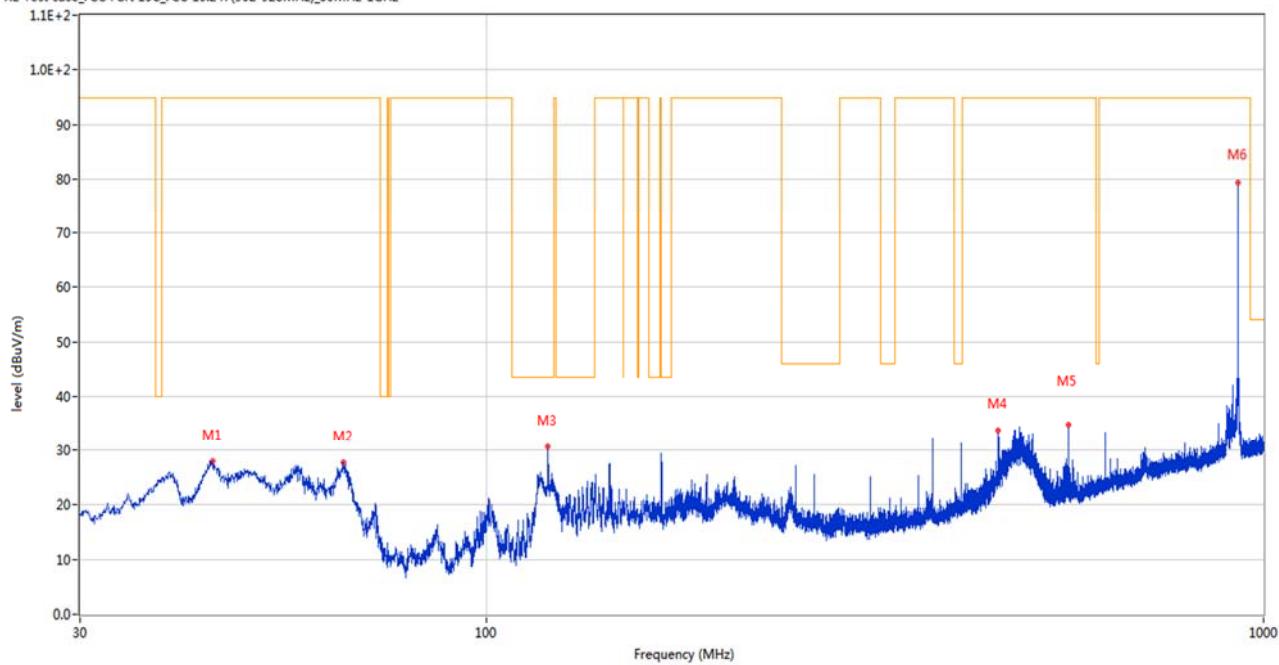

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	44.453	27.99	-26.03	94.9	-66.91	Peak	360.00	200	Horizontal	Pass
2	65.405	27.69	-27.38	94.9	-67.21	Peak	179.00	200	Horizontal	Pass
3	119.967	30.60	-26.05	43.5	-12.90	Peak	124.00	200	Horizontal	Pass
4	455.975	33.79	-17.28	94.9	-61.11	Peak	92.00	200	Horizontal	Pass
5	560.638	34.72	-14.61	94.9	-60.18	Peak	360.00	200	Horizontal	Pass
6	927.250	79.46	-7.33	94.9	-15.44	Peak	210.00	200	Horizontal	N/A

High Channel, 30 MHz to 1 GHz, ANT V


RE Test case_FCC Part 15C_FCC 15.247(902-928MHz)_30MHz-1GHz

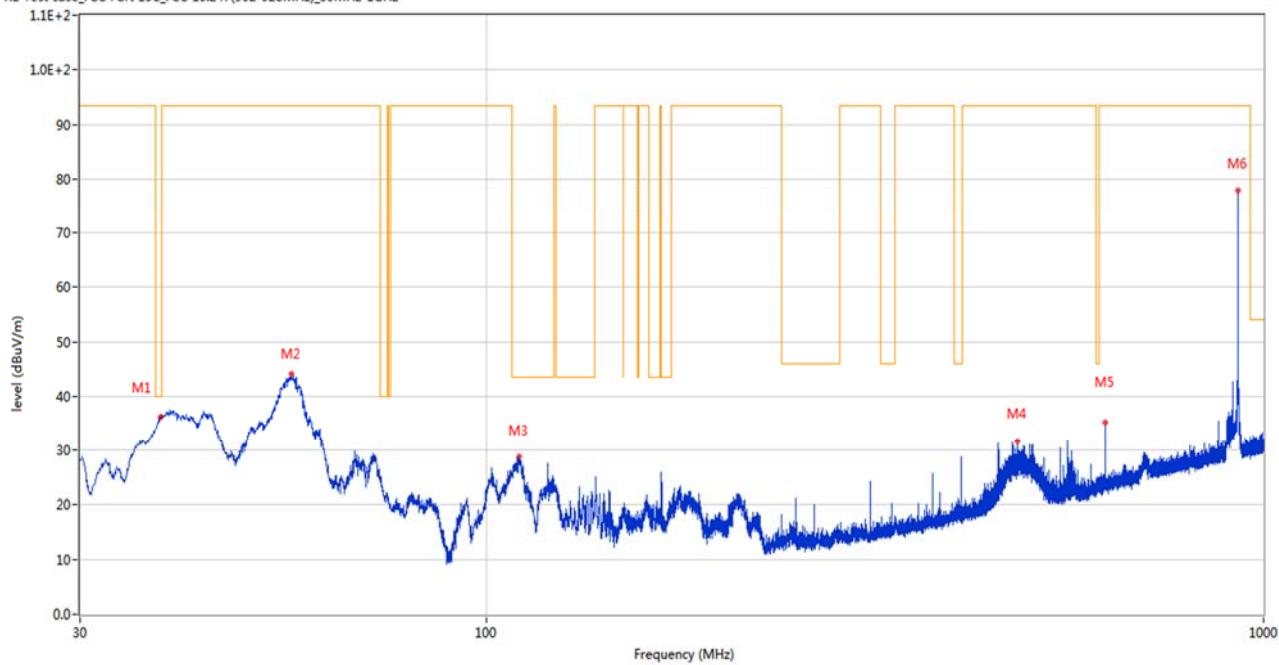

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	38.099	36.19	-25.89	40.0	-3.81	Peak	186.00	100	Vertical	Pass
2	56.093	44.02	-26.44	93.4	-49.38	Peak	226.00	100	Vertical	Pass
3	110.219	28.79	-27.35	43.5	-14.71	Peak	0.00	100	Vertical	Pass
4	481.632	31.70	-16.72	93.4	-61.70	Peak	153.00	100	Vertical	Pass
5	624.950	35.16	-12.81	93.4	-58.24	Peak	153.00	100	Vertical	Pass
6	927.250	77.93	-7.33	93.4	-15.47	Peak	360.00	200	Vertical	N/A

Hopping Mode, 30 MHz to 1 GHz, ANT H


RE Test case_FCC Part 15C_FCC 15.247(902-928MHz)_30MHz-1GHz

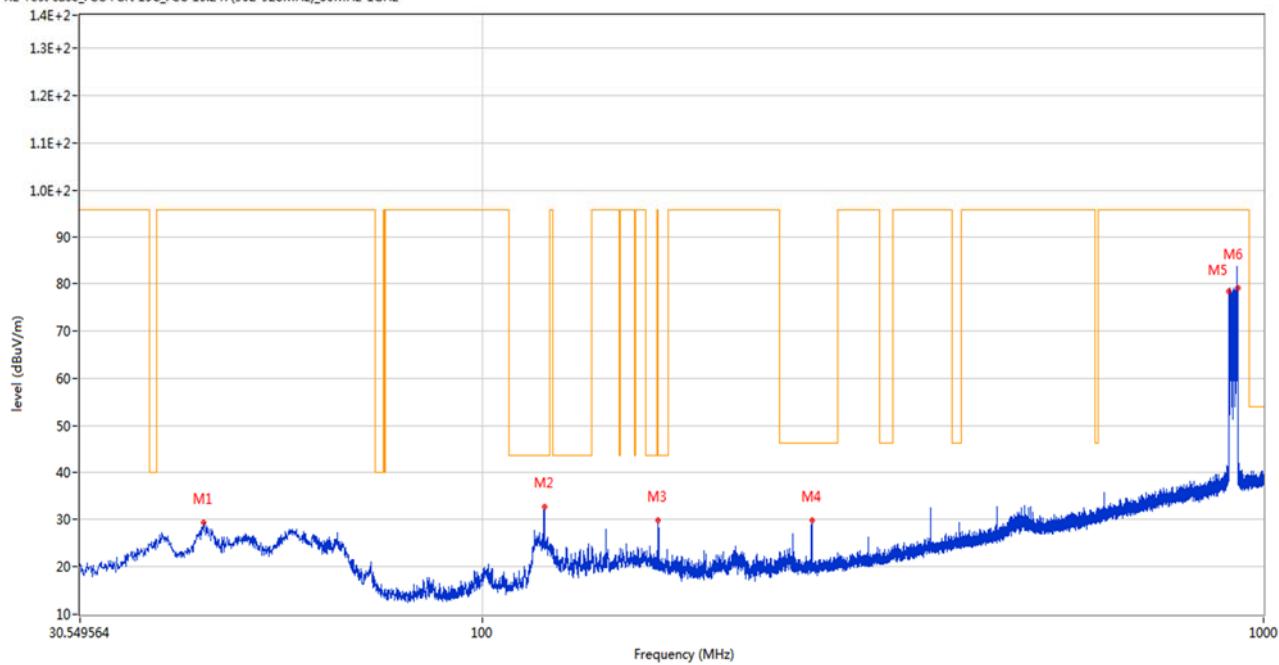

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	44.017	29.29	-26.03	95.8	-66.51	Peak	360.00	200	Horizontal	Pass
2	120.016	32.70	-26.04	43.5	-10.80	Peak	176.00	200	Horizontal	Pass
3	167.982	29.79	-24.11	43.5	-13.71	Peak	347.00	200	Horizontal	Pass
4	264.013	29.93	-24.07	46.0	-16.07	Peak	11.00	100	Horizontal	Pass
5	903.242	78.98	-7.58	95.8	-16.82	Peak	6.00	200	Horizontal	N/A
6	926.716	79.68	-7.31	95.8	-16.12	Peak	214.00	200	Horizontal	N/A


Hopping Mode, 30 MHz to 1 GHz, ANT V

RE Test case_FCC Part 15C_FCC 15.247(902-928MHz)_30MHz-1GHz

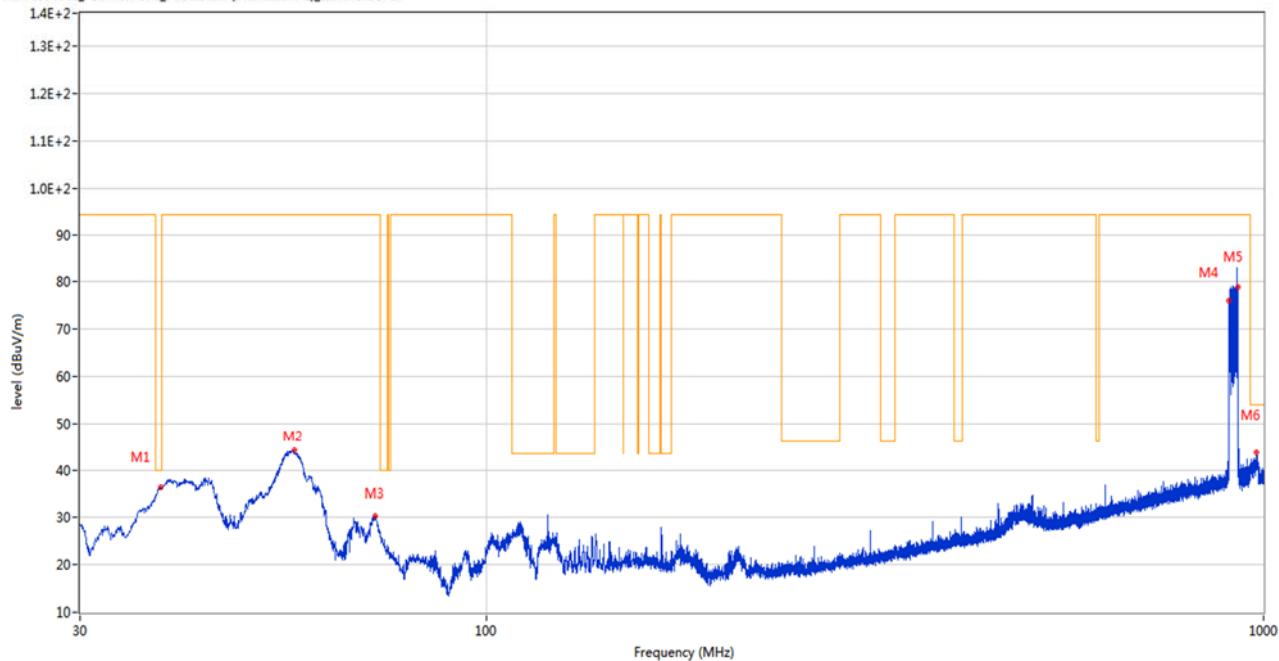

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	38.099	36.27	-25.89	40.0	-3.73	Peak	198.00	100	Vertical	Pass
2	56.675	44.13	-26.34	94.4	-50.17	Peak	225.00	100	Vertical	Pass
3	71.952	30.32	-28.57	94.4	-63.98	Peak	150.00	100	Vertical	Pass
4	902.758	76.82	-7.52	94.4	-17.58	Peak	250.00	200	Vertical	N/A
5	926.765	79.02	-7.32	94.4	-15.38	Peak	360.00	200	Vertical	N/A
6	978.272	42.31	-6.70	54.0	-11.69	Peak	360.00	200	Vertical	Pass


Low Channel, 850 MHz to 950 MHz, ANT H

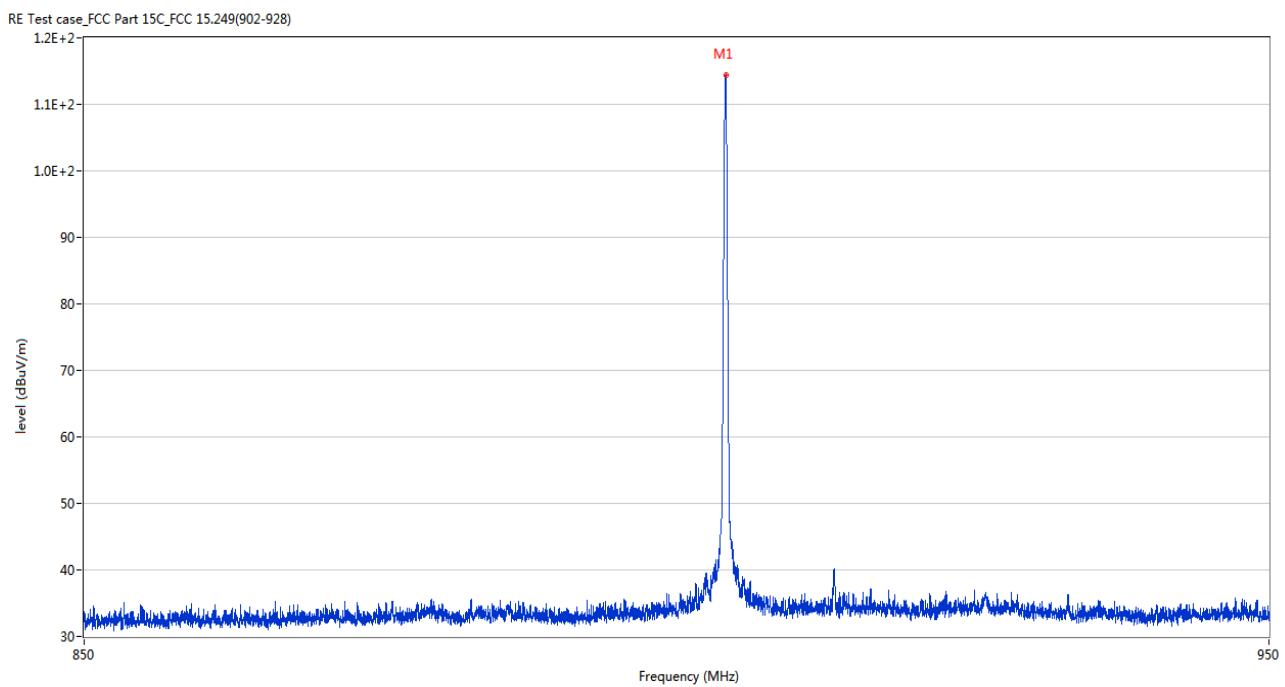

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	902.760	114.34	-11.49	--	--	Peak	60.00	150	Horizontal	N/A


Low Channel, 850 MHz to 950 MHz, ANT V

RE Test case_FCC Part 15C_FCC 15.249(902-928)

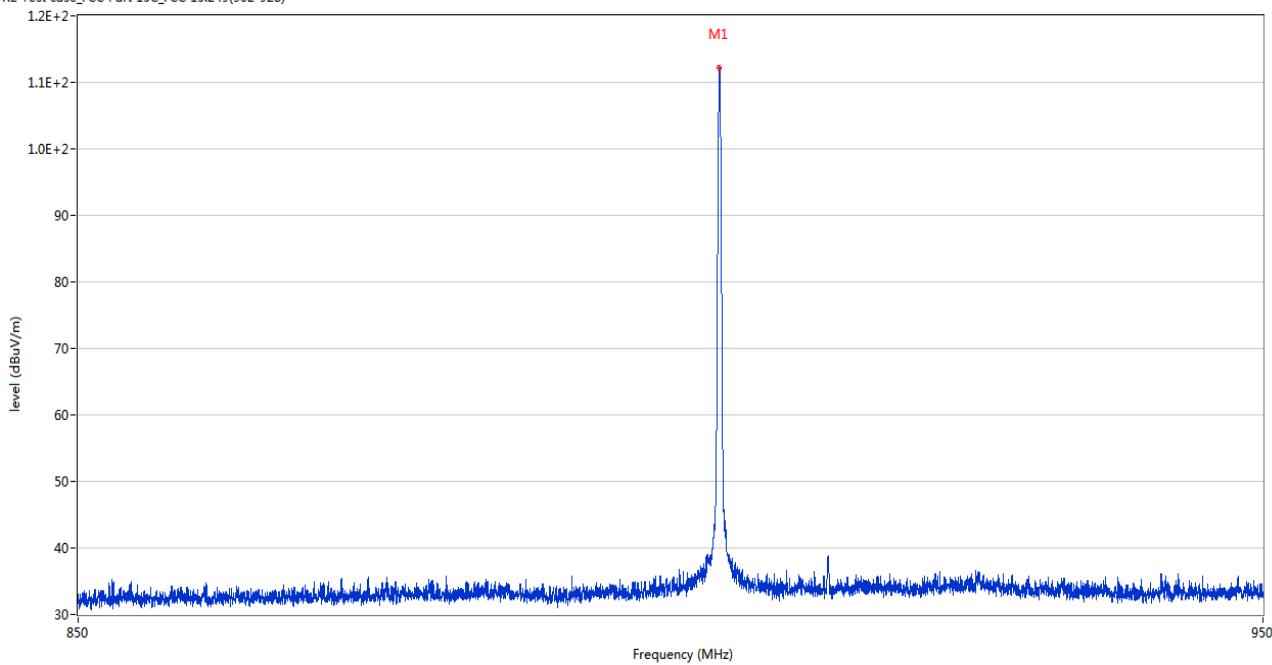

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	902.740	112.21	-11.49	--	--	Peak	126.00	150	Vertical	Pass


Middle Channel, 850 MHz to 950 MHz, ANT H

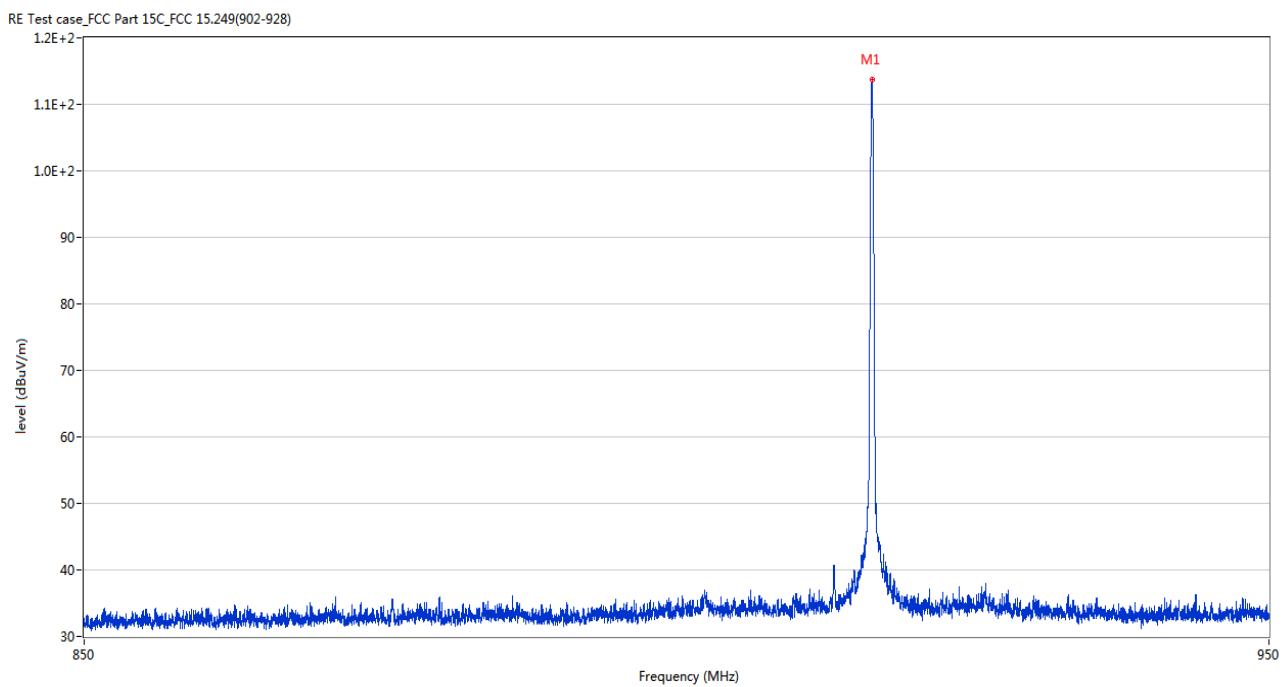

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	915.245	113.68	-10.82	--	--	Peak	204.00	150	Horizontal	Pass

Middle Channel, 850 MHz to 950 MHz, ANT V


RE Test case_FCC Part 15C_FCC 15.249(902-928)

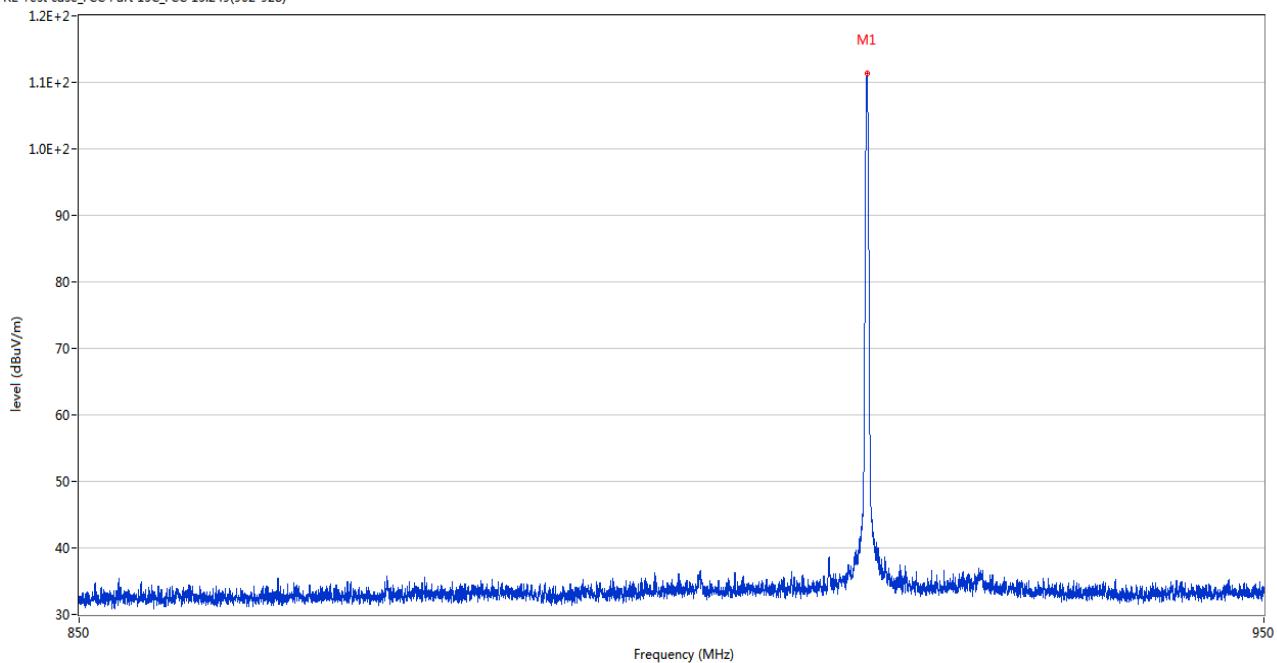

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	915.250	111.42	-10.82	--	--	Peak	265.00	150	Vertical	Pass

High Channel, 850 MHz to 950 MHz, ANT H


RE Test case_FCC Part 15C_FCC 15.249(902-928)

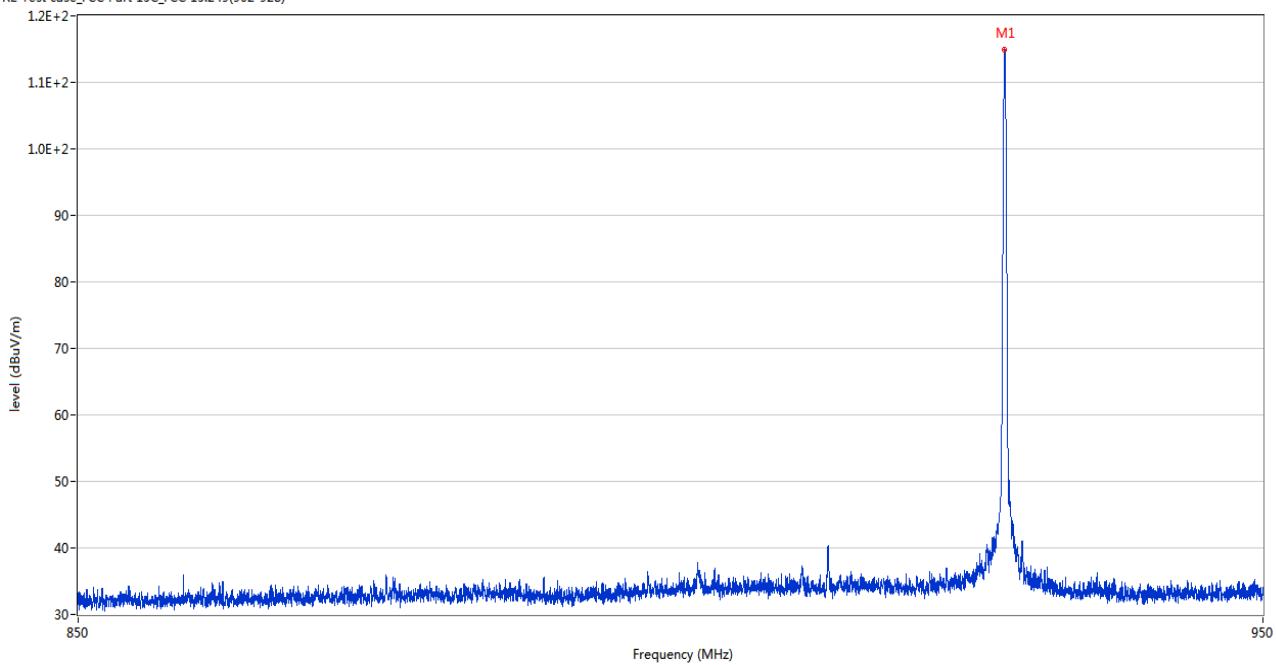

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	927.240	114.86	-10.87	--	--	Peak	200.00	100	Horizontal	Pass

High Channel, 850 MHz to 950 MHz, ANT V


RE Test case_FCC Part 15C_FCC 15.249(902-928)

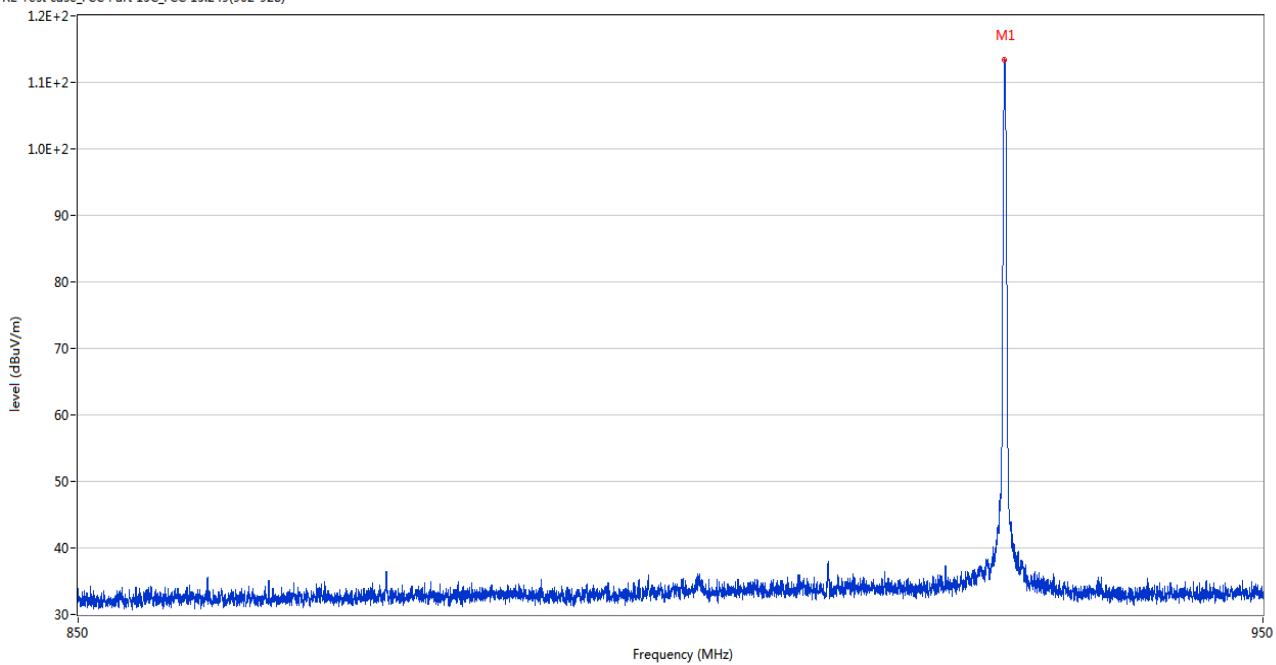

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	927.250	113.35	-10.87	--	--	Peak	17.00	150	Vertical	N/A

Hopping Mode, 850 MHz to 950 MHz, ANT H


RE Test case_FCC Part 15C_FCC 15.249(902-928)

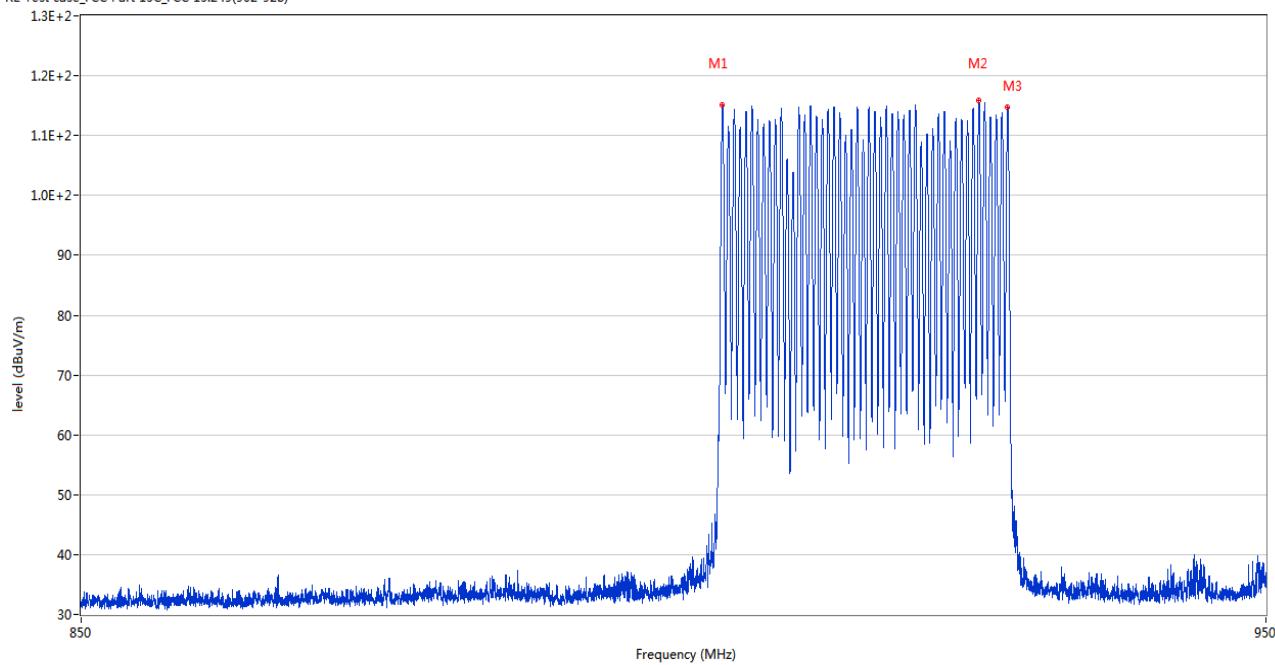

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	902.750	115.18	-11.49	--	--	Peak	56.00	150	Horizontal	Pass
2	924.740	115.79	-10.66	--	--	Peak	199.00	150	Horizontal	Pass
3	927.250	114.72	-10.87	--	--	Peak	136.00	150	Horizontal	Pass

Hopping Mode, 850 MHz to 950 MHz, ANT V

RE Test case_FCC Part 15C_FCC 15.249(902-928)

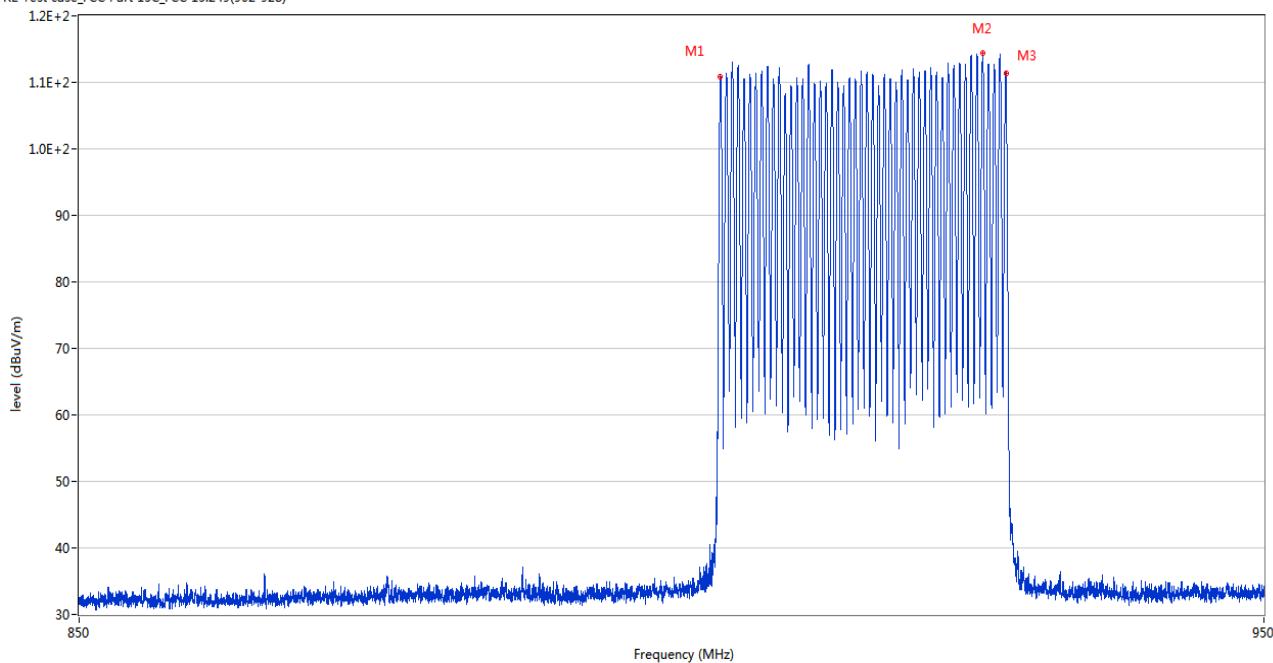

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	902.740	110.83	-11.49	--	--	Peak	195.00	150	Vertical	Pass
2	925.240	114.42	-10.67	--	--	Peak	45.00	150	Vertical	Pass
3	927.260	111.39	-10.87	--	--	Peak	334.00	150	Vertical	Pass

Low Channel, 1 GHz to 10 GHz, ANT H

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1126.700	43.20	-11.59	74.0	-30.80	Peak	262.00	150	Horizontal	Pass
1**	1126.700	30.70	-11.59	54.0	-23.30	AV	262.00	150	Horizontal	Pass
2	1886.100	42.54	-10.64	94.3	-51.76	Peak	338.00	150	Horizontal	Pass
2**	1886.100	29.89	-10.64	94.3	-64.41	AV	338.00	150	Horizontal	Pass
3	2611.700	47.62	-4.23	94.3	-46.68	Peak	338.00	150	Horizontal	Pass
3**	2611.700	35.69	-4.23	94.3	-58.61	AV	338.00	150	Horizontal	Pass
4	4910.400	48.40	-0.81	74.0	-25.60	Peak	215.00	150	Horizontal	Pass
4**	4910.400	38.75	-0.81	54.0	-15.25	AV	215.00	150	Horizontal	Pass
5	6649.600	51.61	4.66	94.3	-42.69	Peak	9.00	150	Horizontal	Pass
5**	6649.600	42.12	4.66	94.3	-52.18	AV	9.00	150	Horizontal	Pass
6	9038.950	48.81	18.16	74.0	-25.19	Peak	180.00	150	Horizontal	Pass
6**	9038.950	36.42	18.16	54.0	-17.58	AV	180.00	150	Horizontal	Pass

Low Channel, 1 GHz to 10 GHz, ANT V

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1104.700	42.58	-11.37	74.0	-31.42	Peak	185.00	150	Vertical	Pass
1**	1104.700	34.47	-11.37	54.0	-19.53	AV	185.00	150	Vertical	Pass
2	1802.300	41.55	-10.87	92.2	-50.65	Peak	231.00	150	Vertical	Pass
2**	1802.300	29.85	-10.87	92.2	-62.35	AV	231.00	150	Vertical	Pass
3	2716.800	46.70	-4.65	74.0	-27.30	Peak	37.00	150	Vertical	Pass
3**	2716.800	36.87	-4.65	54.0	-17.13	AV	37.00	150	Vertical	Pass
4	5448.200	50.29	-0.16	74.0	-23.71	Peak	69.00	150	Vertical	Pass
4**	5448.200	38.77	-0.16	54.0	-15.23	AV	69.00	150	Vertical	Pass
5	6416.600	51.98	3.98	92.2	-40.22	Peak	360.00	150	Vertical	Pass
5**	6416.600	43.72	3.98	92.2	-48.48	AV	360.00	150	Vertical	Pass
6	8703.400	48.09	17.68	92.2	-44.11	Peak	307.00	150	Vertical	Pass
6**	8703.400	35.62	17.68	92.2	-56.58	AV	307.00	150	Vertical	Pass

Middle Channel, 1 GHz to 10 GHz, ANT H

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1107.300	42.00	-11.39	74.0	-32.00	Peak	260.00	150	Horizontal	Pass
1**	1107.300	32.37	-11.39	54.0	-21.63	AV	260.00	150	Horizontal	Pass
2	2175.800	45.88	-7.03	93.7	-47.82	Peak	210.00	150	Horizontal	Pass
2**	2175.800	34.12	-7.03	93.7	-59.58	AV	210.00	150	Horizontal	Pass
3	2832.900	48.00	-3.74	74.0	-26.00	Peak	178.00	150	Horizontal	Pass
3**	2832.900	35.89	-3.74	54.0	-18.11	AV	178.00	150	Horizontal	Pass
4	5003.000	48.89	-0.78	74.0	-25.11	Peak	260.00	150	Horizontal	Pass
4**	5003.000	40.29	-0.78	54.0	-13.71	AV	260.00	150	Horizontal	Pass
5	6418.400	51.78	3.99	93.7	-41.92	Peak	311.00	150	Horizontal	Pass
5**	6418.400	42.75	3.99	93.7	-50.95	AV	311.00	150	Horizontal	Pass
6	9404.049	48.95	17.37	74.0	-25.05	Peak	51.00	150	Horizontal	Pass
6**	9404.049	37.02	17.37	54.0	-16.98	AV	51.00	150	Horizontal	Pass

Middle Channel, 1 GHz to 10 GHz, ANT V

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1103.000	41.71	-11.47	74.0	-32.29	Peak	183.00	150	Vertical	Pass
1**	1103.000	32.36	-11.47	54.0	-21.64	AV	183.00	150	Vertical	Pass
2	1830.600	42.29	-10.69	91.4	-49.11	Peak	150.00	150	Vertical	Pass
2**	1830.600	35.60	-10.69	91.4	-55.80	AV	150.00	150	Vertical	Pass
3	2644.000	47.60	-5.36	91.4	-43.80	Peak	246.00	150	Vertical	Pass
3**	2644.000	35.31	-5.36	91.4	-56.09	AV	246.00	150	Vertical	Pass
4	5213.800	49.63	-0.38	91.4	-41.77	Peak	324.00	150	Vertical	Pass
4**	5213.800	38.24	-0.38	91.4	-53.16	AV	324.00	150	Vertical	Pass
5	6844.600	52.06	3.67	91.4	-39.34	Peak	249.00	150	Vertical	Pass
5**	6844.600	41.18	3.67	91.4	-50.22	AV	249.00	150	Vertical	Pass
6	9375.549	48.85	17.21	74.0	-25.15	Peak	306.00	150	Vertical	Pass
6**	9375.549	36.07	17.21	54.0	-17.93	AV	306.00	150	Vertical	Pass

High Channel, 1 GHz to 10 GHz, ANT H

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1104.800	41.67	-11.37	74.0	-32.33	Peak	258.00	150	Horizontal	Pass
1**	1104.800	30.74	-11.37	54.0	-23.26	AV	258.00	150	Horizontal	Pass
2	1766.200	40.66	-11.32	94.9	-54.24	Peak	30.00	150	Horizontal	Pass
2**	1766.200	30.02	-11.32	94.9	-64.88	AV	30.00	150	Horizontal	Pass
3	2551.000	47.68	-4.82	94.9	-47.22	Peak	170.00	150	Horizontal	Pass
3**	2551.000	35.84	-4.82	94.9	-59.06	AV	170.00	150	Horizontal	Pass
4	4751.200	48.13	-1.93	74.0	-25.87	Peak	251.00	150	Horizontal	Pass
4**	4751.200	38.90	-1.93	54.0	-15.10	AV	251.00	150	Horizontal	Pass
5	6416.600	51.15	3.98	94.9	-43.75	Peak	0.00	150	Horizontal	Pass
5**	6416.600	41.51	3.98	94.9	-53.39	AV	0.00	150	Horizontal	Pass
6	8855.800	48.46	17.37	94.9	-46.44	Peak	322.00	150	Horizontal	Pass
6**	8855.800	35.79	17.37	94.9	-59.11	AV	322.00	150	Horizontal	Pass

High Channel, 1 GHz to 10 GHz, ANT V

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1105.200	43.33	-11.35	74.0	-30.67	Peak	197.00	150	Vertical	Pass
1**	1105.200	30.91	-11.35	54.0	-23.09	AV	197.00	150	Vertical	Pass
2	1854.700	44.02	-10.25	93.4	-49.38	Peak	168.00	150	Vertical	Pass
2**	1854.700	39.95	-10.25	93.4	-53.45	AV	168.00	150	Vertical	Pass
3	2781.500	48.11	-4.46	74.0	-25.89	Peak	113.00	150	Vertical	Pass
3**	2781.500	37.18	-4.46	54.0	-16.82	AV	113.00	150	Vertical	Pass
4	5167.000	49.04	-0.49	93.4	-44.36	Peak	86.00	150	Vertical	Pass
4**	5167.000	40.08	-0.49	93.4	-53.32	AV	86.00	150	Vertical	Pass
5	6361.600	51.85	2.51	93.4	-41.55	Peak	308.00	150	Vertical	Pass
5**	6361.600	40.20	2.51	93.4	-53.20	AV	308.00	150	Vertical	Pass
6	9149.050	48.49	17.45	74.0	-25.51	Peak	127.00	150	Vertical	Pass
6**	9149.050	36.13	17.45	54.0	-17.87	AV	127.00	150	Vertical	Pass

Hopping Mode, 1 GHz to 10 GHz, ANT H

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1108.900	42.93	-11.44	74.0	-31.07	Peak	256.00	150	Horizontal	Pass
1**	1108.900	32.16	-11.44	54.0	-21.84	AV	256.00	150	Horizontal	Pass
2	1849.300	42.63	-10.59	95.8	-53.17	Peak	250.00	150	Horizontal	Pass
2**	1849.300	32.25	-10.59	95.8	-63.55	AV	250.00	150	Horizontal	Pass
3	2874.400	48.64	-3.36	74.0	-25.36	Peak	90.00	150	Horizontal	Pass
3**	2874.400	37.75	-3.36	54.0	-16.25	AV	90.00	150	Horizontal	Pass
4	4436.400	47.12	-2.01	95.8	-48.68	Peak	337.00	150	Horizontal	Pass
4**	4436.400	39.13	-2.01	95.8	-56.67	AV	337.00	150	Horizontal	Pass
5	6475.200	51.08	3.26	95.8	-44.72	Peak	158.00	150	Horizontal	Pass
5**	6475.200	42.58	3.26	95.8	-53.22	AV	158.00	150	Horizontal	Pass
6	9645.850	48.99	18.95	95.8	-46.81	Peak	268.00	150	Horizontal	Pass
6**	9645.850	36.52	18.95	95.8	-59.28	AV	268.00	150	Horizontal	Pass

Hopping Mode, 1 GHz to 10 GHz, ANT V

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1106.500	42.88	-11.37	74.0	-31.12	Peak	183.00	150	Vertical	Pass
1**	1106.500	31.74	-11.37	54.0	-22.26	AV	183.00	150	Vertical	Pass
2	1854.500	46.68	-10.26	94.4	-47.72	Peak	171.00	150	Vertical	Pass
2**	1854.500	42.39	-10.26	94.4	-52.01	AV	171.00	150	Vertical	Pass
3	2774.400	47.40	-4.16	74.0	-26.60	Peak	326.00	150	Vertical	Pass
3**	2774.400	46.10	-4.16	54.0	-7.90	AV	326.00	150	Vertical	Pass
4	4792.200	48.08	-1.69	74.0	-25.92	Peak	19.00	150	Vertical	Pass
4**	4792.200	40.15	-1.69	54.0	-13.85	AV	19.00	150	Vertical	Pass
5	6765.800	51.72	3.99	94.4	-42.68	Peak	337.00	150	Vertical	Pass
5**	6765.800	41.89	3.99	94.4	-52.51	AV	337.00	150	Vertical	Pass
6	8305.000	48.57	16.50	74.0	-25.43	Peak	8.00	150	Vertical	Pass
6**	8305.000	35.11	16.50	54.0	-18.89	AV	8.00	150	Vertical	Pass

A.9 Band Edge (Restricted-band band-edge)

Note ¹: The lowest and highest channels are tested to verify the band edge emissions. Please refer to the following the plots for emissions values.

Note ²: The test data all are tested in the vertical and horizontal antenna which the trace is max hold. So these plots have shown the worst case.


Note ³: According the ANSI C63.10-2013, where limits are specified for both average and peak (or quasi-peak) detector functions, if the peak (or quasi-peak) measured value complies with the average limit, it is unnecessary to perform an average measurement.

Note ⁴: The Level (dB_{UV}/m) has been corrected by factor.


Test Mode	Test Channel	Frequency (MHz)	Level (dB _{UV} /m)	Factor (dB)	Limit Line (dB _{UV} /m)	Margin (dB)	Remark	Verdict
RFID	Low	614	41.851	3.16	74	32.149	PEAK	Pass
		614	N/A	N/A	54	N/A	AVERAGE	Pass
RFID	HIGH	960	47.56	28	74	26.44	PEAK	Pass
		960	N/A	N/A	54	N/A	AVERAGE	Pass
RFID	Hopping Low	614	42.012	3.16	74	31.988	PEAK	Pass
		614	N/A	N/A	54	N/A	AVERAGE	Pass
RFID	Hopping High	960	47.559	28	74	26.441	PEAK	Pass
		960	N/A	N/A	54	N/A	AVERAGE	Pass

Test Plots


LOW CHANNEL, PEAK

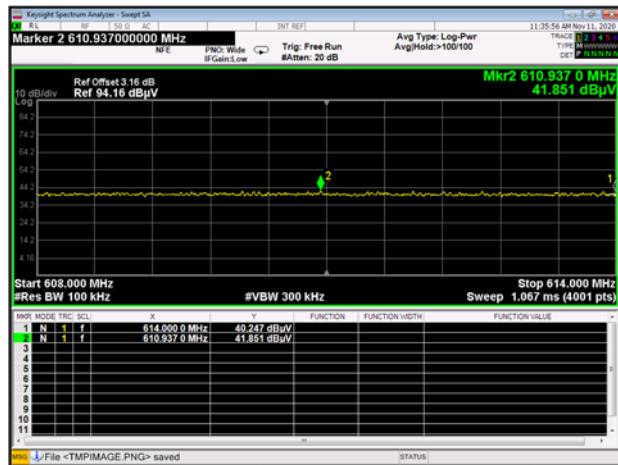


HIGH CHANNEL, PEAK

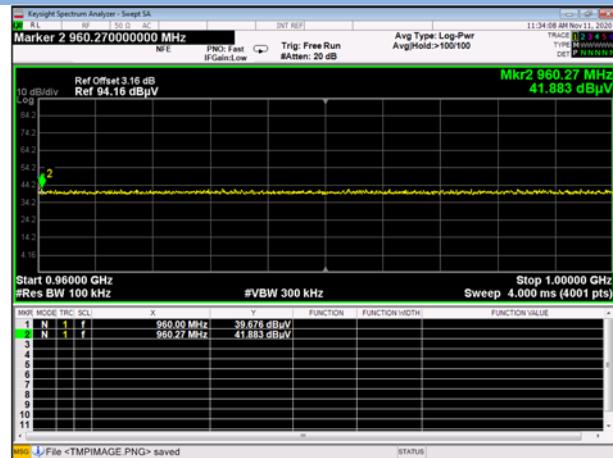


HIGH CHANNEL, AV

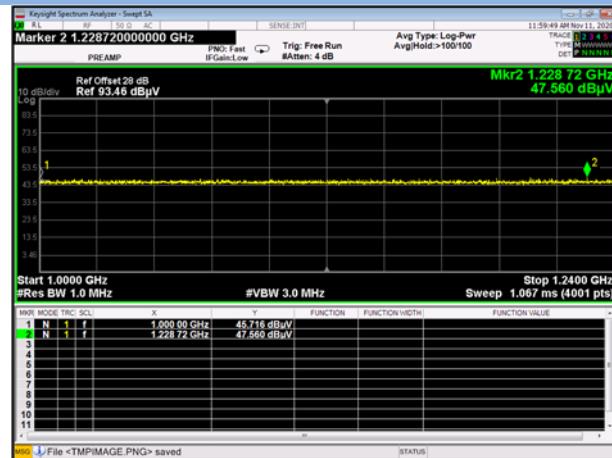


HOPPING LOW CHANNEL, PEAK

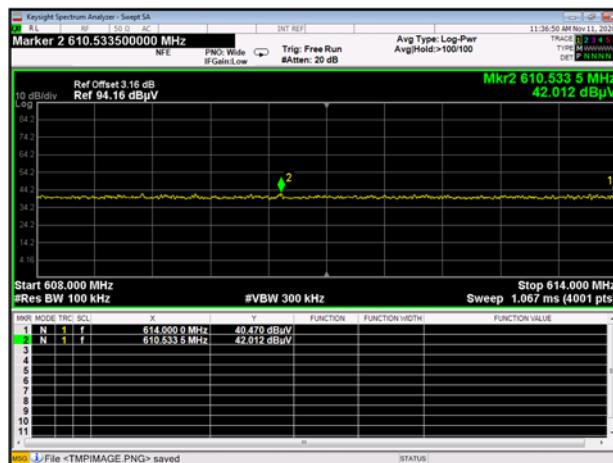

HOPPING HIGH CHANNEL, PEAK

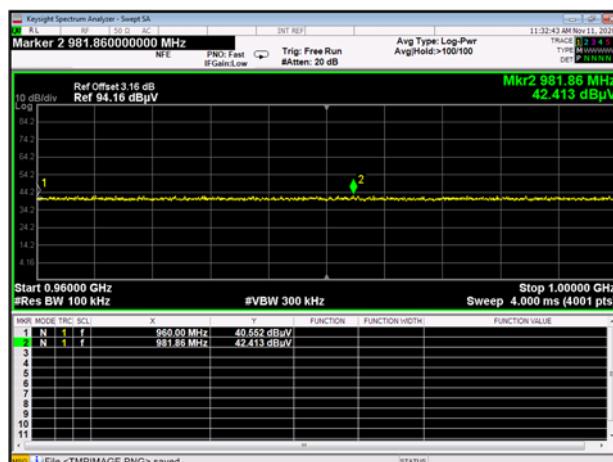

HOPPING HIGH CHANNEL, AV

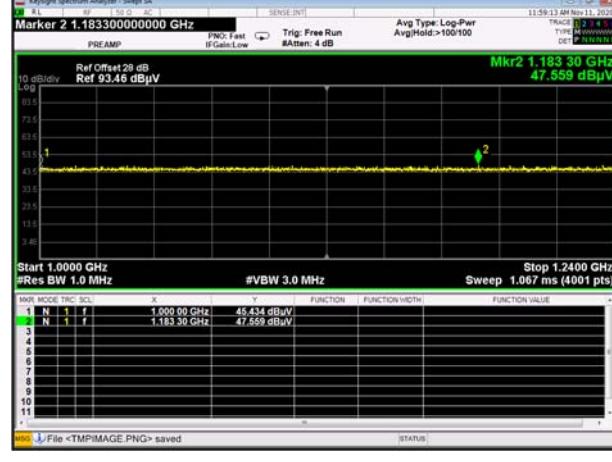

ANNEX B TEST SETUP PHOTOS

Please refer the document "BL-SZ20A0402-AR.PDF".

ANNEX C EUT EXTERNAL PHOTOS

Please refer the document "BL-SZ20A0402-AW.PDF".

ANNEX D EUT INTERNAL PHOTOS

Please refer the document "BL-SZ20A0402-AI.PDF".

--END OF REPORT--