

# FCC RADIO TEST REPORT

according to

47 CFR FCC Part 15 Subpart C § 15.247

**Equipment** : RTLS Asset & Personnel RFID Tags  
**Model No.** : CS3151BB2  
**Brand Name** : CSL  
**Filing Type** : New Application  
**Applicant** : **Convergence Systems Limited**  
: 12/F, Chung Nam Building, #1 Lockhart Road, Wan Chai,  
Hong Kong  
**FCC ID** : UB4CS3151BB2  
**Manufacturer** : **Convergence Systems Limited**  
: 12/F, Chung Nam Building, #1 Lockhart Road, Wan Chai,  
Hong Kong  
**Received Date** : Jan. 04, 2010  
**Final Test Date** : Jan. 26, 2010

## Statement

**Test result included is only for the RFID part of the product.**

The test result in this report refers exclusively to the presented test model / sample.

Without written approval of SPORTON International Inc., the test report shall not be reproduced except in full.

The measurements and test results shown in this test report were made in accordance with the procedures and found in compliance with the limit given in **ANSI C63.4-2003** and **47 CFR FCC Part 15 Subpart C**.

The test equipment used to perform the test is calibrated and traceable to NML/ROC.



**SPORTON International Inc.**

6F, No. 106, Sec. 1, Hsin Tai Wu Rd., Hsi Chih, Taipei Hsien, Taiwan, R.O.C.

**Table of Contents**

**1 SUMMARY OF THE TEST RESULT ..... 2**

**2 GENERAL INFORMATION..... 3**

2.1 Product Details ..... 3

2.2 Accessories ..... 3

2.3 Table for Filed Antenna ..... 3

2.4 Table for Carrier Frequencies ..... 3

2.5 Table for Test Modes ..... 4

2.6 Table for Testing Locations ..... 4

2.7 Table for Supporting Units..... 4

2.8 Table for Parameters of Test Software Setting ..... 4

2.9 EUT Operation during Test ..... 5

2.10 Test Configuration ..... 5

**3 TEST RESULT ..... 6**

3.1 AC Power Line Conducted Emissions Measurement..... 6

3.2 Maximum Conducted Output Power Measurement ..... 10

3.3 Power Spectral Density Measurement ..... 12

3.4 6dB Spectrum Bandwidth Measurement..... 14

3.5 Radiated Emissions Measurement..... 16

3.6 Band Edge and Fundamental Emissions Measurement ..... 24

3.7 Antenna Requirements..... 27

**4 LIST OF MEASURING EQUIPMENTS ..... 28**

**5 TEST LOCATION..... 30**

**6 TAF CERTIFICATE OF ACCREDITATION ..... 31**

**APPENDIX A. MAXIMUM PERMISSIBLE EXPOSURE..... A1 ~ A3**

**APPENDIX B. TEST PHOTOS ..... B1 ~ B6**

**APPENDIX C. PHOTOGRAPHS OF EUT ..... C1 ~ C9**




# CERTIFICATE OF COMPLIANCE

according to

47 CFR FCC Part 15 Subpart C § 15.247

Equipment : RTLS Asset & Personnel RFID Tags  
Model No. : CS3151BB2  
Brand Name : CSL  
Applicant : Convergence Systems Limited  
12/F, Chung Nam Building, #1 Lockhart Road,  
Wan Chai, Hong Kong

Sporton International as requested by the applicant to evaluate the EMC performance of the product sample received on Jan. 04, 2010 would like to declare that the tested sample has been evaluated and found to be in compliance with the tested rule parts. The data recorded as well as the test configuration specified is true and accurate for showing the sample's EMC nature.



Wayne Hsu

**SPORTON International Inc.**

6F, No.106, Sec. 1, Hsin Tai Wu Rd., Hsi Chih, Taipei Hsien, Taiwan, R.O.C.

**1 SUMMARY OF THE TEST RESULT**

<b>Applied Standard: 47 CFR FCC Part 15 Subpart C</b>				
<b>Part</b>	<b>Rule Section</b>	<b>Description of Test</b>	<b>Result</b>	<b>Under Limit</b>
3.1	15.207	AC Power Line Conducted Emissions	Complies	9.41 dB
3.2	15.247(b)(3)	Maximum Conducted Output Power	Complies	27.99 dB
3.3	15.247(e)	Power Spectral Density	Complies	47.51 dB
3.4	15.247(a)(2)	6dB Spectrum Bandwidth	Complies	-
3.5	15.247(d)	Radiated Emissions	Complies	3.22 dB
3.6	15.247(d)	Band Edge Emissions	Complies	1.20 dB
3.7	15.203	Antenna Requirements	Complies	-

<b>Test Items</b>	<b>Uncertainty</b>	<b>Remark</b>
AC Power Line Conducted Emissions	±2.3dB	Confidence levels of 95%
Maximum Peak Conducted Output Power	±0.8dB	Confidence levels of 95%
Power Spectral Density	±0.5dB	Confidence levels of 95%
6dB Spectrum Bandwidth	±8.5×10 <sup>-8</sup>	Confidence levels of 95%
Radiated Emissions (9kHz~30MHz)	±0.8dB	Confidence levels of 95%
Radiated Emissions (30MHz~1000MHz)	±1.9dB	Confidence levels of 95%
Radiated / Band Edge Emissions (1GHz~18GHz)	±1.9dB	Confidence levels of 95%
Radiated Emissions (18GHz~40GHz)	±1.9dB	Confidence levels of 95%
Temperature	±0.7	Confidence levels of 95%
Humidity	±3.2%	Confidence levels of 95%
DC / AC Power Source	±1.4%	Confidence levels of 95%

**2 GENERAL INFORMATION**

**2.1 Product Details**

Only the radio detail of RFID is shown in the table below. For more detailed features description, please refer to the manufacturer’s specifications or user’s manual.

Items	Description
Power Type	5V from host ; 3.6V 250Mah Li-polymer
Modulation	Chirp Spread Spectrum (CSS)
Frequency Range	2400 ~ 2483MHz
Channel Number	1
Channel Band Width (99%)	53.40 MHz
Conducted Output Power	2.01 dBm

**2.2 Accessories**

Accessory	Brand	Part number
USB Cable	Molex	0687840001

**2.3 Table for Filed Antenna**

Ant.	Antenna Type	Connector	Gain (dBi)	Remark
1	SMD chip antenna	Fix on board	2.0	RFID
2	SMD chip antenna	Fix on board	1.5	RFID

Note: Antenna 1 and 2 are of the same type. Antenna 1 with higher gain was test in final test report.

**2.4 Table for Carrier Frequencies**

**Frequency Allocation for RFID**

Frequency Band	Channel No.	Frequency
2400~2483 MHz	1	2442 MHz

**2.5 Table for Test Modes**

Preliminary tests were performed in different data rate to find the worst radiated emission. The data rate shown in the table below is the worst-case rate with respect to the specific test item. Investigation has been done on the entire possible configuration for searching the worst cases. The following table is a list of the test modes shown in this test report.

Test Items	Mode	Channel
AC Power Line Conducted Emissions	Charger Mode	-
Maximum Conducted Output Power Power Spectral Density 6dB Spectrum Bandwidth Radiated Emissions Below 1GHz and Above 1GHz Band Edge and Fundamental Emissions	RFID	1

**2.6 Table for Testing Locations**

Test Site No.	Site Category	Location
CO04-HY	Conduction	Hwa Ya
TH01-HY	OVEN Room	Hwa Ya
03CH01-HY	SAC	Hwa Ya

Semi Anechoic Chamber (SAC).

**2.7 Table for Supporting Units**

Support Unit	Brand	Model	FCC ID	Remark
Notebook	DELL	D505	DoC	Conducted
(USB) Mouse	Microsoft	1004	DoC	
Modem	ACEEX	DM1414	IFAXDM1414	

Note: For radiated emissions only EUT tested.

**2.8 Table for Parameters of Test Software Setting**

During testing, Channel & Power Controlling Software provided by the customer was used to control the operating channel as well as the output power level. The RF output power selection is for the setting of RF output power expected by the customer and is going to be fixed on the firmware of the final end product.

**Power Parameters of RFID**

Test Software Version	rdkctIC
Frequency	2442 MHz
RFID	63

**2.9 EUT Operation during Test**

Turn on the power of all equipment.

Conducted emissions:


The NB sends “ H “ messages to the panel, and the panel displays “ H “ patterns on the screen.

Radiated emissions:

- Executed “rdkctlC” to keep transmitting signals at fixed frequency.

**2.10 Test Configuration**

**2.10.1 Radiation Emissions Test Configuration**





### 3 TEST RESULT

#### 3.1 AC Power Line Conducted Emissions Measurement

##### 3.1.1 Limit

For this product which is designed to be connected to the AC power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed below limits table.

**Class B**

Frequency (MHz)	QP Limit (dBuV)	AV Limit (dBuV)
0.15~0.5	66~56	56~46
0.5~5	56	46
5~30	60	50

##### 3.1.2 Measuring Instruments and Setting


Please refer to section 4 of equipments list in this report. The following table is the setting of the receiver.

Receiver Parameters	Setting
Attenuation	10 dB
Start Frequency	0.15 MHz
Stop Frequency	30 MHz
IF Bandwidth	9 KHz

##### 3.1.3 Test Procedures

1. The EUT warm up about 15 minutes then start test.
2. Configure the EUT according to ANSI C63.4. The EUT or host of EUT has to be placed 0.4 meter far from the conducting wall of the shielding room and at least 80 centimeters from any other grounded conducting surface.
3. Connect EUT or host of EUT to the power mains through a line impedance stabilization network (LISN).
4. All the support units are connected to the other LISNs. The LISN should provide 50uH/50ohms coupling impedance.
5. The frequency range from 150 KHz to 30 MHz was searched.
6. Set the test-receiver system to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
7. The measurement has to be done between each power line and ground at the power terminal.

3.1.4 Test Setup Layout

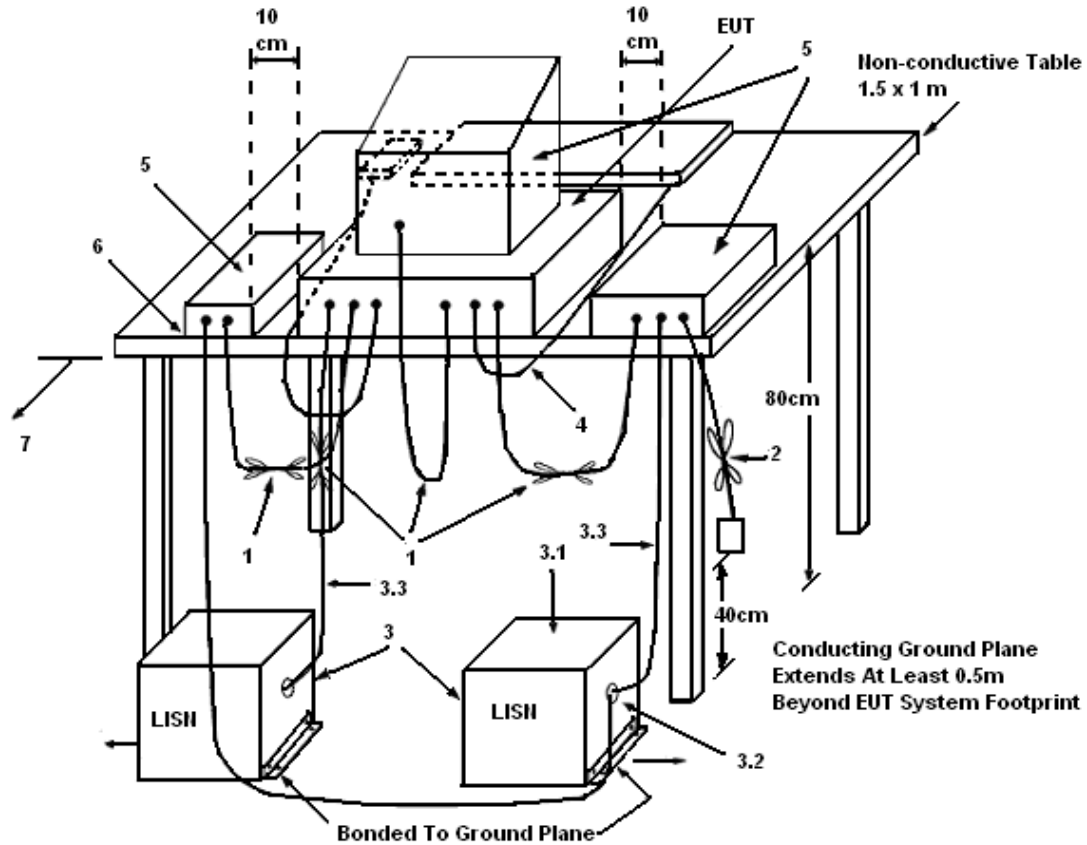

LEGEND:

- (1) Interconnecting cables that hang closer than 40 cm to the ground plane shall be folded back and forth in the center forming a bundle 30 to 40 cm long.
- (2) I/O cables that are not connected to a peripheral shall be bundled in the center. The end of the cable may be terminated, if required, using the correct terminating impedance. The overall length shall not exceed 1 m.
- (3) EUT connected to one LISN. Unused LISN measuring port connectors shall be terminated in 50 Ω. LISN can be placed on top of, or immediately beneath, reference ground plane.
- (3.1) All other equipment powered from additional LISN(s).
- (3.2) Multiple outlet strip can be used for multiple power cords of non-EUT equipment.
- (3.3) LISN at least 80 cm from nearest part of EUT chassis.
- (4) Cables of hand-operated devices, such as keyboards, mice, etc., shall be placed as for normal use.
- (5) Non-EUT components of EUT system being tested.
- (6) Rear of EUT, including peripherals, shall all be aligned and flush with rear of tabletop.
- (7) Rear of tabletop shall be 40 cm removed from a vertical conducting plane that is bonded to the ground plane.

3.1.5 Test Deviation

There is no deviation with the original standard.


3.1.6 EUT Operation during Test

The EUT was placed on the test table and programmed in normal function.

3.1.7 Results of AC Power Line Conducted Emissions Measurement


<b>Final Test Date</b>	Jan. 25, 2010	<b>Test Site No.</b>	CO04-HY
<b>Temperature</b>	24	<b>Humidity</b>	48%
<b>Test Engineer</b>	Angus	<b>Configuration</b>	Charger Mode

Line

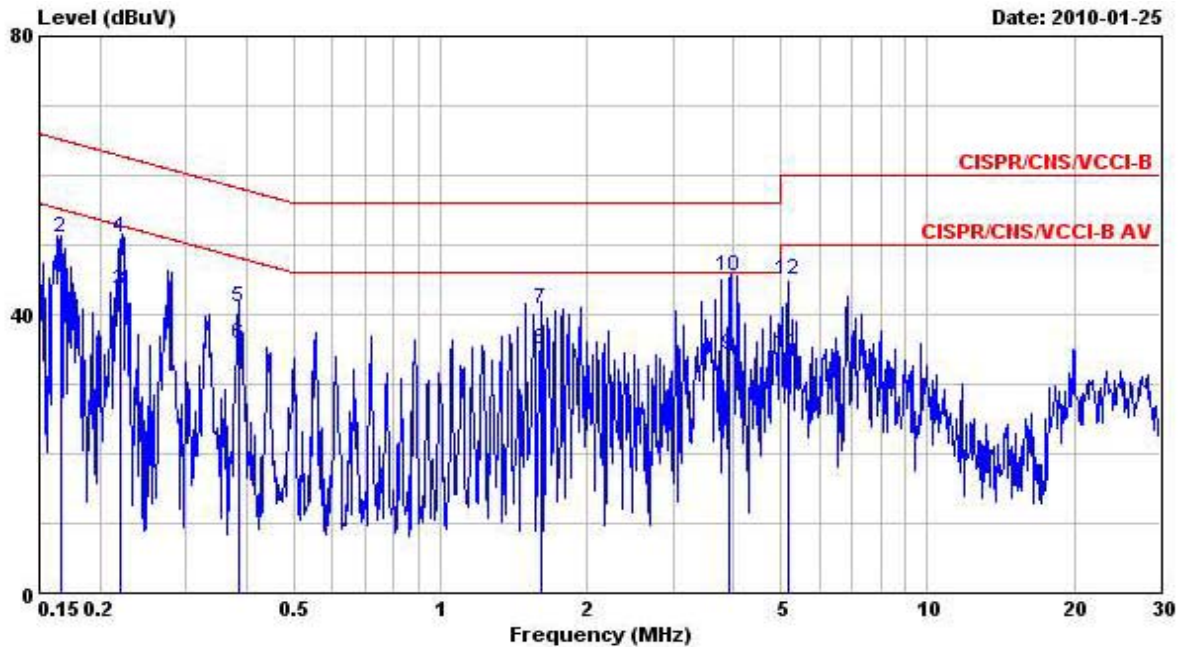

	Freq	Level	Over Limit	Limit Line	Read Level	LISN Factor	Cable Loss	Remark
	MHz	dBuV	dB	dBuV	dBuV	dB	dB	
1	0.1658960	45.21	-9.95	55.16	44.95	0.09	0.17	Average
2	0.1658960	51.04	-14.12	65.16	50.78	0.09	0.17	QP
3	@0.2207270	43.38	-9.41	52.79	43.26	0.08	0.04	Average
4	0.2207270	51.10	-11.69	62.79	50.98	0.08	0.04	QP
5	0.3865810	41.14	-17.00	58.14	40.98	0.09	0.07	QP
6	0.3865810	35.90	-12.24	48.14	35.74	0.09	0.07	Average
7	1.605	40.85	-15.15	56.00	40.47	0.12	0.26	QP
8	1.605	34.99	-11.01	46.00	34.61	0.12	0.26	Average
9	3.928	34.12	-11.88	46.00	33.54	0.16	0.42	Average
10	3.928	45.58	-10.42	56.00	45.00	0.16	0.42	QP
11	5.200	34.34	-15.66	50.00	33.74	0.19	0.41	Average
12	5.200	45.08	-14.92	60.00	44.48	0.19	0.41	QP

Neutral

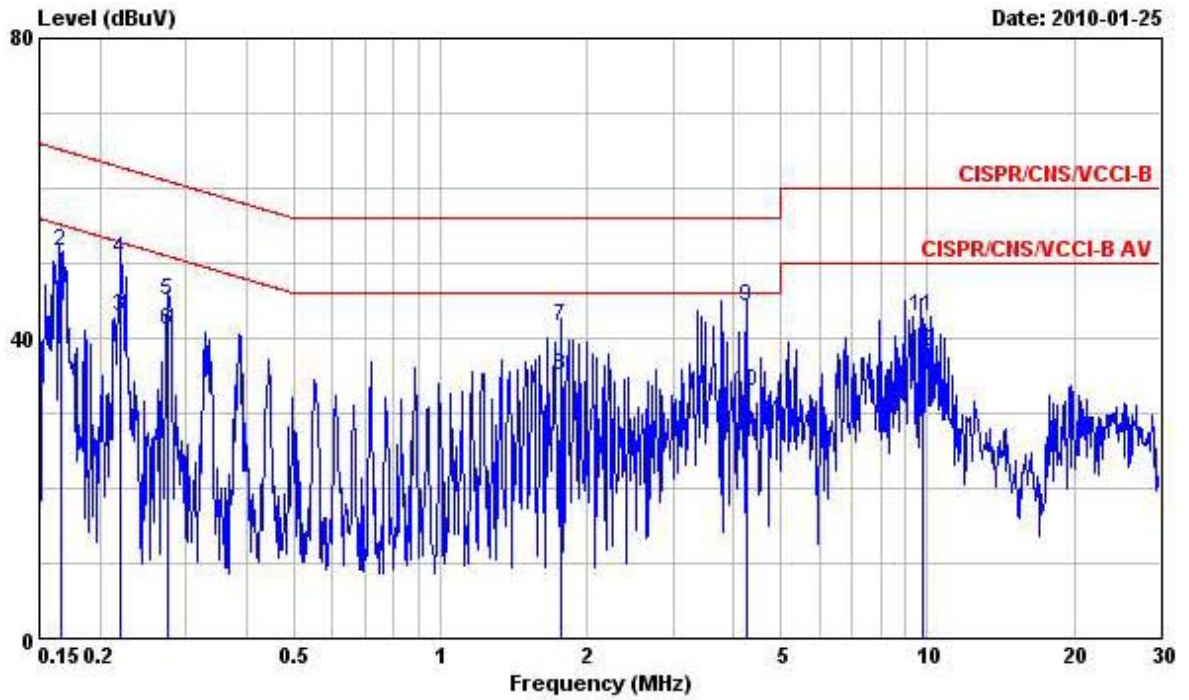

	Freq	Level	Over	Limit	Read	LISN	Cable	Remark
	MHz	dBuV	Limit	Line	Level	Factor	Loss	
			dB	dBuV	dBuV	dB	dB	
1	0.1656380	45.11	-10.07	55.18	44.86	0.08	0.17	Average
2	0.1656380	51.48	-13.70	65.18	51.23	0.08	0.17	QP
3	0.2207090	42.79	-10.00	52.79	42.67	0.08	0.04	Average
4	0.2207090	50.60	-12.19	62.79	50.48	0.08	0.04	QP
5	0.2762480	45.04	-15.89	60.93	44.91	0.08	0.05	QP
6	0.2762480	41.07	-9.86	50.93	40.94	0.08	0.05	Average
7	1.770	41.52	-14.48	56.00	41.11	0.11	0.30	QP
8	1.770	34.96	-11.04	46.00	34.55	0.11	0.30	Average
9	4.257	44.19	-11.81	56.00	43.61	0.16	0.42	QP
10	4.257	32.86	-13.14	46.00	32.28	0.16	0.42	Average
11	9.732	42.98	-17.02	60.00	42.33	0.26	0.39	QP
12	9.732	38.26	-11.74	50.00	37.61	0.26	0.39	Average

Note:

Level = Read Level + LISN Factor + Cable Loss.

**3.2 Maximum Conducted Output Power Measurement**

**3.2.1 Limit**

For systems using digital modulation in the 2400-2483.5MHz, the limit for peak output power is 30dBm. The limited has to be reduced by the amount in dB that the gain of the antenna exceed 6dBi. In case of point-to-point operation, the limit has to be reduced by 1dB for every 3dB that the directional gain of the antenna exceeds 6dBi.

**3.2.2 Measuring Instruments and Setting**


Please refer to section 4 of equipments list in this report. The following table is the setting of the spectrum analyzer.

Power Meter Parameter	Setting
Attenuation	Auto
Span Frequency	Encompass the entire emissions bandwidth (EBW) of the signal
RB	1000 kHz
VB	3000 kHz
Detector	rms
Trace	Max Hold
Sweep Time	Auto

**3.2.3 Test Procedures**

1. The transmitter output (antenna port) was connected to the spectrum analyzer.
2. Test was performed in accordance with Measurement of Digital Transmission Systems Operating under Section 15.247.

**3.2.4 Test Setup Layout**

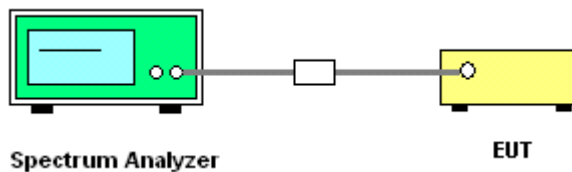

**3.2.5 Test Deviation**

There is no deviation with the original standard.

**3.2.6 EUT Operation during Test**

The EUT was programmed to be in continuously transmitting mode.

**3.2.7 Test Result of Maximum Conducted Output Power**

<b>Final Test Date</b>	Jan. 04, 2010	<b>Test Site No.</b>	TH01-HY
<b>Temperature</b>	28	<b>Humidity</b>	58%
<b>Test Engineer</b>	Duncan	<b>Configuration</b>	RFID

<b>Channel</b>	<b>Frequency</b>	<b>Conducted Power (dBm)</b>	<b>Max. Limit (dBm)</b>	<b>Result</b>
1	2442 MHz	2.01	30.00	<b>Complies</b>

**3.3 Power Spectral Density Measurement**

**3.3.1 Limit**

For digitally modulated systems, the power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission.

**3.3.2 Measuring Instruments and Setting**


Please refer to section 4 of equipments list in this report. The following table is the setting of the spectrum analyzer.

Spectrum Parameter	Setting
Attenuation	Auto
Span Frequency	1.5MHz
RB	3 kHz
VB	30 kHz
Detector	Peak
Trace	Max Hold
Sweep Time	500s

**3.3.3 Test Procedures**

1. The transmitter output (antenna port) was connected to the spectrum analyzer.
2. Set RBW of spectrum analyzer to 3 kHz and VBW to 30 kHz. Set Detector to Peak, Trace to Max Hold.
3. Mark the frequency with maximum peak power as the center of the display of the spectrum.
4. Set the span to 1.5MHz and the sweep time to 500s and record the maximum peak value.

**3.3.4 Test Setup Layout**

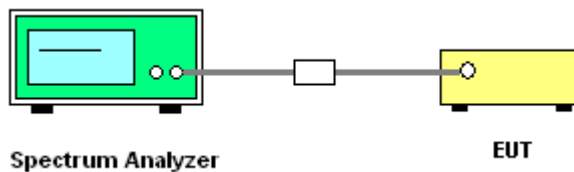

**3.3.5 Test Deviation**

There is no deviation with the original standard.

3.3.6 EUT Operation during Test


The EUT was programmed to be in continuously transmitting mode.

3.3.7 Test Result of Power Spectral Density

<b>Final Test Date</b>	Jan. 04, 2010	<b>Test Site No.</b>	TH01-HY
<b>Temperature</b>	28	<b>Humidity</b>	58%
<b>Test Engineer</b>	Duncan	<b>Configuration</b>	RFID

Channel	Frequency	Power Density (dBm)	Max. Limit (dBm)	Result
1	2442 MHz	-39.51	8.00	Complies

Power Density Plot on Configuration RFID / 2442 MHz

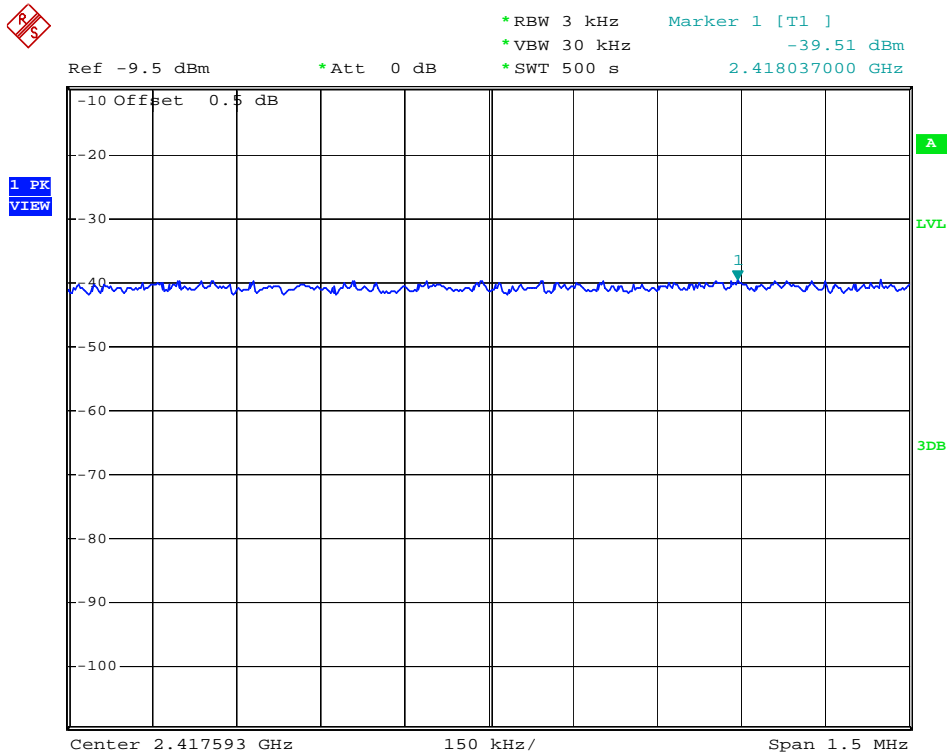

Date: 4.JAN.2010 11:23:47



**3.4 6dB Spectrum Bandwidth Measurement**

**3.4.1 Limit**

For digital modulation systems, the minimum 6dB bandwidth shall be at least 500 kHz.

**3.4.2 Measuring Instruments and Setting**


Please refer to section 4 of equipments list in this report. The following table is the setting of the spectrum analyzer.

Spectrum Parameters	Setting
Attenuation	Auto
Span Frequency	> 6dB Bandwidth
RB	100 kHz
VB	100 kHz
Detector	Peak
Trace	Max Hold
Sweep Time	Auto

**3.4.3 Test Procedures**

1. The transmitter output (antenna port) was connected to the spectrum analyzer in peak hold mode.
2. The resolution bandwidth of 100 kHz and the video bandwidth of 100 kHz were used.
3. Measured the spectrum width with power higher than 6dB below carrier.

**3.4.4 Test Setup Layout**

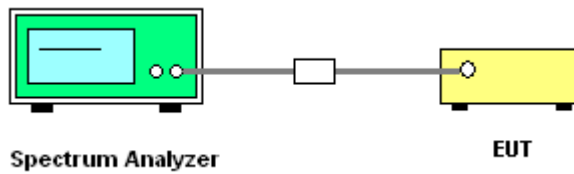

3.4.5 Test Deviation

There is no deviation with the original standard.

3.4.6 EUT Operation during Test


The EUT was programmed to be in continuously transmitting mode.

3.4.7 Test Result of 6dB Spectrum Bandwidth

Final Test Date	Jan. 04, 2010	Test Site No.	TH01-HY
Temperature	28	Humidity	58%
Test Engineer	Duncan	Configuration	RFID

Channel	Frequency	6dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)	Min. Limit (kHz)	Test Result
1	2442 MHz	50.10	53.40	500	Complies

6 dB Bandwidth Plot on Configuration RFID / 2442 MHz

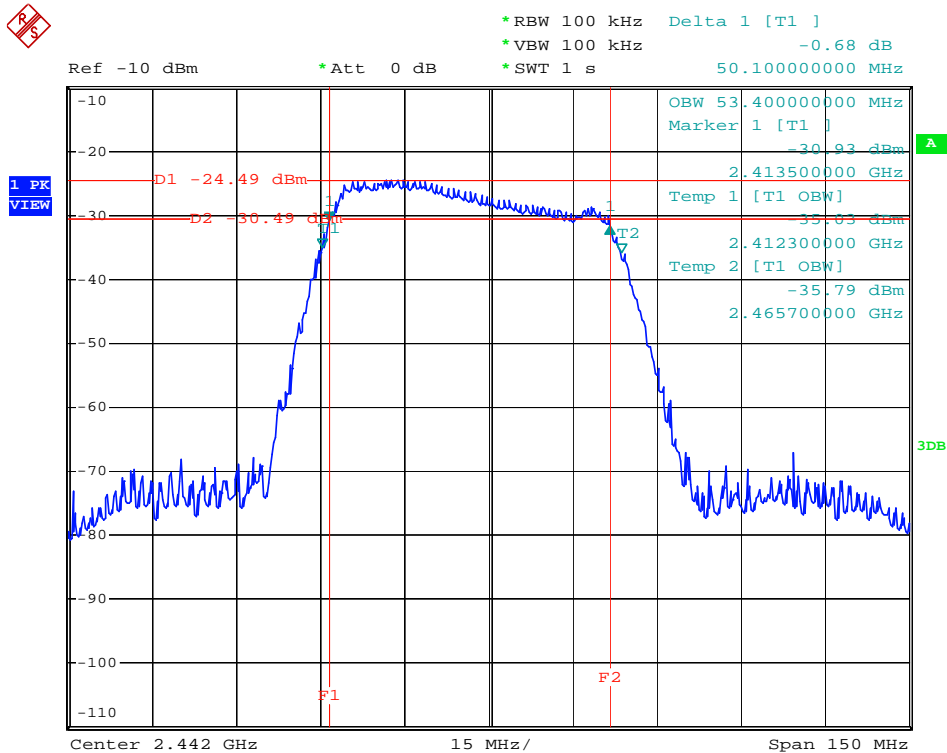

Date: 4.JAN.2010 11:19:52

**3.5 Radiated Emissions Measurement**

**3.5.1 Limit**

20dBc in any 100 kHz bandwidth outside the operating frequency band. In case the emission fall within the restricted band specified on 15.205(a), then the 15.209(a) limit in the table below has to be followed.

<b>Frequencies (MHz)</b>	<b>Field Strength (micorvolts/meter)</b>	<b>Measurement Distance (meters)</b>
0.009~0.490	2400/F(KHz)	300
0.490~1.705	24000/F(KHz)	30
1.705~30.0	30	30
30~88	100	3
88~216	150	3
216~960	200	3
Above 960	500	3

**3.5.2 Measuring Instruments and Setting**

Please refer to section 4 of equipments list in this report. The following table is the setting of spectrum analyzer and receiver.

<b>Spectrum Parameter</b>	<b>Setting</b>
Attenuation	Auto
Start Frequency	1000 MHz
Stop Frequency	10th carrier harmonic
RB / VB (Emission in restricted band)	1MHz / 1MHz for Peak, 1 MHz / 10Hz for Average
RB / VB (Emission in non-restricted band)	1MHz / 1MHz for Peak


<b>Receiver Parameter</b>	<b>Setting</b>
Attenuation	Auto
Start ~ Stop Frequency	9kHz~150kHz / RB 200Hz for QP
Start ~ Stop Frequency	150kHz~30MHz / RB 9kHz for QP
Start ~ Stop Frequency	30MHz~1000MHz / RB 120kHz for QP

**3.5.3 Test Procedures**


1. Configure the EUT according to ANSI C63.4. The EUT was placed on the top of the turntable 0.8 meter above ground. The phase center of the receiving antenna mounted on the top of a height-variable antenna tower was placed 3 meters far away from the turntable.
2. Power on the EUT and all the supporting units. The turntable was rotated by 360 degrees to determine the position of the highest radiation.
3. The height of the broadband receiving antenna was varied between one meter and four meters above ground to find the maximum emissions field strength of both horizontal and vertical polarization.
4. For each suspected emissions, the antenna tower was scan (from 1 M to 4 M) and then the turntable was rotated (from 0 degree to 360 degrees) to find the maximum reading.
5. Set the test-receiver system to Peak or CISPR quasi-peak Detect Function with specified bandwidth under Maximum Hold Mode.
6. For emissions above 1GHz, use 1MHz VBW and RBW for peak reading. Then 1MHz RBW and 10Hz VBW for average reading in spectrum analyzer.
7. When the radiated emissions limits are expressed in terms of the average value of the emissions, and pulsed operation is employed, the measurement field strength shall be determined by averaging over one complete pulse train, including blanking intervals, as long as the pulse train does not exceed 0.1 seconds. As an alternative (provided the transmitter operates for longer than 0.1 seconds) or in cases where the pulse train exceeds 0.1 seconds, the measured field strength shall be determined from the average absolute voltage during a 0.1 second interval during which the field strength is at its maximum value.
8. If the emissions level of the EUT in peak mode was 3 dB lower than the average limit specified, then testing will be stopped and peak values of EUT will be reported, otherwise, the emissions which do not have 3 dB margin will be repeated one by one using the quasi-peak method for below 1GHz.
9. For testing above 1GHz, the emissions level of the EUT in peak mode was lower than average limit (that means the emissions level in peak mode also complies with the limit in average mode), then testing will be stopped and peak values of EUT will be reported, otherwise, the emissions will be measured in average mode again and reported.
10. In case the emission is lower than 30MHz, loop antenna has to be used for measurement and the recorded data should be QP measured by receiver. High – Low scan is not required in this case.

### 3.5.4 Test Setup Layout

For radiated emissions below 30MHz

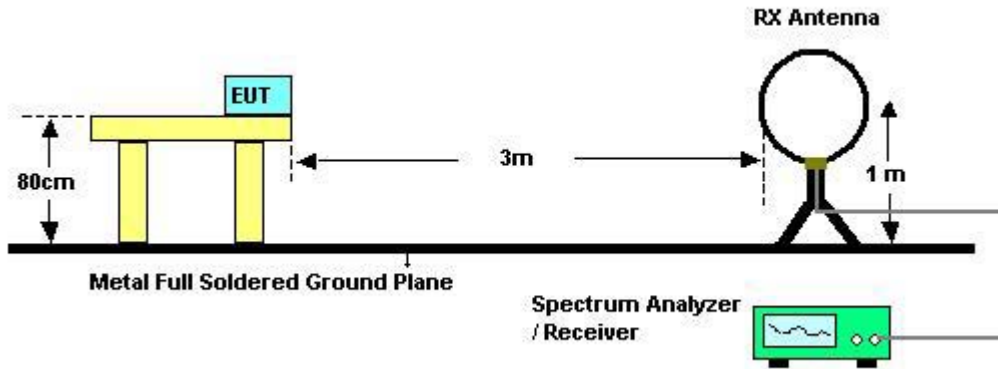

For radiated emissions above 30MHz

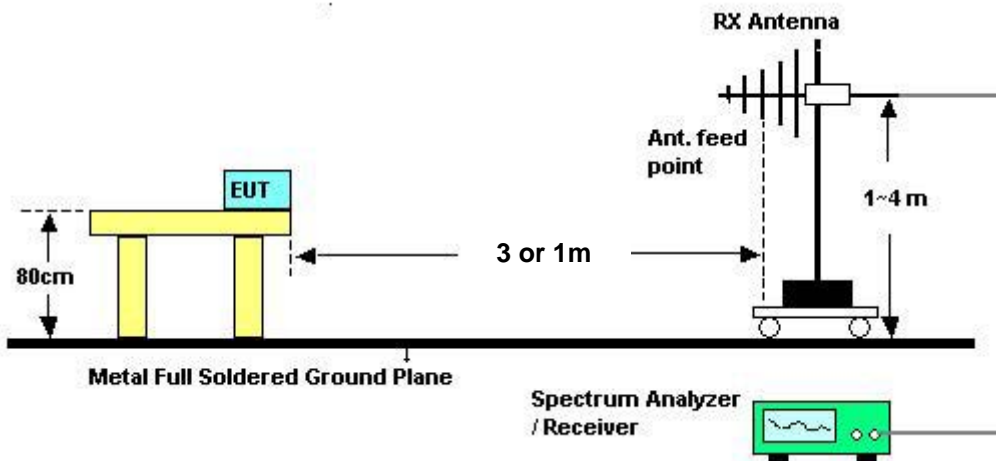

Above 10 GHz shall be extrapolated to the specified distance using an extrapolation factor of 20 dB/decade from 3m to 1m.

Distance extrapolation factor =  $20 \log (\text{specific distance [3m]} / \text{test distance [1m]})$  (dB);

Limit line = specific limits (dBuV) + distance extrapolation factor [9.54 dB].

### 3.5.5 Test Deviation

There is no deviation with the original standard.

### 3.5.6 EUT Operation during Test

The EUT was programmed to be in continuously transmitting mode.

**3.5.7 Results of Radiated Emissions (9kHz~30MHz)**

<b>Final Test Date</b>	Jan. 26, 2010	<b>Test Site No.</b>	03CH01-HY
<b>Temperature</b>	24	<b>Humidity</b>	59%
<b>Test Engineer</b>	Teary		

<b>Freq. (MHz)</b>	<b>Level (dBuV)</b>	<b>Over Limit (dB)</b>	<b>Limit Line (dBuV)</b>	<b>Remark</b>
-	-	-	-	See Note

Note:

The amplitude of spurious emissions that are attenuated by more than 20 dB below the permissible value has no need to be reported.


Distance extrapolation factor =  $40 \log (\text{specific distance} / \text{test distance})$  (dB);

Limit line = specific limits (dBuV) + distance extrapolation factor.

3.5.8 Results of Radiated Emissions (30MHz~1GHz)


Final Test Date	Jan. 26, 2010	Test Site No.	03CH01-HY
Temperature	24	Humidity	59%
Test Engineer	Teary	Configuration	RFID CH 1

Horizontal

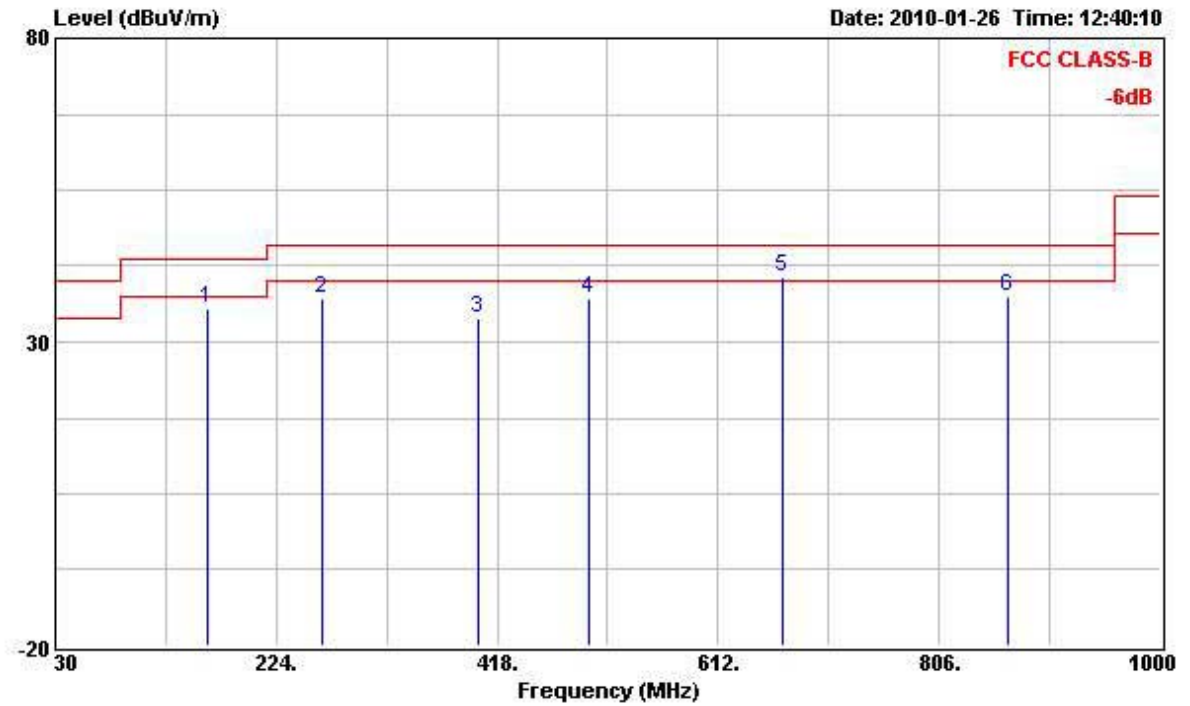

	Freq	Level	Over Limit	Limit Line	Read Level	Cable Loss	Probe Factor	Remark	Ant Pos	Table Pos
	MHz	dBUV/m	dB	dBUV/m	dBUV	dB	dB		cm	deg
1	163.860	35.37	-8.13	43.50	56.58	1.42	9.89	Peak	---	---
2	264.740	37.24	-8.76	46.00	54.90	1.87	12.84	Peak	---	---
3	400.540	33.87	-12.13	46.00	47.68	2.36	15.98	Peak	---	---
4	498.510	37.28	-8.72	46.00	48.87	2.71	17.70	Peak	---	---
5	668.260	40.57	-5.43	46.00	49.74	3.58	19.07	Peak	---	---
6	867.110	37.50	-8.50	46.00	44.92	4.01	20.21	Peak	---	---

Vertical

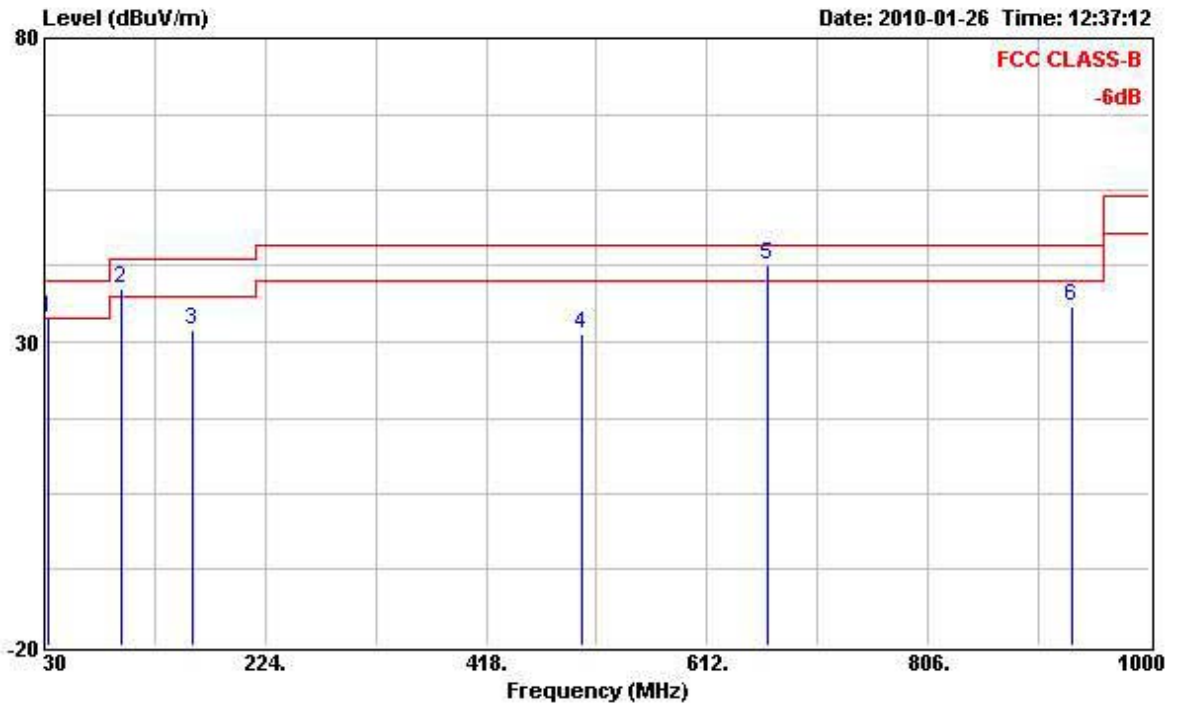

	Freq	Level	Over	Limit	Read	Cable	Probe	Remark	Ant	Table
	MHz	dBuV/m	Limit	Line	Level	Loss	Factor		Pos	Pos
			dB	dBuV/m	dBuV	dB	dB		cm	deg
1	32.910	33.84	-6.16	40.00	48.83	0.53	17.12	QP	---	---
2	97.900	38.89	-4.61	43.50	60.02	1.03	10.45	Peak	---	---
3	160.950	31.90	-11.60	43.50	52.99	1.41	10.03	Peak	---	---
4	501.420	31.32	-14.68	46.00	42.87	2.71	17.74	Peak	---	---
5	665.350	42.78	-3.22	46.00	51.94	3.60	19.06	Peak	---	---
6	932.100	36.00	-10.00	46.00	42.46	4.38	20.74	Peak	---	---

Note:

The amplitude of spurious emissions that are attenuated by more than 20dB below the permissible value has no need to be reported.

Emission level (dBUV/m) = 20 log Emission level (uV/m).


Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level.



**3.5.9 Results for Radiated Emissions (1GHz~10<sup>th</sup> Harmonic)**

<b>Final Test Date</b>	Jan. 26, 2010	<b>Test Site No.</b>	03CH01-HY
<b>Temperature</b>	24	<b>Humidity</b>	59%
<b>Test Engineer</b>	Teary	<b>Configuration</b>	RFID CH 1


**Horizontal**

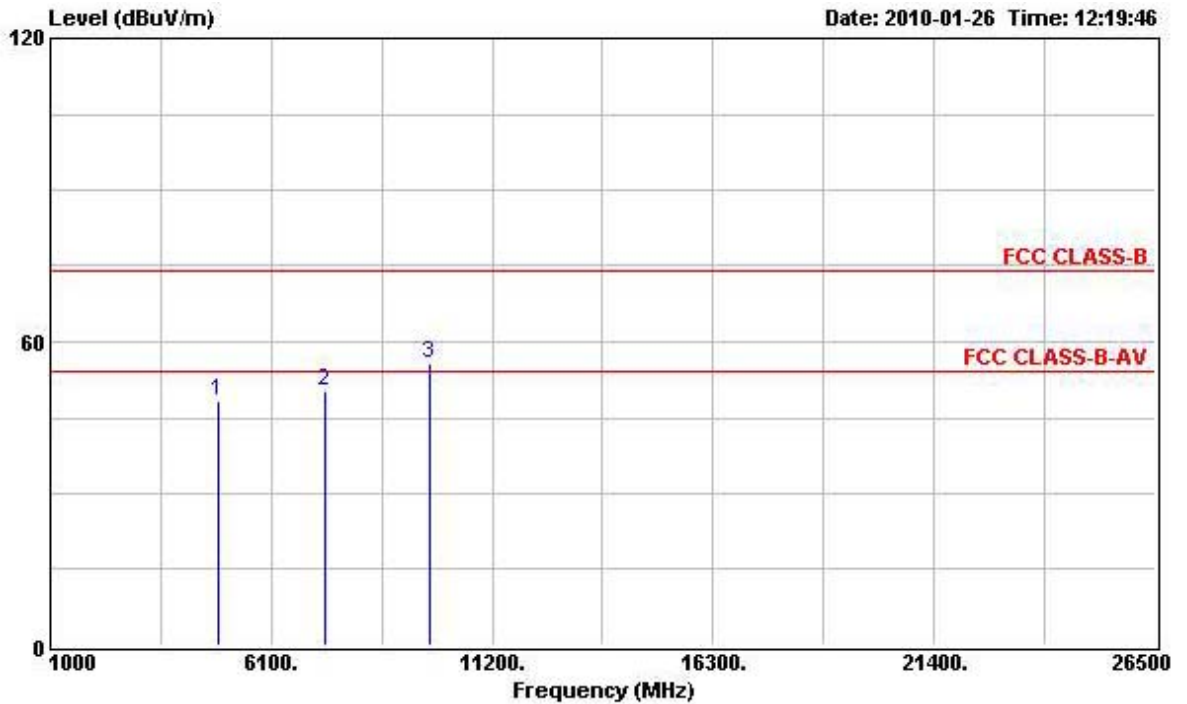

	<b>Freq</b>	<b>Level</b>	<b>Over Limit</b>	<b>Limit Line</b>	<b>Read Level</b>	<b>Cable Loss</b>	<b>Probe Factor</b>	<b>Remark</b>	<b>Ant Pos</b>	<b>Table Pos</b>
	<b>MHz</b>	<b>dBuV/m</b>	<b>dB</b>	<b>dBuV/m</b>	<b>dBuV</b>	<b>dB</b>	<b>dB</b>		<b>cm</b>	<b>deg</b>
<b>1</b>	<b>4884.600</b>	<b>48.36</b>	<b>-5.64</b>	<b>54.00</b>	<b>42.43</b>	<b>5.07</b>	<b>33.19</b>	<b>PK</b>	---	---
<b>2</b>	<b>7326.200</b>	<b>50.16</b>	<b>-3.84</b>	<b>54.00</b>	<b>40.37</b>	<b>6.22</b>	<b>35.99</b>	<b>PK</b>	---	---
<b>3</b>	<b>9768.200</b>	<b>55.53</b>			<b>41.89</b>	<b>7.34</b>	<b>38.65</b>	<b>Peak</b>	---	---

Note: The item 3 is on un-restricted band, so the limit is -20dB for the field strength of the fundamental emissions (see section 3.6.7).

Vertical

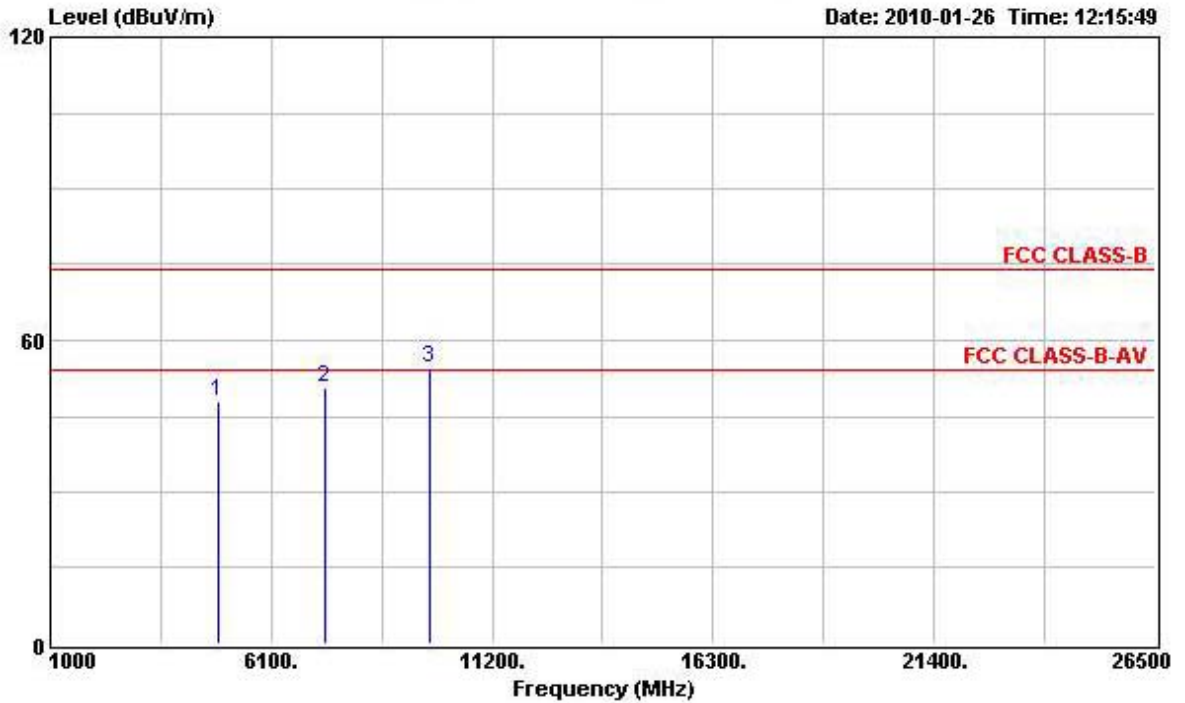

	Freq	Level	Over Limit	Limit Line	Read Level	Cable Loss	Probe Factor	Remark	Ant Pos	Table Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB	dB		cm	deg
1	4884.200	48.10	-5.90	54.00	42.20	5.07	33.16	PK	---	---
2	7326.200	50.59	-3.41	54.00	40.80	6.22	35.99	PK	---	---
3	9768.000	54.64			41.00	7.34	38.65	Peak	---	---

Note: The item 3 is on un-restricted band, so the limit is -20dB for the field strength of the fundamental emissions (see section 3.6.7).

Emission level (dBuV/m) = 20 log Emission level (uV/m).

Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level.

**3.6 Band Edge and Fundamental Emissions Measurement**

**3.6.1 Limit**

20dBc in any 100 kHz bandwidth outside the operating frequency band. In case the emission fall within the restricted band specified on 15.205(a), then the 15.209(a) limit in the table below has to be followed.

<b>Frequencies (MHz)</b>	<b>Field Strength (micorvolts/meter)</b>	<b>Measurement Distance (meters)</b>
0.009~0.490	2400/F(KHz)	300
0.490~1.705	24000/F(KHz)	30
1.705~30.0	30	30
30~88	100	3
88~216	150	3
216~960	200	3
Above 960	500	3

**3.6.2 Measuring Instruments and Setting**

Please refer to section 4 of equipments list in this report. The following table is the setting of the spectrum analyzer.

<b>Spectrum Parameter</b>	<b>Setting</b>
Attenuation	Auto
Span Frequency	100 MHz
RB / VB (Emission in restricted band)	1MHz / 1MHz for Peak, 1 MHz / 10Hz for Average
RB / VB (Emission in non-restricted band)	11MHz / 1MHz for Peak

**3.6.3 Test Procedures**

1. The test procedure is the same as section 3.5.3; only the frequency range investigated is limited to 100MHz around band edges.
2. In case the emission is fail due to the used RB/VB is too wide, marker-delta method of FCC Public Notice DA00-705 will be followed.

**3.6.4 Test Setup Layout**

This test setup layout is the same as that shown in section 3.5.4.

**3.6.5 Test Deviation**

There is no deviation with the original standard.

**3.6.6 EUT Operation during Test**

The EUT was programmed to be in continuously transmitting mode.

**3.6.7 Test Result of Band Edge and Fundamental Emissions**

<b>Final Test Date</b>	Jan. 26, 2010	<b>Test Site No.</b>	03CH01-HY
<b>Temperature</b>	24	<b>Humidity</b>	59%
<b>Test Engineer</b>	Teary	<b>Configuration</b>	RFID CH 1

**Channel 1**

	<b>Freq</b>	<b>Level</b>	<b>Over Limit</b>	<b>Limit Line</b>	<b>Read Level</b>	<b>Cable Loss</b>	<b>Probe Factor</b>	<b>Remark</b>	<b>Ant Pos</b>	<b>Table Pos</b>
	<b>MHz</b>	<b>dBuV/m</b>	<b>dB</b>	<b>dBuV/m</b>	<b>dBuV</b>	<b>dB</b>	<b>dB</b>		<b>cm</b>	<b>deg</b>
<b>1</b>	<b>2387.140</b>	<b>57.14</b>	<b>-16.86</b>	<b>74.00</b>	<b>25.27</b>	<b>3.58</b>	<b>28.29</b>	<b>Peak</b>	<b>---</b>	<b>---</b>
<b>2 X</b>	<b>2433.500</b>	<b>75.40</b>			<b>43.41</b>	<b>3.63</b>	<b>28.36</b>	<b>Peak</b>	<b>---</b>	<b>---</b>
<b>1</b>	<b>2387.900</b>	<b>42.80</b>	<b>-11.20</b>	<b>54.00</b>	<b>10.93</b>	<b>3.58</b>	<b>28.29</b>	<b>Average</b>	<b>---</b>	<b>---</b>
<b>2 X</b>	<b>2432.930</b>	<b>68.89</b>			<b>36.90</b>	<b>3.63</b>	<b>28.36</b>	<b>Average</b>	<b>---</b>	<b>---</b>

The item 2 is Fundamental Emissions.

Note:


Emission level (dBuV/m) = 20 log Emission level (uV/m).

Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level.

For Emission not in Restricted Band

Final Test Date	Jan. 04, 2010	Test Site No.	TH01-HY
Temperature	28	Humidity	58%
Test Engineer	Duncan	Configuration	RFID

Edge Plot on Configuration RFID / 2442 MHz

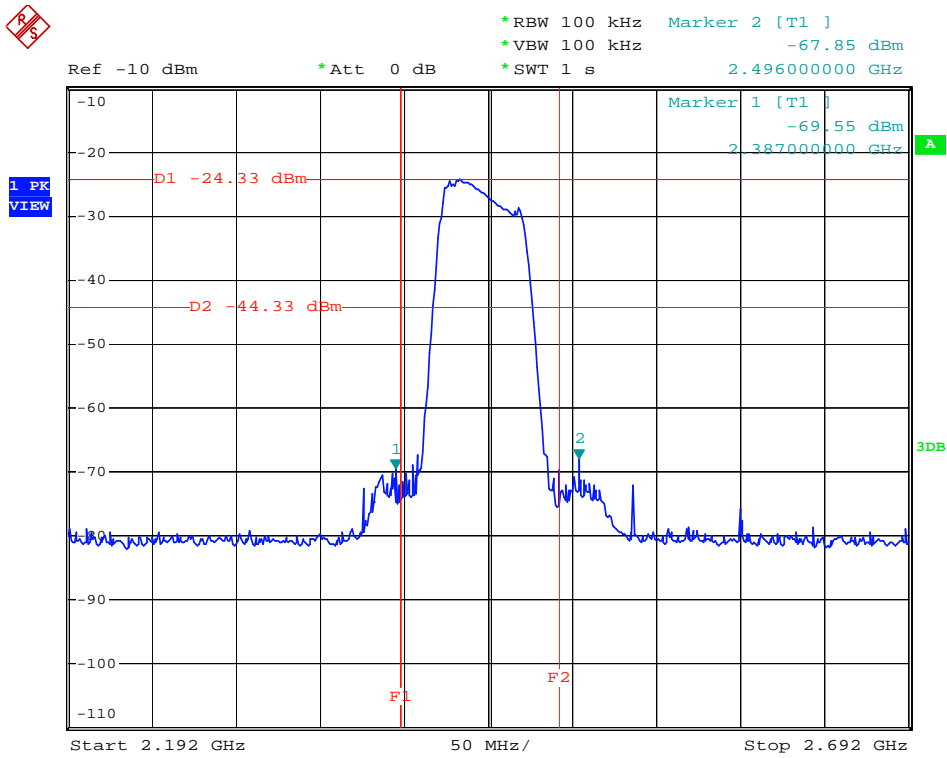

Date: 4.JAN.2010 11:21:29

### **3.7 Antenna Requirements**

#### **3.7.1 Limit**

Except for special regulations, the Low-power Radio-frequency Devices must not be equipped with any jacket for installing an antenna with extension cable. An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this Section. The manufacturer may design the unit so that the user can replace a broken antenna, but the use of a standard antenna jack or electrical connector is prohibited.

#### **3.7.2 Antenna Connector Construction**

Please refer to section 2.2 in this test report; antenna connector complied with the requirements.

**4 LIST OF MEASURING EQUIPMENTS**

<b>Instrument</b>	<b>Manufacturer</b>	<b>Model No.</b>	<b>Serial No.</b>	<b>Characteristics</b>	<b>Calibration Date</b>	<b>Remark</b>
EMC Receiver	R&S	ESCS 30	100174	9kHz – 2.75GHz	Apr. 15, 2009	Conduction (CO04-HY)
LISN	MessTec	NNB-2/16Z	99079	9kHz – 30MHz	Mar. 23, 2009	Conduction (CO04-HY)
LISN (Support Unit)	EMCO	3810/2NM	9703-1839	9kHz – 30MHz	Mar. 22, 2009	Conduction (CO04-HY)
RF Cable-CON	UTIFLEX	3102-26886-4	CB049	9kHz – 30MHz	Apr. 20, 2009	Conduction (CO04-HY)

Note: Calibration Interval of instruments listed above is one year.

<b>Instrument</b>	<b>Manufacturer</b>	<b>Model No.</b>	<b>Serial No.</b>	<b>Characteristics</b>	<b>Calibration Date</b>	<b>Remark</b>
Spectrum Analyzer	R&S	FSU26.5	100015	20Hz ~ 26.5GHz	Oct. 29, 2009	Conducted (TH01-HY)
Power Meter	R&S	NRVS	100444	DC ~ 40GHz	Jul. 31, 2009	Conducted (TH01-HY)
Power Sensor	R&S	NRV-Z51	100666	DC ~ 30GHz	Aug. 05, 2009	Conducted (TH01-HY)
Power Sensor	R&S	NRV-Z32	100057	30MHz ~ 6GHz	Jul. 31, 2009	Conducted (TH01-HY)
DC Power Source	G.W.	GPC-6030D	C671845	DC 1V ~ 60V	Mar. 13, 2009	Conducted (TH01-HY)
Temp. and Humidity Chamber	Giant Force	GTH-225-20-S	MAB0103-001	N/A	Aug. 06, 2009	Conducted (TH01-HY)
RF CABLE-1m	Jye Bao	RG142	CB034-1m	20MHz ~ 7GHz	Dec. 01, 2009	Conducted (TH01-HY)
RF CABLE-2m	Jye Bao	RG142	CB035-2m	20MHz ~ 1GHz	Dec. 01, 2009	Conducted (TH01-HY)

Note: Calibration Interval of instruments listed above is one year.

<b>Instrument</b>	<b>Manufacturer</b>	<b>Model No.</b>	<b>Serial No.</b>	<b>Characteristics</b>	<b>Calibration Date</b>	<b>Remark</b>
AC Power Source	HPC	HPA-500W	HPA-9100024	AC 0 ~ 300V	Jul. 12, 2009*	Conducted (TH01-HY)

Note: Calibration Interval of instruments listed above is two year.

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Remark
3m Semi Anechoic Chamber	SIDT FRANKONIA	SAC-3M	03CH01-HY	30 MHz - 1 GHz 3m	May 04, 2009	Radiation (03CH01-HY)
Amplifier	COM-POWER	PA-103	161050	1 MHz - 1 GHz	Oct. 26, 2009	Radiation (03CH01-HY)
Spectrum Analyzer	R&S	FSP 7	100644/007	9 kHz - 7 GHz	Aug. 17, 2009	Radiation (03CH01-HY)
Receiver	SCHAFFNER	SCR 3501	415	9 kHz - 1 GHz	Feb. 11, 2009	Radiation (03CH01-HY)
Bilog Antenna	SCHAFFNER	CBL6112B	2678	30 MHz - 2 GHz	Oct. 17, 2009	Radiation (03CH01-HY)
Turn Table	HD	DS 420	420/648/00	0 - 360 degree	N/A	Radiation (03CH01-HY)
Antenna Mast	HD	MA 240	240/558/00	1 m - 4 m	N/A	Radiation (03CH01-HY)
RF Cable-R03m	Jye Bao	RG142	CB019	30 MHz - 1 GHz	Dec. 07, 2009	Radiation (03CH01-HY)

Note: Calibration Interval of instruments listed above is one year.

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Remark
Loop Antenna	R&S	HFH2-Z2	860004/001	9 kHz - 30 MHz	Jul 28, 2008*	Radiation (03CH01-HY)

Note: Calibration Interval of instruments listed above is two year.



## 5 TEST LOCATION

SHIJR	ADD : 6Fl., No. 106, Sec. 1, Shintai 5th Rd., Shijr City, Taipei, Taiwan 221, R.O.C. TEL : 886-2-2696-2468 FAX : 886-2-2696-2255
HWA YA	ADD : No. 52, Hwa Ya 1st Rd., Kwei-Shan Hsiang, Tao Yuan Hsien, Taiwan, R.O.C. TEL : 886-3-327-3456 FAX : 886-3-318-0055
LINKOU	ADD : No. 30-2, Dingfu Tsuen, Linkou Shiang, Taipei, Taiwan 244, R.O.C TEL : 886-2-2601-1640 FAX : 886-2-2601-1695
DUNGHU	ADD : No. 3, Lane 238, Kangle St., Neihu Chiu, Taipei, Taiwan 114, R.O.C. TEL : 886-2-2631-4739 FAX : 886-2-2631-9740
JUNGHE	ADD : 7Fl., No. 758, Jungjeng Rd., Junghe City, Taipei, Taiwan 235, R.O.C. TEL : 886-2-8227-2020 FAX : 886-2-8227-2626
NEIHU	ADD : 4Fl., No. 339, Hsin Hu 2 <sup>nd</sup> Rd., Taipei 114, Taiwan, R.O.C. TEL : 886-2-2794-8886 FAX : 886-2-2794-9777
JHUBEI	ADD : No.8, Lane 724, Bo-ai St., Jhubei City, HsinChu County 302, Taiwan, R.O.C. TEL : 886-3-656-9065 FAX : 886-3-656-9085

6 TAF CERTIFICATE OF ACCREDITATION



Certificate No. : L1190-100107

財團法人全國認證基金會  
Taiwan Accreditation Foundation

Certificate of Accreditation

This is to certify that

**Sporton International Inc.**  
**EMC & Wireless Communications Laboratory**  
No.52, Hwa Ya 1st Rd., Hwa Ya Technology Park, Kwei-Shan Hsiang, Tao Yuan Hsien,  
Taiwan, R.O.C.

is accredited in respect of laboratory

- Accreditation Criteria : ISO/IEC 17025:2005
- Accreditation Number : 1190
- Originally Accredited : December 15, 2003
- Effective Period : January 10, 2010 to January 09, 2013
- Accredited Scope : Testing Field, see described in the Appendix
- Specific Accreditation Program : Accreditation Program for Designated Testing Laboratory for Commodities Inspection  
Accreditation Program for Telecommunication Equipment Testing Laboratory  
Accreditation Program for BSMI Mutual Recognition Arrangement with Foreign Authorities

Jay-San Chen  
President, Taiwan Accreditation Foundation  
Date : January 07, 2010

Pl, total 21 pages