



**DLB21XX**  
**WLAN Indoor/Outdoor Radio**

**User Manual**

## Table of Contents

<b>Preface .....</b>	<b>3</b>
FCC Information.....	3
<i>Electronic Emission Notices.....</i>	3
<i>FCC Frequency Interference Statement .....</i>	3
<i>FCC Radiation Exposure Statement .....</i>	3
<i>Antenna Installation.....</i>	3
Installation Requirements .....	3
Packing List.....	4
<b>Quick Start Guides .....</b>	<b>5</b>
Access Point (Bridged) .....	5
Access Point (Router).....	6
Access Point Client Mode.....	8
AP Client Router (WISP) .....	11
WDS Point-to-Point Link .....	14
Configuring Universal Repeater .....	17
<b>Wireless Setup .....</b>	<b>19</b>
Initial Configuration .....	19
Operation Mode .....	19
Router .....	20
Bridge.....	20
WISP (Wireless ISP) .....	20
<b>Wireless Configuration .....</b>	<b>22</b>
Basic Settings .....	22
Disable Wireless LAN Interface .....	22
Band.....	22
Mode .....	22
Network Type .....	23
SSID.....	23
Channel Number.....	23
Advanced Settings .....	25
Authentication Type.....	25
Fragment Threshold.....	25
RTS Threshold.....	25
Beacon Interval .....	25
ACK Timing .....	26
Client Expired Time.....	26
MTU Size .....	26
Data Rate.....	26
Preamble Type.....	26
Broadcast SSID .....	26
IAPP .....	26
802.11g Protection .....	26
Block WLAN Relay (Isolate Client) .....	26
Turbo Mode .....	26
Transmit Power .....	27
Security .....	28
Encryption .....	28
WPA Authentication Mode.....	30
Access Control .....	30
WDS Settings.....	30
WDS Network Topology .....	31
Wireless Repeater.....	33
Wireless Bridge .....	34
Site Survey.....	34
Connecting Profile.....	34
<b>TCP/IP Configuration.....</b>	<b>36</b>
Configuring LAN Interface .....	36
Configuring DHCP Server .....	36
Configuring WAN Interface .....	36
Static IP.....	37

PPPoE.....	39
PPTP.....	40
Configuring Clone MAC Address .....	41
VPN Pass-through .....	44
Static Route Setup .....	44
Dynamic Route Setup.....	45
<b>Firewall Configuration.....</b>	<b>47</b>
Configuring LAN to WAN Firewall .....	47
Port Filtering.....	47
IP Filtering.....	47
MAC Filtering .....	47
Configuring Port Forwarding (Virtual Server) .....	48
Multiple Servers behind NAT Example: .....	48
Configuring DMZ.....	49
Configuring VPN .....	50
<b>Management Configuration.....</b>	<b>51</b>
Quality of Service (QoS) .....	51
QoS Rule settings .....	52
Current QoS setting table.....	52
Bandwidth Control.....	53
SNMP Agent.....	54
Upgrade Firmware .....	57
Firmware Types.....	57
Upgrading Firmware .....	57
Save/Reload Settings .....	57
Reset Setting to Factory Default Value.....	57
Password .....	58
<b>Using CLI Menu.....</b>	<b>59</b>
Start a SSH(Secure Shell) client session to login to the device.....	59
Execute CLI program .....	59
Menu Tree List .....	60
Password .....	60
<b>Auto Discovery Tool .....</b>	<b>62</b>
Discover .....	62
Setup IP .....	62
Detail.....	63
WDS.....	64
Active Clients .....	64
Connect to Web Server.....	64

# Preface

## FCC Information

### Electronic Emission Notices

This device complies with CFR 47 Part 15 of the FCC rules.

Operation is subject to the following two conditions:

- This device may not cause harmful interference.
- This device must accept any interference received, including interference that may cause undesired operation.

### FCC Frequency Interference Statement

This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to CFR47 Part 15.

These limits are designed to provide reasonable protection against harmful interference when the equipment is operated in a residential environment, not withstanding use in commercial, business and industrial environment.

This equipment generates, uses, and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. There is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from where the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.

Changes or modifications to this equipment not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.

### FCC Radiation Exposure Statement

To comply with FCC RF exposure requirements in section 1.1307, a minimum separation distance of 1.3 feet is required between the antenna and all occupational persons, and a minimum separation distance of 3.0 feet is required between the antenna and all public persons.

### Antenna Installation

**WARNING:** It is installer's responsibility to ensure that when using the outdoor antenna in the United States (or where FCC rules apply), only those antennas certified with the product are used. The use of any antenna other than those certified with the product is expressly forbidden in accordance to FCC rules CFR47 part 15.204. The installer should configure the output power level of antennas, according to country regulations and per antenna type. Professional installation is required of equipment with connectors to ensure compliance with health and safety issues.

## Installation Requirements

This guide is for the networking professional who installs and manages the Deliberant DLB21xx line of outdoor products

hereafter referred to as the “device”. To use this guide, you should have experience working with the TCP/IP configuration and be familiar with the concepts and terminology of wireless local area networks.

**NOTE:** Only those antennas that are of the same type and with lesser gain than those that are certified with this device may be used legally by the installer.

## Packing List

Before you start to install the device, make sure the package contains the following items :

- Wireless Outdoor Bridge unit \* 1
- Mounting Kit \* 1
- Power Over Ethernet Kit \* 1

# Quick Start Guides

The purpose of these guides is to provide sample configurations for some of the most common applications of the DLB21XX units.

## Access Point (Bridged)

This is how the radio is configured by default. This configuration bridges the ethernet and wireless interfaces and disables all NAT/firewall functions.

The screenshot shows the 'Operation Mode' configuration page for the Wireless LAN Series. The left sidebar contains a 'Site contents' menu with options: Wizard, Operation Mode, Wireless, TCP/IP, Firewall, Management, and Reboot. The main content area is titled 'Operation Mode' and includes a description: 'You can setup different modes to LAN and WLAN interface for NAT and bridging function.' There are three radio button options: 'Router', 'Bridge' (which is selected), and 'Wireless ISP'. Each option has a detailed description of its functionality. At the bottom, there are 'Apply Change' and 'Reset' buttons.

**Wireless LAN Series**

**Operation Mode**

You can setup different modes to LAN and WLAN interface for NAT and bridging function.

☐ **Router:** In this mode, the device is supposed to connect to internet via ADSL/Cable Modem. The NAT is enabled and PCs connected to WLAN share the same IP to ISP through WAN port. The connection type can be setup in WAN page by using PPPoE, DHCP client, PPTP client or static IP. 172.1.1.1 is the default static IP address for WAN port

☒ **Bridge:** In this mode, the ethernet port and wireless interface are bridged together and NAT function is disabled. All the WAN related function and firewall are not supported.

☐ **Wireless ISP:** In this mode, the wireless client will connect to ISP access point. The NAT is enabled and PCs connecting with ethernet port share the same IP to ISP through wireless LAN. *You must set the wireless to client mode first and connect to the ISP AP in Site-Survey page. The connection type can be setup in WAN page by using PPPoE, DHCP client, PPTP client or static IP.*

The first thing you will want to do is set the Operation Mode to Bridge mode. This configures the unit to bridge the interfaces together.

The screenshot shows the 'Wireless Basic Settings' configuration page for the Wireless LAN Series. The left sidebar contains a 'Site contents' menu with options: Wizard, Operation Mode, Wireless, Basic Settings, Advanced Settings, Security, Access Control, WDS settings, Site Survey, Connecting Profile, TCP/IP, Firewall, Management, and Reboot. The main content area is titled 'Wireless Basic Settings' and includes a description: 'This page is used to configure the parameters for wireless LAN clients which may connect to your Access Point. Here you may change wireless encryption settings as well as wireless network parameters. Enable universal repeater mode can let radio act as AP and client simultaneously but remember the channel must be as same as the connected AP.' There are several configuration fields: 'Disable Wireless LAN Interface' (checkbox), 'Band' (2.4 GHz (B+G)), 'Mode' (AP), 'Network Type' (Infrastructure), 'SSID' (ZPlus-G192), 'Channel Number' (11), and 'Show Active Clients' button. There are also checkboxes for 'Enable Mac Clone (Single Ethernet Client)' and 'Enable Universal Repeater Mode', followed by an 'Extended SSID' field. At the bottom, there is a table with columns: SSID, BSSID, Channel, Type, Encrypt, RSSI, and Quality. Below the table are 'Refresh', 'Apply Changes', and 'Reset' buttons.

**Wireless LAN Series**

**Wireless Basic Settings**

This page is used to configure the parameters for wireless LAN clients which may connect to your Access Point. Here you may change wireless encryption settings as well as wireless network parameters. Enable universal repeater mode can let radio act as AP and client simultaneously but remember the channel must be as same as the connected AP.

☐ **Disable Wireless LAN Interface**

Band: 2.4 GHz (B+G)

Mode: AP

Network Type: Infrastructure

SSID: ZPlus-G192

Channel Number: 11

☐ **Enable Mac Clone (Single Ethernet Client)**

☐ **Enable Universal Repeater Mode**

Extended SSID:

(once selected and applied, extended SSID and channel number will be updated)

SSID	BSSID	Channel	Type	Encrypt	RSSI	Quality
------	-------	---------	------	---------	------	---------

The second thing you will do is configure the Wireless Basic Settings. Make sure the 'Disable Wireless LAN Interface' checkbox is not checked. The Mode needs to be set to 'AP'. The SSID can also be changed at this point, if desired.

Wireless LAN Series

Site contents:

- Wizard
- Operation Mode
- Wireless
- LAN Interface**
- WAN Interface
- Route
- Firewall
- Management
- Reboot

### LAN Interface Setup

This page is used to configure the parameters for local area network which connects to the device. Here you may change the setting for IP Address, Subnet Mask, DHCP, etc..

IP Address:

Subnet Mask:

Default Gateway:

DHCP:

DHCP Client Range:  -

802.1d Spanning Tree:

Clone MAC Address:


MTU Size:

**NOTE:** For ease of management, you may also want to change the LAN IP address to reside on the subnet your other PCs will be on.


This is all you have to do for a basic bridged access point. You will need to reboot the unit for the changes to take effect.

## Access Point (Router)

This configuration is an access point with NAT enabled. The router is assigned a WAN address, and all connections on the wireless LAN side are masqueraded behind the WAN address. In this setup, the wireless connection is the LAN interface and the ethernet connection is the WAN interface. This setup is useful when multiple computers need network access, and there is a shortage of available IP addresses.

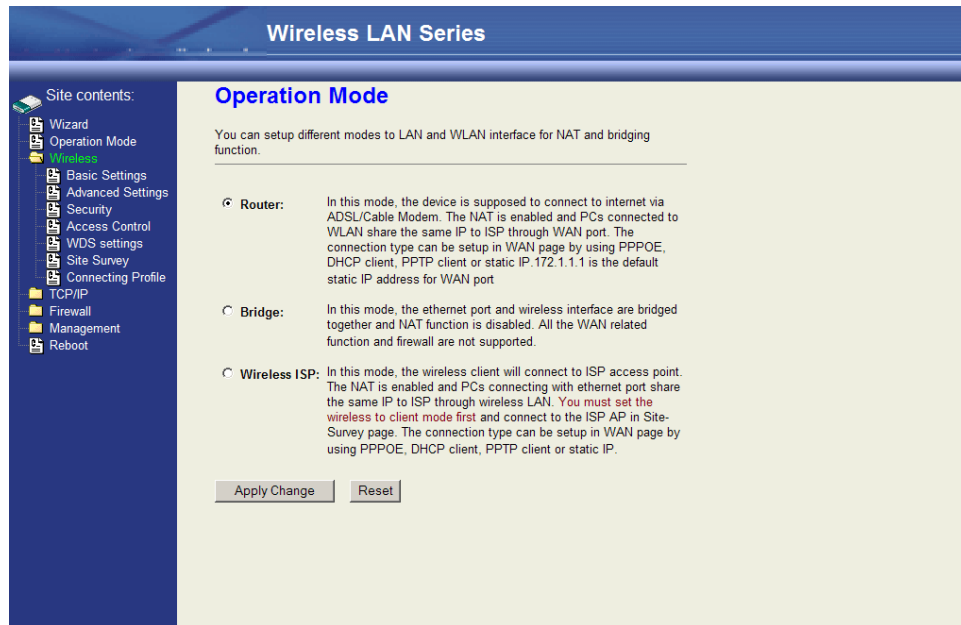

To enable the Access Point with routing, first change the Operation Mode to 'Router'.

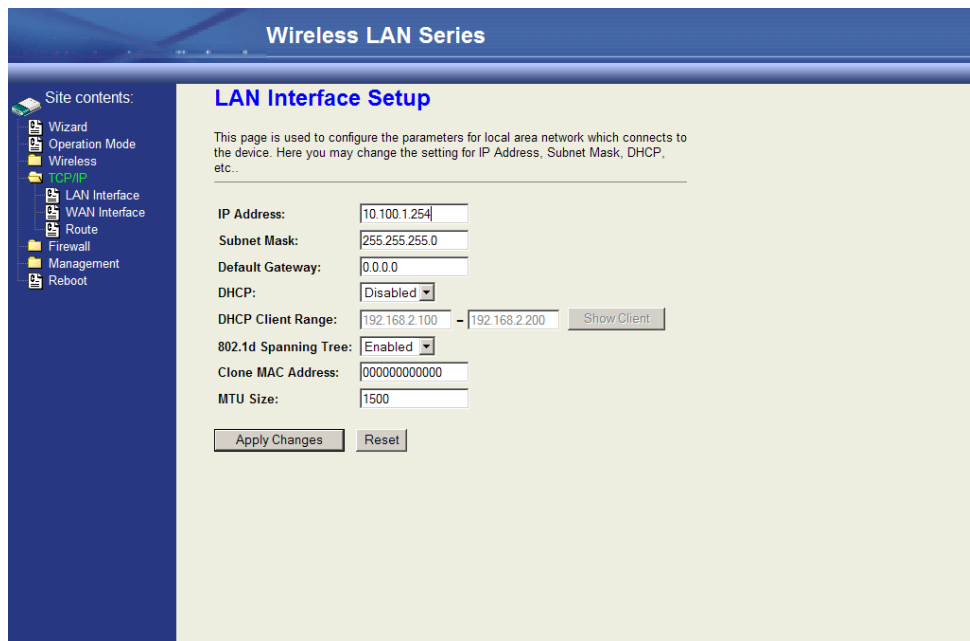

For ease of management, you may also want to change the LAN IP address to reside on the subnet your other PCs will be on when connected to the WLAN.



The WAN Interface will then need to be configured. In this example, the WAN interface will obtain its IP address by DHCP.

In the Wireless Basic Settings the Mode needs to be set to 'AP', and the Disable Wireless LAN Interface checkbox needs to be unchecked. The SSID can also be changed at this point, if desired.

These settings enable a basic routing access point.

## Access Point Client Mode

This device can be configured as a wireless Ethernet adapter. In this mode, the device can connect to the other wireless stations (Ad-Hoc network type) or Access Point (Infrastructure network type) and you don't need to install any driver.

In “Basic Settings” page, change the Mode to “Client” mode. And key in the SSID of the AP you want to connect then press “Apply Changes” button to apply the change.

**Wireless LAN Series**

Site contents:

- Wizard
- Operation Mode
- Wireless
  - Basic Settings**
  - Advanced Settings
  - Security
  - Access Control
  - WDS settings
  - Site Survey
- TCP/IP
- Firewall
- Management
- Reboot

### Wireless Basic Settings

This page is used to configure the parameters for wireless LAN clients which may connect to your Access Point. Here you may change wireless encryption settings as well as wireless network parameters. Enable universal repeater mode can let radio act as AP and client simultaneously but remember the channel must be as same as the connected AP.

☐ Disable Wireless LAN Interface

Band: 2.4 GHz (B+G)

Mode: Client

Network Type: Infrastructure

SSID: Target-AP-SSID

Channel Number: 11

☐ Enable Mac Clone (Single Ethernet Client)

☐ Enable Universal Repeater Mode

Extended SSID:

(once selected and applied, extended SSID and channel number will be updated)

SSID	BSSID	Channel	Type	Encrypt	Signal
------	-------	---------	------	---------	--------

Refresh

Apply Changes Reset

Check the status of connection in the “Status” web page

**Wireless LAN Series**

Site contents:

- Wizard
- Operation Mode
- Wireless
  - Basic Settings
  - Advanced Settings
  - Security
  - Access Control
  - WDS settings
  - Site Survey
- TCP/IP
- Firewall
- Management
  - Status**
  - QoS
  - Bandwidth Control
  - SNMP
  - Statistics
  - DDNS
  - Time Zone
  - Log
  - Upgrade Firmware
  - Save/Reload Settings
  - Password
  - Reboot

### Access Point Status

This page shows the current status and some basic settings of the device.


System	
Uptime	0day:0h:55m:46s
Free Memory	11808 kB
Firmware Version	1.3.0
Webpage Version	1.3.0

Wireless Configuration	
Mode	Infrastructure Client - Bridge
Band	2.4 GHz (B+G)
SSID	Target-AP-SSID
Channel Number	6
Encryption	Disabled
BSSID	00:00:00:00:00:00
State	Scanning
RSSI	0


TCP/IP Configuration	
Attain IP Protocol	Fixed IP
IP Address	192.168.2.1
Subnet Mask	255.255.255.0
Default Gateway	192.168.2.1
DHCP Server	Enabled
MAC Address	00:00:aa:bb:dd:91

The alternative way to configure is as follows:


In the “Wireless Site Survey” page, select one of the SSIDs you want to connect and then press “Connect” button to establish the link.

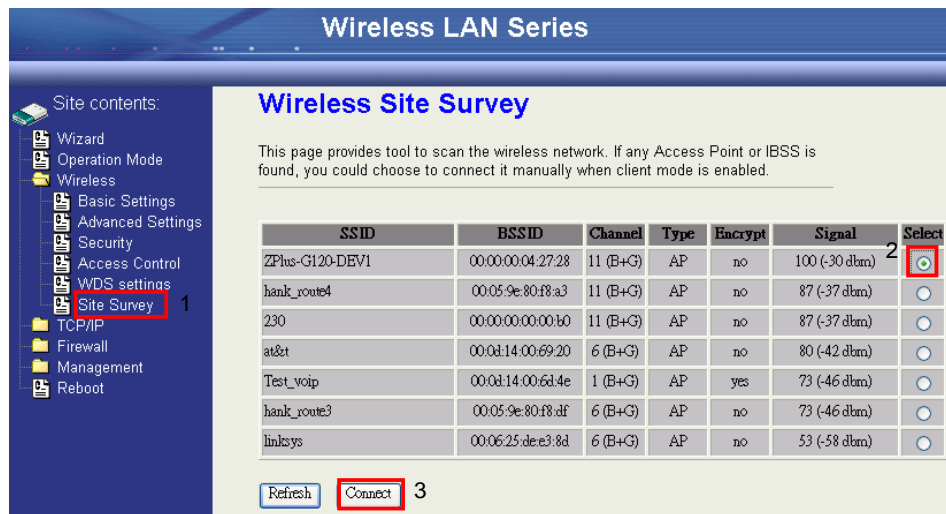

If the link is established successfully it will show the message “Connect successfully”. Then press “OK”.

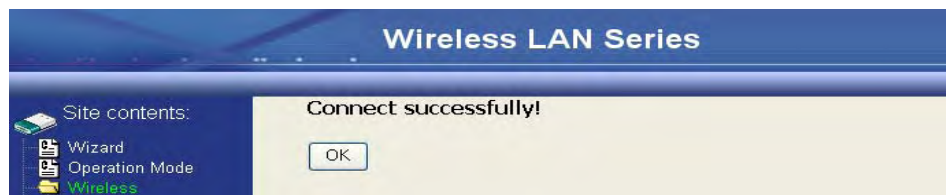

Then you can check the linking information in “Status” page.

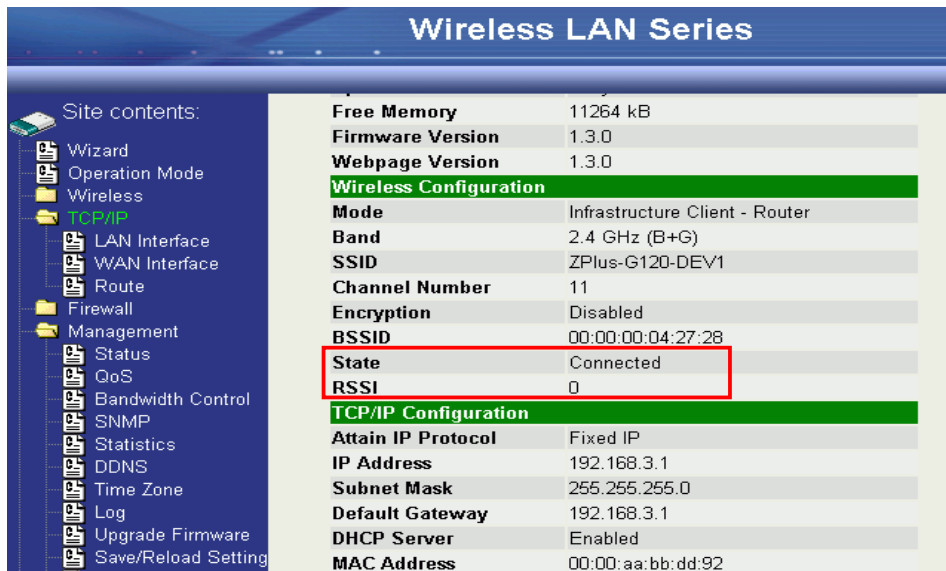

**NOTE:** If the available network requires authentication and data encryption, you need to setup the authentication and encryption before step1 and all the settings must be as same as the Access Point or Station. For more information about the detail authentication and data encryption settings, please refer the security section.

#### Authentication Type

In client mode, the device also supports two Authentication Types “Open system” and “Shared Key”. Although the default

setting is “Auto”, not every Access Points can support “Auto” mode. If the authentication type on the Access Point is known by the user, we suggest setting the authentication type the same as the Access Point.

### Data Encryption

In client mode, the device supports WEP and WPA Personal/Enterprise except WPA2 mixed mode data encryption. For more information about the detail data encryption settings, please refer the security section.

## AP Client Router (WISP)

The AP Client in Router (or WISP) mode is similar to the basic AP client, but instead of all the interfaces being bridged together, the WLAN interface is treated as the WAN connection and the ethernet interface is treated as the LAN. NAT is enabled and any connections made through the ethernet port are masqueraded behind the WLAN interface.

In “Basic Settings” page, change the Mode to “Client” mode. And key in the SSID of the AP you want to connect then press “Apply Changes” button to apply the change.

**Wireless LAN Series**

Site contents:

- Wizard
- Operation Mode
- Wireless
  - Basic Settings**
  - Advanced Settings
  - Security
  - Access Control
  - WDS settings
  - Site Survey
- TCP/IP
- Firewall
- Management
- Reboot

### Wireless Basic Settings

This page is used to configure the parameters for wireless LAN clients which may connect to your Access Point. Here you may change wireless encryption settings as well as wireless network parameters. Enable universal repeater mode can let radio act as AP and client simultaneously but remember the channel must be as same as the connected AP.

☐ Disable Wireless LAN Interface

Band: 2.4 GHz (B+G)

Mode: Client

Network Type: Infrastructure

SSID: Target-AP-SSID

Channel Number: 11

☐ Enable Mac Clone (Single Ethernet Client)

☐ Enable Universal Repeater Mode

Extended SSID:

(once selected and applied, extended SSID and channel number will be updated)

SSID	BSSID	Channel	Type	Encrypt	Signal
------	-------	---------	------	---------	--------

Check the status of connection in the “Status” web page

**Wireless LAN Series**

Site contents:

- Wizard
- Operation Mode
- Wireless
  - WLAN
  - WLAN Interface
  - WAN Interface
  - Route
- Firewall
- Management
  - Status**
  - QoS
  - Bandwidth Control
  - SNMP
  - Statistics
  - DDNS
  - Time Zone
  - Log
  - Upgrade Firmware
  - Save/Reload Settings
  - Password
- Reboot

### Access Point Status

This page shows the current status and some basic settings of the device.


System	
Uptime	0day:0h:55m:46s
Free Memory	11808 kB
Firmware Version	1.3.0
Webpage Version	1.3.0

Wireless Configuration	
Mode	Infrastructure Client - Bridge
Band	2.4 GHz (B+G)
SSID	Target-AP-SSID
Channel Number	6
Encryption	Disabled
BSSID	00-00-00-00-00-00
State	Scanning
RSSI	0

TCP/IP Configuration	
Attain IP Protocol	Fixed IP
IP Address	192.168.2.1
Subnet Mask	255.255.255.0
Default Gateway	192.168.2.1
DHCP Server	Enabled
MAC Address	00:00:aa:bb:dd:91

The alternative way to configure is as follows:

In the “Wireless Site Survey” page, select one of the SSIDs you want to connect and then press “Connect” button to establish the link.

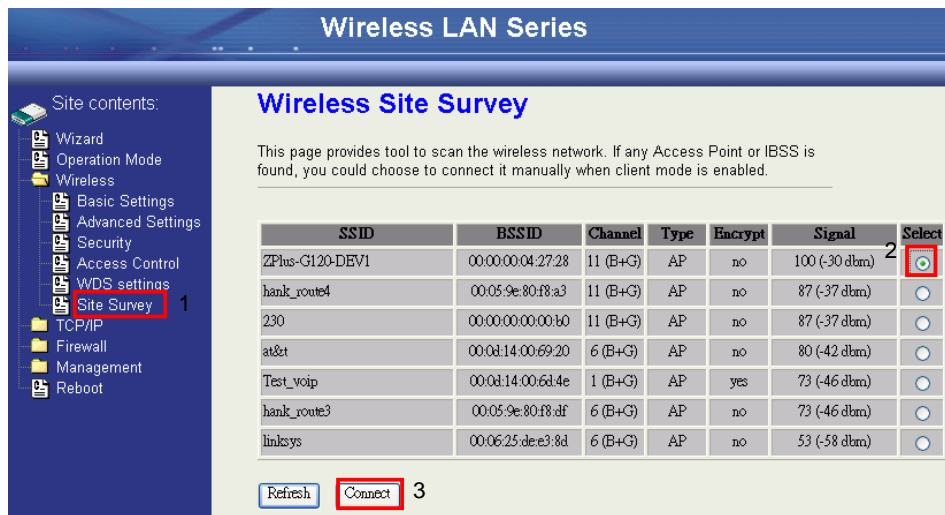

The screenshot shows the 'Wireless LAN Series' interface with the 'Wireless Site Survey' page selected. The left sidebar lists various configuration options, with 'Site Survey' highlighted. The main area displays a table of detected wireless networks. The 'ZPlus-G120-DEV1' network is selected, and the 'Connect' button is highlighted.


**Wireless Site Survey**

This page provides tool to scan the wireless network. If any Access Point or IBSS is found, you could choose to connect it manually when client mode is enabled.

SSID	BSSID	Channel	Type	Encrypt	Signal	Select
ZPlus-G120-DEV1	00:00:00:04:27:28	11 (B+G)	AP	no	100 (-30 dbm)	<input checked="" type="radio"/>
hank_route4	00:05:9e:80:f8:a3	11 (B+G)	AP	no	87 (-37 dbm)	<input type="radio"/>
230	00:00:00:00:00:b0	11 (B+G)	AP	no	87 (-37 dbm)	<input type="radio"/>
at&t	00:0d:14:00:69:20	6 (B+G)	AP	no	80 (-42 dbm)	<input type="radio"/>
Test_voip	00:0d:14:00:6d:4e	1 (B+G)	AP	yes	73 (-46 dbm)	<input type="radio"/>
hank_route3	00:05:9e:80:f8:df	6 (B+G)	AP	no	73 (-46 dbm)	<input type="radio"/>
linksys	00:06:25:de:c3:8d	6 (B+G)	AP	no	53 (-58 dbm)	<input type="radio"/>

Refresh Connect

If the link is established successfully it will show the message “Connect successfully”. Then press “OK”.

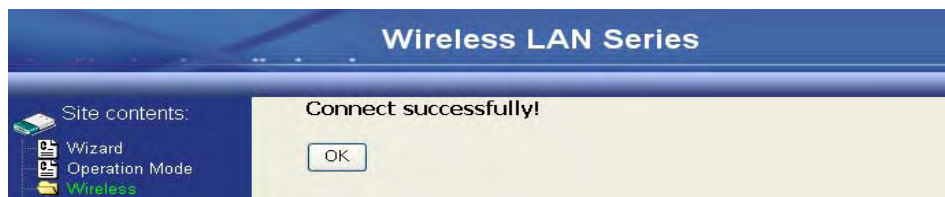


The screenshot shows the 'Wireless LAN Series' interface with the 'Connect successfully!' message displayed. The 'OK' button is highlighted.

**Wireless LAN Series**

Connect successfully!

OK

Then you can check the linking information in “Status” page.

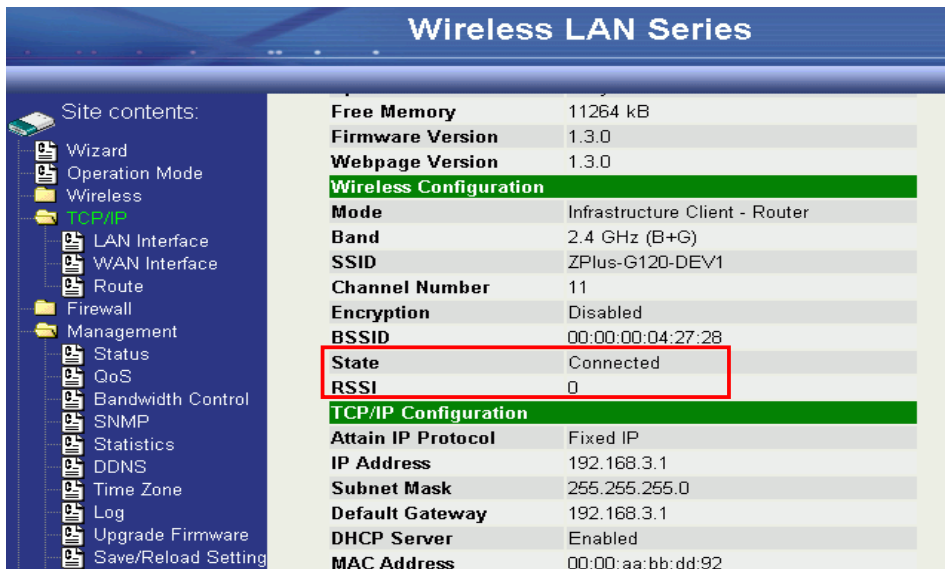

The screenshot shows the 'Wireless LAN Series' interface with the 'Status' page selected. The left sidebar lists various configuration options, with 'Status' highlighted. The main area displays the status information for the wireless network. The 'State' and 'RSSI' fields are highlighted.

**Wireless LAN Series**

Free Memory 11264 kB  
Firmware Version 1.3.0  
Webpage Version 1.3.0

**Wireless Configuration**

Mode Infrastructure Client - Router  
Band 2.4 GHz (B+G)  
SSID ZPlus-G120-DEV1  
Channel Number 11  
Encryption Disabled  
BSSID 00:00:00:04:27:28  
State Connected  
RSSI 0

**TCP/IP Configuration**

Attain IP Protocol Fixed IP  
IP Address 192.168.3.1  
Subnet Mask 255.255.255.0  
Default Gateway 192.168.3.1  
DHCP Server Enabled  
MAC Address 00:00:aa:bb:dd:92

**NOTE:** If the available network requires authentication and data encryption, you need to setup the authentication and

encryption before step1 and all the settings must be as same as the Access Point or Station. For more information about the detail authentication and data encryption settings, please refer the security section.

#### Authentication Type

In client mode, the device also supports two Authentication Types “Open system” and “Shared Key”. Although the default setting is “Auto”, not every Access Points can support “Auto” mode. If the authentication type on the Access Point is known by the user, we suggest setting the authentication type the same as the Access Point.

#### Data Encryption

In client mode, the device supports WEP and WPA Personal/Enterprise except WPA2 mixed mode data encryption. For more information about the detail data encryption settings, please refer the security section.

The screenshot shows the 'Operation Mode' configuration page for the 'Wireless LAN Series'. The left sidebar contains a 'Site contents' menu with options: Wizard, Operation Mode (selected), Wireless, TCP/IP, LAN Interface, WAN Interface, Route, Firewall, Management, and Reboot. The main content area is titled 'Operation Mode' and includes a sub-header 'You can setup different modes to LAN and WLAN interface for NAT and bridging function.' Below this, there are three radio button options: 'Router', 'Bridge', and 'Wireless ISP'. The 'Wireless ISP' option is selected. Each option has a descriptive text block explaining its function. At the bottom of the main area are two buttons: 'Apply Change' and 'Reset'.

**Wireless LAN Series**

**Operation Mode**

You can setup different modes to LAN and WLAN interface for NAT and bridging function.

☐ **Router:** In this mode, the device is supposed to connect to internet via ADSL/Cable Modem. The NAT is enabled and PCs connected to WLAN share the same IP to ISP through WAN port. The connection type can be setup in WAN page by using PPPOE, DHCP client, PPTP client or static IP. 172.1.1.1 is the default static IP address for WAN port.

☐ **Bridge:** In this mode, the ethernet port and wireless interface are bridged together and NAT function is disabled. All the WAN related function and firewall are not supported.

☒ **Wireless ISP:** In this mode, the wireless client will connect to ISP access point. The NAT is enabled and PCs connecting with ethernet port share the same IP to ISP through wireless LAN. You must set the wireless to client mode first and connect to the ISP AP in Site-Survey page. The connection type can be setup in WAN page by using PPPOE, DHCP client, PPTP client or static IP.

Next change the Operation Mode to “Wireless ISP”.

The screenshot shows the 'WAN Interface Setup' configuration page for the 'Wireless LAN Series'. The left sidebar is identical to the previous screenshot, with 'Operation Mode' selected. The main content area is titled 'WAN Interface Setup' and includes a sub-header 'This page is used to configure the parameters for Internet network which connects to the WAN port of your Access Point. Here you may change the access method to Static IP, DHCP Client, PPPOE or PPTP by click the item value of WAN Access type.' Below this, there is a 'WAN Access Type' dropdown menu with 'DHCP Client' selected. There are radio button options for 'Attain DNS Automatically' (selected) and 'Set DNS Manually'. Below these are input fields for 'DNS 1:', 'DNS 2:', and 'DNS 3:'. There is also a 'Clone MAC Address:' field with the value '000000000000'. At the bottom, there are several checkboxes: 'Enable uPnP' (unchecked), 'Enable Web Server Access on WAN' (checked), 'Enable IPsec pass through on VPN connection' (unchecked), 'Enable PPTP pass through on VPN connection' (unchecked), and 'Enable L2TP pass through on VPN connection' (unchecked). At the very bottom are two buttons: 'Apply Changes' and 'Reset'.

**Wireless LAN Series**

**WAN Interface Setup**

This page is used to configure the parameters for Internet network which connects to the WAN port of your Access Point. Here you may change the access method to Static IP, DHCP Client, PPPOE or PPTP by click the item value of WAN Access type.

**WAN Access Type:**

☒ **Attain DNS Automatically** ☐ **Set DNS Manually**

**DNS 1:**

**DNS 2:**

**DNS 3:**

**Clone MAC Address:**

☐ **Enable uPnP**

☒ **Enable Web Server Access on WAN**

☐ **Enable IPsec pass through on VPN connection**

☐ **Enable PPTP pass through on VPN connection**

☐ **Enable L2TP pass through on VPN connection**

Under TCP/IP > WAN Interface, the WAN connection needs to be set up. This specifies how the AP client will communicate with the network behind the remote access point. In this case DHCP client is used, and the WAN IP address is obtained from the remote access point.

**Wireless LAN Series**

Site contents:

- Wizard
- Operation Mode
- Wireless
  - TCP/IP
  - LAN Interface
  - WAN Interface
  - Route
- Firewall
- Management
- Reboot

**LAN Interface Setup**

This page is used to configure the parameters for local area network which connects to the device. Here you may change the setting for IP Address, Subnet Mask, DHCP, etc..

IP Address: 192.168.2.251

Subnet Mask: 255.255.255.0

Default Gateway: 0.0.0.0

DHCP: Server

DHCP Client Range: 192.168.2.100 - 192.168.2.200 [Show Client](#)

802.1d Spanning Tree: Enabled

Clone MAC Address: 000000000000

MTU Size: 1500

[Apply Changes](#) [Reset](#)

The next step is configuring the TCP/IP > LAN interface. This defines what happens to any connections made through the ethernet port. In this case DHCP server is enabled, so any connections made will be assigned an IP in the range of 192.168.2.100-200.

**Wireless LAN Series**

Site contents:

- Wizard
- Operation Mode
- Wireless
  - Basic Settings
  - Advanced Settings
  - Security
  - Access Control
  - WDS settings
  - Site Survey
  - Connecting Profile
  - TCP/IP
    - LAN Interface
    - WAN Interface
    - Route
  - Firewall
  - Management
- Reboot

**Management**

Status

QoS

Bandwidth Control

SNMP

Statistics

DDNS

Time Zone

Log

Miscellaneous

Upgrade Firmware

Save/Reload Setting

Password

Reboot

**System**

Uptime	0day:0h:53m:34s
Free Memory	10484 kB
Firmware Version	1.4.0c 20060914
Webpage Version	1.4.0c 20060914

**Wireless Configuration**

Mode	Infrastructure Client - Router
Band	2.4 GHz (B+G)
SSID	DLB_AP_Bridged
Channel Number	11
Encryption	Disabled
BSSID	00:05:9e:84:00:12
State	Connected
RSSI	58 (-55 dbm, Quality 78)

**TCP/IP Configuration**

Attain IP Protocol	Fixed IP
IP Address	192.168.2.251
Subnet Mask	255.255.255.0
Default Gateway	192.168.2.251
DHCP Server	Enabled
MAC Address	00:05:9e:83:89:49


**WAN Configuration**

Attain IP Protocol	DHCP
IP Address	10.0.1.69
Subnet Mask	255.255.255.0
Default Gateway	10.0.1.1
MAC Address	00:05:9e:83:89:4a

To make sure everything is connected correctly, go to the Status page in the Management section.

## WDS Point-to-Point Link

This example explains how to set up a bridged WDS point-to-point link. Two units are required for this example (radio A and radio B).

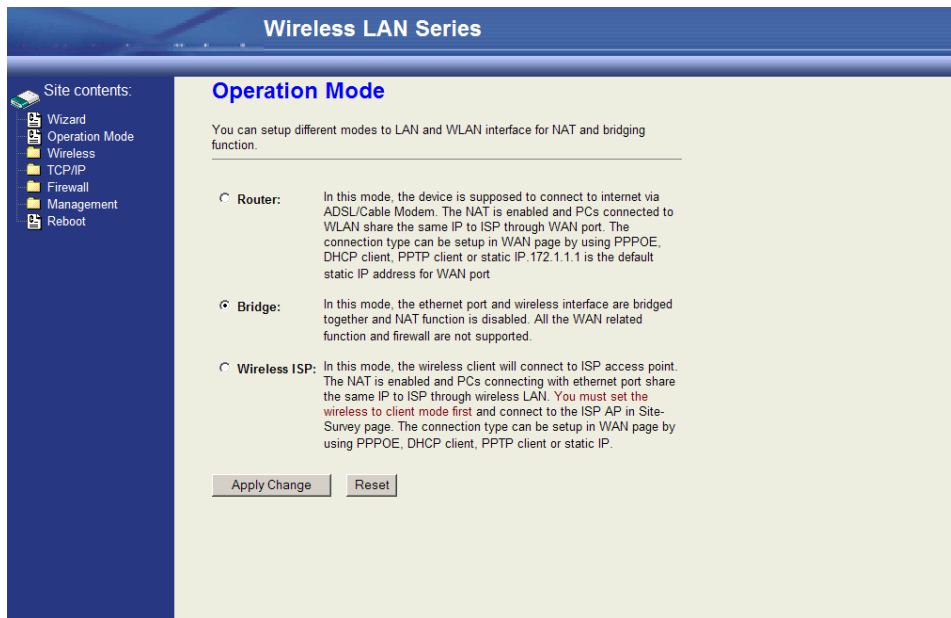

First under Operation Mode, make sure both units are in 'Bridge' mode.



Then under Wireless > Basic Settings, set the wireless radio on both units to 'WDS' mode. Radio A and Radio B both need to use the same Channel Number in order for WDS to connect; in this case, the Channel Number is 1.



## Wireless LAN Series

Site contents:

- Wizard
- Operation Mode
- Wireless
  - TCP/IP
  - LAN Interface
  - WAN Interface
  - Route
- Firewall
- Management
- Reboot

### LAN Interface Setup

This page is used to configure the parameters for local area network which connects to the device. Here you may change the setting for IP Address, Subnet Mask, DHCP, etc..

IP Address:

Subnet Mask:

Default Gateway:

DHCP:

DHCP Client Range:  -  [Show Client](#)

802.1d Spanning Tree:

Clone MAC Address:

MTU Size:

Since the two units will be bridged together, the LAN IP addresses will need to be different or one of the units will not be accessible by IP address.

## Wireless LAN Series

Site contents:

- Wizard
- Operation Mode
- Wireless
  - TCP/IP
  - Firewall
  - Management
    - Status
    - QoS
    - Bandwidth Control
    - SNMP
    - Statistics
    - DDNS
    - Time Zone
    - Log
    - Miscellaneous
    - Upgrade Firmware
    - Save/Reload Setting
    - Password
  - Reboot


### Access Point Status

This page shows the current status and some basic settings of the device.


System	
Uptime	0day:1h:46m:12s
Free Memory	7580 kB
Firmware Version	1.4.2c 20061211
Webpage Version	1.4.2c 20061211
Wireless 1 Configuration	
Mode	WDS - Bridge
Band	2.4 GHz (B+G)
SSID	
Channel Number	1
Encryption	Disabled
BSSID	00:05:9e:84:00:12
Power(OFDM/G)	100mW
Power(CCK/B)	250mW
Wireless 2 Configuration	
Mode	AP - Bridge
Band	5 GHz (A)
SSID	DLB_AP_A
Channel Number	56
Encryption	Disabled
BSSID	00:05:9e:84:00:14
Associated Clients	0
Power(OFDM/G)	50mW
TCP/IP Configuration	

The next step is to add the MAC address of the wireless interface in the WDS bridge in Radio B in the WDS section in Radio A.

**NOTE:** The MAC address of the wireless interface in Radio B can be found on the Status page under Management in the configuration section of the Wireless interface you are using for the WDS bridge. In this case it is 00:05:9e:84:00:12.

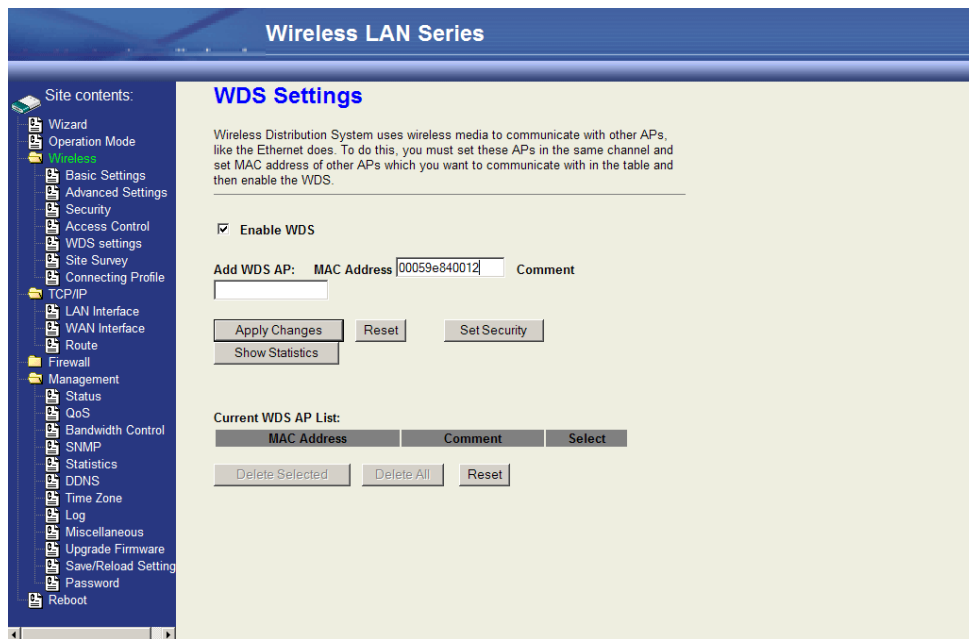

In Wireless > WDS Settings, make sure “Enable WDS” is checked. Enter the MAC address from Radio B into the WDS Settings for Radio A (no colons or spaces). Click “Apply Changes”

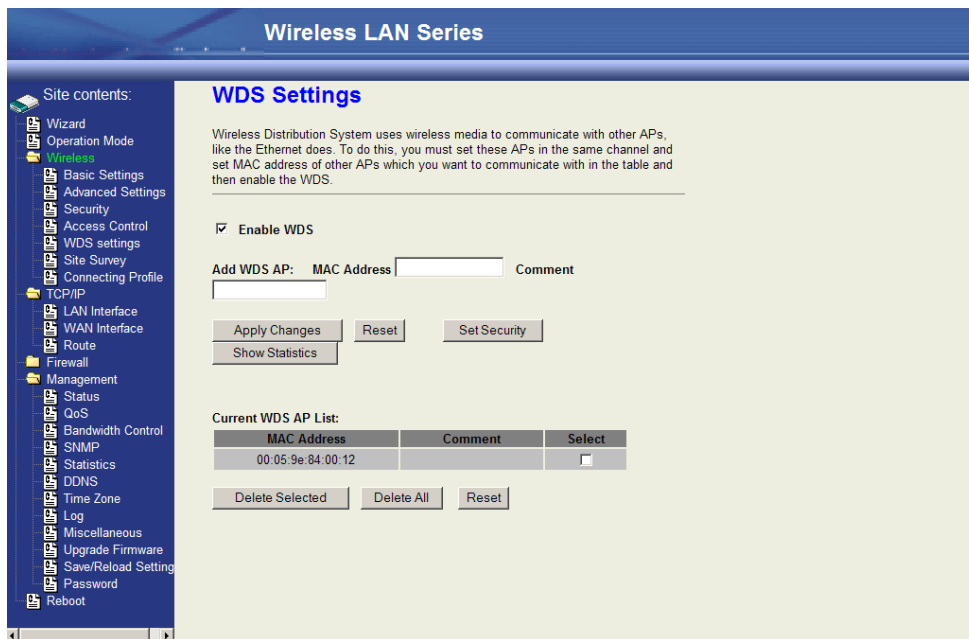

The MAC address will then show up in the Current WDS AP List.

**NOTE:** This will need to be done on both radios.

The WDS should then be established.

**NOTE:** Be careful not to create a network loop without having STP (Spanning Tree Protocol) enabled on both units.

## Configuring Universal Repeater

This device can be configured as a Repeater. In this mode, the device can extend the available wireless range of other AP and let the user link to the network that they want. (The device is working as an AP and Repeater at the same time.)

Enable Universal Repeater Mode and then select an SSID in the Table that you want. Then click the Apply Changes button.

(Click the Refresh button to refresh the table.)

Site contents:

- Wizard
- Operation Mode
- Wireless 1
- Basic Settings 2
- Advanced Settings
- Security
- Access Control
- WDS settings
- Site Survey
- TCP/IP
- Firewall
- Management
- Reboot

This page is used to configure the parameters for wireless LAN clients which may connect to your Access Point. Here you may change wireless encryption settings as well as wireless network parameters. Enable universal repeater mode can let radio act as AP and client simultaneously but remember the channel must be as same as the connected AP.

☐ Disable Wireless LAN Interface

Band: 2.4 GHz (B+G)

Mode: AP

Network Type: Infrastructure

SSID: hank

Channel Number: 11 [Show Active Clients](#)

☐ Enable Mac Clone (Single Ethernet Client)

3 ☒ Enable Universal Repeater Mode

Extended SSID:

(once selected and applied, extended SSID and channel number will be updated)

SSID	BSSID	Channel	Type	Encrypt	RSSI	Quality	Select
ZPlus-G192-Public-IP	00:05:9e:81:45:51	3 (B+G)	AP	no	26 (-74 dbm)	85	<input type="radio"/>
WLAN_G_TEST	00:0d:14:00:80:18	6 (B+G)	AP	no	26 (-74 dbm)	85	5 <input checked="" type="radio"/>
11b	00:06:25:0e:e6:1d	6 (B)	AP	no	23 (-80 dbm)	82	<input type="radio"/>

4 [Refresh](#)

6 [Apply Changes](#) [Reset](#)

**NOTE:** Universal Repeater Mode is only available under AP, WDS and AP+WDS mode.

Enter specific SSID in the Extended SSID field and then click the Apply Changes button.

# Wireless Setup

## Initial Configuration

There are two ways to configure the device, one is through web-browser, and the other is through Secure Shell CLI interface.

To access the configuration interfaces, make sure you are using a computer connected to the same network as the device.

The default IP address of the device is 192.168.2.254, and the subnet-mask is 255.255.255.0.

The device has three operation modes (Router/Bridge/WISP). In bridge mode, also known as AP Client, you can access the device by both WLAN (Wireless Local Area Network) and wired LAN. And in router/WISP modes, the device can be accessed by both WLAN and WAN. The default IP addresses for the device are 192.168.2.254(for LAN), 172.1.1.1(for WAN), so you need to make sure the IP address of your PC is in the same subnet as the device, such as 192.168.2.X (for LAN), 172.1.1.X (for WAN).

**NOTE:** By default the DHCP server is enabled. Do not have multiple DHCP servers in your network environment; otherwise it will cause an abnormal situation.


We also provide an auto-discovery tool which is used for finding out the IP of the device. In case you have forgotten the IP of the device or the IP of the device has been changed, you can use the tool to find out the IP of the device even if your PC is not in the same subnet as the device.

## Operation Mode

This device can act in the following roles, and supports WDS (Wireless Distribution System) function:

- Access Point
- WDS (Wireless Repeater)
- Bridge/Router
- WISP
- AP Client

The device provides 3 different operation modes and the wireless radio of the device can act as AP/Client/WDS. The operation mode determines the communication mechanism between the wired Ethernet NIC and wireless NIC. The following are the available operation modes:

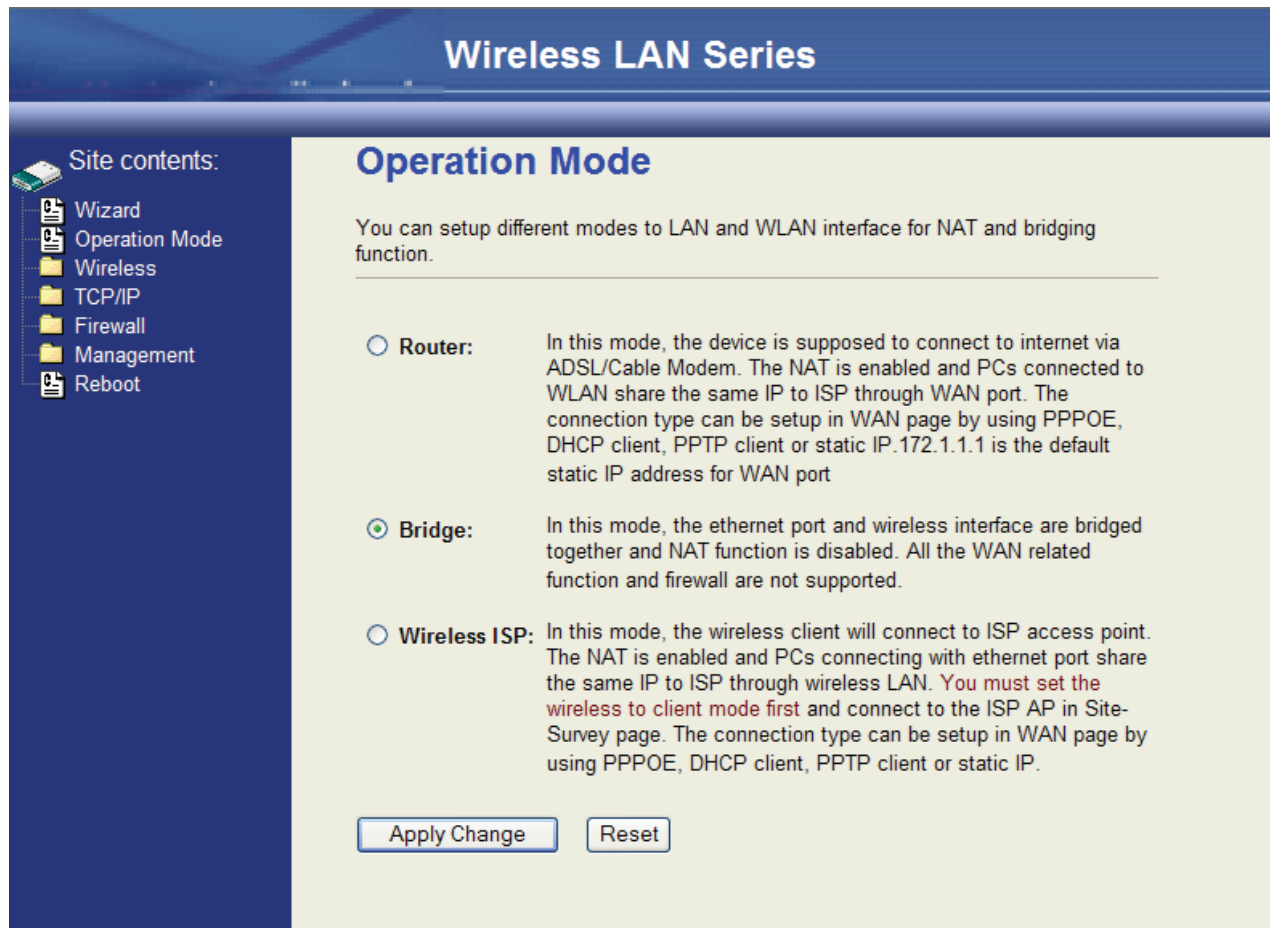

## Router

In this operation mode, the wired Ethernet (WAN) port is used to connect with an ADSL/Cable modem and the wireless NIC is used for your private WLAN. The NAT is enabled between the 2 NICs, and all the wireless clients share the same public IP address through the WAN port to the ISP. The default IP configuration for the WAN port is static IP. You can access the web server of device through the default WAN IP address 172.1.1.1 and modify the setting base on your ISP requirement.

## Bridge

The wired Ethernet and wireless NIC are bridged together. Once Bridge mode is selected, all the WAN related functions will be disabled.

## WISP (Wireless ISP)

This mode allows the wireless NIC to act as the WAN port and the wired NIC to act as the LAN port with NAT enabled between them. To use this mode, you must first set the wireless radio to be in client mode and connect to the AP of your ISP, then you can set the WAN IP configuration to meet your ISP requirement.

The wireless radio of the device acts in the following roles.

### *AP (Access Point)*

The wireless radio of the device serves as a communications “hub” for wireless clients and provides a connection to a wired LAN.

#### *AP Client*

This mode provides the capability to connect with another AP using infrastructure/Ad-hoc networking types. With bridge operation mode, you can directly connect the wired Ethernet port to your PC and the device becomes a wireless adapter. And with WISP operation mode, you can connect the wired Ethernet port to a hub/switch and all the PCs connecting with the hub/switch can share the same public IP address from your ISP.

#### *WDS (Wireless Distribution System)*

This mode serves as a wireless repeater; the device forwards the packets to another AP with WDS function. When this mode is selected no wireless clients can survey or connect to the device. The device only allows the WDS connection.

#### *WDS+AP*

This mode combines WDS plus AP modes, it not only allows WDS connections but also allows the wireless clients to survey and connect to the device.

The following table shows the supporting combination of operation and wireless radio modes:

	Bridge	Router	WISP
<b>AP</b>	✓	✓	✗
<b>WDS</b>	✓	✓	✗
<b>Client</b>	✓	✗	✓
<b>AP+WDS</b>	✓	✓	✗

# Wireless Configuration

## Basic Settings

**Wireless LAN Series**

**Wireless Basic Settings**

This page is used to configure the parameters for wireless LAN clients which may connect to your Access Point. Here you may change wireless encryption settings as well as wireless network parameters. Enable universal repeater mode can let radio act as AP and client simultaneously but remember the channel must be as same as the connected AP.

☐ Disable Wireless LAN Interface

Band: 2.4 GHz (B+G)

Mode: AP

Network Type: Infrastructure

SSID: ZPlus-G192

Channel Number: 11 [Show Active Clients](#)

☐ Enable Mac Clone (Single Ethernet Client)

☐ Enable Universal Repeater Mode

Extended SSID:

(once selected and applied, extended SSID and channel number will be updated)

SSID	BSSID	Channel	Type	Encrypt	RSSI	Quality
------	-------	---------	------	---------	------	---------

[Refresh](#)

[Apply Changes](#) [Reset](#)

### Disable Wireless LAN Interface

Disable the wireless interface of device

### Band

The device supports 2.4GHz(B), 2.4GHz(G) and 2.4GHz(B+G) mixed modes.

### Mode

The radio of the device supports different modes as follows:

#### AP

The radio of the device acts as an Access Point to serves all wireless clients to join a wireless local network.

#### Client

Support Infrastructure and Ad-hoc network types to act as a wireless adapter.

#### WDS

This mode serves as a wireless repeater; the device forwards the packets to another AP with WDS function. When this mode is selected no wireless clients can survey or connect to the device. The device only allows the WDS connection.


#### AP+WDS

This mode combines WDS plus AP modes, it not only allows WDS connections but also allows the wireless clients to survey and connect to the device.

## Network Type


### Infrastructure

This type requires the presence of 802.11b/g Access Point. All communication is done via the Access Point.

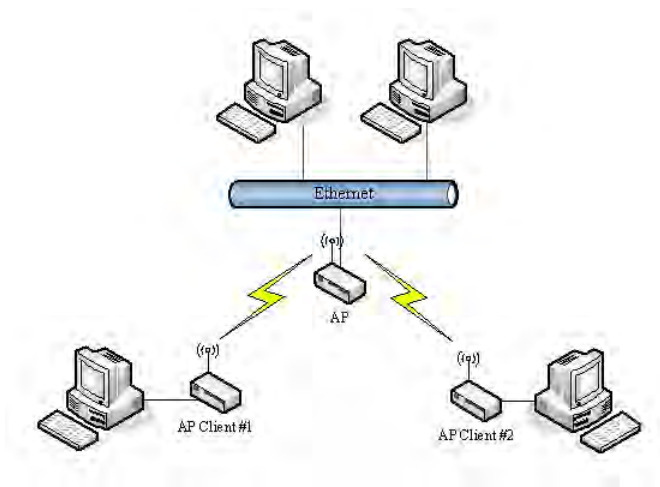

### Ad Hoc

This type provides a peer-to-peer communication between wireless stations. All the communication is done from Client to Client without any Access Point involved. Ad Hoc networking must use the same SSID and channel for establishing the wireless connection.

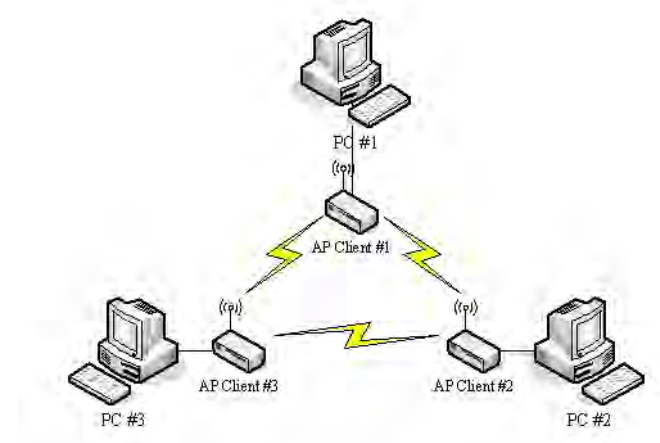

In client mode, the device can not support the Router mode functions including Firewall and WAN settings.

## SSID

The SSID is a unique identifier that wireless networking devices use to establish and maintain wireless connectivity. Multiple access point/bridges on a network or sub-network can use the same SSID. SSIDs are case sensitive and can contain up to 32 alphanumeric characters. Do not include spaces in your SSID.

## Channel Number

The following table is the available frequencies (in MHz) for the 2.4-GHz radio:

Channel No.	Frequency	Country Domain
1	2412	Americas, EMEA, Japan, and China



2	2417	Americas, EMEA, Japan, and China
3	2422	Americas, EMEA, Japan, Israel, and China
4	2427	Americas, EMEA, Japan, Israel, and China
5	2432	Americas, EMEA, Japan, Israel, and China
6	2437	Americas, EMEA, Japan, Israel, and China
7	2442	Americas, EMEA, Japan, Israel, and China
8	2447	Americas, EMEA, Japan, Israel, and China
9	2452	Americas, EMEA, Japan, Israel, and China
10	2457	Americas, EMEA, Japan, and China
11	2462	Americas, EMEA, Japan, and China
12	2467	EMEA and Japan only
13	2472	EMEA and Japan only
14	2484	Japan only

When set to “Auto”, the device will find the least-congested channel for use.

## Advanced Settings

These settings are only for more technically advanced users who have sufficient knowledge about wireless LANs. These settings should not be changed unless you know what effect the changes will have on your device. The default setting is optimized for the normal operation.

**NOTE:** Any unreasonable value change from the default settings will reduce the throughput of the device.

Wireless LAN Series

Site contents:

- Wizard
- Operation Mode
- Wireless
  - Basic Settings
  - Advanced Settings
  - Security
  - Access Control
  - WDS settings
  - Site Survey
  - Connecting Profile
- TCP/IP
- LAN Interface
- WAN Interface
- Route
- Firewall
- Management
- Reboot

### Wireless Advanced Settings

These settings are only for more technically advanced users who have a sufficient knowledge about wireless LAN. These settings should not be changed unless you know what effect the changes will have on your Access Point.

Authentication Type: ☐ Open System ☐ Shared Key ☒ Auto

Fragment Threshold:  (256-2346)

RTS Threshold:  (0-2347)

Beacon Interval:  (20-1024 ms)

ACK Timing:  (0-255 \* 4 us)

Client Expired Time:  (101-40000000 sec)

MTU Size:  (100-1500)

Data Rate:

Preamble Type: ☒ Long Preamble ☐ Short Preamble

Broadcast SSID: ☒ Enabled ☐ Disabled

IAPP: ☒ Enabled ☐ Disabled

802.11g Protection: ☒ Enabled ☐ Disabled

Block WLAN Relay: ☐ Enabled ☒ Disabled

Turbo Mode: ☐ Enabled ☒ Disabled (auto)

Aggregation Mode: ☐ Enabled ☒ Disabled

Tx Burst Mode: ☐ Enabled ☒ Disabled

Transmit Power(OFDM):

Transmit Power(CCK):

### Authentication Type

The device supports two Authentication Types “Open system” and “Shared Key”. When you select “Shared Key”, you need to setup the “WEP” key in the “Security” page (See the next section). The default setting is “Auto”. The wireless client can associate with the device by using one of the two types.

### Fragment Threshold

The fragmentation threshold determines the size at which packets are fragmented (sent as several pieces instead of as one block). Use a low setting in areas where communication is poor or where there is a great deal of radio interference. This function will help you to improve the network performance.

### RTS Threshold

The RTS threshold determines the packet size at which the radio issues a request to send (RTS) before sending the packet. A low RTS Threshold setting can be useful in areas where many client devices are associating with the device, or in areas where the clients are far apart and can detect only the device and not each other. You can enter a setting ranging from 0 to 2347 bytes.

### Beacon Interval

The beacon interval is the amount of time between access point beacons in milliseconds. The default beacon interval is 100.

## **ACK Timing**

This is the amount of time that a station will wait for the ACK response after sending a wireless frame to a remote station. This is roughly transmission time (round-trip) + processing time on the remote station and can vary depending on environment. Generally a trial and error approach is best for finding optimum timing and should only be changed on longer wireless links.

## **Client Expired Time**

This is the amount of time that a station can be out of contact with the access point before it is removed from the association table.

## **MTU Size**

Maximum Transmission Unit (MTU) is the largest packet size (in bytes) that a network can transmit. Any packet of larger size will be fragmented into smaller packets.

## **Data Rate**

The standard IEEE 802.11b/11g supports 1, 2, 5.5, 11 / 6, 9, 12, 18, 24, 36, 48 and 54 Mbps data rates. You can choose the rate that the device uses for data transmission. The default value is "auto". The device will use the highest possible selected transmission rate.

## **Preamble Type**

The preamble is part of the 802.11 frame and is PHY dependant. All 802.11b/g systems support the long preamble. The short preamble (optional) maybe used to improve throughput when all stations on the network support the short preamble.

## **Broadcast SSID**

Broadcasting the SSID will let your wireless clients find the device automatically. If you are building a public Wireless Network, disabling this function can provide better security. Every wireless station located within the coverage of the device must connect to this device by manually configuring the SSID in your client settings.

## **IAPP**

(802.11f) This provides a mechanism for association data (e.g. encryption settings, station information, etc.) to be handed off to a new AP when a station roams between APs.

## **802.11g Protection**

This ensures that 802.11g stations are backwards compatible with legacy 802.11b stations. With 802.11g protection enabled, a CTS will be used to lock out 802.11b stations while the 802.11g station is transmitting. While this does allow backwards compatibility with legacy 802.11b stations, it should be disabled in a pure 802.11g environment, as it will have a significant impact on 802.11g performance (as high as 50% decrease in throughput).

## **Block WLAN Relay (Isolate Client)**

The device supports an isolation function. If you are building a public Wireless Network, enabling this function can provide better security. The device will block packets between wireless clients (relay). The wireless clients connected to the device cannot see each other.

## **Turbo Mode**

This allows two Realtek (802.11b/g chipset in the DLB21xx) stations to transmit at 72Mbps between each other. Note this is Realtek proprietary and will only function between Realtek stations.

## **Transmit Power**

The device supports four transmission output power levels 250, 200, 150 and 100mW for CCK (802.11b) mode and two transmission output power levels 100 and 50mW for OFDM (802.11g) mode. You can adjust the power level to change the coverage of the device. Every wireless station located within the coverage of the device also needs to have the high power radio. Otherwise the wireless station can only survey the device and cannot establish a connection with device.

## Security

This device provides complete wireless security function include WEP, 802.1x, WPA-TKIP, WPA2-AES and WPA2-Mixed in different mode (see the Security Support Table).

The default security setting of the encryption function is disabled. Choose your preferred security setting depending on what security function you need.

Wireless LAN Series

Site contents:

- Wizard
- Operation Mode
- Wireless
- Basic Settings
- Advanced Settings
- Security
- Access Control
- WDS settings
- Site Survey
- Connecting Profile
- TCP/IP
- LAN Interface
- WAN Interface
- Route
- Firewall
- Management
- Reboot

### Wireless Security Setup

This page allows you setup the wireless security. Turn on WEP or WPA by using Encryption Keys could prevent any unauthorized access to your wireless network.

Authentication Type: ☐ Open System ☐ Shared Key ☒ Auto

Encryption:

☐ Use 802.1x Authentication ☒ WEP 64bits ☐ WEP 128bits

☐ Enable MAC Authentication

WPA Authentication Mode: ☐ Enterprise (RADIUS) ☒ Personal (Pre-Shared Key)

Pre-Shared Key Format:

Pre-Shared Key:

☐ Enable Pre-Authentication

Authentication RADIUS Server: Port  IP address  Password

Note: When encryption WEP is selected, you must set WEP key value.

## Encryption

Wired Equivalent Privacy (WEP) is implemented in this device to prevent unauthorized access to your wireless network. The WEP setting must be the same as each client in your wireless network. For more secure data transmission, you can change the encryption type to "WEP" and click the "Set WEP Key" button to open the "Wireless WEP Key setup" page.

Encryption:

☐ Use 802.1x Authentication ☒ WEP 64bits ☐ WEP 128bits

☐ Enable MAC Authentication

WPA Authentication Mode: ☐ Enterprise (RADIUS) ☒ Personal (Pre-Shared Key)

Pre-Shared Key Format:

Pre-Shared Key:

☐ Enable Pre-Authentication

Authentication RADIUS Server: Port  IP address  Password

When you decide to use the WEP encryption to secure your WLAN, please refer to the following settings of the WEP encryption:


- 64-bit WEP Encryption: 64-bit WEP keys are as same as the encryption method of 40-bit WEP. You can input 10 hexadecimal digits (0~9, a~f or A~F) or 5 ACSII chars.

- 128-bit WEP Encryption: 128-bit WEP keys are as same as the encryption method of 104-bit WEP. You can input 26 hexadecimal digits (0~9, a~f or A~F) or 10 ACSII chars.

The Default Tx Key field determines which of the four keys you want to use in your WLAN environment.

#### WEP Encryption with 802.1x Setting

The device supports an external RADIUS Server that can secure networks against unauthorized access. If you use the WEP encryption, you can also use the RADIUS server to check the admission of the users. In this way every user must use a valid account before accessing the Wireless LAN and requires a RADIUS or other authentication server on the network. An example is shown as follows:

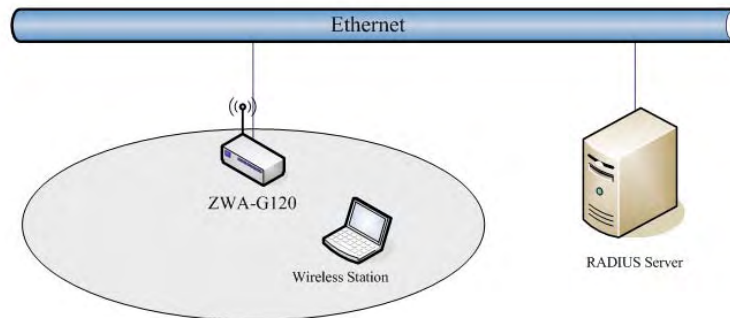

You should choose WEP 64 or 128 bit encryption based on your current network requirements. Then add user accounts and the target device to the RADIUS server. In the device, you need to specify the IP address, Password (Shared Secret) and Port number of the target RADIUS server.

## WPA Authentication Mode

The WPA feature provides a high level of assurance for end-users and administrators that their data will remain private and that access to their network is restricted to authorized users. You can choose the WPA encryption and select the Authentication Mode. This device supports two WPA modes:

### *Enterprise (RADIUS)*

In this mode authentication is achieved via a WPA RADIUS Server. You need a RADIUS or other authentication server on the network. When WPA Authentication mode is Enterprise (RADIUS), you have to add user accounts and the target device to the RADIUS Server. In the device, you need to specify the IP address Password (Shared Secret) and Port number of the target RADIUS server.

### *Pre-Share Key*

In this mode you can use the Pre-shared Key to enhance your security setting. This mode requires only an access point and client station that supports WPA-PSK. The WPA-PSK settings include Key Format, Length and Value. They must be the same as each wireless client in your wireless network. When the Key format is Passphrase, the key value should have 8~63 ASCII chars. When Key format is Hex, the key value should have 64 hexadecimal digits (0~9, a~f or A~F).

## Access Control

The screenshot displays the 'Wireless Security Setup' interface for a 'Wireless LAN Series' device. The left sidebar contains a 'Site contents' menu with options like Wizard, Operation Mode, Wireless, Basic Settings, Advanced Settings, Security, Access Control, WDS settings, Site Survey, Connecting Profile, TCP/IP, LAN Interface, WAN Interface, Route, Firewall, Management, and Reboot. The main content area is titled 'Wireless Security Setup' and includes a descriptive paragraph: 'This page allows you setup the wireless security. Turn on WEP or WPA by using Encryption Keys could prevent any unauthorized access to your wireless network.' Below this, there are several configuration sections: 'Authentication Type' with radio buttons for 'Open System', 'Shared Key', and 'Auto' (selected); 'Encryption' with a dropdown set to 'None' and a 'Set WEP Key' button; checkboxes for 'Use 802.1x Authentication', 'WEP 64bits', 'WEP 128bits', and 'Enable MAC Authentication'; 'WPA Authentication Mode' with radio buttons for 'Enterprise (RADIUS)' and 'Personal (Pre-Shared Key)' (selected); 'Pre-Shared Key Format' with a dropdown set to 'Passphrase'; a text field for 'Pre-Shared Key'; a checkbox for 'Enable Pre-Authentication'; and 'Authentication RADIUS Server' fields for 'Port' (1812), 'IP address', and 'Password'. A note states: 'Note: When encryption WEP is selected, you must set WEP key value.' At the bottom are 'Apply Changes' and 'Reset' buttons.

## WDS Settings

Wireless Distribution System (WDS) uses wireless media to communicate with the other devices, like the Ethernet does. This function allows one or more remote LANs to connect with the local LAN. To do this, you must set these devices in the same channel and set the MAC address of other devices you want to communicate with in the WDS AP List and then enable the WDS.

When you decide to use the WDS to extend your WLAN, please refer to the following instructions for configuration:

- The bridging devices by WDS must use the same radio channel.
- When the WDS function is enabled, no wireless stations can connect to the device.
- If your network topology has a loop, you need to enable the 802.1d Spanning Tree function.


- You don't need to add all MAC address of devices existing in your network to the WDS AP List. The WDS AP List only needs to specify the MAC address of devices you need to directly connect to.
- The bandwidth of the device is limited. Bandwidth will be shared between bridging devices.

## WDS Network Topology

In this section, we will demonstrate the WDS network topologies and WDS AP List configuration. You can setup four kinds of network topologies: bus, star, ring and mesh.


In this case, there are five devices with WDS enabled: WDS1, WDS2, WDS3, WDS4 and WDS5.

### Bus topology

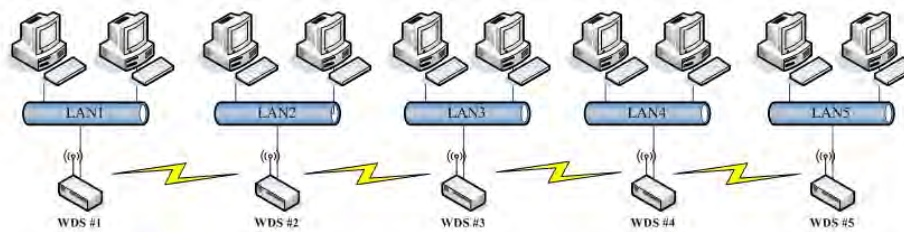

Device	Entries of WDS AP List	Spanning Tree Protocol Required
WDS1	The MAC Address of WDS2	No
WDS2	The MAC Addresses of WDS1 and WDS3	No
WDS3	The MAC Addresses of WDS2 and WDS4	No
WDS4	The MAC Addresses of WDS3 and WDS5	No
WDS5	The MAC Address of WDS4	No

### Star topology

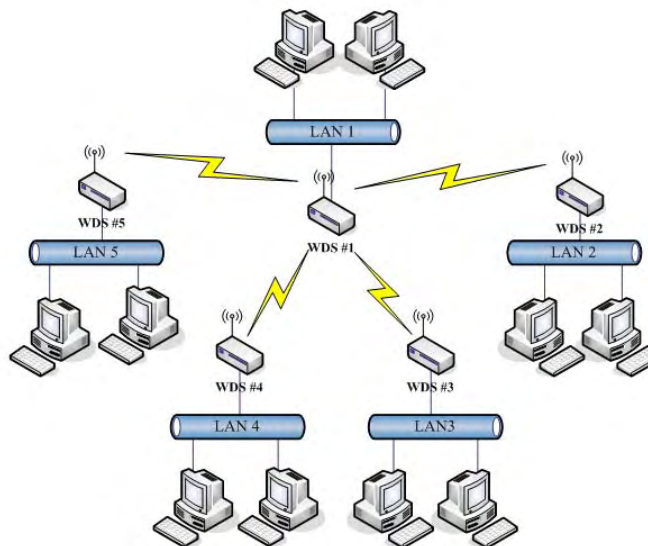


Device	Entries of WDS AP List	Spanning Tree Protocol Required
WDS1	The MAC Addresses of WDS2, WDS3, WDS4 and WDS5	No
WDS2	The MAC Address of WDS1	No
WDS3	The MAC Address of WDS1	No




WDS4	The MAC Address of WDS1	No
WDS5	The MAC Address of WDS1	No

Ring topology

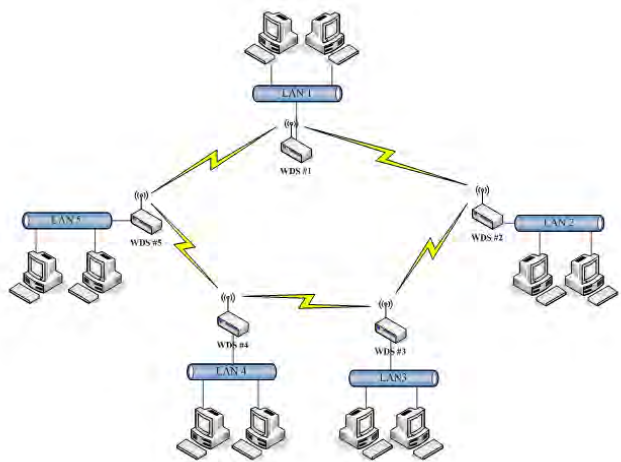

Device	Entries of WDS AP List	Spanning Tree Protocol Required
WDS1	The MAC Addresses of WDS2 and WDS5	Yes
WDS2	The MAC Addresses of WDS1 and WDS3	Yes
WDS3	The MAC Addresses of WDS2 and WDS4	Yes
WDS4	The MAC Addresses of WDS3 and WDS5	Yes
WDS5	The MAC Addresses of WDS4 and WDS1	Yes

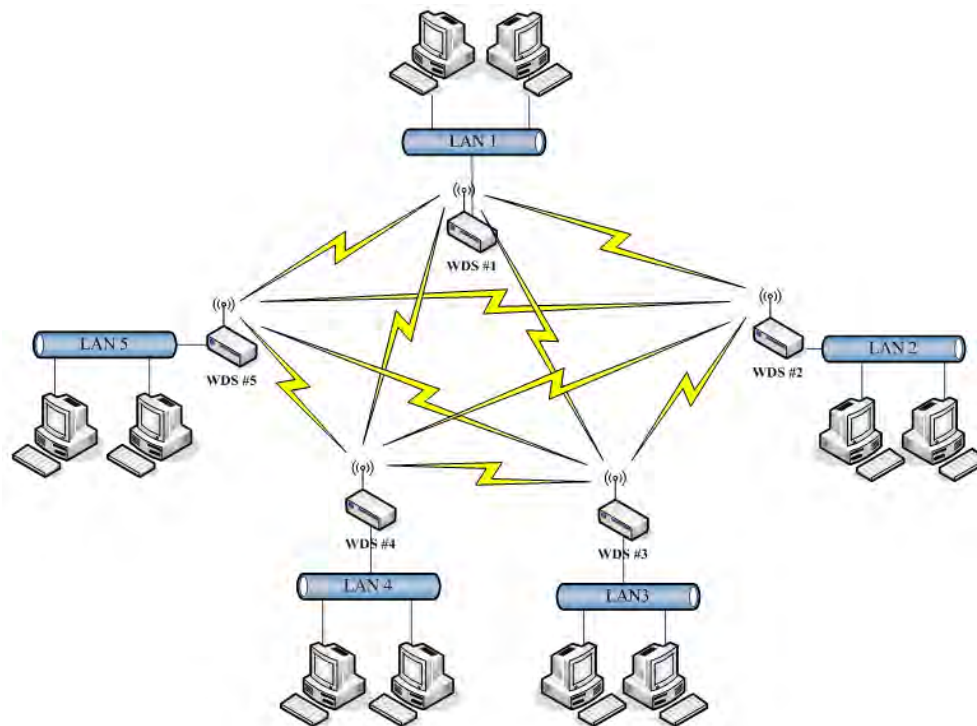

Device	Entries of WDS AP List	Spanning Tree Protocol Required
WDS1	The MAC Addresses of WDS2, WDS3, WDS4 and WDS5	Yes
WDS2	The MAC Addresses of WDS1, WDS3, WDS4 and WDS5	Yes
WDS3	The MAC Addresses of WDS1, WDS2, WDS4 and WDS5	Yes
WDS4	The MAC Addresses of WDS1, WDS2, WDS3 and WDS5	Yes
WDS5	The MAC Addresses of WDS1, WDS2, WDS3 and WDS4	Yes


## Wireless Repeater

A Wireless Repeater can be used to increase the coverage area of another device (Parent AP). Between the Parent AP and the Wireless Repeater, wireless stations can move among the coverage areas of both devices. When you decide to use the WDS as a Repeater, please refer to the following instructions for configuration.

In AP mode, enable the WDS function. You must set these connected devices with the same radio channel and SSID.

Choose "WDS+AP" mode.

Using the bus or star network topology:

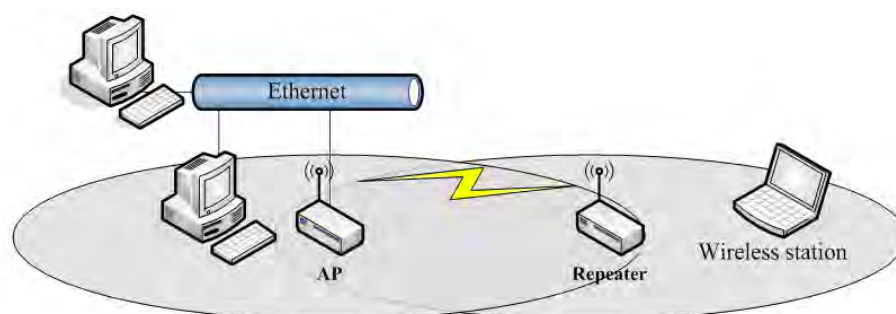

Description	Entries of WDS AP List	Spanning Tree Protocol Required
Access Point	The MAC Address of Repeater	Yes
Repeater	The MAC Address of Access Point	Yes

## Wireless Bridge

As a Wireless Bridge the device can establish a wireless connection between two or more Wired LANs. When you decide to use the WDS as a Wireless Bridge, please refer the following instructions for configuration.

In AP mode, enable the WDS function. You must set these connected devices to the same radio channel, but you may use different SSID.

Choose “WDS” mode for only wireless backbone extension purpose. You can use any network topology, please refer the WDS topology section.

## Site Survey

This tool allows you to scan for nearby wireless networks. If any Access Point or IBSS is found, you can choose to connect it manually when client mode is enabled.



## Connecting Profile

If you enable the connecting profile in client mode, the system will check the preferred SSID and BSSID in a fixed period. If preferred APs are found, the radio will try to connect to them one by one regardless of the signal quality and strength. Please note that checking the preferred APs will have a significant impact on throughput. All the profiles share the same security settings.

Wireless LAN Series

Site contents:

Wizard

Operation Mode

Wireless

Basic Settings

Advanced Settings

Security

Access Control

WDS settings

Site Survey

Connecting Profile

TCP/IP

LAN Interface

WAN Interface

Route

Firewall

Management

Reboot

Connecting Profile Settings

Enable the connecting profile in client mode , the system will check the preferred SSID and BSSID in a fixed period, if preferred APs are found, the radio will try to connect with them one by one and regardless of the signal quality and strength. Please note that check the preferred APs will impact the throughput a lot ! Unless the signal strength is good enough, otherwise don't set the interval too short. And currently ,all the profiles share the same security setting.

☐ Enable connecting profile

SSID:

BSSID:

Apply Changes

Reset

Checking Interval:

(5-1440 minutes)

Current preferred AP list:

SSID	BSSID	Select
<div>Delete Selected</div> <div>Delete All</div> <div>Reset</div>		

# TCP/IP Configuration

## Configuring LAN Interface

### Configuring DHCP Server

To use the DHCP server inside the device, please make sure there is no other DHCP server that exists in the same network as the device.

Enable the DHCP Server option and assign the client range of IP addresses as shown in the following page.

The screenshot displays the 'LAN Interface Setup' page for a 'Wireless LAN Series' device. On the left is a 'Site contents' sidebar with a tree view containing: Wizard, Operation Mode, Wireless, TCP/IP, LAN Interface (selected), WAN Interface, Route, Firewall, Management, and Reboot. The main content area has a title 'LAN Interface Setup' and a descriptive paragraph: 'This page is used to configure the parameters for local area network which connects to the device. Here you may change the setting for IP Address, Subnet Mask, DHCP, etc..'. Below this are several configuration fields: 'IP Address' (192.168.2.1), 'Subnet Mask' (255.255.255.0), 'Default Gateway' (0.0.0.0), 'DHCP' (a dropdown menu set to 'Server'), 'DHCP Client Range' (192.168.2.2 to 192.168.2.254 with a 'Show Client' button), '802.1d Spanning Tree' (a dropdown menu set to 'Disabled'), 'Clone MAC Address' (000000000000), and 'MTU Size' (1500). At the bottom are 'Apply Changes' and 'Reset' buttons.

When the DHCP server is enabled and also the device router mode is enabled then the default gateway for all the DHCP client hosts will be set to the IP address of device.

## Configuring WAN Interface

The device supports four kinds of IP configuration for WAN interface, including Static IP, DHCP Client, PPPoE and PPTP. You can select one of the WAN Access Types depending on the requirements of your ISP. The default WAN Access Type is "Static IP".

## Static IP

You can get the IP configuration data of the Static-IP from your ISP. You will need to fill in IP address, subnet mask, gateway address, and one of the DNS addresses.

IP Address

The Internet Protocol (IP) address of WAN interface provided by your ISP or MIS. The address will be your network identifier outside of your local network.


Subnet Mask

The number used to identify the IP subnet network, indicating whether the IP address can be recognized on the LAN or if it must be reached through a gateway.

Default Gateway	The IP address of Default Gateway provided by your ISP or MIS. The Default Gateway is the intermediate network device that has knowledge of the network IDs of the other networks in the Wide Area Network, so it can forward the packets to other gateways until they are delivered to the one connected to the specified destination.
DNS 1~3	The IP addresses of DNS provided by your ISP. DNS (Domain Name Server) is used to map domain names to IP addresses. The DNS maintains central lists of domain name/IP addresses and maps the domain names in your Internet requests to other servers on the Internet until the specified web site is found.
Clone MAC Address	Clone device MAC address to the specific MAC address required by your ISP.
Enable uPnP	Enable uPnP, this function allows the device to be found and configured automatically by the system. (Ex. Window XP)

### DHCP Client (Dynamic IP)

All IP configuration data besides DNS will be obtained from the DHCP server when DHCP-Client WAN Access Type is selected.

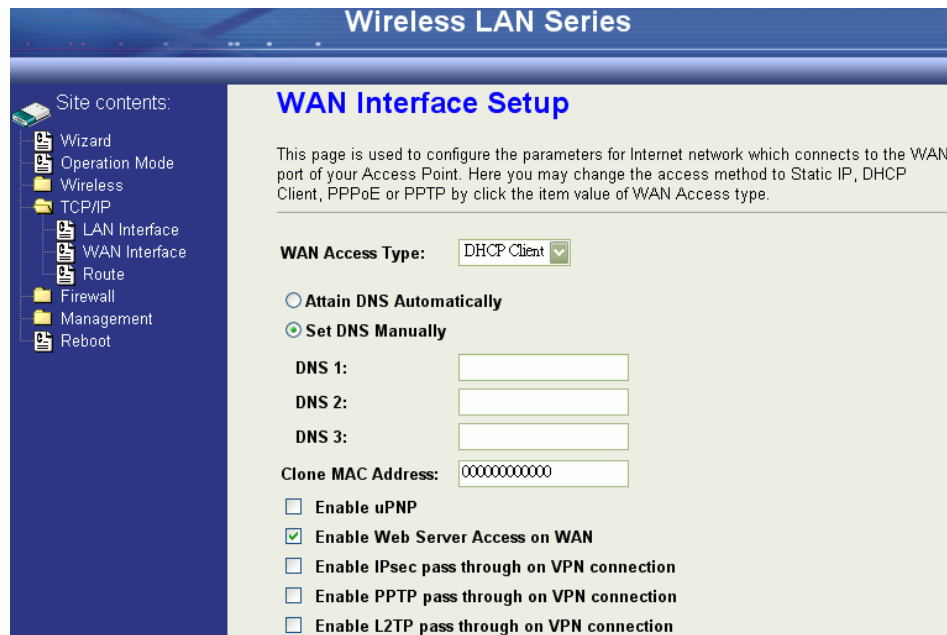


DNS 1~3	The IP addresses of DNS provided by your ISP. DNS (Domain Name Server) is used to map domain names to IP addresses. The DNS maintains central lists of domain name/IP addresses and maps the domain names in your Internet requests to other servers on the Internet until the specified web site is found.
Clone MAC Address	Clone device MAC address to the specific MAC address required by your ISP.
Enable uPNP	Enable uPNP, this function allows the device to be found and configured automatically by the system. (Ex. Window XP)

### PPPoE

When the PPPoE (Point to Point Protocol over Ethernet) WAN Access Type is selected, you must fill the fields of User Name, Password with the username and password provided by your ISP. The IP configuration will be done when the device successfully authenticates with your ISP.




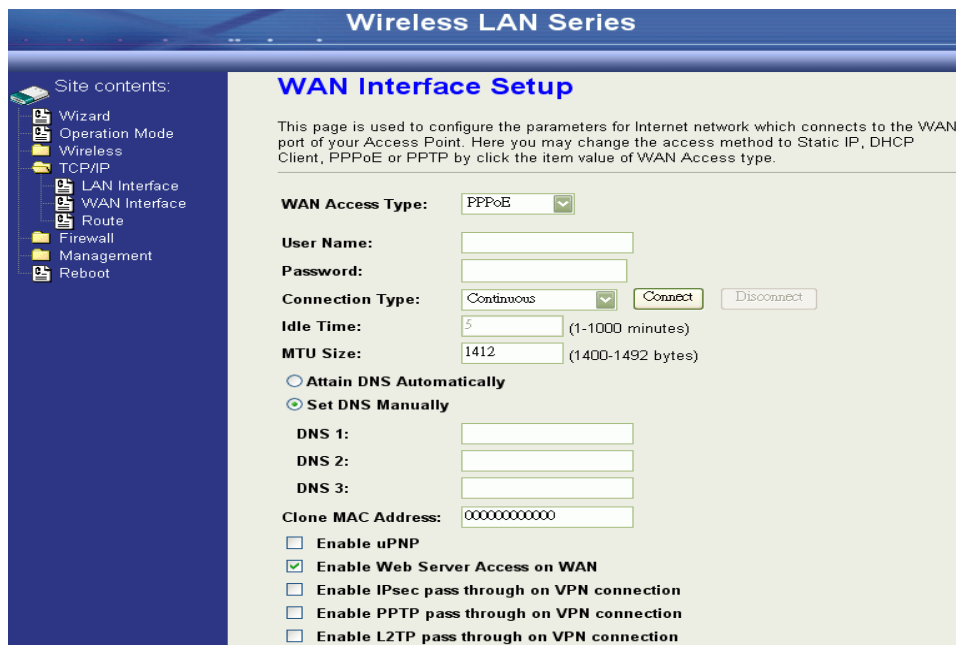

User Name	The account provided by your ISP
Password	The password for your account.
Connect Type	"Continuous ": connect to ISP permanently "Manual": Manually connect/disconnect to ISP "On-Demand": Automatically connect to ISP when the user needs to access the Internet.
Idle Time	The number of minutes of inactivity before disconnecting from ISP. This setting is only available when "Connect on Demand" connection type is selected.
MTU Size	Maximum Transmission Unit, 1412 is the default setting, you may need to change the MTU for optimal performance with your specific ISP.
DNS 1~3	The IP addresses of DNS provided by your ISP. DNS (Domain Name Server) is used to map domain names to IP addresses. The DNS maintains central lists of domain name/IP addresses and maps the domain names in your Internet requests to other servers on the Internet until the specified web site is found.
Clone MAC Address	Clone device MAC address to the specific MAC address required by your ISP.
Enable uPnP	Enable uPnP, this function allows the device to be found and configured automatically by the system. (Ex. Window XP)

## PPTP

Point to Point Tunneling Protocol (PPTP) is a service that applies to connections in Europe only

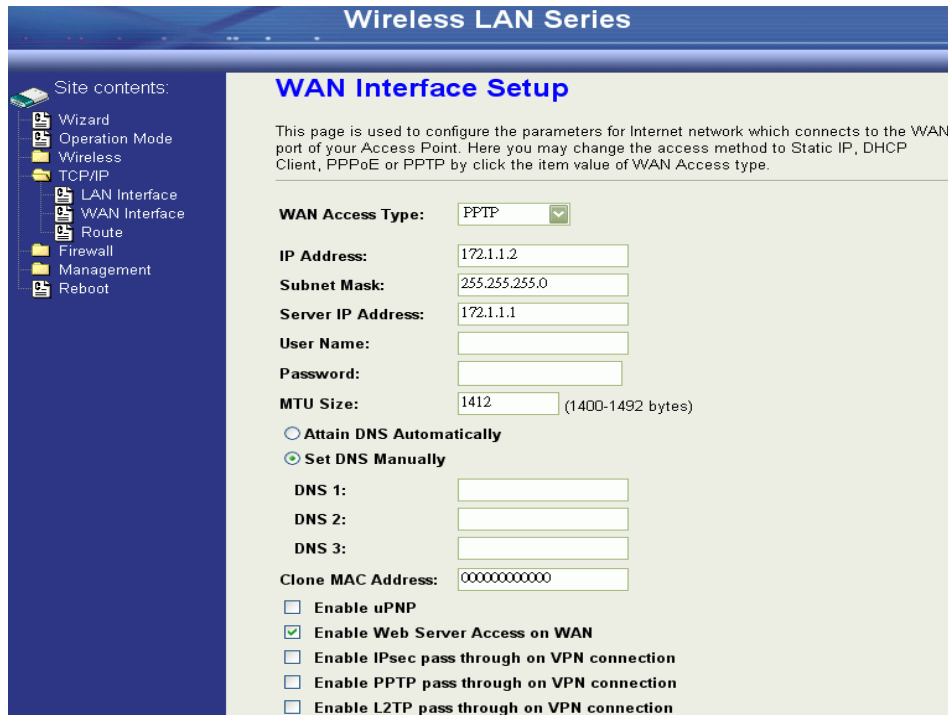

IP Address	The Internet Protocol (IP) address of WAN interface provided by your ISP or MIS. The address will be your network identifier outside of your local network.
Subnet Mask	The number used to identify the IP subnet network, indicating whether the IP address can be recognized on the LAN or if it must be reached through a gateway.
Server IP Address (Default Gateway)	The IP address of PPTP server
User Name	The account provided by your ISP
Password	The password of your account
MTU Size	Maximum Transmission Unit, 1412 is the default setting, you may need to change the MTU for optimal performance with your specific ISP.
DNS 1~3	The IP addresses of DNS provided by your ISP. DNS (Domain Name Server) is used to map domain names to IP addresses. The DNS maintains central lists of domain name/IP addresses and maps the domain names in your Internet requests to other servers on the Internet until the specified web site is found.
Clone MAC Address	Clone device MAC address to the specific MAC address required by your ISP.
Enable uPnP	Enable uPnP, this function allows the device to be found and configured automatically by the system. (Ex. Window XP)

## Configuring Clone MAC Address

The device provides a MAC address clone feature to fit the requirements of some ISP need to specify the client MAC address.

Clone MAC address for DHCP Client WAN access type:

## Wireless LAN Series

Site contents:

- Wizard
- Operation Mode
- Wireless
- TCP/IP
  - LAN Interface
  - WAN Interface
  - Route
- Firewall
- Management
- Reboot

### WAN Interface Setup

This page is used to configure the parameters for Internet network which connects to the WAN port of your Access Point. Here you may change the access method to Static IP, DHCP Client, PPPoE or PPTP by click the item value of WAN Access type.

**WAN Access Type:** DHCP Client

☐ Attain DNS Automatically

☒ Set DNS Manually

DNS 1:

DNS 2:

DNS 3:

**Clone MAC Address:** 001122334455

☐ Enable uPNP

☒ Enable Web Server Access on WAN

☐ Enable IPsec pass through on VPN connection

☐ Enable PPTP pass through on VPN connection

☐ Enable L2TP pass through on VPN connection

Clone MAC address for Static IP WAN access type:

## Wireless LAN Series

Site contents:

- Wizard
- Operation Mode
- Wireless
- TCP/IP
  - LAN Interface
  - WAN Interface
  - Route
- Firewall
- Management
- Reboot

### WAN Interface Setup

This page is used to configure the parameters for Internet network which connects to the WAN port of your Access Point. Here you may change the access method to Static IP, DHCP Client, PPPoE or PPTP by click the item value of WAN Access type.

**WAN Access Type:** Static IP

**IP Address:**

**Subnet Mask:**

**Default Gateway:**

DNS 1:

DNS 2:

DNS 3:

**Clone MAC Address:** 001122334455

☐ Enable uPNP

☒ Enable Web Server Access on WAN

☐ Enable IPsec pass through on VPN connection

☐ Enable PPTP pass through on VPN connection

☐ Enable L2TP pass through on VPN connection

Clone MAC address for PPPoE WAN access type:

## Wireless LAN Series

Site contents:

- Wizard
- Operation Mode
- Wireless
- TCP/IP
  - LAN Interface
  - WAN Interface
  - Route
- Firewall
- Management
- Reboot

### WAN Interface Setup

This page is used to configure the parameters for Internet network which connects to the WAN port of your Access Point. Here you may change the access method to Static IP, DHCP Client, PPPoE or PPTP by click the item value of WAN Access type.

**WAN Access Type:** PPPoE

**User Name:**

**Password:**

**Connection Type:** Continuous [Connect] [Disconnect]

**Idle Time:**  (1-1000 minutes)

**MTU Size:**  (1400-1492 bytes)

☐ Attain DNS Automatically

☒ Set DNS Manually

DNS 1:

DNS 2:

DNS 3:

**Clone MAC Address:** 001122334455

☐ Enable uPNP


☒ Enable Web Server Access on WAN

☐ Enable IPsec pass through on VPN connection

☐ Enable PPTP pass through on VPN connection

☐ Enable L2TP pass through on VPN connection

Clone MAC address for PPTP WAN access type:

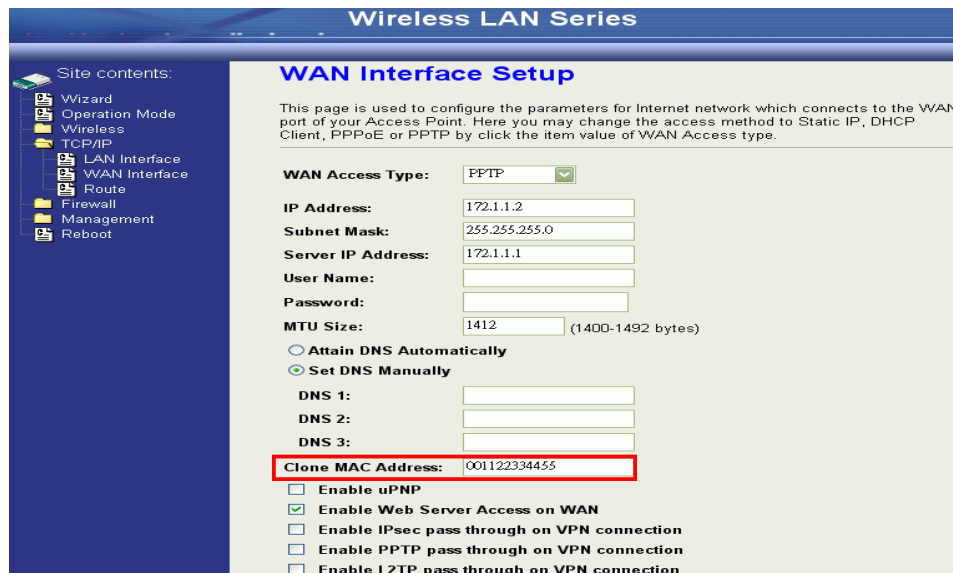

The screenshot shows the 'WAN Interface Setup' page in a web interface. The left sidebar contains a 'Site contents' menu with items like Wizard, Operation Mode, Wireless, TCP/IP, LAN Interface, WAN Interface, Route, Firewall, Management, and Reboot. The main content area is titled 'WAN Interface Setup' and includes a description: 'This page is used to configure the parameters for Internet network which connects to the WAN port of your Access Point. Here you may change the access method to Static IP, DHCP Client, PPPoE or PPTP by click the item value of WAN Access type.' The 'WAN Access Type' is set to 'PPTP'. Other fields include IP Address (172.1.1.2), Subnet Mask (255.255.255.0), Server IP Address (172.1.1.1), User Name, Password, MTU Size (1412), and DNS settings (DNS 1, 2, 3). The 'Clone MAC Address' field is highlighted with a red box and contains the value '001122334455'. At the bottom, there are checkboxes for 'Enable uPNP', 'Enable Web Server Access on WAN' (checked), 'Enable IPsec pass through on VPN connection', 'Enable PPTP pass through on VPN connection', and 'Enable L2TP pass through on VPN connection'.

**Wireless LAN Series**

Site contents:

- Wizard
- Operation Mode
- Wireless
- TCP/IP
- LAN Interface
- WAN Interface
- Route
- Firewall
- Management
- Reboot

### WAN Interface Setup

This page is used to configure the parameters for Internet network which connects to the WAN port of your Access Point. Here you may change the access method to Static IP, DHCP Client, PPPoE or PPTP by click the item value of WAN Access type.

**WAN Access Type:** PPTP

**IP Address:** 172.1.1.2

**Subnet Mask:** 255.255.255.0

**Server IP Address:** 172.1.1.1

**User Name:**

**Password:**

**MTU Size:** 1412 (1400-1492 bytes)

☐ Attain DNS Automatically

☒ Set DNS Manually

**DNS 1:**

**DNS 2:**

**DNS 3:**

**Clone MAC Address:** 001122334455

☐ Enable uPNP


☒ Enable Web Server Access on WAN

☐ Enable IPsec pass through on VPN connection

☐ Enable PPTP pass through on VPN connection

☐ Enable L2TP pass through on VPN connection

Physical LAN interface MAC address clone:

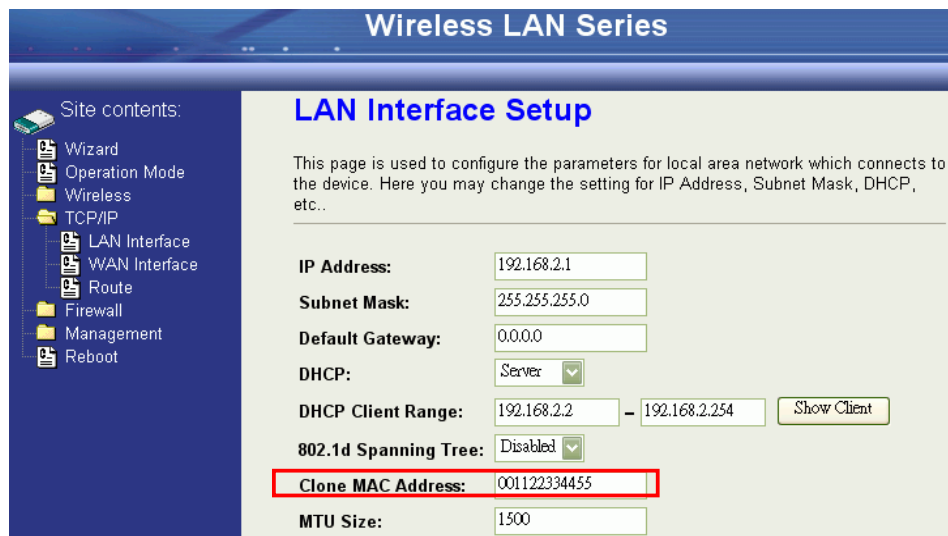

The screenshot shows the 'LAN Interface Setup' page in a web interface. The left sidebar contains a 'Site contents' menu with items like Wizard, Operation Mode, Wireless, TCP/IP, LAN Interface, WAN Interface, Route, Firewall, Management, and Reboot. The main content area is titled 'LAN Interface Setup' and includes a description: 'This page is used to configure the parameters for local area network which connects to the device. Here you may change the setting for IP Address, Subnet Mask, DHCP, etc..'. The 'IP Address' is set to 192.168.2.1, 'Subnet Mask' to 255.255.255.0, and 'Default Gateway' to 0.0.0.0. The 'DHCP' setting is 'Server'. The 'DHCP Client Range' is 192.168.2.2 to 192.168.2.254, with a 'Show Client' button. The '802.1d Spanning Tree' is set to 'Disabled'. The 'Clone MAC Address' field is highlighted with a red box and contains the value '001122334455'. The 'MTU Size' is set to 1500.

**Wireless LAN Series**

Site contents:

- Wizard
- Operation Mode
- Wireless
- TCP/IP
- LAN Interface
- WAN Interface
- Route
- Firewall
- Management
- Reboot

### LAN Interface Setup

This page is used to configure the parameters for local area network which connects to the device. Here you may change the setting for IP Address, Subnet Mask, DHCP, etc..

**IP Address:** 192.168.2.1

**Subnet Mask:** 255.255.255.0

**Default Gateway:** 0.0.0.0

**DHCP:** Server

**DHCP Client Range:** 192.168.2.2 - 192.168.2.254 [Show Client](#)


**802.1d Spanning Tree:** Disabled

**Clone MAC Address:** 001122334455


**MTU Size:** 1500

## VPN Pass-through

This functionality lets the device Pass-through the VPN packets including PPTP/ L2TP/IPsec VPN Connection.

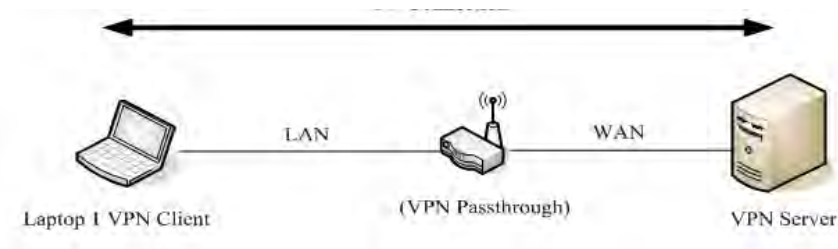


Check the VPN Pass-through in WAN Interface of TCP/IP Page that you want and then click Apply Changes button.

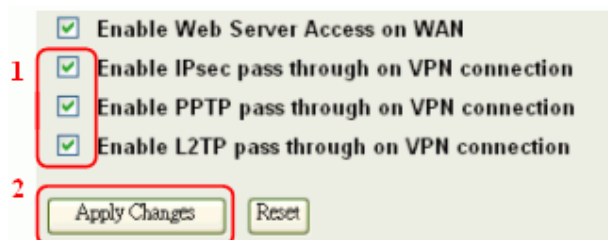

## Static Route Setup

You can set the routing information to let the Router know what routing is correct if it cannot learn automatically through other means.

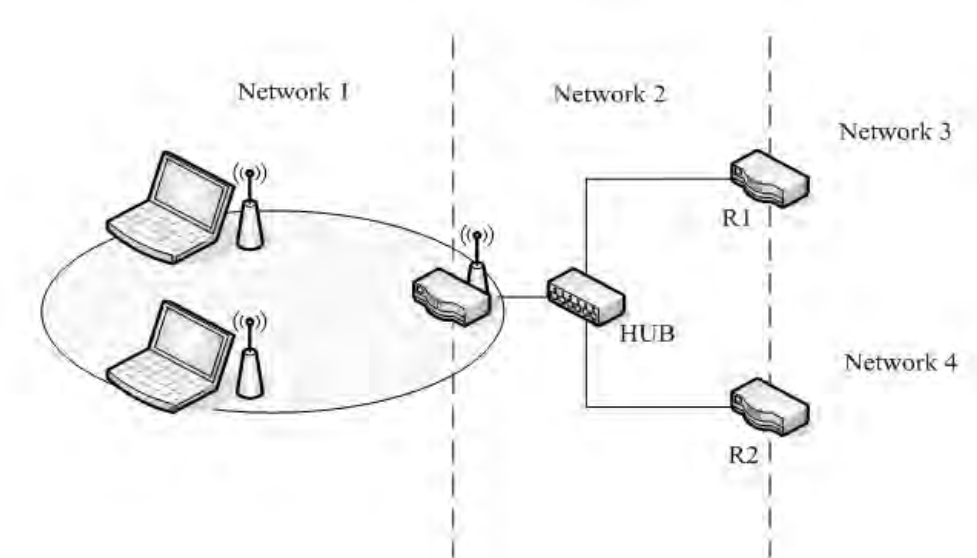

For example, if the user wants to link the Network 3 and Network 4 separately from Network 1, the Routing Table configuration would be as shown below:

Enable Static Routing in Route Setup of TCP/IP page and then enter IP Address of Network 3, Subnet Mask and IP Address

of Router (R1) in Default Gateway field then click Apply Change button.

☒ **Enable Static Route**

IP Address: 192.168.3.0

Subnet Mask: 255.255.255.0

Default Gateway: 192.168.2.1

**Apply Changes** Reset Show Route Table

Enter IP Address of Network 4, Subnet Mask and IP Address of Router (R2) in Default Gateway field then click Apply Change button.

☒ **Enable Static Route**

IP Address: 192.168.4.0

Subnet Mask: 255.255.255.0

Default Gateway: 192.168.2.2

**Apply Changes** Reset Show Route Table

In Static Route Table there have two routings for Network 3 and Network 4

Static Route Table:			
Destination IP Address	Netmask	Gateway	Select
192.168.3.0	255.255.255.0	192.168.2.1	<input type="checkbox"/>
192.168.4.0	255.255.255.0	192.168.2.2	<input type="checkbox"/>

## Dynamic Route Setup

The Dynamic Route utilizes RIP1/2 to transmit and receive the route information with other Routers.

Enable Dynamic Route and then select RIP 1, RIP2 or Both to transmit/receive packets then click the Apply Change button.

☒ **Enable Dynamic Route**

RIP transmit to WAN: RIP1 and RIP2

RIP receive from WAN: RIP1 and RIP2

RIP transmit to LAN: RIP1 and RIP2

RIP receive from LAN: RIP1 and RIP2

**Apply Changes**

Click the Show Route Table button to show Dynamic Route Table.

☐ Enable Static Route

IP Address:

Subnet Mask:

Default Gateway:

In the Dynamic Routing Table there are two routings for Network 3 and Network 4

### Routing Table

This table shows the all routing entry .

Destination	Gateway	Genmask	Flags	Metric	Ref	Use	Iface
255.255.255.255	0.0.0.0	255.255.255.255	UH	0	0	0	br0
192.168.4.0	192.168.2.2	255.255.255.0	UG	2	0	0	br0
192.168.3.0	192.168.2.1	255.255.255.0	UG	2	0	0	br0
192.168.2.0	0.0.0.0	255.255.255.0	U	0	0	0	br0
172.1.1.0	0.0.0.0	255.255.255.0	U	0	0	0	wlan0
0.0.0.0	172.1.1.254	0.0.0.0	UG	0	0	0	wlan0

# Firewall Configuration

## Configuring LAN to WAN Firewall

The device supports three kinds of filter Port Filtering, IP Filtering and MAC Filtering. All the entries in current filter table are used to restrict certain types of packets from your local network through the device. Use of such filters can be helpful in securing or restricting your local network.

### Port Filtering

When you enable the Port Filtering function, you can specify a single port or port ranges in the current filter table. When the source port of outgoing packets matches the port definition or falls within the port ranges in the table, the firewall will block those packets from LAN to WAN.

The screenshot shows the 'Port Filtering' configuration page for a 'Wireless LAN Series' device. On the left is a 'Site contents' tree with options like Wizard, Operation Mode, Wireless, TCP/IP, Firewall (selected), Port Filtering, IP Filtering, MAC Filtering, Port Forwarding, DMZ, VPN, Management, and Reboot. The main area is titled 'Port Filtering' and contains a description: 'Entries in this table are used to restrict certain types of data packets from your local network to Internet through the Gateway. Use of such filters can be helpful in securing or restricting your local network.' Below this is a checkbox for 'Enable Port Filtering'. To its right are input fields for 'Port Range' (with a hyphen separator), a 'Protocol' dropdown menu set to 'Both', and a 'Comment' field. At the bottom of this section are 'Apply Changes' and 'Reset' buttons. Below these is a section titled 'Current Filter Table:' which contains a table with four columns: 'Port Range', 'Protocol', 'Comment', and 'Select'. Below the table are buttons for 'Delete Selected', 'Delete All', and 'Reset'.

### IP Filtering

When you enable the IP Filtering function, you can specify local IP Addresses in the current filter table. When the source IP address of outgoing packets matches the IP Addresses in the table the firewall will block this packet from LAN to WAN.

The screenshot shows the 'IP Filtering' configuration page for a 'Wireless LAN Series' device. It has the same 'Site contents' tree on the left. The main area is titled 'IP Filtering' and contains the same description as the Port Filtering page. Below the description is a checkbox for 'Enable IP Filtering'. To its right are input fields for 'Local IP Address', a 'Protocol' dropdown menu set to 'Both', and a 'Comment' field. At the bottom of this section are 'Apply Changes' and 'Reset' buttons. Below these is a section titled 'Current Filter Table:' which contains a table with four columns: 'Local IP Address', 'Protocol', 'Comment', and 'Select'. Below the table are buttons for 'Delete Selected', 'Delete All', and 'Reset'.

### MAC Filtering

When you enable the MAC Filtering function, you can specify the MAC Addresses in the current filter table. When the source MAC Address of outgoing packets matches the MAC Addresses in the table the firewall will block this packet from LAN to



WAN.

Wireless LAN Series

Site contents:

- Wizard
- Operation Mode
- Wireless
- TCP/IP
- Firewall
  - Port Filtering
  - IP Filtering
  - MAC Filtering
  - Port Forwarding
  - DMZ
  - VPN
- Management
- Reboot

### MAC Filtering

Entries in this table are used to restrict certain types of data packets from your local network to Internet through the Gateway. Use of such filters can be helpful in securing or restricting your local network.

☐ Enable MAC Filtering

MAC Address:  Comment:

Current Filter Table:

MAC Address	Comment	Select
-------------	---------	--------

## Configuring Port Forwarding (Virtual Server)

This function allows you to automatically redirect common network services to a specific machine behind the NAT firewall.

These settings are only necessary if you wish to host some sort of server like a web server or mail server on the private local network behind the device's NAT firewall.

Wireless LAN Series

Site contents:

- Wizard
- Operation Mode
- Wireless
- TCP/IP
- Firewall
  - Port Filtering
  - IP Filtering
  - MAC Filtering
  - Port Forwarding
  - DMZ
  - VPN
- Management
- Reboot

### Port Forwarding

Entries in this table allow you to automatically redirect common network services to a specific machine behind the NAT firewall. These settings are only necessary if you wish to host some sort of server like a web server or mail server on the private local network behind your Gateway's NAT firewall.

☐ Enable Port Forwarding

IP Address:  Protocol:  Port Range:  -  Comment:

Current Port Forwarding Table:


Local IP Address	Protocol	Port Range	Comment	Select
------------------	----------	------------	---------	--------

The most often used port numbers are shown in the following table.

Services	Port Number
ECHO	7
FTP (File Transfer Protocol)	21
Telnet	23
SMTP (Simple Mail Transfer Protocol)	25
DNS (Domain Name System)	53
Finger	79
HTTP (Hyper Text Transfer Protocol)	80
POP3 (Post Protocol)	110
NNTP (Network News Transport Protocol)	119
SNMP (Simple Network Management Protocol)	161
SNMP trap	162
SIP (Session Initiation Protocol)	5060
PPTP (Point-to-Point Tunneling Protocol)	1723

## Multiple Servers behind NAT Example:

In this case, there are two PCs in the local network accessible for outside users.

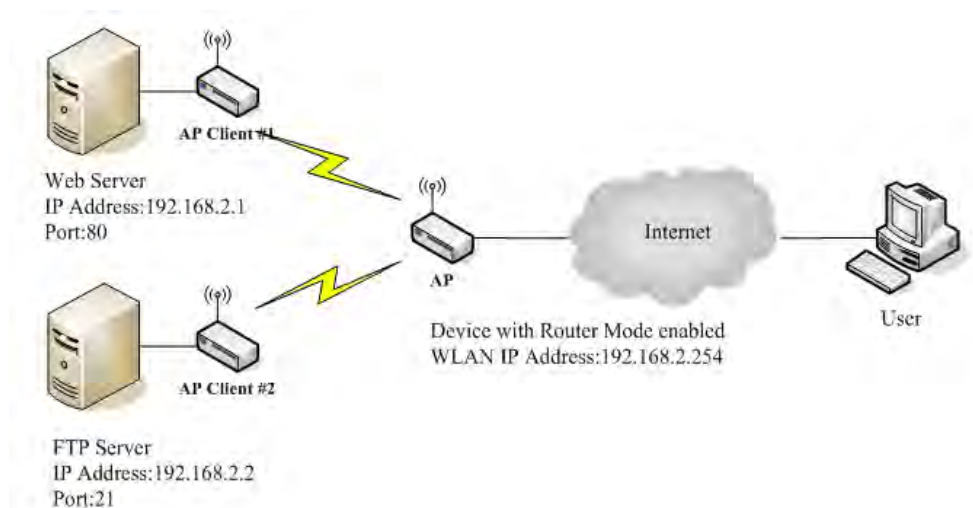

**Current Port Forwarding Table:**

Local IP Address	Protocol	Port Range	Comment	Select
192.168.2.1	TCP+UDP	80	Web Server	<input type="checkbox"/>
192.168.2.2	TCP+UDP	21	FTP Server	<input type="checkbox"/>

Delete Selected

Delete All

Reset

## Configuring DMZ

A Demilitarized Zone is used to provide Internet services without sacrificing unauthorized access to its local private network. Typically, the DMZ host contains devices accessible to Internet traffic, such as Web (HTTP) servers, FTP servers, SMTP (e-mail) servers and DNS servers. All inbound packets will be redirected to the computer you set. It also is useful if you run some applications (e.g. Internet games) that use uncertain incoming ports.

Wireless LAN Series

Site contents:

- Wizard
- Operation Mode
- Wireless
- TCP/IP
- Firewall
- Port Filtering
- IP Filtering
- MAC Filtering
- Port Forwarding
- DMZ
- VPN
- Management
- Reboot

### DMZ

A Demilitarized Zone is used to provide Internet services without sacrificing unauthorized access to its local private network. Typically, the DMZ host contains devices accessible to Internet traffic, such as Web (HTTP) servers, FTP servers, SMTP (e-mail) servers and DNS servers.

☐ Enable DMZ

DMZ Host IP Address:

Apply Changes Reset

Enable DMZ

Enables the DMZ.

DMZ Host IP Address

Input the IP Address of the computer that you want to expose to the Internet.

## Configuring VPN

### Wireless LAN Series

Site contents:

- Wizard
- Operation Mode
- Wireless
  - TCP/IP
  - Firewall
    - Port Filtering
    - IP Filtering
    - MAC Filtering
    - Port Forwarding
  - DMZ
  - VPN
- Management
- Reboot

### VPN Setup

This page is used to enable/disable VPN function and select a VPN connection to edit/delete.

☐ Enable IPSEC VPN

☐ Enable NAT Traversal

Generate RSA Key

Apply Changes

Show RSA Public Key

Current VPN Connection Table: WAN IP:0.0.0.0

#	Name	Active	Local Address	Remote Address	Remote Gateway	Status
1	-	-	-	-	-	-
2	-	-	-	-	-	-
3	-	-	-	-	-	-
4	-	-	-	-	-	-
5	-	-	-	-	-	-
6	-	-	-	-	-	-
7	-	-	-	-	-	-
8	-	-	-	-	-	-
9	-	-	-	-	-	-
10	-	-	-	-	-	-

EditDeleteRefresh

# Management Configuration

## Quality of Service (QoS)

QoS allows you to specify some rules, to ensure the quality of service in your network, such as Bandwidth Priority to allocate bandwidth. This function can be helpful in shaping and queuing traffic from LAN (WLAN) to WAN or LAN to WLAN, but not WLAN to WLAN.

Enable the QoS and then fill in the Bandwidth Ratio (H/M/L). The device has three Bandwidth Priorities High, Medium and Low. The user can allocate Bandwidth among these and the default is High:50%, Medium:30% and Low:20%.

Site contents:

- Wizard
- Operation Mode
- Wireless
- TCP/IP
- Firewall
- Management
  - Status
  - QoS
  - Bandwidth Control
  - SNMP
  - Statistics
  - DDNS
  - Time Zone
  - Log

### QoS setting

Entries in this table are used to restrict certain quality of service for your network. Use of such setting can be helpful in traffic control or queuing discipline of your network. The traffic control among WLAN stations is futile, it works between LAN(WLAN)/WAN or LAN/WLAN. The default queue is Med and once the bandwidth borrowed is enabled, the higher bandwidth priority will get the remaining bandwidth first.

3 ☒ **QoS Enabled**

☒ **Bandwidth Borrowed**

**Max Throughput :** 20000 (kbps)

**Bandwidth Ratio (H/M/L):** 4 50 : 30 : 20 (%)

5

The following table describes the priorities that you can apply to bandwidth.

Priority Level	Description
High	Typically used for voice or video applications that is especially sensitive to the variations in delay.
Medium	Typically used for important traffic that can tolerate some delay.
Low	Typically used for non-critical traffic such as a large number of transfers but that should not affect other application.

Click the QoS link under Management to open the QoS Setting page. This page is divided into three parts: basic settings, QoS rule settings, and current QoS setting table.

Enable QoS and enter Max Throughput (default 20Mbps) 、 Bandwidth Ratio (default H:50%, M:30%, L:20%)

☒ **QoS Enabled**

☒ **Bandwidth Borrowed**





**Max Throughput :** 20000 (kbps)

**Bandwidth Ratio (H/M/L):** 50 : 30 : 20 (%)

Label	Description
-------	-------------

QoS Enabled	Select this check box to enable quality of service.
Bandwidth Borrowed	Select this check box to allow a rule to borrow unused bandwidth. Bandwidth borrowing is decided by priority of the rules. Higher priority will get the remaining bandwidth first.
Max Throughput	Enter the value of max throughput in kbps that you want to allocate for one rule. The value should be between 1200 kbps and 24000 kbps.
Bandwidth Ratio (H/M/L)	You can specify the ratio of priority in these fields. The range is from 1 to 99. The High priority's ratio should be higher than Medium priority's ratio and Medium priority's ratio should be higher than Low priority's ratio.
Apply Changes	Click this button to save and apply your settings.

## QoS Rule settings

**Source IP Address :**   
**Source Netmask :**   
**Destination IP Address :**   
**Destination Netmask :**   
**Source MAC Address :**   
**Destination MAC Address :**   
**Source Port / range:**  to   
**Destination Port / range:**  to   
**Protocol:**    
**Bandwidth Priority:**    
**Filter Priority:**   (Lower number, Higher Priority)  
**IP TOS Set:**  

Label	Description
IP Address	Enter source/destination IP Address in dotted decimal notation.
Netmask	Once the source/destination IP Address is entered, the subnet mask address must be filled in this field.
MAC Address	Enter source/destination MAC Address.
Port / range	You can enter specific port number or port range of the source/destination
Protocol	Select a protocol from the drop down list box. Choose TCP/UDP, TCP or UDP.
Bandwidth Priority	Select a bandwidth priority from the drop down list box. Choose Low, Medium or High.
Filter Priority	Select a filter priority number from the drop down list box. Lower number gets higher priority while two rules have the same bandwidth priority.
IP TOS Match	Select an IP type-of-service value from the drop down list box. Choose Normal Service, Minimize Cost, Maximize Reliability, Maximize Throughput, or Minimize Delay.
Apply Changes	Click this button to save and apply your settings.
Reset	Click this button to begin re-input the parameters.

## Current QoS setting table


In this part, you can see how many rules have been specified. In addition you can see the detail about the rules and manage

the rules. This table can handle 50 rules at most.

**Current QoS Setting:**  
(Mask 255.255.255.255 means single host)

Src Adr	Dst Adr	Src MAC	Dst MAC	Src Port	Dst Port	Pro	Pri	Filter	TOS	Sel
192.168.2.11/24	140.113.27.181/24	00:05:9e:80:aa:ee	-	21-21	21-21	TCP	LOW	0	Normal	<input type="checkbox"/>
anywhere	anywhere	-	-	80-80	-	TCP/UDP	MED	0	Normal	<input type="checkbox"/>
192.168.2.13/24	anywhere	-	-	50000-50050	-	TCP/UDP	LOW	2	Normal	<input type="checkbox"/>
anywhere	192.168.2.12/24	-	-	-	-	TCP/UDP	MED	1	Normal	<input type="checkbox"/>
192.168.2.15/24	anywhere	00:05:9e:80:aa:cc	-	-	-	TCP/UDP	HIGH	0	Normal	<input type="checkbox"/>

An example for usage

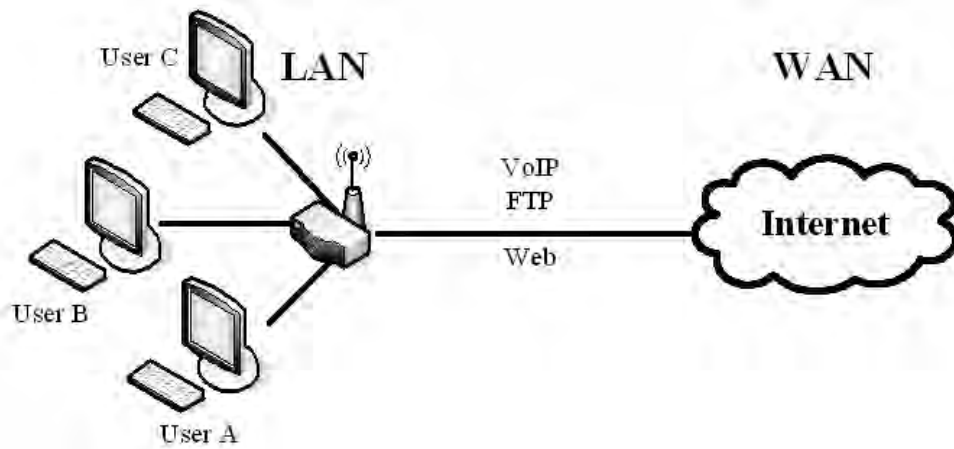

For example, there are three users in your network.

User A wants to browse the websites to retrieve information.

User B wants to use FTP connection to download a large file.

User C wants to use software phone to connect with customer.

Since VoIP traffic is sensitive to variations in delay (jitter), you can set High priority for User C. However, because the FTP transmission may take a long time, you can set Low priority for User B.

**Current QoS Setting:**  
(Mask 255.255.255.255 means single host)

Src Adr	Dst Adr	Src MAC	Dst MAC	Src Port	Dst Port	Pro	Pri	Filter	TOS	Sel
192.168.2.11/24	anywhere	-	-	5060-5061	-	TCP/UDP	HIGH	0	Normal	<input type="checkbox"/>
192.168.2.12/24	anywhere	-	-	21-21	-	TCP	LOW	0	Normal	<input type="checkbox"/>
192.168.2.13/24	anywhere	-	-	80-80	-	TCP	MED	0	Normal	<input type="checkbox"/>

## Bandwidth Control

This functionality can control the upstream and downstream bandwidth.

Enable Bandwidth Control and then enter Data Rate, Latency and Burst Packet in the specific field.

Site contents:

- Wizard
- Operation Mode
- Wireless
- TCP/IP
- Firewall
- Management 1
- Status
- QoS 2
- Bandwidth Control 3
- SNMP
- Statistics
- DDNS
- Time Zone
- Log
- Miscellaneous
- Upgrade Firmware
- Save/Reload Setting

## Bandwidth Control Settings

This page is used to configure the networking bandwidth. You can set the upstream and downstream data rate when the device is set to client mode.

3 ☒ **Bandwidth Control**

<b>Upstream Data Rate:</b>	<input type="text" value="24000"/>	(16-24000 kbps)
<b>Upstream Latency:</b>	<input type="text" value="50"/>	(20-1024 ms)
<b>Upstream Burst Packet:</b>	<input type="text" value="25600"/>	(1600-40000 Bytes)
<b>Downstream Data Rate:</b>	<input type="text" value="24000"/>	(16-24000 kbps)
<b>Downstream Latency:</b>	<input type="text" value="50"/>	(20-1024 ms)
<b>Downstream Burst Packet:</b>	<input type="text" value="25600"/>	(1600-40000 Bytes)

4

**NOTE:** Only device on Client mode or WISP mode this functionality can take effective.

#### Parameter Definition

Label	Description
Upstream Data Rate	Speed of transmit data that from Ethernet interface to Wireless interface.
Upstream Latency	Similar a waiting time the data queuing- time.
Upstream Burst Packet	Similar a buffer the data will into the buffer while the data is transmit or receive.
Downstream Data Rate	Speed of transmit data that from Wireless interface to Ethernet interface.
Downstream Latency	Similar a waiting time the data queuing- time.
Downstream Burst Packet	Similar a buffer the data will into the buffer while the data is transmit or receive.

## SNMP Agent

This device is compatible with SNMP v1/v2c and provides standard MIB II. Currently only the “public” community string is available and any setting modified by SNMP SET requests will be lost after rebooting the device.

Enable SNMP and then enter IP Address of SNMP Manager in Trap Receiver IP Address field and Community String in System Community String field then click the Apply Changes button.



Site contents:

- Wizard
- Operation Mode
- Wireless
- TCP/IP
- Firewall
- Management
- Status
- QoS
- Bandwidth Control
- SNMP
- Statistics
- DDNS
- Time Zone
- Log
- Miscellaneous
- Upgrade Firmware
- Save/Reload Setting
- Password
- Reboot

## SNMP Settings

This page is used to configure the SNMP settings. You can get some of the system information via setting the SNMP network protocol.

**3** ☒ **SNMP Enabled**

**System Community String:**

**System Name:**

**System Location:**

**System Contact:**

**Trap Receiver IP Address1:** **4**

**Address1 Community String:**

**Trap Receiver IP Address2:**

**Address2 Community String:**

**Trap Receiver IP Address3:**

**Address3 Community String:**

**5**

Following Table describes the SNMP configuration parameters

Label	Description
System Community String	This is password sent with each trap to the SNMP Manager.
System Name	Type the Name which is name of device.
System Location	Type the Location which is location of device
System Contact	Type the Name which is person or group when the device has problem can find they.
Trap Receiver IP Address	Type the IP Address which is address of SNMP Manager.
Trap Receiver Community String	This is password receive with trap from the device (SNMP Agent).

#### SNMP Traps

Traps	Description
coldStart(0)	The trap from device after reboot the device
linkDown(2)	The trap is sent when any of the links are down. See the following table.
linkup(3)	The trap is sent when any of the links are UP. See the following table.
authenticationFailure(4)	The trap is sent when the device receiving gets or sets requirement with wrong community.

#### Private MIBs

OID	Description
1.3.6.1.4.1.99.1	Mode, Operation Mode in device.
1.3.6.1.4.1.99.2	SSID, SSID of the device
1.3.6.1.4.1.99.3	Channel, Channel of the device in WLAN
1.3.6.1.4.1.99.4	Band, 802.11g / 802.11b only
1.3.6.1.4.1.99.5	RSSI, Receive Signal Strength Index (Support AP and Client RSSI)
1.3.6.1.4.1.99.6	Active_Clients, The number of associate clients
1.3.6.1.4.1.99.7	Active_Clients_List, Client's Information (MAC Address, Data Rate, RSSI...etc)
1.3.6.1.4.1.99.8	Encryption, Encryption type of device in Wireless Network



#### 1.3.6.1.4.1.99.1 - Mode

.1.3.6.1.4.1.99.1.2.1	MODE
.1.3.6.1.4.1.99.1.3.1	/bin/flash snmpget MODE
.1.3.6.1.4.1.99.1.100.1	0
.1.3.6.1.4.1.99.1.101.1	AP - Bridge

#### 1.3.6.1.4.1.99.2 - SSID

.1.3.6.1.4.1.99.2.2.1	SSID
.1.3.6.1.4.1.99.2.3.1	/bin/flash snmpget SSID
.1.3.6.1.4.1.99.2.100.1	0
.1.3.6.1.4.1.99.2.101.1	hank

#### 1.3.6.1.4.1.99.3 - Channel

.1.3.6.1.4.1.99.3.1.1	1
.1.3.6.1.4.1.99.3.2.1	CHANNEL
.1.3.6.1.4.1.99.3.3.1	/bin/flash snmpget CHANNEL
.1.3.6.1.4.1.99.3.100.1	0
.1.3.6.1.4.1.99.3.101.1	11

#### 1.3.6.1.4.1.99.4 - Band

.1.3.6.1.4.1.99.4.2.1	BAND
.1.3.6.1.4.1.99.4.3.1	/bin/flash snmpget BAND
.1.3.6.1.4.1.99.4.100.1	0
.1.3.6.1.4.1.99.4.101.1	802.11bg

#### 1.3.6.1.4.1.99.5 - RSSI

.1.3.6.1.4.1.99.5.2.1	RSSI
.1.3.6.1.4.1.99.5.3.1	/bin/flash snmpget RSSI
.1.3.6.1.4.1.99.5.100.1	0
.1.3.6.1.4.1.99.5.101.1	100

#### 1.3.6.1.4.1.99.6 - Active\_Clients

.1.3.6.1.4.1.99.6.2.1	ACTIVE_CLIENTS
.1.3.6.1.4.1.99.6.3.1	/bin/flash snmpget ACTIVE_CLIENTS
.1.3.6.1.4.1.99.6.100.1	0
.1.3.6.1.4.1.99.6.101.1	1

#### 1.3.6.1.4.1.99.7 - Active\_Clients\_List

.1.3.6.1.4.1.99.7.2.1	ACTIVE_CLIENTS_LIST
.1.3.6.1.4.1.99.7.3.1	/bin/flash snmpget ACTIVE_CLIENTS_LIST
.1.3.6.1.4.1.99.7.100.1	0 <b>MAC</b> <b>Data Rate</b> <b>RSSI</b>
.1.3.6.1.4.1.99.7.101.1	00:13:02:03:51:5e, 102, 125, 54, no, 300, 57(-55 dbm)

#### 1.3.6.1.4.1.99.8 - Encryption

.1.3.6.1.4.1.99.8.2.1	ENCRYPTION
.1.3.6.1.4.1.99.8.3.1	/bin/flash snmpget ENCRYPTION
.1.3.6.1.4.1.99.8.100.1	0 <b>AP-WEP</b>
.1.3.6.1.4.1.99.8.101.1	WEP(AP), Disabled(WDS)

## Upgrade Firmware

### Firmware Types

The firmware for this device is divided into 2 parts, one is web pages firmware the other is application firmware, usually named g120webpage.bin and g120linux.bin. To upgrade the firmware, we suggest the user first upgrade the application firmware then the web pages firmware.

### Upgrading Firmware

The Web-Browser upgrading interface is the simplest and safest way to upgrade the firmware. It will check the firmware checksum and signature, and the wrong firmware won't be accepted. After upgrading, the device will reboot.

**WARNING:** Older versions of the firmware may cause the device configuration to be restored to the factory default setting upon rebooting and the original configuration data will be lost!

To upgrade the firmware, just enter the file name with full path and click the "Upload" button.

#### *Memory Limitation*


To make sure the device has enough memory to upload firmware, the system will check the capacity of free memory. If the device lacks enough memory to upload the firmware, please temporarily turn-off some functions then reboot the device to get enough memory for firmware uploading.



## Save/Reload Settings

### Reset Setting to Factory Default Value

Since the device is designed for outdoor use, there is no interface outside the housing to reset the configuration value to the factory default value. The device provides the Web-Browser interface to reset the configuration data. After resetting it, the current configuration data will be lost and restored to factory default value.

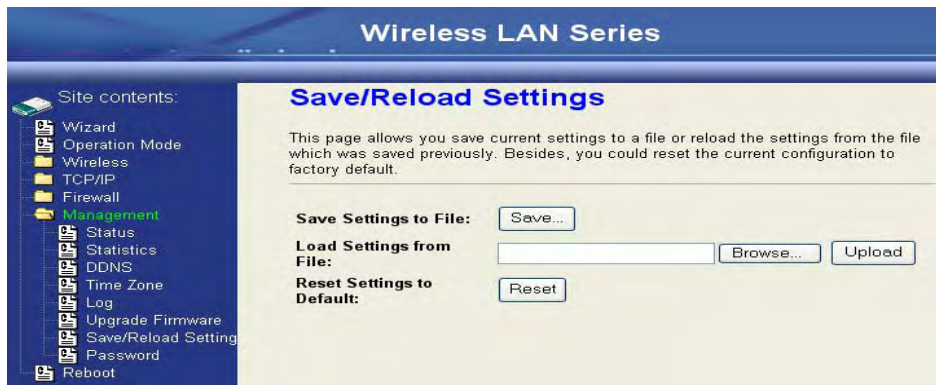

To save & restore configuration data of device, just enter the target filename with full path to your local host then you can back up the configuration data to local host or restore configuration data to the device.

## Password

The Web-Browser interface has password protection.



To disable the Web-Browser password protection just leave the "User Name" field to blank then click the "Apply Changes" button.

## Using CLI Menu


### **Start a SSH(Secure Shell) client session to login to the device**

The SSH server daemon inside the device uses TCP port 22. User must use SSH client utility such as Putty to login to the device. The default password for user “root” is either “qwerty” or “zplus12320400” depending on your firmware version. Once the user has logged in to the device, then the password can be changed by CLI command.

### **Execute CLI program**

This program won't execute automatically when user logs in to the device. The user must manually execute it by typing the case-sensitive command “cli”. Please note that modified settings won't save permanently until the user executes “Apply Changes to Flash” and reboots the device. The new settings modified by CLI will take effect after rebooting the device.

**Menu Tree List**

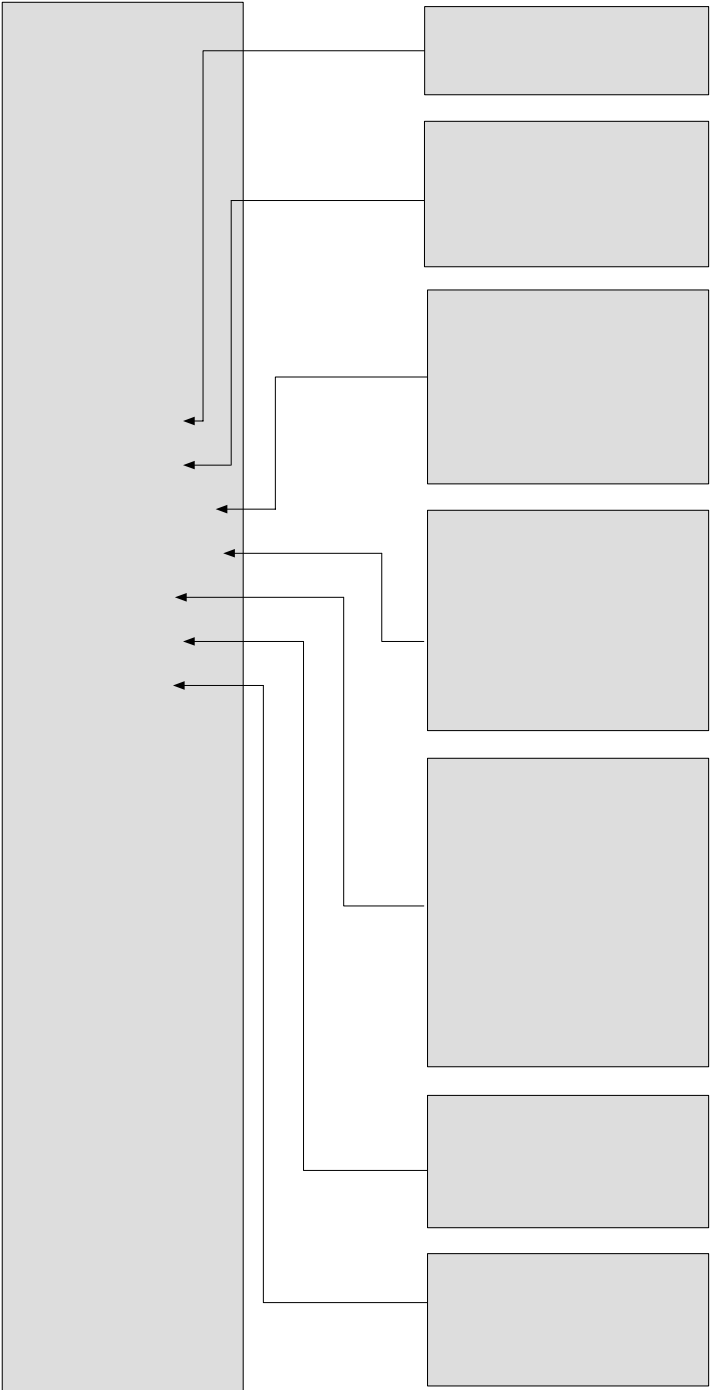


**Password**

The SSH Configuration interface has password protection. Please note that this password is separate from the web configuration password.

A. Operation Mode

B. Wireless Setting

C. TCP/IP-LAN Setting

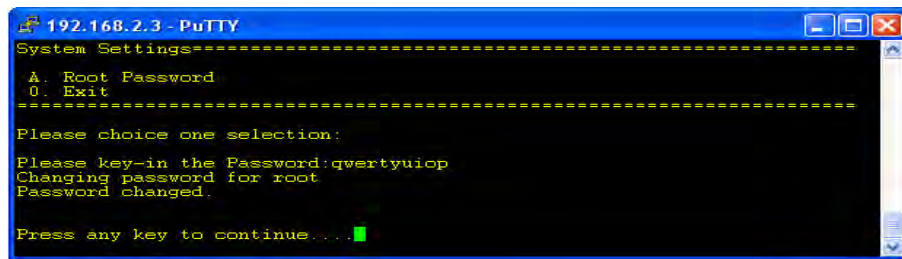


A screenshot of a PuTTY terminal window titled "192.168.2.3 - PuTTY". The terminal displays a menu with two options: "A. Root Password" and "0. Exit", separated by dashed lines. Below the menu, the text "Please choice one selection:" is shown. The user has selected option A, and the terminal displays "Please key-in the Password:qwertyuio", "Changing password for root", and "Password changed.". At the bottom, it says "Press any key to continue..." followed by a green cursor.

```
192.168.2.3 - PuTTY
System Settings-----
A. Root Password
0. Exit
-----
Please choice one selection:
Please key-in the Password:qwertyuio
Changing password for root
Password changed.
Press any key to continue... █
```

# Auto Discovery Tool

Auto Discovery can be used to find out how many devices are in your local area network

The name of the tool is WirelessConf.exe.

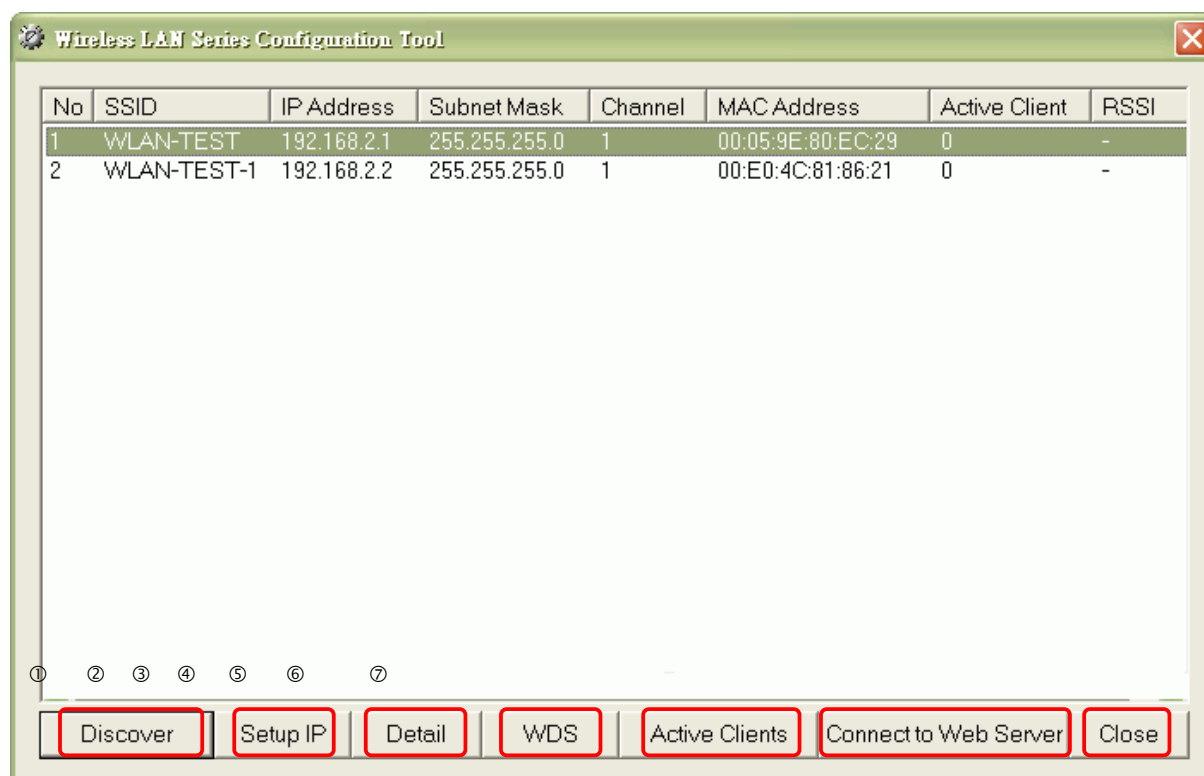


## Discover

After pressing this button, you will see how many devices are in your network and you would see the basic information about these devices, such as:

- SSID
- IP Address
- Subnet Mask
- Channel number
- MAC Address

## Setup IP

After you press the Setup IP button, you will see Setup IP Address window. You can change the device's IP Address, Netmask, and Default Gateway in this window. But if the device's web server needs User Name and Password to login, you should fill in these two fields and then apply changes.

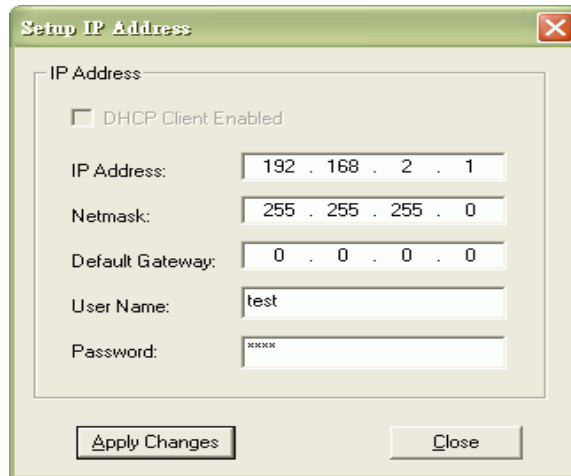

**Setup IP Address**

IP Address

☐ DHCP Client Enabled

IP Address: 192 . 168 . 2 . 1

Netmask: 255 . 255 . 255 . 0

Default Gateway: 0 . 0 . 0 . 0


User Name: test

Password: xxxxx

Apply Changes Close

## Detail

If you want to see more detailed information, you could press the Detail button, and then you will see the Detail Information window.

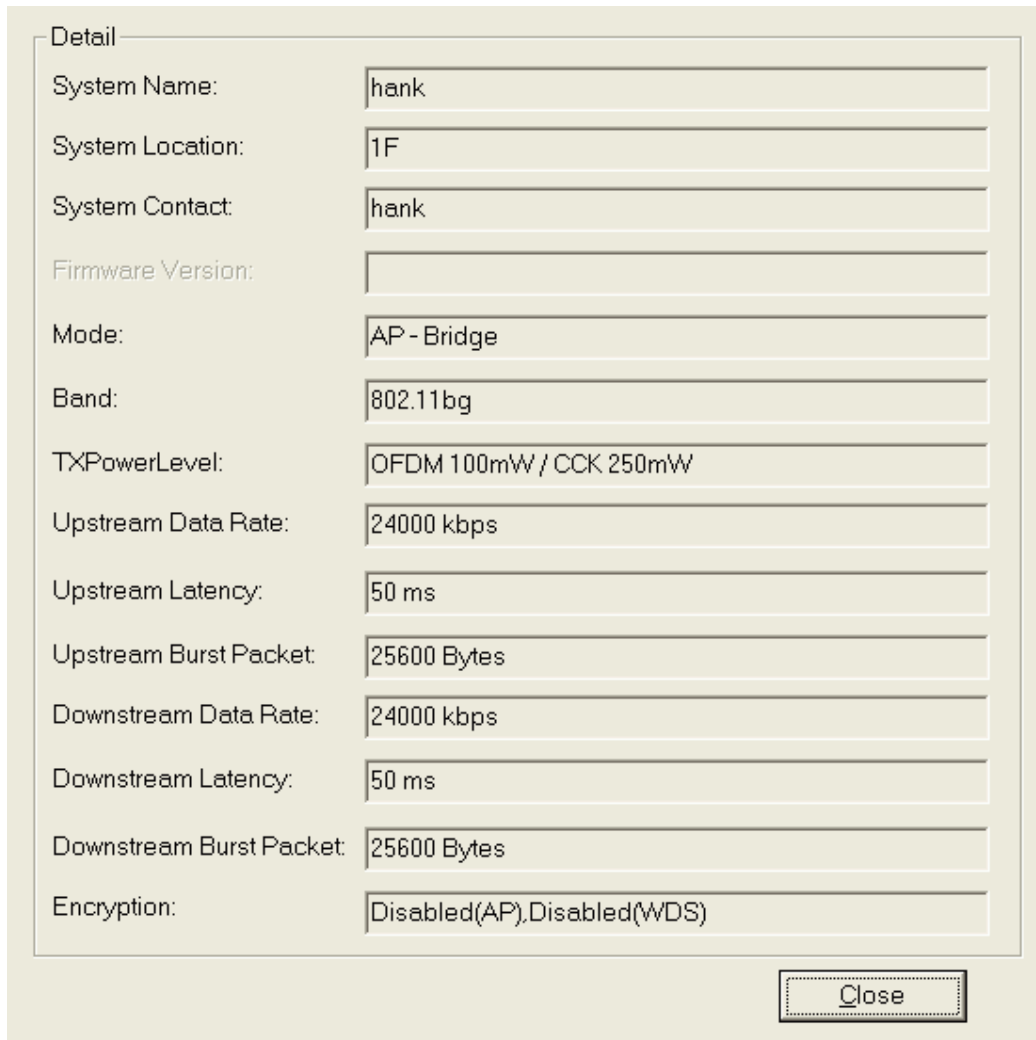

Detail

System Name: hank

System Location: 1F

System Contact: hank

Firmware Version:

Mode: AP - Bridge

Band: 802.11bg

TXPowerLevel: OFDM 100mW / CCK 250mW

Upstream Data Rate: 24000 kbps

Upstream Latency: 50 ms

Upstream Burst Packet: 25600 Bytes

Downstream Data Rate: 24000 kbps

Downstream Latency: 50 ms

Downstream Burst Packet: 25600 Bytes


Encryption: Disabled(AP),Disabled(WDS)

Close



## WDS


If the device you selected is in WDS mode or AP+WDS mode, you can press the WDS button and then you will see the WDS List window.

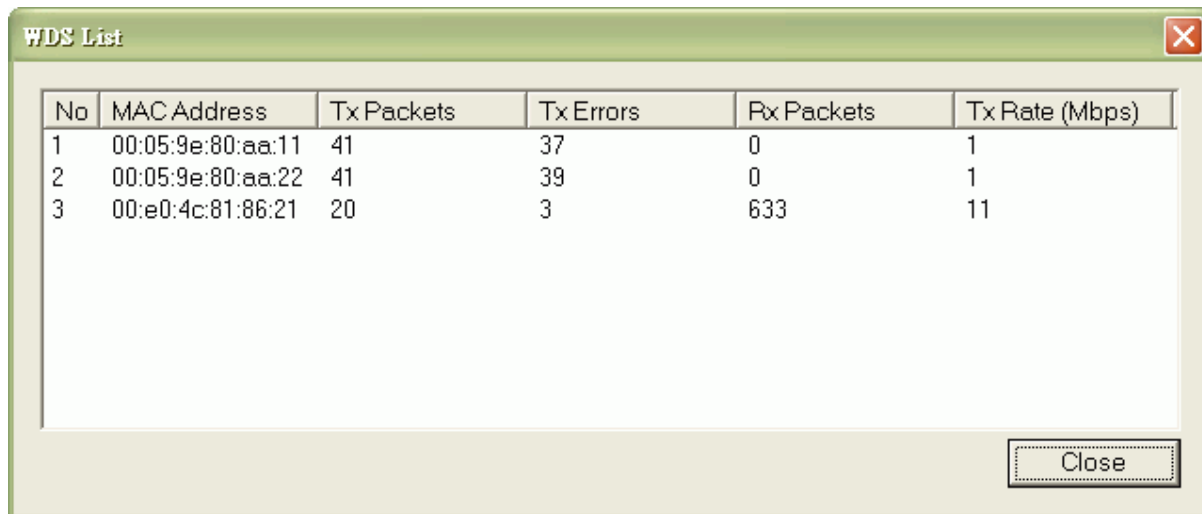A screenshot of a software window titled "WDS List" with a green header bar and a red close button in the top right corner. The window contains a table with six columns: "No", "MAC Address", "Tx Packets", "Tx Errors", "Rx Packets", and "Tx Rate (Mbps)". There are three rows of data. A "Close" button is located at the bottom right of the window.

No	MAC Address	Tx Packets	Tx Errors	Rx Packets	Tx Rate (Mbps)
1	00:05:9e:80:aa:11	41	37	0	1
2	00:05:9e:80:aa:22	41	39	0	1
3	00:e0:4c:81:86:21	20	3	633	11

## Active Clients

After pressing the Active Clients button, you will see the WLAN AP Active Clients window. with information, such as:

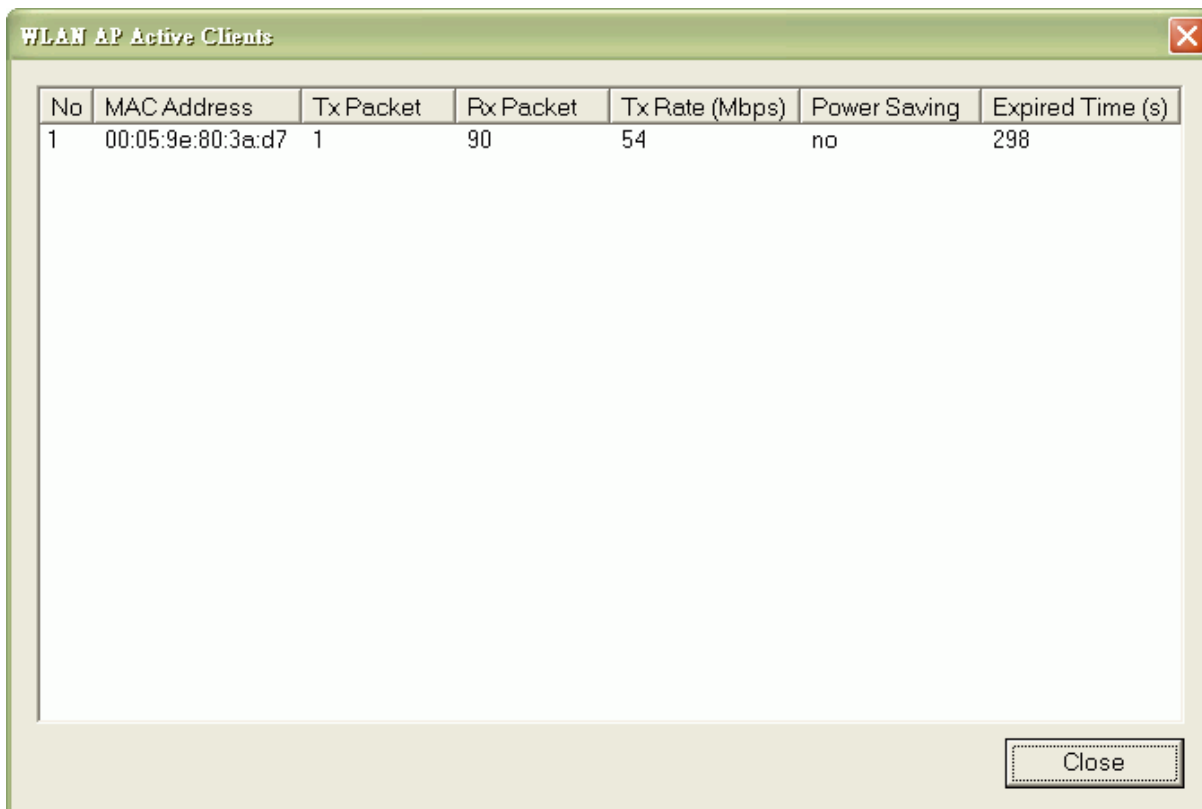A screenshot of a software window titled "WLAN AP Active Clients" with a green header bar and a red close button in the top right corner. The window contains a table with seven columns: "No", "MAC Address", "Tx Packet", "Rx Packet", "Tx Rate (Mbps)", "Power Saving", and "Expired Time (s)". There is one row of data. A "Close" button is located at the bottom right of the window.

No	MAC Address	Tx Packet	Rx Packet	Tx Rate (Mbps)	Power Saving	Expired Time (s)
1	00:05:9e:80:3a:d7	1	90	54	no	298

## Connect to Web Server

If you want connect to device's web server you can press the Connect to Web Server button, or double-click on the device.