

FCC PART 15E TEST REPORT FOR CERTIFICATION
On Behalf of

Altai Technologies Limited

Altai A3c Indoor Dual-band 3X3 802.11ac WiFi AP

Model Number: WA3311NAC-C

FCC ID: UCC-WA3311NAC-C

Prepared for : Altai Technologies Limited

Units 209, 2/F, Lakeside 2.10 Science Park West Avenue,
Hong Kong Science Park, Shatin, Hong Kong, China

Prepared By : Audix Technology (Shenzhen) Co., Ltd.

No. 6, Ke Feng Rd., 52 Block,
Shenzhen Science & Industrial Park,
Nantou, Shenzhen, Guangdong, China

Tel: (0755) 26639496

Report Number : ACS-F16048

Date of Test : Jan.05~Mar.14, 2016

Date of Report : Mar.22, 2016

TABLE OF CONTENTS

Description	Page
1. SUMMARY OF STANDARDS AND RESULTS	1-1
1.1. Description of Standards and Results	1-1
2. GENERAL INFORMATION	2-1
2.1. Description of Device (EUT)	2-1
2.2. Test Information	2-2
2.1. Tested Supporting System Details.....	2-3
2.2. Block diagram of connection between the EUT and simulators	2-3
2.3. Test Facility	2-4
2.4. Measurement Uncertainty (95% confidence levels, k=2).....	2-4
3. POWER LINE CONDUCTED EMISSION TEST.....	3-1
3.1. Test Equipments	3-1
3.2. Block Diagram of Test Setup	3-1
3.3. Power Line Conducted Emission Test Limits	3-1
3.4. Configuration of EUT on Test.....	3-2
3.5. Operating Condition of EUT	3-2
3.6. Test Procedure	3-2
3.7. Power Line Conducted Emission Test Results	3-2
4. RADIATED EMISSION TEST	4-1
4.1. Test Equipment.....	4-1
4.2. Block Diagram of Test Setup	4-2
4.3. Radiated Emission Limit	4-3
4.4. EUT Configuration on Test	4-3
4.5. Operating Condition of EUT	4-4
4.6. Test Procedure	4-4
4.7. Radiated Emission Test Results	4-5
5. BAND EDGE COMPLIANCE TEST	5-1
5.1. Test Equipment.....	5-1
5.2. Limit	5-1
5.3. Test Produce	5-1
5.4. Test Results	5-1
6. 6dB&26dB Bandwidth Test	6-1
6.1. Test Equipment.....	6-1
6.2. Limit	6-1
6.3. Test Procedure	6-1
6.4. Test Results	6-1
7. OUTPUT POWER TEST	7-1
7.1. Test Equipment.....	7-1
7.2. Limit	7-1
7.3. Test Procedure	7-1
7.4. Test Results	7-2
8. SPECTRAL DENSITY TEST	8-1
8.1. Test Equipment.....	8-1
8.2. Limit	8-1
8.3. Test Procedure	8-1
8.4. Test Results	8-2
9. FREQUENCY STABILITY MEASUREMENT	9-1
9.1. Test Equipment.....	9-1
9.2. Limit	9-1
9.3. Test Procedure	9-1
9.4. Test Result	9-1

10.	MPE ESTIMATION	10-1
	10.1. Limit for General Population/ Uncontrolled Exposures	10-1
	10.2. Estimation Result.....	10-1
11.	ANTENNA REQUIREMENT	11-1
	11.1. Standard Applicable	11-1
	11.2. Antenna Connected Construction.....	11-1
12.	DEVIATION TO TEST SPECIFICATIONS	12-1
13.	PHOTOGRAPH OF TEST.....	13-1
	13.1. Photos of Power Line Conducted Emission Test	13-1
	13.2. Photos of Radiated Emission Test	13-2
14.	PHOTOGRAPHS OF EUT	14-1

TEST REPORT CERTIFICATION

Applicant : Altai Technologies Limited
 Manufacturer : Altai Technologies Limited
 EUT Description : Altai A3c Indoor Dual-band 3X3 802.11ac WiFi AP
 FCC ID : UCC-WA3311NAC-C
 (A) Model No. : WA3311NAC-C
 (B) Power Supply : DC 56V
 (C) Test Voltage : DC 56V From POE Input AC 120V/60Hz

Tested for comply with:
 FCC CFR47 Part 15 Subpart E: 2014

Test procedure used:
 ANSI C63.10: 2013
 KDB789033D01

The device described above is tested by AUDIX TECHNOLOGY (SHENZHEN) CO., LTD. to confirm comply with all the FCC Part 15 Subpart E requirements. The test results are contained in this test report and AUDIX TECHNOLOGY (SHENZHEN) CO., LTD. is assumed full responsibility for the accuracy and completeness of these tests. Also, this report shows that the Equipment Under Test (EUT) is to be technically compliant with the FCC and IC requirements. This report contains data that are not covered by the NVLAP accreditation.

This Report is made under FCC Part 2.1075. No modifications were required during testing to bring this product into compliance.

This report applies to above tested sample only. This report shall not be reproduced in part without written approval of AUDIX TECHNOLOGY (SHENZHEN) CO., LTD.

The report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, or any agency of the federal government.

Date of Test : Jan.05~Mar.14, 2016 Report of date: Mar.22, 2016

Prepared by : Cindy Zhu Reviewed by : Sunny Lu
 Cindy Zhu / Assistant Sunny Lu / Assistant Manager

信華科技(深圳)有限公司
 Audix Technology (Shenzhen) Co., Ltd.
 EMC 部門報告專用章
 Stamp only for EMC Dept. Report
 Signature David Jin

Approved & Authorized Signer : David Jin
 David Jin / Manager

1. SUMMARY OF STANDARDS AND RESULTS

1.1. Description of Standards and Results

The EUT have been tested according to the applicable standards as referenced below.

EMISSION		
Description of Test Item	Standard	Results
Power Line Conducted Emission	FCC Part 15: 15.207	PASS
Radiated Emission	FCC Part 15: 15.209	PASS
Band Edge Compliance	FCC Part 15: 15.407	PASS
6dB&26Bandwidth Test	FCC Part 15: 15.407(a)	PASS
Output Power Test	FCC Part 15: 15.407(a)	PASS
Power Spectral Density Test	FCC Part 15: 15.407(a)	PASS
Frequency Stability	FCC Part 15: 15.407(g)	PASS
Antenna requirement	FCC Part 15: 15.203	PASS

N/A is an abbreviation for Not Applicable.

2. GENERAL INFORMATION

2.1. Description of Device (EUT)

Product Name	: Altai A3c Indoor Dual-band 3X3 802.11ac WiFi AP
Model Number	: WA3311NAC-C
FCC ID	: UCC-WA3311NAC-C
Radio	: IEEE802.11 a/b/g/n/ac
Operation Frequency	: IEEE 802.11a: 5745MHz—5825MHz IEEE 802.11b: 2412MHz—2462MHz IEEE 802.11g: 2412MHz—2462MHz IEEE 802.11n HT20: 2412MHz—2462MHz; 5745MHz—5825MHz IEEE 802.11n HT40: 2422MHz—2452MHz; 5755MHz—5795MHz IEEE 802.11ac VHT20: 5745MHz—5825MHz IEEE 802.11ac VHT40: 5755MHz—5795MHz IEEE 802.11ac VHT80: 5775MHz
Modulation Technology	: IEEE 802.11b: DSSS(CCK,DQPSK,DBPSK) IEEE 802.11a/g: OFDM(64QAM, 16QAM, QPSK, BPSK) IEEE 802.11ac VHT20, VHT40, VHT80: OFDM(16QAM, 64QAM, 256QAM, QPSK, BPSK) IEEE 802.11n HT20, HT40: OFDM (64QAM, 16QAM,QPSK,BPSK)
Antenna Assembly Gain	: Built-in Omni Antenna, 2.4GHz: 4dBi gain, 5GHz: 6dBi gain
Applicant	: Altai Technologies Limited Units 209, 2/F, Lakeside 2.10 Science Park West Avenue, Hong Kong Science Park, Shatin, Hong Kong, China
Manufacturer	: Altai Technologies Limited Units 209, 2/F, Lakeside 2.10 Science Park West Avenue, Hong Kong Science Park, Shatin, Hong Kong, China
AC Adapter	: Manufacturer: FSGREAT;M/N: GRT-560110A INPUT:AC 100-240V 50/60Hz OUTPUT:56V 1100mA
Date of Test	: Jan.05~Mar.14, 2016
Date of Receipt	: Jan.02, 2016
Sample Type	: Prototype production

2.2. Test Information

A special test software was used to control EUT work in Continuous TX mode (nearly 100% duty cycle), and select test channel, wireless mode and data rate.

Tested mode, channel, and data rate information			
Mode	data rate (Mbps)(see Note)	Channel	Frequency (MHz)
IEEE 802.11a	6	Low :CH149	5745
	6	Middle: CH157	5785
	6	High: CH165	5825
IEEE 802.11nHT20	MCS0	Low :CH149	5745
	MCS0	Middle: CH157	5785
	MCS0	High: CH165	5825
IEEE 802.11nHT40	MCS0	Low :CH151	5755
	MCS0	High: CH159	5795
IEEE 802.11acVHT20	MCS0	Low :CH149	5745
	MCS0	Middle: CH157	5785
	MCS0	High: CH165	5825
IEEE 802.11acVHT40	MCS0	Low :CH151	5755
	MCS0	High: CH159	5795
IEEE 802.11acVHT80	MCS0	CH155	5775


Note: 1. According exploratory test, EUT will have maximum output power in those data rate, so those data rate were used for all test.

Note: 2. This device use MIMO Mode, test with three antenna transmit simultaneously and comply with KDB662911D01 V02r01.

2.1. Tested Supporting System Details

No.	Description	ACS No.	Manufacturer	Model	Serial Number
1	Notebook	N/A	DELL	PP09S	N/A
		Power Cord: Unshielded, Detachable, 1.8m Power Adapter: Manufacturer: DELL, M/N: LA65NS1-00 Cable: Unshielded, Detachable, 4.0m(Bond one ferrite core)			

2.2. Block diagram of connection between the EUT and simulators

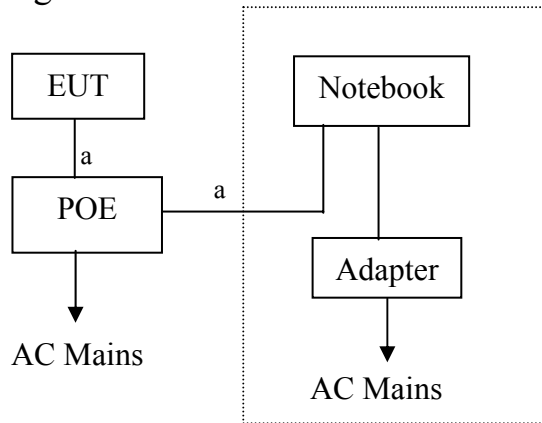

a: LAN Cable

(EUT: Altai A3c Indoor Dual-band 3X3 802.11ac WiFi AP)

2.3. Test Facility

Site Description

Name of Firm	:	Audix Technology (Shenzhen) Co., Ltd. No. 6, Ke Feng Rd., 52 Block, Shenzhen Science & Industrial Park, Nantou, Shenzhen, Guangdong, China
3m Anechoic Chamber	:	Certificated by FCC, USA Registration Number: 90454 Valid Date: Dec.30, 2017
3m & 10m Anechoic Chamber	:	Certificated by FCC, USA Registration Number: 794232 Valid Date: Jul.12, 2016
EMC Lab.	:	Certificated by Industry Canada Registration Number: IC 5183A-1 Valid Date: May.14, 2017
	:	Certificated by DAkkS, Germany Registration No: D-PL-12151-01-00 Valid Date: Dec.15, 2016
	:	Accredited by NVLAP, USA NVLAP Code: 200372-0 Valid Date: Mar.31, 2016

2.4. Measurement Uncertainty (95% confidence levels, k=2)


Test Item	Uncertainty
Uncertainty for Conduction emission test in No. 1 Conduction	3.4dB (150KHz to 30MHz)
Uncertainty for Radiation Emission test in 3m chamber	2.6 dB(30~200MHz, Polarization: H)
	2.6 dB(30~200MHz, Polarization: V)
	3.0 dB(200M~1GHz, Polarization: H)
	2.8 dB(200M~1GHz, Polarization: V)
Uncertainty for Radiation Emission test in 3m chamber (1GHz-18GHz)	6.3 dB (1~6GHz, Distance: 3m)
	5.7 dB (6~18GHz, Distance: 3m)
Uncertainty for Radiated Spurious Emission test in RF chamber	3.6 dB
Uncertainty for Conduction Spurious emission test	2.0 dB
Uncertainty for Output power test	0.8 dB
Uncertainty for Bandwidth test	83 kHz
Uncertainty for DC power test	0.1 %
Uncertainty for test site temperature and humidity	0.6°C
	3%

3. POWER LINE CONDUCTED EMISSION TEST

3.1. Test Equipments

Item	Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Cal. Interval
1.	1# Shielding Room	AUDIX	N/A	N/A	Apr.17,15	1 Year
2.	Test Receiver	Rohde & Schwarz	ESCI	100842	Apr.28,15	1 Year
3.	L.I.S.N.#1	Rohde & Schwarz	ESH2-Z5	100429	Oct.18,15	1 Year
4.	L.I.S.N.#2	Kyoritsu	K NW-403D	8-1750-2	Apr.28,15	1 Year
5.	Terminator	Hubersuhner	50Ω	No.1	Apr.28,15	1 Year
6.	Terminator	Hubersuhner	50Ω	No.2	Apr.28,15	1 Year
7.	RF Cable	MIYAZAKI	3D-2W	No.1	Apr.28,15	1Year
8.	Coaxial Switch	Anritsu	MP59B	6200766906	Apr.28,15	1 Year
9.	Test Software	AUDIX	E3	6.100913a	N/A	N/A

3.2. Block Diagram of Test Setup

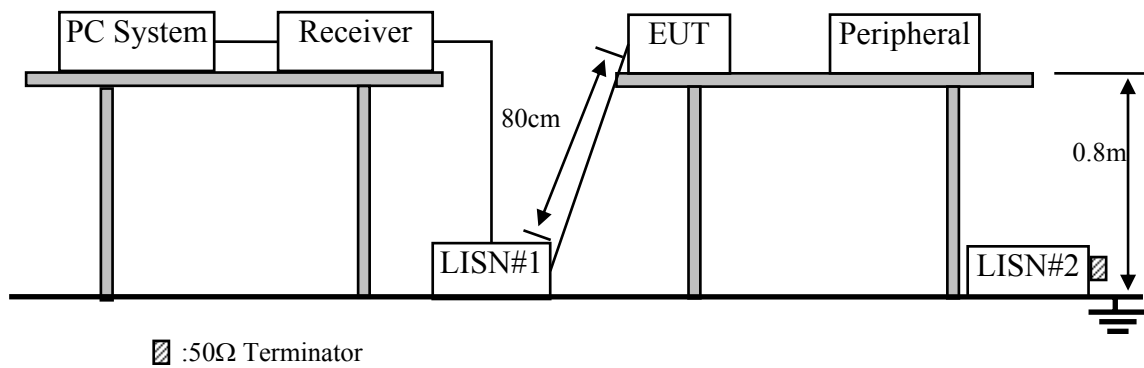

3.3. Power Line Conducted Emission Test Limits

Frequency	Maximum RF Line Voltage	
	Quasi-Peak Level dB(μV)	Average Level dB(μV)
150kHz ~ 500kHz	66 ~ 56*	56 ~ 46*
500kHz ~ 5MHz	56	46
5MHz ~ 30MHz	60	50

Notes: 1. * Decreasing linearly with logarithm of frequency.

2. The lower limit shall apply at the transition frequencies.

3.4. Configuration of EUT on Test

The following equipment are installed on Power Line Conducted Emission Test to meet the commission requirement and operating regulations in a manner which tends to maximize its emission characteristics in a normal application.

3.4.1. Altai A3c Indoor Dual-band 3X3 802.11ac WiFi AP (EUT)

Model Number : WA3311NAC-C
Serial Number : N/A

3.4.2. Support Equipment: As Tested Supporting System Details, in Section 2.2.

3.5. Operating Condition of EUT

3.5.1. Setup the EUT and simulator as shown as Section 3.2.

3.5.2. Turned on the power of all equipment.

3.5.3. PC run test software to control EUT work in Tx mode.

3.6. Test Procedure


The EUT was placed on a non-metallic table, 80cm above the ground plane. The EUT Power Via PC connected to the power mains through a line impedance stabilization network (L.I.S.N. 1#). This provides a 50 ohm coupling impedance for the EUT (Please refer the block diagram of the test setup and photographs). The AC line are checked to find out the maximum conducted emission. In order to find the maximum emission levels, the relative positions of equipment and all of the interface cables shall be changed according to ANSI C63.10: 2013 on Conducted Emission Test.

The bandwidth of test receiver (R & S ESCI) is set at 9kHz.

The frequency range from 150kHz to 30MHz is checked.

3.7. Power Line Conducted Emission Test Results


PASS. (All emissions not reported below are too low against the prescribed limits.)

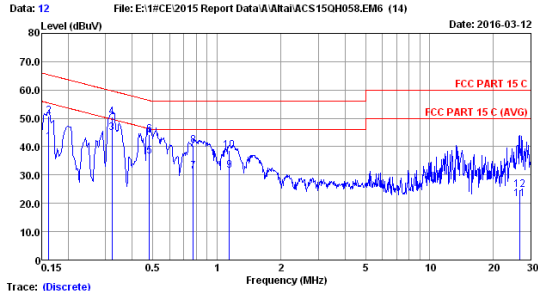

Trace: (Discrete)
 Site no :1# Conduction Data No :12
 Dis./Lisn :2015 ESH2-25 LINE
 Limit :FCC PART 15 C
 Env./Ins. :23.2°C/50% Engineer :Leo-Li
 EUT :Altai A3c Indoor Dual-band 3x3 802.11ac WiF1 AP
 Power Rating :DC 56V From POE Input AC 120V/60Hz
 Test Mode :TX Mode
 M/N:WA3311NAC-C

No	Freq (MHz)	LISN Factor (dB)	Cable Loss (dB)	Reading (dBuV)	Emission Level (dBuV)	Limits (dBuV)	Margin (dB)	Remark
1	0.162	0.12	0.05	41.60	41.77	55.36	13.59	Average
2	0.162	0.12	0.05	50.70	50.87	65.36	14.49	QP
3	0.321	0.13	0.06	44.60	44.79	49.68	4.89	Average
4	0.321	0.13	0.06	50.40	50.59	59.68	9.09	QP
5	0.481	0.26	0.06	36.30	36.62	46.32	9.70	Average
6	0.481	0.26	0.06	43.90	44.22	56.32	12.10	QP
7	0.775	0.15	0.07	31.20	31.42	46.00	14.58	Average
8	0.775	0.15	0.07	40.20	40.42	56.00	15.58	QP
9	1.147	0.16	0.08	31.20	31.44	46.00	14.56	Average
10	1.147	0.16	0.08	38.50	38.74	56.00	17.26	QP
11	26.558	0.99	0.37	20.30	21.66	50.00	28.34	Average
12	26.558	0.99	0.37	23.50	24.86	60.00	35.14	QP

Remarks: 1.Emission Level=LISN Factor+Cable Loss+Reading.
 2.If the average limit is met when using a quasi-peak detector, the EUT shall be deemed to meet both limits and measurement with average detector is unnecessary.

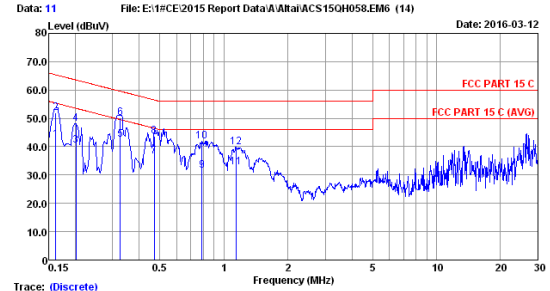

Trace: (Discrete)
 Site no :1# Conduction Data No :11
 Dis./Lisn :2015 ESH2-25 NEUTRAL
 Limit :FCC PART 15 C
 Env./Ins. :23.2°C/50% Engineer :Leo-Li
 EUT :Altai A3c Indoor Dual-band 3x3 802.11ac WiF1 AP
 Power Rating :DC 56V From POE Input AC 120V/60Hz
 Test Mode :TX Mode
 M/N:WA3311NAC-C

No	Freq (MHz)	LISN Factor (dB)	Cable Loss (dB)	Reading (dBuV)	Emission Level (dBuV)	Limits (dBuV)	Margin (dB)	Remark
1	0.162	0.12	0.05	42.30	42.47	55.36	12.89	Average
2	0.162	0.12	0.05	51.90	52.07	65.36	13.29	QP
3	0.202	0.12	0.05	40.20	40.37	53.54	13.17	Average
4	0.202	0.12	0.05	48.04	48.21	63.54	15.33	QP
5	0.326	0.13	0.06	42.30	42.49	49.55	7.06	Average
6	0.326	0.13	0.06	49.90	50.09	59.55	9.46	QP
7	0.471	0.14	0.06	36.50	36.70	46.50	9.80	Average
8	0.471	0.14	0.06	43.50	43.70	56.50	12.80	QP
9	0.788	0.15	0.07	31.50	31.72	46.00	14.28	Average
10	0.788	0.15	0.07	41.68	41.90	56.00	14.10	QP
11	1.141	0.17	0.08	32.40	32.65	46.00	13.35	Average
12	1.141	0.17	0.08	39.71	39.96	56.00	16.04	QP

Remarks: 1.Emission Level=LISN Factor+Cable Loss+Reading.
 2.If the average limit is met when using a quasi-peak detector, the EUT shall be deemed to meet both limits and measurement with average detector is unnecessary.

4. RADIATED EMISSION TEST

4.1. Test Equipment

4.1.1. For frequency range 30 MHz ~1000MHz (In 3m Anechoic Chamber)


Item	Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Cal. Interval
1.	3#Chamber	AUDIX	N/A	N/A	Mar.28,15	1 Year
2.	EMI Spectrum	Agilent	E4407B	MY41440292	Apr.28,15	1 Year
3.	Test Receiver	Rohde & Schwarz	ESVS10	834468/011	Apr.28,15	1 Year
4.	Amplifier	HP	8447D	2648A04738	Apr.28,15	1 Year
5.	Trilog-Broadband Antenna	SCHWARZBECK	VULB 9168	9168-493	May.06,15	1 Year
6.	RF Cable	MIYAZAKI	CFD400-N W(3.5M)	No.3	Apr.28,15	1 Year
7.	RF Cable	MIYAZAKI	CFD400-L W(22M)	No.7	Apr.28,15	1 Year
8.	Coaxial Switch	Anritsu	MP59B	6201397222	Apr.28,15	1 Year
9.	Test Software	AUDIX	E3	6.2009-5-21a(n)	N/A	N/A

4.1.2. For frequency range 1GHz~40GHz (In 3m Anechoic Chamber)


Item	Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Cal. Interval
1.	Spectrum Analyzer	Agilent	E4446A	US44300459	Apr.28,15	1 Year
2.	Horn Antenna	ETC	MCTD 1209	DRH15F03007	Feb.03,15	1 Year
3.	Amplifier	Agilent	8449B	3008A02495	Apr.28,15	1 Year
4.	RF Cable	Hubersuhner	SUCOFLEX106	77977/6	Apr.28,15	1 Year
5.	Horn Antenna	ETS	3116	00060088	Nov.18.15	1 Year
6.	Test Software	AUDIX	E3	6.2009-5-21a(n)	N/A	N/A

4.2. Block Diagram of Test Setup

For frequency range 30MHz-1000MHz

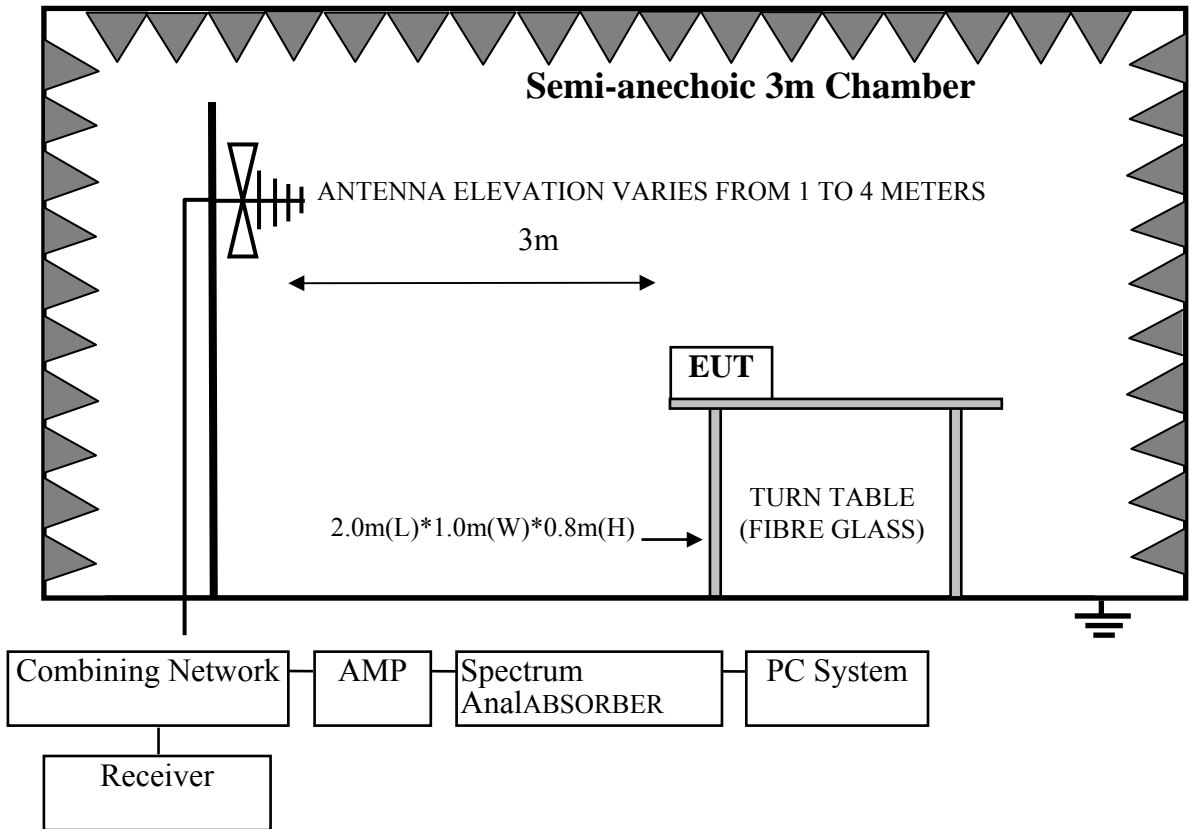

For frequency range 1GHz-40GHz

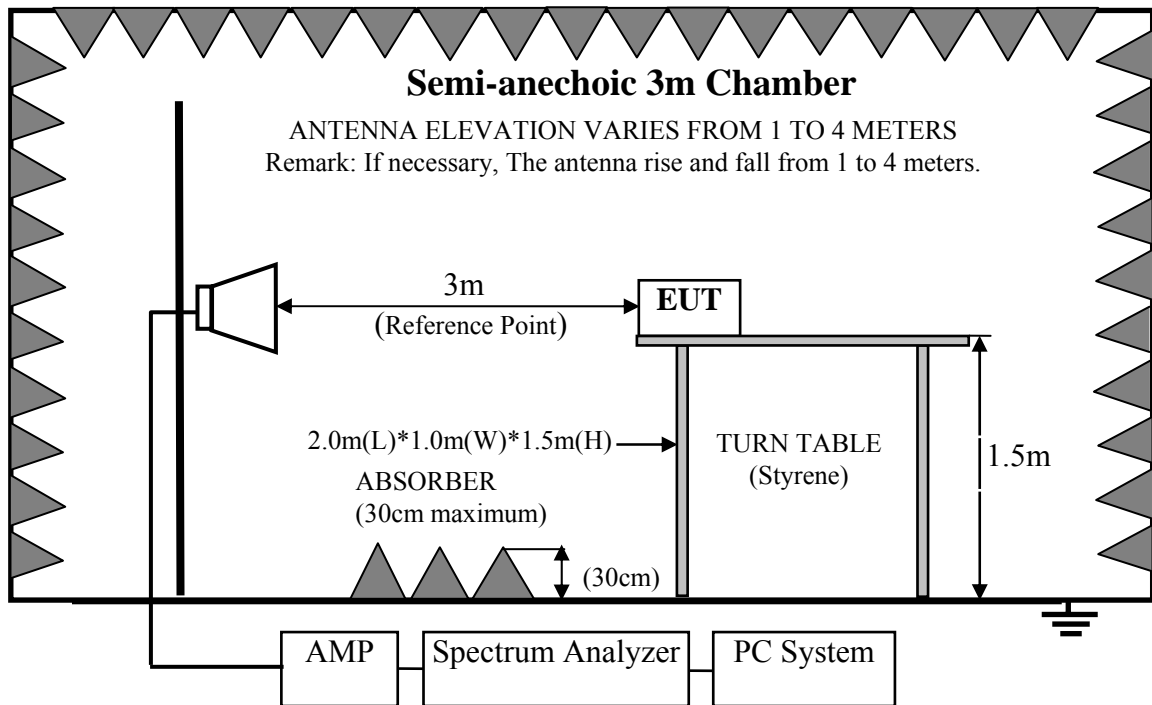

4.3. Radiated Emission Limit

For transmitters operating in the 5.15-5.25 GHz; 5.25-5.35GHz; 5.47-5.725GHz, 5.725-5.850GHz band: all emissions outside of those band shall not exceed an EIRP of -27 dBm/MHz. Unwanted emissions below 1 GHz and those emissions appearing within 15.205 restricted frequency bands must comply with the general field strength limits set forth in Section 15.209

4.3.1.15.209 limits

FREQUENCY MHz	DISTANCE Meters	FIELD STRENGTHS LIMIT	
		μV/m	dB(μV)/m
30 ~ 88	3	100	40.0
88 ~ 216	3	150	43.5
216 ~ 960	3	200	46.0
960 ~ 1000	3	500	54.0
Above 1000	3	74.0 dB(μV)/m (Peak) 54.0 dB(μV)/m (Average)	

- Remarks :
- (1) Emission level dBμV = 20 log Emission level μV/m
 - (2) The smaller limit shall apply at the cross point between two frequency bands.
 - (3) Distance is the distance in meters between the measuring instrument, antenna and the closest point of any part of the device or system.

4.3.2.15.205 Restricted bands of operation

MHz	MHz	MHz	GHz
0.090 - 0.110	16.42 - 16.423	399.9 - 410	4.5 - 5.15
¹ 0.495 - 0.505	16.69475 - 16.69525	608 - 614	5.35 - 5.46
2.1735 - 2.1905	16.80425 - 16.80475	960 - 1240	7.25 - 7.75
4.125 - 4.128	25.5 - 25.67	1300 - 1427	8.025 - 8.5
4.17725 - 4.17775	37.5 - 38.25	1435 - 1626.5	9.0 - 9.2
4.20725 - 4.20775	73 - 74.6	1645.5 - 1646.5	9.3 - 9.5
6.215 - 6.218	74.8 - 75.2	1660 - 1710	10.6 - 12.7
6.26775 - 6.26825	108 - 121.94	1718.8 - 1722.2	13.25 - 13.4
6.31175 - 6.31225	123 - 138	2200 - 2300	14.47 - 14.5
8.291 - 8.294	149.9 - 150.05	2310 - 2390	15.35 - 16.2
8.362 - 8.366	156.52475 - 156.52525	2483.5 - 2500	17.7 - 21.4
8.37625 - 8.38675	156.7 - 156.9	2690 - 2900	22.01 - 23.12
8.41425 - 8.41475	162.0125 - 167.17	3260 - 3267	23.6 - 24.0
12.29 - 12.293	167.72 - 173.2	3332 - 3339	31.2 - 31.8
12.51975 - 12.52025	240 - 285	3345.8 - 3358	36.43 - 36.5
12.57675 - 12.57725	322 - 335.4	3600 - 4400	(²)

4.4. EUT Configuration on Test

The following equipment are installed on Power Line Conducted Emission Test to meet the commission requirement and operating regulations in a manner which tends to maximize its emission characteristics in a normal application.

4.4.1. Altai A3c Indoor Dual-band 3X3 802.11ac WiFi AP (EUT)

Model Number : WA3311NAC-C

Serial Number : N/A

4.4.2. Support Equipment: As Tested Supporting System Details, in Section 2.2.

4.5. Operating Condition of EUT

- 4.5.1. Setup the EUT and simulator as shown as Section 4.2.
- 4.5.2. Turn on the power of all equipments.
- 4.5.3. Let EUT work in Tx mode.

4.6. Test Procedure

EUT and its simulators are placed on a turn table, which is 0.8 meter high above ground for frequency 30MHz~1000MHz, 1.5 meter high above ground for frequency above 1GHz and put the absorbing with 2.4m(L)*2.4m(W)*0.3m(H) on the ground . The turn table can rotate 360 degrees to determine the position of the maximum emission level. Power on the EUT and let it working in test mode, then test it. EUT is set 3 meters away from the receiving antenna, which is mounted on a antenna tower. The antenna can be moved up and down between 1 meter and 4 meters to find out the maximum emission level. Broadband antenna (calibrated bilog antenna) is used as receiving antenna for frequency 30MHz~1000MHz, and the Horn antenna is used as receiving antenna for frequency above 1GHz. Both horizontal and vertical polarization of the antenna is set on Test. In order to find the maximum emission levels, all of the interface cables must be manipulated according to ANSI C63.10-2013 on radiated emission Test.

For emissions below 1GHz and those emissions appearing within 15.205 restricted frequency bands use below procedure:

The bandwidth of the EMI test receiver (R&S ESVS10) is set at 120kHz for frequency range from 30MHz to 1000 MHz.

The bandwidth of the Spectrum's VBW is set at 1MHz and RBW is set at 1MHz for peak emissions measurement above 1GHz and 1MHz RBW, 10Hz VBW for average emissions measure above 1GHz

For the emissions above 1GHz and not appearing within 15.205 restricted frequency bands use below procedure:

- (1). The maximum emission at 3m distance was measured and recorded with receive antenna in both vertical and horizontal by rotating the turntable and by lowering the receive antenna.
- (2). The EUT was then removed and replaced with a substitution antenna in the same position and the substitution antenna must have the same polarization with the receive antenna.
- (3). A signal which have the same frequency obtained in step 2 was fed to the substitution, the receive antenna was raised and lowered to obtain a maximum reading at the test receiver, the level of the signal generator was adjusted until the measured field strength level in step 2 was obtained, recorded the level of the signal generator.
- (4). Repeated step 4 with both antenna polarizations
- (5). The spurious emissions is equal to the power supplied by the signal generator and corrections due to the gain of the substitution antenna and the cable loss between the signal generator and the substitution antenna. or use procedure (6).
- (6). Per KDB789033 clause H 2)d). if the test distance is 3m, the $EIRP(dBm) = E(dBuV/m) - 95.2$
Get the result of all unwanted emission outside the restricted band is less than the -27dBm/MHz.


We had checked frequency range that is 30MHz to 10th harmonic (40GHz) and no any emissions were found from 18GHz to 40GHz, so the radiated emission from 18GHz to 40GHz were not record.

4.7. Radiated Emission Test Results

PASS.


All the emissions from 30MHz to 1 GHz were comply with 15.209 limits.
All other emission comply with 15.407 (b)(1) requirements.

Duty cycle

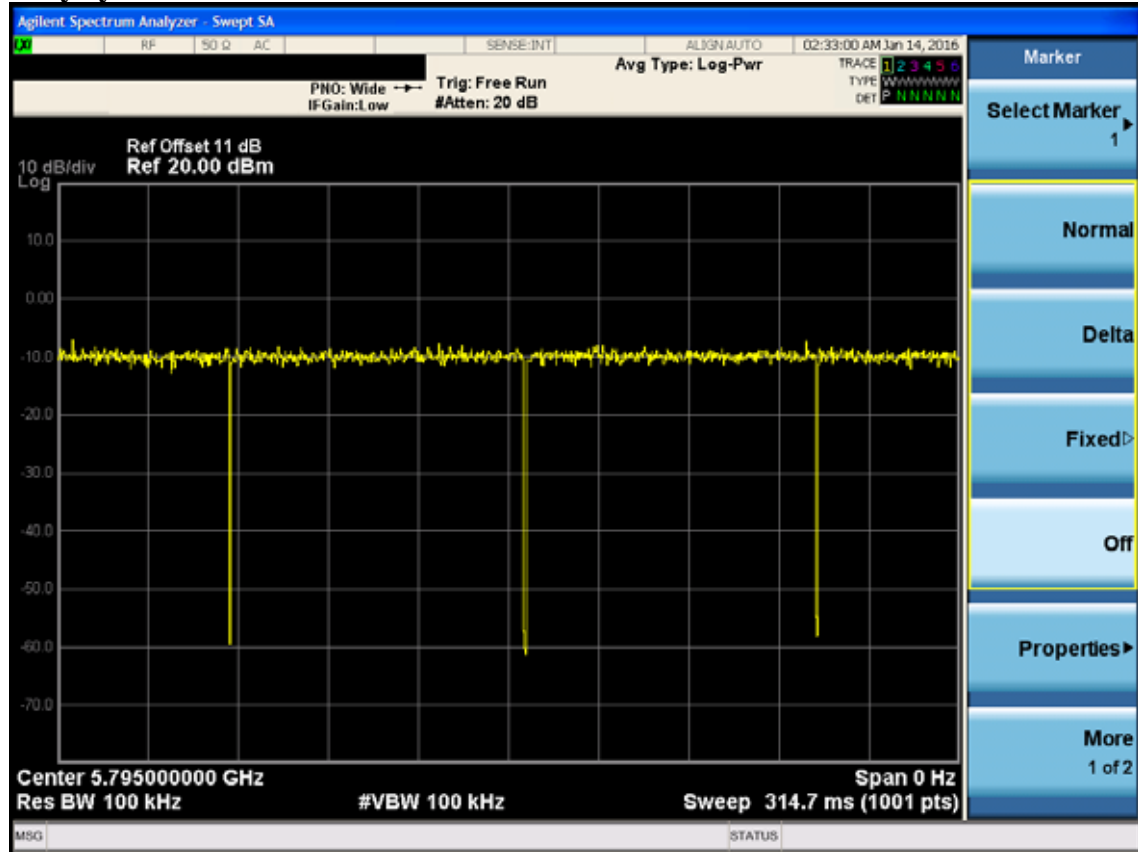

Note: The Duty Cycle is close to 100%.

Frequency: 30MHz~1GHz

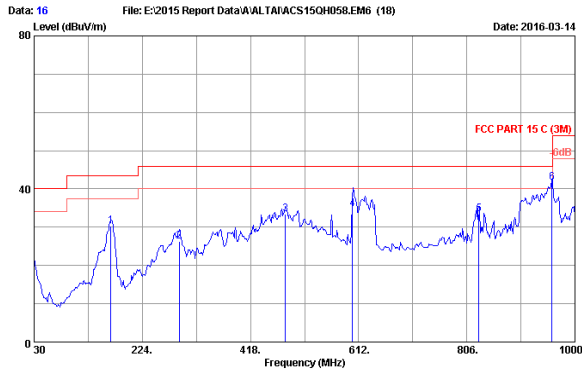


Data: 16 File: E:\2015 Report Data\WALTAIACS15QH058.EM6 (18) Date: 2016-03-14

Site no. : 3m Chamber Data no. : 16
 Dis. / Ant. : 3m 2015 CBL6112D 35375 Ant. pol. : HORIZONTAL
 Limit : FCC PART 15 C (3M)
 Env. / Ins. : 23.9°C/57% Engineer : Leo-Li
 EUT : Altai A3c Indoor Dual-band 3x3 802.11ac WiFi AP
 Power rating : DC 56V From POE Input AC 120V/60Hz
 Test Mode : TX Mode
 M/N: WA3311NAC-C

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	167.740	10.74	1.38	18.11	30.23	43.50	13.27	QP
2	289.960	14.05	1.84	10.48	26.37	46.00	19.63	QP
3	481.050	18.11	2.47	12.81	33.39	46.00	12.61	QP
4	600.625	19.30	2.77	12.60	34.67	46.00	11.33	QP
5	827.340	21.34	3.32	8.82	33.48	46.00	12.52	QP
6	958.579	22.29	3.62	15.81	41.72	46.00	4.28	QP

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading.
 2. The emission levels that are 20dB below the official limit are not reported.

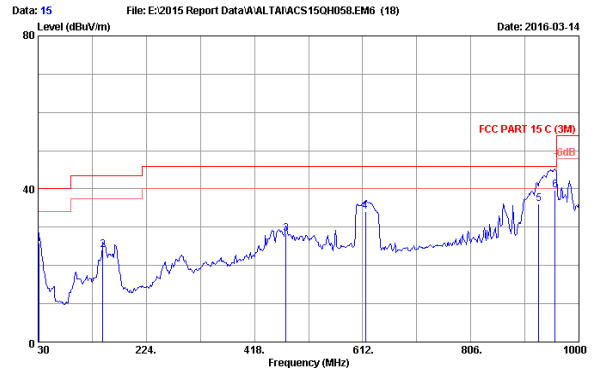


Data: 15 File: E:\2015 Report Data\WALTAIACS15QH058.EM6 (18) Date: 2016-03-14

Site no. : 3m Chamber Data no. : 15
 Dis. / Ant. : 3m 2015 CBL6112D 35375 Ant. pol. : VERTICAL
 Limit : FCC PART 15 C (3M)
 Env. / Ins. : 23.9°C/57% Engineer : Leo-Li
 EUT : Altai A3c Indoor Dual-band 3x3 802.11ac WiFi AP
 Power rating : DC 56V From POE Input AC 120V/60Hz
 Test Mode : TX Mode
 M/N: WA3311NAC-C


No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	31.940	19.06	0.61	6.11	25.78	40.00	14.22	QP
2	146.400	11.80	1.29	10.98	24.07	43.50	19.43	QP
3	474.260	18.01	2.44	7.86	28.31	46.00	17.69	QP
4	616.850	19.43	2.81	11.81	34.05	46.00	11.95	QP
5	928.238	22.14	3.56	10.40	36.10	46.00	9.90	QP
6	957.227	22.29	3.62	13.80	39.71	46.00	6.29	QP

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading.
 2. The emission levels that are 20dB below the official limit are not reported.

Frequency: 1GHz~18GHz

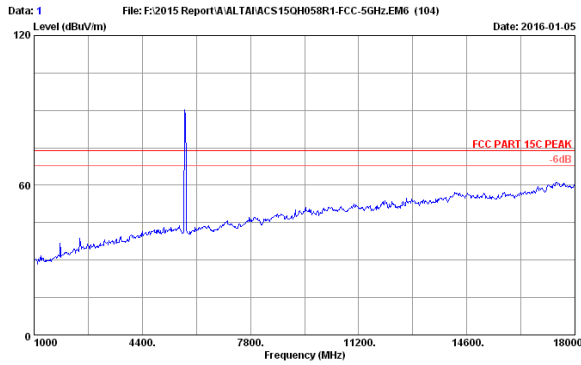


Site no. : 3m Chamber Data no. : 1
 Dis. / Ant. : 3m 2015 MCTD1209 3006 Ant. pol. : VERTICAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : 23°C/54%
 Engineer : Leo-Li
 EUT : Altax A3c Indoor Dual-band 3x3 802.11ac WiFi AP
 Power rating : DC 56V From POE Input AC 120V/60Hz
 Test Mode : IEEE802.11a 5745MHz Tx
 WA3311NAC-C

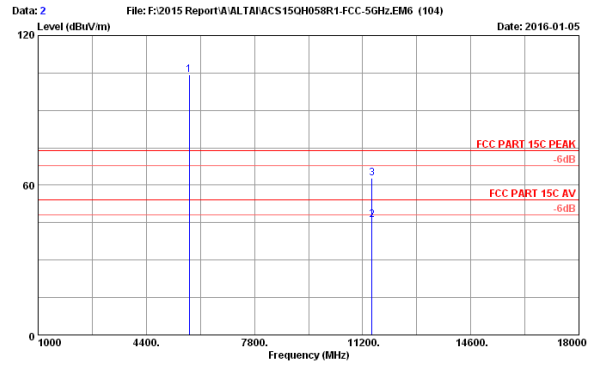


Site no. : 3m Chamber Data no. : 2
 Dis. / Ant. : 3m 2015 MCTD1209 3006 Ant. pol. : VERTICAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : 23°C/54%
 Engineer : Leo-Li
 EUT : Altax A3c Indoor Dual-band 3x3 802.11ac WiFi AP
 Power rating : DC 56V From POE Input AC 120V/60Hz
 Test Mode : IEEE802.11a 5745MHz Tx
 WA3311NAC-C

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	AMP factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5745.000	33.44	9.90	35.11	95.90	104.13	74.00	-30.13	Peak
2	11490.000	38.31	14.54	35.33	28.53	46.05	54.00	7.95	Average
3	11490.000	38.31	14.54	35.33	45.32	62.84	74.00	11.16	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp Factor
 2. The emission levels that are 20dB below the official limit are not reported.

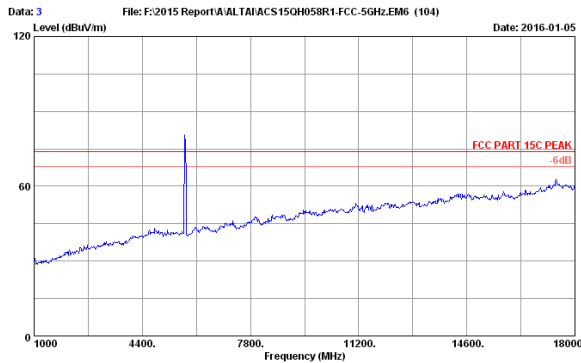


Site no. : 3m Chamber Data no. : 3
 Dis. / Ant. : 3m 2015 MCTD1209 3006 Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : 23°C/54%
 Engineer : Leo-Li
 EUT : Altax A3c Indoor Dual-band 3x3 802.11ac WiFi AP
 Power rating : DC 56V From POE Input AC 120V/60Hz
 Test Mode : IEEE802.11a 5745MHz Tx
 WA3311NAC-C

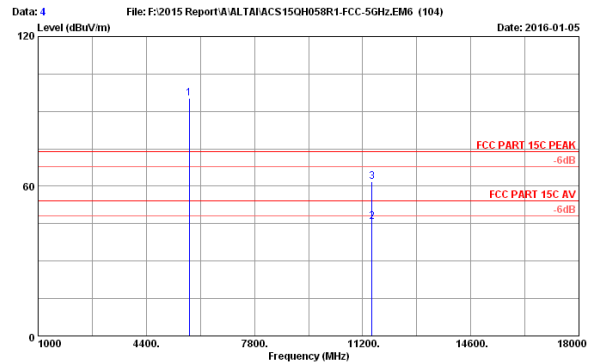


Site no. : 3m Chamber Data no. : 4
 Dis. / Ant. : 3m 2015 MCTD1209 3006 Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : 23°C/54%
 Engineer : Leo-Li
 EUT : Altax A3c Indoor Dual-band 3x3 802.11ac WiFi AP
 Power rating : DC 56V From POE Input AC 120V/60Hz
 Test Mode : IEEE802.11a 5745MHz Tx
 WA3311NAC-C

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	AMP factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5745.000	33.44	9.90	35.11	86.91	95.14	74.00	-21.14	Peak
2	11490.000	38.31	14.54	35.33	28.20	45.72	54.00	8.28	Average
3	11490.000	38.31	14.54	35.33	44.27	61.79	74.00	12.21	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp Factor
 2. The emission levels that are 20dB below the official limit are not reported.

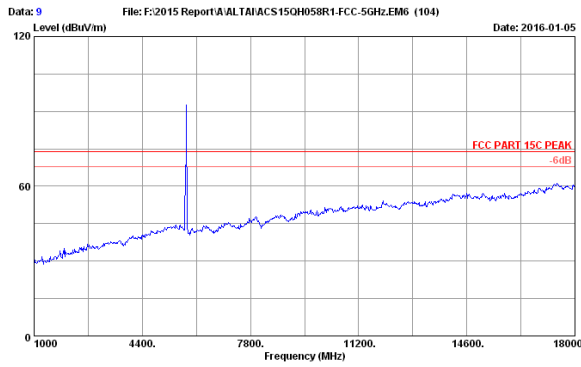


Site no. : 3m Chamber Data no. : 9
 Dis. / Ant. : 3m 2015 MCTD1209 3006 Ant. pol. : VERTICAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : 23°C/54%
 Engineer : Leo-Li
 EUT : Altai A3c Indoor Dual-band 3x3 802.11ac WiFi AP
 Power rating : DC 56V From POE Input AC 120V/60Hz
 Test Mode : IEEE802.11a 5785MHz Tx
 WA3311NAC-C

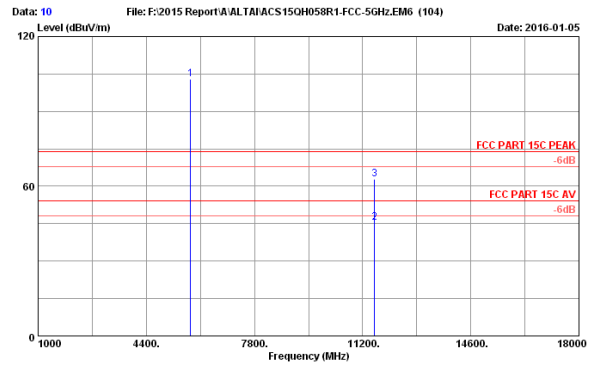


Site no. : 3m Chamber Data no. : 10
 Dis. / Ant. : 3m 2015 MCTD1209 3006 Ant. pol. : VERTICAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : 23°C/54%
 Engineer : Leo-Li
 EUT : Altai A3c Indoor Dual-band 3x3 802.11ac WiFi AP
 Power rating : DC 56V From POE Input AC 120V/60Hz
 Test Mode : IEEE802.11a 5785MHz Tx
 WA3311NAC-C

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	AMP factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5785.000	33.49	9.91	35.10	94.79	103.09	74.00	-29.09	Peak
2	11570.000	38.26	14.60	35.31	27.92	45.47	54.00	8.53	Average
3	11570.000	38.26	14.60	35.31	45.21	62.76	74.00	11.24	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp Factor
 2. The emission levels that are 20dB below the official limit are not reported.

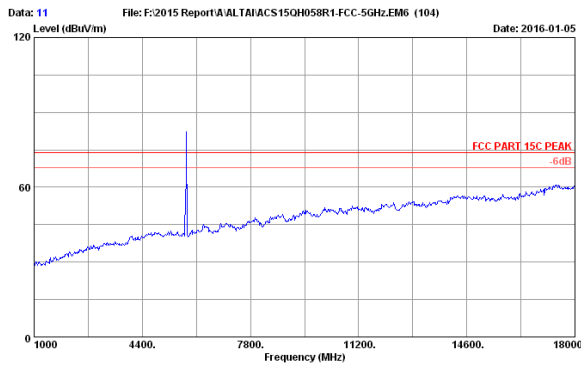


Site no. : 3m Chamber Data no. : 11
 Dis. / Ant. : 3m 2015 MCTD1209 3006 Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : 23°C/54%
 Engineer : Leo-Li
 EUT : Altai A3c Indoor Dual-band 3x3 802.11ac WiFi AP
 Power rating : DC 56V From POE Input AC 120V/60Hz
 Test Mode : IEEE802.11a 5785MHz Tx
 WA3311NAC-C

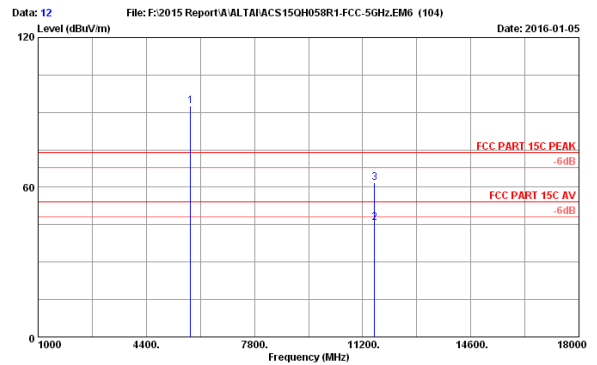


Site no. : 3m Chamber Data no. : 12
 Dis. / Ant. : 3m 2015 MCTD1209 3006 Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : 23°C/54%
 Engineer : Leo-Li
 EUT : Altai A3c Indoor Dual-band 3x3 802.11ac WiFi AP
 Power rating : DC 56V From POE Input AC 120V/60Hz
 Test Mode : IEEE802.11a 5785MHz Tx
 WA3311NAC-C

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	AMP factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5785.000	33.49	9.91	35.10	84.18	92.48	74.00	-18.48	Peak
2	11570.000	38.26	14.60	35.31	28.36	45.91	54.00	8.09	Average
3	11570.000	38.26	14.60	35.31	44.21	61.76	74.00	12.24	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp Factor
 2. The emission levels that are 20dB below the official limit are not reported.

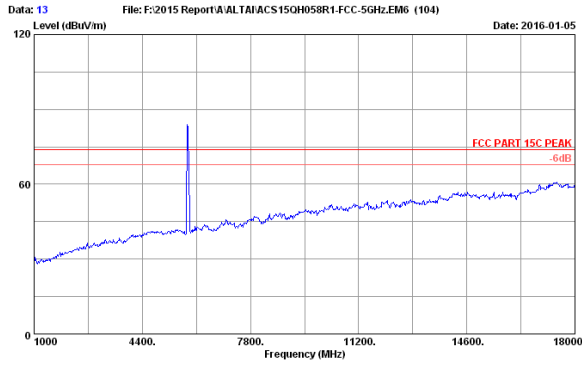


Site no. : 3m Chamber Data no. : 13
 Dis. / Ant. : 3m 2015 MCTD1209 3006 Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : 23°C/54%
 Engineer : Leo-Li
 EUT : Altai A3c Indoor Dual-band 3x3 802.11ac WiFi AP
 Power rating : DC 56V From POE Input AC 120V/60Hz
 Test Mode : IEEE802.11a 5825MHz Tx
 WA3311NAC-C

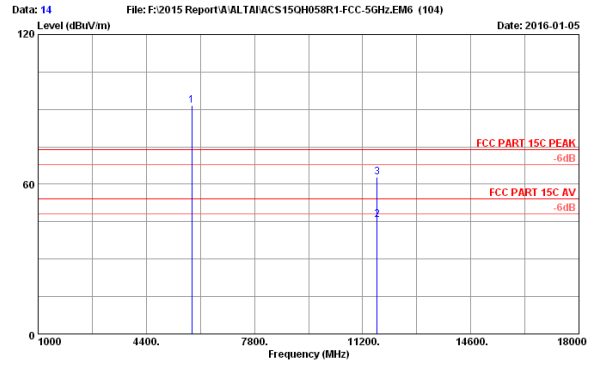


Site no. : 3m Chamber Data no. : 14
 Dis. / Ant. : 3m 2015 MCTD1209 3006 Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : 23°C/54%
 Engineer : Leo-Li
 EUT : Altai A3c Indoor Dual-band 3x3 802.11ac WiFi AP
 Power rating : DC 56V From POE Input AC 120V/60Hz
 Test Mode : IEEE802.11a 5825MHz Tx
 WA3311NAC-C

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	AMP factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5825.000	33.53	9.93	35.08	83.15	91.53	74.00	-17.53	Peak
2	11650.000	38.21	14.66	35.29	28.36	45.94	54.00	8.06	Average
3	11650.000	38.21	14.66	35.29	45.15	62.73	74.00	11.27	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp Factor
 2. The emission levels that are 20dB below the official limit are not reported.

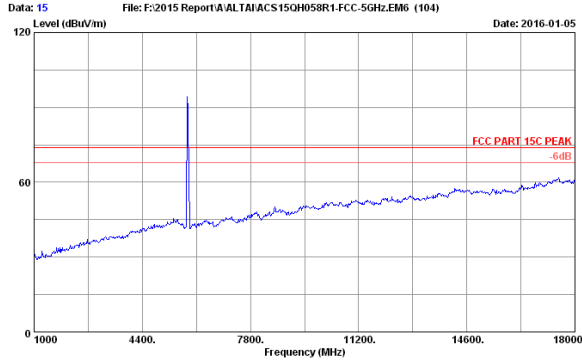


Site no. : 3m Chamber Data no. : 15
 Dis. / Ant. : 3m 2015 MCTD1209 3006 Ant. pol. : VERTICAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : 23°C/54%
 Engineer : Leo-Li
 EUT : Altai A3c Indoor Dual-band 3x3 802.11ac WiFi AP
 Power rating : DC 56V From POE Input AC 120V/60Hz
 Test Mode : IEEE802.11a 5825MHz Tx
 WA3311NAC-C

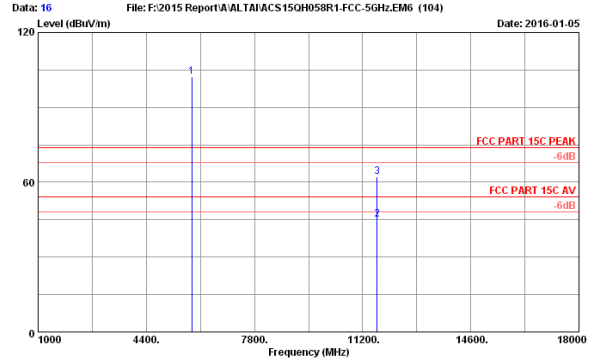


Site no. : 3m Chamber Data no. : 16
 Dis. / Ant. : 3m 2015 MCTD1209 3006 Ant. pol. : VERTICAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : 23°C/54%
 Engineer : Leo-Li
 EUT : Altai A3c Indoor Dual-band 3x3 802.11ac WiFi AP
 Power rating : DC 56V From POE Input AC 120V/60Hz
 Test Mode : IEEE802.11a 5825MHz Tx
 WA3311NAC-C

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	AMP factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5825.000	33.53	9.93	35.08	93.78	102.16	74.00	-28.16	Peak
2	11650.000	38.21	14.66	35.29	27.52	45.10	54.00	8.90	Average
3	11650.000	38.21	14.66	35.29	44.67	62.25	74.00	11.75	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp Factor
 2. The emission levels that are 20dB below the official limit are not reported.

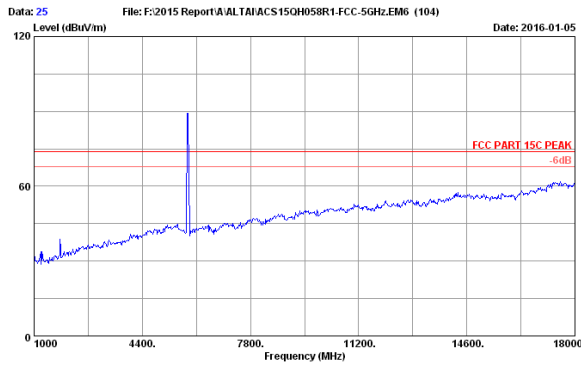


Site no. : 3m Chamber Data no. : 25
 Dis. / Ant. : 3m 2015 MCTD1209 3006 Ant. pol. : VERTICAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : 23°C/54%
 Engineer : Leo-Li
 EUT : Altai A3c Indoor Dual-band 3x3 802.11ac WiFi AP
 Power rating : DC 56V From POE Input AC 120V/60Hz
 Test Mode : IEEE802.11nHT20 5825MHz Tx
 WA3311NAC-C

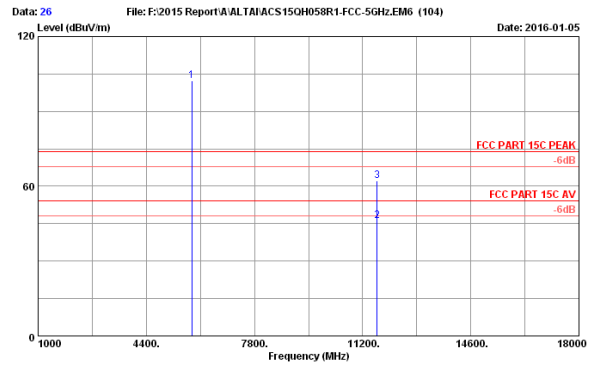


Site no. : 3m Chamber Data no. : 26
 Dis. / Ant. : 3m 2015 MCTD1209 3006 Ant. pol. : VERTICAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : 23°C/54%
 Engineer : Leo-Li
 EUT : Altai A3c Indoor Dual-band 3x3 802.11ac WiFi AP
 Power rating : DC 56V From POE Input AC 120V/60Hz
 Test Mode : IEEE802.11nHT20 5825MHz Tx
 WA3311NAC-C

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	AMP factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5825.000	33.53	9.93	35.08	93.90	102.25	74.00	-28.28	Peak
2	11650.000	38.21	14.66	35.29	28.56	46.14	54.00	7.86	Average
3	11650.000	38.21	14.66	35.29	44.75	62.33	74.00	11.67	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp Factor
 2. The emission levels that are 20dB below the official limit are not reported.

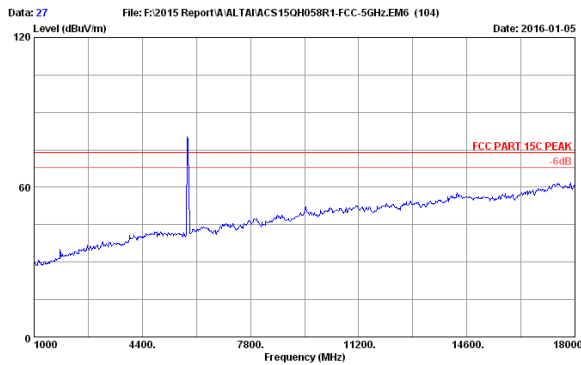


Site no. : 3m Chamber Data no. : 27
 Dis. / Ant. : 3m 2015 MCTD1209 3006 Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : 23°C/54%
 Engineer : Leo-Li
 EUT : Altai A3c Indoor Dual-band 3x3 802.11ac WiFi AP
 Power rating : DC 56V From POE Input AC 120V/60Hz
 Test Mode : IEEE802.11nHT20 5825MHz Tx
 WA3311NAC-C

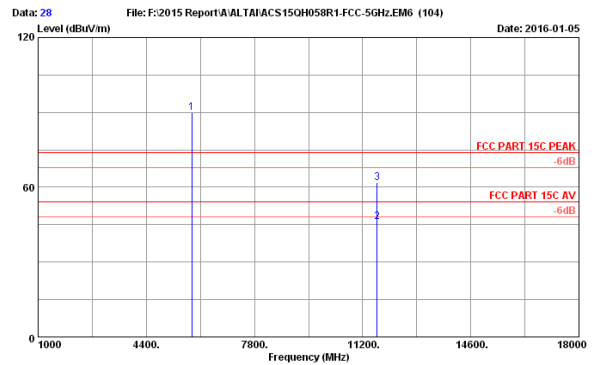


Site no. : 3m Chamber Data no. : 28
 Dis. / Ant. : 3m 2015 MCTD1209 3006 Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : 23°C/54%
 Engineer : Leo-Li
 EUT : Altai A3c Indoor Dual-band 3x3 802.11ac WiFi AP
 Power rating : DC 56V From POE Input AC 120V/60Hz
 Test Mode : IEEE802.11nHT20 5825MHz Tx
 WA3311NAC-C

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	AMP factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5825.000	33.53	9.93	35.08	81.69	90.07	74.00	-16.07	Peak
2	11650.000	38.21	14.66	35.29	28.45	46.03	54.00	7.97	Average
3	11650.000	38.21	14.66	35.29	44.32	61.90	74.00	12.10	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp Factor
 2. The emission levels that are 20dB below the official limit are not reported.

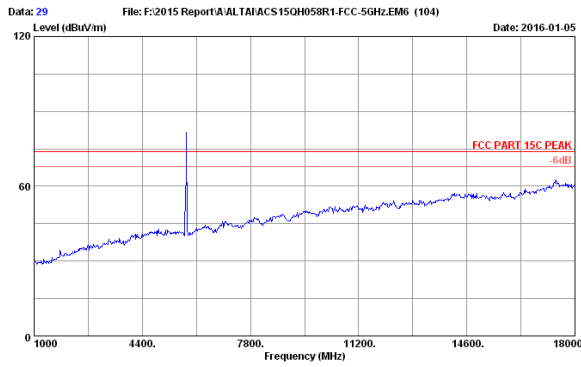


Site no. : 3m Chamber Data no. : 29
 Dis. / Ant. : 3m 2015 MCTD1209 3006 Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : 23°C/54%
 Engineer : Leo-Li
 EUT : Altai A3c Indoor Dual-band 3x3 802.11ac WiFi AP
 Power rating : DC 56V From POE Input AC 120V/60Hz
 Test Mode : IEEE802.11nHT20 5785MHz Tx
 WA3311NAC-C

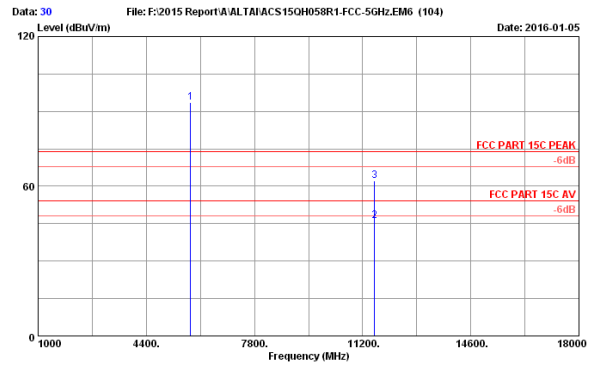


Site no. : 3m Chamber Data no. : 30
 Dis. / Ant. : 3m 2015 MCTD1209 3006 Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : 23°C/54%
 Engineer : Leo-Li
 EUT : Altai A3c Indoor Dual-band 3x3 802.11ac WiFi AP
 Power rating : DC 56V From POE Input AC 120V/60Hz
 Test Mode : IEEE802.11nHT20 5785MHz Tx
 WA3311NAC-C

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	AMP factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5785.000	33.49	9.91	35.10	85.45	93.75	74.00	-19.75	Peak
2	11570.000	38.26	14.60	35.31	28.46	46.01	54.00	7.99	Average
3	11570.000	38.26	14.60	35.31	44.58	62.13	74.00	11.87	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp Factor
 2. The emission levels that are 20dB below the official limit are not reported.

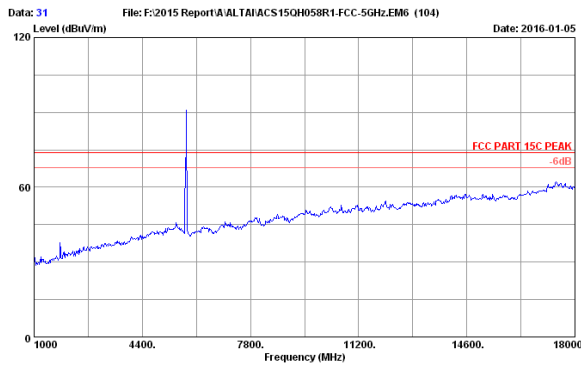


Site no. : 3m Chamber Data no. : 31
 Dis. / Ant. : 3m 2015 MCTD1209 3006 Ant. pol. : VERTICAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : 23°C/54%
 Engineer : Leo-Li
 EUT : Altai A3c Indoor Dual-band 3x3 802.11ac WiFi AP
 Power rating : DC 56V From POE Input AC 120V/60Hz
 Test Mode : IEEE802.11nHT20 5785MHz Tx
 WA3311NAC-C

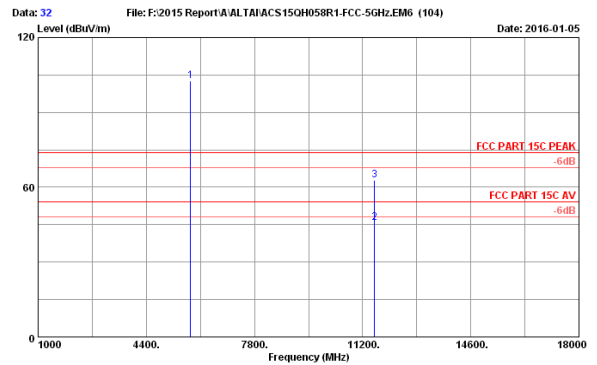


Site no. : 3m Chamber Data no. : 32
 Dis. / Ant. : 3m 2015 MCTD1209 3006 Ant. pol. : VERTICAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : 23°C/54%
 Engineer : Leo-Li
 EUT : Altai A3c Indoor Dual-band 3x3 802.11ac WiFi AP
 Power rating : DC 56V From POE Input AC 120V/60Hz
 Test Mode : IEEE802.11nHT20 5785MHz Tx
 WA3311NAC-C

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	AMP factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5785.000	33.49	9.91	35.10	94.28	102.58	74.00	-28.58	Peak
2	11570.000	38.26	14.60	35.31	28.15	45.70	54.00	8.30	Average
3	11570.000	38.26	14.60	35.31	45.33	62.88	74.00	11.12	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp Factor
 2. The emission levels that are 20dB below the official limit are not reported.

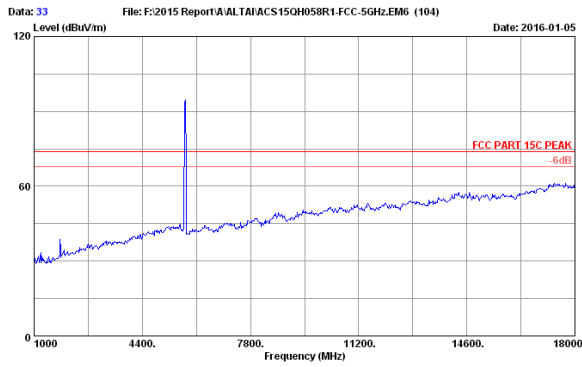


Site no. : 3m Chamber Data no. : 33
 Dis. / Ant. : 3m 2015 MCTD1209 3006 Ant. pol. : VERTICAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : 23°C/54%
 Engineer : Leo-Li
 EUT : Altai A3c Indoor Dual-band 3x3 802.11ac WiFi AP
 Power rating : DC 56V From POE Input AC 120V/60Hz
 Test Mode : IEEE802.11nHT20 5745MHz Tx
 WA3311NAC-C

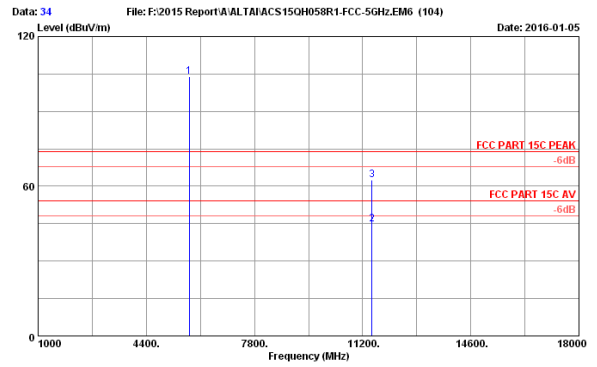


Site no. : 3m Chamber Data no. : 34
 Dis. / Ant. : 3m 2015 MCTD1209 3006 Ant. pol. : VERTICAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : 23°C/54%
 Engineer : Leo-Li
 EUT : Altai A3c Indoor Dual-band 3x3 802.11ac WiFi AP
 Power rating : DC 56V From POE Input AC 120V/60Hz
 Test Mode : IEEE802.11nHT20 5745MHz Tx
 WA3311NAC-C

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	AMP factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5745.000	33.44	9.90	35.11	95.68	103.91	74.00	-29.91	Peak
2	11490.000	38.31	14.54	35.33	27.37	44.89	54.00	9.11	Average
3	11490.000	38.31	14.54	35.33	44.83	62.35	74.00	11.65	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp Factor
 2. The emission levels that are 20dB below the official limit are not reported.

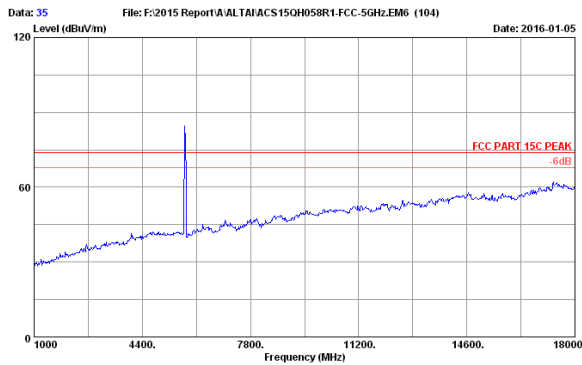


Site no. : 3m Chamber Data no. : 35
 Dis. / Ant. : 3m 2015 MCTD1209 3006 Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : 23°C/54%
 Engineer : Leo-Li
 EUT : Altai A3c Indoor Dual-band 3x3 802.11ac WiFi AP
 Power rating : DC 56V From POE Input AC 120V/60Hz
 Test Mode : IEEE802.11nHT20 5745MHz Tx
 WA3311NAC-C

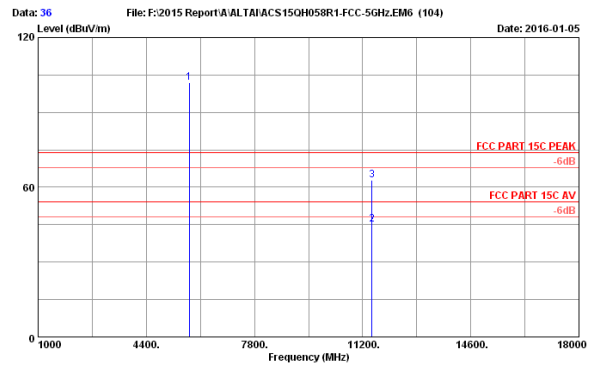


Site no. : 3m Chamber Data no. : 36
 Dis. / Ant. : 3m 2015 MCTD1209 3006 Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : 23°C/54%
 Engineer : Leo-Li
 EUT : Altai A3c Indoor Dual-band 3x3 802.11ac WiFi AP
 Power rating : DC 56V From POE Input AC 120V/60Hz
 Test Mode : IEEE802.11nHT20 5745MHz Tx
 WA3311NAC-C

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	AMP factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5745.000	33.44	9.90	35.11	93.78	102.01	74.00	-28.01	Peak
2	11490.000	38.31	14.54	35.33	27.60	45.12	54.00	8.88	Average
3	11490.000	38.31	14.54	35.33	45.22	62.74	74.00	11.26	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp Factor
 2. The emission levels that are 20dB below the official limit are not reported.

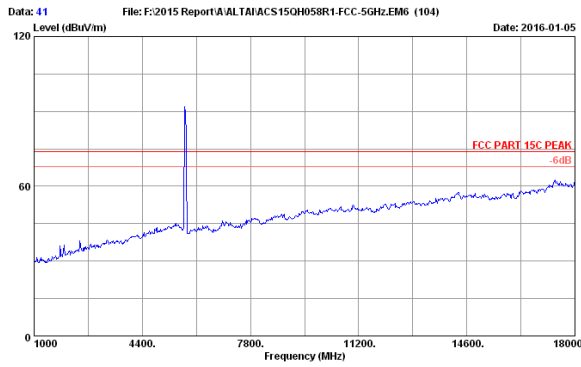


Site no. : 3m Chamber Data no. : 41
 Dis. / Ant. : 3m 2015 MCTD1209 3006 Ant. pol. : VERTICAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : 23°C/54"
 Engineer : Leo-Li
 EUT : Altai A3c Indoor Dual-band 3x3 802.11ac WiFi AP
 Power rating : DC 56V From POE Input AC 120V/60Hz
 Test Mode : IEEE802.11nHT40 5755MHz Tx
 WA3311NAC-C

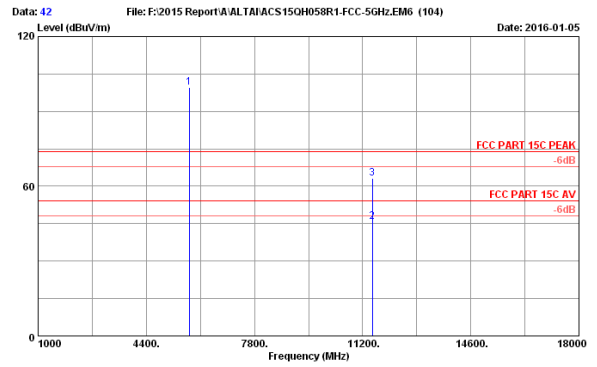


Site no. : 3m Chamber Data no. : 42
 Dis. / Ant. : 3m 2015 MCTD1209 3006 Ant. pol. : VERTICAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : 23°C/54"
 Engineer : Leo-Li
 EUT : Altai A3c Indoor Dual-band 3x3 802.11ac WiFi AP
 Power rating : DC 56V From POE Input AC 120V/60Hz
 Test Mode : IEEE802.11nHT40 5755MHz Tx
 WA3311NAC-C

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	AMP factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5755.000	33.46	9.91	35.11	91.23	99.49	74.00	-25.49	Peak
2	11510.000	38.29	14.56	35.33	28.34	45.86	54.00	8.14	Average
3	11510.000	38.29	14.56	35.33	45.75	63.27	74.00	10.73	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp Factor
 2. The emission levels that are 20dB below the official limit are not reported.

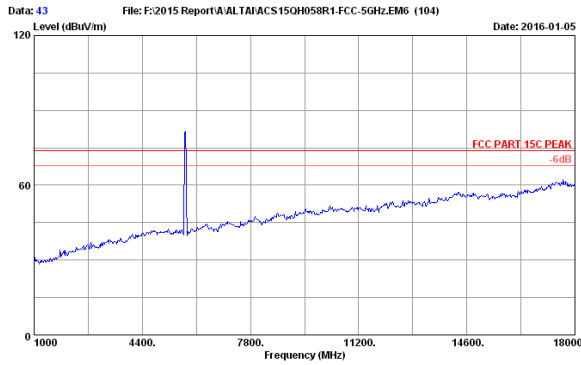


Site no. : 3m Chamber Data no. : 43
 Dis. / Ant. : 3m 2015 MCTD1209 3006 Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : 23°C/54"
 Engineer : Leo-Li
 EUT : Altai A3c Indoor Dual-band 3x3 802.11ac WiFi AP
 Power rating : DC 56V From POE Input AC 120V/60Hz
 Test Mode : IEEE802.11nHT40 5755MHz Tx
 WA3311NAC-C

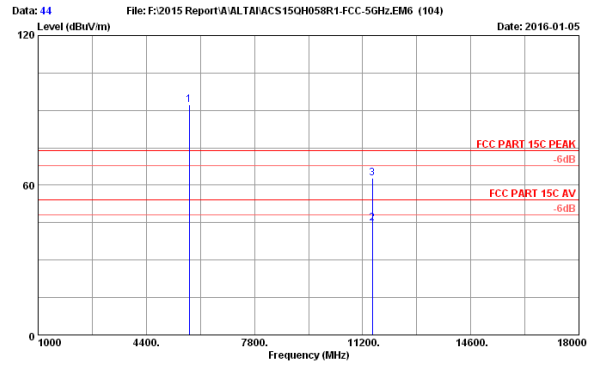


Site no. : 3m Chamber Data no. : 44
 Dis. / Ant. : 3m 2015 MCTD1209 3006 Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : 23°C/54"
 Engineer : Leo-Li
 EUT : Altai A3c Indoor Dual-band 3x3 802.11ac WiFi AP
 Power rating : DC 56V From POE Input AC 120V/60Hz
 Test Mode : IEEE802.11nHT40 5755MHz Tx
 WA3311NAC-C

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	AMP factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5755.000	33.46	9.91	35.11	84.11	92.37	74.00	-18.37	Peak
2	11510.000	38.29	14.56	35.33	27.38	44.90	54.00	9.10	Average
3	11510.000	38.29	14.56	35.33	45.21	62.73	74.00	11.27	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp Factor
 2. The emission levels that are 20dB below the official limit are not reported.

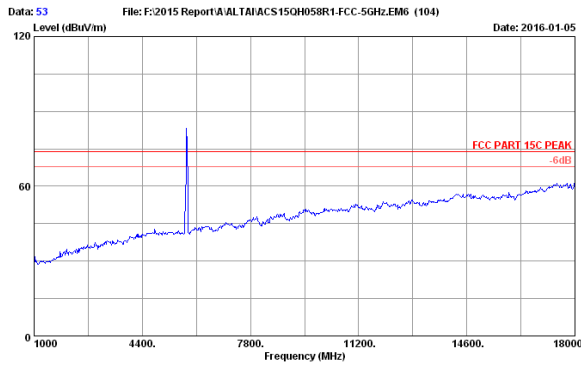


Site no. : 3m Chamber Data no. : 53
 Dis. / Ant. : 3m 2015 MCTD1209 3006 Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : 23°C/54%
 Engineer : Leo-Li
 EUT : Altai A3c Indoor Dual-band 3x3 802.11ac WiFi AP
 Power rating : DC 56V From POE Input AC 120V/60Hz
 Test Mode : IEEE802.11nHT40 5795MHz Tx
 WA3311NAC-C

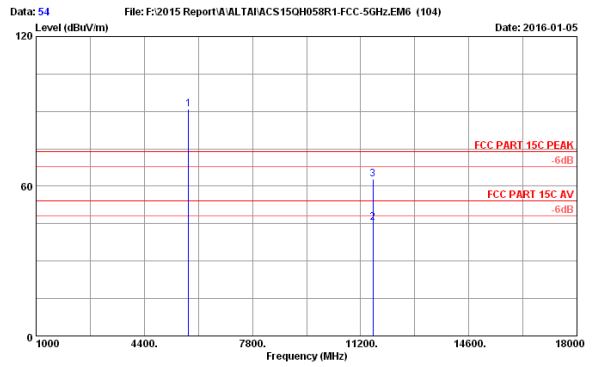


Site no. : 3m Chamber Data no. : 54
 Dis. / Ant. : 3m 2015 MCTD1209 3006 Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : 23°C/54%
 Engineer : Leo-Li
 EUT : Altai A3c Indoor Dual-band 3x3 802.11ac WiFi AP
 Power rating : DC 56V From POE Input AC 120V/60Hz
 Test Mode : IEEE802.11nHT40 5795MHz Tx
 WA3311NAC-C

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	AMP factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5795.000	33.49	9.92	35.09	82.74	91.06	74.00	-17.06	Peak
2	11590.000	38.25	14.61	35.30	27.84	45.40	54.00	8.60	Average
3	11590.000	38.25	14.61	35.30	45.16	62.72	74.00	11.28	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp Factor
 2. The emission levels that are 20dB below the official limit are not reported.

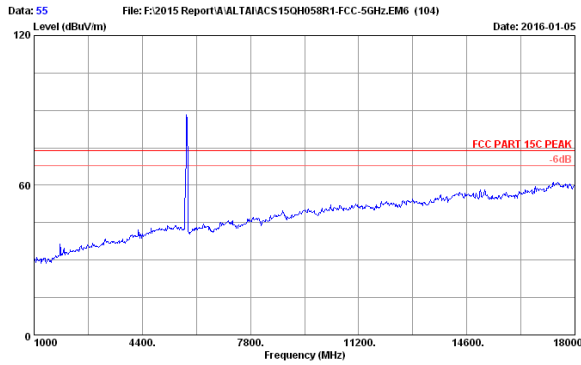


Site no. : 3m Chamber Data no. : 55
 Dis. / Ant. : 3m 2015 MCTD1209 3006 Ant. pol. : VERTICAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : 23°C/54%
 Engineer : Leo-Li
 EUT : Altai A3c Indoor Dual-band 3x3 802.11ac WiFi AP
 Power rating : DC 56V From POE Input AC 120V/60Hz
 Test Mode : IEEE802.11nHT40 5795MHz Tx
 WA3311NAC-C

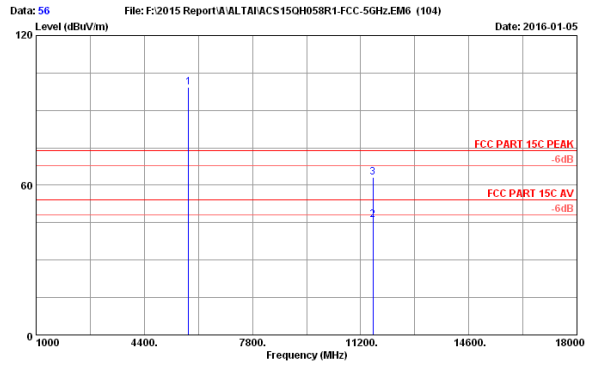


Site no. : 3m Chamber Data no. : 56
 Dis. / Ant. : 3m 2015 MCTD1209 3006 Ant. pol. : VERTICAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : 23°C/54%
 Engineer : Leo-Li
 EUT : Altai A3c Indoor Dual-band 3x3 802.11ac WiFi AP
 Power rating : DC 56V From POE Input AC 120V/60Hz
 Test Mode : IEEE802.11nHT40 5795MHz Tx
 WA3311NAC-C

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	AMP factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5795.000	33.49	9.92	35.09	90.97	99.29	74.00	-25.29	Peak
2	11590.000	38.25	14.61	35.30	28.63	46.19	54.00	7.81	Average
3	11590.000	38.25	14.61	35.30	45.75	63.31	74.00	10.69	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp Factor
 2. The emission levels that are 20dB below the official limit are not reported.

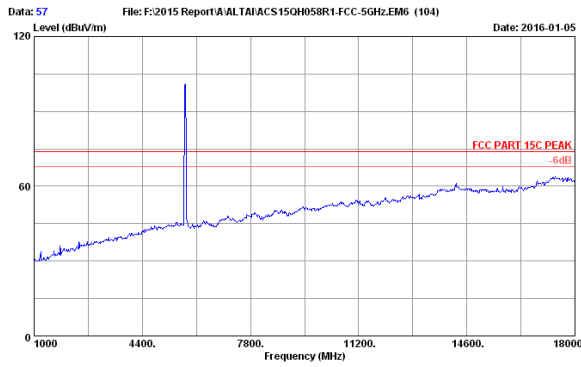


Site no. : 3m Chamber Data no. : 57
 Dis. / Ant. : 3m 2015 MCTD1209 3006 Ant. pol. : VERTICAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : 23°C/54%
 Engineer : Leo-Li
 EUT : Altai A3c Indoor Dual-band 3x3 802.11ac WiFi AP
 Power rating : DC 56V From POE Input AC 120V/60Hz
 Test Mode : IEEE802.11ac VHT20 5745MHz Tx
 WA3311NAC-C

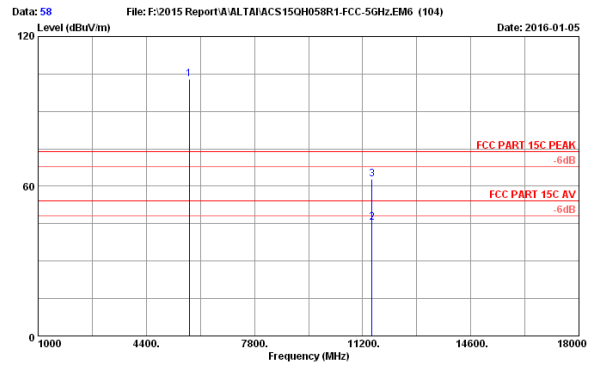


Site no. : 3m Chamber Data no. : 58
 Dis. / Ant. : 3m 2015 MCTD1209 3006 Ant. pol. : VERTICAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : 23°C/54%
 Engineer : Leo-Li
 EUT : Altai A3c Indoor Dual-band 3x3 802.11ac WiFi AP
 Power rating : DC 56V From POE Input AC 120V/60Hz
 Test Mode : IEEE802.11ac VHT20 5745MHz Tx
 WA3311NAC-C

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	AMP factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5745.000	33.44	9.90	35.11	94.84	103.07	74.00	-29.07	Peak
2	11490.000	38.31	14.54	35.33	27.96	45.45	54.00	8.52	Average
3	11490.000	38.31	14.54	35.33	45.17	62.69	74.00	11.31	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp Factor
 2. The emission levels that are 20dB below the official limit are not reported.

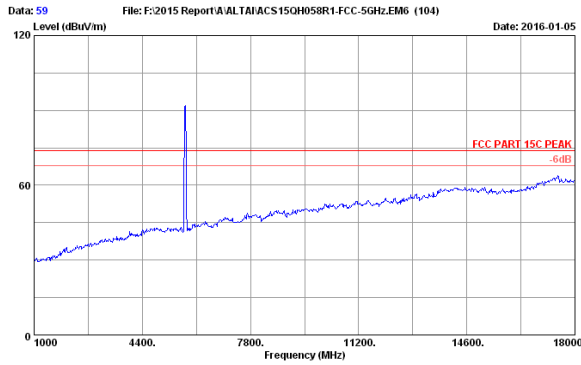


Site no. : 3m Chamber Data no. : 59
 Dis. / Ant. : 3m 2015 MCTD1209 3006 Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : 23°C/54%
 Engineer : Leo-Li
 EUT : Altai A3c Indoor Dual-band 3x3 802.11ac WiFi AP
 Power rating : DC 56V From POE Input AC 120V/60Hz
 Test Mode : IEEE802.11ac VHT20 5745MHz Tx
 WA3311NAC-C

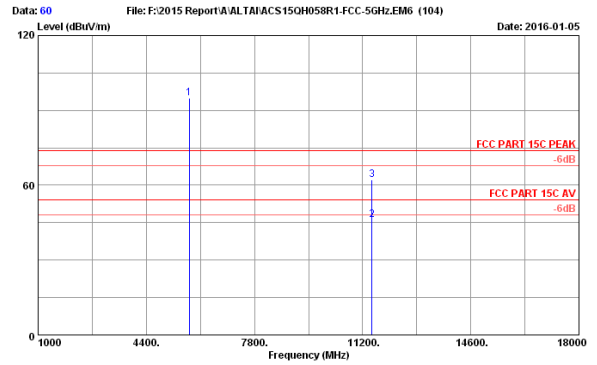


Site no. : 3m Chamber Data no. : 60
 Dis. / Ant. : 3m 2015 MCTD1209 3006 Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : 23°C/54%
 Engineer : Leo-Li
 EUT : Altai A3c Indoor Dual-band 3x3 802.11ac WiFi AP
 Power rating : DC 56V From POE Input AC 120V/60Hz
 Test Mode : IEEE802.11ac VHT20 5745MHz Tx
 WA3311NAC-C

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	AMP factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5745.000	33.44	9.90	35.11	86.69	94.92	74.00	-20.92	Peak
2	11490.000	38.31	14.54	35.33	28.62	46.14	54.00	7.86	Average
3	11490.000	38.31	14.54	35.33	44.59	62.11	74.00	11.89	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp Factor
 2. The emission levels that are 20dB below the official limit are not reported.

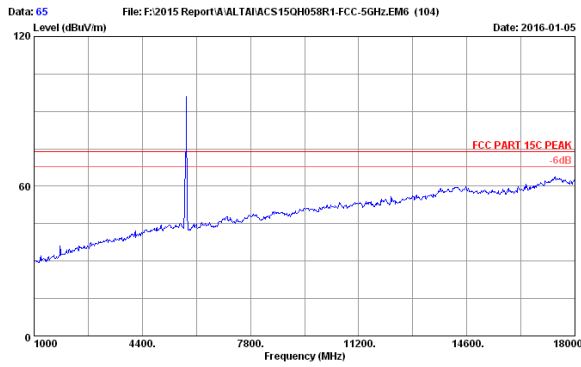


Site no. : 3m Chamber Data no. : 65
 Dis. / Ant. : 3m 2015 MCTD1209 3006 Ant. pol. : VERTICAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : 23°C/54%
 Engineer : Leo-Li
 EUT : Altai A3c Indoor Dual-band 3x3 802.11ac Wifi AP
 Power rating : DC 56V From POE Input AC 120V/60Hz
 Test Mode : IEEE802.11ac VHT20 5785MHz Tx
 WA3311NAC-C

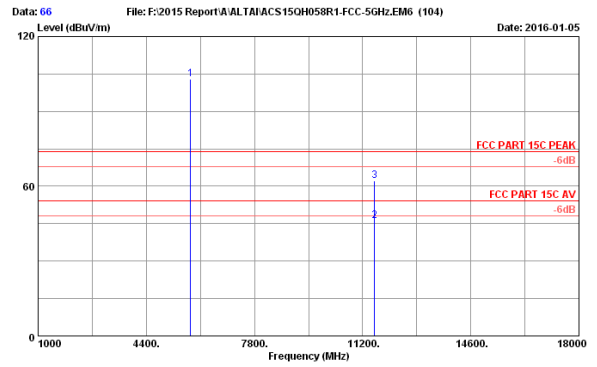


Site no. : 3m Chamber Data no. : 66
 Dis. / Ant. : 3m 2015 MCTD1209 3006 Ant. pol. : VERTICAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : 23°C/54%
 Engineer : Leo-Li
 EUT : Altai A3c Indoor Dual-band 3x3 802.11ac Wifi AP
 Power rating : DC 56V From POE Input AC 120V/60Hz
 Test Mode : IEEE802.11ac VHT20 5785MHz Tx
 WA3311NAC-C

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	AMP factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5785.000	33.49	9.91	35.10	94.56	102.86	74.00	-28.86	Peak
2	11570.000	38.26	14.60	35.31	28.67	46.22	54.00	7.78	Average
3	11570.000	38.26	14.60	35.31	44.56	62.11	74.00	11.89	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp Factor
 2. The emission levels that are 20dB below the official limit are not reported.

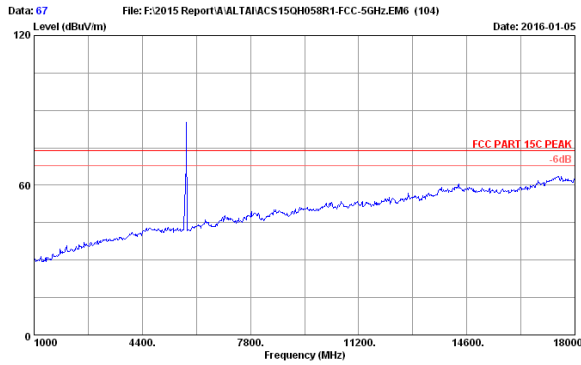


Site no. : 3m Chamber Data no. : 67
 Dis. / Ant. : 3m 2015 MCTD1209 3006 Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : 23°C/54%
 Engineer : Leo-Li
 EUT : Altai A3c Indoor Dual-band 3x3 802.11ac Wifi AP
 Power rating : DC 56V From POE Input AC 120V/60Hz
 Test Mode : IEEE802.11ac VHT20 5785MHz Tx
 WA3311NAC-C

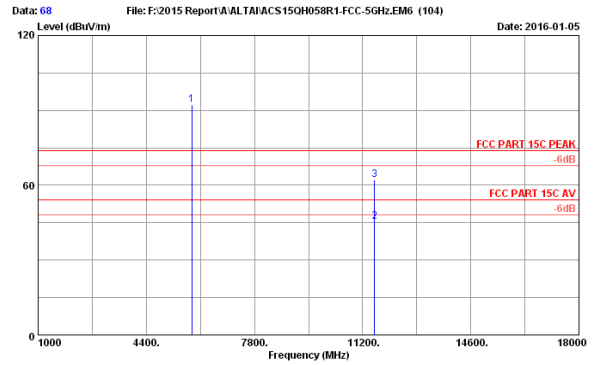


Site no. : 3m Chamber Data no. : 68
 Dis. / Ant. : 3m 2015 MCTD1209 3006 Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : 23°C/54%
 Engineer : Leo-Li
 EUT : Altai A3c Indoor Dual-band 3x3 802.11ac Wifi AP
 Power rating : DC 56V From POE Input AC 120V/60Hz
 Test Mode : IEEE802.11ac VHT20 5785MHz Tx
 WA3311NAC-C

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	AMP factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5825.000	33.53	9.93	35.08	83.75	92.13	74.00	-18.13	Peak
2	11570.000	38.26	14.60	35.31	27.94	45.49	54.00	8.51	Average
3	11570.000	38.26	14.60	35.31	44.73	62.28	74.00	11.72	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp Factor
 2. The emission levels that are 20dB below the official limit are not reported.

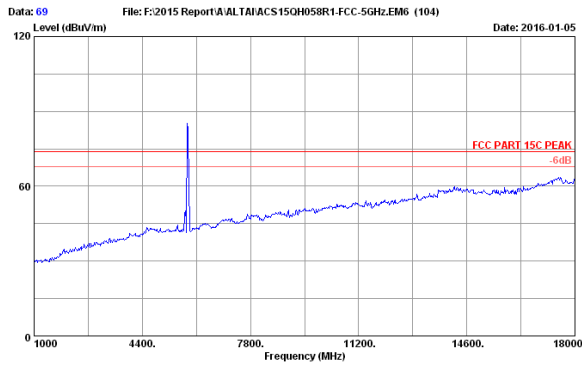


Site no. : 3m Chamber Data no. : 69
 Dis. / Ant. : 3m 2015 MCTD1209 3006 Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : 23°C/54%
 Engineer : Leo-Li
 EUT : Altai A3c Indoor Dual-band 3x3 802.11ac Wifi AP
 Power rating : DC 56V From POE Input AC 120V/60Hz
 Test Mode : IEEE802.11ac VHT20 5825MHz Tx
 WA3311NAC-C

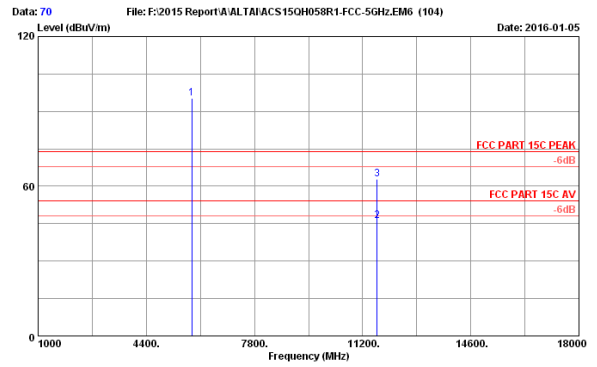


Site no. : 3m Chamber Data no. : 70
 Dis. / Ant. : 3m 2015 MCTD1209 3006 Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : 23°C/54%
 Engineer : Leo-Li
 EUT : Altai A3c Indoor Dual-band 3x3 802.11ac Wifi AP
 Power rating : DC 56V From POE Input AC 120V/60Hz
 Test Mode : IEEE802.11ac VHT20 5825MHz Tx
 WA3311NAC-C

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	AMP factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5825.000	33.53	9.93	35.08	86.77	95.15	74.00	-21.15	Peak
2	11650.000	38.21	14.66	35.29	28.44	46.02	54.00	7.98	Average
3	11650.000	38.21	14.66	35.29	45.28	62.86	74.00	11.14	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp Factor
 2. The emission levels that are 20dB below the official limit are not reported.

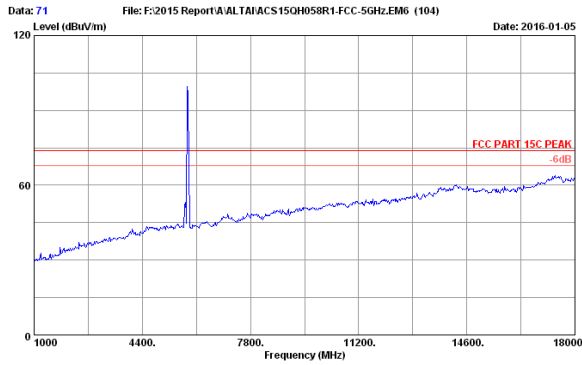


Site no. : 3m Chamber Data no. : 71
 Dis. / Ant. : 3m 2015 MCTD1209 3006 Ant. pol. : VERTICAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : 23°C/54%
 Engineer : Leo-Li
 EUT : Altai A3c Indoor Dual-band 3x3 802.11ac Wifi AP
 Power rating : DC 56V From POE Input AC 120V/60Hz
 Test Mode : IEEE802.11ac VHT20 5825MHz Tx
 WA3311NAC-C

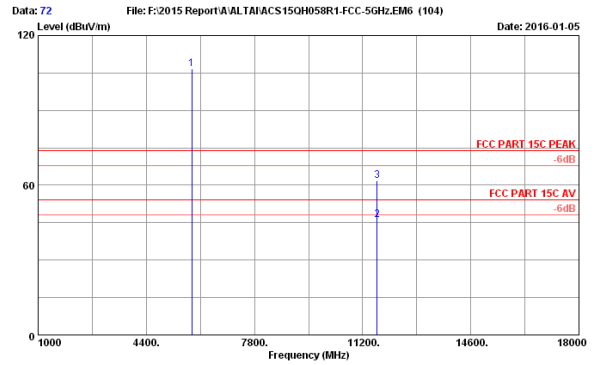


Site no. : 3m Chamber Data no. : 72
 Dis. / Ant. : 3m 2015 MCTD1209 3006 Ant. pol. : VERTICAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : 23°C/54%
 Engineer : Leo-Li
 EUT : Altai A3c Indoor Dual-band 3x3 802.11ac Wifi AP
 Power rating : DC 56V From POE Input AC 120V/60Hz
 Test Mode : IEEE802.11ac VHT20 5825MHz Tx
 WA3311NAC-C

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	AMP factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5825.000	33.53	9.93	35.08	98.22	106.60	74.00	-32.60	Peak
2	11650.000	38.21	14.66	35.29	28.49	46.07	54.00	7.93	Average
3	11650.000	38.21	14.66	35.29	44.35	61.93	74.00	12.07	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp Factor
 2. The emission levels that are 20dB below the official limit are not reported.

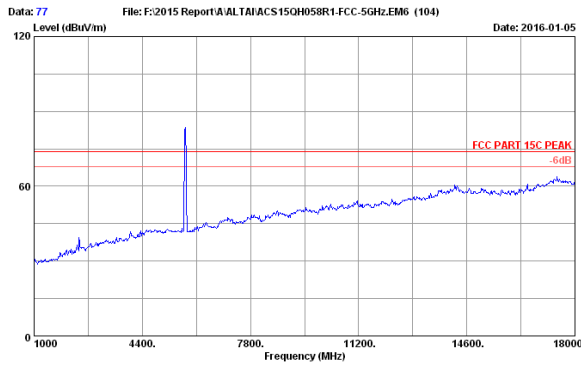


Site no. : 3m Chamber Data no. : 77
 Dis. / Ant. : 3m 2015 MCTD1209 3006 Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : 23°C/54%
 Engineer : Leo-Li
 EUT : Altai A3c Indoor Dual-band 3x3 802.11ac WiFi AP
 Power rating : DC 56V From POE Input AC 120V/60Hz
 Test Mode : IEEE802.11ac VHT40 5755MHz Tx
 WA3311NAC-C

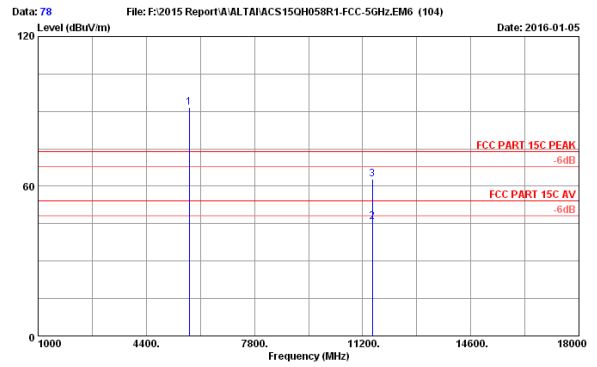


Site no. : 3m Chamber Data no. : 78
 Dis. / Ant. : 3m 2015 MCTD1209 3006 Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : 23°C/54%
 Engineer : Leo-Li
 EUT : Altai A3c Indoor Dual-band 3x3 802.11ac WiFi AP
 Power rating : DC 56V From POE Input AC 120V/60Hz
 Test Mode : IEEE802.11ac VHT40 5755MHz Tx
 WA3311NAC-C

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	AMP factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5755.000	33.46	9.91	35.11	83.19	91.45	74.00	-17.45	Peak
2	11510.000	38.29	14.56	35.33	28.41	45.93	54.00	8.07	Average
3	11510.000	38.29	14.56	35.33	45.36	62.88	74.00	11.12	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp Factor
 2. The emission levels that are 20dB below the official limit are not reported.

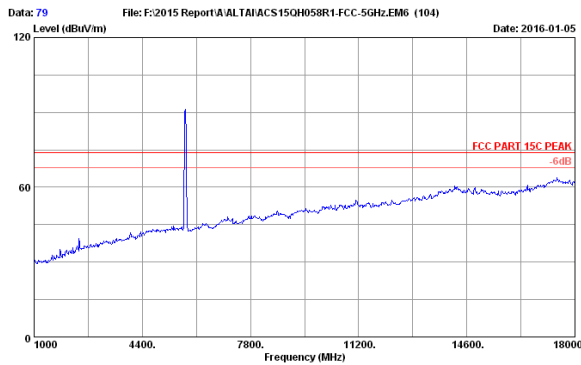


Site no. : 3m Chamber Data no. : 79
 Dis. / Ant. : 3m 2015 MCTD1209 3006 Ant. pol. : VERTICAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : 23°C/54%
 Engineer : Leo-Li
 EUT : Altai A3c Indoor Dual-band 3x3 802.11ac WiFi AP
 Power rating : DC 56V From POE Input AC 120V/60Hz
 Test Mode : IEEE802.11ac VHT40 5755MHz Tx
 WA3311NAC-C

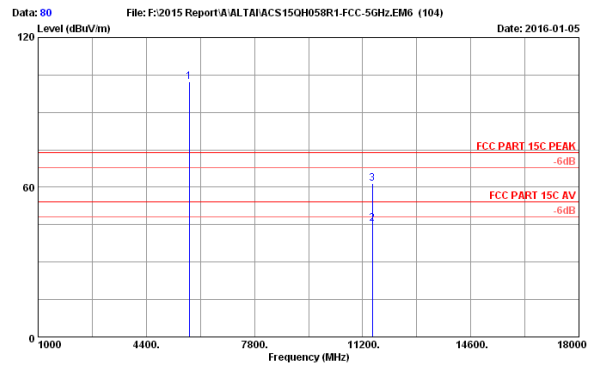


Site no. : 3m Chamber Data no. : 80
 Dis. / Ant. : 3m 2015 MCTD1209 3006 Ant. pol. : VERTICAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : 23°C/54%
 Engineer : Leo-Li
 EUT : Altai A3c Indoor Dual-band 3x3 802.11ac WiFi AP
 Power rating : DC 56V From POE Input AC 120V/60Hz
 Test Mode : IEEE802.11ac VHT40 5755MHz Tx
 WA3311NAC-C

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	AMP factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5755.000	33.46	9.91	35.11	93.92	102.18	74.00	-28.18	Peak
2	11510.000	38.29	14.56	35.33	27.89	45.41	54.00	8.59	Average
3	11510.000	38.29	14.56	35.33	43.96	61.48	74.00	12.52	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp Factor
 2. The emission levels that are 20dB below the official limit are not reported.

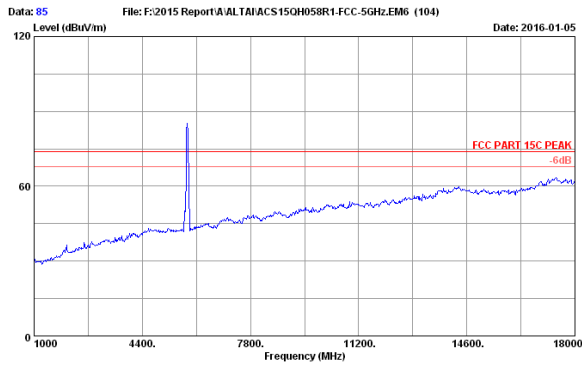


Site no. : 3m Chamber Data no. : 85
 Dis. / Ant. : 3m 2015 MCTD1209 3006 Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : 23°C/54%
 Engineer : Leo-Li
 EUT : Altai A3c Indoor Dual-band 3x3 802.11ac Wifi AP
 Power rating : DC 56V From POE Input AC 120V/60Hz
 Test Mode : IEEE802.11ac VHT40 5795MHz Tx
 WA3311NAC-C

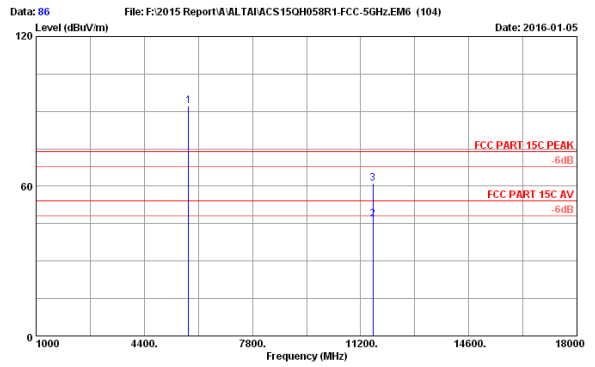


Site no. : 3m Chamber Data no. : 86
 Dis. / Ant. : 3m 2015 MCTD1209 3006 Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : 23°C/54%
 Engineer : Leo-Li
 EUT : Altai A3c Indoor Dual-band 3x3 802.11ac Wifi AP
 Power rating : DC 56V From POE Input AC 120V/60Hz
 Test Mode : IEEE802.11ac VHT40 5795MHz Tx
 WA3311NAC-C

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	AMP factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5795.000	33.49	9.92	35.09	84.04	92.36	74.00	-18.36	Peak
2	11590.000	38.25	14.61	35.30	29.13	46.69	54.00	7.31	Average
3	11590.000	38.25	14.61	35.30	43.66	61.22	74.00	12.78	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp Factor
 2. The emission levels that are 20dB below the official limit are not reported.

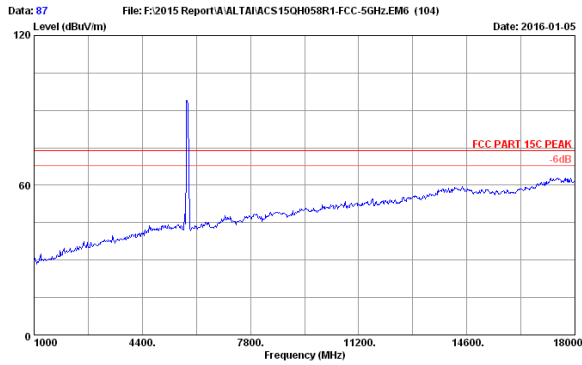


Site no. : 3m Chamber Data no. : 87
 Dis. / Ant. : 3m 2015 MCTD1209 3006 Ant. pol. : VERTICAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : 23°C/54%
 Engineer : Leo-Li
 EUT : Altai A3c Indoor Dual-band 3x3 802.11ac Wifi AP
 Power rating : DC 56V From POE Input AC 120V/60Hz
 Test Mode : IEEE802.11ac VHT40 5795MHz Tx
 WA3311NAC-C

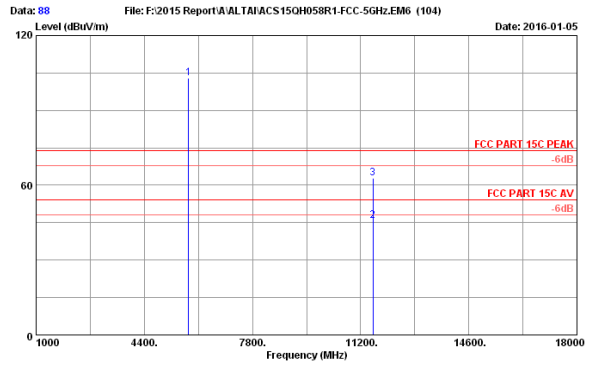


Site no. : 3m Chamber Data no. : 88
 Dis. / Ant. : 3m 2015 MCTD1209 3006 Ant. pol. : VERTICAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : 23°C/54%
 Engineer : Leo-Li
 EUT : Altai A3c Indoor Dual-band 3x3 802.11ac Wifi AP
 Power rating : DC 56V From POE Input AC 120V/60Hz
 Test Mode : IEEE802.11ac VHT40 5795MHz Tx
 WA3311NAC-C

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	AMP factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5795.000	33.49	9.92	35.09	94.58	102.90	74.00	-28.90	Peak
2	11590.000	38.25	14.61	35.30	28.30	45.86	54.00	8.14	Average
3	11590.000	38.25	14.61	35.30	45.27	62.83	74.00	11.17	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp Factor
 2. The emission levels that are 20dB below the official limit are not reported.

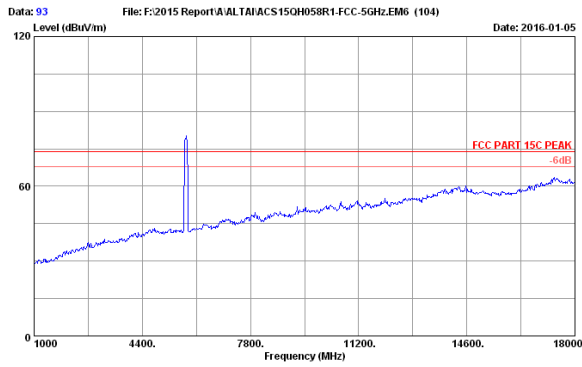


Site no. : 3m Chamber Data no. : 93
 Dis. / Ant. : 3m 2015 MCTD1209 3006 Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : 23°C/54%
 Engineer : Leo-Li
 EUT : Altai A3c Indoor Dual-band 3x3 802.11ac WiFi AP
 Power rating : DC 56V From POE Input AC 120V/60Hz
 Test Mode : IEEE802.11ac VHT80 5775MHz Tx
 WA3311NAC-C

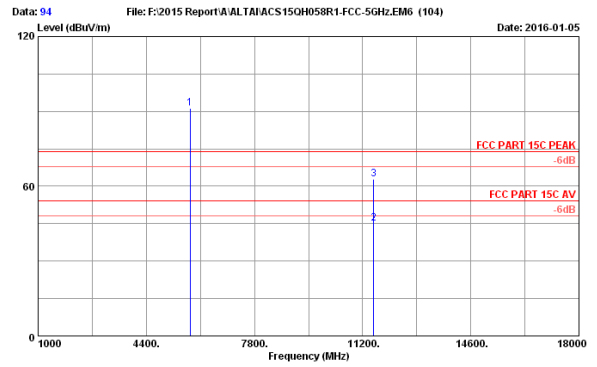


Site no. : 3m Chamber Data no. : 94
 Dis. / Ant. : 3m 2015 MCTD1209 3006 Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : 23°C/54%
 Engineer : Leo-Li
 EUT : Altai A3c Indoor Dual-band 3x3 802.11ac WiFi AP
 Power rating : DC 56V From POE Input AC 120V/60Hz
 Test Mode : IEEE802.11ac VHT80 5775MHz Tx
 WA3311NAC-C

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	AMP factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5775.000	33.48	9.91	35.10	82.06	91.15	74.00	-17.15	Peak
2	11550.000	38.27	14.58	35.31	27.64	45.18	54.00	8.82	Average
3	11550.000	38.27	14.58	35.31	45.23	62.77	74.00	11.23	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp Factor
 2. The emission levels that are 20dB below the official limit are not reported.

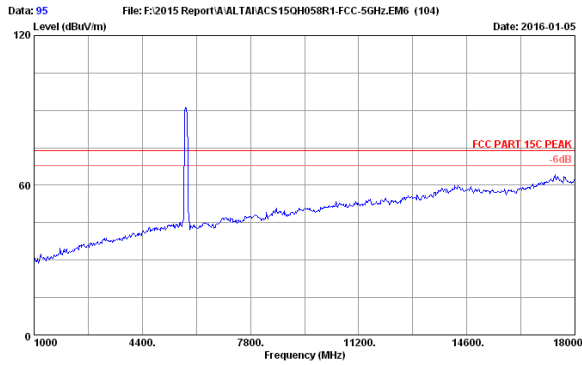

Site no. : 3m Chamber Data no. : 95
 Dis. / Ant. : 3m 2015 MCTD1209 3006 Ant. pol. : VERTICAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : 23°C/54%
 Engineer : Leo-Li
 EUT : Altai A3c Indoor Dual-band 3x3 802.11ac WiFi AP
 Power rating : DC 56V From POE Input AC 120V/60Hz
 Test Mode : IEEE802.11ac VHT80 5775MHz Tx
 WA3311NAC-C

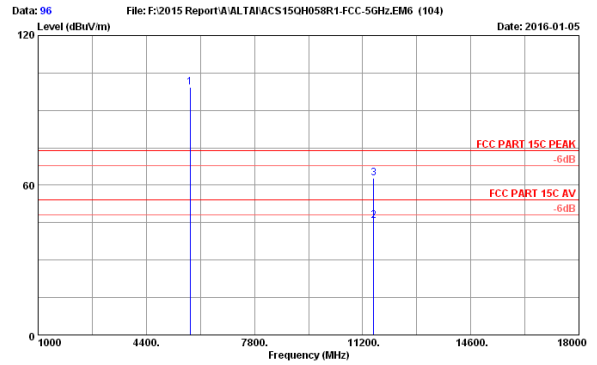

Site no. : 3m Chamber Data no. : 96
 Dis. / Ant. : 3m 2015 MCTD1209 3006 Ant. pol. : VERTICAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : 23°C/54%
 Engineer : Leo-Li
 EUT : Altai A3c Indoor Dual-band 3x3 802.11ac WiFi AP
 Power rating : DC 56V From POE Input AC 120V/60Hz
 Test Mode : IEEE802.11ac VHT80 5775MHz Tx
 WA3311NAC-C

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	AMP factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5775.000	33.48	9.91	35.10	90.97	99.26	74.00	-25.26	Peak
2	11550.000	38.27	14.58	35.31	28.19	45.73	54.00	8.27	Average
3	11550.000	38.27	14.58	35.31	45.38	62.92	74.00	11.08	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp Factor
 2. The emission levels that are 20dB below the official limit are not reported.

5. BAND EDGE COMPLIANCE TEST

5.1. Test Equipment

Item	Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Cal. Interval
1.	Spectrum	Agilent	E4446A	US44300459	Apr.28,15	1 Year
2.	Amp	HP	8449B	3008A02495	Apr.28,15	1 Year
3.	Horn Antenna	ETC	MCTD 1209	DRH15F03007	Feb.03,15	1 Year
4.	HF Cable	Hubersuhner	Sucoflex104	274094/4	Apr.28,15	1 Year

5.2. Limit

For transmitters operating in the band 5150-5250 MHz, all emissions outside the band 5150-5350 MHz shall not exceed -27 dBm/MHz e.i.r.p.

For devices with both operating frequencies and channel bandwidths contained within the band 5250-5350 MHz,

All emissions outside the band 5250-5350 MHz shall not exceed -27 dBm/MHz e.i.r.p.

For transmitters operating in the band 5470-5725MHz, Emissions outside the band 5470-5725 MHz shall not exceed -27 dBm/MHz e.i.r.p.

For the band 5725-5850 MHz, emissions at frequencies from the band edges to 10 MHz above or below the band edges shall not exceed -17 dBm/MHz e.i.r.p.


For emissions at frequencies more than 10 MHz above or below the band edges, the emissions power shall not exceed -27 dBm/MHz.

5.3. Test Produce

1. The EUT is placed on a turntable, which is 0.8m above the ground plane and worked at highest radiated power.
2. The turntable was rotated for 360 degrees to determine the position of maximum emission level.
3. EUT is set 3m away from the receiving antenna, which is varied from 1m to 4m to find out the highest emission.
4. Set the spectrum analyzer in the following setting in order to capture the lower and upper band-edges of the emission:
 - (a) PEAK: RBW=1MHz; VBW=3MHz; Sweep=AUTO
 - (b) AVERAGE: RBW=1MHz; VBW=10Hz; Sweep=AUTO
5. Per KDB789033 clause H 2)d).if the test distance is 3m, the EIRP(dBm)=E(dBuv/m)-95.2
Get the final compare with limit.

5.4. Test Results


Pass (The testing data was attached in the next pages.)

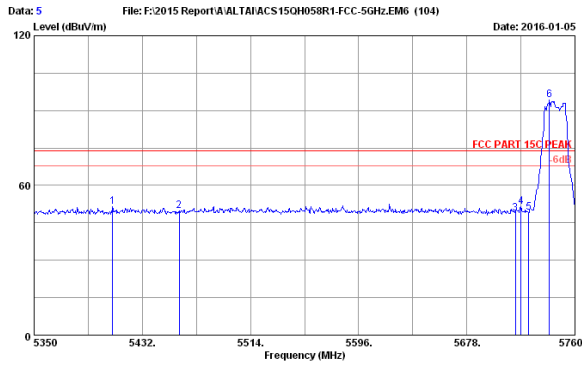

Site no. : 3m Chamber Data no. : 5
 Dis. / Ant. : 3m 2015 MCTD1209 3006 Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : 23°C/54%
 Engineer : Leo-Li
 EUT : Altai A3c Indoor Dual-band 3x3 802.11ac WiFi AP
 Power rating : DC 56V From POE Input AC 120V/60Hz
 Test Mode : IEEE802.11a 5745MHz Tx
 WA3311NAC-C

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	AMP factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5409.450	33.34	9.74	35.27	43.63	51.44	74.00	22.56	Peak
2	5460.000	33.26	9.76	35.25	42.00	49.77	74.00	24.23	Peak
3	5715.000	33.42	9.88	35.12	40.75	48.93	74.00	25.07	Peak
4	5719.000	33.42	9.89	35.12	43.17	51.36	74.00	22.64	Peak
5	5725.000	33.42	9.89	35.12	40.81	49.00	74.00	25.00	Peak
6	5740.730	33.44	9.90	35.11	86.02	94.25	74.00	-20.25	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp Factor
 2. The emission levels that are 20dB below the official limit are not reported.

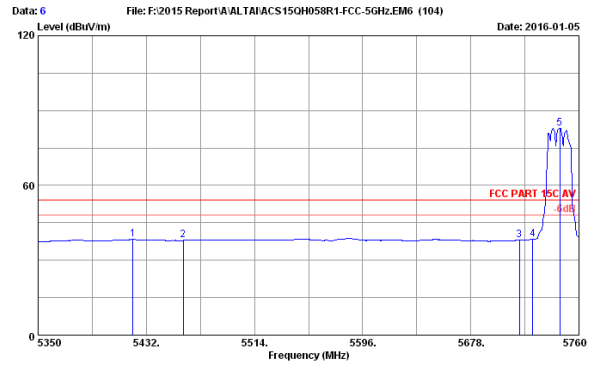

Site no. : 3m Chamber Data no. : 6
 Dis. / Ant. : 3m 2015 MCTD1209 3006 Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C AV
 Env. / Ins. : 23°C/54%
 Engineer : Leo-Li
 EUT : Altai A3c Indoor Dual-band 3x3 802.11ac WiFi AP
 Power rating : DC 56V From POE Input AC 120V/60Hz
 Test Mode : IEEE802.11a 5745MHz Tx
 WA3311NAC-C

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	AMP factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5421.750	33.33	9.74	35.26	30.60	38.41	54.00	15.59	Average
2	5460.000	33.26	9.76	35.25	30.17	37.94	54.00	16.06	Average
3	5715.000	33.42	9.88	35.12	29.91	38.09	54.00	15.91	Average
4	5725.000	33.42	9.89	35.12	30.38	38.57	54.00	15.43	Average
5	5745.650	33.45	9.90	35.11	74.69	82.93	54.00	-28.93	Average


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp Factor
 2. The emission levels that are 20dB below the official limit are not reported.

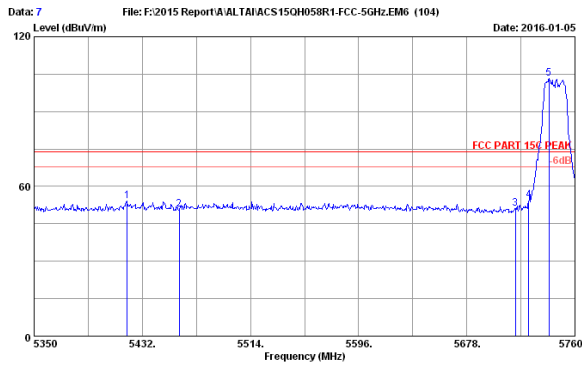

Site no. : 3m Chamber Data no. : 7
 Dis. / Ant. : 3m 2015 MCTD1209 3006 Ant. pol. : VERTICAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : 23°C/54%
 Engineer : Leo-Li
 EUT : Altai A3c Indoor Dual-band 3x3 802.11ac WiFi AP
 Power rating : DC 56V From POE Input AC 120V/60Hz
 Test Mode : IEEE802.11a 5745MHz Tx
 WA3311NAC-C

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	AMP factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5420.520	33.33	9.74	35.26	46.25	54.06	74.00	19.94	Peak
2	5460.000	33.26	9.76	35.25	43.04	50.81	74.00	23.19	Peak
3	5715.000	33.42	9.88	35.12	43.08	51.26	74.00	22.74	Peak
4	5725.000	33.42	9.89	35.12	46.30	54.49	74.00	19.51	Peak
5	5740.320	33.44	9.90	35.11	94.99	103.22	74.00	-29.22	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp Factor
 2. The emission levels that are 20dB below the official limit are not reported.

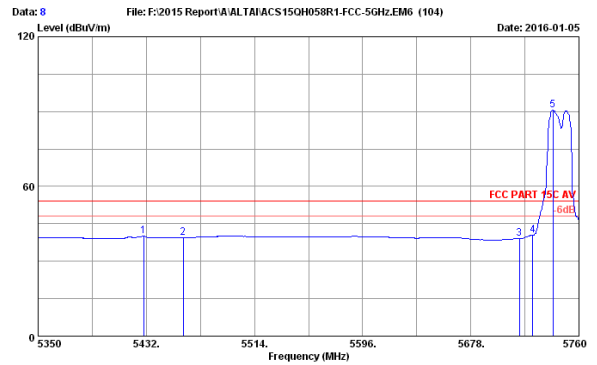

Site no. : 3m Chamber Data no. : 8
 Dis. / Ant. : 3m 2015 MCTD1209 3006 Ant. pol. : VERTICAL
 Limit : FCC PART 15C AV
 Env. / Ins. : 23°C/54%
 Engineer : Leo-Li
 EUT : Altai A3c Indoor Dual-band 3x3 802.11ac WiFi AP
 Power rating : DC 56V From POE Input AC 120V/60Hz
 Test Mode : IEEE802.11a 5745MHz Tx
 WA3311NAC-C

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	AMP factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5428.950	33.31	9.74	35.26	32.23	40.02	54.00	13.98	Average
2	5460.000	33.26	9.76	35.25	31.67	39.44	54.00	14.56	Average
3	5715.000	33.42	9.88	35.12	31.00	39.18	54.00	14.82	Average
4	5725.000	33.42	9.89	35.12	32.29	40.48	54.00	13.52	Average
5	5740.320	33.44	9.90	35.11	82.46	90.69	54.00	-36.69	Average


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp Factor
 2. The emission levels that are 20dB below the official limit are not reported.

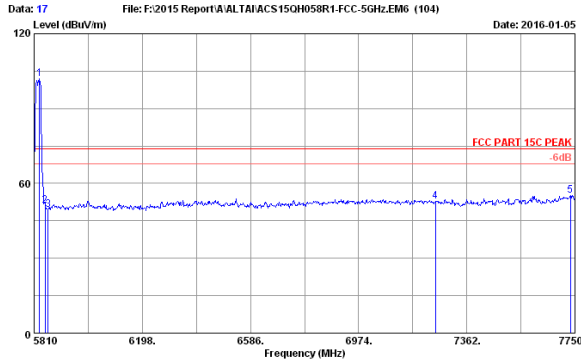

Site no. : 3m Chamber Data no. : 17
 Dis. / Ant. : 3m 2015 MCTD1209 3006 Ant. pol. : VERTICAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : 23°C/54%
 Engineer : Leo-Li
 EUT : Altai A3c Indoor Dual-band 3x3 802.11ac WiFi AP
 Power rating : DC 56V From POE Input AC 120V/60Hz
 Test Mode : IEEE802.11a 5825MHz Tx
 WA3311NAC-C

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	AMP factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5829.400	33.53	9.94	35.08	93.49	101.88	74.00	-27.88	Peak
2	5850.000	33.55	9.95	35.07	42.65	51.08	74.00	22.92	Peak
3	5860.000	33.56	9.95	35.07	41.06	49.50	74.00	24.50	Peak
4	7250.000	36.00	10.74	35.50	41.34	52.58	74.00	21.42	Peak
5	7734.480	36.52	11.22	35.69	42.97	55.02	74.00	18.98	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp Factor
 2. The emission levels that are 20dB below the official limit are not reported.

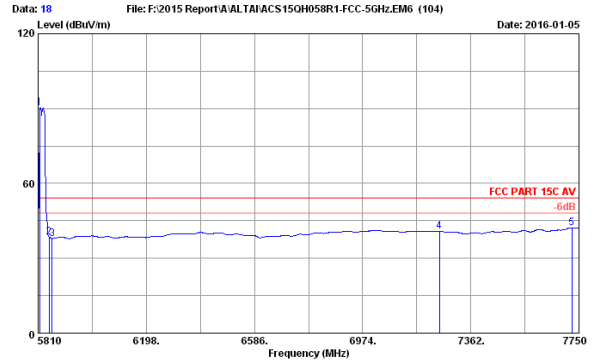

Site no. : 3m Chamber Data no. : 18
 Dis. / Ant. : 3m 2015 MCTD1209 3006 Ant. pol. : VERTICAL
 Limit : FCC PART 15C AV
 Env. / Ins. : 23°C/54%
 Engineer : Leo-Li
 EUT : Altai A3c Indoor Dual-band 3x3 802.11ac WiFi AP
 Power rating : DC 56V From POE Input AC 120V/60Hz
 Test Mode : IEEE802.11a 5825MHz Tx
 WA3311NAC-C

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	AMP factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5815.820	33.52	9.93	35.08	81.93	90.30	54.00	-36.30	Average
2	5850.000	33.55	9.95	35.07	29.99	38.42	54.00	15.58	Average
3	5860.000	33.56	9.95	35.07	29.49	37.93	54.00	16.07	Average
4	7250.000	36.00	10.74	35.50	29.46	40.70	54.00	13.30	Average
5	7724.780	36.50	11.20	35.69	30.30	42.21	54.00	11.79	Average


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp Factor
 2. The emission levels that are 20dB below the official limit are not reported.

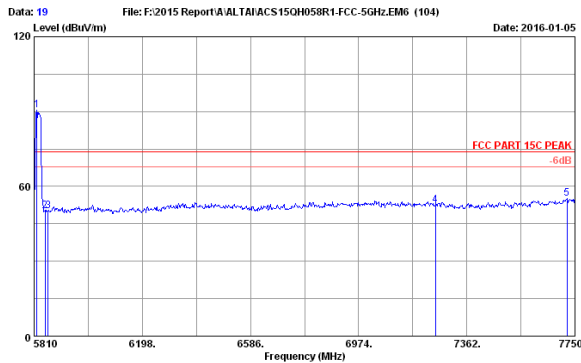

Site no. : 3m Chamber Data no. : 19
 Dis. / Ant. : 3m 2015 MCTD1209 3006 Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : 23°C/54%
 Engineer : Leo-Li
 EUT : Altai A3c Indoor Dual-band 3x3 802.11ac WiFi AP
 Power rating : DC 56V From POE Input AC 120V/60Hz
 Test Mode : IEEE802.11a 5825MHz Tx
 WA3311NAC-C

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	AMP factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5819.700	33.52	9.93	35.08	82.26	90.63	74.00	-16.63	Peak
2	5850.000	33.55	9.95	35.07	41.78	50.21	74.00	23.79	Peak
3	5860.000	33.56	9.95	35.07	41.66	50.10	74.00	23.90	Peak
4	7250.000	36.00	10.74	35.50	41.34	52.58	74.00	21.42	Peak
5	7720.900	36.50	11.20	35.69	43.28	55.29	74.00	18.71	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp Factor
 2. The emission levels that are 20dB below the official limit are not reported.

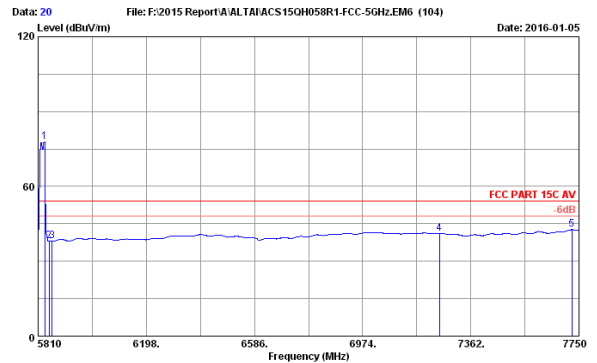

Site no. : 3m Chamber Data no. : 20
 Dis. / Ant. : 3m 2015 MCTD1209 3006 Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C AV
 Env. / Ins. : 23°C/54%
 Engineer : Leo-Li
 EUT : Altai A3c Indoor Dual-band 3x3 802.11ac WiFi AP
 Power rating : DC 56V From POE Input AC 120V/60Hz
 Test Mode : IEEE802.11a 5825MHz Tx
 WA3311NAC-C

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	AMP factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5833.280	33.53	9.94	35.08	69.38	77.77	54.00	-23.77	Average
2	5850.000	33.55	9.95	35.07	29.76	38.19	54.00	15.81	Average
3	5860.000	33.56	9.95	35.07	29.59	38.03	54.00	15.97	Average
4	7250.000	36.00	10.74	35.50	29.82	41.06	54.00	12.94	Average
5	7724.780	36.50	11.20	35.69	30.64	42.65	54.00	11.35	Average


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp Factor
 2. The emission levels that are 20dB below the official limit are not reported.

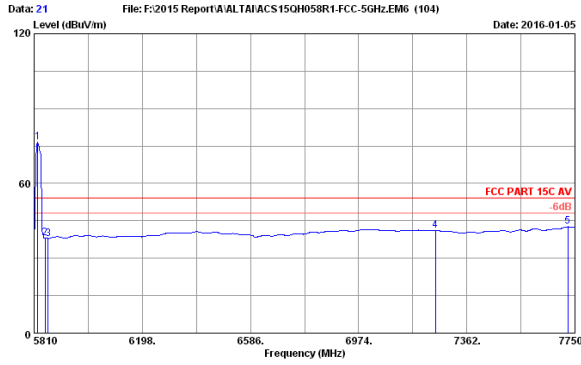

Site no. : 3m Chamber Data no. : 21
 Dis. / Ant. : 3m 2015 MCTD1209 3006 Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C AV
 Env. / Ins. : 23°C/54%
 Engineer : Leo-Li
 EUT : Altai A3c Indoor Dual-band 3x3 802.11ac WiFi AP
 Power rating : DC 56V From POE Input AC 120V/60Hz
 Test Mode : IEE902.11nHT20 5825MHz Tx
 WA3311NAC-C

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	AMP factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5823.580	33.52	9.93	35.08	68.22	76.59	54.00	-22.59	Average
2	5850.000	33.55	9.95	35.07	29.71	38.14	54.00	15.86	Average
3	5860.000	33.56	9.95	35.07	29.50	37.94	54.00	16.06	Average
4	7250.000	36.00	10.74	35.50	29.80	41.04	54.00	12.96	Average
5	7724.780	36.50	11.20	35.69	30.62	42.63	54.00	11.37	Average


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp Factor
 2. The emission levels that are 20dB below the official limit are not reported.

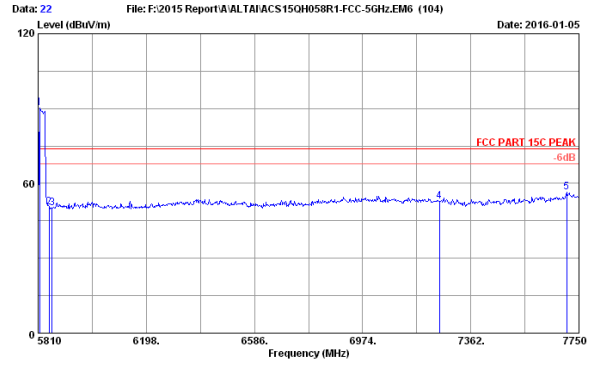

Site no. : 3m Chamber Data no. : 22
 Dis. / Ant. : 3m 2015 MCTD1209 3006 Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : 23°C/54%
 Engineer : Leo-Li
 EUT : Altai A3c Indoor Dual-band 3x3 802.11ac WiFi AP
 Power rating : DC 56V From POE Input AC 120V/60Hz
 Test Mode : IEE902.11nHT20 5825MHz Tx
 WA3311NAC-C

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	AMP factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5815.820	33.52	9.93	35.08	81.80	90.17	74.00	-16.17	Peak
2	5850.000	33.55	9.95	35.07	42.00	50.43	74.00	23.57	Peak
3	5860.000	33.56	9.95	35.07	41.85	50.29	74.00	23.71	Peak
4	7250.000	36.00	10.74	35.50	41.46	52.70	74.00	21.30	Peak
5	7705.380	36.47	11.18	35.68	44.59	56.56	74.00	17.44	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp Factor
 2. The emission levels that are 20dB below the official limit are not reported.

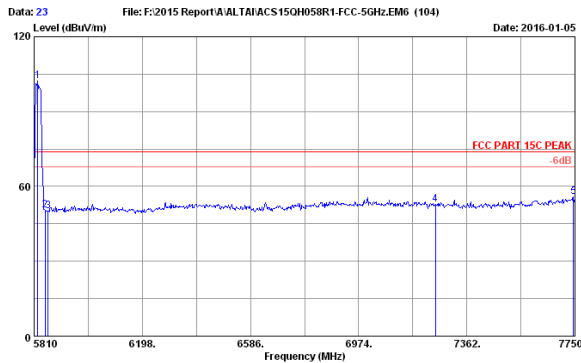

Site no. : 3m Chamber Data no. : 23
 Dis. / Ant. : 3m 2015 MCTD1209 3006 Ant. pol. : VERTICAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : 23°C/54%
 Engineer : Leo-Li
 EUT : Altai A3c Indoor Dual-band 3x3 802.11ac WiFi AP
 Power rating : DC 56V From POE Input AC 120V/60Hz
 Test Mode : IEE902.11nHT20 5825MHz Tx
 WA3311NAC-C

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	AMP factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5823.580	33.52	9.93	35.08	93.90	102.27	74.00	-28.27	Peak
2	5850.000	33.55	9.95	35.07	41.92	50.35	74.00	23.65	Peak
3	5860.000	33.56	9.95	35.07	41.67	50.11	74.00	23.89	Peak
4	7250.000	36.00	10.74	35.50	41.68	52.92	74.00	21.08	Peak
5	7744.180	36.54	11.22	35.70	43.70	55.76	74.00	18.24	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp Factor
 2. The emission levels that are 20dB below the official limit are not reported.

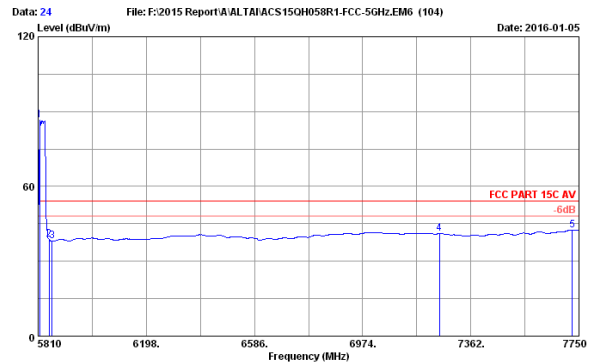

Site no. : 3m Chamber Data no. : 24
 Dis. / Ant. : 3m 2015 MCTD1209 3006 Ant. pol. : VERTICAL
 Limit : FCC PART 15C AV
 Env. / Ins. : 23°C/54%
 Engineer : Leo-Li
 EUT : Altai A3c Indoor Dual-band 3x3 802.11ac WiFi AP
 Power rating : DC 56V From POE Input AC 120V/60Hz
 Test Mode : IEE902.11nHT20 5825MHz Tx
 WA3311NAC-C

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	AMP factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5815.820	33.52	9.93	35.08	78.05	86.42	54.00	-32.42	Average
2	5850.000	33.55	9.95	35.07	30.21	38.64	54.00	15.36	Average
3	5860.000	33.56	9.95	35.07	29.63	38.07	54.00	15.93	Average
4	7250.000	36.00	10.74	35.50	29.76	41.00	54.00	13.00	Average
5	7726.720	36.51	11.20	35.69	30.58	42.60	54.00	11.40	Average


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp Factor
 2. The emission levels that are 20dB below the official limit are not reported.

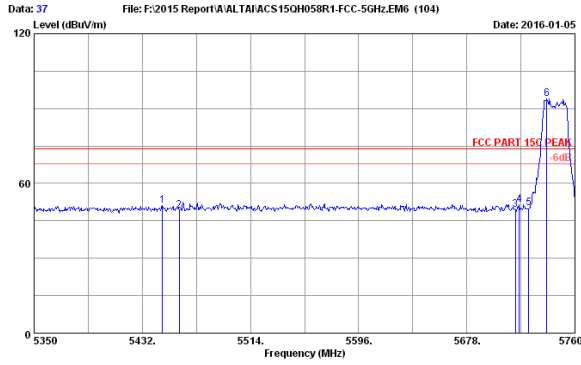

Site no. : 3m Chamber Data no. : 37
 Dis. / Ant. : 3m 2015 MCTD1209 3006 Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : 23°C/54%
 Engineer : Leo-Li
 EUT : Altai A3c Indoor Dual-band 3x3 802.11ac WiFi AP
 Power rating : DC 56V From POE Input AC 120V/60Hz
 Test Mode : IEEE802.11nHT20 5745MHz Tx
 WA3311NAC-C

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	AMP factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5447.170	33.28	9.75	35.25	43.47	51.25	74.00	22.75	Peak
2	5460.000	33.26	9.76	35.25	41.42	49.19	74.00	24.81	Peak
3	5715.000	33.42	9.88	35.12	41.25	49.43	74.00	24.57	Peak
4	5717.770	33.42	9.89	35.12	43.23	51.42	74.00	22.58	Peak
5	5725.000	33.42	9.89	35.12	41.80	49.99	74.00	24.01	Peak
6	5738.680	33.44	9.90	35.11	85.72	93.95	74.00	-19.95	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp Factor
 2. The emission levels that are 20dB below the official limit are not reported.

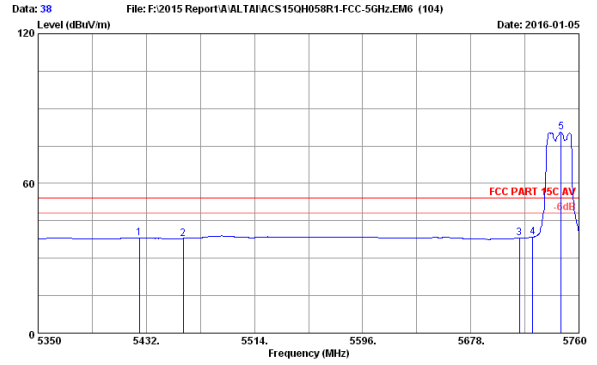

Site no. : 3m Chamber Data no. : 38
 Dis. / Ant. : 3m 2015 MCTD1209 3006 Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C AV
 Env. / Ins. : 23°C/54%
 Engineer : Leo-Li
 EUT : Altai A3c Indoor Dual-band 3x3 802.11ac WiFi AP
 Power rating : DC 56V From POE Input AC 120V/60Hz
 Test Mode : IEEE802.11nHT20 5745MHz Tx
 WA3311NAC-C

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	AMP factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5426.670	33.32	9.74	35.26	30.45	38.25	54.00	15.75	Average
2	5460.000	33.26	9.76	35.25	30.16	37.93	54.00	16.07	Average
3	5715.000	33.42	9.88	35.12	29.94	38.12	54.00	15.88	Average
4	5725.000	33.42	9.89	35.12	30.28	38.47	54.00	15.53	Average
5	5746.470	33.45	9.90	35.11	72.25	80.49	54.00	-26.49	Average


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp Factor
 2. The emission levels that are 20dB below the official limit are not reported.

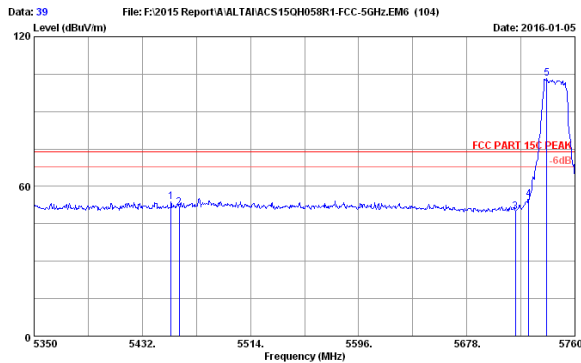

Site no. : 3m Chamber Data no. : 39
 Dis. / Ant. : 3m 2015 MCTD1209 3006 Ant. pol. : VERTICAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : 23°C/54%
 Engineer : Leo-Li
 EUT : Altai A3c Indoor Dual-band 3x3 802.11ac WiFi AP
 Power rating : DC 56V From POE Input AC 120V/60Hz
 Test Mode : IEEE802.11nHT20 5745MHz Tx
 WA3311NAC-C

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	AMP factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5453.730	33.27	9.76	35.25	46.04	53.82	74.00	20.18	Peak
2	5460.000	33.26	9.76	35.25	43.86	51.63	74.00	22.37	Peak
3	5715.000	33.42	9.88	35.12	41.75	49.99	74.00	24.07	Peak
4	5725.000	33.42	9.89	35.12	46.54	54.73	74.00	19.27	Peak
5	5738.680	33.44	9.90	35.11	95.09	103.32	74.00	-29.32	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp Factor
 2. The emission levels that are 20dB below the official limit are not reported.

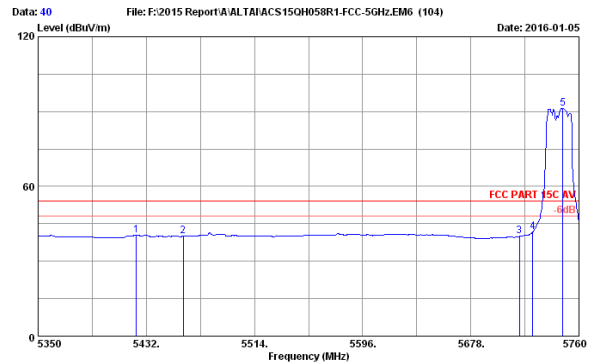

Site no. : 3m Chamber Data no. : 40
 Dis. / Ant. : 3m 2015 MCTD1209 3006 Ant. pol. : VERTICAL
 Limit : FCC PART 15C AV
 Env. / Ins. : 23°C/54%
 Engineer : Leo-Li
 EUT : Altai A3c Indoor Dual-band 3x3 802.11ac WiFi AP
 Power rating : DC 56V From POE Input AC 120V/60Hz
 Test Mode : IEEE802.11nHT20 5745MHz Tx
 WA3311NAC-C

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	AMP factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5424.620	33.32	9.74	35.26	32.66	40.46	54.00	13.54	Average
2	5460.000	33.26	9.76	35.25	32.18	39.95	54.00	14.05	Average
3	5715.000	33.42	9.88	35.12	31.78	39.96	54.00	14.04	Average
4	5725.000	33.42	9.89	35.12	33.70	41.89	54.00	12.11	Average
5	5747.700	33.45	9.90	35.11	83.10	91.34	54.00	-37.34	Average


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp Factor
 2. The emission levels that are 20dB below the official limit are not reported.

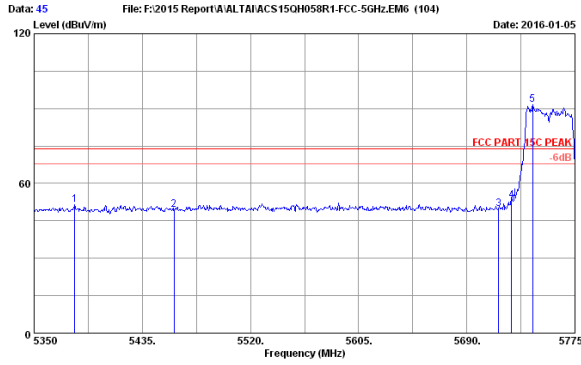

Site no. : 3m Chamber Data no. : 45
 Dis. / Ant. : 3m 2015 MCTD1209 3006 Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : 23°C/54%
 Engineer : Leo-Li
 EUT : Altai A3c Indoor Dual-band 3x3 802.11ac WiFi AP
 Power rating : DC 56V From POE Input AC 120V/60Hz
 Test Mode : IEE802.11nHT40 5755MHz Tx
 WA3311NAC-C

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	AMP factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5381.875	33.39	9.73	35.28	43.48	51.32	74.00	22.68	Peak
2	5460.000	33.26	9.76	35.25	41.69	49.46	74.00	24.54	Peak
3	5715.000	33.42	9.88	35.12	41.70	49.88	74.00	24.12	Peak
4	5725.000	33.42	9.89	35.12	45.09	53.28	74.00	20.72	Peak
5	5741.850	33.44	9.90	35.11	83.23	91.46	74.00	-17.46	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp Factor
 2. The emission levels that are 20dB below the official limit are not reported.

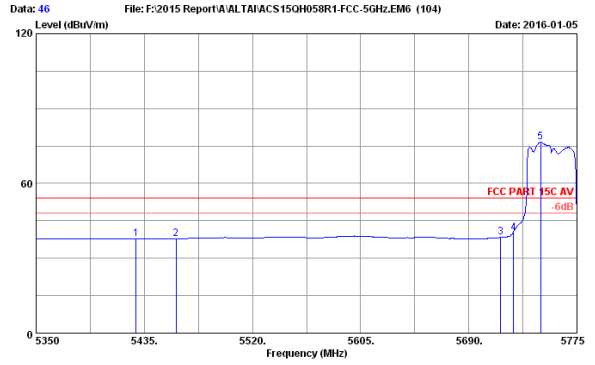

Site no. : 3m Chamber Data no. : 46
 Dis. / Ant. : 3m 2015 MCTD1209 3006 Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C AV
 Env. / Ins. : 23°C/54%
 Engineer : Leo-Li
 EUT : Altai A3c Indoor Dual-band 3x3 802.11ac WiFi AP
 Power rating : DC 56V From POE Input AC 120V/60Hz
 Test Mode : IEE802.11nHT40 5755MHz Tx
 WA3311NAC-C

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	AMP factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5428.625	33.31	9.74	35.26	30.12	37.91	54.00	16.09	Average
2	5460.000	33.26	9.76	35.25	30.02	37.79	54.00	16.21	Average
3	5715.000	33.42	9.88	35.12	30.14	38.32	54.00	15.68	Average
4	5725.000	33.42	9.89	35.12	32.08	40.27	54.00	13.73	Average
5	5746.525	33.45	9.90	35.11	68.42	76.66	54.00	-22.66	Average


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp Factor
 2. The emission levels that are 20dB below the official limit are not reported.

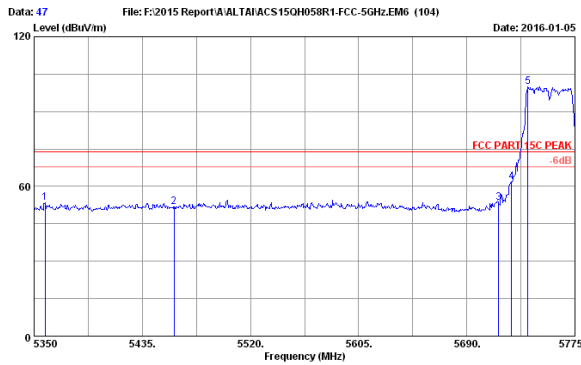

Site no. : 3m Chamber Data no. : 47
 Dis. / Ant. : 3m 2015 MCTD1209 3006 Ant. pol. : VERTICAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : 23°C/54%
 Engineer : Leo-Li
 EUT : Altai A3c Indoor Dual-band 3x3 802.11ac WiFi AP
 Power rating : DC 56V From POE Input AC 120V/60Hz
 Test Mode : IEE802.11nHT40 5755MHz Tx
 WA3311NAC-C

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	AMP factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5358.500	33.43	9.72	35.29	45.78	53.64	74.00	20.36	Peak
2	5460.000	33.26	9.76	35.25	43.95	51.72	74.00	22.28	Peak
3	5715.000	33.42	9.88	35.12	45.15	53.33	74.00	20.67	Peak
4	5725.000	33.42	9.89	35.12	53.57	61.76	74.00	12.24	Peak
5	5738.025	33.44	9.90	35.11	91.62	99.85	74.00	-25.85	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp Factor
 2. The emission levels that are 20dB below the official limit are not reported.

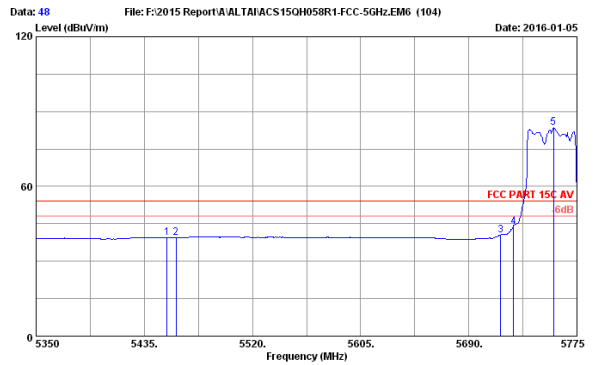

Site no. : 3m Chamber Data no. : 48
 Dis. / Ant. : 3m 2015 MCTD1209 3006 Ant. pol. : VERTICAL
 Limit : FCC PART 15C AV
 Env. / Ins. : 23°C/54%
 Engineer : Leo-Li
 EUT : Altai A3c Indoor Dual-band 3x3 802.11ac WiFi AP
 Power rating : DC 56V From POE Input AC 120V/60Hz
 Test Mode : IEE802.11nHT40 5755MHz Tx
 WA3311NAC-C

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	AMP factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5452.850	33.28	9.76	35.25	31.79	39.58	54.00	14.42	Average
2	5460.000	33.26	9.76	35.25	31.70	39.47	54.00	14.53	Average
3	5715.000	33.42	9.88	35.12	32.42	40.60	54.00	13.40	Average
4	5725.000	33.42	9.89	35.12	35.61	43.80	54.00	10.20	Average
5	5756.725	33.46	9.91	35.11	75.21	83.47	54.00	-29.47	Average


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp Factor
 2. The emission levels that are 20dB below the official limit are not reported.

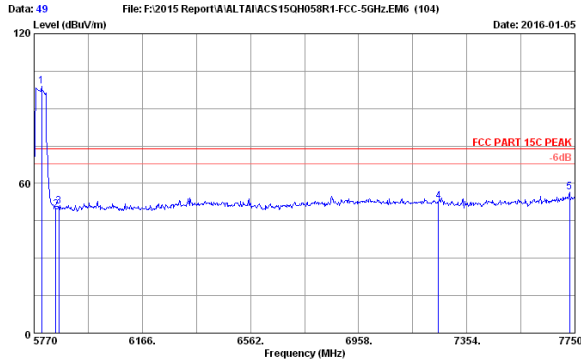

Site no. : 3m Chamber Data no. : 49
 Dis. / Ant. : 3m 2015 MCTD1209 3006 Ant. pol. : VERTICAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : 23°C/54%
 Engineer : Leo-Li
 EUT : Altai A3c Indoor Dual-band 3x3 802.11ac WiFi AP
 Power rating : DC 56V From POE Input AC 120V/60Hz
 Test Mode : IEFE902.11nHT40 5795MHz Tx
 WA3311NAC-C

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	AMP factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5797.720	33.50	9.92	35.09	90.54	98.87	74.00	-24.87	Peak
2	5850.000	33.55	9.95	35.07	41.19	49.62	74.00	24.38	Peak
3	5860.000	33.56	9.95	35.07	42.41	50.85	74.00	23.15	Peak
4	7250.000	36.00	10.74	35.50	41.63	52.87	74.00	21.13	Peak
5	7730.000	36.51	11.22	35.69	44.30	56.34	74.00	17.66	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp Factor
 2. The emission levels that are 20dB below the official limit are not reported.

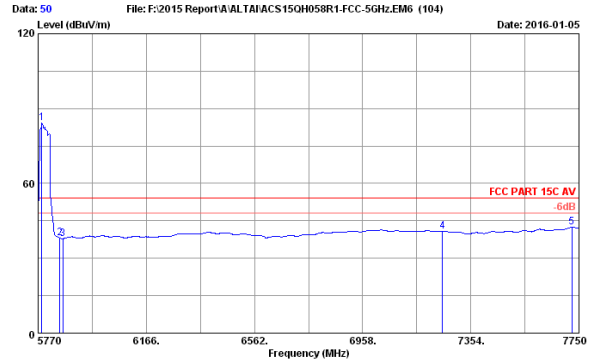

Site no. : 3m Chamber Data no. : 50
 Dis. / Ant. : 3m 2015 MCTD1209 3006 Ant. pol. : VERTICAL
 Limit : FCC PART 15C AV
 Env. / Ins. : 23°C/54%
 Engineer : Leo-Li
 EUT : Altai A3c Indoor Dual-band 3x3 802.11ac WiFi AP
 Power rating : DC 56V From POE Input AC 120V/60Hz
 Test Mode : IEFE902.11nHT40 5795MHz Tx
 WA3311NAC-C

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	AMP factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5783.860	33.48	9.91	35.10	75.81	84.10	54.00	-30.10	Average
2	5850.000	33.55	9.95	35.07	29.77	38.20	54.00	15.80	Average
3	5860.000	33.56	9.95	35.07	29.49	37.93	54.00	16.07	Average
4	7250.000	36.00	10.74	35.50	29.53	40.77	54.00	13.23	Average
5	7724.260	36.50	11.20	35.69	30.34	42.35	54.00	11.65	Average


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp Factor
 2. The emission levels that are 20dB below the official limit are not reported.

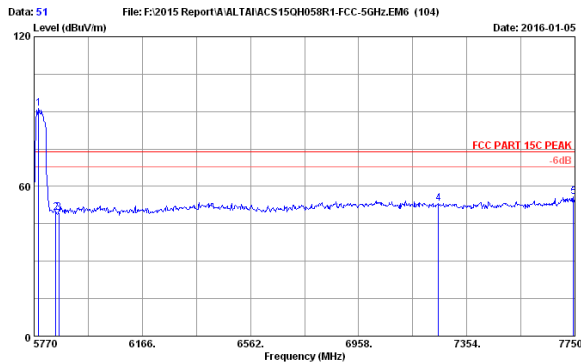

Site no. : 3m Chamber Data no. : 51
 Dis. / Ant. : 3m 2015 MCTD1209 3006 Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : 23°C/54%
 Engineer : Leo-Li
 EUT : Altai A3c Indoor Dual-band 3x3 802.11ac WiFi AP
 Power rating : DC 56V From POE Input AC 120V/60Hz
 Test Mode : IEFE902.11nHT40 5795MHz Tx
 WA3311NAC-C

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	AMP factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5785.840	33.49	9.91	35.10	82.99	91.29	74.00	-17.29	Peak
2	5850.000	33.55	9.95	35.07	41.18	49.61	74.00	24.39	Peak
3	5860.000	33.56	9.95	35.07	41.19	49.63	74.00	24.37	Peak
4	7250.000	36.00	10.74	35.50	41.63	53.07	74.00	20.93	Peak
5	7744.060	36.54	11.22	35.70	43.83	55.89	74.00	18.11	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp Factor
 2. The emission levels that are 20dB below the official limit are not reported.

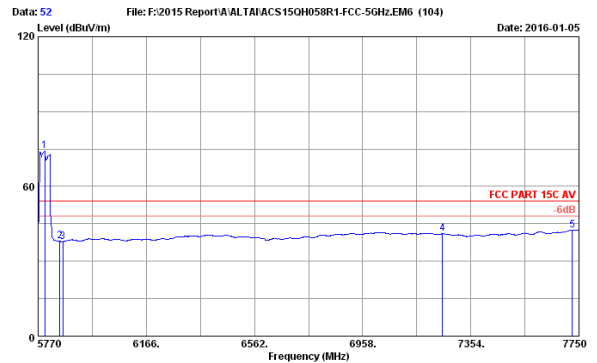

Site no. : 3m Chamber Data no. : 52
 Dis. / Ant. : 3m 2015 MCTD1209 3006 Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C AV
 Env. / Ins. : 23°C/54%
 Engineer : Leo-Li
 EUT : Altai A3c Indoor Dual-band 3x3 802.11ac WiFi AP
 Power rating : DC 56V From POE Input AC 120V/60Hz
 Test Mode : IEFE902.11nHT40 5795MHz Tx
 WA3311NAC-C

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	AMP factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5793.760	33.49	9.92	35.09	66.00	74.32	54.00	-20.32	Average
2	5850.000	33.55	9.95	35.07	29.70	38.13	54.00	15.87	Average
3	5860.000	33.56	9.95	35.07	29.41	37.85	54.00	16.15	Average
4	7250.000	36.00	10.74	35.50	29.75	40.99	54.00	13.01	Average
5	7726.240	36.51	11.20	35.69	30.51	42.53	54.00	11.47	Average


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp Factor
 2. The emission levels that are 20dB below the official limit are not reported.

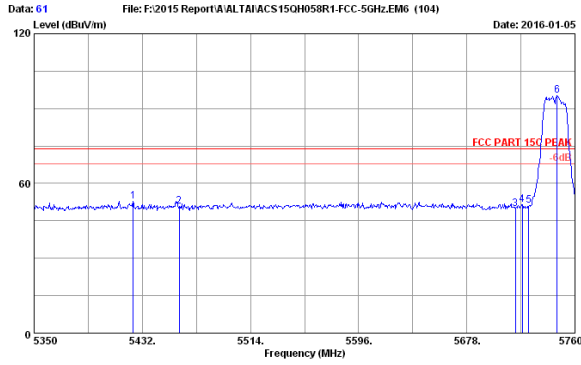

Site no. : 3m Chamber Data no. : 61
 Dis. / Ant. : 3m 2015 MCTD1209 3006 Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : 23°C/54%
 Engineer : Leo-Li
 EUT : Altai A3c Indoor Dual-band 3x3 802.11ac WiFi AP
 Power rating : DC 56V From POE Input AC 120V/60Hz
 Test Mode : IEEE802.11ac VHT20 5745MHz Tx
 WA3311NAC-C

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	AMP factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5425.030	33.32	9.74	35.26	45.02	52.82	74.00	21.18	Peak
2	5460.000	33.26	9.76	35.25	42.87	50.64	74.00	23.36	Peak
3	5715.000	33.42	9.88	35.12	41.60	49.78	74.00	24.22	Peak
4	5725.230	33.42	9.89	35.12	43.18	51.37	74.00	22.63	Peak
5	5725.000	33.42	9.89	35.12	42.85	51.04	74.00	22.96	Peak
6	5746.470	33.45	9.90	35.11	87.04	95.28	74.00	-21.28	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp Factor
 2. The emission levels that are 20dB below the official limit are not reported.

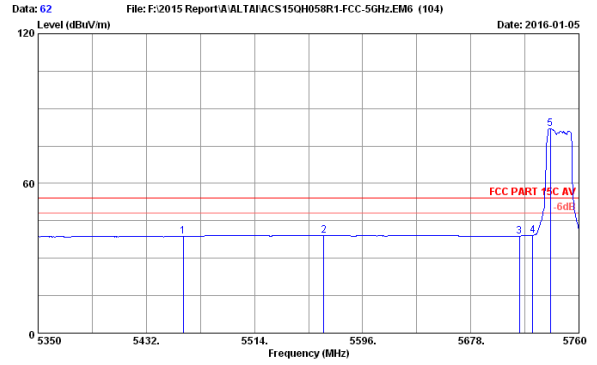

Site no. : 3m Chamber Data no. : 62
 Dis. / Ant. : 3m 2015 MCTD1209 3006 Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C AV
 Env. / Ins. : 23°C/54%
 Engineer : Leo-Li
 EUT : Altai A3c Indoor Dual-band 3x3 802.11ac WiFi AP
 Power rating : DC 56V From POE Input AC 120V/60Hz
 Test Mode : IEEE802.11ac VHT20 5745MHz Tx
 WA3311NAC-C

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	AMP factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5460.000	33.26	9.76	35.25	30.92	38.69	54.00	15.31	Average
2	5560.480	33.27	9.81	35.19	31.31	39.20	54.00	14.80	Average
3	5715.000	33.42	9.88	35.12	30.75	38.93	54.00	15.07	Average
4	5725.000	33.42	9.89	35.12	31.03	39.22	54.00	14.78	Average
5	5738.270	33.44	9.90	35.11	73.83	82.06	54.00	-28.06	Average


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp Factor
 2. The emission levels that are 20dB below the official limit are not reported.

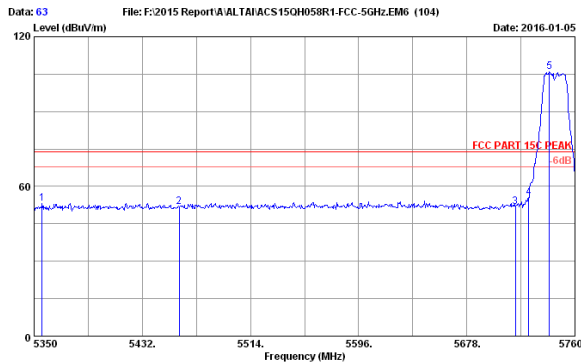

Site no. : 3m Chamber Data no. : 63
 Dis. / Ant. : 3m 2015 MCTD1209 3006 Ant. pol. : VERTICAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : 23°C/54%
 Engineer : Leo-Li
 EUT : Altai A3c Indoor Dual-band 3x3 802.11ac WiFi AP
 Power rating : DC 56V From POE Input AC 120V/60Hz
 Test Mode : IEEE802.11ac VHT20 5745MHz Tx
 WA3311NAC-C

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	AMP factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5356.150	33.43	9.71	35.29	45.38	53.23	74.00	20.77	Peak
2	5460.000	33.26	9.76	35.25	43.96	51.73	74.00	22.27	Peak
3	5715.000	33.42	9.88	35.12	43.68	51.86	74.00	22.14	Peak
4	5725.000	33.42	9.89	35.12	47.37	55.56	74.00	18.44	Peak
5	5740.730	33.44	9.90	35.11	97.73	105.96	74.00	-31.96	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp Factor
 2. The emission levels that are 20dB below the official limit are not reported.

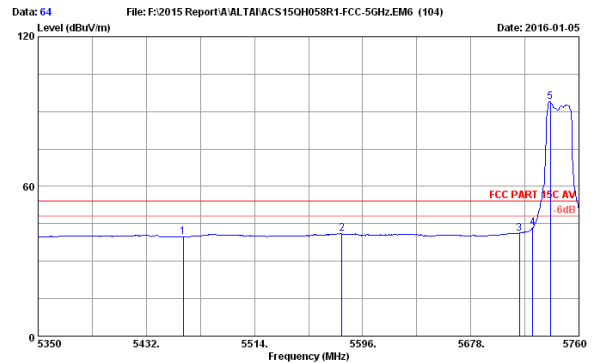

Site no. : 3m Chamber Data no. : 64
 Dis. / Ant. : 3m 2015 MCTD1209 3006 Ant. pol. : VERTICAL
 Limit : FCC PART 15C AV
 Env. / Ins. : 23°C/54%
 Engineer : Leo-Li
 EUT : Altai A3c Indoor Dual-band 3x3 802.11ac WiFi AP
 Power rating : DC 56V From POE Input AC 120V/60Hz
 Test Mode : IEEE802.11ac VHT20 5745MHz Tx
 WA3311NAC-C

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	AMP factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5460.000	33.26	9.76	35.25	32.06	39.83	54.00	14.17	Average
2	5580.420	33.28	9.82	35.19	33.21	41.12	54.00	12.88	Average
3	5715.000	33.42	9.88	35.12	33.07	41.25	54.00	12.75	Average
4	5725.000	33.42	9.89	35.12	35.41	43.66	54.00	10.40	Average
5	5738.270	33.44	9.90	35.11	85.57	93.80	54.00	-39.80	Average


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp Factor
 2. The emission levels that are 20dB below the official limit are not reported.

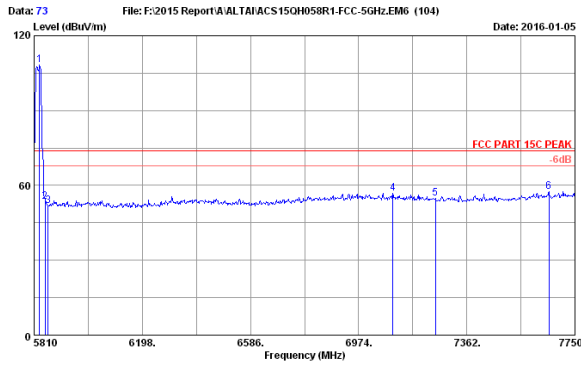

Site no. : 3m Chamber Data no. : 73
 Dis. / Ant. : 3m 2015 MCTD1209 3006 Ant. pol. : VERTICAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : 23°C/54%
 Engineer : Leo-Li
 EUT : Altai A3c Indoor Dual-band 3x3 802.11ac WiFi AP
 Power rating : DC 56V From POE Input AC 120V/60Hz
 Test Mode : IEEE802.11ac VHT20 5825MHz Tx
 WA3311NAC-C

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	AMP factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5829.400	33.53	9.94	35.08	99.77	108.16	74.00	-34.16	Peak
2	5850.000	33.55	9.95	35.07	45.17	53.60	74.00	20.40	Peak
3	5860.000	33.56	9.95	35.07	43.45	51.89	74.00	22.11	Peak
4	7096.220	35.94	10.58	35.44	45.87	56.95	74.00	17.05	Peak
5	7250.000	36.00	10.74	35.50	43.47	54.71	74.00	19.29	Peak
6	7656.880	36.38	11.13	35.66	45.67	57.52	74.00	16.48	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp Factor
 2. The emission levels that are 20dB below the official limit are not reported.

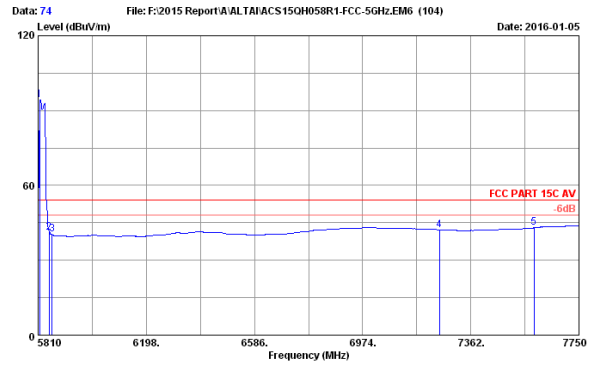

Site no. : 3m Chamber Data no. : 74
 Dis. / Ant. : 3m 2015 MCTD1209 3006 Ant. pol. : VERTICAL
 Limit : FCC PART 15C AV
 Env. / Ins. : 23°C/54%
 Engineer : Leo-Li
 EUT : Altai A3c Indoor Dual-band 3x3 802.11ac WiFi AP
 Power rating : DC 56V From POE Input AC 120V/60Hz
 Test Mode : IEEE802.11ac VHT20 5825MHz Tx
 WA3311NAC-C

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	AMP factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5815.820	33.52	9.93	35.08	85.94	94.31	54.00	-40.31	Average
2	5850.000	33.55	9.95	35.07	32.78	41.21	54.00	12.79	Average
3	5860.000	33.56	9.95	35.07	31.89	40.33	54.00	13.67	Average
4	7250.000	36.00	10.74	35.50	31.03	42.27	54.00	11.73	Average
5	7580.980	36.26	11.07	35.64	31.30	42.99	54.00	11.01	Average


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp Factor
 2. The emission levels that are 20dB below the official limit are not reported.

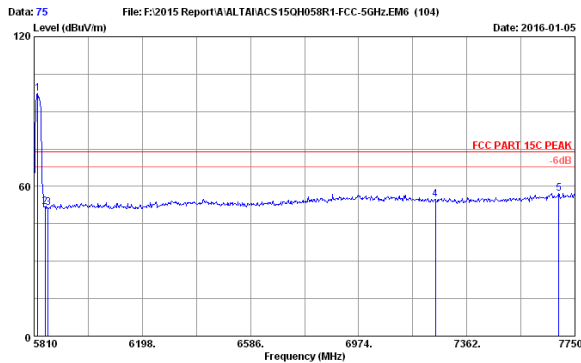

Site no. : 3m Chamber Data no. : 75
 Dis. / Ant. : 3m 2015 MCTD1209 3006 Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : 23°C/54%
 Engineer : Leo-Li
 EUT : Altai A3c Indoor Dual-band 3x3 802.11ac WiFi AP
 Power rating : DC 56V From POE Input AC 120V/60Hz
 Test Mode : IEEE802.11ac VHT20 5825MHz Tx
 WA3311NAC-C

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	AMP factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5823.580	33.52	9.93	35.08	86.95	97.32	74.00	-23.32	Peak
2	5850.000	33.55	9.95	35.07	43.40	51.83	74.00	22.17	Peak
3	5860.000	33.56	9.95	35.07	42.91	51.35	74.00	22.65	Peak
4	7250.000	36.00	10.74	35.50	43.54	54.78	74.00	19.22	Peak
5	7691.800	36.45	11.16	35.68	45.33	57.26	74.00	16.74	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp Factor
 2. The emission levels that are 20dB below the official limit are not reported.

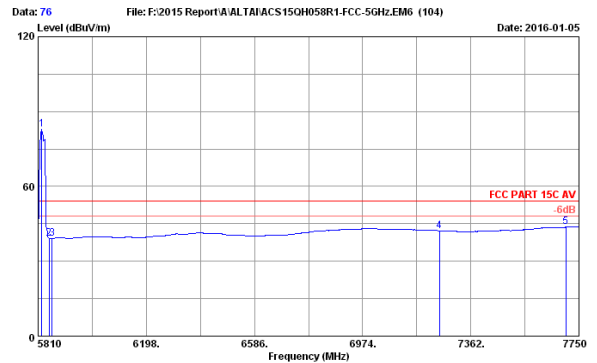

Site no. : 3m Chamber Data no. : 76
 Dis. / Ant. : 3m 2015 MCTD1209 3006 Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C AV
 Env. / Ins. : 23°C/54%
 Engineer : Leo-Li
 EUT : Altai A3c Indoor Dual-band 3x3 802.11ac WiFi AP
 Power rating : DC 56V From POE Input AC 120V/60Hz
 Test Mode : IEEE802.11ac VHT20 5825MHz Tx
 WA3311NAC-C

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	AMP factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5823.580	33.52	9.93	35.08	74.40	82.77	54.00	-28.77	Average
2	5850.000	33.55	9.95	35.07	30.66	39.09	54.00	14.91	Average
3	5860.000	33.56	9.95	35.07	30.68	39.12	54.00	14.88	Average
4	7250.000	36.00	10.74	35.50	31.01	42.25	54.00	11.75	Average
5	7703.440	36.47	11.18	35.68	31.66	43.63	54.00	10.37	Average


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp Factor
 2. The emission levels that are 20dB below the official limit are not reported.

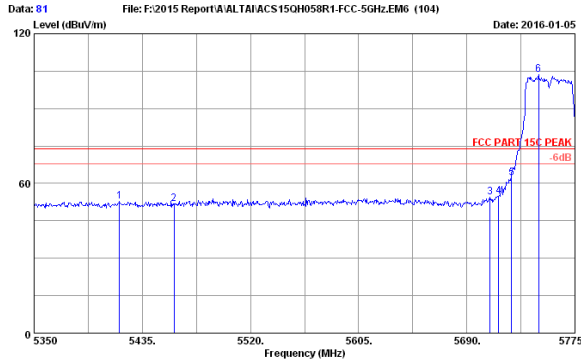

Data: 81 File: F:\2015 Report\A\ALTAIACS15QH058R1-FCC-5GHz.EM6 (104) Date: 2016-01-05
 Site no. : 3m Chamber Data no. : 81
 Dis. / Ant. : 3m 2015 MCTD1209 3006 Ant. pol. : VERTICAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : 23°C/54%
 Engineer : Leo-Li
 EUT : Altai A3c Indoor Dual-band 3x3 802.11ac WiFi AP
 Power rating : DC 56V From POE Input AC 120V/60Hz
 Test Mode : IEEE802.11ac VHT40 5755MHz Tx
 WA3311NAC-C

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	AMP factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5417.150	33.33	9.74	35.26	44.93	52.74	74.00	21.26	Peak
2	5460.000	33.26	9.76	35.25	43.89	51.66	74.00	22.34	Peak
3	5708.275	33.41	9.88	35.14	46.44	54.59	74.00	19.41	Peak
4	5715.000	33.42	9.88	35.12	46.58	54.76	74.00	19.24	Peak
5	5725.000	33.42	9.89	35.12	54.11	62.30	74.00	11.70	Peak
6	5746.525	33.45	9.90	35.11	95.22	103.46	74.00	-29.46	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp Factor
 2. The emission levels that are 20dB below the official limit are not reported.

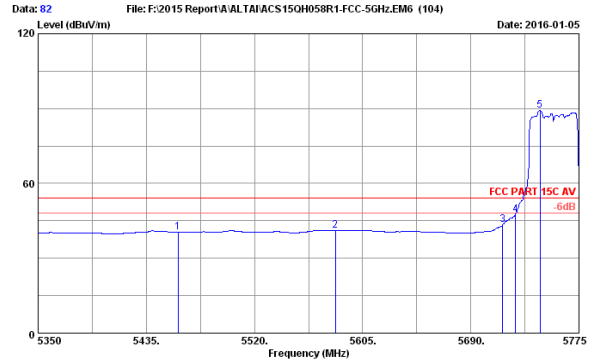

Data: 82 File: F:\2015 Report\A\ALTAIACS15QH058R1-FCC-5GHz.EM6 (104) Date: 2016-01-05
 Site no. : 3m Chamber Data no. : 82
 Dis. / Ant. : 3m 2015 MCTD1209 3006 Ant. pol. : VERTICAL
 Limit : FCC PART 15C AV
 Env. / Ins. : 23°C/54%
 Engineer : Leo-Li
 EUT : Altai A3c Indoor Dual-band 3x3 802.11ac WiFi AP
 Power rating : DC 56V From POE Input AC 120V/60Hz
 Test Mode : IEEE802.11ac VHT40 5755MHz Tx
 WA3311NAC-C

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	AMP factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5460.000	33.26	9.76	35.25	32.70	40.47	54.00	13.53	Average
2	5583.750	33.28	9.82	35.19	33.30	41.21	54.00	12.79	Average
3	5715.000	33.42	9.88	35.12	35.24	43.42	54.00	10.58	Average
4	5725.000	33.42	9.89	35.12	39.17	47.36	54.00	6.64	Average
5	5744.400	33.44	9.90	35.11	81.05	89.28	54.00	-35.28	Average


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp Factor
 2. The emission levels that are 20dB below the official limit are not reported.

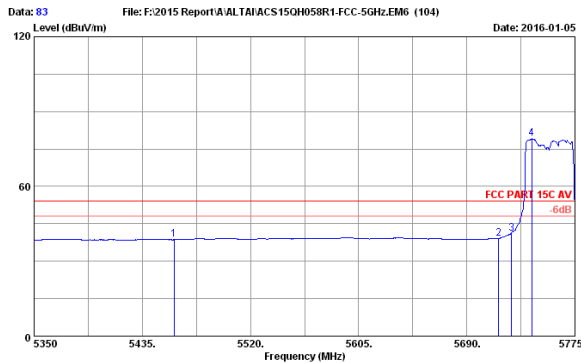

Data: 83 File: F:\2015 Report\A\ALTAIACS15QH058R1-FCC-5GHz.EM6 (104) Date: 2016-01-05
 Site no. : 3m Chamber Data no. : 83
 Dis. / Ant. : 3m 2015 MCTD1209 3006 Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C AV
 Env. / Ins. : 23°C/54%
 Engineer : Leo-Li
 EUT : Altai A3c Indoor Dual-band 3x3 802.11ac WiFi AP
 Power rating : DC 56V From POE Input AC 120V/60Hz
 Test Mode : IEEE802.11ac VHT40 5755MHz Tx
 WA3311NAC-C

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	AMP factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5460.000	33.26	9.76	35.25	30.85	38.62	54.00	15.38	Average
2	5715.000	33.42	9.88	35.12	31.00	39.18	54.00	14.82	Average
3	5725.000	33.42	9.89	35.12	33.03	41.22	54.00	12.78	Average
4	5741.000	33.44	9.90	35.11	70.83	79.06	54.00	-25.06	Average


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp Factor
 2. The emission levels that are 20dB below the official limit are not reported.

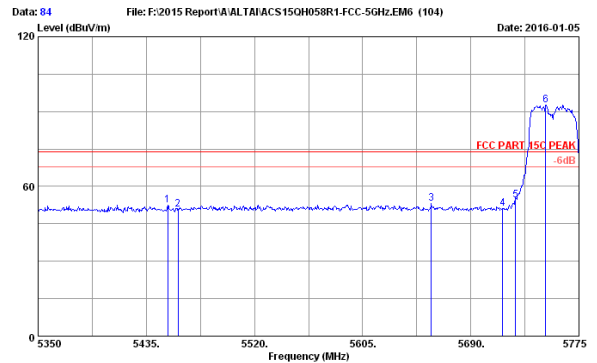

Data: 84 File: F:\2015 Report\A\ALTAIACS15QH058R1-FCC-5GHz.EM6 (104) Date: 2016-01-05
 Site no. : 3m Chamber Data no. : 84
 Dis. / Ant. : 3m 2015 MCTD1209 3006 Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : 23°C/54%
 Engineer : Leo-Li
 EUT : Altai A3c Indoor Dual-band 3x3 802.11ac WiFi AP
 Power rating : DC 56V From POE Input AC 120V/60Hz
 Test Mode : IEEE802.11ac VHT40 5755MHz Tx
 WA3311NAC-C

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	AMP factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5452.000	33.28	9.76	35.25	44.81	52.60	74.00	21.40	Peak
2	5460.000	33.26	9.76	35.25	43.03	50.80	74.00	23.20	Peak
3	5658.975	33.36	9.85	35.16	45.14	53.19	74.00	20.81	Peak
4	5715.000	33.42	9.88	35.12	42.88	51.06	74.00	22.94	Peak
5	5725.000	33.42	9.89	35.12	46.46	54.65	74.00	19.35	Peak
6	5748.650	33.45	9.90	35.11	84.44	92.68	74.00	-18.68	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp Factor
 2. The emission levels that are 20dB below the official limit are not reported.

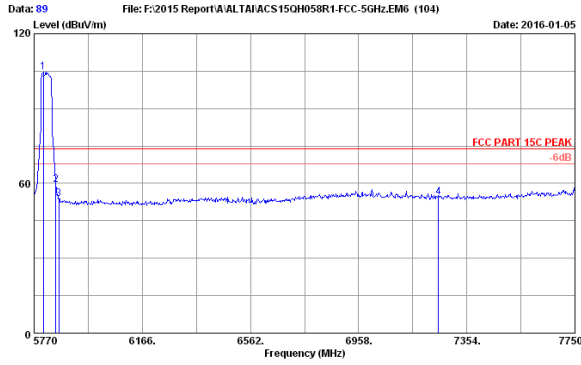

Data: 89 File: F:\2015 Report\A\ALTAIACS15QH058R1-FCC-5GHz.EM6 (104) Date: 2016-01-05
 Site no. : 3m Chamber Data no. : 89
 Dis. / Ant. : 3m 2015 MCTD1209 3006 Ant. pol. : VERTICAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : 23°C/54%
 Engineer : Leo-Li
 EUT : Altai A3c Indoor Dual-band 3x3 802.11ac WiFi AP
 Power rating : DC 56V From POE Input AC 120V/60Hz
 Test Mode : IEEE802.11ac VHT40 5795MHz Tx
 WA3311NAC-C

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	AMP factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5803.660	33.50	9.92	35.09	96.35	104.68	74.00	-30.68	Peak
2	5850.000	33.55	9.95	35.07	51.10	59.53	74.00	14.47	Peak
3	5860.000	33.56	9.95	35.07	45.29	53.73	74.00	20.27	Peak
4	7250.000	36.00	10.74	35.50	43.11	54.35	74.00	19.65	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp Factor
 2. The emission levels that are 20dB below the official limit are not reported.

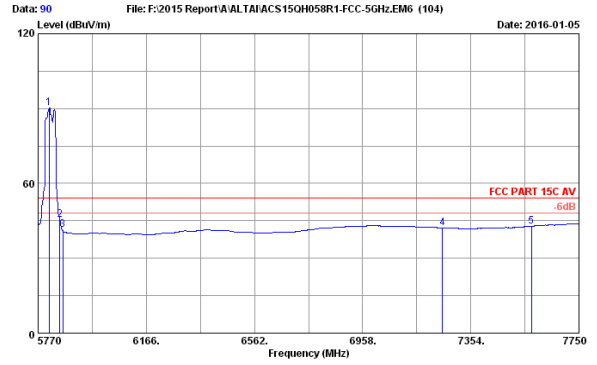

Data: 90 File: F:\2015 Report\A\ALTAIACS15QH058R1-FCC-5GHz.EM6 (104) Date: 2016-01-05
 Site no. : 3m Chamber Data no. : 90
 Dis. / Ant. : 3m 2015 MCTD1209 3006 Ant. pol. : VERTICAL
 Limit : FCC PART 15C AV
 Env. / Ins. : 23°C/54%
 Engineer : Leo-Li
 EUT : Altai A3c Indoor Dual-band 3x3 802.11ac WiFi AP
 Power rating : DC 56V From POE Input AC 120V/60Hz
 Test Mode : IEEE802.11ac VHT40 5795MHz Tx
 WA3311NAC-C

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	AMP factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5809.600	33.51	9.93	35.09	81.91	90.26	54.00	-36.26	Average
2	5850.000	33.55	9.95	35.07	37.15	45.58	54.00	8.42	Average
3	5860.000	33.56	9.95	35.07	32.92	41.36	54.00	12.64	Average
4	7250.000	36.00	10.74	35.50	31.00	42.24	54.00	11.76	Average
5	7575.760	36.24	11.06	35.63	31.07	42.74	54.00	11.26	Average


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp Factor
 2. The emission levels that are 20dB below the official limit are not reported.

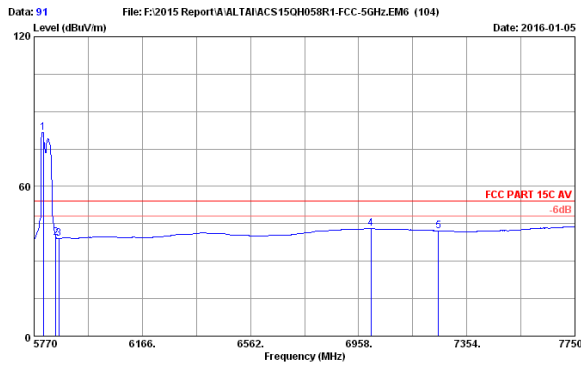

Data: 91 File: F:\2015 Report\A\ALTAIACS15QH058R1-FCC-5GHz.EM6 (104) Date: 2016-01-05
 Site no. : 3m Chamber Data no. : 91
 Dis. / Ant. : 3m 2015 MCTD1209 3006 Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C AV
 Env. / Ins. : 23°C/54%
 Engineer : Leo-Li
 EUT : Altai A3c Indoor Dual-band 3x3 802.11ac WiFi AP
 Power rating : DC 56V From POE Input AC 120V/60Hz
 Test Mode : IEEE802.11ac VHT40 5795MHz Tx
 WA3311NAC-C

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	AMP factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5803.660	33.50	9.92	35.09	73.30	81.63	54.00	-27.63	Average
2	5850.000	33.55	9.95	35.07	30.95	39.38	54.00	14.62	Average
3	5860.000	33.56	9.95	35.07	30.67	39.11	54.00	14.89	Average
4	7000.540	35.90	10.49	35.40	32.07	43.06	54.00	10.94	Average
5	7250.000	36.00	10.74	35.50	30.99	42.23	54.00	11.77	Average


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp Factor
 2. The emission levels that are 20dB below the official limit are not reported.

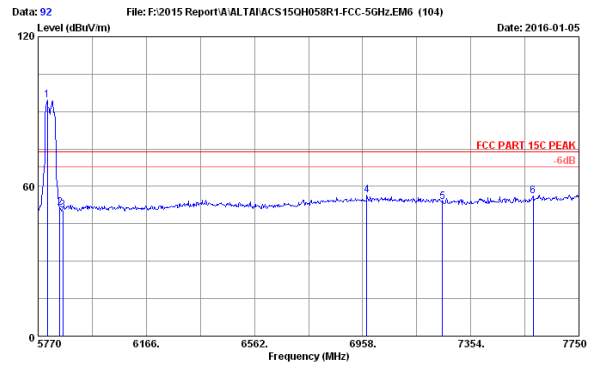

Data: 92 File: F:\2015 Report\A\ALTAIACS15QH058R1-FCC-5GHz.EM6 (104) Date: 2016-01-05
 Site no. : 3m Chamber Data no. : 92
 Dis. / Ant. : 3m 2015 MCTD1209 3006 Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : 23°C/54%
 Engineer : Leo-Li
 EUT : Altai A3c Indoor Dual-band 3x3 802.11ac WiFi AP
 Power rating : DC 56V From POE Input AC 120V/60Hz
 Test Mode : IEEE802.11ac VHT40 5795MHz Tx
 WA3311NAC-C

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	AMP factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5803.660	33.50	9.92	35.09	86.18	94.51	74.00	-20.51	Peak
2	5850.000	33.55	9.95	35.07	42.92	51.35	74.00	22.65	Peak
3	5860.000	33.56	9.95	35.07	42.17	50.61	74.00	23.39	Peak
4	6973.640	35.90	10.47	35.39	45.55	56.48	74.00	17.52	Peak
5	7250.000	36.00	10.74	35.50	42.60	53.84	74.00	20.16	Peak
6	7581.700	36.25	11.06	35.63	44.36	56.04	74.00	17.96	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp Factor
 2. The emission levels that are 20dB below the official limit are not reported.

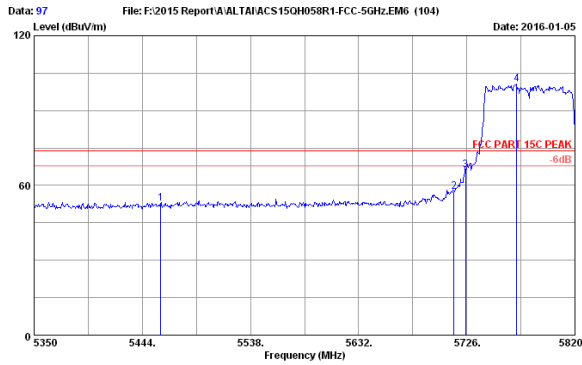

Site no. : 3m Chamber Data no. : 97
 Dis. / Ant. : 3m 2015 MCTD1209 3006 Ant. pol. : VERTICAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : 23°C/54%
 Engineer : Leo-Li
 EUT : Altai A3c Indoor Dual-band 3x3 802.11ac WiFi AP
 Power rating : DC 56V From POE Input AC 120V/60Hz
 Test Mode : IEEE802.11ac VHT80 5775MHz Tx
 WA3311NAC-C

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	AMP factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5460.000	33.26	9.76	35.25	45.16	52.93	74.00	21.07	Peak
2	5715.000	33.42	9.88	35.12	49.44	57.62	74.00	16.38	Peak
3	5725.000	33.42	9.89	35.12	57.85	66.04	74.00	7.96	Peak
4	5765.240	33.47	9.91	35.10	92.30	100.58	74.00	-26.58	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp Factor
 2. The emission levels that are 20dB below the official limit are not reported.

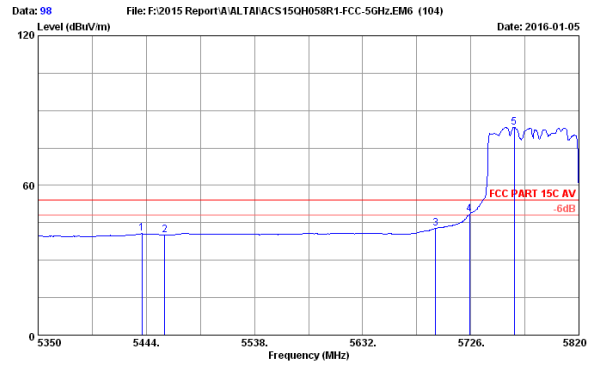

Site no. : 3m Chamber Data no. : 98
 Dis. / Ant. : 3m 2015 MCTD1209 3006 Ant. pol. : VERTICAL
 Limit : FCC PART 15C AV
 Env. / Ins. : 23°C/54%
 Engineer : Leo-Li
 EUT : Altai A3c Indoor Dual-band 3x3 802.11ac WiFi AP
 Power rating : DC 56V From POE Input AC 120V/60Hz
 Test Mode : IEEE802.11ac VHT80 5775MHz Tx
 WA3311NAC-C

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	AMP factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5440.240	33.30	9.75	35.25	32.92	40.72	54.00	13.28	Average
2	5460.000	33.26	9.76	35.25	32.44	40.21	54.00	13.79	Average
3	5695.450	33.40	9.87	35.14	34.70	42.83	54.00	11.17	Average
4	5725.000	33.42	9.89	35.12	40.35	48.54	54.00	5.46	Average
5	5763.600	33.46	9.91	35.10	75.11	83.38	54.00	-29.38	Average


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp Factor
 2. The emission levels that are 20dB below the official limit are not reported.

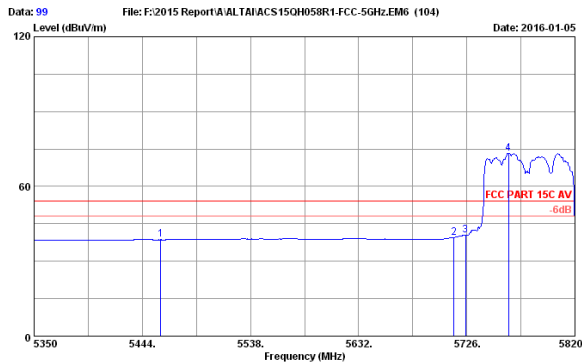

Site no. : 3m Chamber Data no. : 99
 Dis. / Ant. : 3m 2015 MCTD1209 3006 Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C AV
 Env. / Ins. : 23°C/54%
 Engineer : Leo-Li
 EUT : Altai A3c Indoor Dual-band 3x3 802.11ac WiFi AP
 Power rating : DC 56V From POE Input AC 120V/60Hz
 Test Mode : IEEE802.11ac VHT80 5775MHz Tx
 WA3311NAC-C

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	AMP factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5460.000	33.26	9.76	35.25	30.85	38.62	54.00	15.38	Average
2	5715.000	33.42	9.88	35.12	31.30	39.48	54.00	14.52	Average
3	5725.000	33.42	9.89	35.12	32.22	40.41	54.00	13.59	Average
4	5762.190	33.46	9.91	35.11	65.08	73.34	54.00	-19.34	Average


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp Factor
 2. The emission levels that are 20dB below the official limit are not reported.

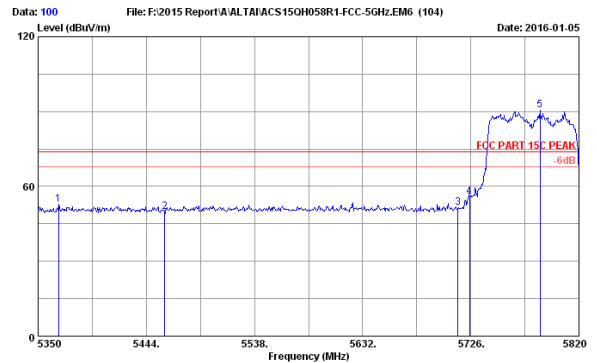

Site no. : 3m Chamber Data no. : 100
 Dis. / Ant. : 3m 2015 MCTD1209 3006 Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : 23°C/54%
 Engineer : Leo-Li
 EUT : Altai A3c Indoor Dual-band 3x3 802.11ac WiFi AP
 Power rating : DC 56V From POE Input AC 120V/60Hz
 Test Mode : IEEE802.11ac VHT80 5775MHz Tx
 WA3311NAC-C

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	AMP factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5367.860	33.41	9.72	35.28	45.04	52.89	74.00	21.11	Peak
2	5460.000	33.26	9.76	35.25	41.98	49.75	74.00	24.25	Peak
3	5715.000	33.42	9.88	35.12	43.29	51.47	74.00	22.53	Peak
4	5725.000	33.42	9.89	35.12	47.52	55.71	74.00	18.29	Peak
5	5761.600	33.49	9.91	35.10	82.15	90.45	74.00	-16.45	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp Factor
 2. The emission levels that are 20dB below the official limit are not reported.

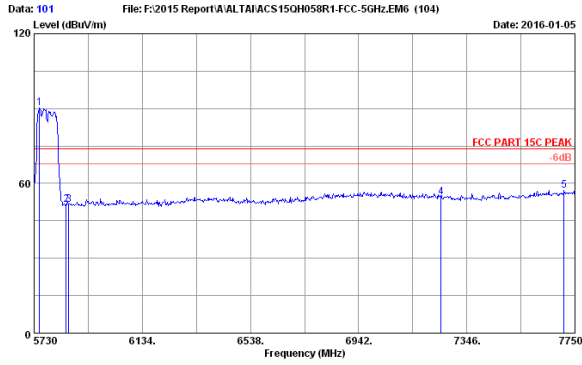


Data: 101 File: F:\2015 Report\A\ALTAI\ACS150H058R1-FCC-5GHz.EM6 (104) Date: 2016-01-05

Site no. : 3m Chamber Data no. : 101
 Dis. / Ant. : 3m 2015 MCTD1209 3006 Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : 23°C/54%
 Engineer : Leo-Li
 EUT : Altai A3c Indoor Dual-band 3x3 802.11ac WiFi AP
 Power rating : DC 56V From POE Input AC 120V/60Hz
 Test Mode : IEEE802.11ac VHT80 5775MHz Tx
 WA3311NAC-C

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	AMP factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5750.200	33.45	9.90	35.11	82.05	90.29	74.00	-16.29	Peak
2	5850.000	33.55	9.95	35.07	42.91	51.34	74.00	22.66	Peak
3	5860.000	33.56	9.95	35.07	43.12	51.56	74.00	22.44	Peak
4	7250.000	36.00	10.74	35.50	43.39	54.63	74.00	19.37	Peak
5	7709.600	36.48	11.18	35.68	45.30	57.28	74.00	16.72	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp Factor
 2. The emission levels that are 20dB below the official limit are not reported.

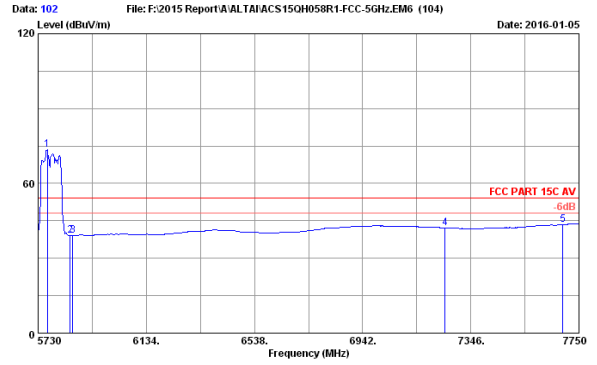


Data: 102 File: F:\2015 Report\A\ALTAI\ACS150H058R1-FCC-5GHz.EM6 (104) Date: 2016-01-05

Site no. : 3m Chamber Data no. : 102
 Dis. / Ant. : 3m 2015 MCTD1209 3006 Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C AV
 Env. / Ins. : 23°C/54%
 Engineer : Leo-Li
 EUT : Altai A3c Indoor Dual-band 3x3 802.11ac WiFi AP
 Power rating : DC 56V From POE Input AC 120V/60Hz
 Test Mode : IEEE802.11ac VHT80 5775MHz Tx
 WA3311NAC-C

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	AMP factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5764.340	33.46	9.91	35.10	65.38	79.65	54.00	-19.65	Average
2	5850.000	33.55	9.95	35.07	30.59	39.02	54.00	14.98	Average
3	5860.000	33.56	9.95	35.07	30.61	39.05	54.00	14.95	Average
4	7250.000	36.00	10.74	35.50	30.97	42.21	54.00	11.79	Average
5	7689.400	36.44	11.16	35.68	31.56	43.48	54.00	10.52	Average

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp Factor
 2. The emission levels that are 20dB below the official limit are not reported.

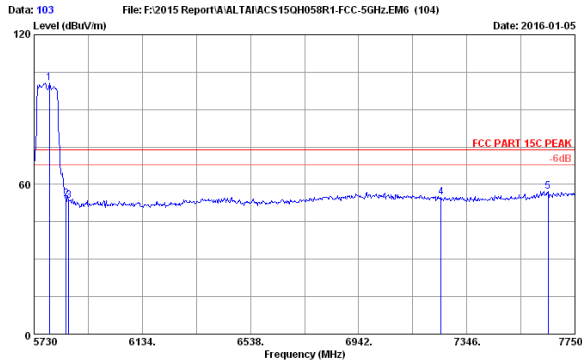


Data: 103 File: F:\2015 Report\A\ALTAI\ACS150H058R1-FCC-5GHz.EM6 (104) Date: 2016-01-05

Site no. : 3m Chamber Data no. : 103
 Dis. / Ant. : 3m 2015 MCTD1209 3006 Ant. pol. : VERTICAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : 23°C/54%
 Engineer : Leo-Li
 EUT : Altai A3c Indoor Dual-band 3x3 802.11ac WiFi AP
 Power rating : DC 56V From POE Input AC 120V/60Hz
 Test Mode : IEEE802.11ac VHT80 5775MHz Tx
 WA3311NAC-C

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	AMP factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5786.560	33.49	9.91	35.10	92.39	100.69	74.00	-26.69	Peak
2	5850.000	33.55	9.95	35.07	45.56	53.99	74.00	20.01	Peak
3	5860.000	33.56	9.95	35.07	45.16	53.60	74.00	20.40	Peak
4	7250.000	36.00	10.74	35.50	43.52	54.76	74.00	19.24	Peak
5	7649.000	36.37	11.13	35.66	45.48	57.32	74.00	16.68	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp Factor
 2. The emission levels that are 20dB below the official limit are not reported.

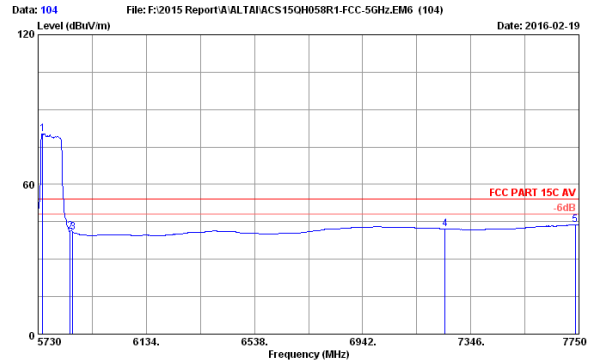

Data: 104 File: F:\2015 Report\A\ALTAI\ACS150H058R1-FCC-5GHz.EM6 (104) Date: 2016-02-19

Site no. : 3m Chamber Data no. : 104
 Dis. / Ant. : 3m 2015 MCTD1209 3006 Ant. pol. : VERTICAL
 Limit : FCC PART 15C AV
 Env. / Ins. : 23°C/54%
 Engineer : Leo-Li
 EUT : Altai A3c Indoor Dual-band 3x3 802.11ac WiFi AP
 Power rating : DC 56V From POE Input AC 120V/60Hz
 Test Mode : IEEE802.11ac VHT80 5775MHz Tx
 WA3311NAC-C

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	AMP factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	5746.160	33.45	9.90	35.11	72.09	80.33	54.00	-26.33	Average
2	5850.000	33.55	9.95	35.07	32.77	41.20	54.00	12.80	Average
3	5860.000	33.56	9.95	35.07	32.40	40.84	54.00	13.16	Average
4	7250.000	36.00	10.74	35.50	30.96	42.20	54.00	11.80	Average
5	7735.860	36.52	11.22	35.69	31.64	43.69	54.00	10.31	Average

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp Factor
 2. The emission levels that are 20dB below the official limit are not reported.

6. 6dB&26dB Bandwidth Test

6.1. Test Equipment

Item	Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Cal. Interval
1.	Spectrum	Agilent	E4446A	US44300459	Apr.28,15	1 Year
2.	Spectrum	Agilent	N9030A	MY51380221	Oct.18,15	1Year
3.	Attenuator (20dB)	Agilent	8491B	MY39262165	Apr.28,15	1 Year
4.	RF Cable	Marvelous Microwave Inc	SFL402105FLEX	NO.1	Oct.17.15	1 Year

6.2. Limit

6dB Bandwidth should be not less than 500kHz

6.3. Test Procedure

6dB Bandwidth:

The transmitter output was connected to a spectrum analyzer, The bandwidth of the fundamental frequency was measured by spectrum analyzer with 100kHz RBW and 300 KHz VBW for signal width below 20MHz and 300KHz RBW ,1MHz VBW for Above 20MHz signal Bandwidth.

26dB Bandwidth:

The transmitter output was connected to a spectrum analyzer, The bandwidth of the fundamental frequency was measured by spectrum analyzer with 100kHz RBW and 300 KHz VBW The 26dB bandwidth is defined as the total spectrum the power of which is higher than peak power minus 26dB.

6.4. Test Results

6dB bandwidth

EUT: Altai A3c Indoor Dual-band 3X3 802.11ac WiFi AP		
M/N: WA3311NAC-C		
Test date: 2016-01-13	Pressure: 101.3±1.0 kpa	Humidity:53.4±3.0%
Tested by: Leo-Li	Test site: RF site	Temperature:23.5±0.6

Test Mode	Frequency (MHz)	6dB bandwidth (MHz)			Limit (KHz)
		ANT 1	ANT 2	ANT 3	
11a	5745	16.36	16.36	16.38	≥ 500
	5785	16.38	16.36	16.37	≥ 500
	5825	16.40	16.39	16.39	≥ 500
11n HT20	5745	17.61	17.62	17.59	≥ 500
	5785	17.61	17.59	17.60	≥ 500
	5825	17.62	17.61	17.63	≥ 500
11n HT40	5755	35.51	35.77	35.46	≥ 500
	5795	35.96	35.90	35.76	≥ 500
11ac VHT20	5745	17.59	17.64	17.60	≥ 500
	5785	17.34	17.60	17.59	≥ 500
	5825	17.60	17.58	17.60	≥ 500
11ac VHT40	5755	35.78	35.74	35.74	≥ 500
	5795	35.98	35.96	36.00	≥ 500
11ac VHT80	5775	75.72	75.75	75.74	≥ 500

Conclusion : PASS

26dB bandwidth


EUT: Altai A3c Indoor Dual-band 3X3 802.11ac WiFi AP		
M/N: WA3311NAC-C		
Test date: 2016-01-14	Pressure: 101.2±1.0 kpa	Humidity:52.7±3.0%
Tested by: Leo-Li	Test site: RF site	Temperature:22.5±0.6

Test Mode	Frequency (MHz)	26dB bandwidth (MHz)			Limit (KHz)
		ANT 1	ANT 2	ANT 3	
11a	5745	20.10	19.83	19.83	N/A
	5785	19.73	19.64	19.64	N/A
	5825	19.96	19.54	19.54	N/A
11n HT20	5745	21.04	20.70	20.23	N/A
	5785	20.58	20.97	20.94	N/A
	5825	20.34	20.80	21.26	N/A
11n HT40	5755	40.44	40.08	40.00	N/A
	5795	40.15	39.45	39.95	N/A
11ac VHT20	5745	20.72	21.09	20.96	N/A
	5785	20.72	21.05	21.01	N/A
	5825	21.14	20.61	20.50	N/A
11ac VHT40	5755	39.27	39.19	39.14	N/A
	5795	39.93	40.00	39.34	N/A
11ac VHT80	5775	80.79	80.17	80.81	N/A
Conclusion : PASS					


<p>6dB bandwidth</p>	
<p>ANT 1</p>	
<p>11a</p>	<p>11n HT20</p>
<p>5745MHz</p>	<p>5745MHz</p>
<p>Center Freq 5.745 GHz #Res BW 100 kHz #VBW 300 kHz Span 30 MHz Sweep 2.933 ms</p> <p>Occupied Bandwidth 16.436 MHz Total Power 21.6 dBm</p> <p>Transmit Freq Error -27.135 kHz OBW Power 99.00 % x dB Bandwidth 16.36 MHz x dB -6.00 dB</p>	<p>Center Freq 5.745 GHz #Res BW 100 kHz #VBW 300 kHz Span 30 MHz Sweep 2.933 ms</p> <p>Occupied Bandwidth 17.641 MHz Total Power 21.6 dBm</p> <p>Transmit Freq Error -32.690 kHz OBW Power 99.00 % x dB Bandwidth 17.61 MHz x dB -6.00 dB</p>
<p>5785MHz</p>	<p>5785MHz</p>
<p>Center Freq 5.785 GHz #Res BW 100 kHz #VBW 300 kHz Span 30 MHz Sweep 2.933 ms</p> <p>Occupied Bandwidth 16.429 MHz Total Power 22.7 dBm</p> <p>Transmit Freq Error -29.780 kHz OBW Power 99.00 % x dB Bandwidth 16.38 MHz x dB -6.00 dB</p>	<p>Center Freq 5.785 GHz #Res BW 100 kHz #VBW 300 kHz Span 30 MHz Sweep 2.933 ms</p> <p>Occupied Bandwidth 17.653 MHz Total Power 21.8 dBm</p> <p>Transmit Freq Error -28.282 kHz OBW Power 99.00 % x dB Bandwidth 17.61 MHz x dB -6.00 dB</p>
<p>5825MHz</p>	<p>5825MHz</p>
<p>Center Freq 5.825 GHz #Res BW 100 kHz #VBW 300 kHz Span 30 MHz Sweep 2.933 ms</p> <p>Occupied Bandwidth 16.440 MHz Total Power 21.4 dBm</p> <p>Transmit Freq Error -25.471 kHz OBW Power 99.00 % x dB Bandwidth 16.40 MHz x dB -6.00 dB</p>	<p>Center Freq 5.825 GHz #Res BW 100 kHz #VBW 300 kHz Span 30 MHz Sweep 2.933 ms</p> <p>Occupied Bandwidth 17.668 MHz Total Power 21.4 dBm</p> <p>Transmit Freq Error -23.404 kHz OBW Power 99.00 % x dB Bandwidth 17.62 MHz x dB -6.00 dB</p>

<p>11n HT40 5755MHz</p> <p>Center Freq 5.755 GHz #Res BW 100 kHz #VBW 300 kHz Span 60 MHz Sweep 5.8 ms</p> <p>Occupied Bandwidth 36.082 MHz Total Power 21.5 dBm Transmit Freq Error -42.736 kHz OBW Power 99.00 % x dB Bandwidth 35.51 MHz</p>	<p>5785MHz</p> <p>Center Freq 5.785 GHz #Res BW 100 kHz #VBW 300 kHz Span 30 MHz Sweep 2.933 ms</p> <p>Occupied Bandwidth 17.640 MHz Total Power 21.8 dBm Transmit Freq Error -28.555 kHz OBW Power 99.00 % x dB Bandwidth 17.34 MHz</p>
<p>5795MHz</p> <p>Center Freq 5.795 GHz #Res BW 100 kHz #VBW 300 kHz Span 60 MHz Sweep 5.8 ms</p> <p>Occupied Bandwidth 36.091 MHz Total Power 21.9 dBm Transmit Freq Error -53.797 kHz OBW Power 99.00 % x dB Bandwidth 35.96 MHz</p>	<p>5825MHz</p> <p>Center Freq 5.825 GHz #Res BW 100 kHz #VBW 300 kHz Span 30 MHz Sweep 2.933 ms</p> <p>Occupied Bandwidth 17.661 MHz Total Power 21.2 dBm Transmit Freq Error -29.864 kHz OBW Power 99.00 % x dB Bandwidth 17.60 MHz</p>
<p>11ac VHT20 5745MHz</p> <p>Center Freq 5.745 GHz #Res BW 100 kHz #VBW 300 kHz Span 30 MHz Sweep 2.933 ms</p> <p>Occupied Bandwidth 17.649 MHz Total Power 21.4 dBm Transmit Freq Error -28.819 kHz OBW Power 99.00 % x dB Bandwidth 17.59 MHz</p>	<p>11ac VHT40 5755MHz</p> <p>Center Freq 5.755 GHz #Res BW 100 kHz #VBW 300 kHz Span 60 MHz Sweep 5.8 ms</p> <p>Occupied Bandwidth 36.116 MHz Total Power 21.3 dBm Transmit Freq Error -75.992 kHz OBW Power 99.00 % x dB Bandwidth 35.78 MHz</p>

5795MHz

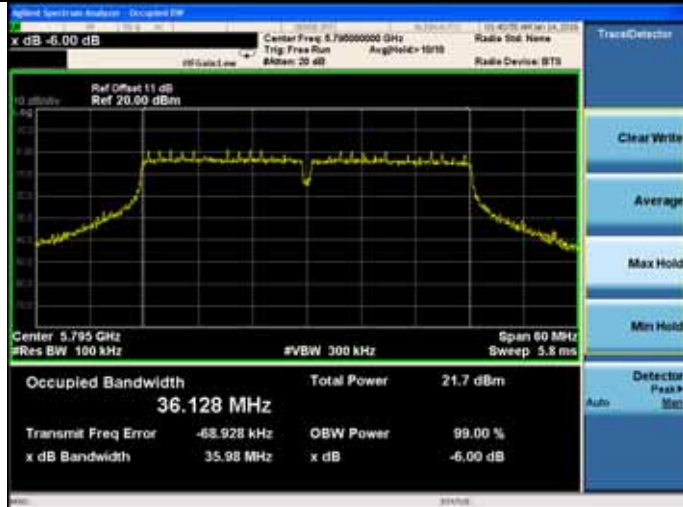


11ac VHT80
5775MHz

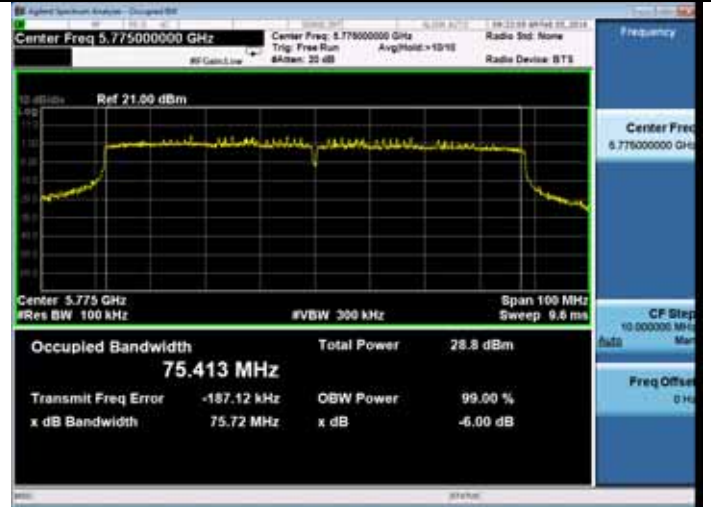

<p>6dB bandwidth</p>	
<p>ANT 2</p>	
<p>11a</p>	<p>11n HT20</p>
<p>5745MHz</p>	<p>5745MHz</p>
<p>Center Freq 5.745000000 GHz #Res BW 100 kHz #VBW 300 kHz Span 30 MHz Sweep 2.933 ms</p> <p>Occupied Bandwidth 16.436 MHz Total Power 21.7 dBm</p> <p>Transmit Freq Error -27.646 kHz OBW Power 99.00 % x dB Bandwidth 16.36 MHz x dB -6.00 dB</p>	<p>Center Freq 5.745000000 GHz #Res BW 100 kHz #VBW 300 kHz Span 30 MHz Sweep 2.933 ms</p> <p>Occupied Bandwidth 17.658 MHz Total Power 21.4 dBm</p> <p>Transmit Freq Error -36.754 kHz OBW Power 99.00 % x dB Bandwidth 17.62 MHz x dB -6.00 dB</p>
<p>5785MHz</p>	<p>5785MHz</p>
<p>Center Freq 5.785000000 GHz #Res BW 100 kHz #VBW 300 kHz Span 30 MHz Sweep 2.933 ms</p> <p>Occupied Bandwidth 16.435 MHz Total Power 21.9 dBm</p> <p>Transmit Freq Error -28.472 kHz OBW Power 99.00 % x dB Bandwidth 16.36 MHz x dB -6.00 dB</p>	<p>Center Freq 5.785000000 GHz #Res BW 100 kHz #VBW 300 kHz Span 30 MHz Sweep 2.933 ms</p> <p>Occupied Bandwidth 17.664 MHz Total Power 21.8 dBm</p> <p>Transmit Freq Error -27.965 kHz OBW Power 99.00 % x dB Bandwidth 17.59 MHz x dB -6.00 dB</p>
<p>5825MHz</p>	<p>5825MHz</p>
<p>Center Freq 5.825000000 GHz #Res BW 100 kHz #VBW 300 kHz Span 30 MHz Sweep 2.933 ms</p> <p>Occupied Bandwidth 16.462 MHz Total Power 21.2 dBm</p> <p>Transmit Freq Error -25.882 kHz OBW Power 99.00 % x dB Bandwidth 16.39 MHz x dB -6.00 dB</p>	<p>Center Freq 5.825000000 GHz #Res BW 100 kHz #VBW 300 kHz Span 30 MHz Sweep 2.933 ms</p> <p>Occupied Bandwidth 17.650 MHz Total Power 21.6 dBm</p> <p>Transmit Freq Error -26.046 kHz OBW Power 99.00 % x dB Bandwidth 17.61 MHz x dB -6.00 dB</p>




5795MHz

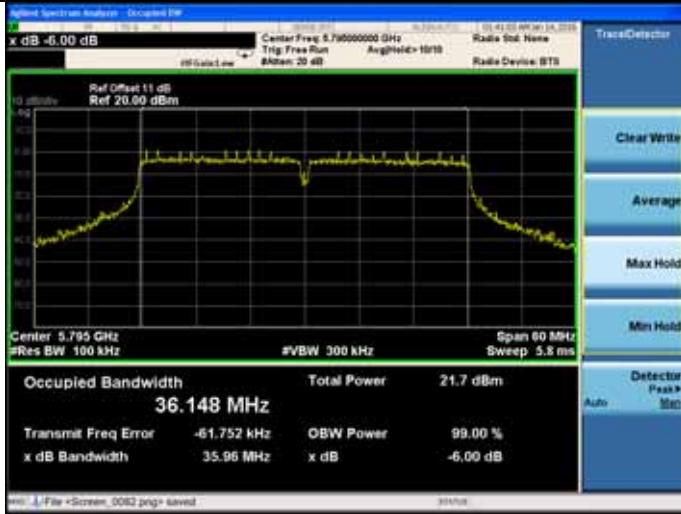

11ac VHT80


5775MHz

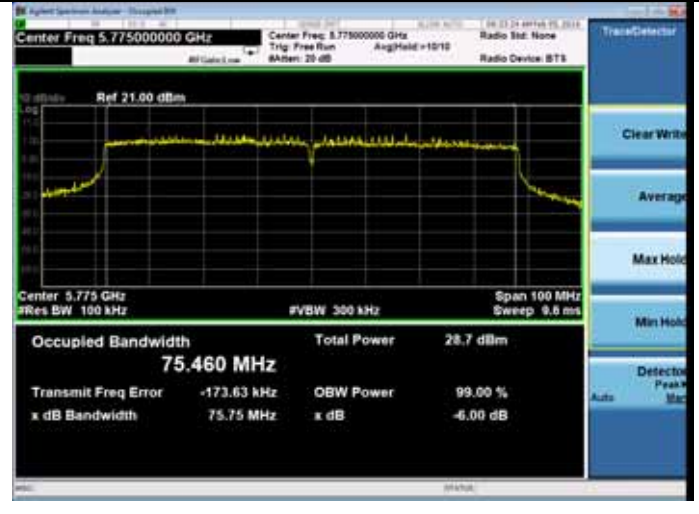

<p>6dB bandwidth</p>	
<p>ANT 3</p>	
<p>11a</p>	<p>11n HT20</p>
<p>5745MHz</p>	<p>5745MHz</p>
<p>Center Freq 5.745000000 GHz #Res BW 100 kHz #VBW 300 kHz Span 30 MHz Sweep 2.933 ms</p> <p>Occupied Bandwidth 16.447 MHz Total Power 22.4 dBm</p> <p>Transmit Freq Error -31.930 kHz OBW Power 99.00 %</p> <p>x dB Bandwidth 16.38 MHz x dB -6.00 dB</p>	<p>Center Freq 5.745000000 GHz #Res BW 100 kHz #VBW 300 kHz Span 30 MHz Sweep 2.933 ms</p> <p>Occupied Bandwidth 17.658 MHz Total Power 21.0 dBm</p> <p>Transmit Freq Error -30.487 kHz OBW Power 99.00 %</p> <p>x dB Bandwidth 17.59 MHz x dB -6.00 dB</p>
<p>5785MHz</p>	<p>5785MHz</p>
<p>Center Freq 5.785000000 GHz #Res BW 100 kHz #VBW 300 kHz Span 30 MHz Sweep 2.933 ms</p> <p>Occupied Bandwidth 16.439 MHz Total Power 22.0 dBm</p> <p>Transmit Freq Error -29.120 kHz OBW Power 99.00 %</p> <p>x dB Bandwidth 16.37 MHz x dB -6.00 dB</p>	<p>Center Freq 5.785000000 GHz #Res BW 100 kHz #VBW 300 kHz Span 30 MHz Sweep 2.933 ms</p> <p>Occupied Bandwidth 17.644 MHz Total Power 22.0 dBm</p> <p>Transmit Freq Error -30.604 kHz OBW Power 99.00 %</p> <p>x dB Bandwidth 17.60 MHz x dB -6.00 dB</p>
<p>5825MHz</p>	<p>5825MHz</p>
<p>Center Freq 5.825000000 GHz #Res BW 100 kHz #VBW 300 kHz Span 30 MHz Sweep 2.933 ms</p> <p>Occupied Bandwidth 16.445 MHz Total Power 21.5 dBm</p> <p>Transmit Freq Error -26.829 kHz OBW Power 99.00 %</p> <p>x dB Bandwidth 16.39 MHz x dB -6.00 dB</p>	<p>Center Freq 5.825000000 GHz #Res BW 100 kHz #VBW 300 kHz Span 30 MHz Sweep 2.933 ms</p> <p>Occupied Bandwidth 17.659 MHz Total Power 21.6 dBm</p> <p>Transmit Freq Error -31.860 kHz OBW Power 99.00 %</p> <p>x dB Bandwidth 17.63 MHz x dB -6.00 dB</p>

<p>11n HT40 5755MHz</p> <p>Center Freq 5.755000000 GHz #Res BW 100 kHz #VBW 300 kHz Span 60 MHz Sweep 5.8 ms</p> <p>Occupied Bandwidth 36.075 MHz Total Power 21.7 dBm Transmit Freq Error -43.802 kHz OBW Power 99.00 % x dB Bandwidth 35.46 MHz x dB -6.00 dB</p>	<p>5785MHz</p> <p>Center Freq 5.785000000 GHz #Res BW 100 kHz #VBW 300 kHz Span 30 MHz Sweep 2.933 ms</p> <p>Occupied Bandwidth 17.631 MHz Total Power 22.0 dBm Transmit Freq Error -22.968 kHz OBW Power 99.00 % x dB Bandwidth 17.59 MHz x dB -6.00 dB</p>
<p>5795MHz</p> <p>Center Freq 5.795000000 GHz #Res BW 100 kHz #VBW 300 kHz Span 60 MHz Sweep 5.8 ms</p> <p>Occupied Bandwidth 36.116 MHz Total Power 21.7 dBm Transmit Freq Error -57.586 kHz OBW Power 99.00 % x dB Bandwidth 35.76 MHz x dB -6.00 dB</p>	<p>5825MHz</p> <p>Center Freq 5.825000000 GHz #Res BW 100 kHz #VBW 300 kHz Span 30 MHz Sweep 2.933 ms</p> <p>Occupied Bandwidth 17.647 MHz Total Power 21.4 dBm Transmit Freq Error -33.199 kHz OBW Power 99.00 % x dB Bandwidth 17.60 MHz x dB -6.00 dB</p>
<p>11ac VHT20 5745MHz</p> <p>Center Freq 5.745000000 GHz #Res BW 100 kHz #VBW 300 kHz Span 30 MHz Sweep 2.933 ms</p> <p>Occupied Bandwidth 17.641 MHz Total Power 21.4 dBm Transmit Freq Error -29.029 kHz OBW Power 99.00 % x dB Bandwidth 17.60 MHz x dB -6.00 dB</p>	<p>11ac VHT40 5755MHz</p> <p>Center Freq 5.755000000 GHz #Res BW 100 kHz #VBW 300 kHz Span 60 MHz Sweep 5.8 ms</p> <p>Occupied Bandwidth 36.092 MHz Total Power 21.5 dBm Transmit Freq Error -81.484 kHz OBW Power 99.00 % x dB Bandwidth 35.74 MHz x dB -6.00 dB</p>

5795MHz

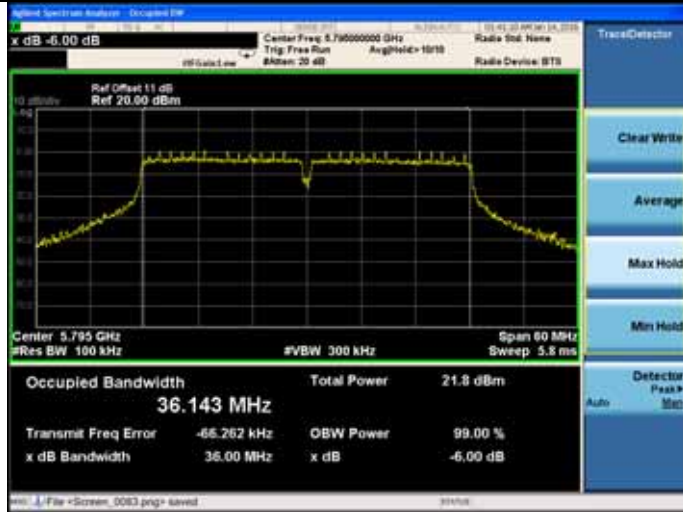

11ac VHT80
5775MHz




26dB bandwidth

ANT 1


11a

5745MHz

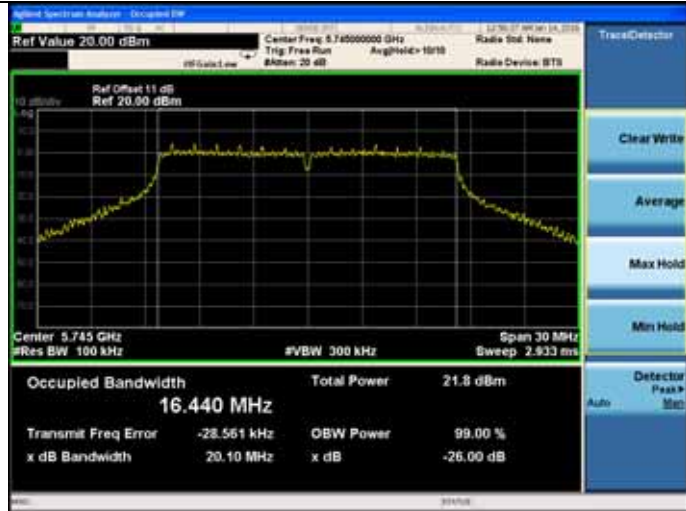

11n HT20

5745MHz

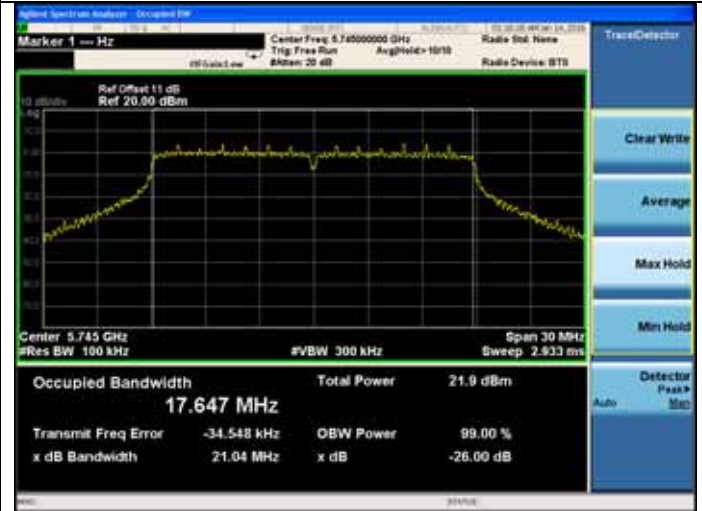


5785MHz




5785MHz









5825MHz

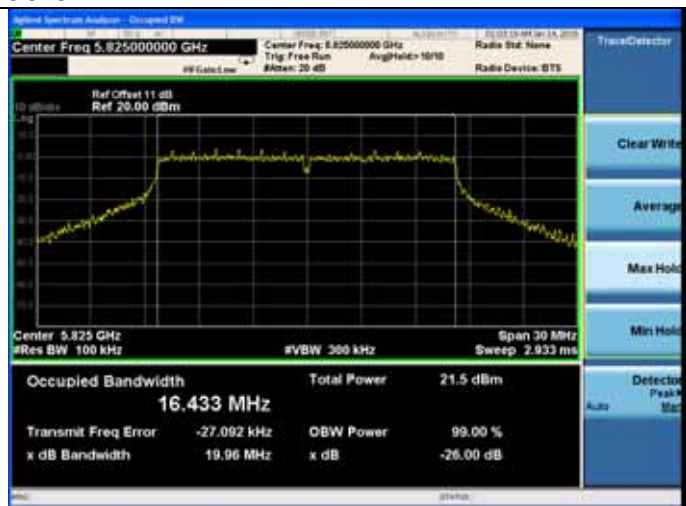


5825MHz

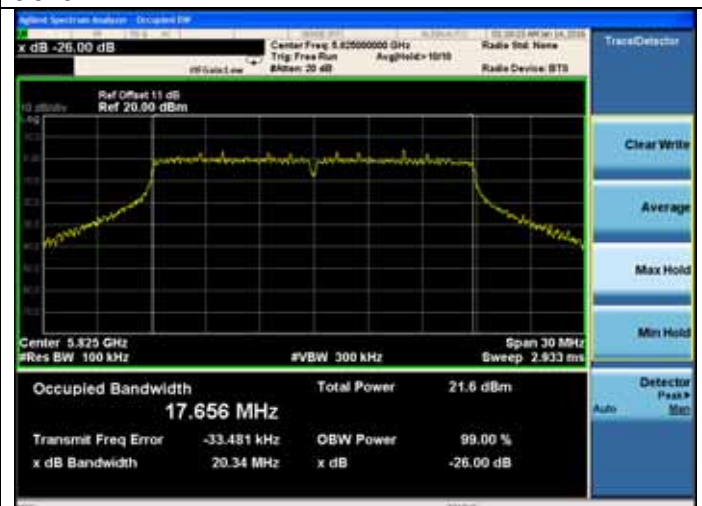


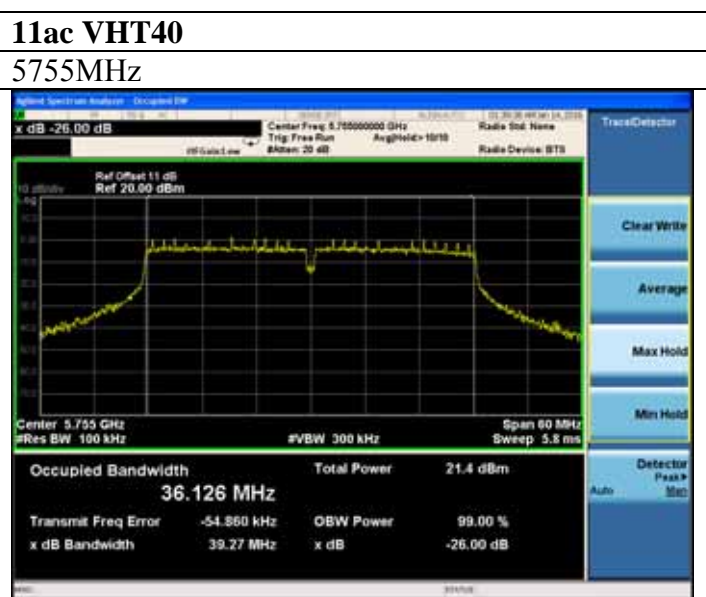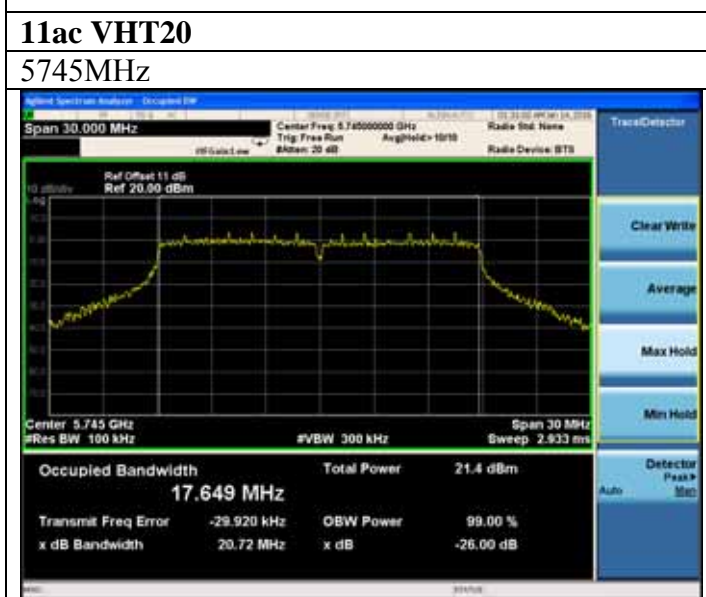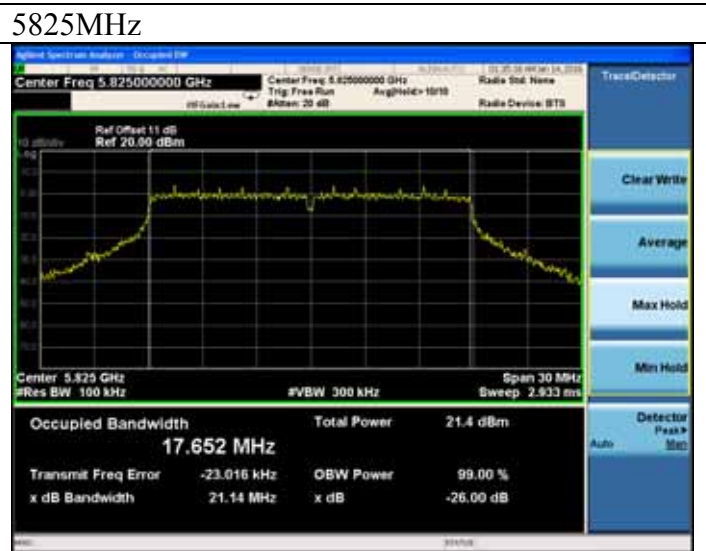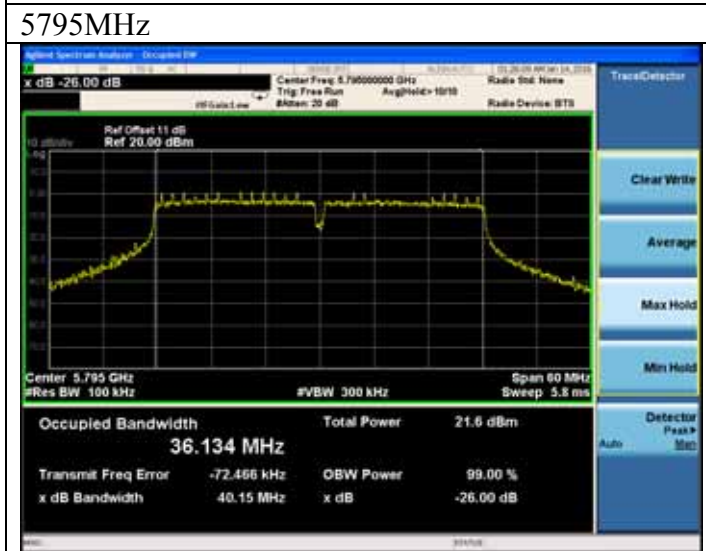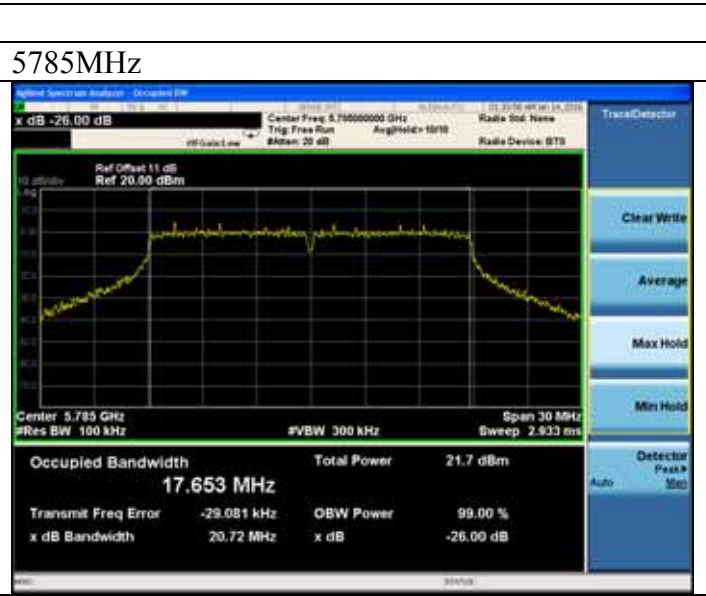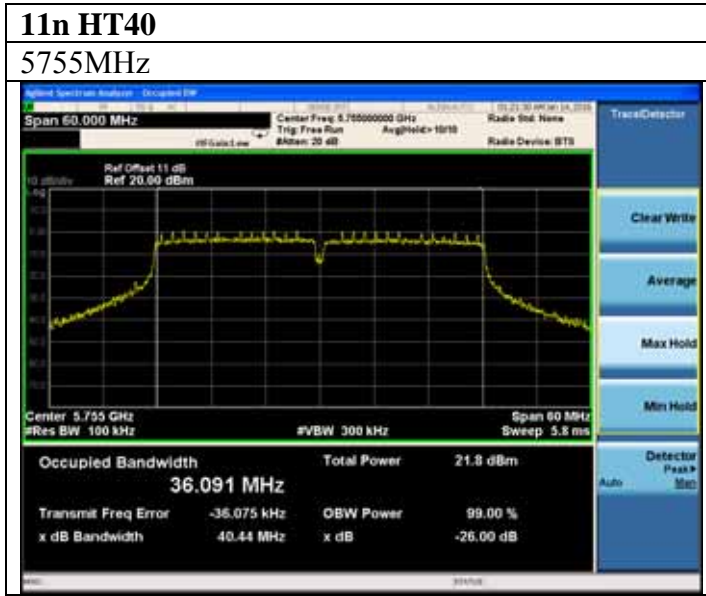

5795MHz

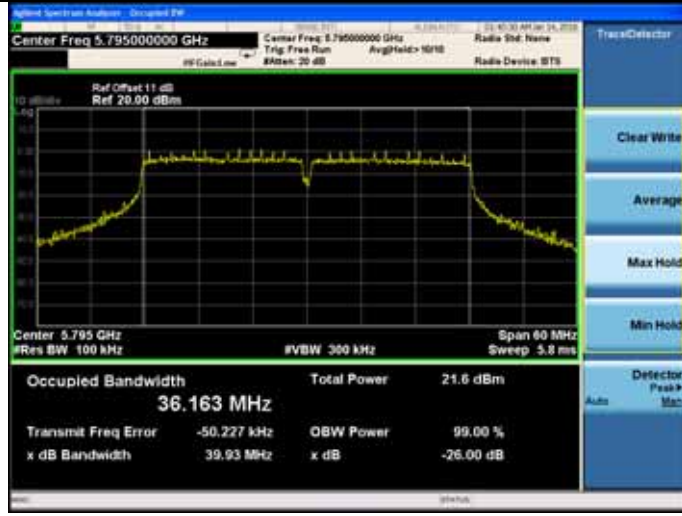

11ac VHT80
5775MHz

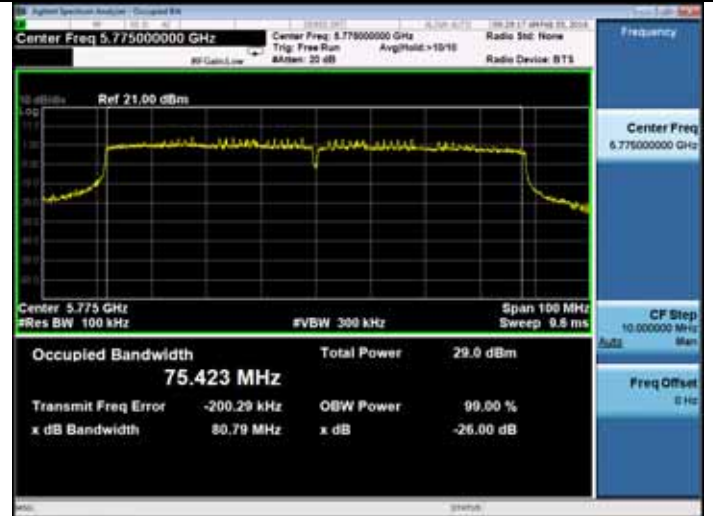

26dB bandwidth

ANT 2

11a

5745MHz




11n HT20

5745MHz



5785MHz

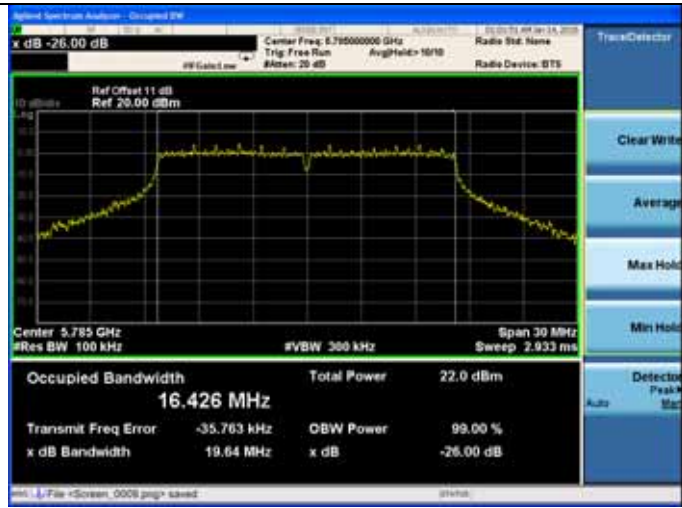


5785MHz




5825MHz



5825MHz

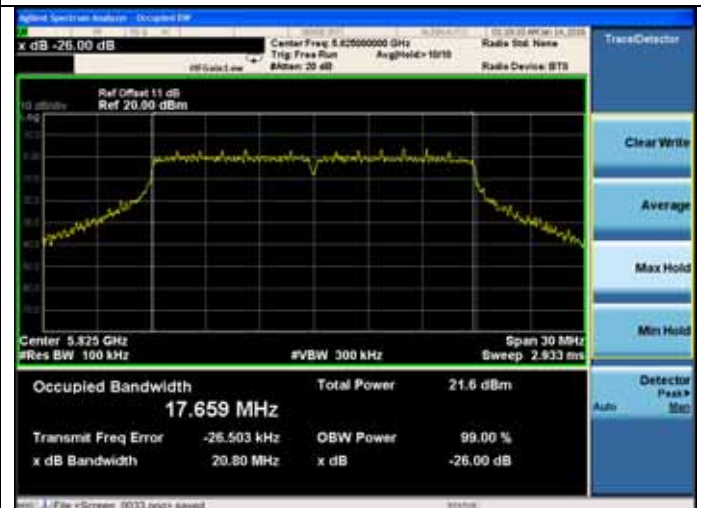

<p>11n HT40 5755MHz</p> <p>Center: 5.755 GHz #Res BW: 100 kHz #VBW: 300 kHz Span: 60 MHz Sweep: 5.8 ms</p> <p>Occupied Bandwidth: 36.122 MHz Total Power: 21.5 dBm Transmit Freq Error: -45.726 kHz OBW Power: 99.00 % x dB Bandwidth: 40.08 MHz x dB: -26.00 dB</p>	<p>5785MHz</p> <p>Center: 5.785 GHz #Res BW: 100 kHz #VBW: 300 kHz Span: 30 MHz Sweep: 2.933 ms</p> <p>Occupied Bandwidth: 17.628 MHz Total Power: 22.0 dBm Transmit Freq Error: -28.705 kHz OBW Power: 99.00 % x dB Bandwidth: 21.05 MHz x dB: -26.00 dB</p>
<p>5795MHz</p> <p>Center: 5.795 GHz #Res BW: 100 kHz #VBW: 300 kHz Span: 60 MHz Sweep: 5.8 ms</p> <p>Occupied Bandwidth: 36.084 MHz Total Power: 21.8 dBm Transmit Freq Error: -78.012 kHz OBW Power: 99.00 % x dB Bandwidth: 39.45 MHz x dB: -26.00 dB</p>	<p>5825MHz</p> <p>Center: 5.825 GHz #Res BW: 100 kHz #VBW: 300 kHz Span: 30 MHz Sweep: 2.933 ms</p> <p>Occupied Bandwidth: 17.640 MHz Total Power: 21.6 dBm Transmit Freq Error: -30.201 kHz OBW Power: 99.00 % x dB Bandwidth: 20.61 MHz x dB: -26.00 dB</p>
<p>11ac VHT20 5745MHz</p> <p>Center: 5.745 GHz #Res BW: 100 kHz #VBW: 300 kHz Span: 30 MHz Sweep: 2.933 ms</p> <p>Occupied Bandwidth: 17.647 MHz Total Power: 21.5 dBm Transmit Freq Error: -33.994 kHz OBW Power: 99.00 % x dB Bandwidth: 21.09 MHz x dB: -26.00 dB</p>	<p>11ac VHT40 5755MHz</p> <p>Center: 5.755 GHz #Res BW: 100 kHz #VBW: 300 kHz Span: 60 MHz Sweep: 5.8 ms</p> <p>Occupied Bandwidth: 36.107 MHz Total Power: 21.5 dBm Transmit Freq Error: -83.225 kHz OBW Power: 99.00 % x dB Bandwidth: 39.19 MHz x dB: -26.00 dB</p>

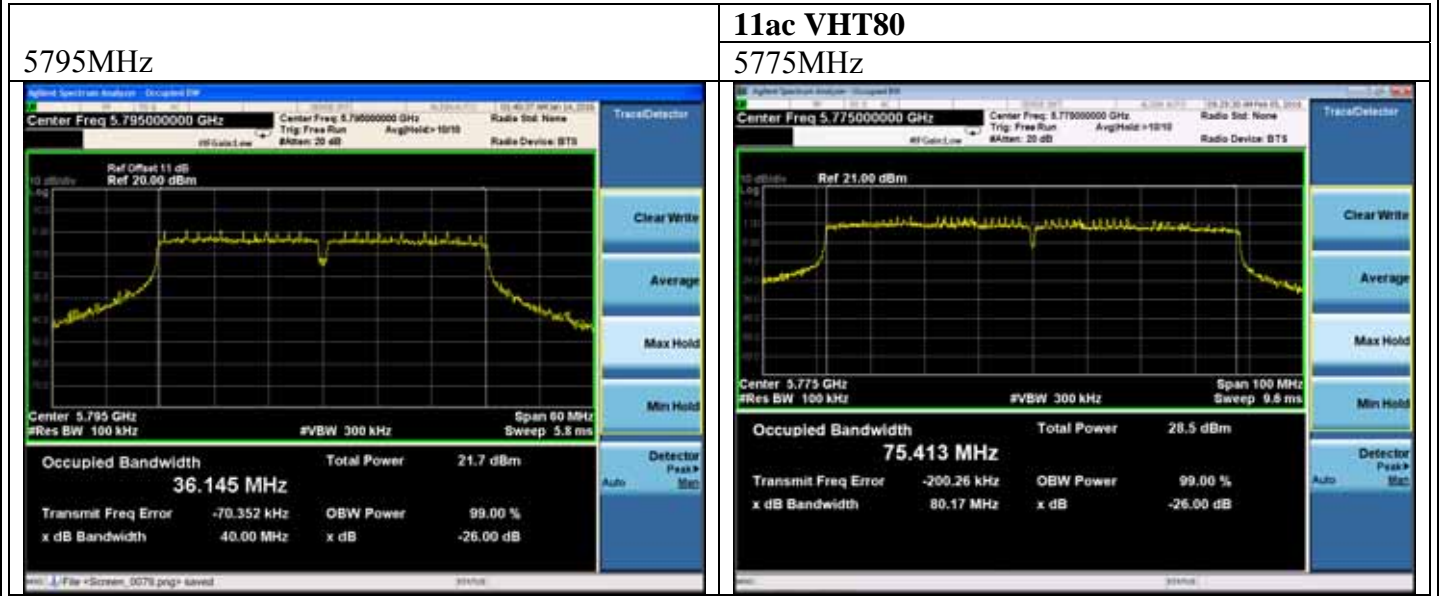


26dB bandwidth

ANT 3


11a

5745MHz

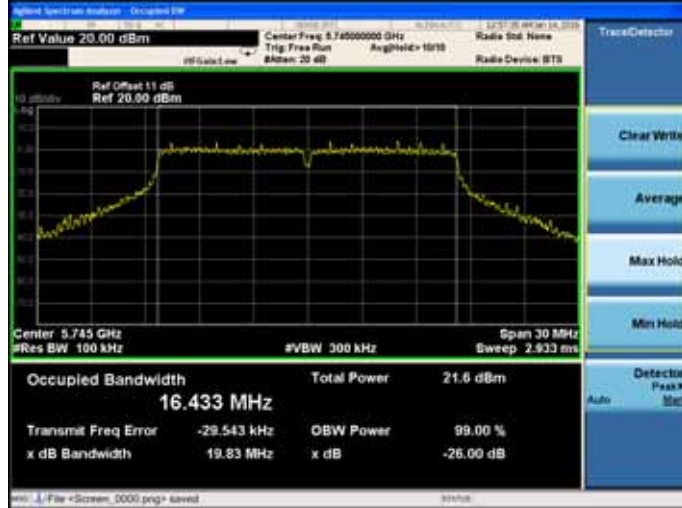


11n HT20

5745MHz

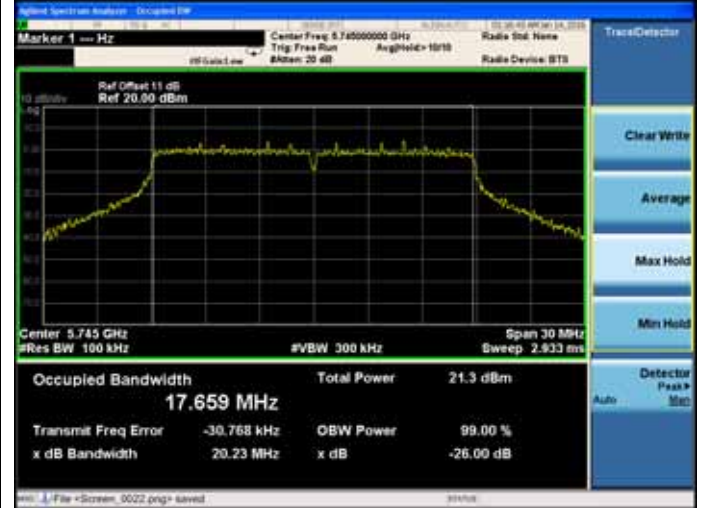

5785MHz

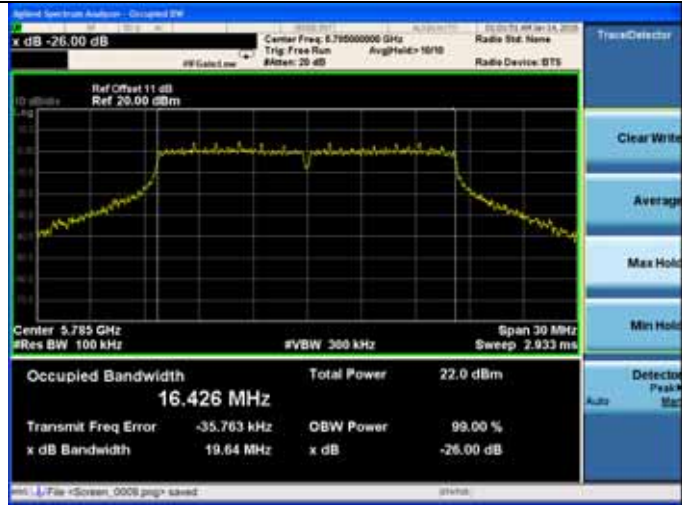

5785MHz



5825MHz




5825MHz



<p>11n HT40 5755MHz</p> <p>Center: 5.755 GHz #Res BW: 100 kHz #VBW: 300 kHz Span: 60 MHz Sweep: 5.8 ms</p> <table border="1"> <tr> <td>Occupied Bandwidth</td> <td>Total Power</td> <td>21.6 dBm</td> </tr> <tr> <td>36.096 MHz</td> <td></td> <td></td> </tr> <tr> <td>Transmit Freq Error</td> <td>OBW Power</td> <td>99.00 %</td> </tr> <tr> <td>-48.120 kHz</td> <td></td> <td></td> </tr> <tr> <td>x dB Bandwidth</td> <td>x dB</td> <td>-26.00 dB</td> </tr> <tr> <td>40.00 MHz</td> <td></td> <td></td> </tr> </table>	Occupied Bandwidth	Total Power	21.6 dBm	36.096 MHz			Transmit Freq Error	OBW Power	99.00 %	-48.120 kHz			x dB Bandwidth	x dB	-26.00 dB	40.00 MHz			<p>5785MHz</p> <p>Center: 5.785 GHz #Res BW: 100 kHz #VBW: 300 kHz Span: 30 MHz Sweep: 2.933 ms</p> <table border="1"> <tr> <td>Occupied Bandwidth</td> <td>Total Power</td> <td>21.8 dBm</td> </tr> <tr> <td>17.632 MHz</td> <td></td> <td></td> </tr> <tr> <td>Transmit Freq Error</td> <td>OBW Power</td> <td>99.00 %</td> </tr> <tr> <td>-28.386 kHz</td> <td></td> <td></td> </tr> <tr> <td>x dB Bandwidth</td> <td>x dB</td> <td>-26.00 dB</td> </tr> <tr> <td>21.01 MHz</td> <td></td> <td></td> </tr> </table>	Occupied Bandwidth	Total Power	21.8 dBm	17.632 MHz			Transmit Freq Error	OBW Power	99.00 %	-28.386 kHz			x dB Bandwidth	x dB	-26.00 dB	21.01 MHz		
Occupied Bandwidth	Total Power	21.6 dBm																																			
36.096 MHz																																					
Transmit Freq Error	OBW Power	99.00 %																																			
-48.120 kHz																																					
x dB Bandwidth	x dB	-26.00 dB																																			
40.00 MHz																																					
Occupied Bandwidth	Total Power	21.8 dBm																																			
17.632 MHz																																					
Transmit Freq Error	OBW Power	99.00 %																																			
-28.386 kHz																																					
x dB Bandwidth	x dB	-26.00 dB																																			
21.01 MHz																																					
<p>5795MHz</p> <p>Center: 5.795 GHz #Res BW: 100 kHz #VBW: 300 kHz Span: 60 MHz Sweep: 5.8 ms</p> <table border="1"> <tr> <td>Occupied Bandwidth</td> <td>Total Power</td> <td>22.0 dBm</td> </tr> <tr> <td>36.103 MHz</td> <td></td> <td></td> </tr> <tr> <td>Transmit Freq Error</td> <td>OBW Power</td> <td>99.00 %</td> </tr> <tr> <td>-52.964 kHz</td> <td></td> <td></td> </tr> <tr> <td>x dB Bandwidth</td> <td>x dB</td> <td>-26.00 dB</td> </tr> <tr> <td>39.95 MHz</td> <td></td> <td></td> </tr> </table>	Occupied Bandwidth	Total Power	22.0 dBm	36.103 MHz			Transmit Freq Error	OBW Power	99.00 %	-52.964 kHz			x dB Bandwidth	x dB	-26.00 dB	39.95 MHz			<p>5825MHz</p> <p>Center: 5.825 GHz #Res BW: 100 kHz #VBW: 300 kHz Span: 30 MHz Sweep: 2.933 ms</p> <table border="1"> <tr> <td>Occupied Bandwidth</td> <td>Total Power</td> <td>21.6 dBm</td> </tr> <tr> <td>17.641 MHz</td> <td></td> <td></td> </tr> <tr> <td>Transmit Freq Error</td> <td>OBW Power</td> <td>99.00 %</td> </tr> <tr> <td>-30.248 kHz</td> <td></td> <td></td> </tr> <tr> <td>x dB Bandwidth</td> <td>x dB</td> <td>-26.00 dB</td> </tr> <tr> <td>20.50 MHz</td> <td></td> <td></td> </tr> </table>	Occupied Bandwidth	Total Power	21.6 dBm	17.641 MHz			Transmit Freq Error	OBW Power	99.00 %	-30.248 kHz			x dB Bandwidth	x dB	-26.00 dB	20.50 MHz		
Occupied Bandwidth	Total Power	22.0 dBm																																			
36.103 MHz																																					
Transmit Freq Error	OBW Power	99.00 %																																			
-52.964 kHz																																					
x dB Bandwidth	x dB	-26.00 dB																																			
39.95 MHz																																					
Occupied Bandwidth	Total Power	21.6 dBm																																			
17.641 MHz																																					
Transmit Freq Error	OBW Power	99.00 %																																			
-30.248 kHz																																					
x dB Bandwidth	x dB	-26.00 dB																																			
20.50 MHz																																					
<p>11ac VHT20 5745MHz</p> <p>Center: 5.745 GHz #Res BW: 100 kHz #VBW: 300 kHz Span: 30 MHz Sweep: 2.933 ms</p> <table border="1"> <tr> <td>Occupied Bandwidth</td> <td>Total Power</td> <td>22.0 dBm</td> </tr> <tr> <td>17.636 MHz</td> <td></td> <td></td> </tr> <tr> <td>Transmit Freq Error</td> <td>OBW Power</td> <td>99.00 %</td> </tr> <tr> <td>-33.197 kHz</td> <td></td> <td></td> </tr> <tr> <td>x dB Bandwidth</td> <td>x dB</td> <td>-26.00 dB</td> </tr> <tr> <td>20.96 MHz</td> <td></td> <td></td> </tr> </table>	Occupied Bandwidth	Total Power	22.0 dBm	17.636 MHz			Transmit Freq Error	OBW Power	99.00 %	-33.197 kHz			x dB Bandwidth	x dB	-26.00 dB	20.96 MHz			<p>11ac VHT40 5755MHz</p> <p>Center: 5.755 GHz #Res BW: 100 kHz #VBW: 300 kHz Span: 60 MHz Sweep: 5.8 ms</p> <table border="1"> <tr> <td>Occupied Bandwidth</td> <td>Total Power</td> <td>21.4 dBm</td> </tr> <tr> <td>36.130 MHz</td> <td></td> <td></td> </tr> <tr> <td>Transmit Freq Error</td> <td>OBW Power</td> <td>99.00 %</td> </tr> <tr> <td>-70.867 kHz</td> <td></td> <td></td> </tr> <tr> <td>x dB Bandwidth</td> <td>x dB</td> <td>-26.00 dB</td> </tr> <tr> <td>39.14 MHz</td> <td></td> <td></td> </tr> </table>	Occupied Bandwidth	Total Power	21.4 dBm	36.130 MHz			Transmit Freq Error	OBW Power	99.00 %	-70.867 kHz			x dB Bandwidth	x dB	-26.00 dB	39.14 MHz		
Occupied Bandwidth	Total Power	22.0 dBm																																			
17.636 MHz																																					
Transmit Freq Error	OBW Power	99.00 %																																			
-33.197 kHz																																					
x dB Bandwidth	x dB	-26.00 dB																																			
20.96 MHz																																					
Occupied Bandwidth	Total Power	21.4 dBm																																			
36.130 MHz																																					
Transmit Freq Error	OBW Power	99.00 %																																			
-70.867 kHz																																					
x dB Bandwidth	x dB	-26.00 dB																																			
39.14 MHz																																					

5795MHz

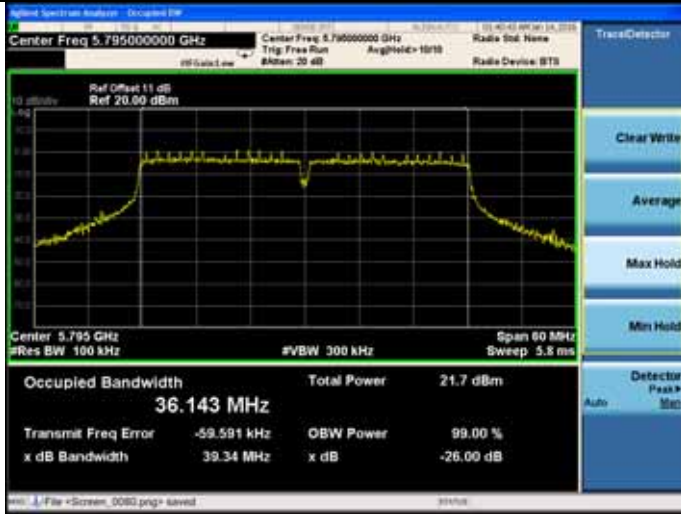

11ac VHT80

5775MHz



7. OUTPUT POWER TEST

7.1. Test Equipment

Item	Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Cal. Interval
1.	Spectrum	Agilent	E4446A	US44300459	Apr.28,15	1 Year
2.	Spectrum	Agilent	N9030A	MY51380221	Oct.18,15	1Year
3.	Power meter	Anritsu	ML2487A	6K00002472	Aug.21,15	1Year
4.	Power sensor	Anritsu	MA2491A	0033005	Aug.21,15	1Year
5.	Attenuator (20dB)	Agilent	8491B	MY39262165	Apr.28,15	1 Year
6.	RF Cable	Marvelous Microwave Inc	SFL402105FLEX	NO.1	Oct.17,15	1 Year

7.2. Limit

For the band 5.15–5.25 GHz.

For mobile and portable client devices in the 5.15–5.25 GHz band, the maximum conducted output power over the frequency band of operation shall not exceed 250 mW provided the maximum antenna gain does not exceed 6 dBi.

For the 5.25–5.35 GHz and 5.47–5.725 GHz bands, the maximum conducted output power over the frequency bands of operation shall not exceed the lesser of 250 mW or $11 \text{ dBm} + 10 \log B$, where B is the 26 dB emission bandwidth in megahertz.

For the band 5.725-5.85 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W.

7.3. Test Procedure

1. Connected the EUT's antenna port to measure device by 26dB attenuator.
2. For IEEE 802.11a and IEEE802.11n HT20 and 802.11ac VHT20 mode, use a PK power meter which's bandwidth is 20MHz and above 26dB bandwidth of signal to measure out each test modes' PK output power.
3. For IEEE802.11n HT40 mode, because the signal's bandwidth is about 40MHz and above 20MHz bandwidth of power sensor ML2491A. So use the test method described in KBD789033 clause E Method SA-1
 - 1) Connect the antenna port to the spectrum analyzer and Set span of the spectrum to encompass the entire emission bandwidth (EBW) of the signal.
 - 2) Set the RBW=1MHz and VBW =3MHz
 - 3) Number of points in sweep $\geq 2 \text{ Span} / \text{RBW}$
 - 4) Detector = RMS
 - 5) Sweep time = auto couple
 - 6) Allow the sweep to "free run" and set the Trace average at least 100 traces in power averaging (i.e., RMS) mode.
 - 7) Compute power by integrating the spectrum across the 26 dB EBW of the signal using the instrument's band power measurement function with band limits set equal to the EBW band edges.

Note: The cable loss and attenuator loss were offset into measure device as an amplitude offset.

7.4. Test Results

EUT: Altai A3c Indoor Dual-band 3X3 802.11ac WiFi AP		
M/N: WA3311NAC-C		
Test date: 2016-01-13	Pressure: 101.8±1.0 kpa	Humidity:52.5±3.0%
Tested by: Leo-Li	Test site: RF site	Temperature:22.7±0.6

Test Mode	Frequency (MHz)	Maximum Conducted Output Power (dBm)				Limit (dBm)
		ANT 1	ANT 2	ANT 3	Total	
11a	5745	21.61	22.01	21.85	26.60	30
	5785	21.59	22.14	22.04	26.70	30
	5825	21.06	22.12	21.98	26.52	30
11n HT20	5745	21.04	21.73	21.35	26.15	30
	5785	21.27	21.59	21.63	26.27	30
	5825	20.94	21.79	21.97	26.36	30
11n HT40	5755	21.22	21.48	21.63	26.22	30
	5795	21.13	21.23	21.58	26.09	30
11ac VHT20	5745	21.07	21.58	21.28	26.09	30
	5785	21.47	21.72	21.75	26.42	30
	5825	21.03	21.50	21.35	26.07	30
11ac VHT40	5755	21.13	21.56	21.71	26.24	30
	5795	21.61	21.24	21.32	26.16	30
11ac VHT80	5775	21.73	21.68	21.70	26.47	30

Conclusion : PASS

<p>ANT 1</p> <p>11n HT40</p>	
<p>5755MHz</p>	<p>5795MHz</p>
<p>5795MHz</p>	<p>11ac VHT80</p> <p>5775MHz</p>
<p>11ac VHT40</p> <p>5755MHz</p>	

<p>ANT 2</p> <p>11n HT40</p>	
<p>5755MHz</p>	<p>5795MHz</p>
<p>5795MHz</p>	<p>11ac VHT80</p> <p>5775MHz</p>
<p>11ac VHT40</p> <p>5755MHz</p>	

<p>ANT 3</p>	
<p>11n HT40</p>	
<p>5755MHz</p>	<p>5795MHz</p>
<p>11ac VHT80</p>	
<p>5795MHz</p>	<p>5775MHz</p>
<p>11acVHT40</p>	
<p>5755MHz</p>	

8. SPECTRAL DENSITY TEST

8.1. Test Equipment

Item	Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Cal. Interval
1.	Spectrum	Agilent	E4446A	US44300459	Apr.28,15	1 Year
2.	Spectrum	Agilent	N9030A	MY51380221	Oct.18,15	1Year
3.	Attenuator (20dB)	Agilent	8491B	MY39262165	Apr.28,15	1 Year
4.	RF Cable	Marvelous Microwave Inc	SFL402105FLEX	NO.1	Oct.17,15	1 Year

8.2. Limit

Band 5150-5250 MHz:

The e.i.r.p spectral density shall not exceed 10 dBm in any 1.0 MHz band.

Band 5250-5350 MHz:

The power spectral density shall not exceed 11 dBm in any 1.0 MHz band.

Band 5470-5725 MHz:

The power spectral density shall not exceed 11 dBm in any 1.0 MHz band.

Band 5725-5850 MHz:

The power spectral density shall not exceed 30 dBm in any 500 KHz band.

8.3. Test Procedure

For the Band 5.15-5.25GHz:

The transmitter output was connected to a spectrum analyzer. Power density was measured by spectrum analyzer with 1MHz RBW and 3MHz VBW; Detector: RMS mode.

For the band 5.725-5.85 GHz:

The transmitter output was connected to a spectrum analyzer. Power density was measured by spectrum analyzer with 1MHz RBW and 3MHz VBW,RMS Detector.

So use the test method described in KDB789033 clause E

- 1) Set the RBW=100kHz and VBW =3MHz
- 2) Number of points in sweep ≥ 2 Span / RBW.(This ensures that bin-to-bin spacing is \leq RBW/2, so that narrowband signals are not lost between frequency bins.)
- 3) Sweep time = auto
- 4) Detector = RMS (i.e., power averaging), if available. Otherwise, use sample detector mode.
- 5) Use the “peak search” function of spectrum analyzer find the max value, then add $10\log(500\text{kHz}/\text{RBW})$ to the measured result.

Note: The cable loss and attenuator loss were offset into measure device as an amplitude offset.

8.4. Test Results

EUT : Altai A3c Indoor Dual-band 3X3 802.11ac WiFi AP		
M/N: WA3311NAC-C		
Test date: 2016-01-13	Pressure: 102.3±1.0 kpa	Humidity:53.8±3.0%
Tested by: Leo-Li	Test site: RF site	Temperature:22.7±0.6

Test Mode	Frequency (MHz)	Power density (dBm/500KHz)				Limit (dBm/500KHz)
		ANT 1	ANT 2	ANT 3	Total	
11a	5745	-4.441	-3.693	-3.756	0.82	30
	5785	-3.847	-3.811	-2.886	1.28	30
	5825	-4.140	-3.627	-3.707	0.95	30
11n HT20	5745	-4.688	-4.130	-4.109	0.47	30
	5785	-4.022	-4.022	-3.419	0.96	30
	5825	-4.481	-4.097	-4.136	0.54	30
11n HT40	5755	-7.995	-7.185	-7.360	-2.73	30
	5795	-8.086	-7.785	-7.481	-3.01	30
11ac VHT20	5745	-4.150	-4.213	-4.189	0.59	30
	5785	-3.763	-4.323	-3.641	0.87	30
	5825	-4.082	-4.302	-4.525	0.47	30
11ac VHT40	5755	-8.133	-7.402	-7.037	-2.73	30
	5795	-8.036	-7.684	-7.203	-2.86	30
11ac VHT80	5775	-5.438	-5.116	-5.060	-0.43	30

Conclusion: PASS

<p>ANT 1</p>	
<p>11a</p> <p>5745MHz</p>	<p>11n HT20</p> <p>5745MHz</p>
<p>5785MHz</p>	<p>5785MHz</p>
<p>5825MHz</p>	<p>5825MHz</p>

<p>11n HT40 5755MHz</p>	<p>5785MHz</p>
<p>5795MHz</p>	<p>5825MHz</p>
<p>11ac VHT20 5745MHz</p>	<p>11ac VHT40 5755MHz</p>

5795MHz




11ac VHT80
5775MHz



<p>ANT 2</p>	
<p>11a</p> <p>5745MHz</p>	<p>11n HT20</p> <p>5745MHz</p>
<p>5785MHz</p>	<p>5785MHz</p>
<p>5825MHz</p>	<p>5825MHz</p>


<p>11n HT40 5755MHz</p>	<p>5785MHz</p>
<p>5795MHz</p>	<p>5825MHz</p>
<p>11ac VHT20 5745MHz</p>	<p>11ac VHT40 5755MHz</p>

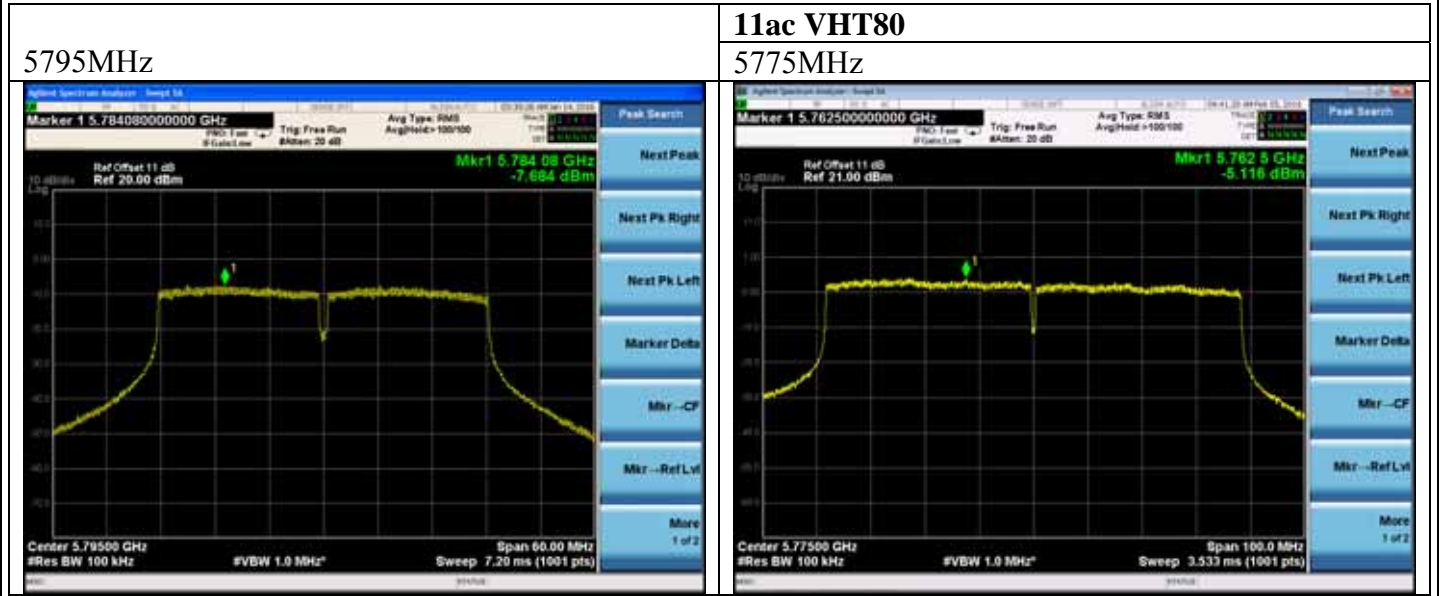

ANT 3


11a

5745MHz

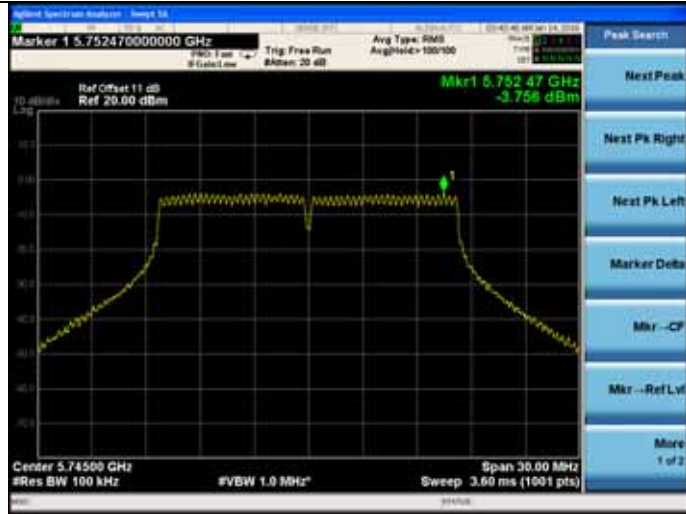


11n HT20


5745MHz

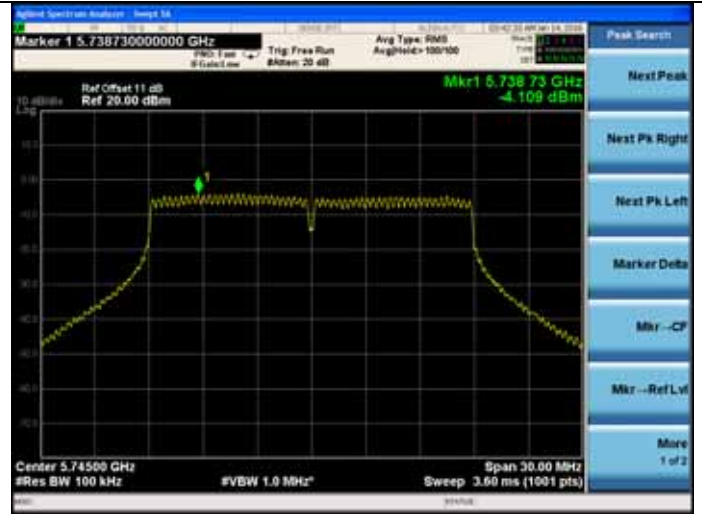

5785MHz

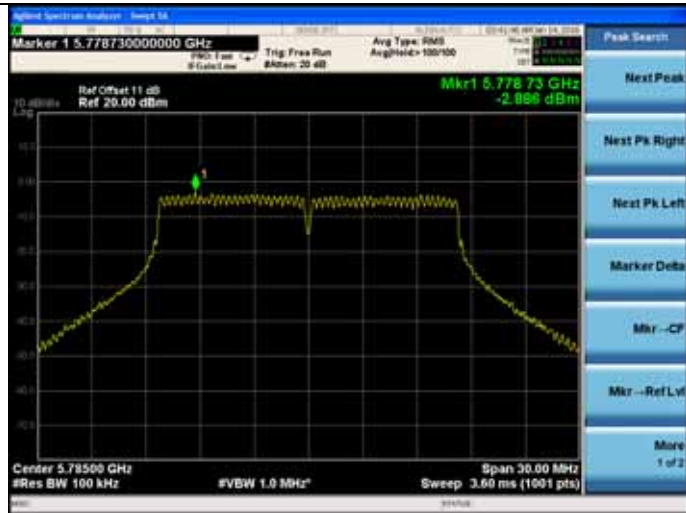


5785MHz

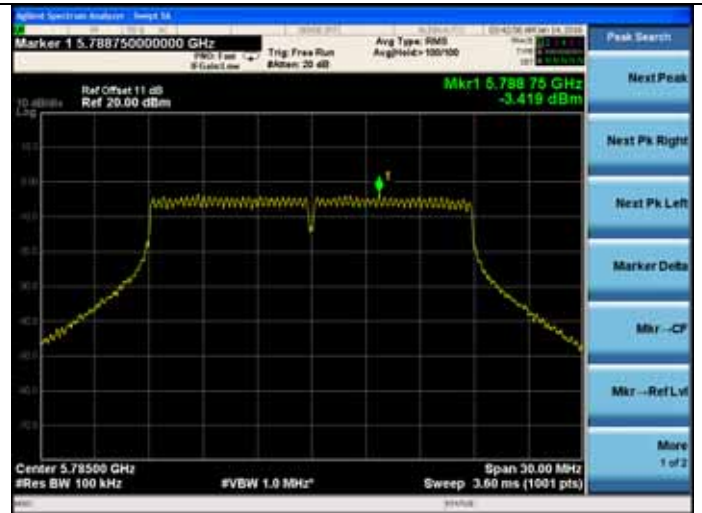


5825MHz



5825MHz

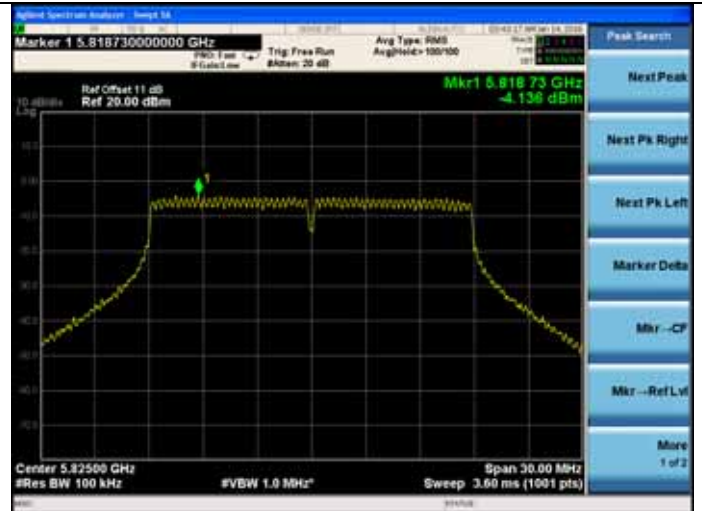

<p>11n HT40 5755MHz</p>	<p>5785MHz</p>
<p>5795MHz</p>	<p>5825MHz</p>
<p>11ac VHT20 5745MHz</p>	<p>11ac VHT40 5755MHz</p>

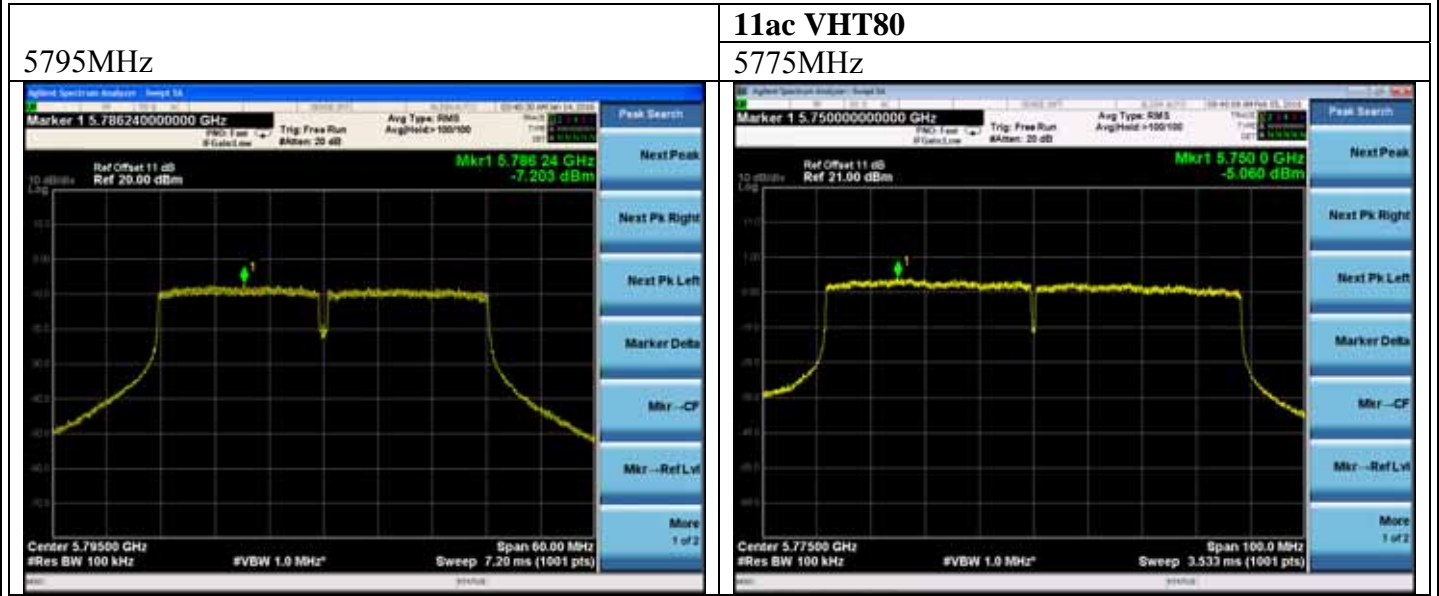

9. FREQUENCY STABILITY MEASUREMENT

9.1. Test Equipment

Item	Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Cal. Interval
1.	PXA Signal Analyzer	Agilent	N9030A	MY51380221	Oct.18,15	1 Year
2.	Amplifier	Agilent	8449B	3008A02495	Apr.28,15	1 Year
3.	Horn Antenna	ETS	3115	9510-4877	Oct.15,15	1 Year
4.	HF Cable	Hubersuhner	Sucoflex104	274094/4	Apr.28,15	1 Year

9.2. Limit

Manufacturers of U-NII devices are responsible for ensuring frequency stability such that an emissions is maintained within the band of operation under all conditions of normal operation as specified in the user's manual or ± 20 ppm

9.3. Test Procedure

1. The transmitter output (antenna port) was connected to the spectrum analyzer. EUT have transmitted absence of modulation signal and fixed channelise. Set the spectrum analyzer span to view the entire absence of modulation emissions bandwidth. Set RBW = 10 kHz, VBW = 10 kHz with peak detector and maxhold settings. f_c is declaring of channel frequency. Then the frequency error formula is $(f_c - f) / f_c \times 10^6$ ppm and the limit is less than ± 20 ppm The test extreme voltage is to change the primary supply voltage from 85 to 115 percent of the nominal value
2. Extreme temperature rule is $-30^\circ\text{C} \sim 50^\circ\text{C}$.

9.4. Test Result

EUT: Altai A3c Indoor Dual-band 3X3 802.11ac WiFi AP

M/N: WA3311NAC-C

Test Site: RF Site

Date: 2016-01-23

Test Engineer: Leo-Li

Temperature:22.2±0.6

Humidity: 53.2±3.0 %

Pressure: 101.1±1.0kpa

Frequency Stability vs Voltage:

Test Voltage (V)	Temp ()	CH	Max. Reading (MHz)	Target Frequency (MHz)	Result (ppm)	Limit (ppm)
AC 108V	25	CH149	5744.94	5745	-10.44	±20
		CH151	5754.95	5755	-8.69	±20
		CH155	5774.96	5775	-6.93	±20
		CH157	5784.95	5785	-8.64	±20
		CH159	5794.96	5795	-6.90	±20
		CH165	5824.96	5825	-6.87	±20

Conclusion: PASS

Test Voltage (V)	Temp ()	CH	Max. Reading (MHz)	Target Frequency (MHz)	Result (ppm)	Limit (ppm)
AC 120V	25°C	CH149	5744.95	5745	-8.70	±20
		CH151	5754.96	5755	-6.95	±20
		CH155	5774.97	5775	-5.19	±20
		CH157	5784.94	5785	-10.37	±20
		CH159	5794.96	5795	-6.90	±20
		CH165	5824.94	5825	-10.30	±20

Conclusion: PASS

Test Voltage (V)	Temp ()	CH	Max. Reading (MHz)	Target Frequency (MHz)	Result (ppm)	Limit (ppm)
AC 132V	25	CH149	5744.96	5745	-6.96	±20
		CH151	5754.95	5755	-8.69	±20
		CH155	5774.95	5775	-8.66	±20
		CH157	5784.94	5785	-10.37	±20
		CH159	5794.94	5795	-10.35	±20
		CH165	5824.95	5825	-8.58	±20

Conclusion: PASS

Frequency Stability vs. Temperature:

Test Voltage (V)	Temp (°C)	CH	Max. Reading (MHz)	Target Frequency (MHz)	Result (ppm)	Limit (ppm)
AC 120V	-5°C	CH149	5744.97	5745	-5.22	±20
		CH151	5754.95	5755	-8.69	±20
		CH155	5774.96	5775	-6.93	±20
		CH157	5784.95	5785	-8.64	±20
		CH159	5794.94	5795	-10.35	±20
		CH165	5824.94	5825	-10.30	±20

Conclusion: PASS

Test Voltage (V)	Temp (°C)	CH	Max. Reading (MHz)	Target Frequency (MHz)	Result (ppm)	Limit (ppm)
AC 120V	5°C	CH149	5744.96	5745	-6.96	±20
		CH151	5754.95	5755	-8.69	±20
		CH155	5774.94	5775	-10.39	±20
		CH157	5784.96	5785	-6.91	±20
		CH159	5794.97	5795	-5.18	±20
		CH165	5824.97	5825	-5.15	±20

Conclusion: PASS

Test Voltage (V)	Temp ()	CH	Max. Reading (MHz)	Target Frequency (MHz)	Result (ppm)	Limit (ppm)
AC 120V	15	CH149	5744.96	5745	-6.96	±20
		CH151	5754.94	5755	-10.43	±20
		CH155	5774.93	5775	-12.12	±20
		CH157	5784.95	5785	-8.64	±20
		CH159	5794.96	5795	-6.90	±20
		CH165	5824.97	5825	-5.15	±20

Conclusion: PASS

Test Voltage (V)	Temp ()	CH	Max. Reading (MHz)	Target Frequency (MHz)	Result (ppm)	Limit (ppm)
AC 120V	25	CH149	5744.95	5745	-8.70	±20
		CH151	5754.96	5755	-6.95	±20
		CH155	5774.94	5775	-10.39	±20
		CH157	5784.96	5785	-6.91	±20
		CH159	5794.93	5795	-12.08	±20
		CH165	5824.94	5825	-10.30	±20

Conclusion: PASS

Test Voltage (V)	Temp ()	CH	Max. Reading (MHz)	Target Frequency (MHz)	Result (ppm)	Limit (ppm)
AC 120V	35	CH149	5744.96	5745	-6.96	±20
		CH151	5754.95	5755	-8.69	±20
		CH155	5774.97	5775	-5.19	±20
		CH157	5784.96	5785	-6.91	±20
		CH159	5794.97	5795	-5.18	±20
		CH165	5824.97	5825	-5.15	±20

Conclusion: PASS

Test Voltage (V)	Temp ()	CH	Max. Reading (MHz)	Target Frequency (MHz)	Result (ppm)	Limit (ppm)
AC 120V	45	CH149	5744.96	5745	-6.96	±20
		CH151	5754.95	5755	-8.69	±20
		CH155	5774.96	5775	-6.93	±20
		CH157	5784.97	5785	-5.19	±20
		CH159	5794.97	5795	-5.18	±20
		CH165	5824.95	5825	-8.58	±20

Conclusion: PASS

Test Voltage (V)	Temp ()	CH	Max. Reading (MHz)	Target Frequency (MHz)	Result (ppm)	Limit (ppm)
AC 120V	55	CH149	5744.96	5745	-6.96	±20
		CH151	5754.96	5755	-6.95	±20
		CH155	5774.95	5775	-8.66	±20
		CH157	5784.96	5785	-6.91	±20
		CH159	5794.96	5795	-6.90	±20
		CH165	5824.95	5825	-8.58	±20

Conclusion: PASS

11. ANTENNA REQUIREMENT

11.1. Standard Applicable

For intentional device, according to FCC 47 CFR Section 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. And according to FCC 47 CFR Section 15.407 (a), if transmitting antennas of directional gain greater than 6dBi are used, the power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6dBi.

11.2. Antenna Connected Construction

The antennas used for this product are Built-in Omni Antenna that no antenna other than that furnished by the responsible party shall be used with the device, the maximum peak gain of the transmit antenna is 6 dBi.

12. DEVIATION TO TEST SPECIFICATIONS

[NONE]