

Test of: **Panasonic Mobile Comms Dev of Europe Ltd
VS71**

To: **OET Bulletin 65 Supplement C: (2001-01)**

Appendix 1. Test Equipment Used

| RFI No. | Instrument | Manufacturer | Type No. | Serial No. | Date Last Calibrated | Cal. Interval |
|----------------|-----------------------------------|------------------------|-------------------|-------------------|------------------------------|----------------------|
| A034 | Narda 20W Termination | Narda | 374BNM | 8706 | Calibrated as part of system | - |
| A1094 | Digital Camera | Sony | MVC - FD81 | 125805 | None | - |
| A1097 | SMA Directional Coupler | MiDISCO | MDC6223-30 | None | Calibrated as part of system | - |
| A1137 | 3dB Attenuator | Narda | 779 | 04690 | Calibrated as part of system | - |
| A1174 | Dielectric Probe Kit | Agilent Technologies | 85070C | Us9936007 2 | Calibrate Before Use | - |
| A1184 | Data Acquisition Electronics | Schmid & Partner | DAE3 | 394 | 19 May 2006 | 12 Months |
| A1186 | E-Field Probe | Schmid & Partner | ET3 DV6 | 1529 | 07 September 2006 | 12 Months |
| A1237 | 1900MHz Validation Dipole for SAR | Schmid & Partners | D1900V2 | 540 | 14 Jun 2005 | 24 Months |
| A1238 | SAM Phantom | Schmid & Partners | 001 | 001 | Calibrate Before Use | - |
| A1328 | DASY4 Handset Positioner | Schmid & Partner | Modification | SD 000 H01 DA | - | - |
| A1410 | DC-4.0GHz 3dB | Omni Spectra | FSC 16179 | 20510-3 | Calibrated as part of system | - |
| A1497 | Amplifier | Mini-Circuits | zhl-42w (sma) | e020105 | Calibrated as part of system | - |
| A1531 | Antenna | AARONIA AG | 7025 | 02458 | None | - |
| A1566 | SAM Phantom | Schmid & Partners | 002 | 002 | Calibrate Before Use | - |
| A215 | 20 dB Attenuator to 4GHz 20W | Narda | 766-20 | 9402 | Calibrated as part of system | - |
| C1092 | Cable | RS | 293-334 | 1087200-3 3402 | Internal Calibration | 12 Months |
| C1144 | 155 mm UTIFLEX Cable | Rosenberger MICRO-COAX | FA147AF00 1503030 | 41842-1 | Calibrated as part of system | - |
| C1145 | 300 mm UTIFLEX Cable | Rosenberger MICRO-COAX | FA147AF00 3003030 | 41843-1 | Calibrated as part of system | - |

Test of: **Panasonic Mobile Comms Dev of Europe Ltd
VS71**

To: **OET Bulletin 65 Supplement C: (2001-01)**

Test Equipment Used (Continued)

| RFI No. | Instrument | Manufacturer | Type No. | Serial No. | Date Last Calibrated | Cal. Interval |
|---------|--|------------------------|-------------------|------------------|------------------------------|---------------|
| C1146 | 3000 mm UTIFLEX Cable | Rosenberger MICRO-COAX | FA147AF03 0003030 | 41752-1 | Calibrated as part of system | - |
| G051 | 10 MHz to 20.1 GHz | Gigatronics | 7100/.01-20 | 749472 | 06 Nov 2006 | 12 Months |
| G0528 | Robot Power Supply | Schmid & Partner | DASY | None | Calibrate Before Use | - |
| G087 | PSI Dual 35V 10A | Thurlby Thandar | CPX200 | 100701 | Calibrated as part of system | - |
| M010 | NRV Power Meter | Rohde & Schwarz | NRV | 882 317/065 | 19 Jun 2006 | 12 Months |
| M1015 | Network Analyser | Agilent Technologies | 8753ES | US391724 06 | 19 Sep 2006 | 12 Months |
| M1047 | Robot Arm | Staubli | RX908 L | F00/SD89 A1/A/01 | Calibrate Before Use | - |
| M1069 | Power Head | Rohde & Schwarz | NRV-Z2 | 838824/01 0 | 05 Apr 2006 | 12 Months |
| M1129 | URY-Z2 | Rohde & Schwarz | URY-Z2 | 890242/16 | Calibrated as part of system | - |
| M1140 | Radio Communications Analyser | Anritsu | MT8820A | 6K0000647 | - | - |
| M1150 | Compact Data Logger with Interface and Probe | Testo | 175-T2 | 37503417 / 301 | Calibrate Before Use | - |
| M136 | Temperature/ Humidity/ Pressure Meter | RS Components | - | - | Internal Calibration | 12 Months |
| M1144 | Thermometer | Testo | 110 | 03100047 | 23 Feb 2007 | 12 Months |
| S256 | SAR Test Lab | RFI | Site 56 | Site 56 | Calibrate Before Use | - |

NB In accordance with UKAS requirements, all the measurement equipment is on a calibration schedule.

Test of: **Panasonic Mobile Comms Dev of Europe Ltd
VS71**

To: **OET Bulletin 65 Supplement C: (2001-01)**

A.1.1. Calibration Certificates

This section contains the calibration certificates and data for the Probe(s) and Dipole(s) used, which are not included in the total number of pages for this report.

Calibration Laboratory of
Schmid & Partner
Engineering AG
 Zeughausstrasse 43, 8004 Zurich, Switzerland



S Schweizerischer Kalibrierdienst
C Service suisse d'étalonnage
S Servizio svizzero di taratura
S Swiss Calibration Service

Accredited by the Swiss Federal Office of Metrology and Accreditation
 The Swiss Accreditation Service is one of the signatories to the EA
 Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: SCS 108

21/06/05.

Client

RFI

Certificate No. D1900V2-540_Apr05

CALIBRATION CERTIFICATE

Object

D1900V2 - SN: 540

Calibration procedure(s)

QA CAL-05.v6

Calibration procedure for dipole validation kits

Calibration date:

June 14, 2005

Condition of the calibrated item

In Tolerance

This calibration certificate documents the traceability to national standards, which realize the physical units of measurements (SI).
 The measurements and the uncertainties with confidence probability are given on the following pages and are part of the certificate.

All calibrations have been conducted in the closed laboratory facility: environment temperature (22 ± 3)°C and humidity < 70%.

Calibration Equipment used (M&TE critical for calibration)

| Primary Standards | ID # | Cal Date (Calibrated by, Certificate No.) | Scheduled Calibration |
|----------------------------|------------------|---|------------------------|
| Power meter EPM E442 | GB37480704 | 12-Oct-04 (METAS, No. 251-00412) | Oct-05 |
| Power sensor HP 8481A | US37292783 | 12-Oct-04 (METAS, No. 251-00412) | Oct-05 |
| Reference 20 dB Attenuator | SN: 5086 (20g) | 10-Aug-04 (METAS, No 251-00402) | Aug-05 |
| Reference 10 dB Attenuator | SN: 5047.2 (10r) | 10-Aug-04 (METAS, No 251-00402) | Aug-05 |
| Reference Probe ET3DV6 | SN 1507 | 26-Oct-04 (SPEAG, No. ET3-1507_Oct04) | Oct-05 |
| DAE4 | SN 601 | 07-Jan-05 (SPEAG, No. DAE4-601_Jan05) | Jan-06 |
| Secondary Standards | ID # | Check Date (in house) | Scheduled Check |
| Power sensor HP 8481A | MY41092317 | 18-Oct-02 (SPEAG, in house check Oct-03) | In house check: Oct-05 |
| RF generator R&S SML-03 | 100698 | 27-Mar-02 (SPEAG, in house check Dec-03) | In house check: Dec-05 |
| Network Analyzer HP 8753E | US37390585 S4206 | 18-Oct-01 (SPEAG, in house check Nov-04) | In house check: Nov 05 |

Calibrated by:

Name

Mike Meili

Function

Laboratory Technician

Signature

M. Meili

Approved by:

Katja Pokovic

Technical Manager

Katja Pokovic

Issued: June 16, 2005

This calibration certificate shall not be reproduced except in full without written approval of the laboratory.



Accredited by the Swiss Federal Office of Metrology and Accreditation
The Swiss Accreditation Service is one of the signatories to the EA
Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: **SCS 108**

Glossary:

| | |
|-------|---------------------------------|
| TSL | tissue simulating liquid |
| ConvF | sensitivity in TSL / NORM x,y,z |
| N/A | not applicable or not measured |

Calibration is Performed According to the Following Standards:

- a) IEEE Std 1528-2003, "IEEE Recommended Practice for Determining the Peak Spatial-Averaged Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques", December 2003
- b) CENELEC EN 50361, "Basic standard for the measurement of Specific Absorption Rate related to human exposure to electromagnetic fields from mobile phones (300 MHz - 3 GHz), July 2001
- c) Federal Communications Commission Office of Engineering & Technology (FCC OET), "Evaluating Compliance with FCC Guidelines for Human Exposure to Radiofrequency Electromagnetic Fields; Additional Information for Evaluating Compliance of Mobile and Portable Devices with FCC Limits for Human Exposure to Radiofrequency Emissions", Supplement C (Edition 01-01) to Bulletin 65

Additional Documentation:

- d) DASY4 System Handbook

Methods Applied and Interpretation of Parameters:

- *Measurement Conditions:* Further details are available from the Validation Report at the end of the certificate. All figures stated in the certificate are valid at the frequency indicated.
- *Antenna Parameters with TSL:* The dipole is mounted with the spacer to position its feed point exactly below the center marking of the flat phantom section, with the arms oriented parallel to the body axis.
- *Feed Point Impedance and Return Loss:* These parameters are measured with the dipole positioned under the liquid filled phantom. The impedance stated is transformed from the measurement at the SMA connector to the feed point. The Return Loss ensures low reflected power. No uncertainty required.
- *Electrical Delay:* One-way delay between the SMA connector and the antenna feed point. No uncertainty required.
- *SAR measured:* SAR measured at the stated antenna input power.
- *SAR normalized:* SAR as measured, normalized to an input power of 1 W at the antenna connector.
- *SAR for nominal TSL parameters:* The measured TSL parameters are used to calculate the nominal SAR result.

Measurement Conditions

DASY system configuration, as far as not given on page 1.

| | | |
|------------------------------|---------------------------|-------------|
| DASY Version | DASY4 | V4.6 |
| Extrapolation | Advanced Extrapolation | |
| Phantom | Modular Flat Phantom V5.0 | |
| Distance Dipole Center - TSL | 10 mm | with Spacer |
| Area Scan resolution | dx, dy = 15 mm | |
| Zoom Scan Resolution | dx, dy, dz = 5 mm | |
| Frequency | 1900 MHz \pm 1 MHz | |

Head TSL parameters

The following parameters and calculations were applied.

| | Temperature | Permittivity | Conductivity |
|----------------------------------|---------------------|----------------|----------------------|
| Nominal Head TSL parameters | 22.0 °C | 40.0 | 1.40 mho/m |
| Measured Head TSL parameters | (22.0 \pm 0.2) °C | 39.6 \pm 6 % | 1.45 mho/m \pm 6 % |
| Head TSL temperature during test | (22.0 \pm 0.2) °C | --- | ---- |

SAR result with Head TSL

| SAR averaged over 1 cm ³ (1 g) of Head TSL | condition | |
|---|--------------------|--|
| SAR measured | 250 mW input power | 9.75 mW / g |
| SAR normalized | normalized to 1W | 39.0 mW / g |
| SAR for nominal Head TSL parameters ¹ | normalized to 1W | 38.1 mW / g \pm 17.0 % (k=2) |

| SAR averaged over 10 cm ³ (10 g) of Head TSL | Condition | |
|---|--------------------|--|
| SAR measured | 250 mW input power | 5.09 mW / g |
| SAR normalized | normalized to 1W | 20.4 mW / g |
| SAR for nominal Head TSL parameters ¹ | normalized to 1W | 19.9 mW / g \pm 16.5 % (k=2) |

¹ Correction to nominal TSL parameters according to d), chapter "SAR Sensitivities"

Body TSL parameters

The following parameters and calculations were applied.

| | Temperature | Permittivity | Conductivity |
|----------------------------------|-----------------|--------------|------------------|
| Nominal Body TSL parameters | 22.0 °C | 53.3 | 1.52 mho/m |
| Measured Body TSL parameters | (22.0 ± 0.2) °C | 52.2 ± 6 % | 1.57 mho/m ± 6 % |
| Body TSL temperature during test | (21.8 ± 0.2) °C | ---- | ---- |

SAR result with Body TSL

| SAR averaged over 1 cm ³ (1 g) of Body TSL | condition | |
|---|--------------------|-----------------------------------|
| SAR measured | 250 mW input power | 10.1 mW / g |
| SAR normalized | normalized to 1W | 40.4 mW / g |
| SAR for nominal Body TSL parameters ² | normalized to 1W | 39.1 mW / g ± 17.0 % (k=2) |

| SAR averaged over 10 cm ³ (10 g) of Body TSL | condition | |
|---|--------------------|-----------------------------------|
| SAR measured | 250 mW input power | 5.34 mW / g |
| SAR normalized | normalized to 1W | 21.4 mW / g |
| SAR for nominal Body TSL parameters ² | normalized to 1W | 20.7 mW / g ± 16.5 % (k=2) |

² Correction to nominal TSL parameters according to d), chapter "SAR Sensitivities"

Appendix

Antenna Parameters with Head TSL

| | |
|--------------------------------------|-----------------------------|
| Impedance, transformed to feed point | $51.9 \Omega + 5.2 j\Omega$ |
| Return Loss | - 25.4 dB |

Antenna Parameters with Body TSL

| | |
|--------------------------------------|-----------------------------|
| Impedance, transformed to feed point | $48.1 \Omega + 5.9 j\Omega$ |
| Return Loss | - 24.0 dB |

General Antenna Parameters and Design

| | |
|----------------------------------|----------|
| Electrical Delay (one direction) | 1.196 ns |
|----------------------------------|----------|

After long term use with 100W radiated power, only a slight warming of the dipole near the feedpoint can be measured.

The dipole is made of standard semirigid coaxial cable. The center conductor of the feeding line is directly connected to the second arm of the dipole. The antenna is therefore short-circuited for DC-signals.

No excessive force must be applied to the dipole arms, because they might bend or the soldered connections near the feedpoint may be damaged.

Additional EUT Data

| | |
|-----------------|---------------|
| Manufactured by | SPEAG |
| Manufactured on | July 26, 2001 |

DASY4 Validation Report for Head TSL

Date/Time: 13.06.2005 15:11:20

Test Laboratory: SPEAG, Zurich, Switzerland

DUT: Dipole 1900 MHz; Type: D1900V2; Serial: D1900V2 - SN:540

Communication System: CW-1900; Frequency: 1900 MHz; Duty Cycle: 1:1

Medium: HSL 1900 MHz;

Medium parameters used: $f = 1900$ MHz; $\sigma = 1.45$ mho/m; $\epsilon_r = 39.6$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASY4 (High Precision Assessment)

DASY4 Configuration:

- Probe: ET3DV6 - SN1507; ConvF(4.96, 4.96, 4.96); Calibrated: 26.10.2004
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn601; Calibrated: 07.01.2005
- Phantom: Flat Phantom 5.0 (front); Type: QD000P50AA
- Measurement SW: DASY4, V4.6 Build 3; Postprocessing SW: SEMCAD, V1.8 Build 149

Pin = 250 mW; d = 10 mm/Area Scan (81x81x1):

Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 11.0 mW/g

Pin = 250 mW; d = 10 mm/Zoom Scan (7x7x7)/Cube 0:


Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 88.1 V/m; Power Drift = 0.070 dB

Peak SAR (extrapolated) = 17.0 W/kg

SAR(1 g) = 9.75 mW/g; SAR(10 g) = 5.09 mW/g


Maximum value of SAR (measured) = 11.0 mW/g

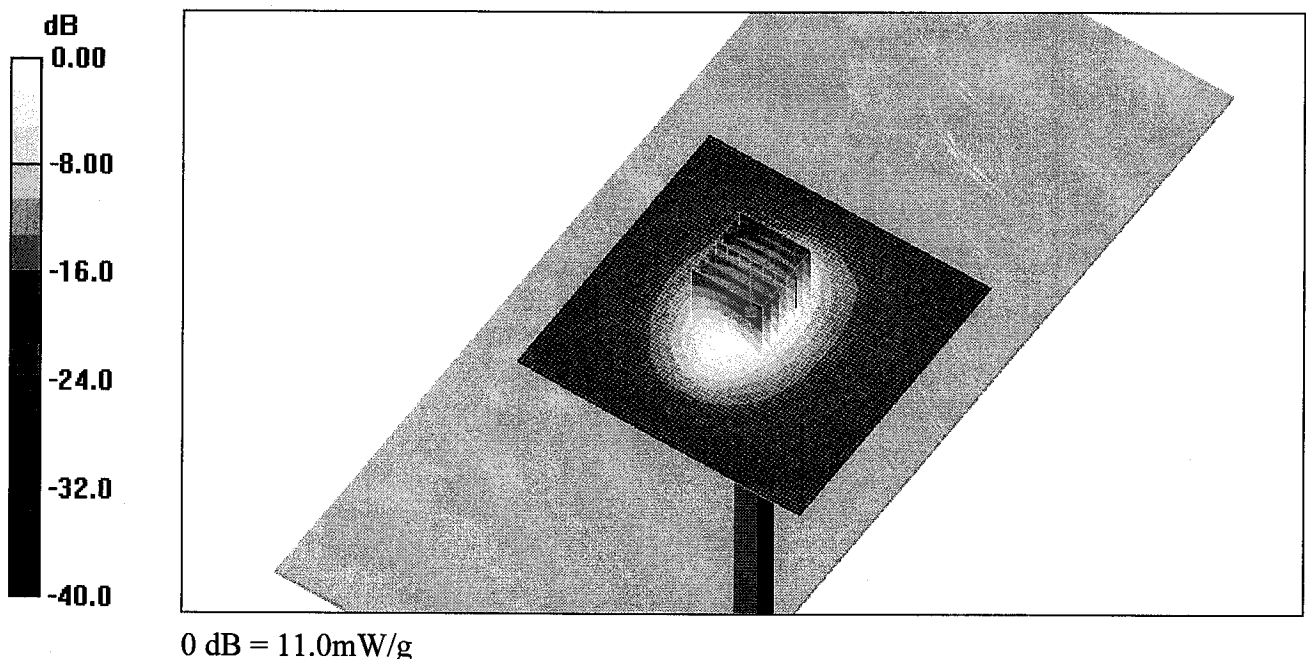

Impedance Measurement Plot for Head TSL

13 Jun 2005 10:28:48
CH1 S11 1 U FS 1: 51.898 Ω 5.1582 Ω 432.08 pH 1 900.000 000 MHz

*
Del
Cor

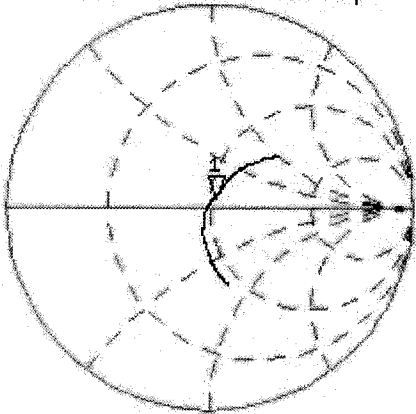

Avg
16


↑

CH2 S11 LOG 5 dB/REF -20 dB 1:-25.363 dB 1 900.000 000 MHz

Cor

Avg
16

↑

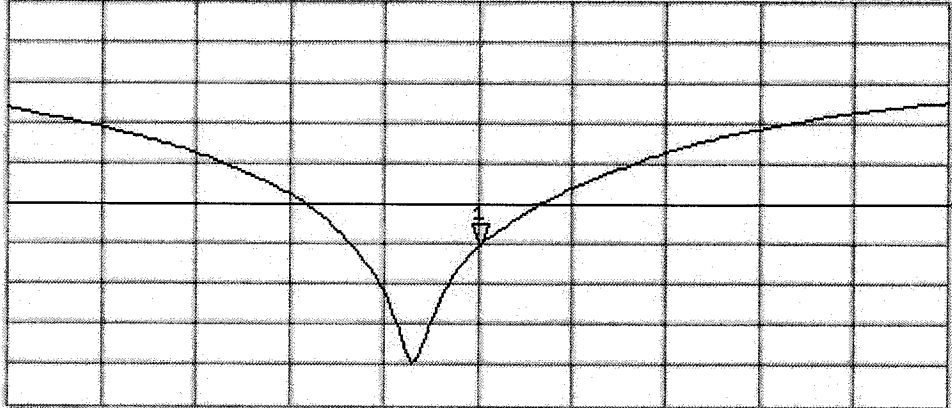

CENTER 1 900.000 000 MHz

SPAN 400.000 000 MHz

DASY4 Validation Report for Body TSL

Date/Time: 14.06.2005 14:48:33

Test Laboratory: SPEAG, Zurich, Switzerland

DUT: Dipole 1900 MHz; Type: D1900V2; Serial: D1900V2 - SN:540

Communication System: CW-1900; Frequency: 1900 MHz; Duty Cycle: 1:1

Medium: MSL 1900 MHz

Medium parameters used: $f = 1900$ MHz; $\sigma = 1.57$ mho/m; $\epsilon_r = 52.2$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASY4 (High Precision Assessment)

DASY4 Configuration:

- Probe: ET3DV6 - SN1507; ConvF(4.43, 4.43, 4.43); Calibrated: 26.10.2004
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn601; Calibrated: 07.01.2005
- Phantom: Flat Phantom 5.0 (front); Type: QD000P50AA;
- Measurement SW: DASY4, V4.6 Build 3; Postprocessing SW: SEMCAD, V1.8 Build 149

Pin = 250 mW; d = 10 mm 2/Area Scan (81x81x1):

Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 11.5 mW/g

Pin = 250 mW; d = 10 mm 2/Zoom Scan (7x7x7)/Cube 0:


Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 86.8 V/m; Power Drift = 0.109 dB

Peak SAR (extrapolated) = 17.2 W/kg

SAR(1 g) = 10.1 mW/g; SAR(10 g) = 5.34 mW/g

Maximum value of SAR (measured) = 11.4 mW/g

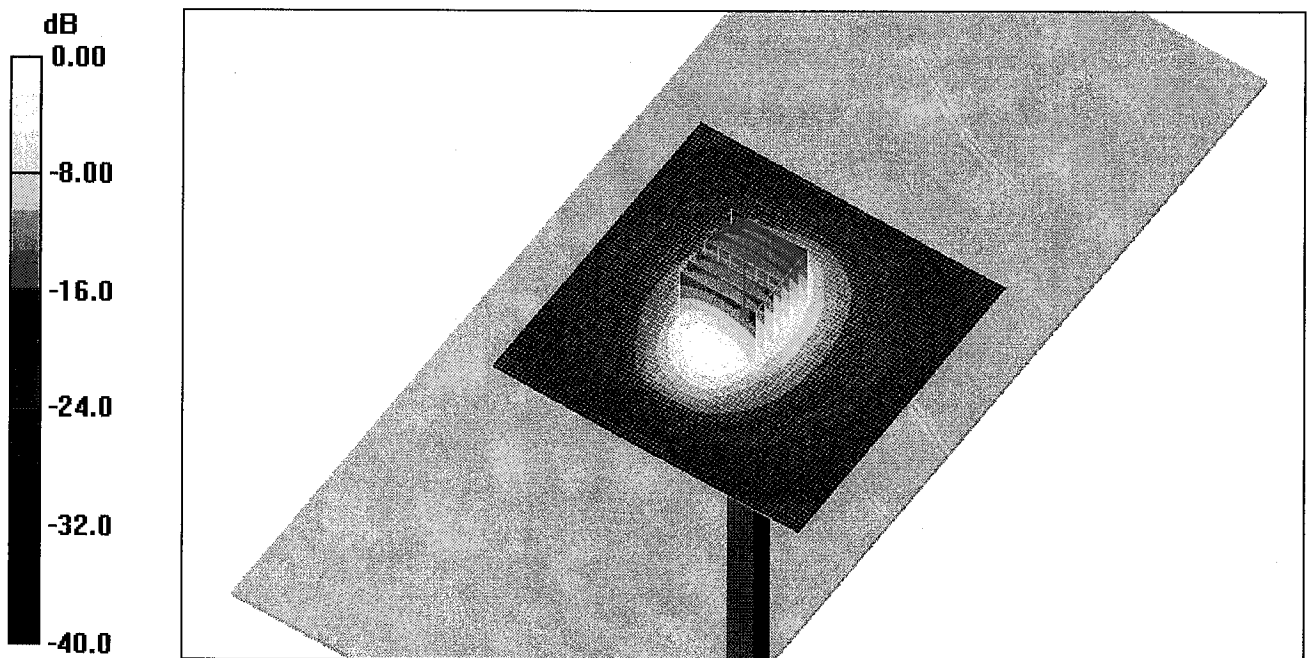


0 dB = 11.4mW/g

Impedance Measurement Plot for Body TSL

14 Jun 2005 09:23:45
CH1 S11 1 U FS 1: 48.127 5.8984 494.09 pH 1 900.000 000 MHz

*
De1
CA

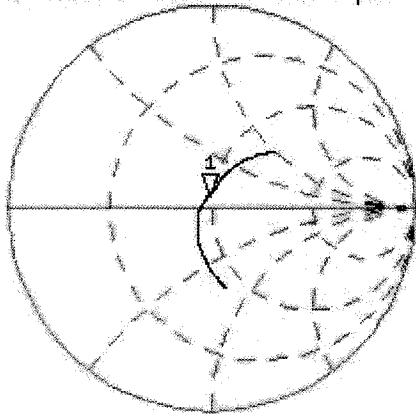

Avg
16


↑

CH2 S11 LOG 5 dB/ REF -20 dB 1:-24.014 dB 1 900.000 000 MHz

CA

Avg
16

↑

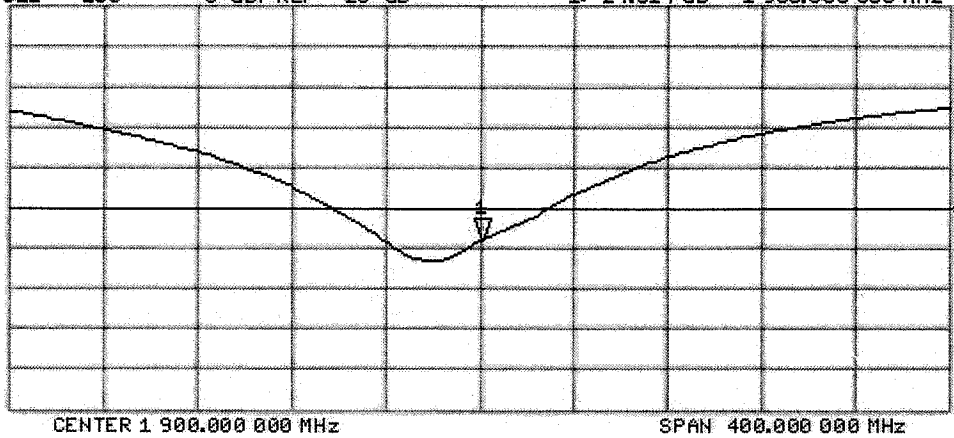



A1186
 Checked 07/09/06
 NModi

Accredited by the Swiss Federal Office of Metrology and Accreditation
 The Swiss Accreditation Service is one of the signatories to the EA
 Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: **SCS 108**

Client **RFI**

Certificate No: **ET3-1529_Aug06**

CALIBRATION CERTIFICATE

Object **ET3DV6 - SN:1529**

Calibration procedure(s) **QA CAL-01.v5**
Calibration procedure for dosimetric E-field probes

Calibration date: **August 30, 2006**

Condition of the calibrated item **In Tolerance**

This calibration certificate documents the traceability to national standards, which realize the physical units of measurements (SI).
 The measurements and the uncertainties with confidence probability are given on the following pages and are part of the certificate.

All calibrations have been conducted in the closed laboratory facility: environment temperature $(22 \pm 3)^\circ\text{C}$ and humidity $< 70\%$.

Calibration Equipment used (M&TE critical for calibration)

| Primary Standards | ID # | Cal Date (Calibrated by, Certificate No.) | Scheduled Calibration |
|----------------------------|-----------------|---|------------------------|
| Power meter E4419B | GB41293874 | 5-Apr-06 (METAS, No. 251-00557) | Apr-07 |
| Power sensor E4412A | MY41495277 | 5-Apr-06 (METAS, No. 251-00557) | Apr-07 |
| Power sensor E4412A | MY41498087 | 5-Apr-06 (METAS, No. 251-00557) | Apr-07 |
| Reference 3 dB Attenuator | SN: S5054 (3c) | 10-Aug-06 (METAS, No. 217-00592) | Aug-07 |
| Reference 20 dB Attenuator | SN: S5086 (20b) | 4-Apr-06 (METAS, No. 251-00558) | Apr-07 |
| Reference 30 dB Attenuator | SN: S5129 (30b) | 10-Aug-06 (METAS, No. 217-00593) | Aug-07 |
| Reference Probe ES3DV2 | SN: 3013 | 2-Jan-06 (SPEAG, No. ES3-3013_Jan06) | Jan-07 |
| DAE4 | SN: 654 | 21-Jun-06 (SPEAG, No. DAE4-654_Jun06) | Jun-07 |
| Secondary Standards | ID # | Check Date (in house) | Scheduled Check |
| RF generator HP 8648C | US3642U01700 | 4-Aug-99 (SPEAG, in house check Nov-05) | In house check: Nov-07 |
| Network Analyzer HP 8753E | US37390585 | 18-Oct-01 (SPEAG, in house check Nov-05) | In house check: Nov 06 |

| | | | |
|----------------|---------------|-------------------|-----------|
| | Name | Function | Signature |
| Calibrated by: | Katja Pokovic | Technical Manager | |
| Approved by: | Niels Kuster | Quality Manager | |

Issued: August 30, 2006

This calibration certificate shall not be reproduced except in full without written approval of the laboratory.



Accredited by the Swiss Federal Office of Metrology and Accreditation
 The Swiss Accreditation Service is one of the signatories to the EA
 Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: **SCS 108**

Glossary:

| | |
|--------------------------|--|
| TSL | tissue simulating liquid |
| NORM _{x,y,z} | sensitivity in free space |
| ConF | sensitivity in TSL / NORM _{x,y,z} |
| DCP | diode compression point |
| Polarization ϕ | ϕ rotation around probe axis |
| Polarization ϑ | ϑ rotation around an axis that is in the plane normal to probe axis (at measurement center), i.e., $\vartheta = 0$ is normal to probe axis |

Calibration is Performed According to the Following Standards:

- IEEE Std 1528-2003, "IEEE Recommended Practice for Determining the Peak Spatial-Averaged Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques", December 2003
- CENELEC EN 50361, "Basic standard for the measurement of Specific Absorption Rate related to human exposure to electromagnetic fields from mobile phones (300 MHz - 3 GHz), July 2001

Methods Applied and Interpretation of Parameters:

- NORM_{x,y,z}:** Assessed for E-field polarization $\vartheta = 0$ ($f \leq 900$ MHz in TEM-cell; $f > 1800$ MHz: R22 waveguide). NORM_{x,y,z} are only intermediate values, i.e., the uncertainties of NORM_{x,y,z} does not effect the E^2 -field uncertainty inside TSL (see below *ConvF*).
- NORM(f)_{x,y,z} = NORM_{x,y,z} * frequency_response** (see Frequency Response Chart). This linearization is implemented in DASY4 software versions later than 4.2. The uncertainty of the frequency response is included in the stated uncertainty of *ConvF*.
- DCP_{x,y,z}:** DCP are numerical linearization parameters assessed based on the data of power sweep (no uncertainty required). DCP does not depend on frequency nor media.
- ConvF and Boundary Effect Parameters:** Assessed in flat phantom using E-field (or Temperature Transfer Standard for $f \leq 800$ MHz) and inside waveguide using analytical field distributions based on power measurements for $f > 800$ MHz. The same setups are used for assessment of the parameters applied for boundary compensation (alpha, depth) of which typical uncertainty values are given. These parameters are used in DASY4 software to improve probe accuracy close to the boundary. The sensitivity in TSL corresponds to NORM_{x,y,z} * *ConvF* whereby the uncertainty corresponds to that given for *ConvF*. A frequency dependent *ConvF* is used in DASY version 4.4 and higher which allows extending the validity from ± 50 MHz to ± 100 MHz.
- Spherical isotropy (3D deviation from isotropy):** in a field of low gradients realized using a flat phantom exposed by a patch antenna.
- Sensor Offset:** The sensor offset corresponds to the offset of virtual measurement center from the probe tip (on probe axis). No tolerance required.

Probe ET3DV6

SN:1529

| | |
|------------------|-------------------|
| Manufactured: | March 21, 2000 |
| Last calibrated: | September 2, 2005 |
| Recalibrated: | August 30, 2006 |

Calibrated for DASY Systems

(Note: non-compatible with DASY2 system!)

DASY - Parameters of Probe: ET3DV6 SN:1529**Sensitivity in Free Space^A****Diode Compression^B**

| | | | | |
|-------|---------------------|-------------------------------------|-------|--------------|
| NormX | 1.67 ± 10.1% | $\mu\text{V}/(\text{V}/\text{m})^2$ | DCP X | 99 mV |
| NormY | 1.92 ± 10.1% | $\mu\text{V}/(\text{V}/\text{m})^2$ | DCP Y | 92 mV |
| NormZ | 1.74 ± 10.1% | $\mu\text{V}/(\text{V}/\text{m})^2$ | DCP Z | 96 mV |

Sensitivity in Tissue Simulating Liquid (Conversion Factors)

Please see Page 8.

Boundary Effect**TSL 900 MHz Typical SAR gradient: 5 % per mm**

| | | | |
|---|------------------------------|---------------|---------------|
| Sensor Center to Phantom Surface Distance | | 3.7 mm | 4.7 mm |
| SAR _{be} [%] | Without Correction Algorithm | 8.6 | 4.3 |
| SAR _{be} [%] | With Correction Algorithm | 0.0 | 0.1 |

TSL 1750 MHz Typical SAR gradient: 10 % per mm

| | | | |
|---|------------------------------|---------------|---------------|
| Sensor Center to Phantom Surface Distance | | 3.7 mm | 4.7 mm |
| SAR _{be} [%] | Without Correction Algorithm | 11.8 | 7.0 |
| SAR _{be} [%] | With Correction Algorithm | 0.2 | 0.4 |


Sensor OffsetProbe Tip to Sensor Center **2.7 mm**

The reported uncertainty of measurement is stated as the standard uncertainty of measurement multiplied by the coverage factor k=2, which for a normal distribution corresponds to a coverage probability of approximately 95%.

^A The uncertainties of NormX,Y,Z do not affect the E²-field uncertainty inside TSL (see Page 8).^B Numerical linearization parameter: uncertainty not required.




Frequency Response of E-Field

(TEM-Cell:ifi110 EXX, Waveguide: R22)

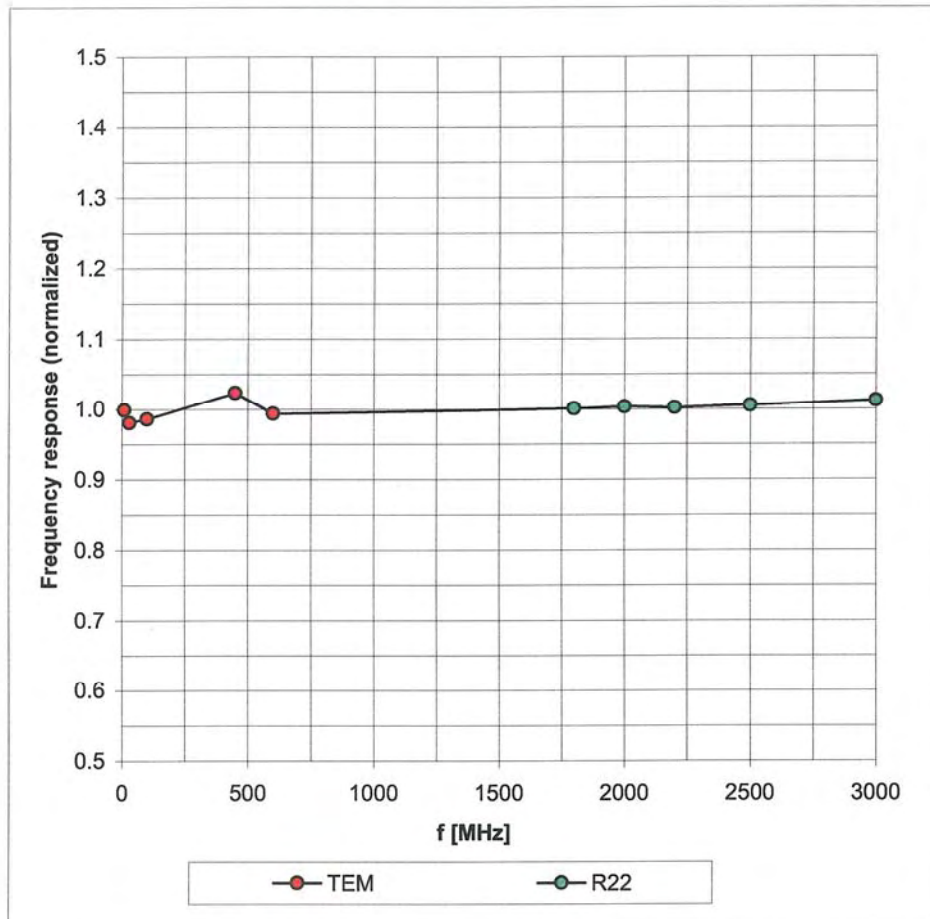


Uncertainty of Frequency Response of E-field: $\pm 6.3\%$ ($k=2$)

Receiving Pattern (ϕ), $\theta = 0^\circ$

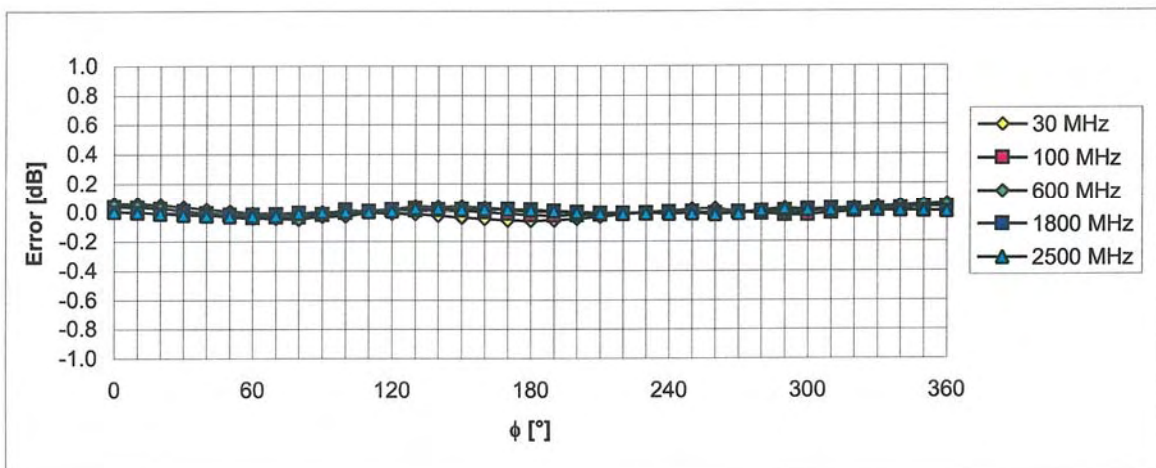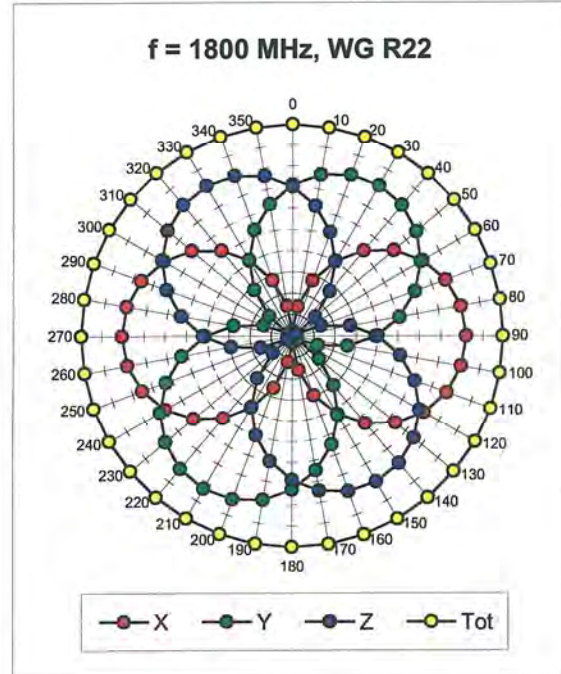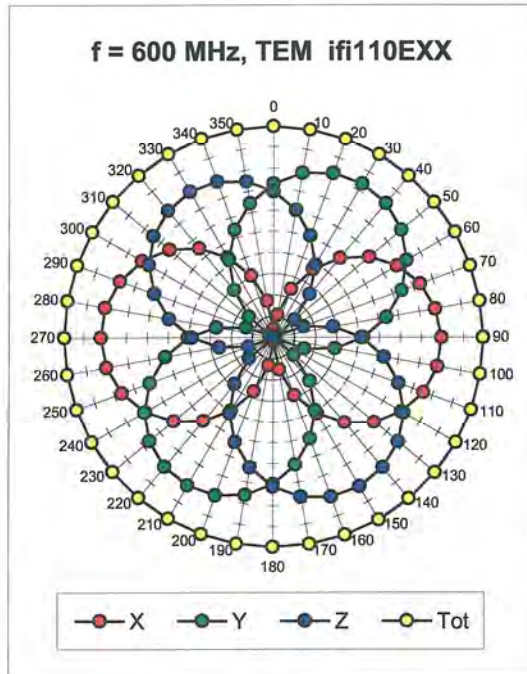



Uncertainty of Axial Isotropy Assessment: $\pm 0.5\%$ ($k=2$)

Dynamic Range $f(\text{SAR}_{\text{head}})$ (Waveguide R22, $f = 1800 \text{ MHz}$)

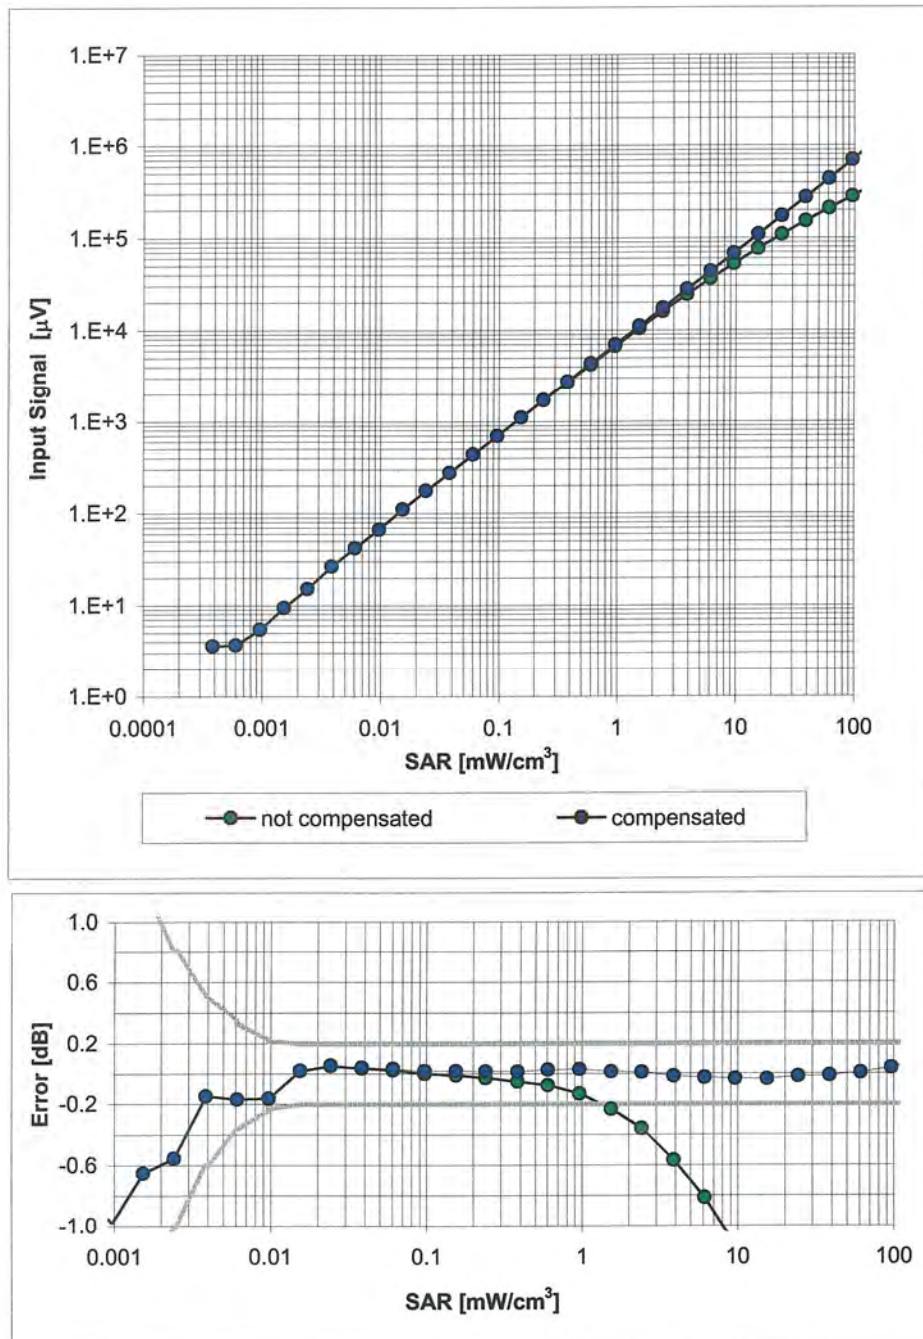

Uncertainty of Linearity Assessment: $\pm 0.6\%$ ($k=2$)

Conversion Factor Assessment

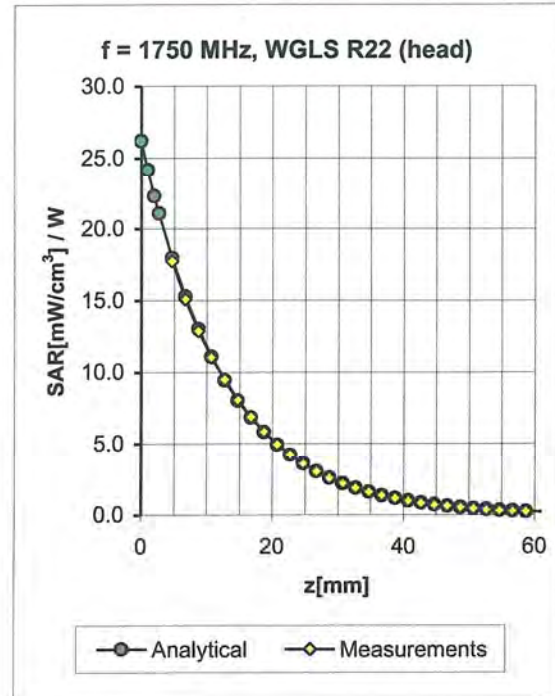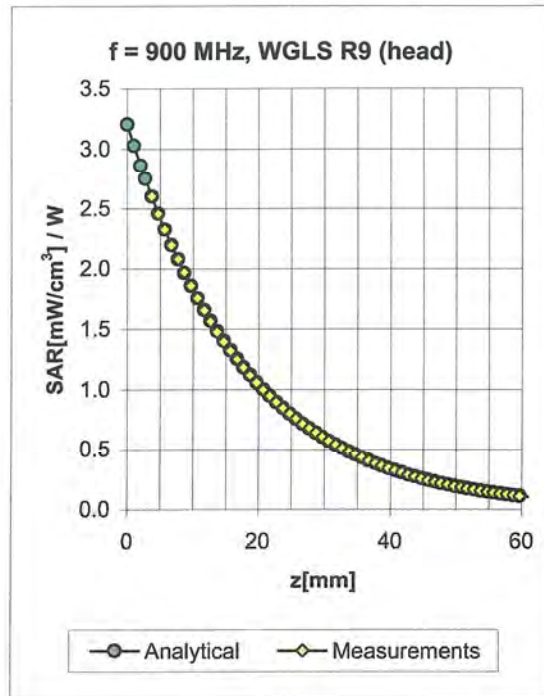


| f [MHz] | Validity [MHz] ^c | TSL | Permittivity | Conductivity | Alpha | Depth | ConvF Uncertainty |
|---------|-----------------------------|------|--------------|--------------|-------|-------|--------------------|
| 835 | ± 50 / ± 100 | Head | 41.5 ± 5% | 0.90 ± 5% | 0.64 | 1.72 | 6.42 ± 11.0% (k=2) |
| 900 | ± 50 / ± 100 | Head | 41.5 ± 5% | 0.97 ± 5% | 0.75 | 1.64 | 6.23 ± 11.0% (k=2) |
| 1750 | ± 50 / ± 100 | Head | 40.1 ± 5% | 1.37 ± 5% | 0.55 | 2.51 | 5.01 ± 11.0% (k=2) |
| 1900 | ± 50 / ± 100 | Head | 40.0 ± 5% | 1.40 ± 5% | 0.56 | 2.68 | 4.87 ± 11.0% (k=2) |
| 2450 | ± 50 / ± 100 | Head | 39.2 ± 5% | 1.80 ± 5% | 0.93 | 1.59 | 4.32 ± 11.8% (k=2) |
| | | | | | | | |
| 835 | ± 50 / ± 100 | Body | 55.2 ± 5% | 0.97 ± 5% | 0.47 | 2.11 | 6.16 ± 11.0% (k=2) |
| 900 | ± 50 / ± 100 | Body | 55.0 ± 5% | 1.05 ± 5% | 0.52 | 2.05 | 6.06 ± 11.0% (k=2) |
| 1750 | ± 50 / ± 100 | Body | 53.4 ± 5% | 1.49 ± 5% | 0.58 | 2.89 | 4.54 ± 11.0% (k=2) |
| 1900 | ± 50 / ± 100 | Body | 53.3 ± 5% | 1.52 ± 5% | 0.68 | 2.53 | 4.44 ± 11.0% (k=2) |
| 2450 | ± 50 / ± 100 | Body | 52.7 ± 5% | 1.95 ± 5% | 0.82 | 1.15 | 4.10 ± 11.8% (k=2) |

^c The validity of ± 100 MHz only applies for DASY v4.4 and higher (see Page 2). The uncertainty is the RSS of the ConvF uncertainty at calibration frequency and the uncertainty for the indicated frequency band.

Deviation from Isotropy in HSL

Error (ϕ , ϑ), $f = 900\text{ MHz}$

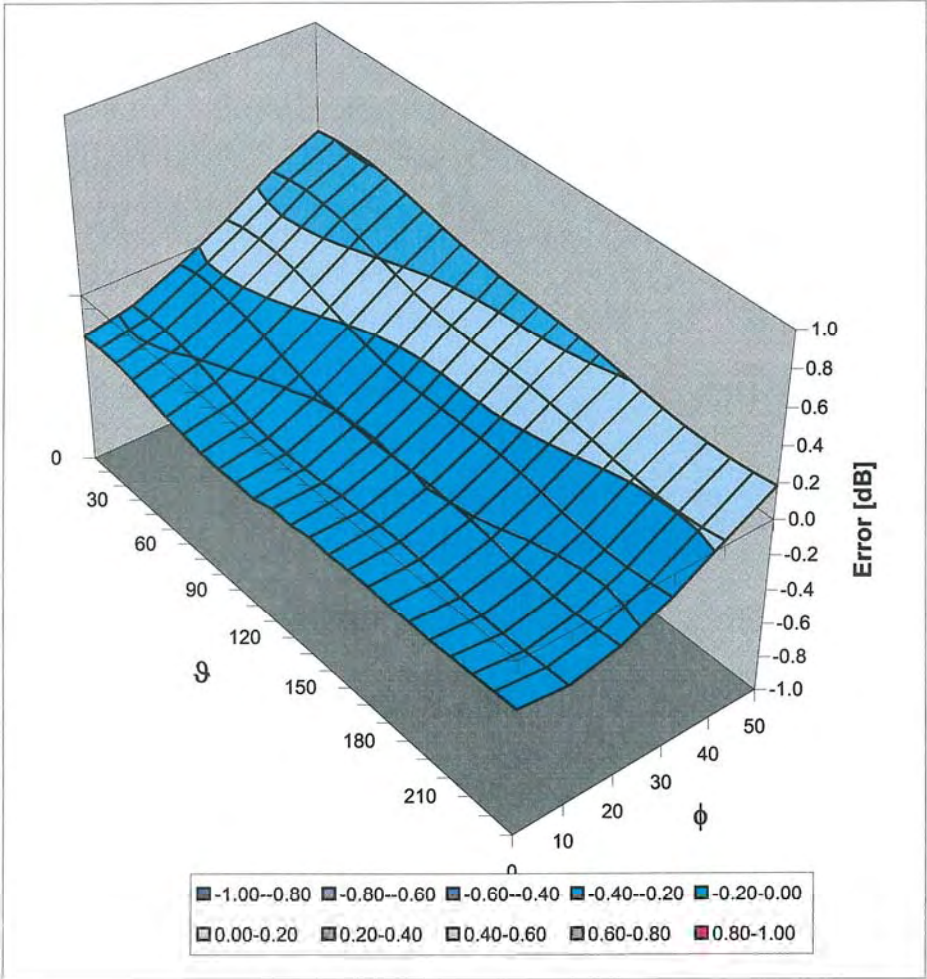

Uncertainty of Spherical Isotropy Assessment: $\pm 2.6\%$ ($k=2$)