



**SGS-CSTC Standards Technical Services Co., Ltd.  
Guangzhou Branch**

198 Kezhu Road, Sciencetech Park, Guangzhou Economic & Technological  
Development District, Guangzhou, China 510663

Telephone: +86 (0) 20 82155555  
Fax: +86 (0) 20 82075059  
Email: ee.guangzhou@sgs.com

Report No.: GZEM180600361801  
Page: 1 of 60  
FCC ID: UCZ-LWB5801-C

## TEST REPORT

**Application No.:** GZEM1806003618CR  
**Applicant:** Lorex Technology Inc.  
**Address of Applicant:** 250 Royal Crest Court, Markham, ON L3R 3S1 Canada  
**Manufacturer:** The same as applicant.  
**Address of Manufacturer:** The same as applicant.  
**Factory:** The same as applicant.  
**Address of Factory:** The same as applicant.  
**Equipment Under Test (EUT):**  
**FCC ID:** UCZ-LWB5801-C  
**EUT Name:** 1080p Wire-free Camera  
**Model No.:** LWB5801-C, LWB6801-C  
Please refer to section 2 of this report which indicates which model was actually tested and which were electrically identical.  
**Trade Mark:** LOREX  
**Standard(s) :** 47 CFR Part 15, Subpart C 15.247  
**Date of Receipt:** 2018-06-28  
**Date of Test:** 2018-07-02 to 2018-07-05  
**Date of Issue:** 2018-07-13

<b>Test Result:</b>	<b>Pass*</b>
---------------------	--------------

\* In the configuration tested, the EUT complied with the standards specified above.



Kobe Jian

EMC Laboratory Manager

The manufacturer should ensure that all products in series production are in conformity with the product sample detailed in this report. If the product in this report is used in any configuration other than that detailed in the report, the manufacturer must ensure the new system complies with all relevant standards. Any mention of SGS International Electrical Approvals or testing done by SGS International Electrical Approvals in connection with, distribution or use of the product described in this report must be approved by SGS International Electrical Approvals in writing.

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Document.aspx>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.



SGS-CSTC Standards Technical Services Co., Ltd.  
Guangzhou Branch

Report No.: GZEM180600361801  
Page: 2 of 60

Revision Record				
Version	Chapter	Date	Modifier	Remark
01		2018-07-13		Original

Authorized for issue by:			
Tested By	 Jackson_Yuan /Project Engineer	2018-07-02 to 2018-07-05 Date	
Checked By	 Ricky_Liu /Reviewer	2018-07-13 Date	



## 2 Test Summary

Radio Spectrum Technical Requirement				
Item	Standard	Method	Requirement	Result
Antenna Requirement	47 CFR Part 15, Subpart C 15.247	N/A	47 CFR Part 15, Subpart C 15.203 & 15.247(c)	Pass
Other requirements Frequency Hopping Spread Spectrum System Hopping Sequence	47 CFR Part 15, Subpart C 15.247	N/A	47 CFR Part 15, Subpart C 15.247(a)(1),(g),(h)	Pass

Radio Spectrum Matter Part				
Item	Standard	Method	Requirement	Result
Conducted Emissions at AC Power Line (150kHz-30MHz)	47 CFR Part 15, Subpart C 15.247	ANSI C63.10 (2013) Section 6.2	47 CFR Part 15, Subpart C 15.207	Pass
Conducted Peak Output Power	47 CFR Part 15, Subpart C 15.247	ANSI C63.10 (2013) Section 7.8.5	47 CFR Part 15, Subpart C 15.247(b)(1)	Pass
20dB Bandwidth	47 CFR Part 15, Subpart C 15.247	ANSI C63.10 (2013) Section 7.8.7	47 CFR Part 15, Subpart C 15.247(a)(1)	Pass
Carrier Frequencies Separation	47 CFR Part 15, Subpart C 15.247	ANSI C63.10 (2013) Section 7.8.2	47 CFR Part 15, Subpart C 15.247a(1)	Pass
Hopping Channel Number	47 CFR Part 15, Subpart C 15.247	ANSI C63.10 (2013) Section 7.8.3	47 CFR Part 15, Subpart C 15.247a(1)(iii)	Pass
Dwell Time	47 CFR Part 15, Subpart C 15.247	ANSI C63.10 (2013) Section 7.8.4	47 CFR Part 15, Subpart C 15.247a(1)(iii)	Pass
Conducted Band Edges Measurement	47 CFR Part 15, Subpart C 15.247	ANSI C63.10 (2013) Section 7.8.6	47 CFR Part 15, Subpart C 15.247(d)	Pass
Conducted Spurious Emissions	47 CFR Part 15, Subpart C 15.247	ANSI C63.10 (2013) Section 7.8.8	47 CFR Part 15, Subpart C 15.247(d)	Pass
Radiated Emissions which fall in the restricted bands	47 CFR Part 15, Subpart C 15.247	ANSI C63.10 (2013) Section 6.10.5	47 CFR Part 15, Subpart C 15.205 & 15.209	Pass
Radiated Spurious Emissions	47 CFR Part 15, Subpart C 15.247	ANSI C63.10 (2013) Section 6.4,6.5,6.6	47 CFR Part 15, Subpart C 15.205 & 15.209	Pass



✧ **Declaration of EUT Family Grouping:**

Model No.: LWB5801-C, LWB6801-C

According to the declaration from the applicant, the electrical circuit design, layout, components used and internal wiring were identical for all models, but different in model number and colour of the enclosure.

Therefore only one model **LWB5801-C** was tested in this report.



### 3 Contents

	Page
1 Cover Page.....	1
2 Test Summary.....	3
3 Contents.....	5
4 General Information .....	7
4.1 Details of E.U.T.....	7
4.2 Environment parameter .....	7
4.3 Description of Support Units .....	9
4.4 Measurement Uncertainty.....	9
4.5 Test Location .....	9
4.6 Test Facility.....	10
4.7 Deviation from Standards .....	11
4.8 Abnormalities from Standard Conditions .....	11
5 Equipment List.....	12
6 Radio Spectrum Technical Requirement .....	16
6.1 Antenna Requirement.....	16
6.1.1 Test Requirement:.....	16
6.1.2 Conclusion.....	16
6.2 Other requirements Frequency Hopping Spread Spectrum System Hopping Sequence .....	17
6.2.1 Test Requirement:.....	17
6.2.2 Conclusion.....	17
7 Radio Spectrum Matter Test Results.....	18
7.1 Conducted Emissions at AC Power Line (150kHz-30MHz).....	18
7.1.1 E.U.T. Operation.....	18
7.1.2 Test Setup Diagram.....	18
7.1.3 Measurement Procedure and Data .....	19
7.2 Conducted Peak Output Power .....	22
7.2.1 E.U.T. Operation.....	22
7.2.2 Test Setup Diagram.....	22
7.2.3 Measurement Procedure and Data .....	22
7.3 20dB Bandwidth.....	23
7.3.1 E.U.T. Operation.....	23
7.3.2 Test Setup Diagram.....	23
7.3.3 Measurement Procedure and Data .....	23
7.4 Carrier Frequencies Separation.....	24
7.4.1 E.U.T. Operation.....	24
7.4.2 Test Setup Diagram.....	24
7.4.3 Measurement Procedure and Data .....	24
7.5 Hopping Channel Number .....	25
7.5.1 E.U.T. Operation.....	25
7.5.2 Test Setup Diagram.....	25
7.5.3 Measurement Procedure and Data .....	25
7.6 Dwell Time .....	26
7.6.1 E.U.T. Operation.....	26



**SGS-CSTC Standards Technical Services Co., Ltd.**  
**Guangzhou Branch**

Report No.: GZEM180600361801

Page: 6 of 60

7.6.2	Test Setup Diagram.....	26
7.6.3	Measurement Procedure and Data .....	26
7.7	Conducted Band Edges Measurement.....	27
7.7.1	E.U.T. Operation.....	27
7.7.2	Test Setup Diagram.....	27
7.7.3	Measurement Procedure and Data .....	27
7.8	Conducted Spurious Emissions.....	28
7.8.1	E.U.T. Operation.....	28
7.8.2	Test Setup Diagram.....	28
7.8.3	Measurement Procedure and Data .....	28
7.9	Radiated Emissions which fall in the restricted bands.....	29
7.9.1	E.U.T. Operation.....	30
7.9.2	Test Setup Diagram.....	30
7.9.3	Measurement Procedure and Data .....	31
7.10	Radiated Spurious Emissions.....	34
7.10.1	E.U.T. Operation .....	35
7.10.2	Test Setup Diagram .....	35
7.10.3	Measurement Procedure and Data.....	36
<b>8</b>	<b>Appendix .....</b>	<b>41</b>
8.1	Appendix 15.247 .....	41



## 4 General Information

### 4.1 Details of E.U.T.

Power Supply:	DC 5 V Charged by AC/DC adapter with Micro USB ports
Test Voltage:	DC 5V
Cable:	DC input ports (unshielded, <3m)
Antenna Gain	3 dBi
Antenna Type	RP-SMA Connector
Modulation Type	GFSK
Number of Channels	20
Operation Frequency	2410MHz to 2477MHz
Spectrum Spread Technology	Frequency Hopping Spread Spectrum(FHSS)
Software Version	SecureCRT Portable V7.0.0.326

### 4.2 Environment parameter

Environment Parameter	Selected Values During Tests	
Relative Humidity	Ambient	
Value	Temperature(°C)	Voltage(V)
TNVN	25	5
TLVN	-10	5
THVN	45	5

Note:

VN:	Normal Voltage
TN:	Normal Temperature
TL:	Low Extreme Test Temperature
TH:	High Extreme Test Temperature



**SGS-CSTC Standards Technical Services Co., Ltd.**  
**Guangzhou Branch**

Report No.: GZEM180600361801  
Page: 8 of 60

Operation Frequency each of channel							
Channel	Frequency	Channel	Frequency	Channel	Frequency	Channel	Frequency
1	2410MHz	6	2428MHz	11	2445MHz	16	2463MHz
2	2413MHz	7	2431MHz	12	2449MHz	17	2466MHz
3	2417MHz	8	2435MHz	13	2452MHz	18	2470MHz
4	2421MHz	9	2438MHz	14	2456MHz	19	2473MHz
5	2424MHz	10	2442MHz	15	2459MHz	20	2477MHz

Using test software was control EUT work in continuous transmitter and receiver mode, and select test channel as below:

Channel	Frequency
The lowest channel (CH1)	2410MHz
The middle channel (CH11)	2445MHz
The highest channel (CH20)	2477MHz





#### 4.3 Description of Support Units

Description	Manufacturer	Model No.	Serial No.
Laptop	Lenovo	T430u	REF. No.SEA1800
AC/DC adapter	SGS	DC 5V	REF. No.SEA0500
Monitor	MITSUBISHI ELECTRIC	MDL23ICV	1X201244AC
Mouse	SGS	SGS	None
Keyboard	SGS	SGS	None
DVR	Raysharp	LHWF1006-D	None

#### 4.4 Measurement Uncertainty

No.	Item	Measurement Uncertainty
1	Radio Frequency	$\pm 5.5 \times 10^{-8}$
2	Duty cycle	$\pm 0.57\%$
3	Occupied Bandwidth	$\pm 3\%$
4	RF Conducted power	$\pm 0.68\text{dB}$
5	RF Power Density	$\pm 1.50\text{dB}$
6	Conducted Spurious Emissions	$\pm 1.04\text{dB}$
7	RF Radiated Power	$\pm 4.5\text{dB}$ (below 1GHz)
8	RF Radiated Power Radiated Spurious Emission Test	$\pm 4.8\text{dB}$ (above 1GHz)
		$\pm 4.5\text{dB}$ (30MHz-1GHz)
9	Radiated Spurious Emission Test Temperature	$\pm 4.8\text{dB}$ (1GHz-18GHz)
		$\pm 0.4^\circ\text{C}$
10	Humidity	$\pm 1.3\%$
11	Supply Voltages	$\pm 1.5\%$
12	Time	$\pm 3\%$

#### 4.5 Test Location

All tests were performed at:

SGS-CSTC Standards Technical Services Co., Ltd., Guangzhou Branch EMC Laboratory,  
198 Kezhu Road, Sciencetech Park, Guangzhou Economic & Technology Development District,  
Guangzhou, China 510663

Tel: +86 20 82155555 Fax: +86 20 82075059

No tests were sub-contracted.



## 4.6 Test Facility

The test facility is recognized, certified, or accredited by the following organizations:

### ● NVLAP (Lab Code: 200611-0)

SGS-CSTC Standards Technical Services Co., Ltd., Guangzhou EMC Laboratory is accredited by the National Voluntary Laboratory Accreditation Program (NVLAP/NIST). NVLAP Code: 200611-0.

The report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, or any agency of the Federal Government.

### ● ACMA

SGS-CSTC Standards Technical Services Co., Ltd., EMC Laboratory can also perform testing for the Australian C-Tick mark as a result of our NVLAP accreditation.

### ● SGS UK(Certificate No.: 32), SGS-TUV SAARLAND and SGS-FIMKO

Have approved SGS-CSTC Standards Technical Services Co., Ltd., EMC Laboratory as a supplier of EMC TESTING SERVICES and SAFETY TESTING SERVICES.

### ● CNAS (Lab Code: L0167)

SGS-CSTC Standards Technical Services Co., Ltd., EMC Laboratory has been assessed and in compliance with CNAS-CL01:2006 accreditation criteria for testing laboratories (identical to

ISO/IEC 17025:2005 General Requirements) for the Competence of Testing Laboratories.

### ● FCC Recognized 2.948 Listed Test Firm(Registration No.: 282399)

SGS-CSTC Standards Technical Services Co., Ltd., EMC Laboratory has been registered and fully described in a report filed with the (FCC) Federal Communications Commission. The acceptance letter from the FCC is maintained in our files. Registration 282399, May 31, 2002.

### ● FCC Recognized Accredited Test Firm(Registration No.: 486818)

SGS-CSTC Standards Technical Services Co., Ltd., EMC Laboratory has been accredited and fully described in a report filed with the (FCC) Federal Communications Commission. The acceptance letter from the FCC is maintained in our files. Designation Number: CN5016, Test Firm Registration Number: 486818, Jul 13, 2017.

### ● Industry Canada (Registration No.: 4620B-1)

The 3m/10m Alternate Semi-anechoic chamber of SGS-CSTC Standards Technical Services Co., Ltd., has been registered by Certification and Engineering of Industry Canada for radio equipment testing with Registration No. 4620B-1.

### ● VCCI (Registration No.: R-2460, C-2584, G-449 and T-1179)

The 10m Semi-anechoic chamber and Shielded Room of SGS-CSTC Standards Technical Services Co., Ltd. have been registered in accordance with the Regulations for Voluntary Control Measures with Registration No.: R-2460, C-2584, G-449 and T-1179 respectively.

### ● CBTL (Lab Code: TL129)

SGS-CSTC Standards Technical Services Co., Ltd., E&E Laboratory has been assessed and fully comply with the requirements of ISO/IEC 17025:2005, the Basic Rules, IECEE 01 and Rules of procedure IECEE 02, and the relevant IECEE CB-Scheme Operational documents.



#### **4.7 Deviation from Standards**

None

#### **4.8 Abnormalities from Standard Conditions**

None



## 5 Equipment List

Conducted Peak Output Power					
Equipment	Manufacturer	Model No	Inventory No	Cal Date	Cal Due Date
EXA Signal Analyzer	AgilentTechnologies	N9010A	EMC2138	2017-11-15	2018-11-14
6dB Attenuator	HP	8491A	EMC2062	2018-04-04	2020-04-03
Test Software JS1120-3	HangTianXing	V2.6	GZE100-69	N/A	N/A

20dB Bandwidth					
Equipment	Manufacturer	Model No	Inventory No	Cal Date	Cal Due Date
EXA Signal Analyzer	AgilentTechnologies	N9010A	EMC2138	2017-11-15	2018-11-14
6dB Attenuator	HP	8491A	EMC2062	2018-04-04	2020-04-03
Test Software JS1120-3	HangTianXing	V2.6	GZE100-69	N/A	N/A

Carrier Frequencies Separation					
Equipment	Manufacturer	Model No	Inventory No	Cal Date	Cal Due Date
EXA Signal Analyzer	AgilentTechnologies	N9010A	EMC2138	2017-11-15	2018-11-14
6dB Attenuator	HP	8491A	EMC2062	2018-04-04	2020-04-03
Test Software JS1120-3	HangTianXing	V2.6	GZE100-69	N/A	N/A

Hopping Channel Number					
Equipment	Manufacturer	Model No	Inventory No	Cal Date	Cal Due Date
EXA Signal Analyzer	AgilentTechnologies	N9010A	EMC2138	2017-11-15	2018-11-14
6dB Attenuator	HP	8491A	EMC2062	2018-04-04	2020-04-03
Test Software JS1120-3	HangTianXing	V2.6	GZE100-69	N/A	N/A

Dwell Time					
Equipment	Manufacturer	Model No	Inventory No	Cal Date	Cal Due Date
EXA Signal Analyzer	AgilentTechnologies	N9010A	EMC2138	2017-11-15	2018-11-14
6dB Attenuator	HP	8491A	EMC2062	2018-04-04	2020-04-03
Test Software JS1120-3	HangTianXing	V2.6	GZE100-69	N/A	N/A



# SGS-CSTC Standards Technical Services Co., Ltd. Guangzhou Branch

Report No.: GZEM180600361801  
Page: 13 of 60

Conducted Band Edges Measurement					
Equipment	Manufacturer	Model No	Inventory No	Cal Date	Cal Due Date
MXA Signal Analyzer	AgilentTechnologies	N9020A	SEM004-10	2018-03-10	2019-03-09
ESG Vector Signal Generator	Keysight	E4438C	SEM006-03	2018-04-10	2019-04-10
EXG Analog Signal Generator	AgilentTechnologies	N5171B	SEM006-04	2017-07-26	2020-07-25
Power Meter	AgilentTechnologies	U2021XA_C h2	SEM009-02	2017-09-19	2018-09-18
Power Meter	AgilentTechnologies	U2021XA_C h3	SEM009-03	2017-09-19	2018-09-18
EXA Signal Analyzer	AgilentTechnologies	N9010A	EMC2138	2017-11-15	2018-11-14
6dB Attenuator	HP	8491A	EMC2062	2018-04-04	2020-04-03
Test Software JS1120-3	HangTianXing	V2.6	GZE100-69	N/A	N/A

Conducted Spurious Emissions					
Equipment	Manufacturer	Model No	Inventory No	Cal Date	Cal Due Date
EXA Signal Analyzer	AgilentTechnologies	N9010A	EMC2138	2017-11-15	2018-11-14
6dB Attenuator	HP	8491A	EMC2062	2018-04-04	2020-04-03
Test Software JS1120-3	HangTianXing	V2.6	GZE100-69	N/A	N/A

Conducted Emissions at AC Power Line (150kHz-30MHz)					
Equipment	Manufacturer	Model No	Inventory No	Cal Date	Cal Due Date
Shielding Room	Zhong Yu	8m x 3m x 3.8m	EMC0306	N/A	N/A
Two-Line V-Netwok	R&S	ENV216	EMC0118	2018-01-19	2019-01-18
LISN	SCHAFFNER CHASE	MN2050D/1	EMC0102	2017-09-20	2018-09-19
EMI Test Receiver	Rohde & Schwarz	ESCS30	EMC0506	2017-11-27	2018-11-26
Coaxial Cable	HangTianXing	2m	EMC0107	2016-07-24	2018-07-23
Voltage Probe	SGS	N/A	EMC0106	2018-04-04	2020-04-03
Test Software E3c	Audix	Ver. 5.4.1221b	GZE100-62	N/A	N/A



**SGS-CSTC Standards Technical Services Co., Ltd.**  
**Guangzhou Branch**

Report No.: GZEM180600361801

Page: 14 of 60

<b>Radiated Emissions which fall in the restricted bands</b>					
<b>Equipment</b>	<b>Manufacturer</b>	<b>Model No</b>	<b>Inventory No</b>	<b>Cal Date</b>	<b>Cal Due Date</b>
EMI Test Receiver	Rohde & Schwarz	ESIB26	EMC0522	2018-01-19	2019-01-18
EMI Test Receiver	Rohde & Schwarz	ESCI	EMC0056	2018-01-19	2019-01-18
Chamber cable	HangTianXing	N/A	EMC0542	2017-06-30	2019-06-30
Trilog Broadband Antenna 30MHz-1GHz	SCHWARZBECKME SS-ELEKTRONIK	VULB 9160	EMC2025	2016-09-08	2019-09-07
Bi-log Type Antenna	Schaffner -Chase	CBL6112B	EMC0524	2016-09-08	2019-09-07
Bi-log Type Antenna	Schaffner -Chase	CBL6143	EMC0519	2017-05-04	2020-05-03
Horn Antenna 1GHz-18GHz	SCHWARZBECK MESS-ELEKTRONIK	BBHA 9120D	EMC2026	2016-09-09	2019-09-08
1GHz-26.5 GHz Pre-Amplifier	Agilent	8449B	EMC0521	2018-01-08	2019-01-07
Amplifier	HP	8447F	EMC2065	2018-06-01	2019-05-31
Pre-Amplifier MH648A	ANRITSU CORP	MH648A	EMC2086	2017-11-20	2018-11-19
Active Loop Antenna	EMCO	6502	EMC0523	2018-02-24	2019-02-23
High Pass Filter(915MHz)	FSY MICROWAVE	HM1465-9SS	EMC2079	2018-01-19	2019-01-18
2.4GHz Filter	Micro-Tronics	BRM 50702	EMC2069	2018-01-08	2019-01-07
10m Semi-Anechoic Chamber	ETS	N/A	EMC0530	2017-06-18	2019-06-18
966 Anechoic Chamber	C.R.T	9m x 6m x 6m	EMC2142	2017-11-29	2018-11-28
MXE EMI Receiver	Keysight	N9038A	EMC2139	2017-11-15	2018-11-14
EXA Signal Analyzer	Keysight	N9010A	EMC2138	2017-11-15	2018-11-14
Test Software E3	Audix	Ver.6.120110a	GZE100-61	N/A	N/A



# SGS-CSTC Standards Technical Services Co., Ltd. Guangzhou Branch

Report No.: GZEM180600361801  
Page: 15 of 60

Radiated Spurious Emissions					
Equipment	Manufacturer	Model No	Inventory No	Cal Date	Cal Due Date
EMI Test Receiver	Rohde & Schwarz	ESIB26	EMC0522	2018-01-19	2019-01-18
EMI Test Receiver	Rohde & Schwarz	ESCI	EMC0056	2018-01-19	2019-01-18
Chamber cable	HangTianXing	N/A	EMC0542	2017-06-30	2019-06-30
Trilog Broadband Antenna 30MHz-1GHz	SCHWARZBECKME SS-ELEKTRONIK	VULB 9160	EMC2025	2016-09-08	2019-09-07
Bi-log Type Antenna	Schaffner -Chase	CBL6112B	EMC0524	2016-09-08	2019-09-07
Bi-log Type Antenna	Schaffner -Chase	CBL6143	EMC0519	2017-05-04	2020-05-03
Horn Antenna 1GHz-18GHz	SCHWARZBECK MESS-ELEKTRONIK	BBHA 9120D	EMC2026	2016-09-09	2019-09-08
1GHz-26.5 GHz Pre-Amplifier	Agilent	8449B	EMC0521	2018-01-08	2019-01-07
Amplifier	HP	8447F	EMC2065	2018-06-01	2019-05-31
Pre-Amplifier MH648A	ANRITSU CORP	MH648A	EMC2086	2017-11-20	2018-11-19
Active Loop Antenna	EMCO	6502	EMC0523	2018-02-24	2019-02-23
High Pass Filter(915MHz)	FSY MICROWAVE	HM1465-9SS	EMC2079	2018-01-19	2019-01-18
2.4GHz Filter	Micro-Tronics	BRM 50702	EMC2069	2018-01-08	2019-01-07
10m Semi-Anechoic Chamber	ETS	N/A	EMC0530	2017-06-18	2019-06-18
966 Anechoic Chamber	C.R.T	9m x 6m x 6m	EMC2142	2017-11-29	2018-11-28
MXE EMI Receiver	Keysight	N9038A	EMC2139	2017-11-15	2018-11-14
EXA Signal Analyzer	Keysight	N9010A	EMC2138	2017-11-15	2018-11-14
Test Software E3	Audix	Ver.6.120110a	GZE100-61	N/A	N/A

General used equipment					
Equipment	Manufacturer	Model No	Inventory No	Cal Date	Cal Due Date
DMM	Fluke	73	EMC0006	2017-07-26	2018-07-25
DMM	Fluke	73	EMC0007	2017-07-26	2018-07-25



## 6 Radio Spectrum Technical Requirement

### 6.1 Antenna Requirement

#### 6.1.1 Test Requirement:

47 CFR Part 15, Subpart C 15.203 & 15.247(c)

#### 6.1.2 Conclusion

Standard Requirement:

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

15.247(b) (4) requirement:

The conducted output power limit specified in paragraph (b) of this section is based on the use of antennas with directional gains that do not exceed 6 dBi. Except as shown in paragraph (c) of this section, if transmitting antennas of directional gain greater than 6 dBi are used, the conducted output power from the intentional radiator shall be reduced below the stated values in paragraphs (b)(1), (b)(2), and (b)(3) of this section, as appropriate, by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

EUT Antenna:

The antenna is an antenna that uses a unique coupling to the intentional radiator as below and no consideration of replacement. The best case gain of the antenna is 3dBi.



**Test result: The unit does meet the FCC requirements.**





## **6.2 Other requirements Frequency Hopping Spread Spectrum System Hopping Sequence**

### **6.2.1 Test Requirement:**

47 CFR Part 15, Subpart C 15.247(a)(1),(g),(h)

### **6.2.2 Conclusion**

Standard Requirement:

The system shall hop to channel frequencies that are selected at the system hopping rate from a Pseudorandom ordered list of hopping frequencies. Each frequency must be used equally on the average by each transmitter. The system receivers shall have input bandwidths that match the hopping channel bandwidths of their corresponding transmitters and shall shift frequencies in synchronization with the transmitted signals.

Frequency hopping spread spectrum systems are not required to employ all available hopping channels during each transmission. However, the system, consisting of both the transmitter and the receiver, must be designed to comply with all of the regulations in this section should the transmitter be presented with a continuous data (or information) stream. In addition, a system employing short transmission bursts must comply with the definition of a frequency hopping system and must distribute its transmissions over the minimum number of hopping channels specified in this section.

The incorporation of intelligence within a frequency hopping spread spectrum system that permits the system to recognize other users within the spectrum band so that it individually and independently chooses and adapts its hopsets to avoid hopping on occupied channels is permitted. The coordination of frequency hopping systems in any other manner for the express purpose of avoiding the simultaneous occupancy of individual hopping frequencies by multiple transmitters is not permitted.

Compliance for section 15.247(a)(1):

According to Technical Specification, the pseudorandom sequence may be generated in transmitter before hopping to another channel so that the receiver can follow.

Compliance for section 15.247(g):

According to Technical Specification, the system transmits the packet with the pseudorandom hopping frequency with a continuous data and the short burst transmission is also transmitted under the frequency hopping system with the pseudorandom hopping frequency system.

Compliance for section 15.247(h):

According to Technical specification, the system incorporates with an adaptive system to detect other user within the spectrum bands.

## 7 Radio Spectrum Matter Test Results

### 7.1 Conducted Emissions at AC Power Line (150kHz-30MHz)

Test Requirement 47 CFR Part 15, Subpart C 15.207  
Test Method: ANSI C63.10 (2013) Section 6.2  
Limit:

Frequency of emission(MHz)	Conducted limit(dBμV)	
	Quasi-peak	Average
0.15-0.5	66 to 56*	56 to 46*
0.5-5	56	46
5-30	60	50

\*Decreases with the logarithm of the frequency.


#### 7.1.1 E.U.T. Operation

Operating Environment:

Temperature: 24.8 °C Humidity: 48 % RH Atmospheric Pressure: 1020 mbar

Test mode b:Charge + TX\_non-Hop mode\_Keep the EUT in charging and continuously transmitting mode with GFSK modulation.

#### 7.1.2 Test Setup Diagram

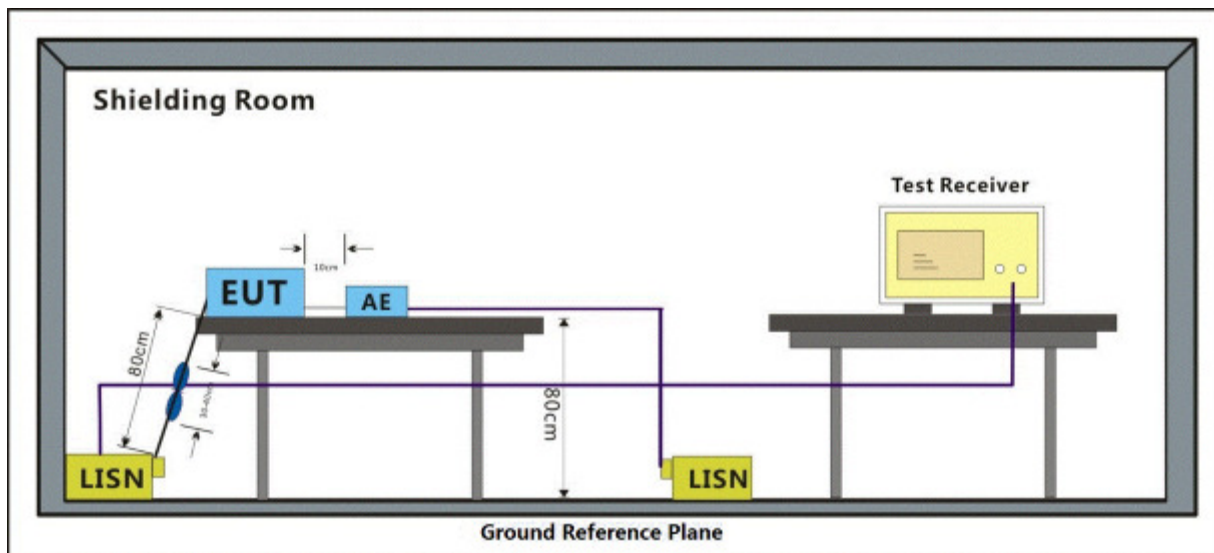




### **7.1.3 Measurement Procedure and Data**

- 1) The mains terminal disturbance voltage test was conducted in a shielded room.
- 2) The EUT was connected to AC power source through a LISN 1 (Line Impedance Stabilization Network) which provides a 50ohm/50μH + 5ohm linear impedance. The power cables of all other units of the EUT were connected to a second LISN 2, which was bonded to the ground reference plane in the same way as the LISN 1 for the unit being measured. A multiple socket outlet strip was used to connect multiple power cables to a single LISN provided the rating of the LISN was not exceeded.
- 3) The tabletop EUT was placed upon a non-metallic table 0.8m above the ground reference plane. And for floor-standing arrangement, the EUT was placed on the horizontal ground reference plane,
- 4) The test was performed with a vertical ground reference plane. The rear of the EUT shall be 0.4 m from the vertical ground reference plane. The vertical ground reference plane was bonded to the horizontal ground reference plane. The LISN 1 was placed 0.8 m from the boundary of the unit under test and bonded to a ground reference plane for LISNs mounted on top of the ground reference plane. This distance was between the closest points of the LISN 1 and the EUT. All other units of the EUT and associated equipment was at least 0.8 m from the LISN 2.
- 5) In order to find the maximum emission, the relative positions of equipment and all of the interface cables must be changed according to ANSI C63.10 on conducted measurement.

Remark: LISN=Read Level+ Cable Loss+ LISN Factor


Mode:b; Line:Live Line

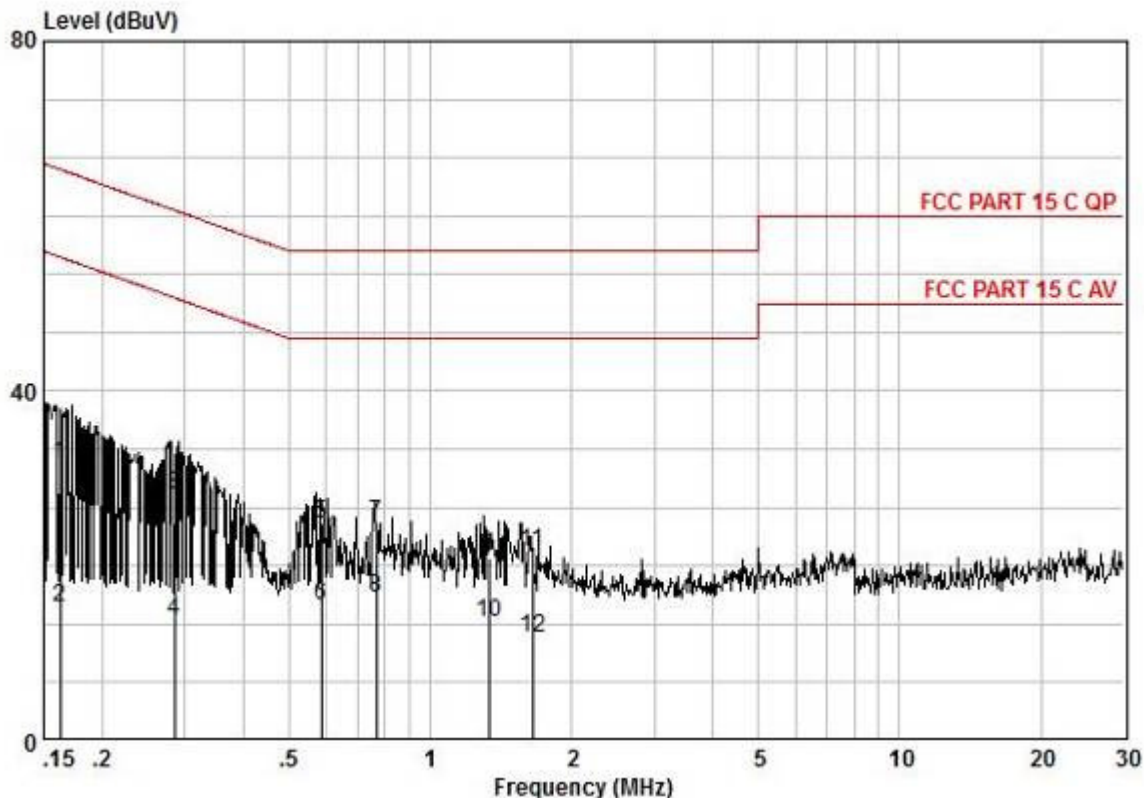

Pol :LIVE  
No :  
Model :

Frequency MHz	read level dBuV	Cable Loss dB	LISN Factor dB	Measured level dBuV	Limit Line dBuV	Over limit dB	Remark
0,16	21,90	0,10	9,65	31,65	65,34	-33,69	QP
0,16	5,48	0,10	9,65	15,23	55,34	-40,11	AVERAGE
0,28	18,37	0,14	9,64	28,15	60,68	-32,53	QP
0,28	3,90	0,14	9,64	13,68	50,68	-37,00	AVERAGE
0,59	14,92	0,22	9,64	24,79	56,00	-31,21	QP
0,59	5,64	0,22	9,64	15,51	46,00	-30,49	AVERAGE
0,77	15,02	0,26	9,65	24,93	56,00	-31,07	QP
0,77	6,47	0,26	9,65	16,38	46,00	-29,62	AVERAGE
1,33	10,99	0,30	9,66	20,95	56,00	-35,05	QP
1,33	3,48	0,30	9,66	13,44	46,00	-32,56	AVERAGE
1,65	11,64	0,33	9,66	21,64	56,00	-34,36	QP
1,65	1,85	0,33	9,66	11,85	46,00	-34,15	AVERAGE

Mode:b; Line:Neutral Line

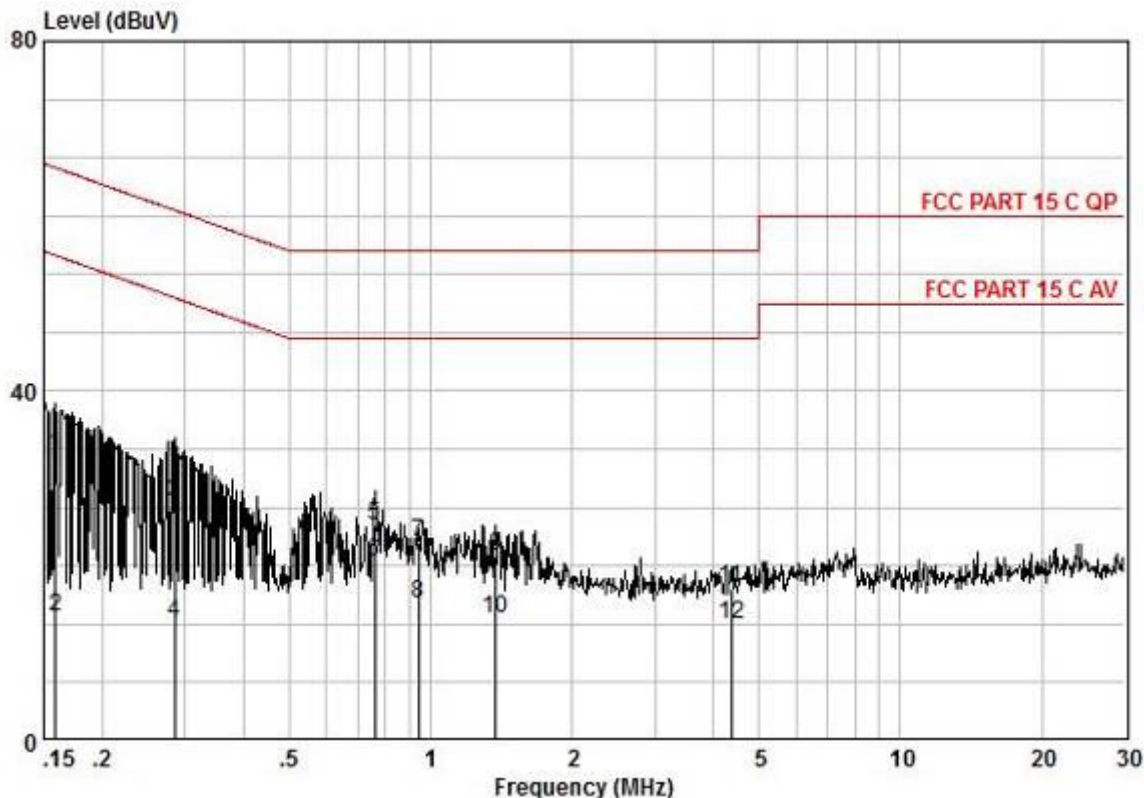

Pol : NEUTRAL  
No :  
Model :

Frequency MHz	read level dBuV	Cable Loss dB	LISN Factor dB	Measured level dBuV	Limit Line dBuV	Over limit dB	Remark
0.16	22.91	0.10	9.67	32.68	65.52	-32.84	QP
0.16	4.37	0.10	9.67	14.14	55.52	-41.38	AVERAGE
0.28	17.52	0.14	9.66	27.32	60.68	-33.36	QP
0.28	3.80	0.14	9.66	13.60	50.68	-37.08	AVERAGE
0.76	14.75	0.26	9.67	24.68	56.00	-31.32	QP
0.76	10.57	0.26	9.67	20.50	46.00	-25.50	AVERAGE
0.94	12.68	0.29	9.67	22.65	56.00	-33.35	QP
0.94	5.82	0.29	9.67	15.79	46.00	-30.21	AVERAGE
1.37	11.21	0.30	9.68	21.19	56.00	-34.81	QP
1.37	3.95	0.30	9.68	13.93	46.00	-32.07	AVERAGE
4.36	7.03	0.65	9.72	17.40	56.00	-38.60	QP
4.36	2.83	0.65	9.72	13.20	46.00	-32.80	AVERAGE

## 7.2 Conducted Peak Output Power

Test Requirement 47 CFR Part 15, Subpart C 15.247(b)(1)  
Test Method: ANSI C63.10 (2013) Section 7.8.5  
Limit:

Frequency range(MHz)	Output power of the intentional radiator(watt)
902-928	1 for $\geq 50$ hopping channels
	0.25 for $25 \leq$ hopping channels $< 50$
	1 for digital modulation
2400-2483.5	1 for $\geq 75$ non-overlapping hopping channels
	0.125 for all other frequency hopping systems
	1 for digital modulation
5725-5850	1 for frequency hopping systems and digital modulation


### 7.2.1 E.U.T. Operation

Operating Environment:

Temperature: 23.8 °C Humidity: 60.8 % RH Atmospheric Pressure: 1020 mbar

Test mode b:Charge + TX\_non-Hop mode\_Keep the EUT in charging and continuously transmitting mode with GFSK modulation.

### 7.2.2 Test Setup Diagram

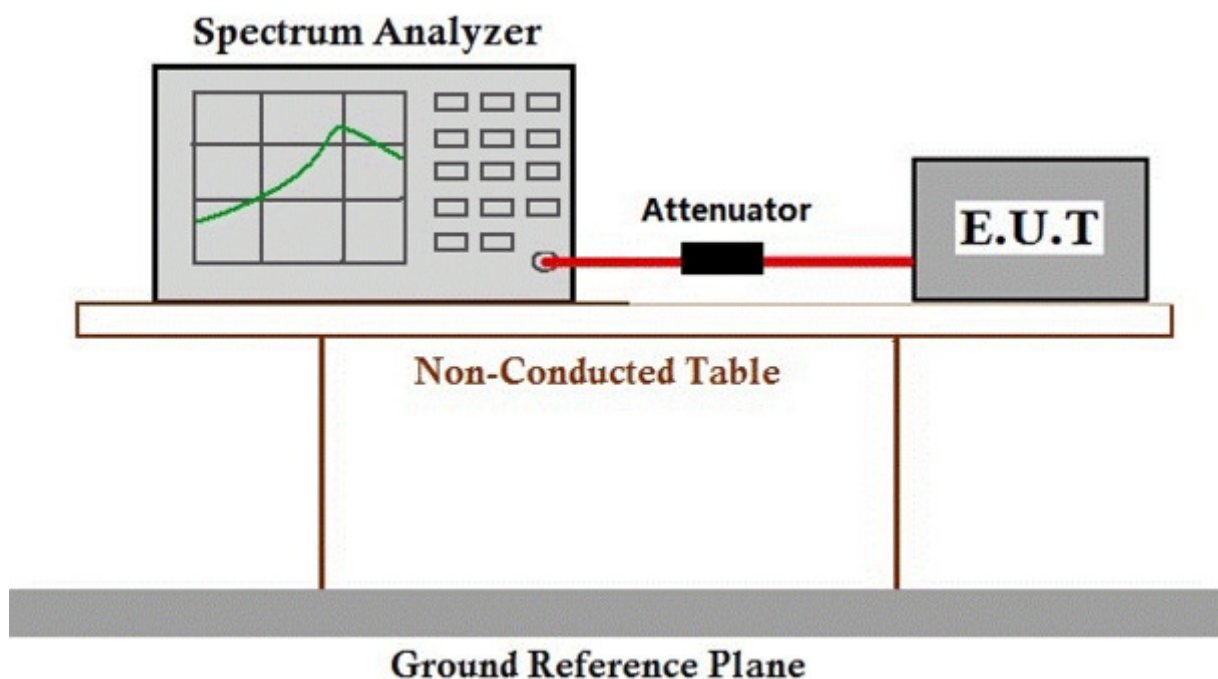

### 7.2.3 Measurement Procedure and Data

The detailed test data see: Appendix 15.247



### 7.3 20dB Bandwidth

Test Requirement 47 CFR Part 15, Subpart C 15.247(a)(1)

Test Method: ANSI C63.10 (2013) Section 7.8.7


#### 7.3.1 E.U.T. Operation

Operating Environment:

Temperature: 23.8 °C Humidity: 60.8 % RH Atmospheric Pressure: 1020 mbar

Test mode b:Charge + TX\_non-Hop mode\_Keep the EUT in charging and continuously transmitting mode with GFSK modulation.

#### 7.3.2 Test Setup Diagram

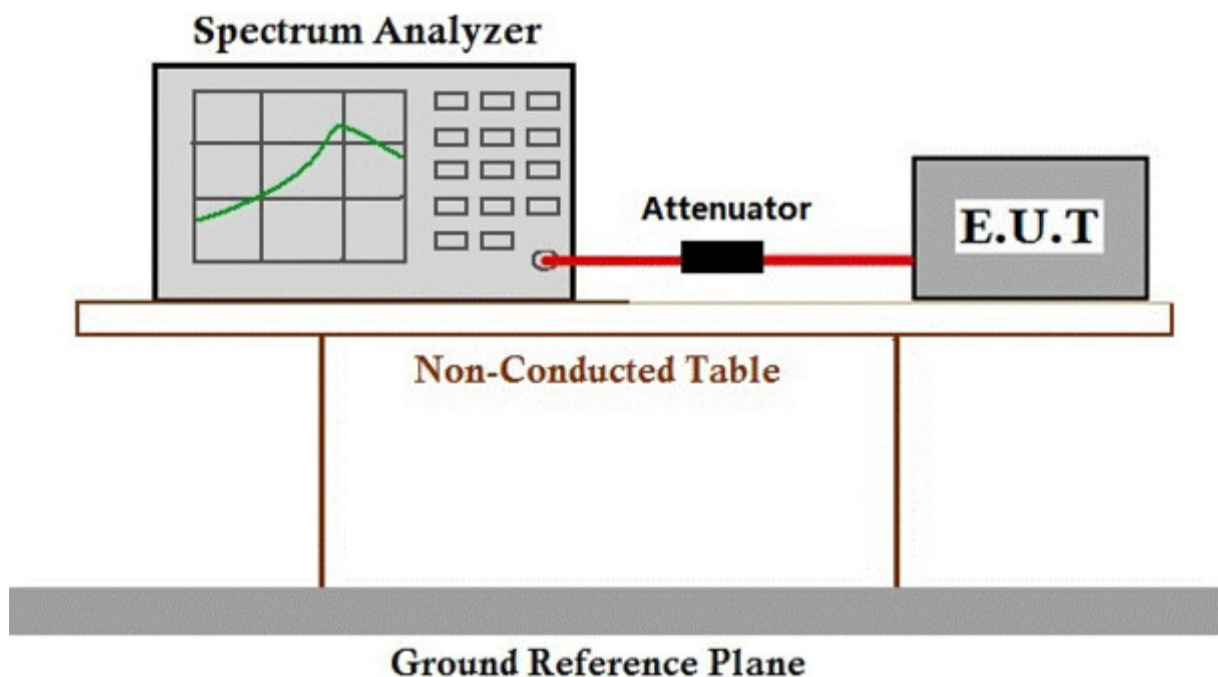

#### 7.3.3 Measurement Procedure and Data

The detailed test data see: Appendix 15.247

## 7.4 Carrier Frequencies Separation

Test Requirement	47 CFR Part 15, Subpart C 15.247a(1)
Test Method:	ANSI C63.10 (2013) Section 7.8.2
Limit:	2/3 of the 20dB bandwidth base on the transmission power is less than 0.125W


### 7.4.1 E.U.T. Operation

Operating Environment:

Temperature: 23.8 °C Humidity: 60.8 % RH Atmospheric Pressure: 1020 mbar

Test mode a:TX\_Hop mode\_Keep the EUT in frequency hopping mode with GFSK modulation.

### 7.4.2 Test Setup Diagram

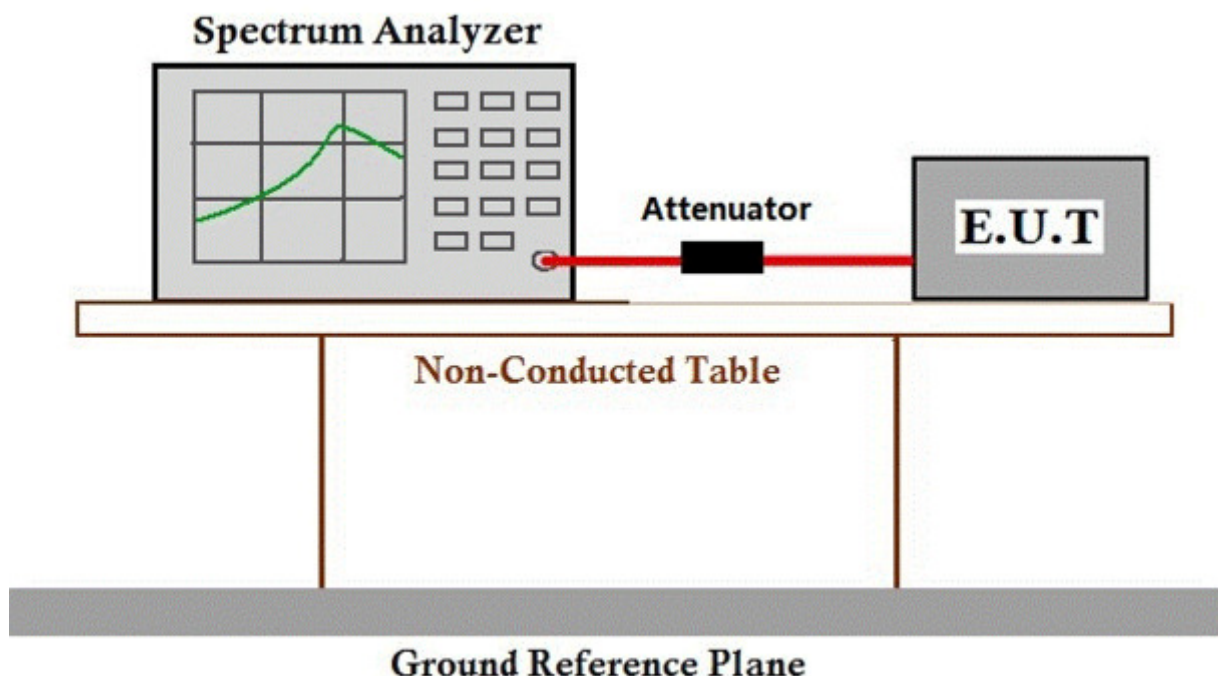

### 7.4.3 Measurement Procedure and Data

The detailed test data see: Appendix 15.247



## 7.5 Hopping Channel Number

Test Requirement 47 CFR Part 15, Subpart C 15.247a(1)(iii)  
Test Method: ANSI C63.10 (2013) Section 7.8.3  
Limit:


Frequency range(MHz)	Number of hopping channels (minimum)
902-928	50 for 20dB bandwidth <250kHz
	25 for 20dB bandwidth ≥250kHz
2400-2483.5	15
5725-5850	75

### 7.5.1 E.U.T. Operation

Operating Environment:

Temperature: 23.8 °C Humidity: 60.9 % RH Atmospheric Pressure: 1020 mbar  
Test mode a:TX\_Hop mode\_Keep the EUT in frequency hopping mode with GFSK modulation.

### 7.5.2 Test Setup Diagram

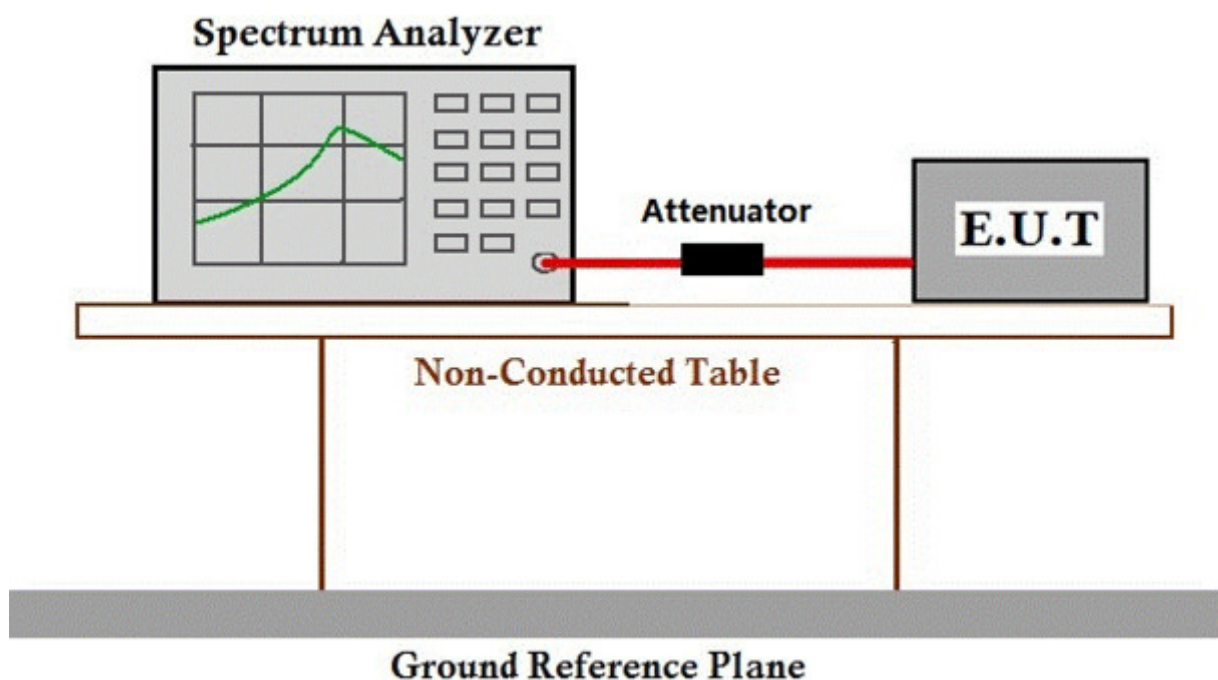

### 7.5.3 Measurement Procedure and Data

The detailed test data see: Appendix 15.247

## 7.6 Dwell Time

Test Requirement 47 CFR Part 15, Subpart C 15.247a(1)(iii)  
Test Method: ANSI C63.10 (2013) Section 7.8.4  
Limit:

Frequency(MHz)	Limit
902-928	0.4S within a 20S period(20dB bandwidth<250kHz)
	0.4S within a 10S period(20dB bandwidth≥250kHz)
2400-2483.5	0.4S within a period of 0.4S multiplied by the number of hopping channels
5725-5850	0.4S within a 30S period


### 7.6.1 E.U.T. Operation

Operating Environment:

Temperature: 23.8 °C Humidity: 60.9 % RH Atmospheric Pressure: 1020 mbar

Test mode a:TX\_Hop mode\_Keep the EUT in frequency hopping mode with GFSK modulation.

### 7.6.2 Test Setup Diagram

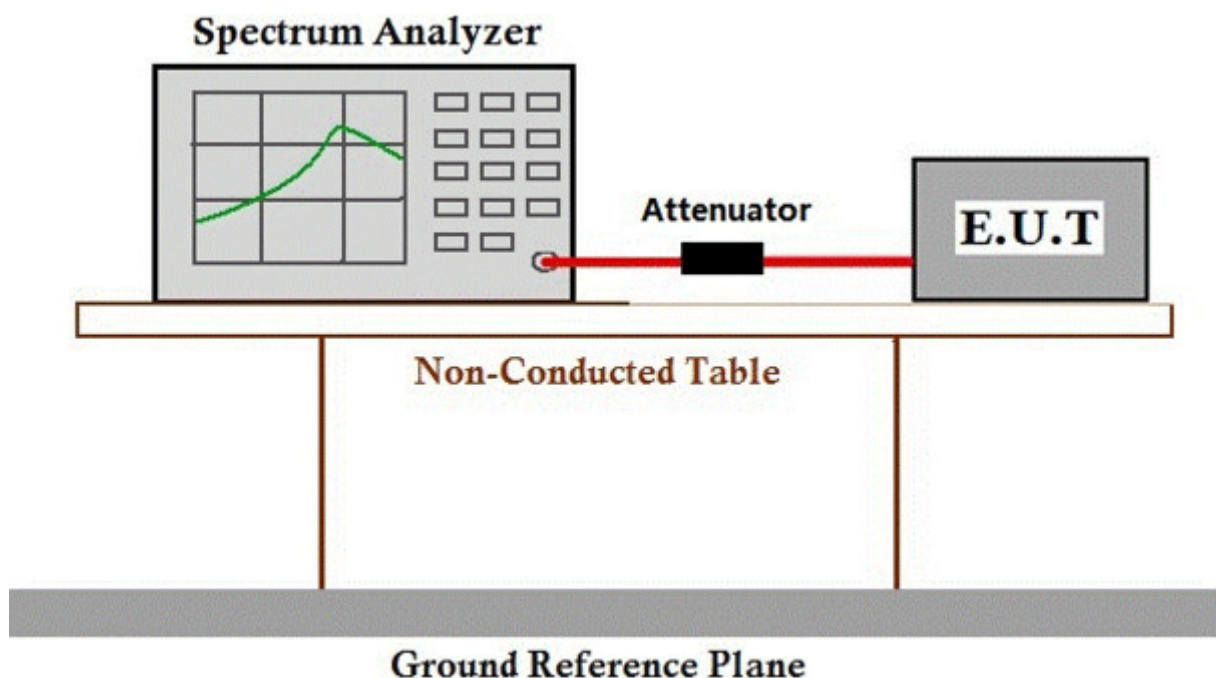

### 7.6.3 Measurement Procedure and Data

The detailed test data see: Appendix 15.247


## 7.7 Conducted Band Edges Measurement

Test Requirement	47 CFR Part 15, Subpart C 15.247(d)
Test Method:	ANSI C63.10 (2013) Section 7.8.6
Limit:	In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c))

### 7.7.1 E.U.T. Operation

Operating Environment:				
Temperature:	23.8 °C	Humidity:	60.9 % RH	Atmospheric Pressure: 1020 mbar
Test mode	a:TX Hop mode Keep the EUT in frequency hopping mode with GFSK modulation.			

### 7.7.2 Test Setup Diagram

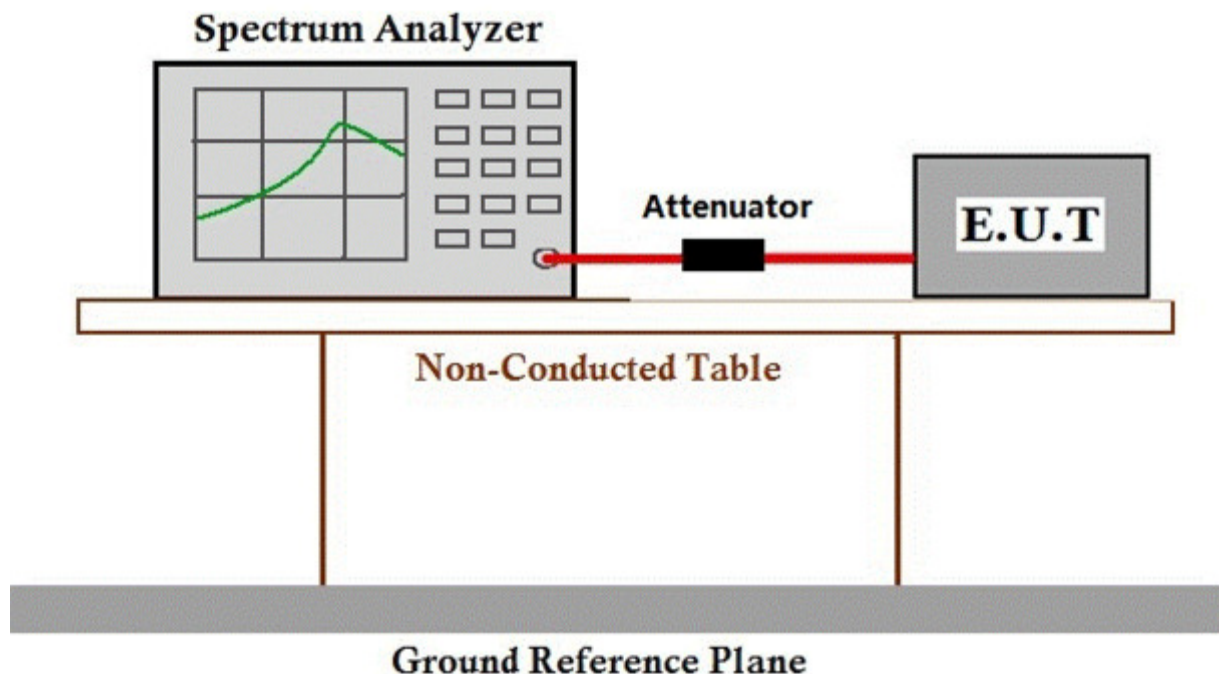

### 7.7.3 Measurement Procedure and Data

The detailed test data see: Appendix 15.247


## 7.8 Conducted Spurious Emissions

Test Requirement	47 CFR Part 15, Subpart C 15.247(d)
Test Method:	ANSI C63.10 (2013) Section 7.8.8
Limit:	In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c))

### 7.8.1 E.U.T. Operation

Operating Environment:				
Temperature:	23.8 °C	Humidity:	60.9 % RH	Atmospheric Pressure: 1020 mbar
Test mode	b:Charge + TX_non-Hop mode_Keep the EUT in charging and continuously transmitting mode with GFSK modulation.			

### 7.8.2 Test Setup Diagram

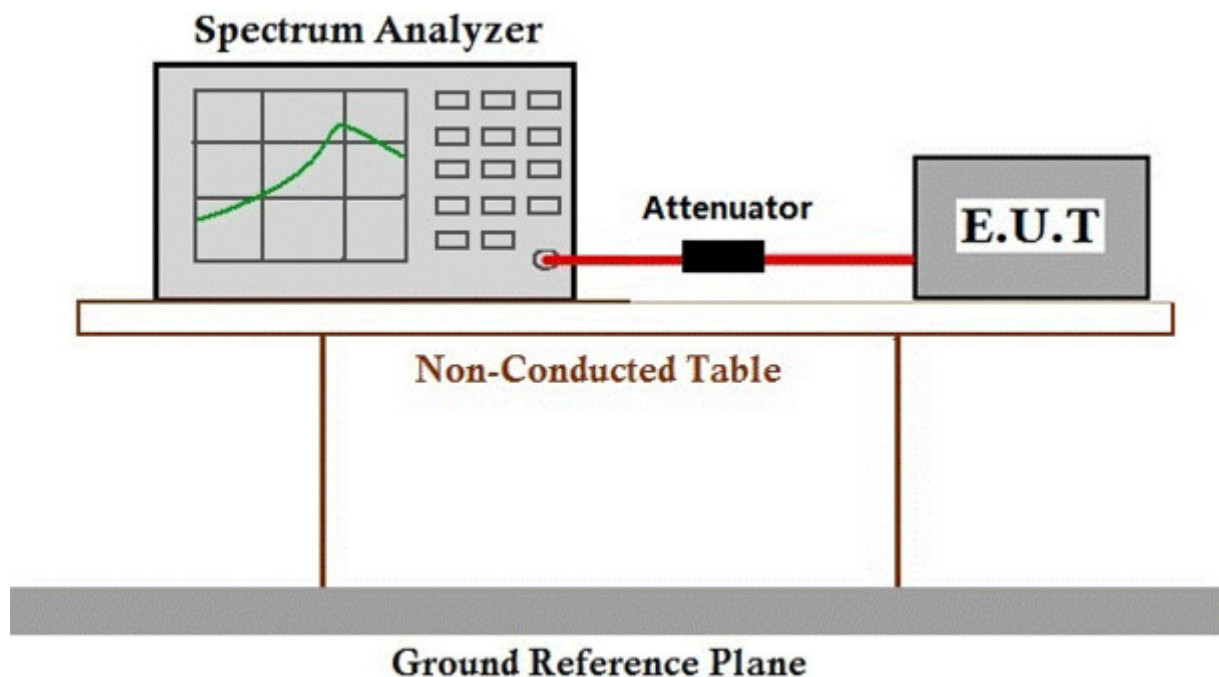

### 7.8.3 Measurement Procedure and Data

The detailed test data see: Appendix 15.247



## 7.9 Radiated Emissions which fall in the restricted bands

Test Requirement 47 CFR Part 15, Subpart C 15.205 & 15.209  
Test Method: ANSI C63.10 (2013) Section 6.10.5  
Measurement Distance: 3m  
Limit:

Frequency(MHz)	Field strength(microvolts/meter)	Measurement distance(meters)
0.009-0.490	2400/F(kHz)	300
0.490-1.705	24000/F(kHz)	30
1.705-30.0	30	30
30-88	100	3
88-216	150	3
216-960	200	3
Above 960	500	3

Remark: The emission limits shown in the above table are based on measurements employing a CISPR quasi-peak detector except for the frequency bands 9-90kHz, 110-490kHz and above 1000 MHz. Radiated emission limits in these three bands are based on measurements employing an average detector, the peak field strength of any emission shall not exceed the maximum permitted average limits specified above by more than 20 dB under any condition of modulation.






### 7.9.1 E.U.T. Operation

Operating Environment:

Temperature: 26 °C Humidity: 54 % RH Atmospheric Pressure: 1020 mbar

Test mode b:Charge + TX\_non-Hop mode\_Keep the EUT in charging and continuously transmitting mode with GFSK modulation.

### 7.9.2 Test Setup Diagram

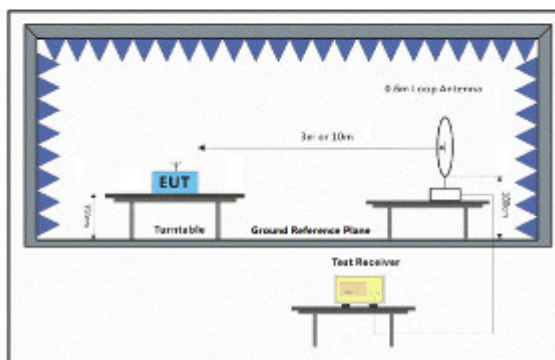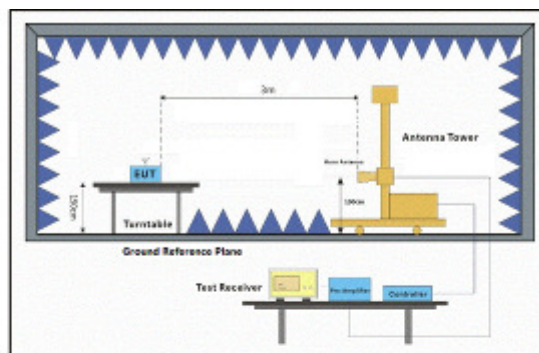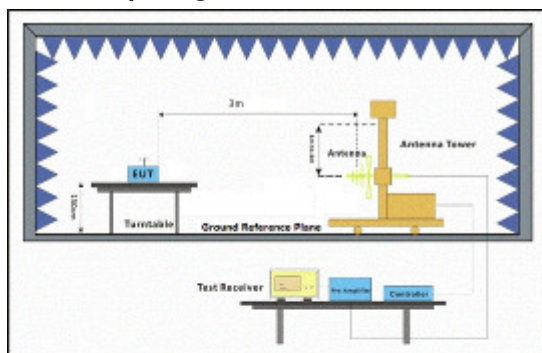

### 7.9.3 Measurement Procedure and Data

- a. For below 1GHz, the EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 or 10 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. For above 1GHz, the EUT was placed on the top of a rotating table 1.5 meters above the ground at a 3 meter fully-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- c. The EUT was set 3 or 10 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- d. The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- e. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters (for the test frequency of below 30MHz, the antenna was tuned to heights 1 meter) and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- f. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- g. If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.
- h. Test the EUT in the lowest channel, the middle channel, the Highest channel.
- i. The radiation measurements are performed in X, Y, Z axis positioning for Transmitting mode, and found the X axis positioning which it is the worst case.
- j. Repeat above procedures until all frequencies measured was complete.

Remark 1: Level= Read Level+ Cable Loss+ Antenna Factor- Preamplifier Factor

Remark 2: For frequencies above 1GHz, the field strength limits are based on average limits. However, the peak field strength of any emission shall not exceed the maximum permitted average limits specified above by more than 20 dB under any condition of modulation. For the emissions whose peak level is lower than the average limit, only the peak measurement is shown in the report.

Level=Read Level + Antenna Factor + Cable Loss - Preamplifier Factor

Mode:b; Polarization:Horizontal; Modulation:GFSK; ; Channel:Low

	Freq	ReadAntenna Level Factor	Cable Preamp Loss Factor	Level	Limit	Over	Pol/Phase	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB
1	2310.000	34.65	26.25	5.03	37.44	28.49	54.00	-25.51 HORIZONTAL Average
2	2310.000	46.52	26.25	5.03	37.44	40.36	74.00	-33.64 HORIZONTAL Peak
3	2390.000	34.47	26.43	4.88	37.42	28.36	54.00	-25.64 HORIZONTAL Average
4	2390.000	47.34	26.43	4.88	37.42	41.23	74.00	-32.77 HORIZONTAL Peak
5	2483.500	43.71	26.58	5.23	37.40	38.12	54.00	-15.88 HORIZONTAL Average
6	2483.500	60.45	26.58	5.23	37.40	54.86	74.00	-19.14 HORIZONTAL Peak
7	2500.000	35.34	26.60	4.95	37.39	29.50	54.00	-24.50 HORIZONTAL Average
8	2500.000	46.90	26.60	4.95	37.39	41.06	74.00	-32.94 HORIZONTAL Peak

Mode:b; Polarization:Vertical; Modulation:GFSK; ; Channel:Low

	Freq	ReadAntenna Level Factor	Cable Preamp Loss Factor	Level	Limit	Over	Pol/Phase	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB
1	2310.000	33.04	26.25	5.03	37.44	26.88	54.00	-27.12 VERTICAL Average
2	2310.000	47.00	26.25	5.03	37.44	40.84	74.00	-33.16 VERTICAL Peak
3	2390.000	33.24	26.43	4.88	37.42	27.13	54.00	-26.87 VERTICAL Average
4	2390.000	46.86	26.43	4.88	37.42	40.75	74.00	-33.25 VERTICAL Peak
5	2483.500	33.61	26.58	5.23	37.40	28.02	54.00	-25.98 VERTICAL Average
6	2483.500	47.44	26.58	5.23	37.40	41.85	74.00	-32.15 VERTICAL Peak
7	2500.000	34.38	26.60	4.95	37.39	28.54	54.00	-25.46 VERTICAL Average
8	2500.000	47.54	26.60	4.95	37.39	41.70	74.00	-32.30 VERTICAL Peak



Mode:b; Polarization:Horizontal; Modulation:GFSK; ; Channel:High

	Freq	ReadAntenna Level Factor	Cable Preamp Loss Factor	Level	Limit	Over	Pol/Phase	Remark	
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB	
1	2310.000	33.59	26.25	5.03	37.44	27.43	54.00	-26.57	HORIZONTAL Average
2	2310.000	46.45	26.25	5.03	37.44	40.29	74.00	-33.71	HORIZONTAL Peak
3	2390.000	35.02	26.43	4.88	37.42	28.91	54.00	-25.09	HORIZONTAL Average
4	2390.000	46.15	26.43	4.88	37.42	40.04	74.00	-33.96	HORIZONTAL Peak
5	2483.500	34.51	26.58	5.23	37.40	28.92	54.00	-25.08	HORIZONTAL Average
6	2483.500	47.18	26.58	5.23	37.40	41.59	74.00	-32.41	HORIZONTAL Peak
7	2500.000	34.83	26.60	4.95	37.39	28.99	54.00	-25.01	HORIZONTAL Average
8	2500.000	47.56	26.60	4.95	37.39	41.72	74.00	-32.28	HORIZONTAL Peak

Mode:b; Polarization:Vertical; Modulation:GFSK; ; Channel:High

	Freq	ReadAntenna Level Factor	Cable Preamp Loss Factor	Level	Limit	Over	Pol/Phase	Remark		
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB		
1	2310.000	34.88	26.25	5.03	37.44	28.72	54.00	-25.28	VERTICAL	Average
2	2310.000	47.57	26.25	5.03	37.44	41.41	74.00	-32.59	VERTICAL	Peak
3	2390.000	33.82	26.43	4.88	37.42	27.71	54.00	-26.29	VERTICAL	Average
4	2390.000	46.45	26.43	4.88	37.42	40.34	74.00	-33.66	VERTICAL	Peak
5	2483.500	34.26	26.58	5.23	37.40	28.67	54.00	-25.33	VERTICAL	Average
6	2483.500	49.93	26.58	5.23	37.40	44.34	74.00	-29.66	VERTICAL	Peak
7	2500.000	34.27	26.60	4.95	37.39	28.43	54.00	-25.57	VERTICAL	Average
8	2500.000	47.55	26.60	4.95	37.39	41.71	74.00	-32.29	VERTICAL	Peak



## 7.10 Radiated Spurious Emissions

Test Requirement 47 CFR Part 15, Subpart C 15.205 & 15.209  
Test Method: ANSI C63.10 (2013) Section 6.4,6.5,6.6  
Measurement Distance: 3m  
Limit:

Frequency(MHz)	Field strength(microvolts/meter)	Measurement distance(meters)
0.009-0.490	2400/F(kHz)	300
0.490-1.705	24000/F(kHz)	30
1.705-30.0	30	30
30-88	100	3
88-216	150	3
216-960	200	3
Above 960	500	3

Remark: The emission limits shown in the above table are based on measurements employing a CISPR quasi-peak detector except for the frequency bands 9-90kHz, 110-490kHz and above 1000 MHz. Radiated emission limits in these three bands are based on measurements employing an average detector, the peak field strength of any emission shall not exceed the maximum permitted average limits specified above by more than 20 dB under any condition of modulation.




### 7.10.1 E.U.T. Operation

Operating Environment:

Temperature: 26 °C Humidity: 57 % RH Atmospheric Pressure: 1020 mbar

Test mode b:Charge + TX\_non-Hop mode\_Keep the EUT in charging and continuously transmitting mode with GFSK modulation.

### 7.10.2 Test Setup Diagram

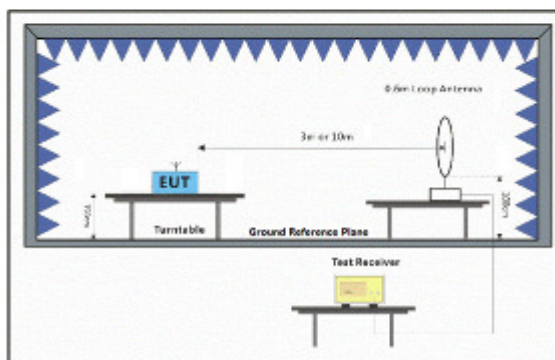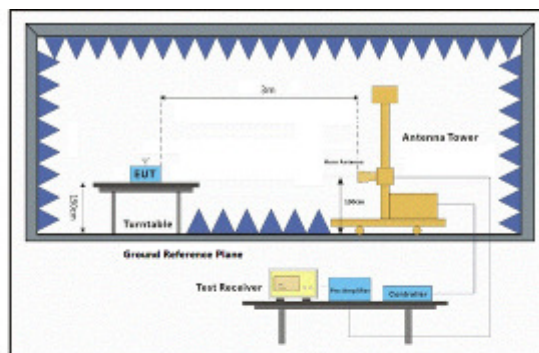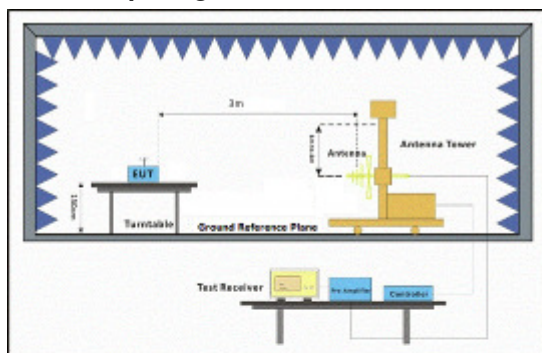



### 7.10.3 Measurement Procedure and Data

- a. For below 1GHz, the EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 or 10 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. For above 1GHz, the EUT was placed on the top of a rotating table 1.5 meters above the ground at a 3 meter fully-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- c. The EUT was set 3 or 10 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- d. The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- e. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters (for the test frequency of below 30MHz, the antenna was tuned to heights 1 meter) and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- f. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- g. If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.
- h. Test the EUT in the lowest channel, the middle channel, the Highest channel.
- i. The radiation measurements are performed in X, Y, Z axis positioning for Transmitting mode, and found the X axis positioning which it is the worst case.
- j. Repeat above procedures until all frequencies measured was complete.

#### Remark:

- 1) For emission below 1GHz, through pre-scan found the worst case is the lowest channel. Only the worst case is recorded in the report.
- 2) The field strength is calculated by adding the Antenna Factor, Cable Factor & Preamplifier. The basic equation with a sample calculation is as follows:  
$$\text{Final Test Level} = \text{Receiver Reading} + \text{Antenna Factor} + \text{Cable Factor} - \text{Preamplifier Factor}$$
- 3) Scan from 9kHz to 25GHz, the disturbance above 18GHz and below 30MHz was very low. The points marked on above plots are the highest emissions could be found when testing, so only above points had been displayed. The amplitude of spurious emissions from the radiator which are attenuated more than 20dB below the limit need not be reported.
- 4) For frequencies above 1GHz, the field strength limits are based on average limits. However, the peak field strength of any emission shall not exceed the maximum permitted average limits specified above by more than 20 dB under any condition of modulation. For the emissions whose peak level is lower than the average limit, only the peak measurement is shown

Mode:b; Polarization:Horizontal; Modulation:GFSK; ; Channel:Low

	Freq	ReadAntenna Level	Factor	Cable Loss	Preamp Factor	Level	Limit Line	Over Limit	Pol/Phase	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB		
1	31.620	20.77	12.24	0.10	21.79	11.32	40.00	-28.68	HORIZONTAL	QP
2	50.409	24.01	12.98	0.60	24.88	12.71	40.00	-27.29	HORIZONTAL	QP
3	137.903	27.26	13.01	1.02	28.16	13.13	43.50	-30.37	HORIZONTAL	QP
4	191.745	27.72	11.74	1.26	28.22	12.50	43.50	-31.00	HORIZONTAL	QP
5	515.437	28.08	18.47	2.28	29.88	18.95	46.00	-27.05	HORIZONTAL	QP
6	807.429	28.61	22.78	2.76	28.63	25.52	46.00	-20.48	HORIZONTAL	QP

Mode:b; Polarization:Horizontal; Modulation:GFSK; ; Channel:Low

	Freq	ReadAntenna Level	Factor	Cable Loss	Preamp Factor	Level	Limit Line	Over Limit	Pol/Phase	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB		
1	3834.438	31.32	29.12	7.80	36.91	31.33	54.00	-22.67	HORIZONTAL	Average
2	3834.438	44.49	29.12	7.80	36.91	44.50	74.00	-29.50	HORIZONTAL	Peak
3	4820.069	33.05	30.82	6.01	36.94	32.94	54.00	-21.06	HORIZONTAL	Average
4	4820.069	47.17	30.82	6.01	36.94	47.06	74.00	-26.94	HORIZONTAL	Peak
5	7230.052	29.31	35.50	7.35	36.93	35.23	54.00	-18.77	HORIZONTAL	Average
6	7230.052	45.57	35.50	7.35	36.93	51.49	74.00	-22.51	HORIZONTAL	Peak
7	8440.945	29.58	36.13	8.06	36.93	36.84	54.00	-17.16	HORIZONTAL	Average
8	8440.945	43.97	36.13	8.06	36.93	51.23	74.00	-22.77	HORIZONTAL	Peak
9	9640.257	32.18	37.54	8.18	37.08	40.82	54.00	-13.18	HORIZONTAL	Average
10	9640.257	46.19	37.54	8.18	37.08	54.83	74.00	-19.17	HORIZONTAL	Peak
11	12050.520	28.33	39.46	10.71	37.17	41.33	54.00	-12.67	HORIZONTAL	Average
12	12050.520	42.64	39.46	10.71	37.17	55.64	74.00	-18.36	HORIZONTAL	Peak



Mode:b; Polarization:Vertical; Modulation:GFSK; ; Channel:Low

	Freq	ReadAntenna		Cable	Preamp	Level	Limit	Over	Pol/Phase	Remark
		Level	Factor	Loss	Factor		Line	Limit		
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB		
1	30.000	23.60	12.20	0.05	21.45	14.40	40.00	-25.60	VERTICAL	QP
2	37.812	22.37	12.55	0.46	23.31	12.07	40.00	-27.93	VERTICAL	QP
3	57.999	23.74	12.30	0.58	25.18	11.44	40.00	-28.56	VERTICAL	QP
4	138.874	26.38	13.06	1.03	28.16	12.31	43.50	-31.19	VERTICAL	QP
5	188.413	26.81	12.10	1.29	28.17	12.03	43.50	-31.47	VERTICAL	QP
6	824.597	28.81	22.97	2.82	28.57	26.03	46.00	-19.97	VERTICAL	QP

Mode:b; Polarization:Vertical; Modulation:GFSK; ; Channel:Low

	Freq	ReadAntenna	Cable Preamp	Limit	Over					
		Level	Factor	Loss	Factor	Level	Line	Limit	Pol/Phase	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB		
1	3790.361	31.27	28.97	7.83	36.92	31.15	54.00	-22.85	VERTICAL	Average
2	3790.361	44.28	28.97	7.83	36.92	44.16	74.00	-29.84	VERTICAL	Peak
3	4810.307	33.20	30.79	5.87	36.94	32.92	54.00	-21.08	VERTICAL	Average
4	4810.307	44.80	30.79	5.87	36.94	44.52	74.00	-29.48	VERTICAL	Peak
5	6177.627	29.56	32.92	6.94	36.99	32.43	54.00	-21.57	VERTICAL	Average
6	6177.627	43.53	32.92	6.94	36.99	46.40	74.00	-27.60	VERTICAL	Peak
7	7230.150	40.29	35.50	7.35	36.93	46.21	54.00	-7.79	VERTICAL	Average
8	7230.150	50.70	35.50	7.35	36.93	56.62	74.00	-17.38	VERTICAL	Peak
9	9640.257	37.67	37.54	8.18	37.08	46.31	54.00	-7.69	VERTICAL	Average
10	9640.257	47.92	37.54	8.18	37.08	56.56	74.00	-17.44	VERTICAL	Peak
11	12050.520	31.68	39.46	10.71	37.17	44.68	54.00	-9.32	VERTICAL	Average
12	12050.520	44.00	39.46	10.71	37.17	57.00	74.00	-17.00	VERTICAL	Peak

Mode:b; Polarization:Horizontal; Modulation:GFSK; ; Channel:middle

	Freq	ReadAntenna	Cable	Preamp		Limit	Over		
	Level	Factor	Loss	Factor	Level	Line	Limit	Pol/Phase	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB	
1	3682.374	31.70	28.43	7.03	36.93	30.23	54.00	-23.77	HORIZONTAL Average
2	3682.374	44.82	28.43	7.03	36.93	43.35	74.00	-30.65	HORIZONTAL Peak
3	4882.151	39.55	30.95	6.86	36.95	40.41	54.00	-13.59	HORIZONTAL Average
4	4882.151	51.00	30.95	6.86	36.95	51.86	74.00	-22.14	HORIZONTAL Peak
5	5864.443	31.53	32.22	7.44	37.00	34.19	54.00	-19.81	HORIZONTAL Average
6	5864.443	44.29	32.22	7.44	37.00	46.95	74.00	-27.05	HORIZONTAL Peak
7	7323.474	35.16	35.74	7.39	36.92	41.37	54.00	-12.63	HORIZONTAL Average
8	7323.474	49.00	35.74	7.39	36.92	55.21	74.00	-18.79	HORIZONTAL Peak
9	9764.603	34.86	37.70	8.33	37.09	43.80	54.00	-10.20	HORIZONTAL Average
10	9764.603	47.91	37.70	8.33	37.09	56.85	74.00	-17.15	HORIZONTAL Peak
11	12205.850	32.97	39.21	10.98	37.06	46.10	54.00	-7.90	HORIZONTAL Average
12	12205.850	46.14	39.21	10.98	37.06	59.27	74.00	-14.73	HORIZONTAL Peak

Mode:b; Polarization:Vertical; Modulation:GFSK; ; Channel:middle

	Freq	ReadAntenna	Cable	Preamp		Limit	Over		
	Level	Factor	Loss	Factor	Level	Line	Limit	Pol/Phase	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB	
1	3867.831	32.20	29.22	7.69	36.91	32.20	54.00	-21.80	VERTICAL Average
2	3867.831	44.73	29.22	7.69	36.91	44.73	74.00	-29.27	VERTICAL Peak
3	4882.151	34.46	30.95	6.86	36.95	35.32	54.00	-18.68	VERTICAL Average
4	4882.151	49.72	30.95	6.86	36.95	50.58	74.00	-23.42	VERTICAL Peak
5	6124.292	31.15	32.69	6.99	37.00	33.83	54.00	-20.17	VERTICAL Average
6	6124.292	43.70	32.69	6.99	37.00	46.38	74.00	-27.62	VERTICAL Peak
7	7323.474	34.68	35.74	7.39	36.92	40.89	54.00	-13.11	VERTICAL Average
8	7323.474	48.38	35.74	7.39	36.92	54.59	74.00	-19.41	VERTICAL Peak
9	9764.160	28.11	37.70	8.33	37.09	37.05	54.00	-16.95	VERTICAL Average
10	9764.160	43.44	37.70	8.33	37.09	52.38	74.00	-21.62	VERTICAL Peak
11	12205.780	29.41	39.21	10.98	37.06	42.54	54.00	-11.46	VERTICAL Average
12	12205.780	43.38	39.21	10.98	37.06	56.51	74.00	-17.49	VERTICAL Peak

Mode:b; Polarization:Horizontal; Modulation:GFSK; ; Channel:High

	Freq	ReadAntenna Level Factor	Cable Preamp Loss Factor	Level	Limit Line	Over Limit	Pol/Phase	Remark		
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB		
1	3823.371	34.35	29.08	7.83	36.91	34.35	54.00	-19.65	HORIZONTAL	Average
2	3823.371	44.03	29.08	7.83	36.91	44.03	74.00	-29.97	HORIZONTAL	Peak
3	4890.058	33.55	30.95	6.86	36.95	34.41	54.00	-19.59	HORIZONTAL	Average
4	4890.058	44.02	30.95	6.86	36.95	44.88	74.00	-29.12	HORIZONTAL	Peak
5	6659.763	34.84	34.53	7.15	36.97	39.55	54.00	-14.45	HORIZONTAL	Average
6	6659.763	44.34	34.53	7.15	36.97	49.05	74.00	-24.95	HORIZONTAL	Peak
7	7335.795	32.65	35.74	7.39	36.92	38.86	54.00	-15.14	HORIZONTAL	Average
8	7335.795	43.22	35.74	7.39	36.92	49.43	74.00	-24.57	HORIZONTAL	Peak
9	9780.371	32.92	37.74	8.37	37.09	41.94	54.00	-12.06	HORIZONTAL	Average
10	9780.371	41.29	37.74	8.37	37.09	50.31	74.00	-23.69	HORIZONTAL	Peak
11	12225.920	26.68	39.21	10.98	37.06	39.81	54.00	-14.19	HORIZONTAL	Average
12	12225.920	37.31	39.21	10.98	37.06	50.44	74.00	-23.56	HORIZONTAL	Peak

Mode:b; Polarization:Vertical; Modulation:GFSK; ; Channel:High

	Freq	ReadAntenna Level Factor	Cable Preamp Loss Factor	Level	Limit Line	Over Limit	Pol/Phase	Remark		
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB		
1	3671.746	34.74	28.39	6.93	36.93	33.13	54.00	-20.87	VERTICAL	Average
2	3671.746	45.95	28.39	6.93	36.93	44.34	74.00	-29.66	VERTICAL	Peak
3	4830.043	36.82	30.85	6.15	36.94	36.88	54.00	-17.12	VERTICAL	Average
4	4830.043	46.31	30.85	6.15	36.94	46.37	74.00	-27.63	VERTICAL	Peak
5	6340.436	33.81	33.76	6.97	36.99	37.55	54.00	-16.45	VERTICAL	Average
6	6340.436	44.77	33.76	6.97	36.99	48.51	74.00	-25.49	VERTICAL	Peak
7	7245.838	34.35	35.55	7.35	36.92	40.33	54.00	-13.67	VERTICAL	Average
8	7245.838	44.69	35.55	7.35	36.92	50.67	74.00	-23.33	VERTICAL	Peak
9	9660.230	31.98	37.58	8.21	37.08	40.69	54.00	-13.31	VERTICAL	Average
10	9660.230	41.17	37.58	8.21	37.08	49.88	74.00	-24.12	VERTICAL	Peak
11	12075.270	27.75	39.42	10.76	37.15	40.78	54.00	-13.22	VERTICAL	Average
12	12075.270	37.47	39.42	10.76	37.15	50.50	74.00	-23.50	VERTICAL	Peak





## 8 Appendix

### 8.1 Appendix 15.247

#### 1.20 dB Bandwidth

Test Mode	Test Channel	EBW[MHz]	2/3 EBW[MHz]	Verdict
GFSK	2410	4.578	3.052	PASS
GFSK	2445	4.563	3.042	PASS
GFSK	2477	4.578	3.052	PASS


TEST PLOT

20 dB Bandwidth\_2410



20 dB Bandwidth\_2445



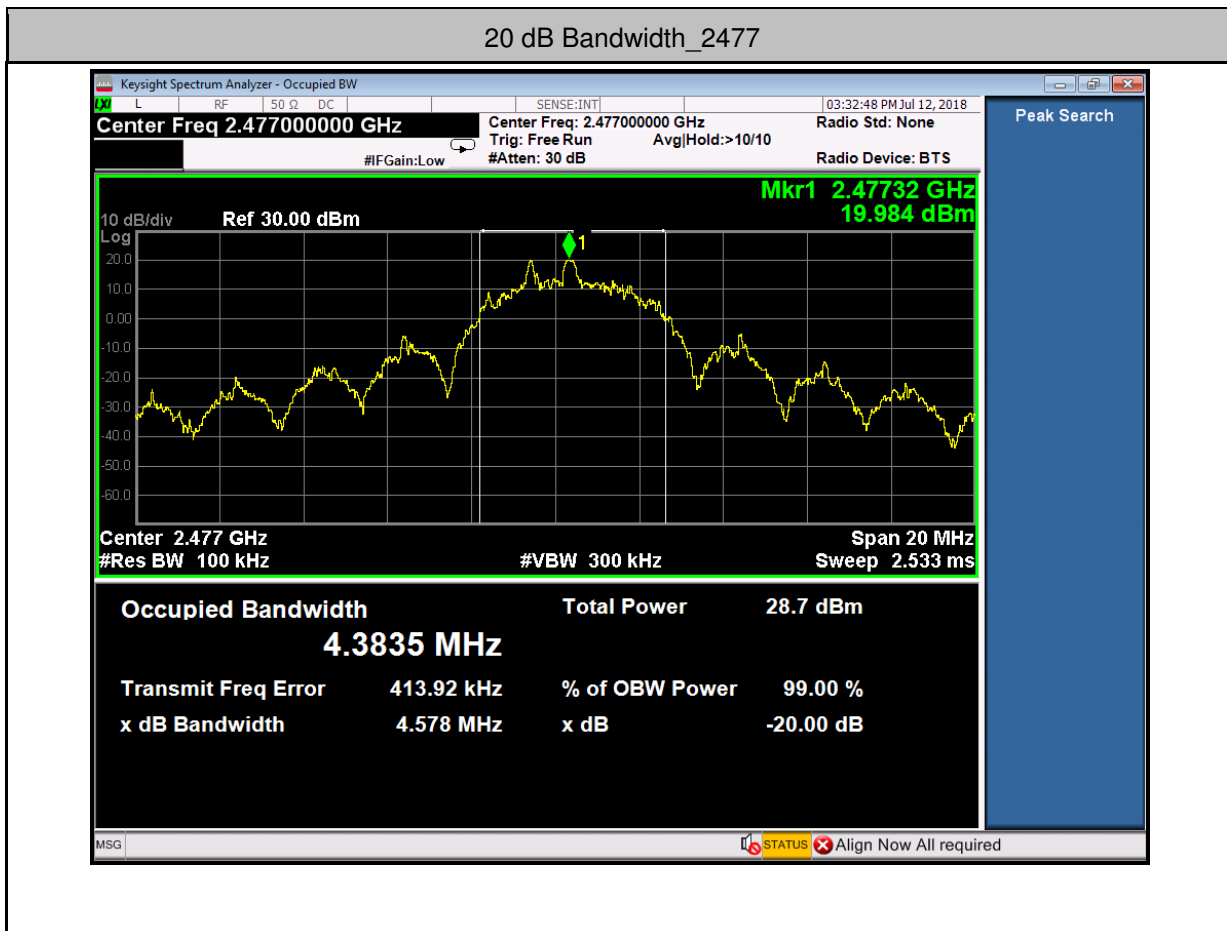


## 2. Conducted Peak Output Power


Test Mode	Test Channel	Power[dBm]	Limit[dBm]	Verdict
GFSK	2410	20.774	21	PASS
GFSK	2445	20.452	21	PASS
GFSK	2477	20.784	21	PASS



SGS-CSTC Standards Technical Services Co., Ltd.  
Guangzhou Branch

Report No.: GZEM180600361801  
Page: 44 of 60

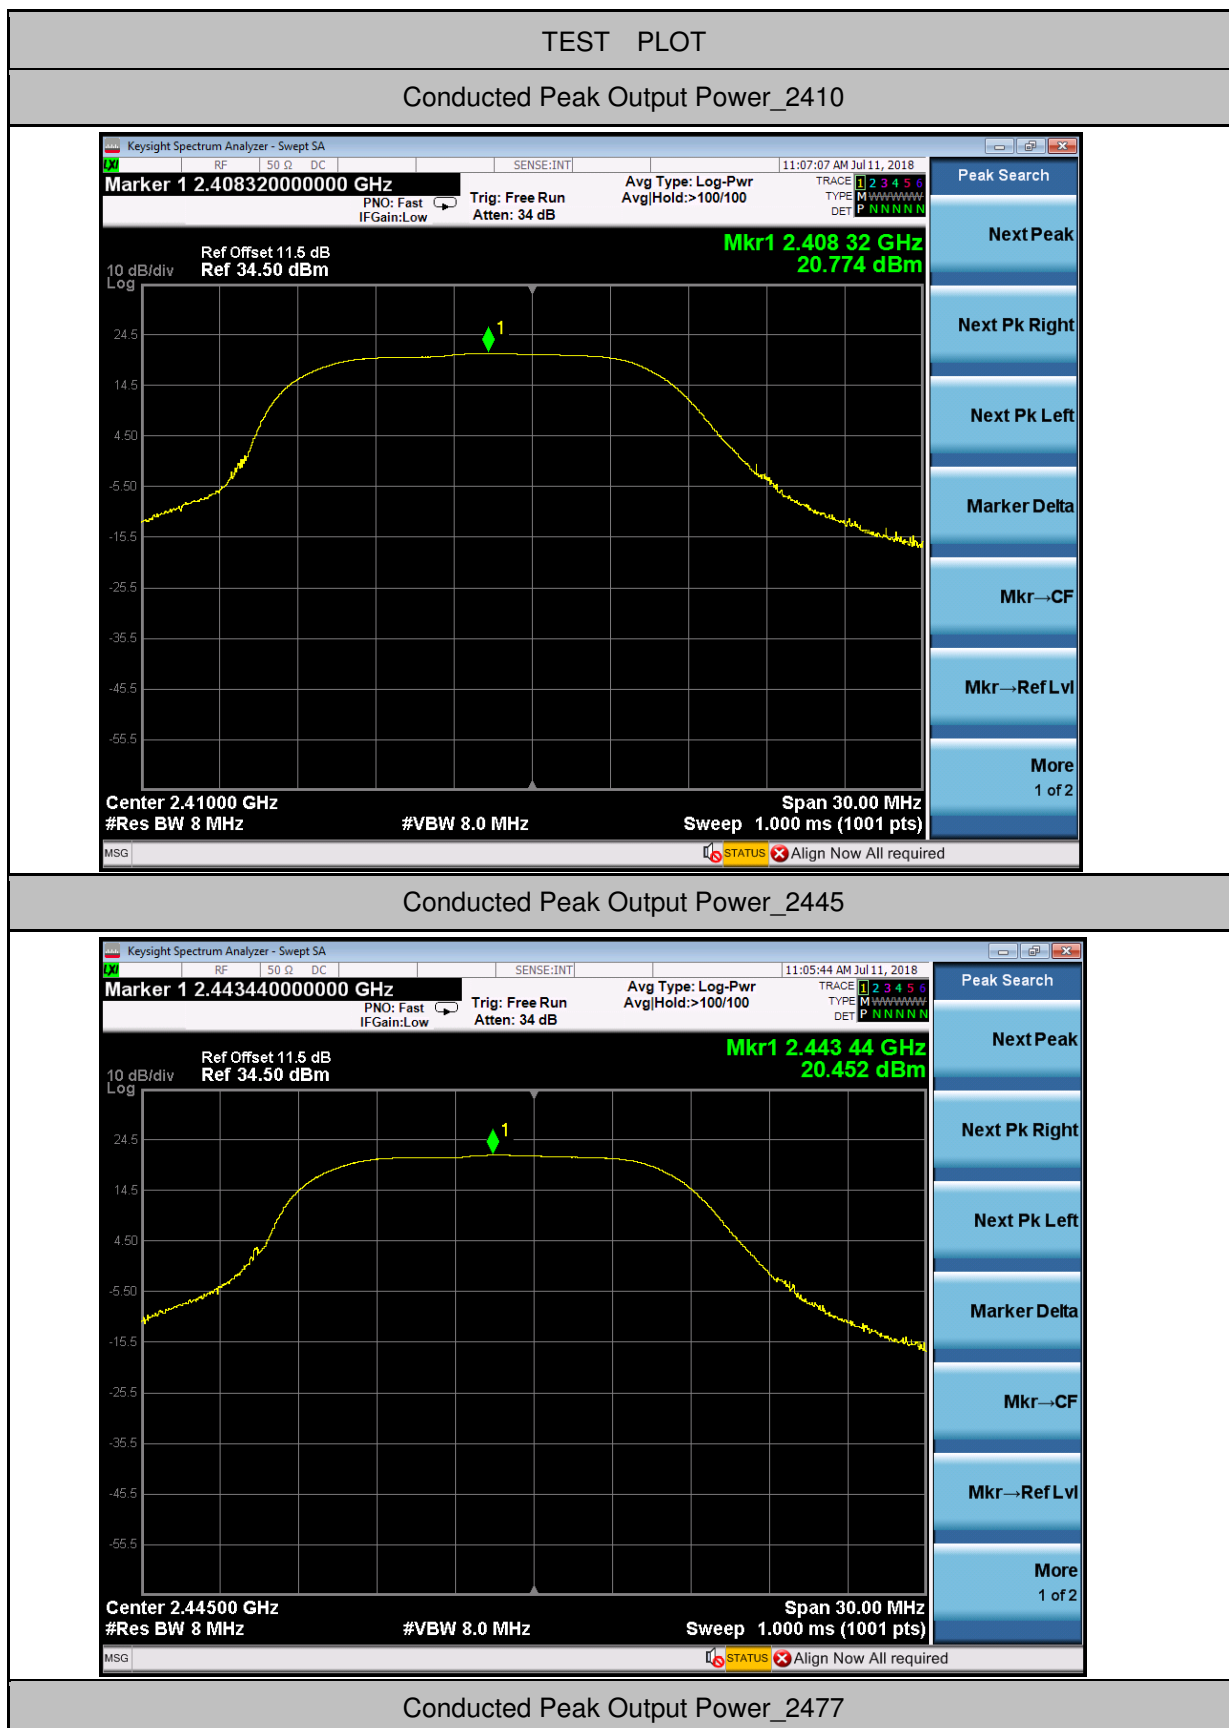

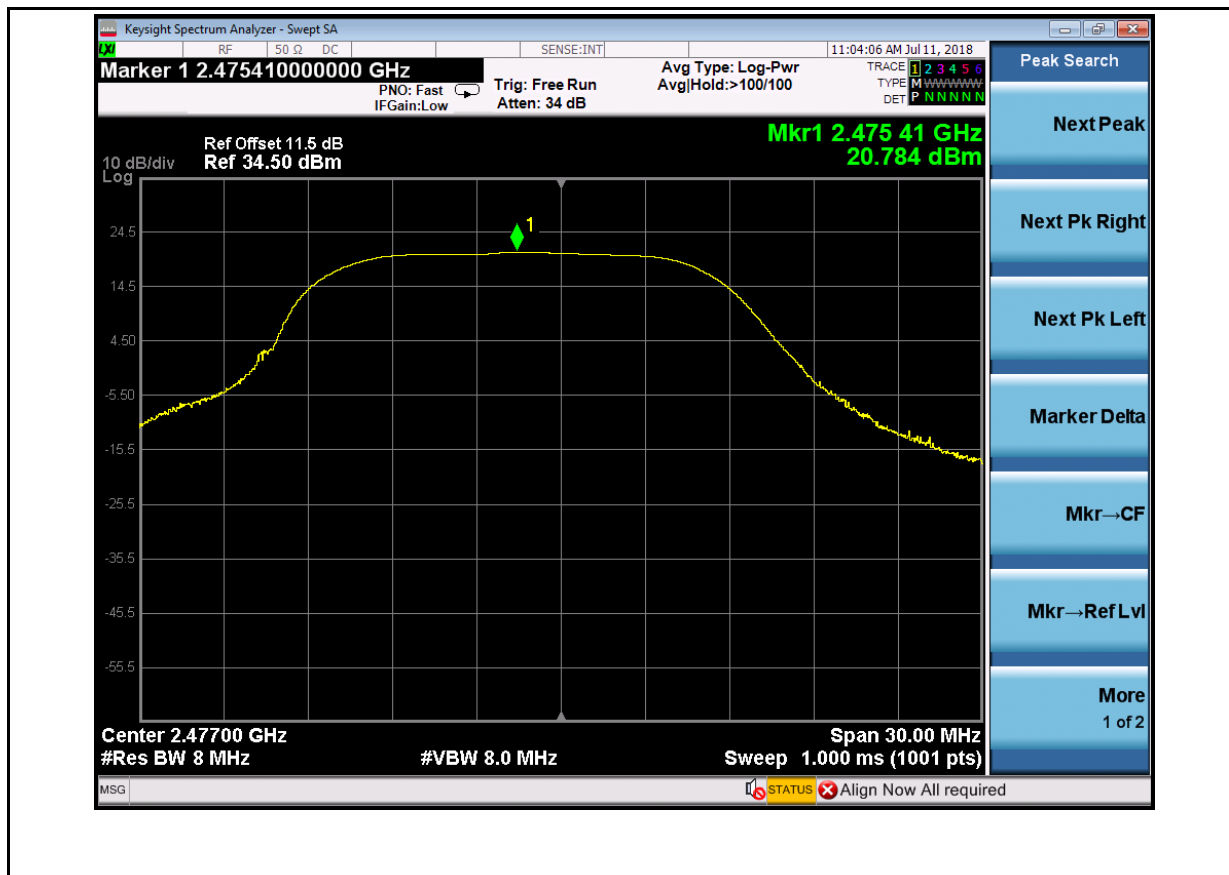


### 3.Carrier Frequency Separation


Test Mode	Test Channel	Result[MHz]	Limit[MHz]	Verdict
GFSK	2410	3.920	>3.052	Pass
GFSK	2445	3.630	>3.042	Pass
GFSK	2477	4.040	>3.052	Pass

### TEST PLOT

#### Carrier Frequency Separation\_2410

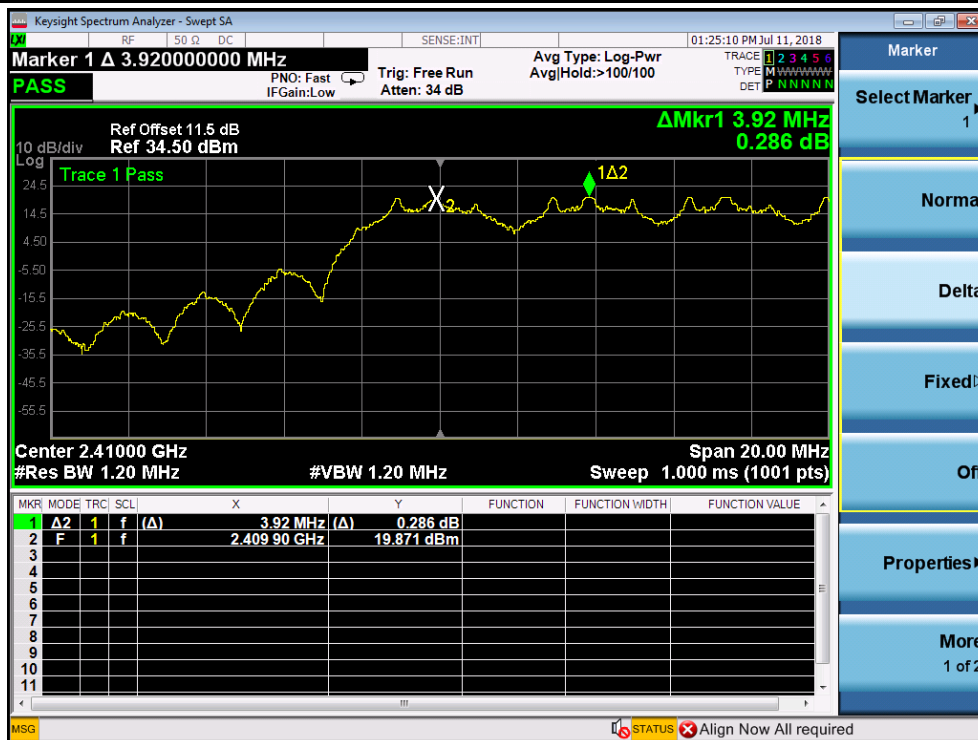

#### Carrier Frequency Separation\_2445

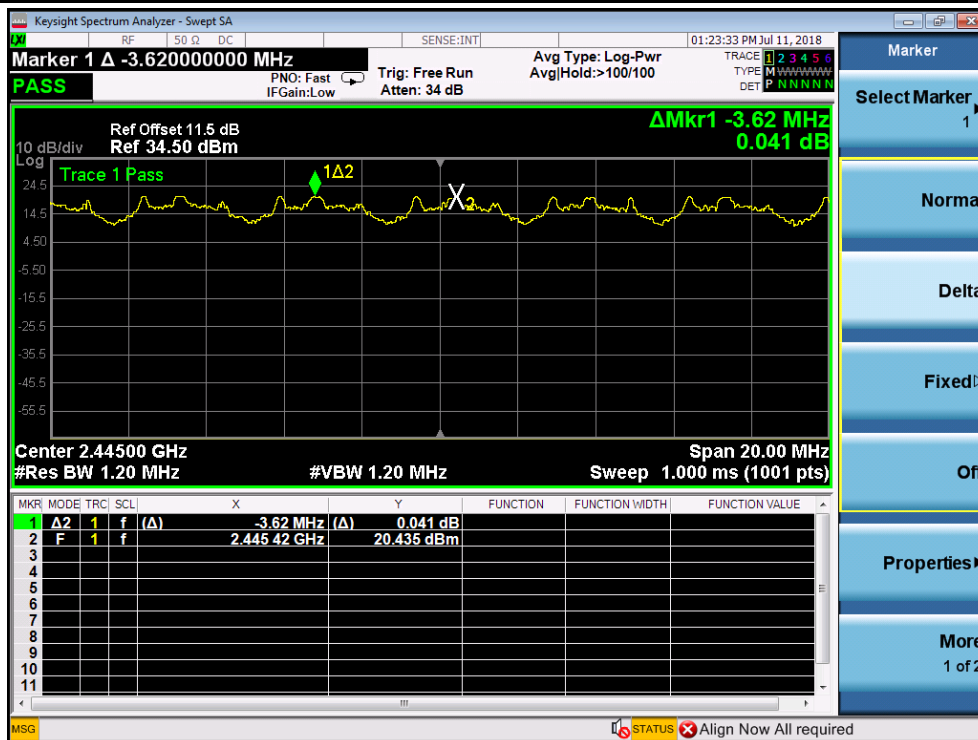



Carrier Frequency Separation\_2477





#### 4.Dwell Time

Test Mode	Test Channel	Burst Width[ms/hop/ch]	Total Hops[hop*ch]	Dwell Time[s]	Limit[s]	Verdict
GFSK	2410	24.301	13	0.307	0.4	Pass
GFSK	2445	24.305	14	0.340	0.4	Pass
GFSK	2477	24.296	14	0.340	0.4	Pass



TEST PLOT


Dwell Time\_2410

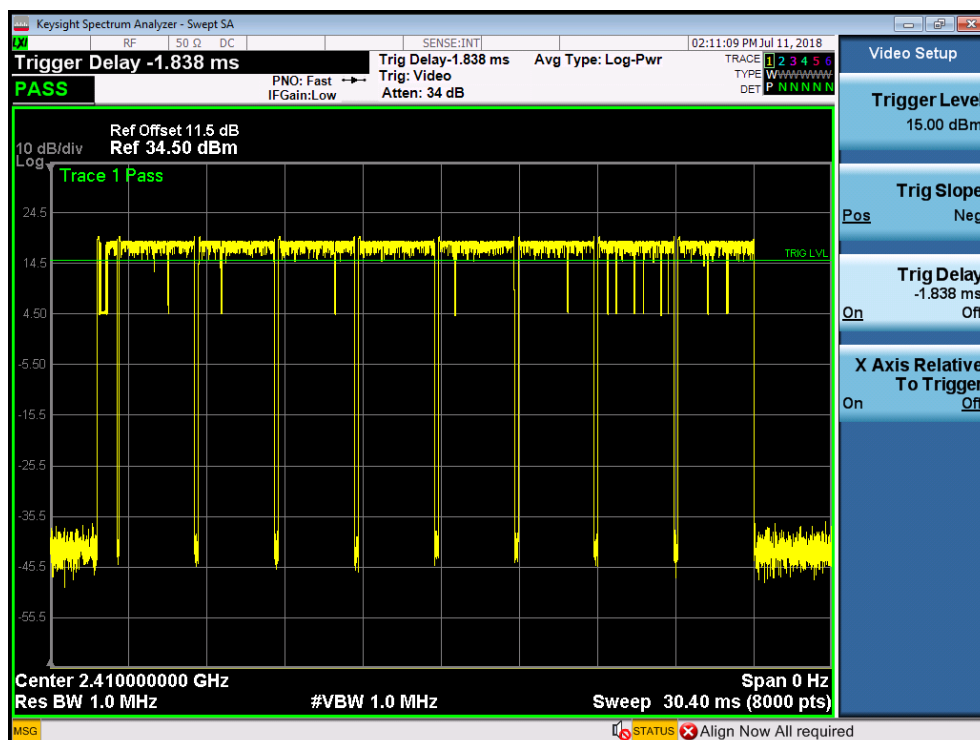


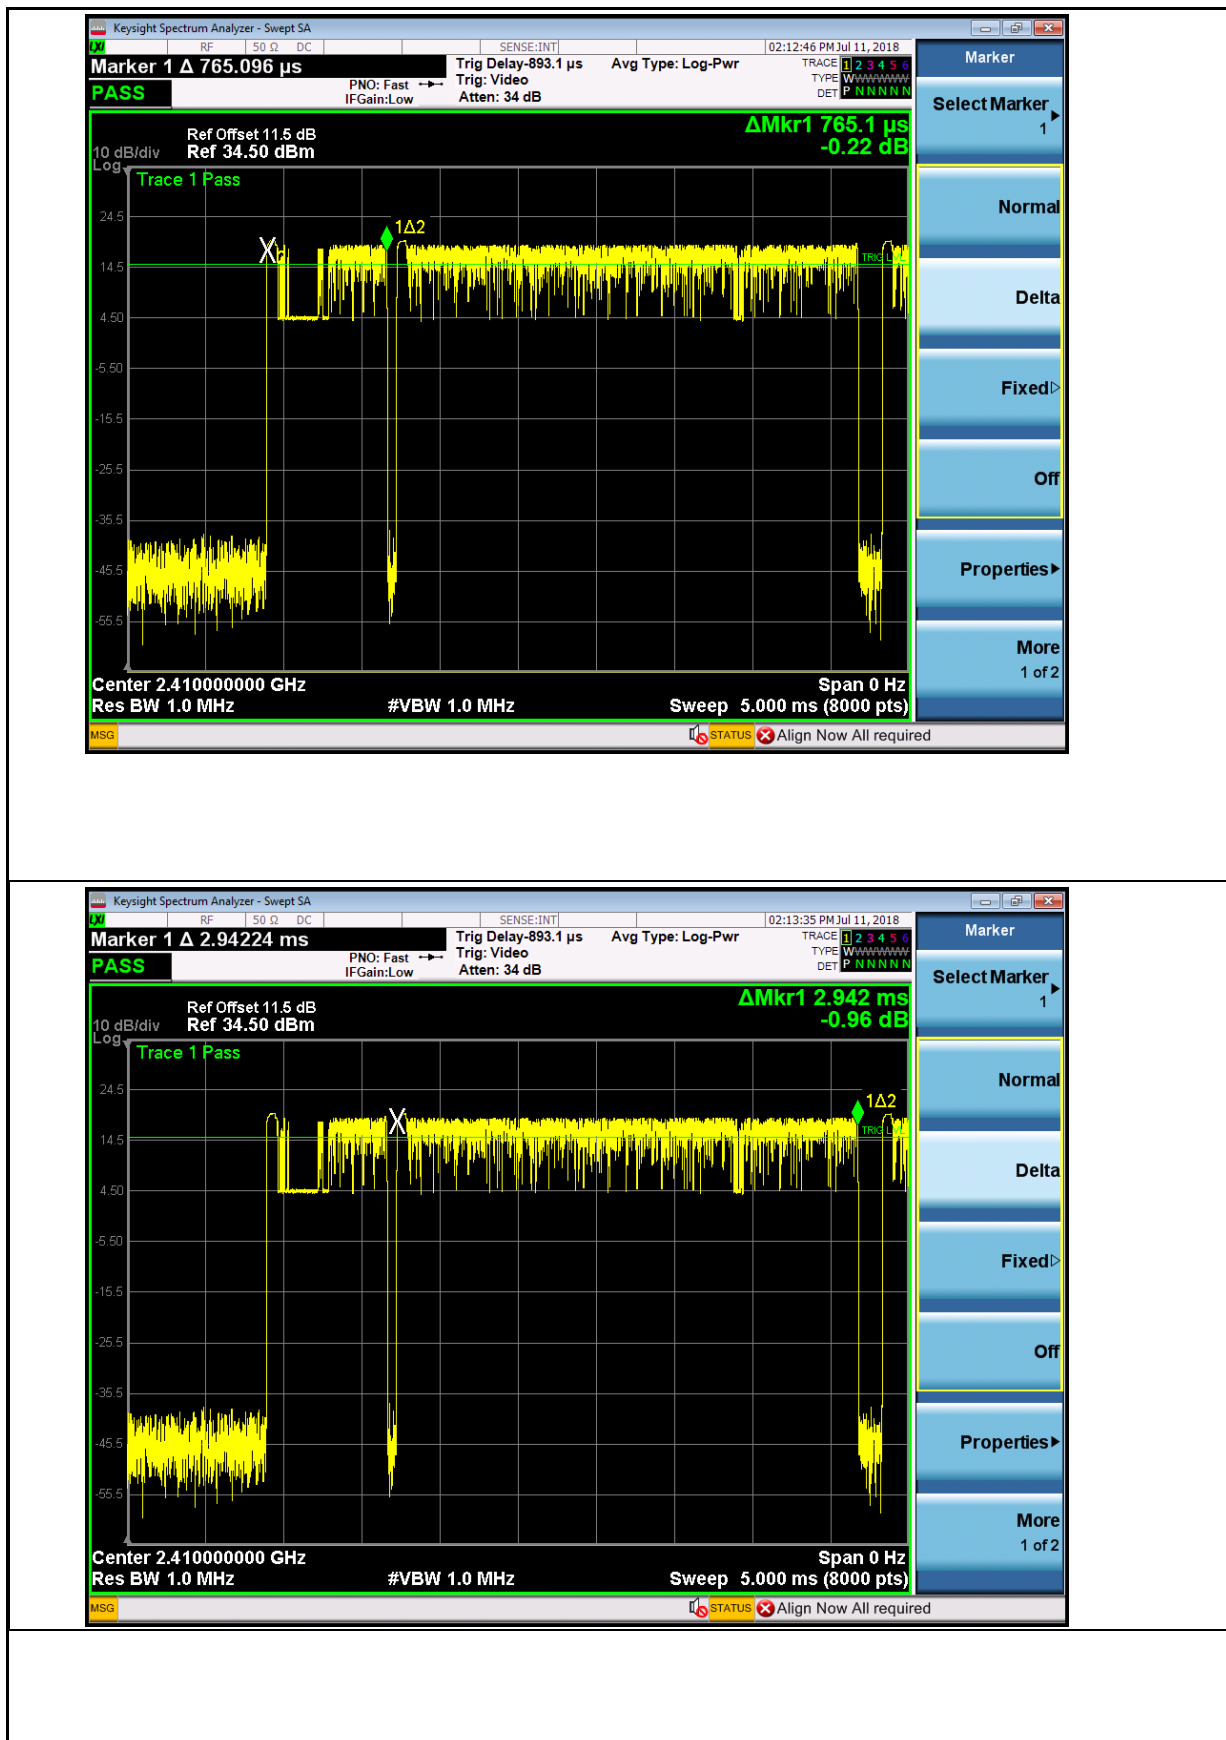


Dwell Time\_2445

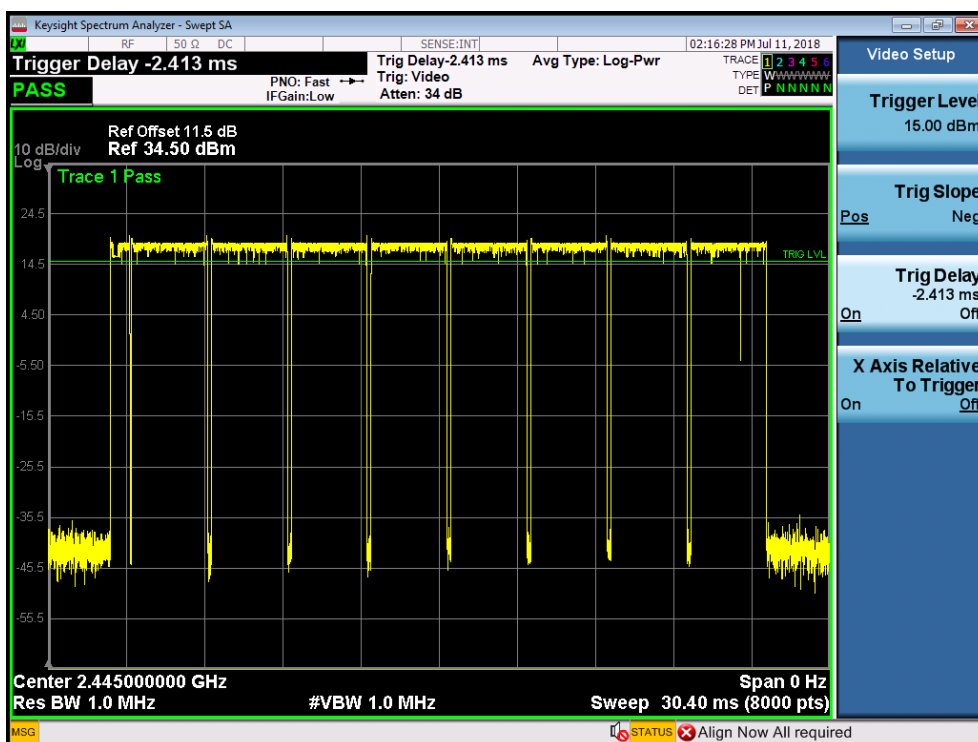
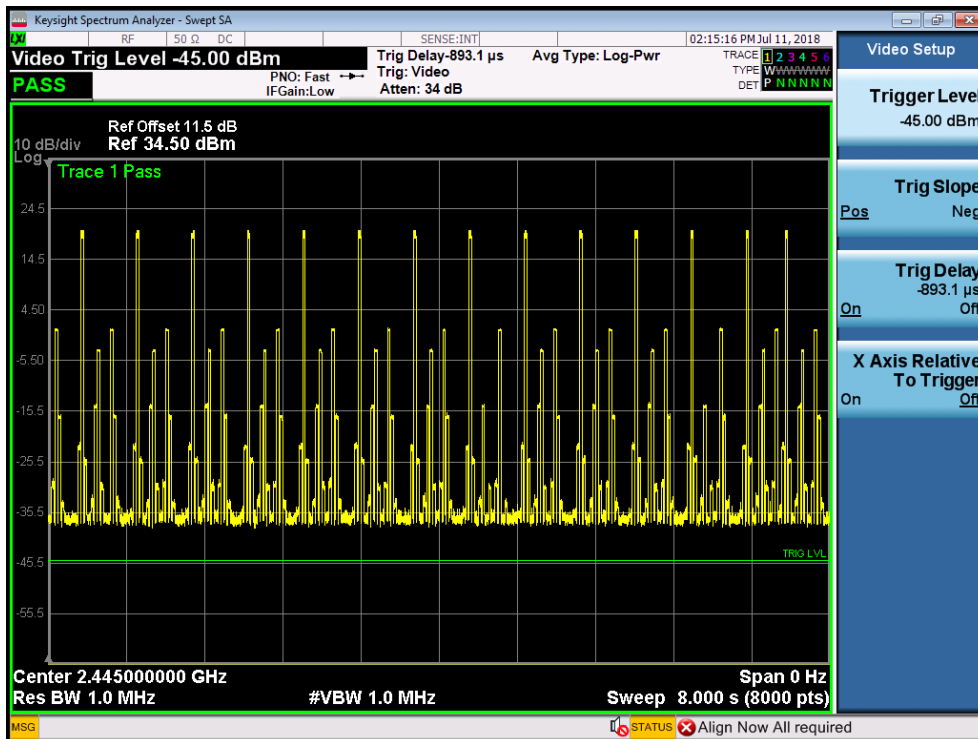


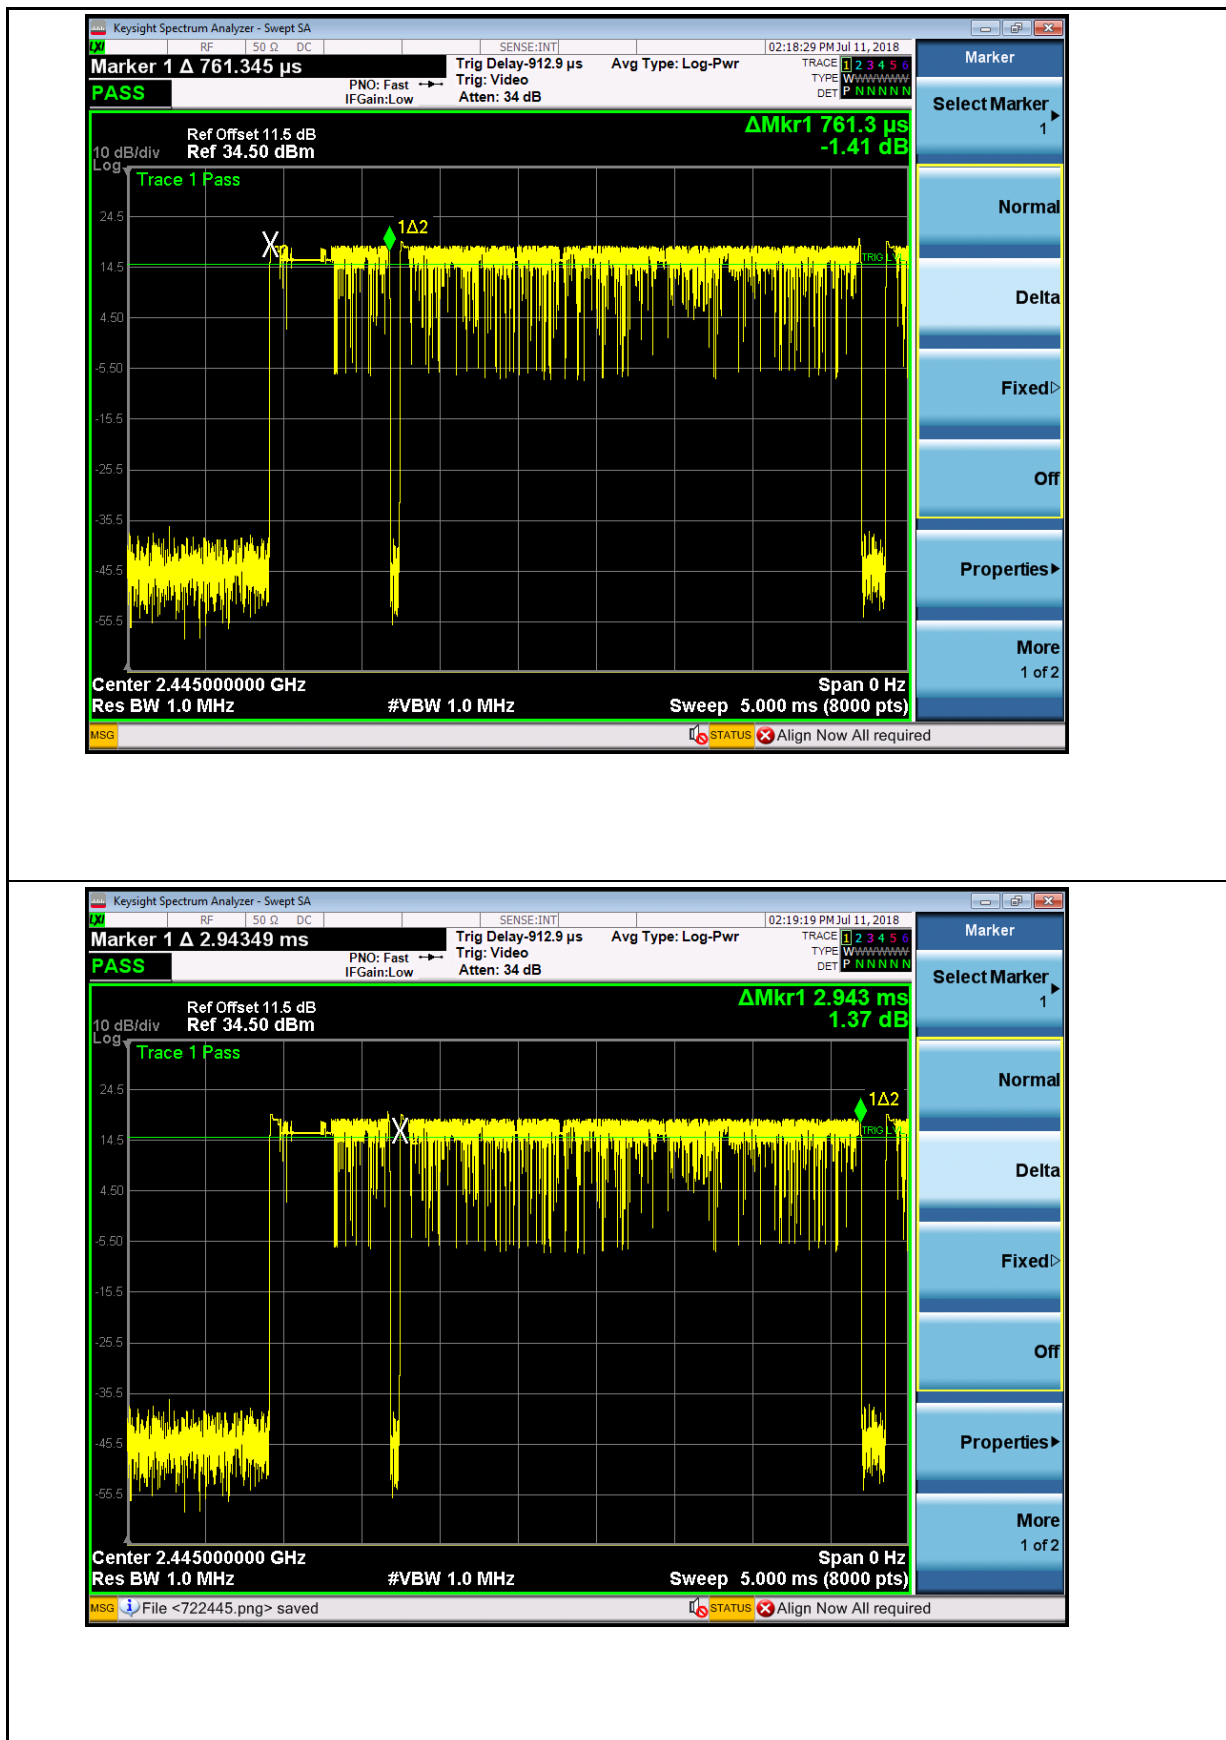

Dwell Time 2477

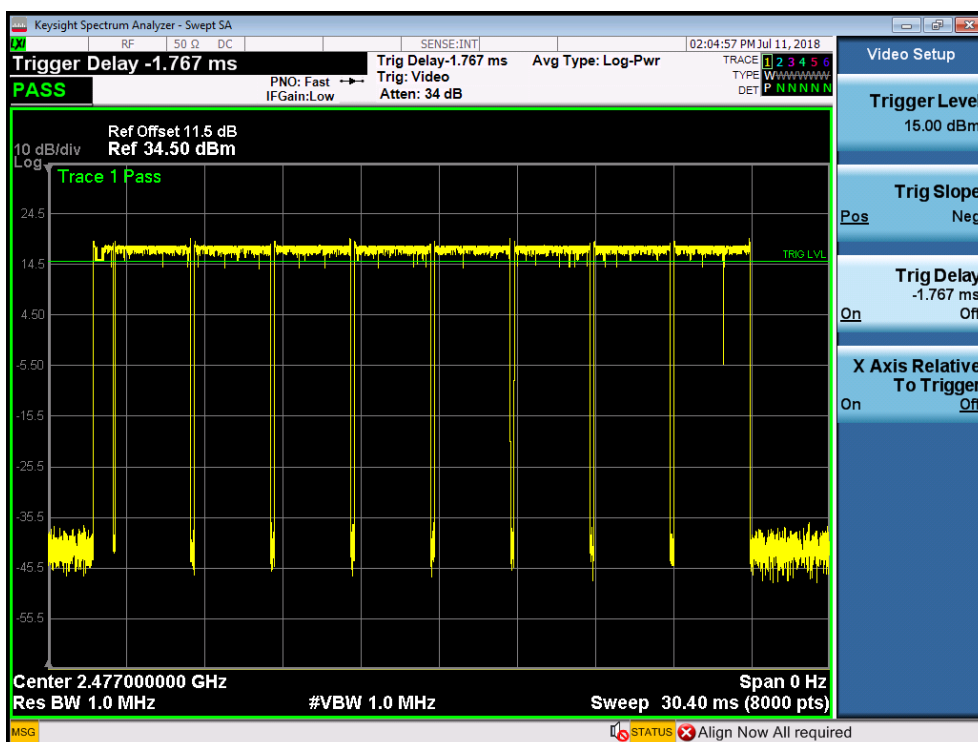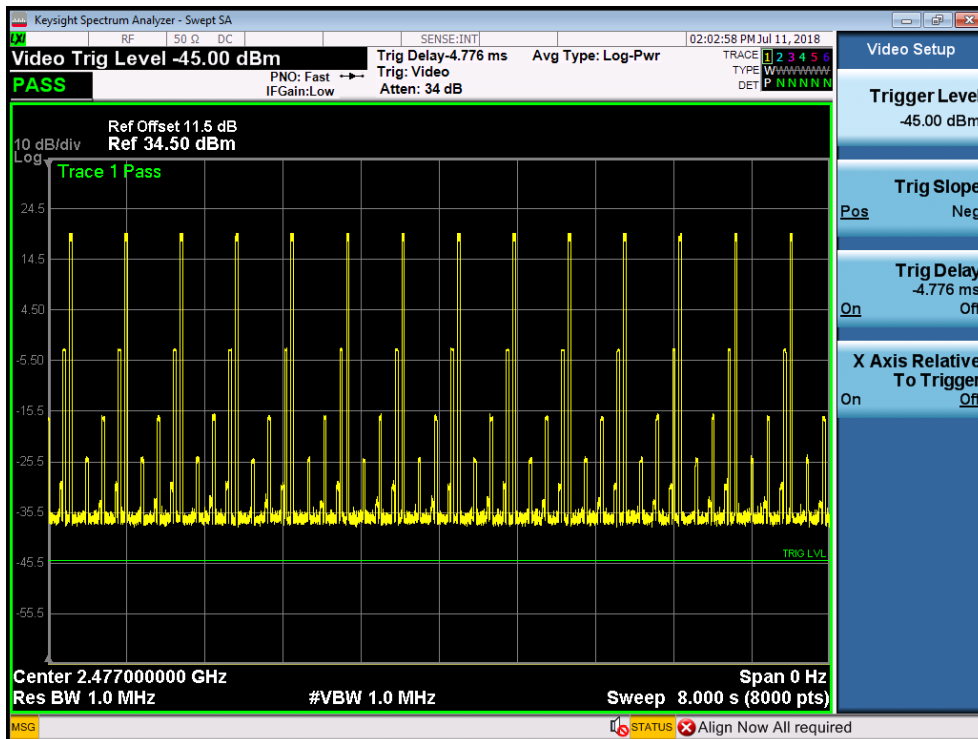




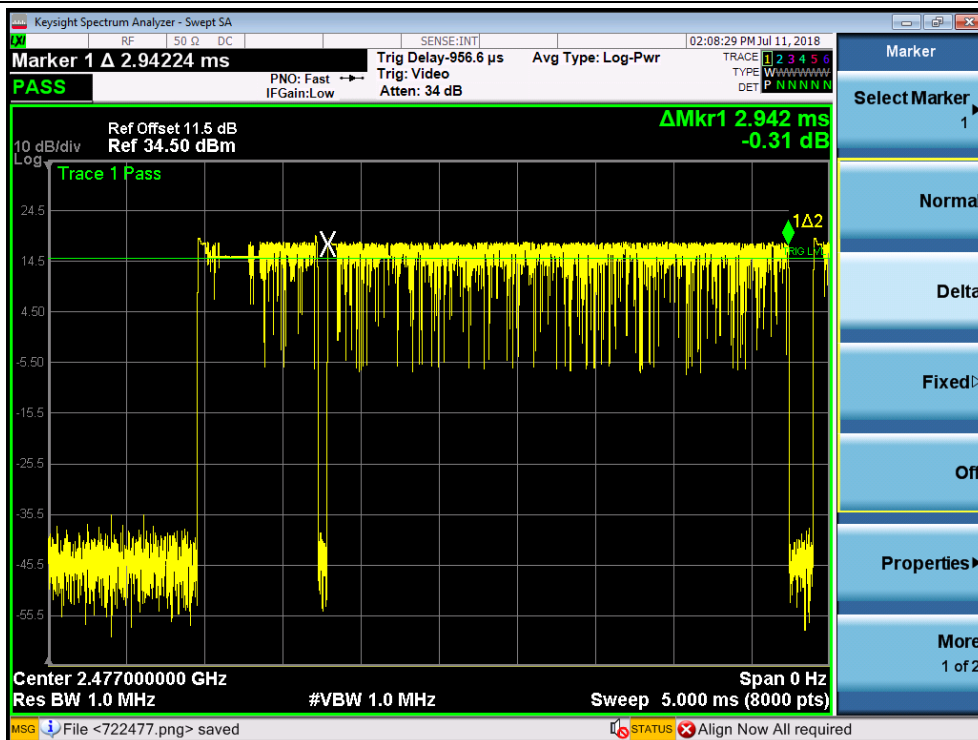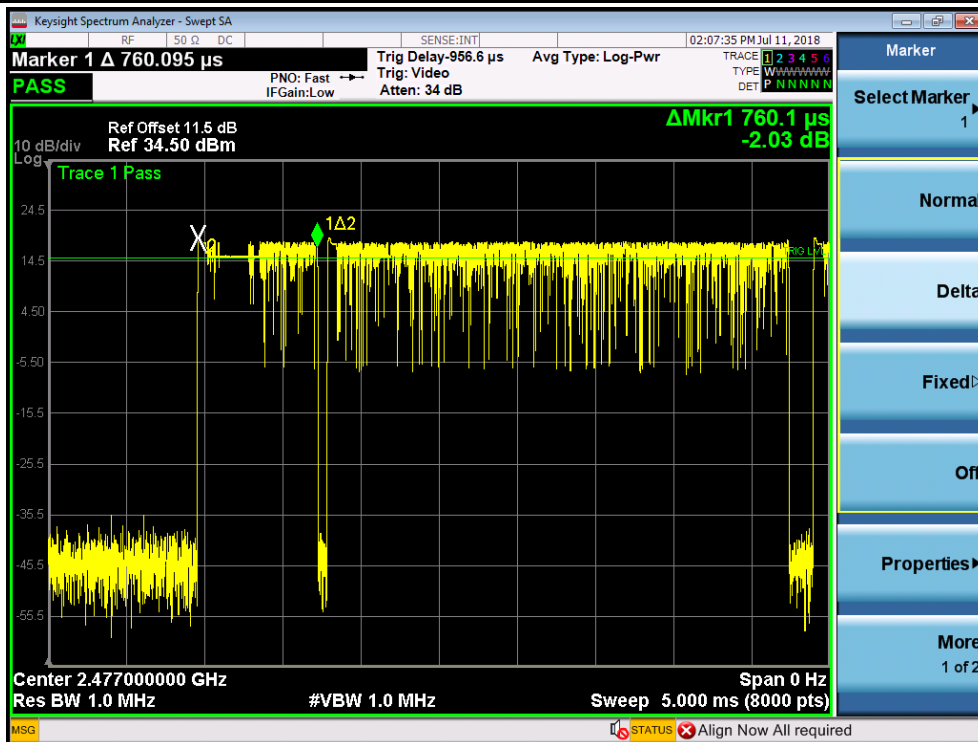

### 5.Hopping Channel Number

Test Mode	Test Channel	Number of Hopping Channel[N]	Limit[N]	Verdict
GFSK	Hopping	20	>=15	PASS

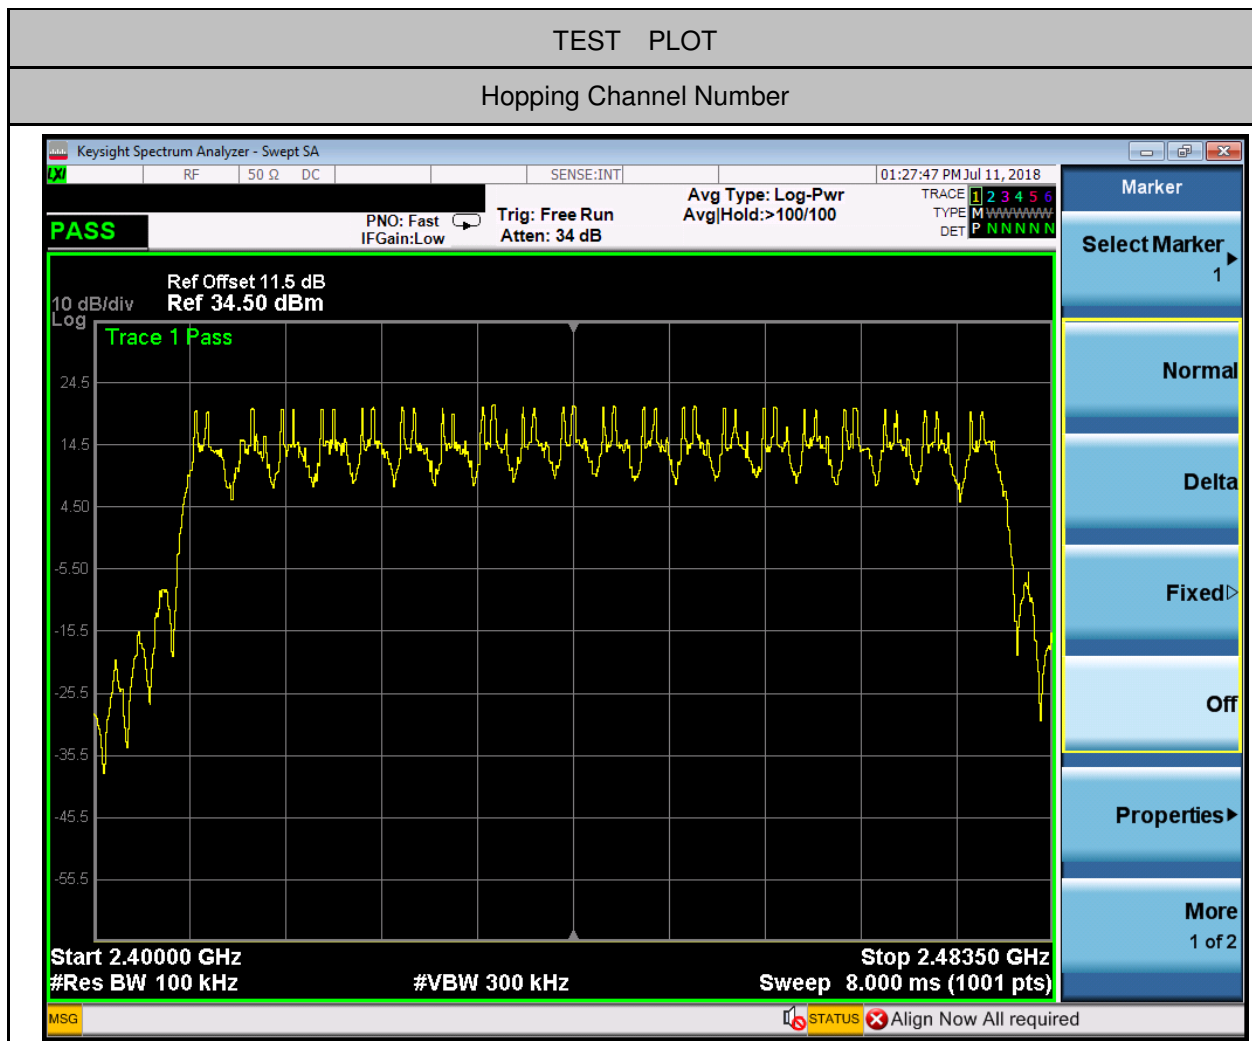

### 6.Band-edge for RF Conducted Emissions

Test Mode	Test Channel	Hopping	Carrier Power[dBm]	Max. Spurious Level [dBm]	Limit[dBm]	Verdict
GFSK	2410	On	19.955	-28.350	-0.05	PASS
GFSK	2410	Off	20.298	-28.650	0.30	PASS
GFSK	2477	On	19.928	-17.955	-0.07	PASS
GFSK	2477	Off	20.272	-17.959	0.27	PASS




# SGS-CSTC Standards Technical Services Co., Ltd. Guangzhou Branch

Report No.: GZEM180600361801  
Page: 55 of 60

## TEST PLOT


### Band-edge for RF Conducted Emissions\_2410\_Hopping On

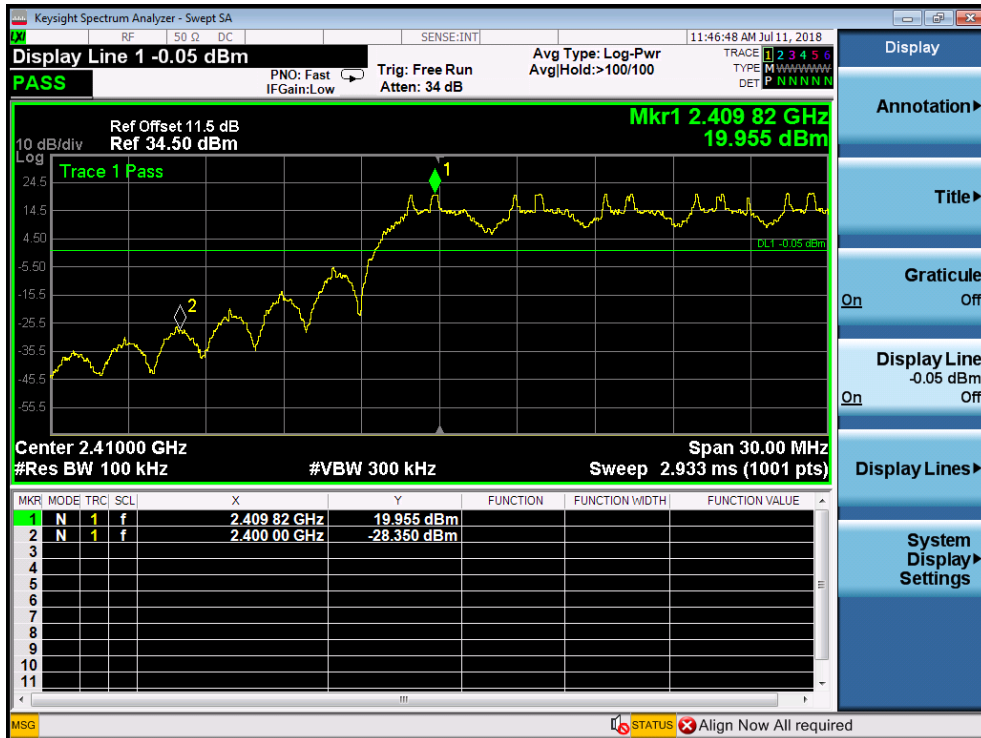


### Band-edge for RF Conducted Emissions\_2410\_Hopping Off



### Band-edge for RF Conducted Emissions\_2477\_Hopping On

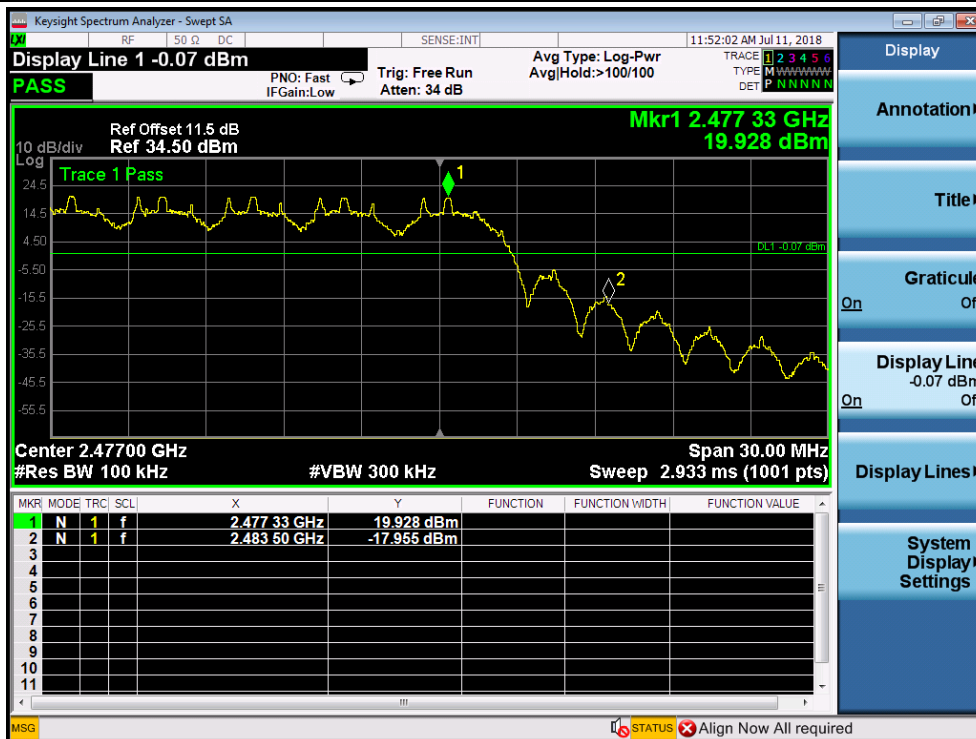


### Band-edge for RF Conducted Emissions\_2477\_Hopping Off

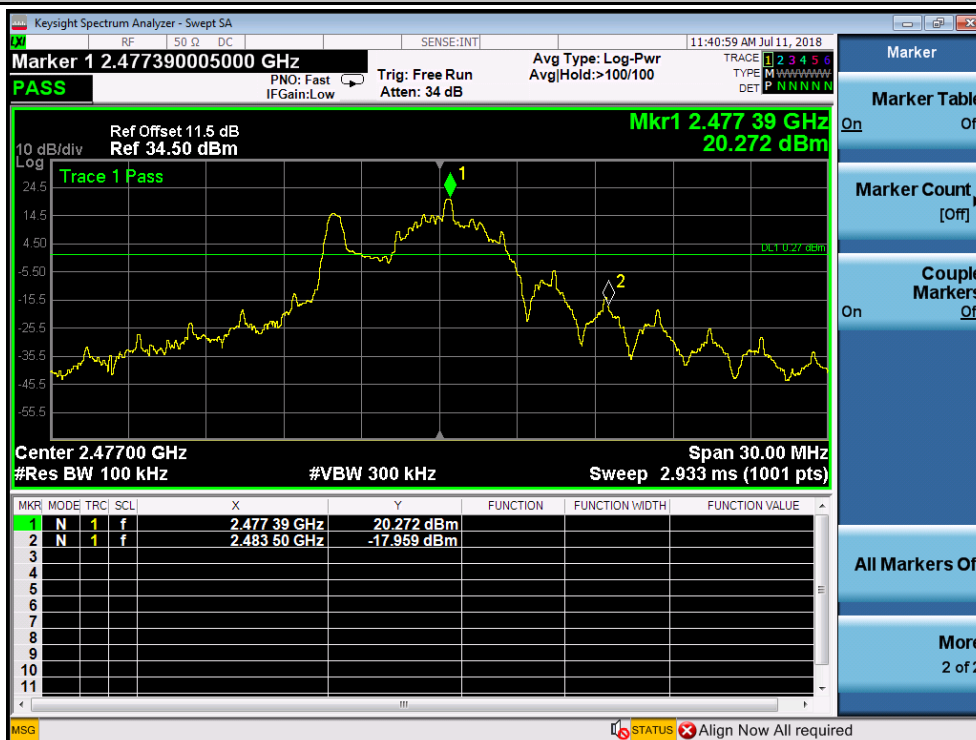



**7.RF Conducted Spurious Emissions**


Test Mode	Test Channel	StartFre [MHz]	StopFre [MHz]	RBW [kHz]	VBW [kHz]	Pref[dBm]	Max. Level [dBm]	Limit [dBm]	Verdict
GFSK	2410	30	10000	100	300	20.304	-45.048	<0.304	PASS
GFSK	2410	10000	25000	100	300	20.304	-39.305	<0.304	PASS
GFSK	2445	30	10000	100	300	20.760	-45.182	<0.760	PASS
GFSK	2445	10000	25000	100	300	20.760	-39.873	<0.760	PASS
GFSK	2477	30	10000	100	300	20.269	-44.634	<0.269	PASS
GFSK	2477	10000	25000	100	300	20.269	-38.501	<0.269	PASS

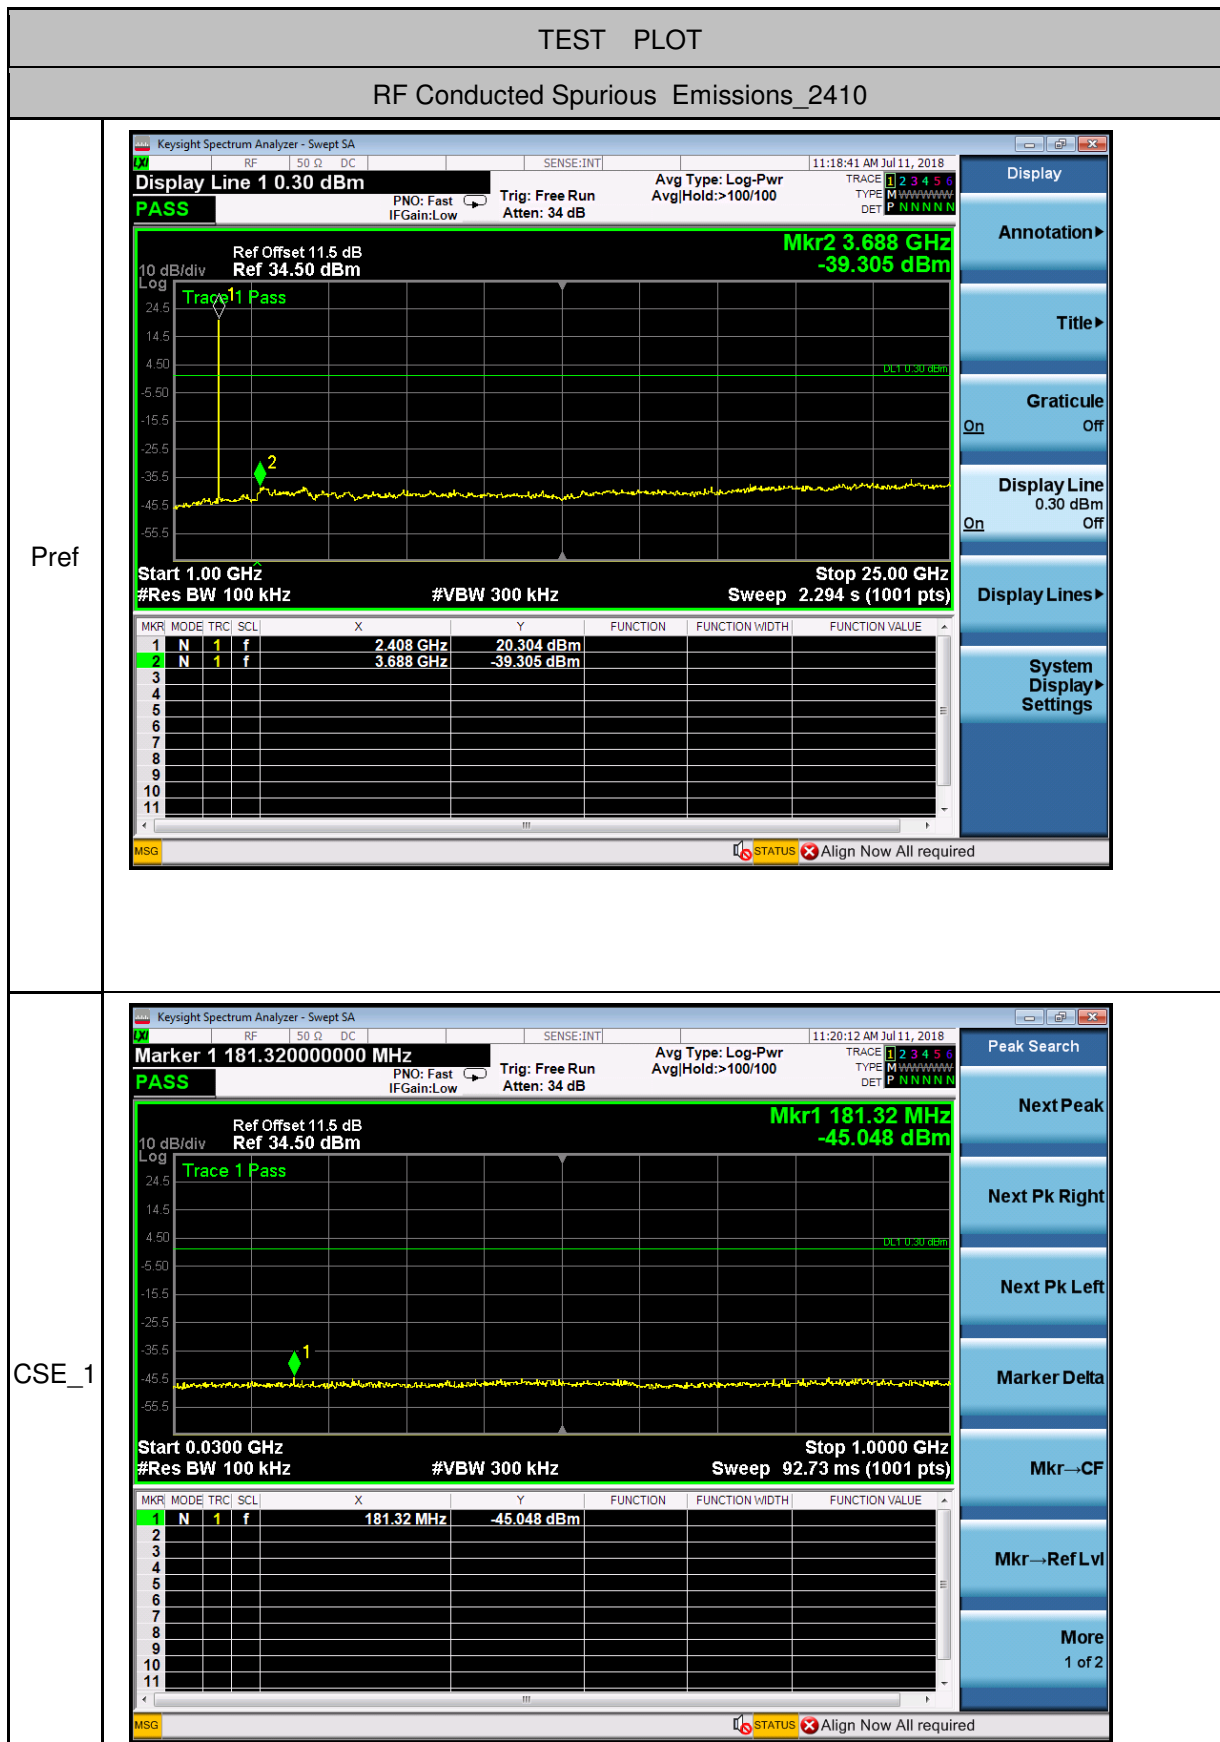




### RF Conducted Spurious Emissions\_2445

Pref

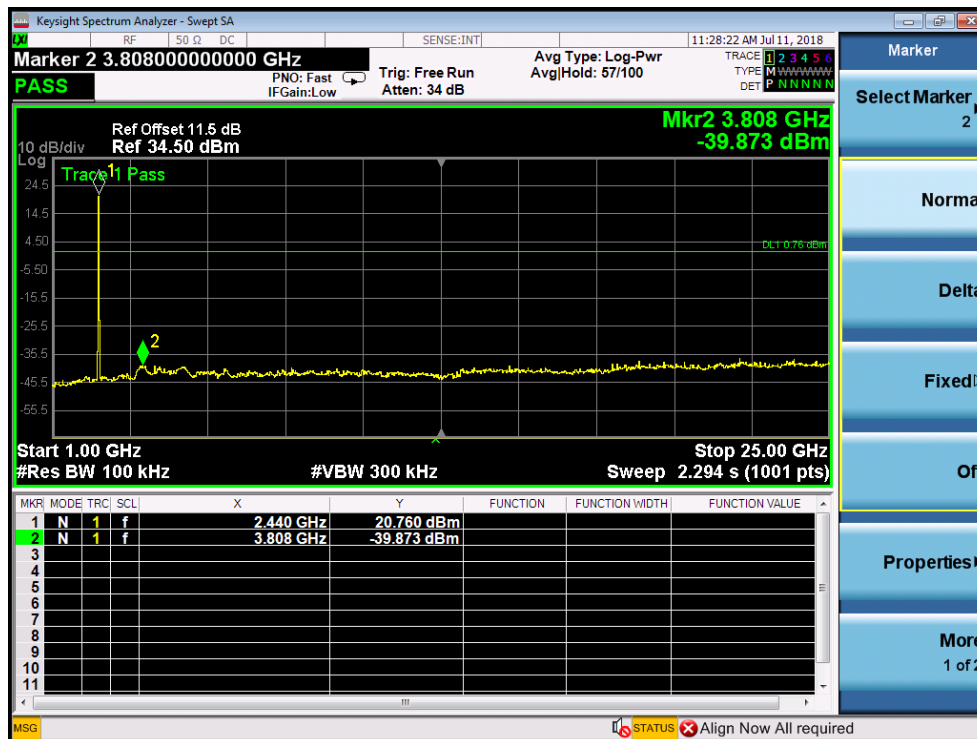


CSE\_1

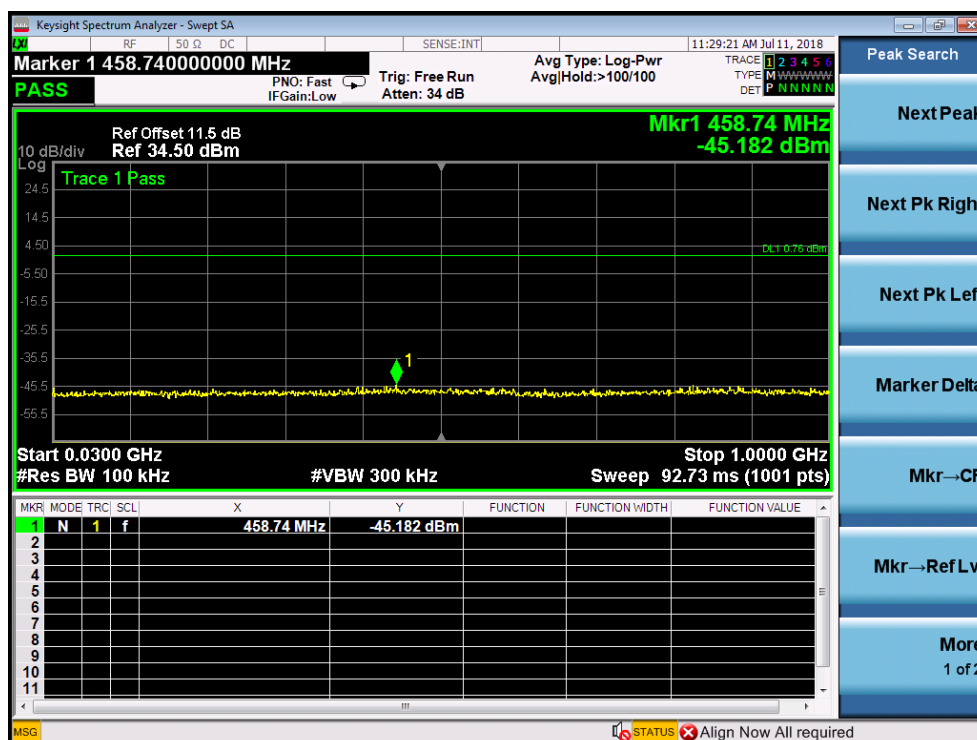


### RF Conducted Spurious Emissions\_2477

Pref

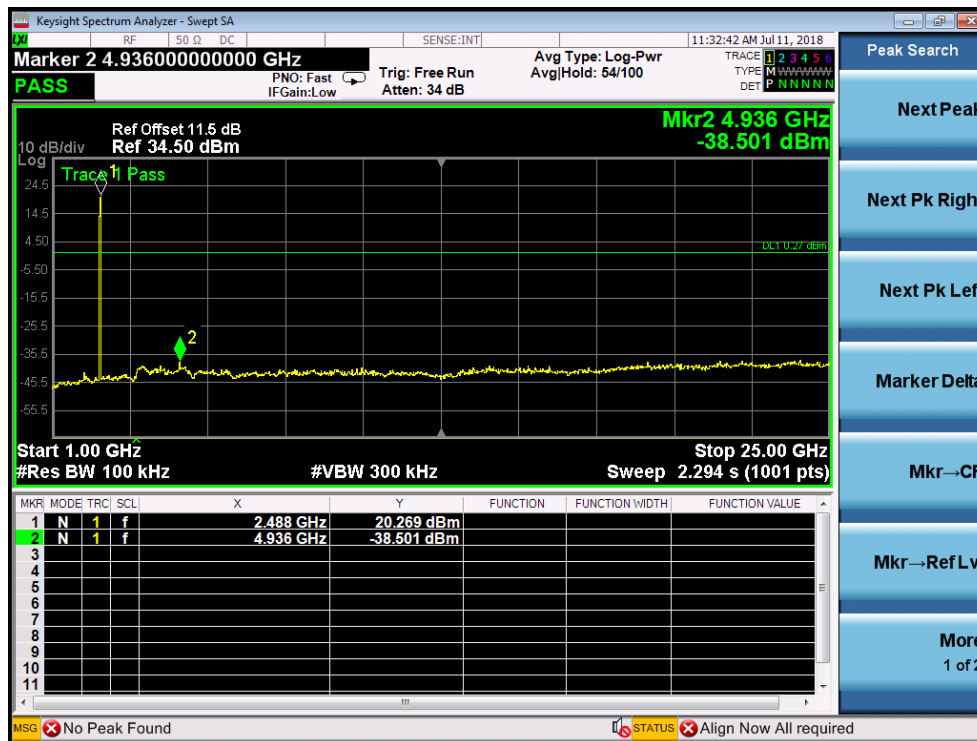

CSE\_1

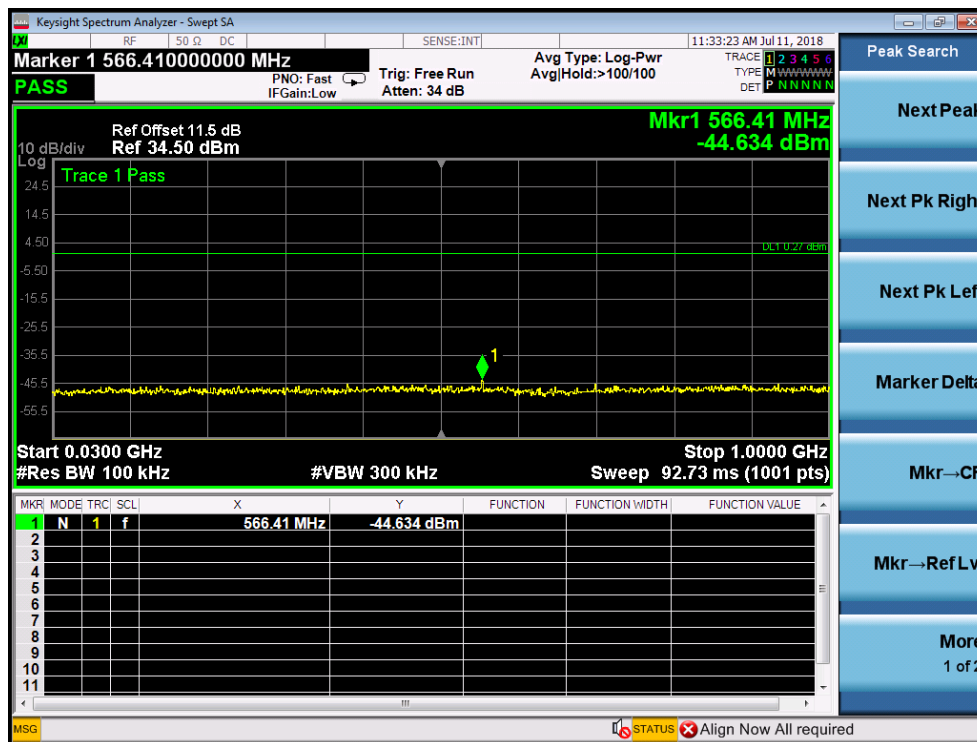

--End of Report--