

FCC PART 15 B, CLASS B TEST REPORT

For

Gajah International (HK) Co., Ltd

18/F, Bel Trade Commercial Building, 1-3, Burrows Street, Wan chai, Hong Kong

FCC ID: UFKMD800500

Report Type: Class II Permissive Change	Product Type: 7" MID
Test Engineer: Charlie Chen	<i>charlie.chen</i>
Report Number: RSZ130520002-00A	
Report Date: 2013-07-18	
Reviewed By: RF Engineer	<i>Sula Huang</i>
Prepared By: Bay Area Compliance Laboratories Corp. (Shenzhen) 6/F, the 3rd Phase of WanLi Industrial Building ShiHua Road, FuTian Free Trade Zone Shenzhen, Guangdong, China Tel: +86-755-33320018 Fax: +86-755-33320008 www.baclcorp.com.cn	

Note: This test report is prepared for the customer shown above and for the device described herein. It may not be duplicated or used in part without prior written consent from Bay Area Compliance Laboratories Corp.

TABLE OF CONTENTS

GENERAL INFORMATION.....	3
PRODUCT DESCRIPTION FOR EQUIPMENT UNDER TEST (EUT)	3
OBJECTIVE	3
RELATED SUBMITTAL(S)/GRANT(S).....	3
TEST FACILITY	4
SYSTEM TEST CONFIGURATION.....	5
DESCRIPTION OF TEST CONFIGURATION	5
EUT EXERCISE SOFTWARE	5
EQUIPMENT MODIFICATIONS	5
SUPPORT EQUIPMENT LIST AND DETAILS	5
EXTERNAL I/O CABLE.....	5
BLOCK DIAGRAM OF TEST SETUP	6
SUMMARY OF TEST RESULTS	7
FCC §15.107 – AC LINE CONDUCTED EMISSIONS.....	8
APPLICABLE STANDARD	8
MEASUREMENT UNCERTAINTY	8
EUT SETUP	8
EMI TEST RECEIVER SETUP.....	9
TEST PROCEDURE	9
TEST EQUIPMENT LIST AND DETAILS.....	9
CORRECTED FACTOR & MARGIN CALCULATION	9
TEST RESULTS SUMMARY	10
TEST DATA	10
FCC §15.109 - RADIATED SPURIOUS EMISSIONS	13
APPLICABLE STANDARD	13
MEASUREMENT UNCERTAINTY	13
EUT SETUP	13
EMI TEST RECEIVER SETUP.....	14
TEST PROCEDURE	14
TEST EQUIPMENT LIST AND DETAILS.....	14
CORRECTED AMPLITUDE & MARGIN CALCULATION	15
TEST RESULTS SUMMARY	15
TEST DATA	15

GENERAL INFORMATION

Product Description for Equipment under Test (EUT)

The *Gajah International (HK) Co., Ltd*'s product, model number: *MD7011 (FCC ID: UFKMD800500)* or the "EUT" in this report was a 7" *MID*, which was measured approximately: 192.3 mm (L) x 123 mm (W) x 11.1mm (H), rated with input voltage: DC 3.7V rechargeable Li-ion battery or DC 5.0V charging from adapter. The highest operating frequency is 1.2 GHz.

Adapter Information:

Model: PSEA050150U USB2

Input: 100-240V~50/60Hz, 0.25A

Output: DC 5.0V, 1.5A

**All measurement and test data in this report was gathered from production sample serial number: 1305099 (Assigned by BACL, Shenzhen). The EUT supplied by the applicant was received on 2013-05-20.*

Objective

This test report is prepared on behalf of *Gajah International (HK) Co., Ltd* in accordance with Part 2-Subpart J, Part 15-Subparts A and B of the Federal Communication Commissions rules.

The objective of the manufacturer is to determine the compliance of the EUT with FCC Part 15 B.

This is a class II permissive change basing on the original report RSZ130520001-00A with FCC ID: UFKMD800500, the changes between the original device and the current one as below:

- 1) Changing the product name: the original one is 8" *MID*, the current one is 7" *MID*
- 2) Changing the model name: the original one is MD8005, the current one is MD7011
- 3) Changing the screen size: the original size is 8 inches, the current size is 7 inches
- 4) Changing the material and color of the casing

For the changes above, it will affect all test data, so all test data and photos are updated.

Related Submittal(s)/Grant(s)

FCC Part 15.247 DSS and Part 15.247 DTS submissions with FCC ID: UFKMD800500.

Test Facility

The test site used by Bay Area Compliance Laboratories Corp. (Shenzhen) to collect test data is located on the 6/F, the 3rd Phase of WanLi Industrial Building, ShiHua Road, FuTian Free Trade Zone Shenzhen, Guangdong, China.

Test site at Bay Area Compliance Laboratories Corp. (Shenzhen) has been fully described in reports submitted to the Federal Communication Commission (FCC). The details of these reports have been found to be in compliance with the requirements of Section 2.948 of the FCC Rules on December 06, 2010. The facility also complies with the radiated and AC line conducted test site criteria set forth in ANSI C63.4-2009.

The Federal Communications Commission has the reports on file and is listed under FCC Registration No.: 382179. The test site has been approved by the FCC for public use and is listed in the FCC Public Access Link (PAL) database.

SYSTEM TEST CONFIGURATION

Description of Test Configuration

The system was configured for testing in a manufacturer testing fashion.

EUT Operation Mode: Downloading (data transforms with computer)

EUT Exercise Software

“winthrax” exercise software was used.

Equipment Modifications

No modification was made to the EUT tested.


Support Equipment List and Details

Manufacturer	Description	Model	Serial Number
DELL	Host PC	VOSTRO 220S	127BP2X
DELL	Keyboard	L100	CNORH656658907BL05DC
DELL	Mouse	MOC5UO	G1900NKD
DELL	LCD Monitor	E178WFPC	CN-OWY564-64180-7C4-2SQH
SAST	Modem	AEM-2100	0293
Kingston	Micro SD card	4 GB	/
N/A	Earphone	N/A	N/A

External I/O Cable

Cable Description	Length (m)	From/Port	To
Unshielded Detachable AC Cable	1.2	Host PC	LISN
Unshielded Detachable AC Cable	1.2	LCD Monitor	LISN
Unshielded Detachable AC Cable	1.0	Adapter	Modem
Shielded Undetachable K/B Cable	1.5	Host PC	Keyboard
Shielded Undetachable Mouse Cable	1.5	Host PC	Mouse
Shielded Detachable RS232 Cable	1.2	Host PC	Modem
Shielded Detachable VGA Cable	1.5	Host PC	LCD Monitor
Shielded Detachable USB Cable	0.6	Host PC	EUT

Block Diagram of Test Setup

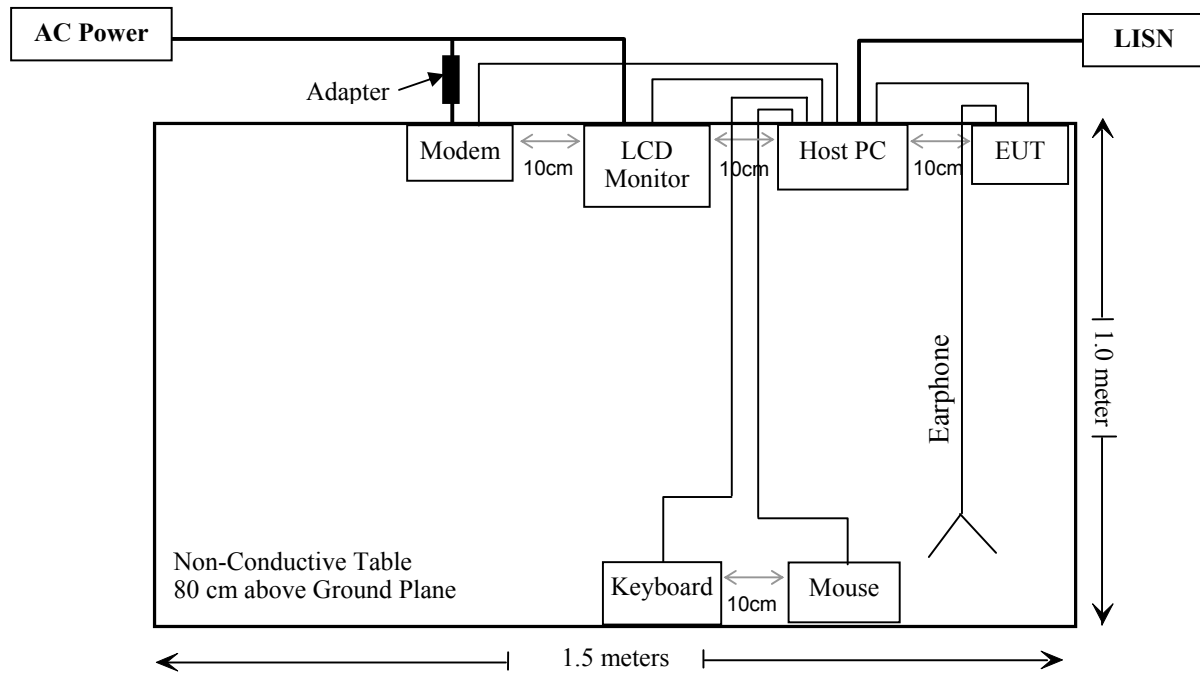

SUMMARY OF TEST RESULTS

FCC Rules	Description of Test	Results
§15.107	AC Line Conducted Emissions	Compliance
§15.109	Radiated Spurious Emissions	Compliance

FCC §15.107 – AC LINE CONDUCTED EMISSIONS

Applicable Standard

According to FCC §15.107


Measurement Uncertainty

Input quantities to be considered for conducted disturbance measurements may be receiver reading, attenuation of the connection between AMN/ISN and receiver, AMN/ISN voltage division factor, AMN/ISN VDF frequency interpolation and receiver related input quantities, etc.

Based on CISPR 16-4-2:2011, the expanded combined standard uncertainty of conducted disturbance test at Bay Area Compliance Laboratories Corp. (Shenzhen) is shown as below. And the uncertainty will not be taken into consideration for the test data recorded in the report.

Port	Measurement uncertainty
AC Mains	3.26 dB (k=2, 95% level of confidence)
CAT 3	3.70 dB (k=2, 95% level of confidence)
CAT 5	3.86 dB (k=2, 95% level of confidence)
CAT 6	4.64 dB (k=2, 95% level of confidence)

EUT Setup

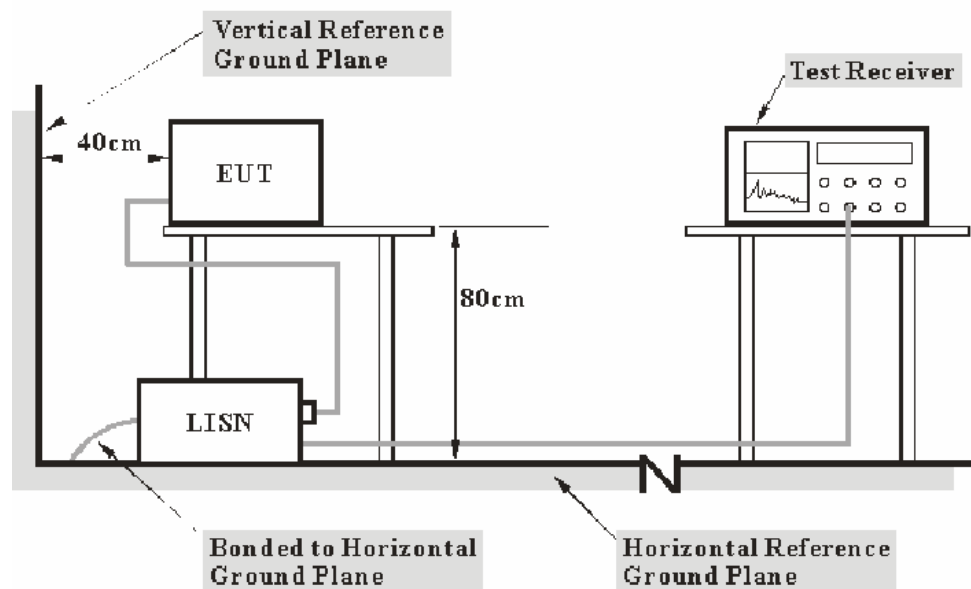

- Note: 1. Support units were connected to second LISN.
 2. Both of LISNs (AMN) 80 cm from EUT and at the least 80 cm from other units and other metal planes support units.

The measurement procedure of EUT setup is according with per ANSI C63.4-2009. The related limit was specified in FCC Part 15.107 Class B.

The spacing between the peripherals was 10 cm.

EMI Test Receiver Setup

The EMI test receiver was set to investigate the spectrum from 150 kHz to 30 MHz.

During the conducted emission test, the EMI test receiver was set with the following configurations:

Frequency Range	IF B/W
150 kHz – 30 MHz	9 kHz

Test Procedure

During the conducted emission test, the host PC was connected to the LISN and the other relevant equipments were connected to the AC power.

Maximizing procedure was performed on the six (6) highest emissions of the EUT.

All data was recorded in the Quasi-peak and average detection mode.

Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
Rohde & Schwarz	EMI Test Receiver	ESCI	101122	2013-05-09	2014-05-09
Rohde & Schwarz	LISN	ENV216	3560.6650.12-101613-Yb	2013-05-07	2014-05-07
BACL	CE Test software	BACL-CE	V1.0	-	-

* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Shenzhen) attests that all calibrations have been performed in accordance to requirements that traceable to National Primary Standards and International System of Units (SI).

Corrected Factor & Margin Calculation

The Corrected factor is calculated by adding LISN/ISN VDF (Voltage Division Factor) and Cable Loss. The basic equation is as follows:

$$\text{Correction Factor} = \text{LISN VDF} + \text{Cable Loss}$$

The “**Margin**” column of the following data tables indicates the degree of compliance with the applicable limit. For example, a margin of 7dB means the emission is 7 dB below the limit. The equation for margin calculation is as follows:

$$\text{Margin} = \text{Limit} - \text{Corrected Amplitude}$$

Test Results Summary

According to the recorded data in following table, with the worst margin reading of:

8.1 dB at 8.840008 MHz in the **Neutral** conducted mode

Refer to CISPR16-4-2:2011 and CISPR 16-4-1:2009, the measured level is in compliance with the limit if

$$L_m + U_{(L_m)} \leq L_{lim} + U_{cispr}$$

In BACL, $U_{(L_m)}$ is less than U_{cispr} , if L_m is less than L_{lim} , it implies that the EUT complies with the limit.

Test Data

Environmental Conditions


Temperature:	25 °C
Relative Humidity:	56 %
ATM Pressure:	100.0 kPa

The testing was performed by Charlie Chen on 2013-05-30.

EUT Operation Mode: Downloading

AC 120V/60 Hz, Line

EMI Auto Test L

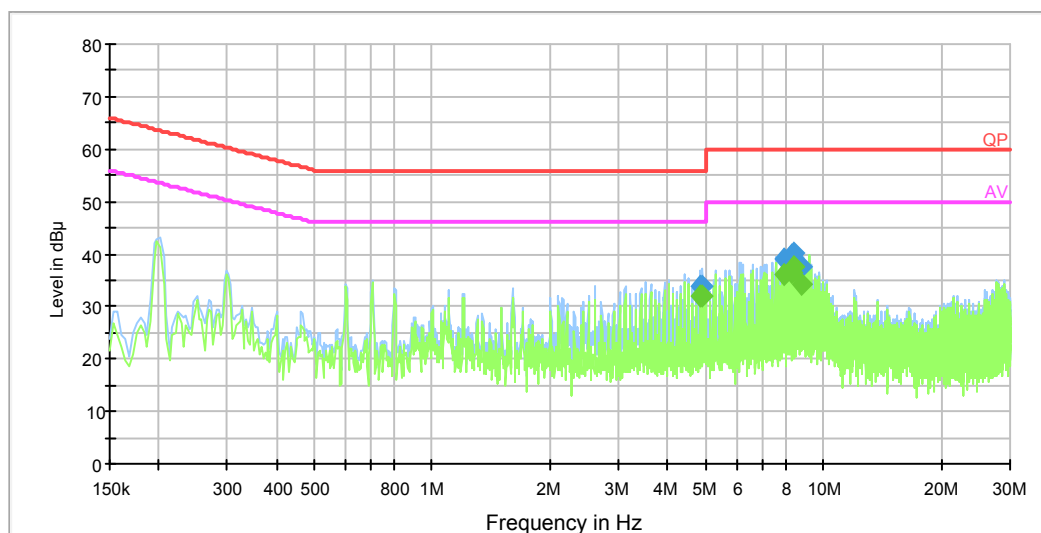


Quasi-peak detection mode

Frequency (MHz)	Corrected Amplitude (dBμV)	Corrected Factor (dB)	Limit (dBμV)	Margin (dB)	Remark (PK/QP/Ave.)
8.441267	40.1	0.5	60.0	19.9	QP
8.339228	39.7	0.5	60.0	20.3	QP
7.937766	39.0	0.5	60.0	21.0	QP
4.822989	34.0	0.4	56.0	22.0	QP
4.925666	33.7	0.4	56.0	22.3	QP
8.744948	37.6	0.6	60.0	22.4	QP

Average detection mode

Frequency (MHz)	Corrected Amplitude (dBμV)	Corrected Factor (dB)	Limit (dBμV)	Margin (dB)	Remark (PK/QP/Ave.)
8.441267	37.4	0.5	50.0	12.6	Ave.
8.339228	36.3	0.5	50.0	13.7	Ave.
7.937766	36.1	0.5	50.0	13.9	Ave.
4.925666	32.0	0.4	46.0	14.0	Ave.
4.822989	31.9	0.4	46.0	14.1	Ave.
8.744948	34.2	0.6	50.0	15.8	Ave.

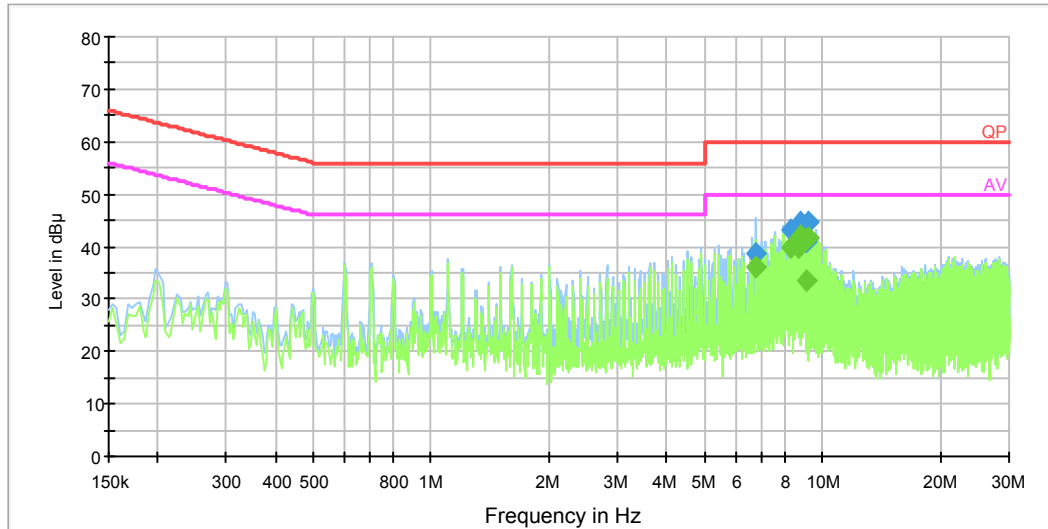AC 120V/60 Hz, Neutral**EMI Auto Test N****Quasi-peak detection mode**

Frequency (MHz)	Corrected Amplitude (dBμV)	Corrected Factor (dB)	Limit (dBμV)	Margin (dB)	Remark (PK/QP/Ave.)
9.242325	44.7	0.5	60.0	15.3	QP
8.840008	44.5	0.5	60.0	15.5	QP
8.738146	44.1	0.5	60.0	15.9	QP
8.338540	43.3	0.5	60.0	16.7	QP
9.135844	41.0	0.5	60.0	19.0	QP
6.728938	38.9	0.5	60.0	21.1	QP

Average detection mode

Frequency (MHz)	Corrected Amplitude (dBμV)	Corrected Factor (dB)	Limit (dBμV)	Margin (dB)	Remark (PK/QP/Ave.)
8.840008	41.9	0.5	50.0	8.1	Ave.
9.242325	41.8	0.5	50.0	8.2	Ave.
8.738146	40.0	0.5	50.0	10.0	Ave.
8.338540	39.6	0.5	50.0	10.4	Ave.
6.728938	36.0	0.5	50.0	14.0	Ave.
9.135844	33.4	0.5	50.0	16.6	Ave.

FCC §15.109 - RADIATED SPURIOUS EMISSIONS

Applicable Standard

FCC §15.109


Measurement Uncertainty

All measurements involve certain levels of uncertainties, especially in field of EMC. The factors contributing to uncertainties are spectrum analyzer, cable loss, antenna factor calibration, antenna directivity, antenna factor variation with height, antenna phase center variation, antenna factor frequency interpolation, measurement distance variation, site imperfections, mismatch (average), and system repeatability.

Based on CISPR 16-4-2:2011, the expended combined standard uncertainty of radiation emissions at Bay Area Compliance Laboratories Corp. (Shenzhen) is shown in below table. And the uncertainty will not be taken into consideration for the test data recorded in the report

Frequency	Polarity	Measurement uncertainty
30MHz~200MHz	Horizontal	4.62 dB (k=2, 95% level of confidence)
	Vertical	4.54 dB (k=2, 95% level of confidence)
200MHz~1GHz	Horizontal	4.84 dB (k=2, 95% level of confidence)
	Vertical	5.91 dB (k=2, 95% level of confidence)
1 GHz~6 GHz	Horizontal/Vertical	4.68 dB (k=2, 95% level of confidence)
Above 6 GHz	Horizontal/Vertical	4.92 dB (k=2, 95% level of confidence)

EUT Setup

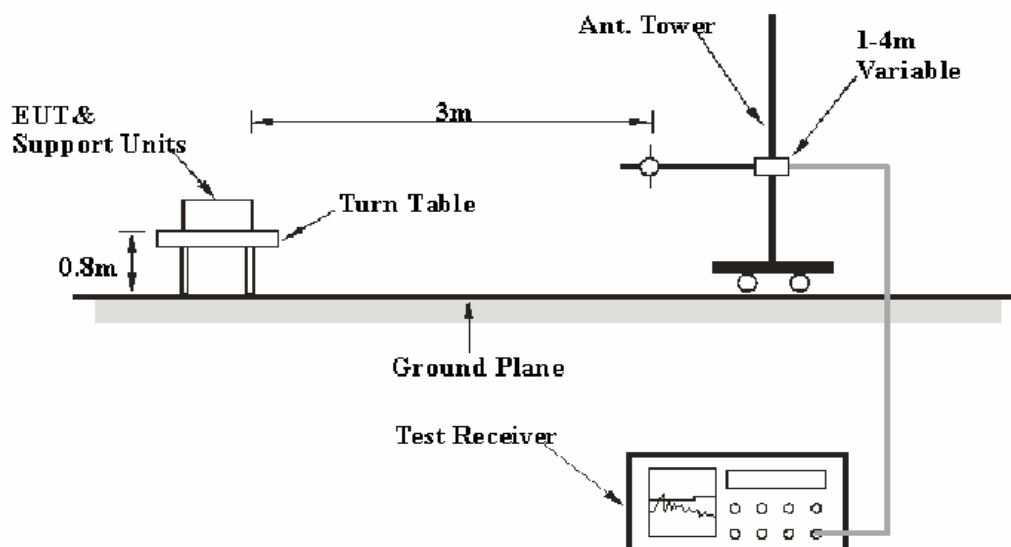

The radiated emission tests were performed in the 3 meters chamber test site, using the setup accordance with the ANSI C63.4-2009. The specification used was the FCC Part 15.109 Class B limits.

The external I/O cables were draped along the test table and formed a bundle 30 to 40 cm long in the middle.

The spacing between the peripherals was 10 cm.

EMI Test Receiver Setup

The system was investigated from 30 MHz to 6 GHz.

During the radiated emission test, the EMI test receiver was set with the following configurations:

Frequency Range	RBW	Video B/W	IF B/W	Detector
30 MHz – 1000 MHz	100 kHz	300 kHz	120 kHz	QP
Above 1 GHz	1MHz	3 MHz	/	PK
	1MHz	10 Hz	/	Ave.

Test Procedure

For the radiated emissions test, the host PC and relevant equipments were connected to AC floor outlet.

Maximizing procedure was performed on the highest emissions to ensure that the EUT complied with all installation combinations.

Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
HP	Amplifier	8447E	1937A01046	2012-11-24	2013-11-23
Rohde & Schwarz	EMI Test Receiver	ESCI	101122	2013-05-09	2014-05-09
Sunol Sciences	Broadband Antenna	JB1	A040904-2	2011-11-28	2014-11-27
SUPER ULTRA	Amplifier	ZVA-213+	N/A	2012-11-24	2013-11-23
Sunol Sciences	Horn Antenna	DRH-118	A052304	2011-12-01	2014-11-30
Rohde & Schwarz	Signal Analyzer	FSIQ26	8386001028	2012-11-24	2013-11-23
R&S	Auto test Software	EMC32	V6.30	N/A	N/A

* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Shenzhen) attests that all calibrations have been performed in accordance to requirements that traceable to National Primary Standards and International System of Units (SI).

Corrected Amplitude & Margin Calculation

The Corrected Amplitude is calculated by adding the Antenna Factor and Cable Loss, and subtracting the Amplifier Gain from the Meter Reading. The basic equation is as follows:

$$\text{Corrected Amplitude} = \text{Meter Reading} + \text{Antenna Factor} + \text{Cable Loss} - \text{Amplifier Gain}$$

The “**Margin**” column of the following data tables indicates the degree of compliance with the applicable limit. For example, a margin of 7 dB means the emission is 7 dB below the limit. The equation for margin calculation is as follows:

$$\text{Margin} = \text{Limit} - \text{Corrected Amplitude}$$

Test Results Summary

According to the data in the following table, with the worst margin reading of:

5.6 dB at 39.997225 MHz in the Vertical polarization

Refer to CISPR16-4-2:2011 and CISPR 16-4-1:2009, the measured level is in compliance with the limit if

$$L_m + U_{(Lm)} \leq L_{lim} + U_{cispr}$$

In BACL, $U_{(Lm)}$ is less than U_{cispr} , if L_m is less than L_{lim} , it implies that the EUT complies with the limit.

Test Data

Environmental Conditions


Temperature:	25 °C
Relative Humidity:	56 %
ATM Pressure:	100.0 kPa

The testing was performed by Charlie Chen on 2013-05-30.

EUT Operation Mode: Downloading

1) 30 MHz - 1 GHz:

FCC Part 15B Class B

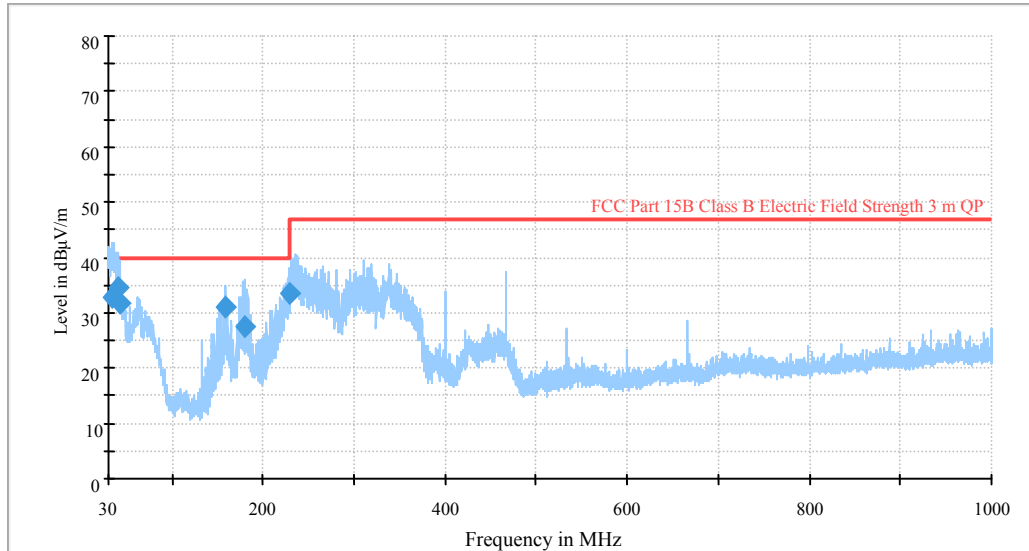

Frequency (MHz)	Corrected Amplitude (dBμV/m)	Antenna Height (cm)	Antenna Polarity	Turntable Position (Degree)	Correction Factor (dB/m)	Limit (dBμV/m)	Margin (dB)
39.997225	34.4	105.0	V	205.0	-14.3	40.0	5.6
228.529325	33.4	117.0	V	337.0	-16.2	40.0	6.6
33.387175	32.9	160.0	V	1.0	-9.4	40.0	7.1
42.799100	31.9	122.0	V	0.0	-16.3	40.0	8.1
158.464225	31.1	221.0	H	227.0	-15.0	40.0	8.9
179.674650	27.5	123.0	V	0.0	-16.0	40.0	12.5

2) Above 1 GHz:

Frequency (MHz)	Receiver		Turntable Degree	Rx Antenna		Corrected Factor (dB)	Corrected Amplitude (dBμV/m)	FCC Part 15B, Class B	
	Reading (dBμV)	Detector (PK/QP/Ave.)		Height (m)	Polar (H/V)			Limit (dBμV/m)	Margin (dB)
4328.6	36.47	Ave.	129	1.6	V	11.63	48.100	54	5.90
2135.2	35.28	Ave.	198	1.2	H	3.94	39.22	54	14.78
4328.6	44.29	PK	129	1.6	V	11.63	55.92	74	18.08
2135.2	45.58	PK	198	1.2	H	3.94	49.52	74	24.48

***** END OF REPORT *****