

FCC PART 15.249 MEASUREMENT AND TEST REPORT

For

Cooper Wiring Devices Inc.

203 Cooper Circle, Peachtree City, GA 30269, USA

FCC ID: UH2-RF9500

This Report Concerns: <input checked="" type="checkbox"/> Original Report	Equipment Type: RF Battery Operated Switch
Test Engineer: Jim Li <i>Jim Li</i>	
Report No.: RSH07122051	
Test Date: 2007-12-29	
Report Date: 2007-12-29	
Reviewed By: EMC Manager: Green Xu <i>Green Xu</i>	
Prepared By: Bay Area Compliance Laboratories Corp. (Shenzhen) 6/F, the 3rd Phase of WanLi Industrial Building, ShiHua Road, FuTian Free Trade Zone Shenzhen, Guangdong, China Tel: +86-755-33320018 Fax: +86-755-33320008	

Note: This test report is for the customer shown above and their specific product only. It may not be duplicated or used in part without prior written consent from Bay Area Compliance Laboratories Corp. (Shenzhen). This report **must not** be used by the customer to claim product certification, approval, or endorsement by NVLAP, NIST or any agency of the Federal Government.

TABLE OF CONTENTS

GENERAL INFORMATION.....3

 PRODUCT DESCRIPTION FOR EQUIPMENT UNDER TEST (EUT)3

 OBJECTIVE3

 RELATED SUBMITTAL(S)/GRANT(S).....3

 TEST METHODOLOGY3

 TEST FACILITY3

SYSTEM TEST CONFIGURATION.....5

 JUSTIFICATION5

 EQUIPMENT MODIFICATIONS5

 CONFIGURATION OF TEST SETUP5

 BLOCK DIAGRAM OF TEST SETUP5

SUMMARY OF TEST RESULTS6

§15.203 - ANTENNA REQUIREMENT.....7

 APPLICABLE STANDARD7

 ANTENNA CONNECTOR CONSTRUCTION7

§15.205(A) §15.209(A) §15.249(A) §15.249(D) - RADIATED EMISSIONS.....8

 APPLICABLE STANDARD8

 MEASUREMENT UNCERTAINTY8

 TEST EQUIPMENT SETUP8

 EUT SETUP9

 TEST EQUIPMENT LIST AND DETAILS.....9

 TEST PROCEDURE10

 CORRECTED AMPLITUDE & MARGIN CALCULATION10

 TEST RESULTS SUMMARY.....10

 TEST DATA10

§15.249(D) – OUT OF BAND EMISSIONS13

 APPLICABLE STANDARD13

 TEST PROCEDURE13

 TEST EQUIPMENT LIST AND DETAILS.....13

 TEST DATA13

GENERAL INFORMATION

Product Description for Equipment under Test (EUT)

The *Cooper Wiring Devices Inc.*'s product, model number: *RF9500* or the "EUT" as referred to in this report is a *RF Battery Operated Switch*, which measures approximately 12.0cmL x 5.0cmW x 0.5cmH, rated input voltage: DC 3V battery.

** All measurement and test data in this report was gathered from production sample serial number: 0712024 (Assigned by BACL, Shenzhen). The EUT was received on 2007-12-20.*

Objective

This Type approval report is prepared on behalf of *Cooper Wiring Devices Inc.* in accordance with Part 2, Subpart J, and Part 15, Subparts A, B and C of the Federal Communication Commissions rules.

The tests were performed in order to determine compliance with FCC Part 15, Subpart C, and section 15.203, 15.205, 15.207, 15.209 and 15.249 rules.

Related Submittal(s)/Grant(s)

No Related Submittals.

Test Methodology

All measurements contained in this report were conducted with ANSI C63.4-2003, American National Standard for Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the range of 9 kHz to 40 GHz.

All radiated and conducted emissions measurement was performed at Bay Area Compliance Laboratories Corp. (Shenzhen). The radiated testing was performed at an antenna-to-EUT distance of 3 meters.

Test Facility

The Test site used by Bay Area Compliance Laboratories Corp. (Shenzhen) to collect test data is located in the 6/F, the 3rd Phase of WanLi Industrial Building, ShiHua Road, FuTian Free Trade Zone Shenzhen, Guangdong, China.

Test site at Bay Area Compliance Laboratories Corp. (Shenzhen) has been fully described in reports submitted to the Federal Communication Commission (FCC). The details of these reports have been found to be in compliance with the requirements of Section 2.948 of the FCC Rules on November 04, 2004. The facility also complies with the radiated and AC line conducted test site criteria set forth in ANSI C63.4-2003.

The Federal Communications Commission has the reports on file and is listed under FCC Registration No.: 382179. The test site has been approved by the FCC for public use and is listed in the FCC Public Access Link (PAL) database.

Additionally, Bay Area Compliance Laboratories Corp. (Shenzhen) is a National Institute of Standards and Technology (NIST) accredited laboratory, under the National Voluntary Laboratory Accredited Program (Lab Code 200707-0).



NVLAP LAB CODE 200707-0

The current scope of accreditations can be found at
<http://ts.nist.gov/Standards/scopes/2007070.htm>

SYSTEM TEST CONFIGURATION


Justification

The system was configured for testing in a typical fashion (as normally used by a typical user).

Equipment Modifications


No modifications were made to the unit tested.

Configuration of Test Setup



EUT

Block Diagram of Test Setup

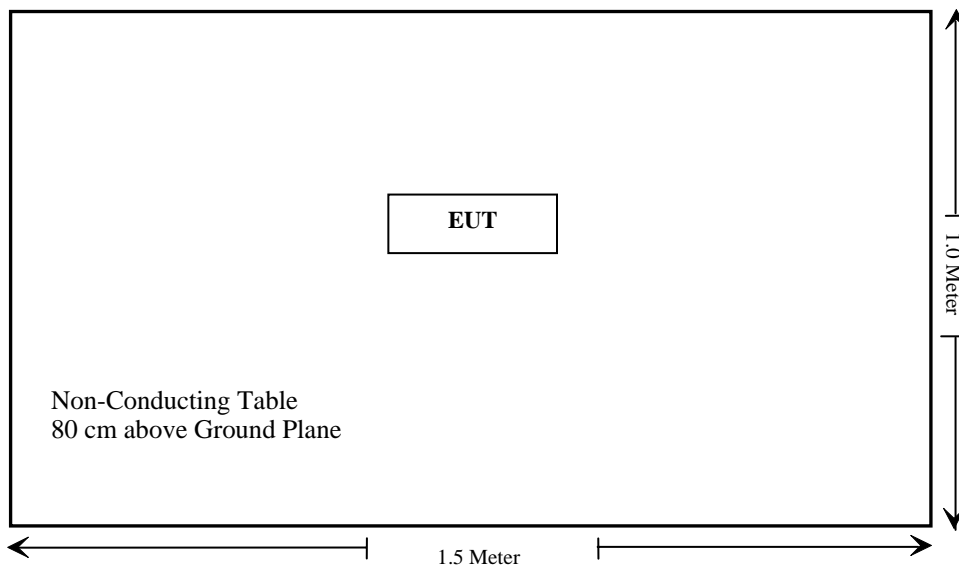

SUMMARY OF TEST RESULTS

FCC RULES	DESCRIPTION OF TEST	RESULT
§15.203	Antenna Requirement	Compliant
§15.207(a)	Conduction Emissions	N/A*
§15.205(a), §15.209(a), 15.249(a), §15.249(c)	Radiated Emissions	Compliant
§15.249(d)	Out of Band Emissions	Compliant

* This equipment works using battery only.

§15.203 - ANTENNA REQUIREMENT

Applicable Standard

For intentional device, according to §15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used.

Antenna Connector Construction

The EUT antenna is a permanently attached antenna, which in accordance to section 15.203, is considered sufficient to comply with the provisions of this section.

Result: Compliant.

§15.205(a) §15.209(a) §15.249(a) §15.249(d) - RADIATED EMISSIONS

Applicable Standard

As per §15.249 (a), except as provided in paragraph (b) of this section, the field strength of emissions from intentional radiators operated within these frequency bands shall comply with the following:

Fundamental frequency	Field strength of fundamental (millivolts/meter)	Field strength of harmonics (microvolts/meter)
902–928 MHz	50	500
2400–2483.5 MHz	50	500
5725–5875 MHz	50	500
24.0–24.25 GHz	250	2500

As per §15.249 (c), Field strength limits are specified at a distance of 3 meters.

(d) Emissions radiated outside of the specified frequency bands, except for harmonics, shall be attenuated by at least 50 dB below the level of the fundamental or to the general radiated emission limits in §15.209, whichever is the lesser attenuation.

Measurement Uncertainty

All measurements involve certain levels of uncertainties, especially in field of EMC. The factors contributing to uncertainties are spectrum analyzer, cable loss, antenna factor calibration, antenna directivity, antenna factor variation with height, antenna phase center variation, antenna factor frequency interpolation, measurement distance variation, site imperfections, mismatch (average), and system repeatability.

Based on NIS 81, The Treatment of Uncertainty in EMC Measurements, the best estimate of the uncertainty of a radiation emissions measurement at Bay Area Compliance Laboratories Corp. (Shenzhen) is ± 4.0 dB.

Test Equipment Setup

The spectrum analyzer or receiver is set as:


Below 1000MHz:

$$\text{RBW} = 100 \text{ kHz} / \text{VBW} = 300 \text{ kHz} / \text{Sweep} = \text{Auto}$$

Above 1000MHz:

- (1) Peak: RBW = 1MHz / VBW = 1MHz / Sweep = Auto
- (2) Average: RBW = 1MHz / VBW = 10Hz / Sweep = Auto

EUT Setup

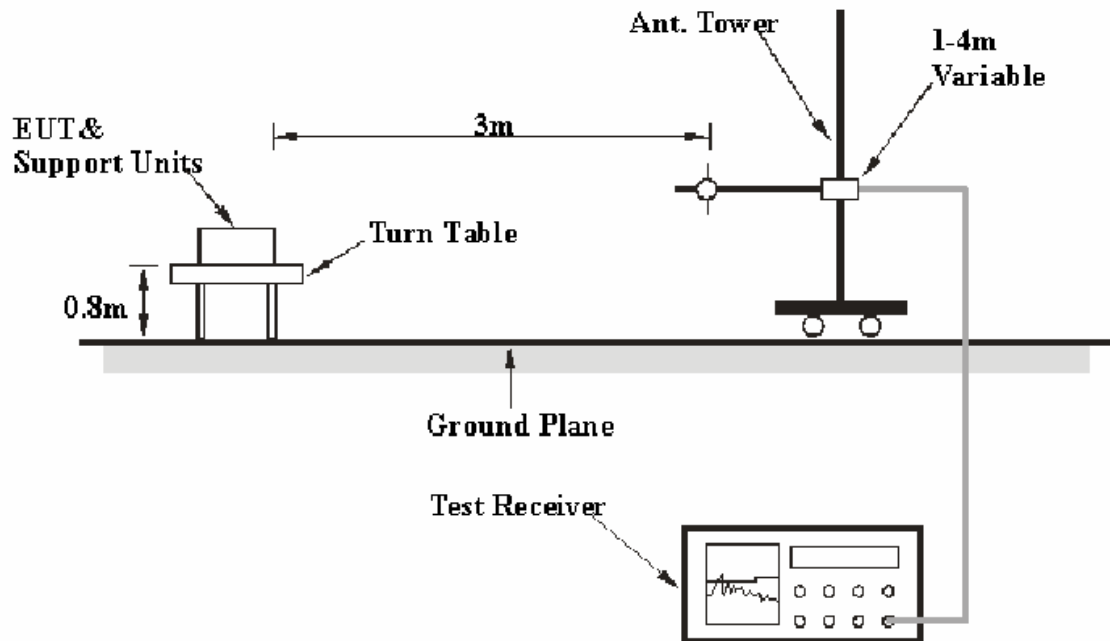

The radiated emission and out of band emission tests were performed in the 3 meters chamber B, using the setup accordance with the ANSI C63.4-2003. The specification used was the FCC 15.209 and FCC 15.249 limits.

Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
Rohde & Schwarz	EMI Test Receiver	ESCI	100224	2007-10-16	2008-10-16
HP	Amplifier	8447E	1937A01046	2007-11-15	2008-11-15
Sunol Sciences	Broadband Antenna	JB1	A040904-1	2007-08-14	2008-08-14
HP	Amplifier	8449B	3008A00277	2007-09-29	2008-09-29
Sunol Sciences	Horn Antenna	DRH-118	A052604	2007-09-25	2008-09-25
Rohde&Schwarz	Spectrum Analyzer	FSEM30	849720/019	2007-05-09	2008-05-09

*** Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Shenzhen) attests that all calibrations have been performed in accordance to NVLAP requirements, traceable to the NIST.

Test Procedure

For the radiated emissions test, the EUT, and all support equipment power cords was connected to the AC floor outlet.

Maximizing procedure was performed on the highest emissions to ensure that the EUT complied with all installation combinations.

The EUT is set 3 meter away from the testing antenna, which is varied from 1-4 mete, and the EUT is placed on a turntable, which is 0.8 meter above ground plane, the table shall be rotated for 360 degrees to find out the highest emission. The receiving antenna should be changed the polarization both of horizontal and vertical.

Corrected Amplitude & Margin Calculation

The Corrected Amplitude is calculated by adding the Antenna Factor and Cable Loss, and subtracting the Amplifier Gain from the Meter Reading. The basic equation is as follows:

$$\text{Corrected Amplitude} = \text{Meter Reading} + \text{Antenna Factor} + \text{Cable Loss} - \text{Amplifier Gain}$$

The “**Margin**” column of the following data tables indicates the degree of compliance with the applicable limit. For example, a margin of 7dB means the emission is 7dB below the limit for Class B. The equation for margin calculation is as follows:

$$\text{Margin} = \text{Limit} - \text{Corrected Amplitude}$$

Test Results Summary

According to the data in the following table, the EUT complied with the FCC Part 15.209 & 15.249, with the worst margin reading of:

Below 1000 MHz: **16.4 dB** at **799.977225 MHz** in the **Horizontal** polarization.

Above 1000MHz: **19.94 dB** at **2880 MHz** in the **Vertical** polarization.

Test Data


Environmental Conditions

Temperature:	25 ° C
Relative Humidity:	56%
ATM Pressure:	100.2kPa

The testing was performed by Jim Li on 2007-12-29.

Test Mode: Transmitting

Below 1000 MHz:

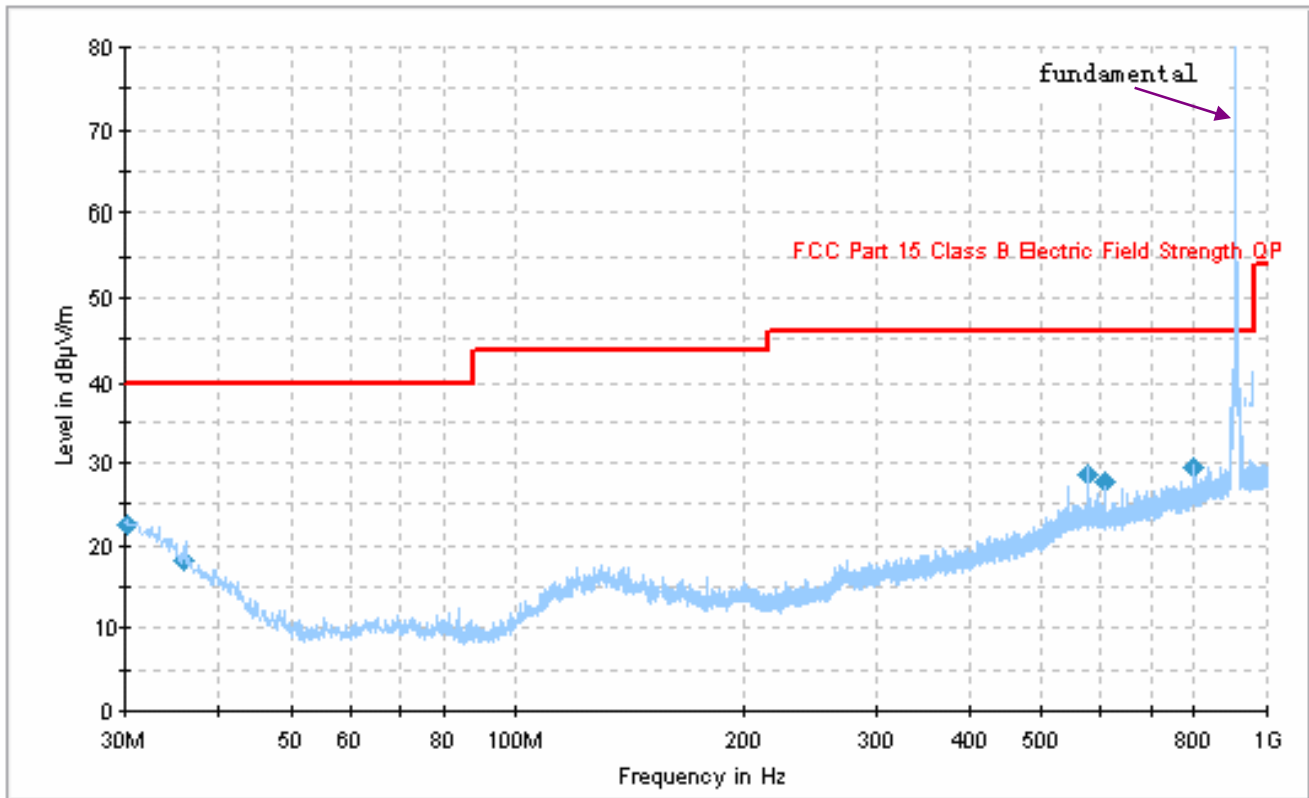

Frequency (MHz)	Corrected Amplitude (dBµV/m)	Antenna Height (cm)	Polarity (H/V)	Turntable Position (deg)	Correction Factor (dB)	Limit (dBµV/m)	Margin (dB)
799.977225	29.6	103.0	H	355.0	-0.3	46	16.4
30.341370	22.6	399.0	V	28.0	-4.2	40	17.4
575.997750	28.6	164.0	H	355.0	-3.7	46	17.4
608.003850	27.8	154.0	H	184.0	-3.7	46	18.2
36.062850	18.1	399.0	H	105.0	-8.3	40	21.9

Above 1000 MHz:

Freq. (MHz)	Meter Reading (dBuV)	Detector (PK/QP/AV)	Direction (Degree)	Antenna			Cable Loss (dB)	Pre- Amp. (dB)	Cord. Amp. (dB uV/m)	FCC Part 15.209 & 15.249		
				Height (m)	Polar H / V	Factor (dB/m)				Limit (dBuV/m)	Margin (dB)	Remarks
908.4	87.8	QP	180	1.5	H	22.9	6.6	26.5	90.8	94	3.20	Fund.
908.4	75.6	QP	180	1.5	V	22.9	6.6	26.5	78.6	94	15.40	Fund.
2880	34.56	AV	324	1.3	V	28.5	4.40	33.4	34.06	54	19.94	Spurious
1816	35.78	AV	148	1.2	V	27.1	2.82	35.0	30.7	54	23.30	Spurious
1816	35.21	AV	230	1.6	H	27.1	2.82	35.0	30.13	54	23.87	Spurious
2830	34.11	AV	56	1.5	H	28.5	4.40	33.4	29.61	54	24.39	Spurious
2880	47.36	PK	324	1.3	V	28.5	4.40	33.4	45.86	74	28.14	Spurious
1225	34.29	AV	166	1.6	V	24.8	2.50	36.0	25.59	54	28.41	Spurious
1015	35.15	AV	148	1.5	H	24.8	1.19	36.0	25.14	54	28.86	Spurious
1816	47.33	PK	148	1.2	V	27.1	2.82	35.0	42.25	74	31.75	Spurious
1816	47.33	PK	230	1.6	H	27.1	2.82	35.0	42.25	74	31.75	Spurious
2830	47.50	PK	56	1.5	H	28.5	4.40	33.4	47	74	34.00	Spurious
1225	47.19	PK	166	1.6	V	24.8	2.50	36.0	38.49	74	35.51	Spurious
1015	47.56	PK	148	1.5	H	24.8	1.19	36.0	37.55	74	36.45	Spurious

Note: Fund. - Fundamental

§15.249(d) – OUT OF BAND EMISSIONS

Applicable Standard

Emissions radiated outside of the specified frequency bands, except for harmonics, shall be attenuated by at least 50 dB below the level of the fundamental or to the general radiated emission limits in §15.209, whichever is the lesser attenuation.

Test Procedure

1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
2. Position the EUT without connection to measurement instrument. Turn on the EUT and connect its antenna terminal to measurement instrument via a low loss cable. Then set it to any one measured frequency within its operating range, and make sure the instrument is operated in its linear range.
3. Set the RBW to 100 kHz and VBW of spectrum analyzer to 300 kHz with a convenient frequency span including the specified frequencies of band edges.
4. Measure the highest amplitude appearing on spectral display and set it as a reference level. Plot the graph with marking the highest point and edge frequency.
5. Repeat above procedures until all measured frequencies were complete.

Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
Rohde & Schwarz	EMI Test Receiver	ESCI	100224	2007-10-16	2008-10-16
HP	Amplifier	8449B	3008A00277	2007-09-29	2008-09-29
Sunol Sciences	Horn Antenna	DRH-118	A052604	2007-09-25	2008-09-25

* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Shenzhen) attests that all calibrations have been performed in accordance to NVLAP requirements, traceable to the NIST.

Test Data

Environmental Conditions


Temperature:	25 ° C
Relative Humidity:	56%
ATM Pressure:	100.2kPa

The testing was performed by Jim Li on 2007-12-29.

Test Mode: Transmitting

Test Result: Compliant.

Please refer to the plots attached.

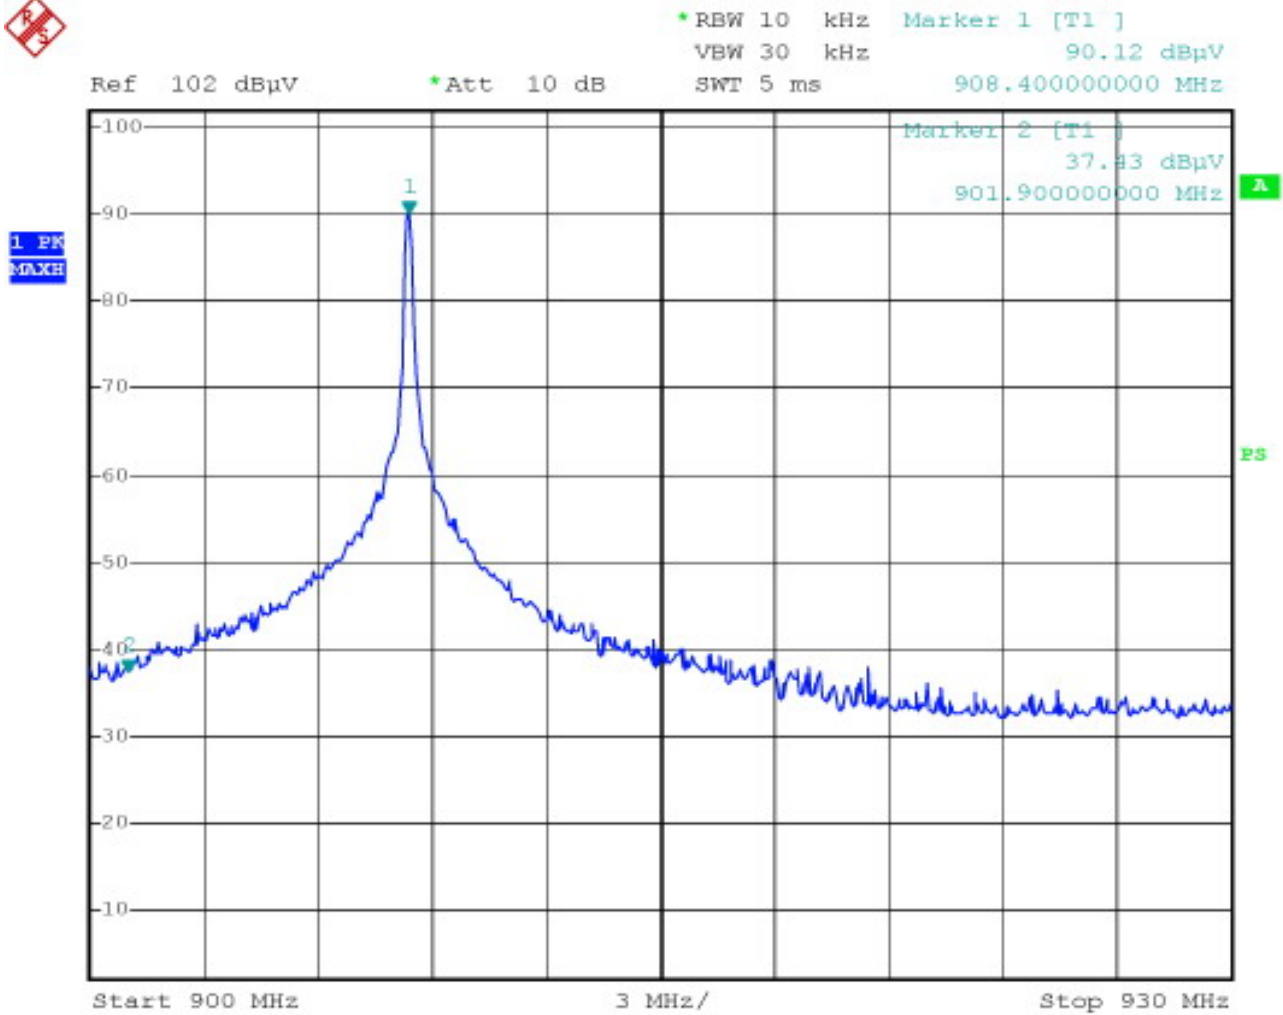

Frequency Range Left side


Date: 29.DEC.2007 08:25:13



*RBW 10 kHz Marker 2 [T1]
VBW 30 kHz 34.52 dBµV
SWT 5 ms 928.100000000 MHz

Ref 102 dBµV *Att 10 dB

1 PK
MAXH

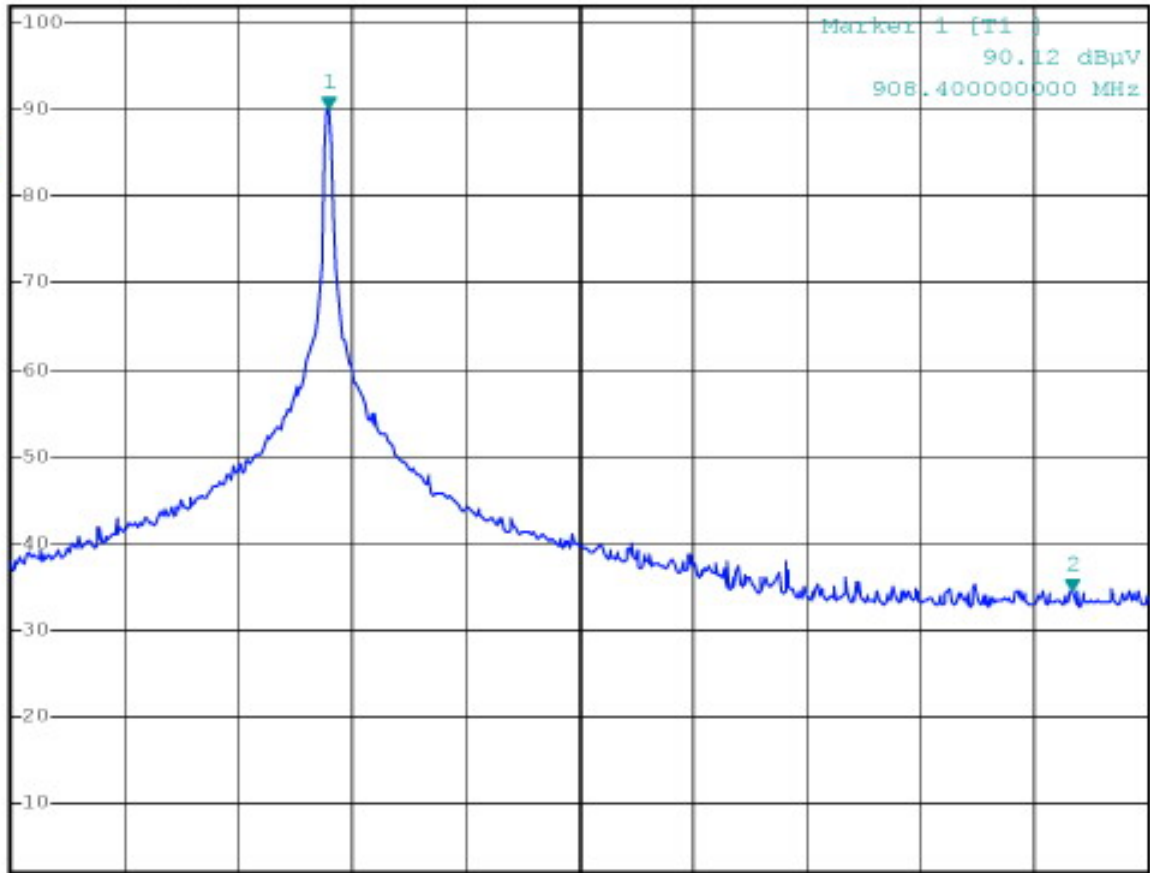

Frequency Range Right side

Date: 29.DEC.2007 08:25:57

****END OF REPORT****