

FCC TEST REPORT

FCC ID : **UHIVRFM6**

Applicant : **Roadmaster USA Corp.**

Address : 41 James Way Eatontown, NJ 07724

Equipment Under Test (EUT) :

Product : FM Transmitter

Model No. : VRFM6


Modulation : FM

Operation Frequency : 88.1~89.1MHz, 106.7~107.9MHz

Standards : FCC 15 Subpart C Paragraph 15.239

Date of Test : August 6, 2007

Test Engineer : **Tiger Su**

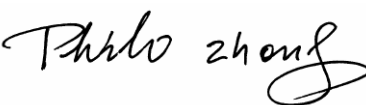Reviewed By : 

PERPARED BY:

Waltek Services (Shenzhen) Co., Ltd.

8C, West Tower, Aidi Building, No.5003 Binhe Rd, Futian District, Shenzhen518045,
Guangdong, China.

Tel: 86-755-83551033

Fax: 86-755-83552400

2 Contents

	Page
1 COVER PAGE.....	1
2 CONTENTS.....	2
3 TEST SUMMARY.....	5
4 GENERAL INFORMATION.....	6
4.1 CLIENT INFORMATION	6
4.2 GENERAL DESCRIPTION OF E.U.T.....	6
4.3 DETAILS OF E.U.T.	6
4.4 DESCRIPTION OF SUPPORT UNITS	6
4.5 STANDARDS APPLICABLE FOR TESTING.....	6
4.6 TEST FACILITY.....	7
4.7 TEST LOCATION.....	7
5 EQUIPMENT USED DURING TEST	8
6 CONDUCTED EMISSION TEST	9
6.1 TEST EQUIPMENT.....	9
6.2 TEST PROCEDURE	9
6.3 CONDUCTED TEST SETUP	10
6.4 EUT OPERATING CONDITION	10
6.5 CONDUCTED EMISSION LIMITS	11
7 RADIATION EMISSION TEST.....	12
7.1 TEST EQUIPMENT.....	12
7.2 MEASUREMENT UNCERTAINTY.....	12
7.3 TEST PROCEDURE	12
7.4 RADIATED TEST SETUP.....	13
7.5 SPECTRUM ANALYZER SETUP.....	13
7.6 CORRECTED AMPLITUDE & MARGIN CALCULATION	14
7.7 SUMMARY OF TEST RESULTS.....	14
7.8 EUT OPERATING CONDITION	15
7.9 RADIATED EMISSIONS LIMIT.....	15
7.10 RADIATED EMISSIONS TEST RESULT.....	16
8 BAND EDGE	18
8.1 TEST EQUIPMENT.....	18
8.2 TEST PROCEDURE	18
8.3 BAND EDGE TEST RESULT	19
9 PHOTOGRAPHS OF TESTING.....	21
9.1 RADIATION EMISSION TEST VIEW	21
10 PHOTOGRAPHS - CONSTRUCTIONAL DETAILS	22
10.1 EUT - FRONT VIEW	22
10.2 EUT - BACK VIEW.....	22
10.3 PCB1-FRONT VIEW	23

10.4 PCB1-BACK VIEW.....23
10.5 PCB2-FRONT VIEW24
10.6 PCB2-BACK VIEW.....24
11 FCC ID LABEL.....25

3 Test Summary

Test	Test Requirement	Test Method	Class / Severity	Result
Radiated Emission (30MHz to 1GHz)	FCC PART 15: 2003	ANSI C63.4: 2003	Class B	PASS
Conducted Emission (150KHz to 30MHz)	FCC PART 15: 2003	ANSI C63.4: 2003	Class B	N/A

4 General Information

4.1 Client Information

Applicant: **Roadmaster USA Corp.**
Address: 41 James Way Eatontown, NJ 07724
Manufacturer: **DONGGUAN YUJIA INDUSTRY CO., LTD**
Address: No.1, Road 1, Shangsha 4th Industrial Area Changan Town,
Dongguan City, Guangdong Province, China

4.2 General Description of E.U.T.

Product description: FM Transmitter
Model No.: VRFM6

4.3 Details of E.U.T.

Power Supply: DC 12 V

4.4 Description of Support Units

The EUT has been tested as an independent unit.

4.5 Standards Applicable for Testing

The customer requested FCC tests for a FM Transmitter. The standards used were FCC 15 Paragraph 15.209 and Paragraph 15.239.

4.6 Test Facility

The test facility is recognized, certified, or accredited by the following organizations:

- **FCC – Registration No.: 759397**
Solid Industrial (Shenzhen) Co., Ltd. EMC Laboratory has been registered and fully described in a report filed with the (FCC) Federal Communications Commission. The acceptance letter from the FCC is maintained in our files. Registration 759397, December 28, 2006.

4.7 Test Location

All Emissions tests were performed at:-

Solid Industrial (Shenzhen) Co., Ltd. at 333 Bulong Highway Buji Longgang, Shenzhen, Guangdong, China

5 Equipment Used during Test

Equipment	Brand Name	Model	Cal. Int Months	Last Cal. Date
3m Anechoic chamber				
EMC Analyzer	Agilent	E7402A	12	2007-08
EMI Test Receiver	R&S	ESS	12	2007-08
Pre Amplifier	Anritsu	MH648A	12	2007-08
Bilog Antenna	SCHAFFNER	CBL6111C	12	2007-08
Loop Antenna	R&S	6108	12	2007-08
Horn Antenna	ETS.LINDGERN	GH14-H052	12	2007-08
AM/FM Stereo Signal Generator	Panasonic	VP-8122A	12	2007-08
Signal Generator	R&S	SMG	12	2007-08
RF Selector	TOYO	NS4901A	-	-
Turn Disc	HD	DS4150S	-	-
Antenna Mast	HD	MA2400	-	-
EMI Shielded Room				
Spectrum analyzer	ADVANTEST	R3261C	12	2007-08
EMI Test Receiver	R&S	ESS	12	2007-08
Pre Amplifier	Anritsu	MH648A	12	2007-08
LISN	Kyoritsu	KNW-403D	12	2007-08
Absorbing Clamp	R&S	MDS-21	12	2007-08
Distortion Meter	MEGURO	MAK-6578A	12	2007-08
AM/FM Stereo Signal Generator	Panasonic	VP-8122A	12	2007-08
Oscilloscope	LEADER	LS1020	12	2007-08
Function Generator	National	VP-7422A	12	2007-08
Signal Generator	R&S	SMG	12	2007-08
RF Selector	TOYO	NS4000	-	-
Remote Controller	TOYO	MAC	-	-
Common Equipment				
Cassette player	Panasonic	SW-9574	N/A	N/A

6 Conducted Emission Test

Product Name:	FM Transmitter
Test Requirement:	FCC Part15 Paragraph 15.207
Test Method:	Based on FCC Part15 Paragraph 15.207
Test Date:
Frequency Range:	150kHz to 30MHz
Class:	Class B
Detector:	Peak for pre-scan (9kHz Resolution Bandwidth) Quasi-Peak & Average if maximised peak within 6dB of Average Limit

6.1 Test Equipment


Please refer to Section 5 this report.

6.2 Test Procedure

1. The EUT was tested according to ANSI C63.4:2003. The frequency spectrum from 150kHz to 30MHz was investigated.
2. The maximised peak emissions from the EUT was scanned and measured for both the Live and Neutral Lines. Quasi-peak & average measurements were performed if peak emissions were within 6dB of the average limit line.
3. Compliance test was performed test in the EUT was connect the adaptor output.

6.3 Conducted Test Setup


The conducted emission tests were performed using the setup accordance with the ANSI C63.4:2003, The specification used in this report was the FCC Part15 Paragraph 15.207 limits.

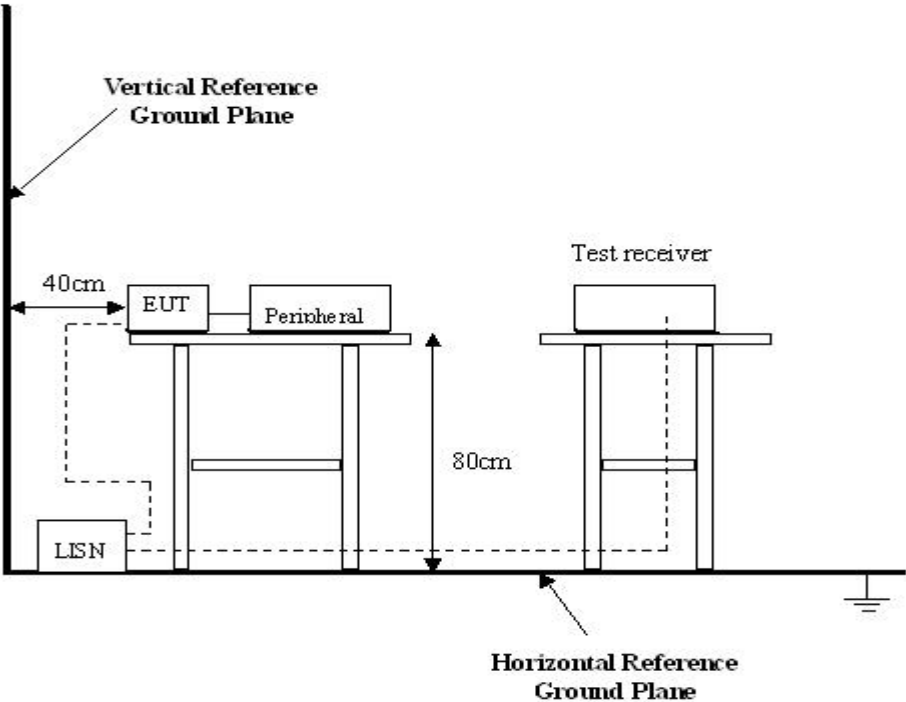

6.4 EUT Operating Condition

Operating condition is according to ANSI C63.4:2003.

- A. Setup the EUT and simulators as shown on follow.
- B. Enable RF signal and confirm EUT active.
- C. Modulate output capacity of EUT up to specification.

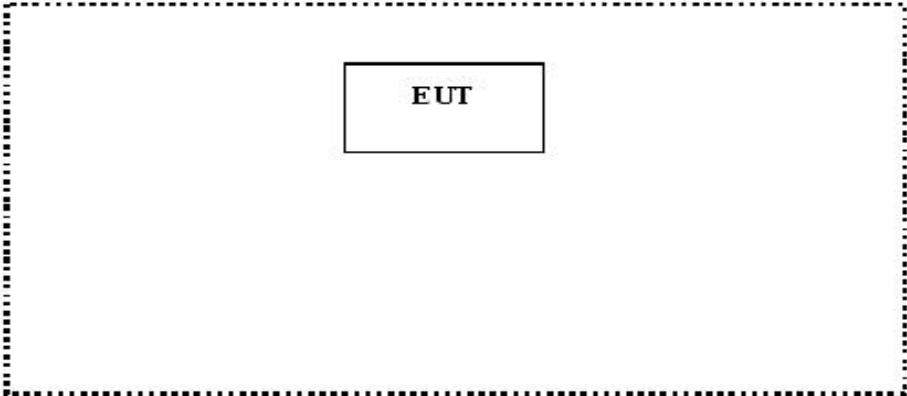

6.5 Conducted Emission Limits

66-56 dB μ V/m between 0.15MHz & 0.5MHz

56 dB μ V/m between 0.5MHz & 5MHz

60 dB μ V/m between 5MHz & 30MHz

Note: In the above limits, the tighter limit applies at the band edges.
Owing to the DC operation of EUT, this test is not performed.

7 Radiation Emission Test

Product Name:	FM Transmitter
Test Requirement:	FCC Part15 Paragraph 15.239
Test Method:	Based on ANSI C63.4:2003
Test Date:	August 6, 2007
Frequency Range:	30MHz to 1GHz
Measurement Distance:	3m
Detector:	Peak for pre-scan (120kHz resolution bandwidth) Quasi-Peak if maximised peak within 6dB of limit

7.1 Test Equipment

Please refer to Section 5 this report.

7.2 Measurement Uncertainty

All measurements involve certain levels of uncertainties, especially in the field of EMC. The factors contributing to uncertainties are spectrum analyzer, cable loss, antenna factor calibration, antenna directivity, antenna factor variation with height, antenna phase center variation, antenna factor frequency interpolation, measurement distance variation, site imperfections, mismatch (average), and system repeatability.


Based on ANSI C63.4:2003, The Treatment of Uncertainty in EMC Measurements, the best estimate of the uncertainty of a radiation emissions measurement at SOLID EMC Laboratory is +4.0 dB.

7.3 Test Procedure

1. Maximizing procedure was performed on the six (6) highest emissions to ensure EUT is compliant with all installation combinations.
2. All data was recorded in the peak detection mode. Quasi-peak readings was performed only when an emission was found to be marginal (within -4 dB μ V of specification limits), and are distinguished with a "Qp" in the data table.
3. The EUT was under normal mode during the final qualification test and the configuration was used to represent the worst case results.
4. The market sample is tested for low frequency testing at 88.1 MHz and high frequency testing at 106.7 and 107.9 MHz.

7.4 Radiated Test Setup

The radiated emission tests were performed in the 3m Semi- Anechoic Chamber test site, using the setup accordance with the ANSI C63.4:2003, The specification used in this report was the FCC Part15 Paragraph 15.209 and Paragraph 15.239 limits.

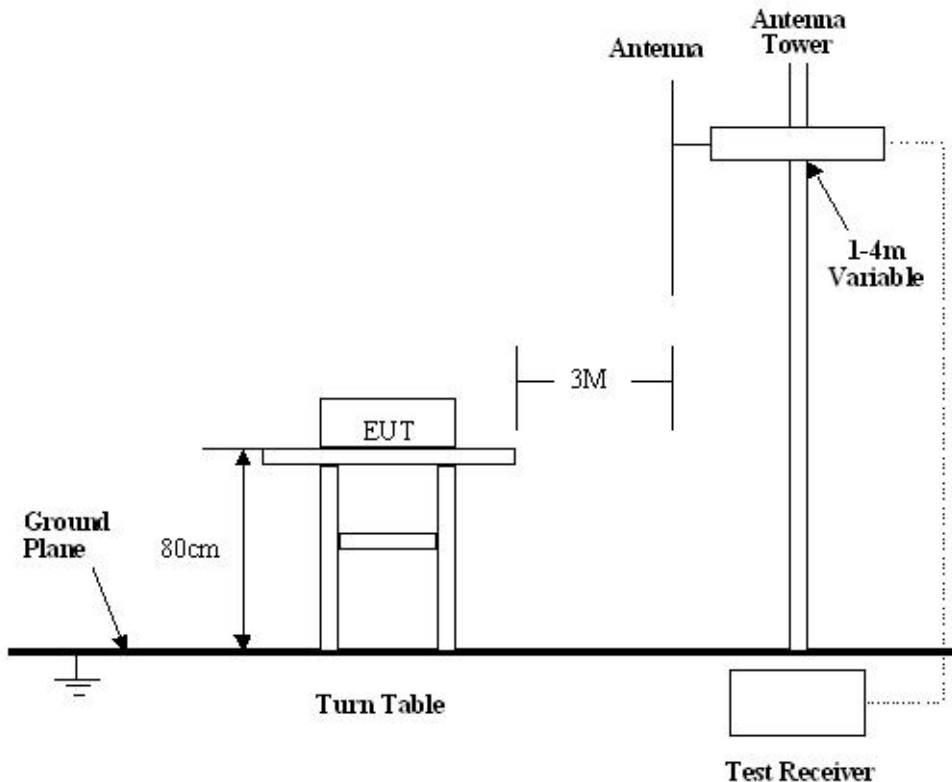

7.5 Spectrum Analyzer Setup

According to FCC Part15 Paragraph 15.239 Rules, the system was tested to 1000 MHz.

- Start Frequency30 MHz
- Stop Frequency1000 MHz
- Sweep Speed Auto
- IF Bandwidth100 kHz
- Video Bandwidth1 MHz
- Quasi-Peak Adapter Bandwidth120 kHz
- Quasi-Peak Adapter Mode.....Normal
- Resolution Bandwidth1MHz

7.6 Corrected Amplitude & Margin Calculation

The Corrected Amplitude is calculated by adding the Antenna Factor and Cable Factor, and subtracting the Amplifier Gain from the Amplitude reading. The basic equation is as follows:

$$\text{Corr. Ampl.} = \text{Indicated Reading} + \text{Antenna Factor} + \text{Cable Factor} - \text{Amplifier Gain}$$

The “**Margin**” column of the following data tables indicates the degree of compliance with the applicable limit. For example, a margin of -7dB μ V means the emission is 7dB μ V below the maximum limit for Class B. The equation for margin calculation is as follows:

$$\text{Margin} = \text{Corr. Ampl.} - \text{Class B Limit}$$

7.7 Summary of Test Results

According to the data in section 7.10, the EUT complied with the FCC Part15 Paragraph 15.239 standards.

7.8 EUT Operating Condition

Same as section 6.4 of this report. Compliance test was performed test in the transmitter operation Mode.

7.9 Radiated Emissions Limit

A. FCC Part 15 subpart C Paragraph 15.239 Limit

Fundamental Frequency(MHZ)	Field Strength of Fundamental	
	uV/m	dBuV/m
88-108	250	48

- Note:**
- (1) $RF\ Voltage(dBuV) = 20 \log RF\ Voltage(uV)$
 - (2) Distance refers to the distance in meters between the measuring instrument antenna and the closed point of any part of the device or system.
 - (3) The emission limit in this paragraph is based on measurement instrumentation employing an average detector.Measurement using instrumentation with a peak detector function,corresponding to 20dB above the maximum permitted average limit.

B. Frequencies in restricted band are complied to limit on Paragraph 15.209

Frequency(MHZ)	Distance(m)	Field strength(dBuV/m)
30-88	3	40.0
88-216	3	43.5
216-960	3	46.0
Above 960	3	54.0

- Note:**
- (1) $RF\ Voltage(dBuV) = 20 \log RF\ Voltage(uV)$
 - (2) In the Above Table,the tighter limit applies at the band edges.
 - (3) Distance refers to the distance in meters between the measuring instrument antenna.

As shown in 15.35(b),for frequencies above 1000MHZ,the field strength limits are based on average detector,however,the peak field strength of any emission shall not exceed the maximum permitted average limits,specified above by more than 20dB under any condition of modulation.

7.10 Radiated Emissions Test Result

Formula of conversion factors:the field strength at 3m was established by adding
 The meter reading of the spectrum analyzer (which is set to read in units of dBuV)
 To the antenna correction factor supplied by the antenna manufacturer. The antenna
 Correction factors are stated in terms of dB.The gain of the presselector was accounted
 For in the spectrum analyzer meter reading.

Example:

Freq(MHz) Meter Reading +ACF=FS

33 20dBuV+10.36dB=30.36dBuV/m @3m

Radiated Emission Test Data

A. Test Item:	Radiated Emission Test Data
Test Voltage:	DC 12V
Test Mode:	ON TX
Temperature:	24 °C
Humidity:	52%RH
Test Result:	PASS

Frequency (MHz)	Detector	Antenna Polarization	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Turntable Angle (°C)
Low Frequency							
88.10	PK	Horizontal	50.3	68.0	17.7	1.0	90
88.10	AV	Horizontal	42.5	48.0	5.5	1.8	120
176.2	QP	Horizontal	39.4	43.5	4.1	1.8	45
264.3	QP	Horizontal	36.7	46.0	9.3	1.5	180
352.4	QP	Horizontal	37.6	46.0	8.4	1.0	90
88.10	PK	Vertical	52.6	68.0	15.4	1.8	45
88.10	AV	Vertical	43.3	48.0	4.7	2.0	90
176.2	QP	Vertical	37.2	43.5	6.3	1.0	180
264.3	QP	Vertical	39.5	46.0	6.5	1.0	120
352.4	QP	Vertical	37.4	46.0	8.6	1.8	45
Middle Frequency							
106.7	PK	Horizontal	52.9	68.0	15.1	1.8	90
106.7	AV	Horizontal	40.2	48.0	7.8	1.8	180
213.4	QP	Horizontal	39.6	43.5	3.9	2.0	90
320.1	QP	Horizontal	36.6	46.0	9.4	2.0	45
106.7	PK	Vertical	54.5	68.0	13.5	1.5	120
106.7	AV	Vertical	42.5	48.0	5.5	1.0	90
213.4	QP	Vertical	36.5	43.5	7.0	1.8	90
320.1	QP	Vertical	37.4	46.0	8.6	1.8	180
High Frequency							
107.9	PK	Horizontal	52.4	68.0	15.6	1.0	120
107.9	AV	Horizontal	42.3	48.0	5.7	1.8	90
215.8	QP	Horizontal	36.5	43.5	7.0	1.5	45
323.7	QP	Horizontal	36.2	46.0	9.8	2.0	60
107.9	PK	Vertical	55.6	68.0	12.4	1.8	180
107.9	AV	Vertical	42.1	48.0	5.9	1.0	120
215.8	QP	Vertical	38.3	43.5	4.2	1.0	180
323.7	QP	Vertical	37.6	46.0	8.4	1.8	180

- Note:** (1) All Reading Levels below 1GHz are Quasi-Peak, above are peak and average value.
- (2) Emission Level = Reading Level + Probe Factor + Cable Loss.

8 Band Edge

8.1 Test Equipment

Please refer to Section 5 this report.


8.2 Test Procedure

- 1.The EUT, peripherals were put on the turntable which table size is 1mX1.5m, table high 0.8m. All set up is according to ANSI C63.4:2003.
2. The antenna high were varied from 1m to 4m high to find the maximum emission for each frequency.
3. The field strength of any emissions radiated on any frequency outside of the specified 200KHz band shall not exceed the general radiated emission limits in Section 15.209.
- 4.The market sample is tested for low frequency testing at 88.1 MHz and high frequency testing at 106.7 and 107.9 MHz..


8.3 Band Edge Test Result

Product Name: Car mp3 transmitter
Test Item: Band Edge Test
Test Voltage: DC 12V
Test Mode: TX ON
Temperature: 24 °C
Humidity: 52%RH


88.1 MHz

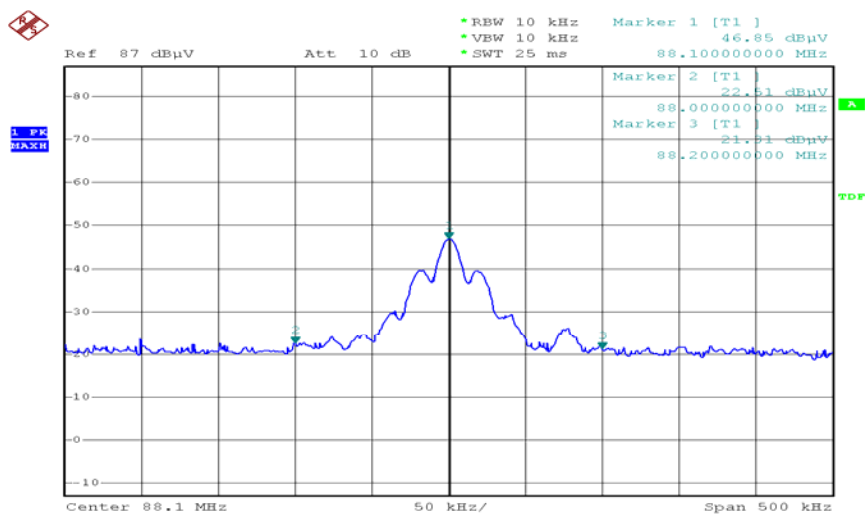

106.7 MHz

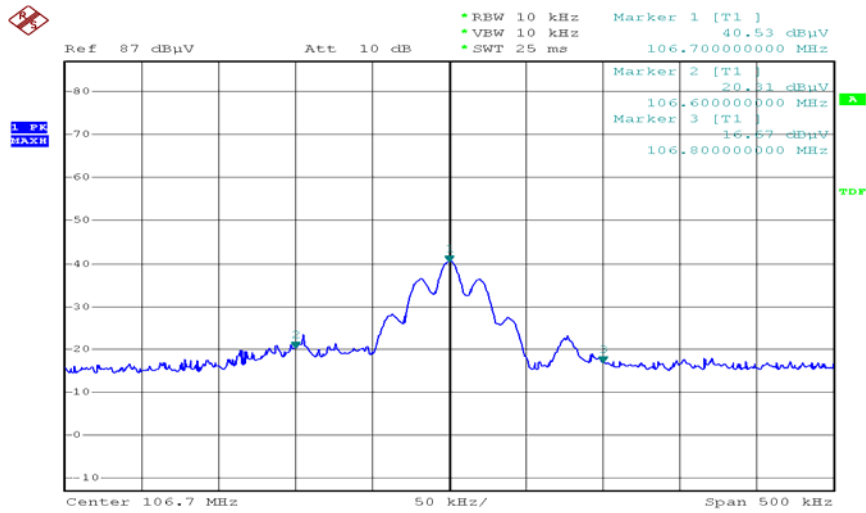


107.9 MHz

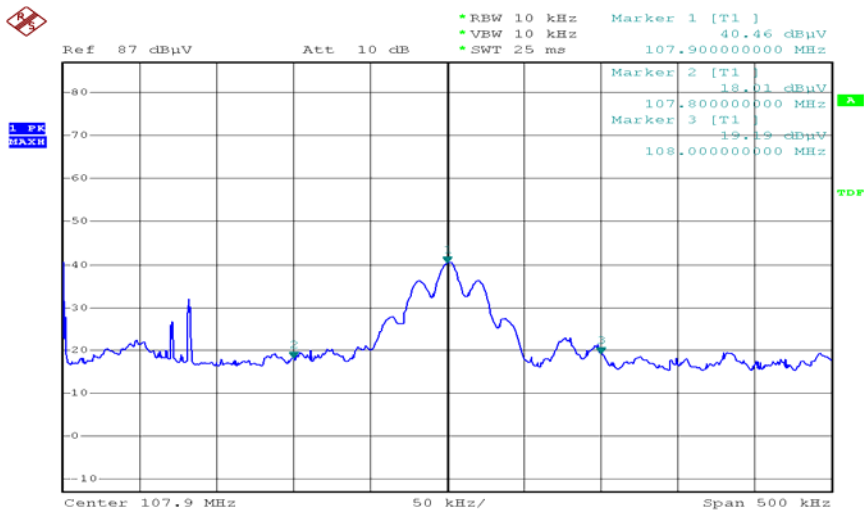

- Note:**
- (1) The field strength of any emissions which appear outside of this band shall not exceed the general radiated emission limits in Section 15.209.
 - (2) The average measurement was not performed when the peak measured data under the limit of average detection.

9 Photographs of Testing

9.1 Radiation Emission Test View

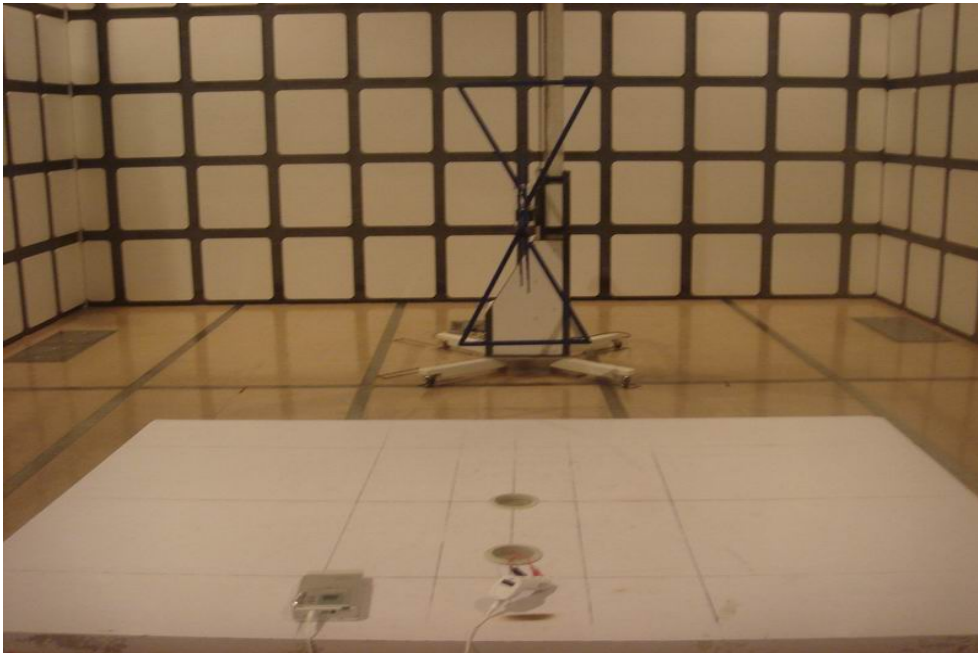

10 Photographs - Constructional Details


10.1 EUT - Front View




10.2 EUT - Back View




10.3 PCB1-Front View

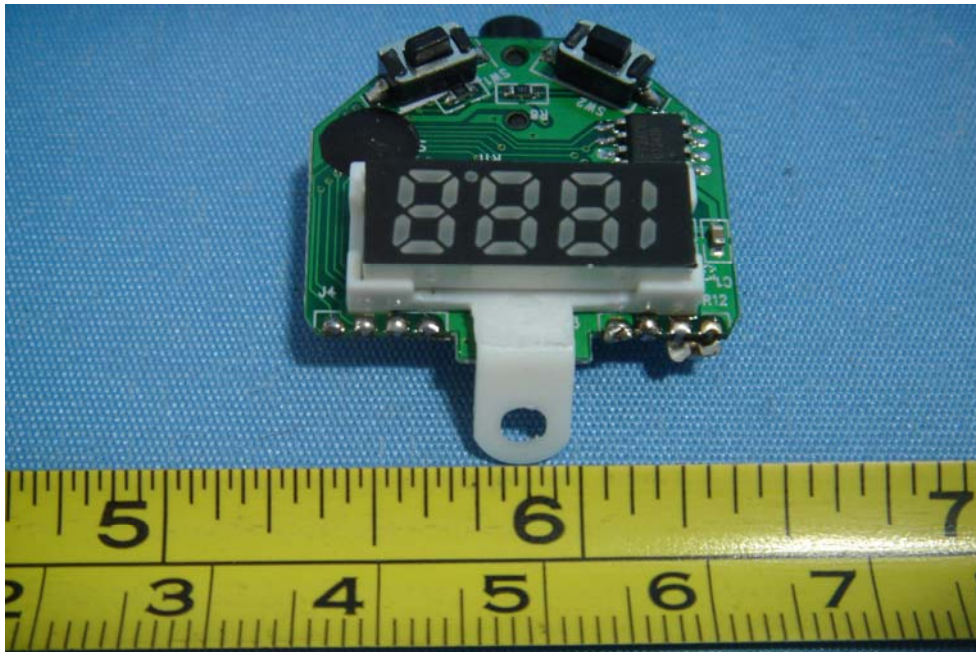


10.4 PCB1-Back View

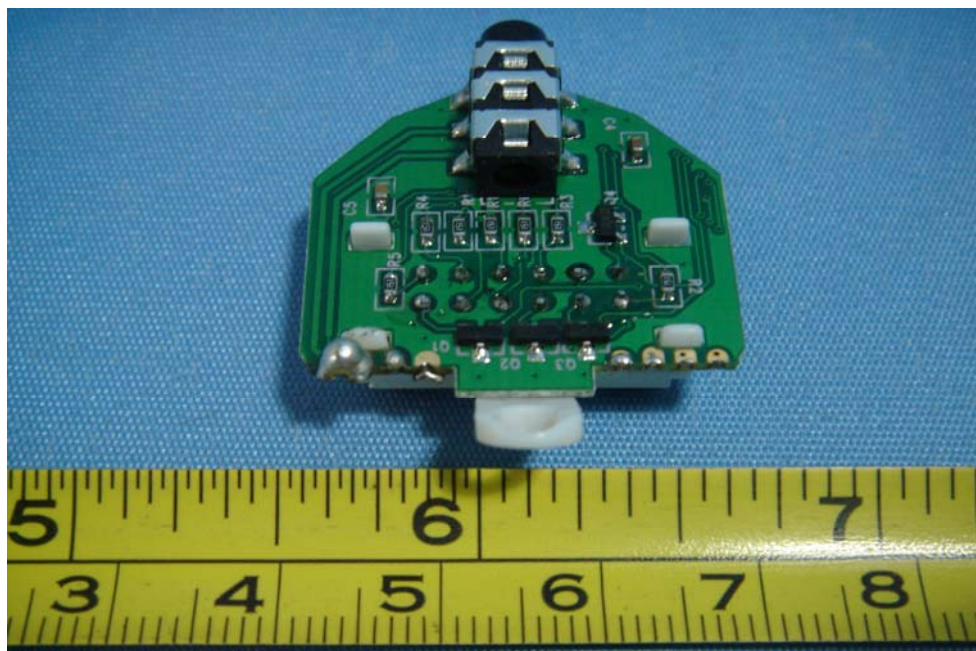

10.5 PCB2-Front View

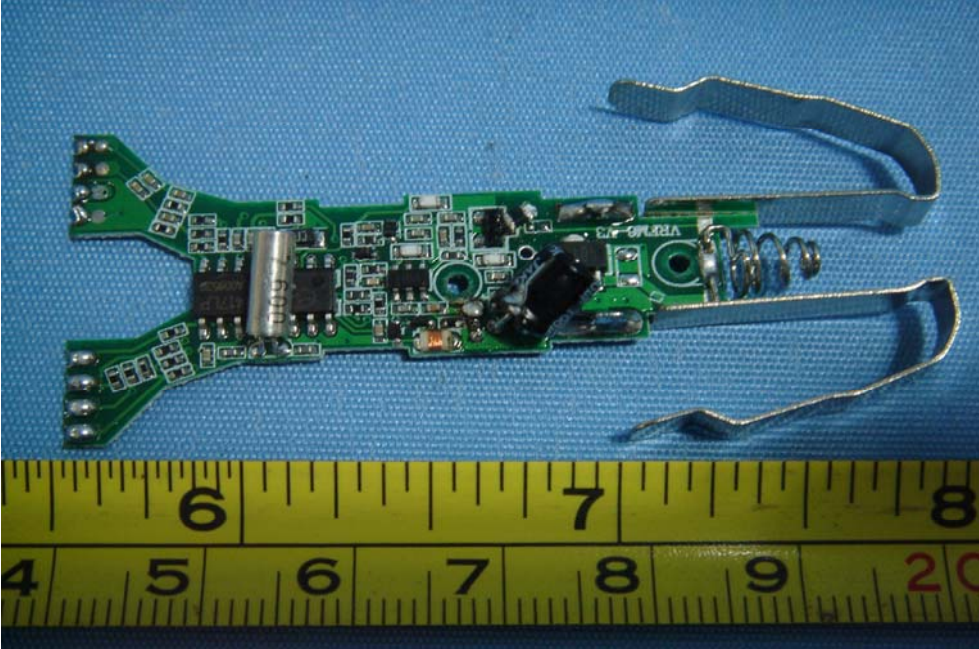

10.6 PCB2-Back View

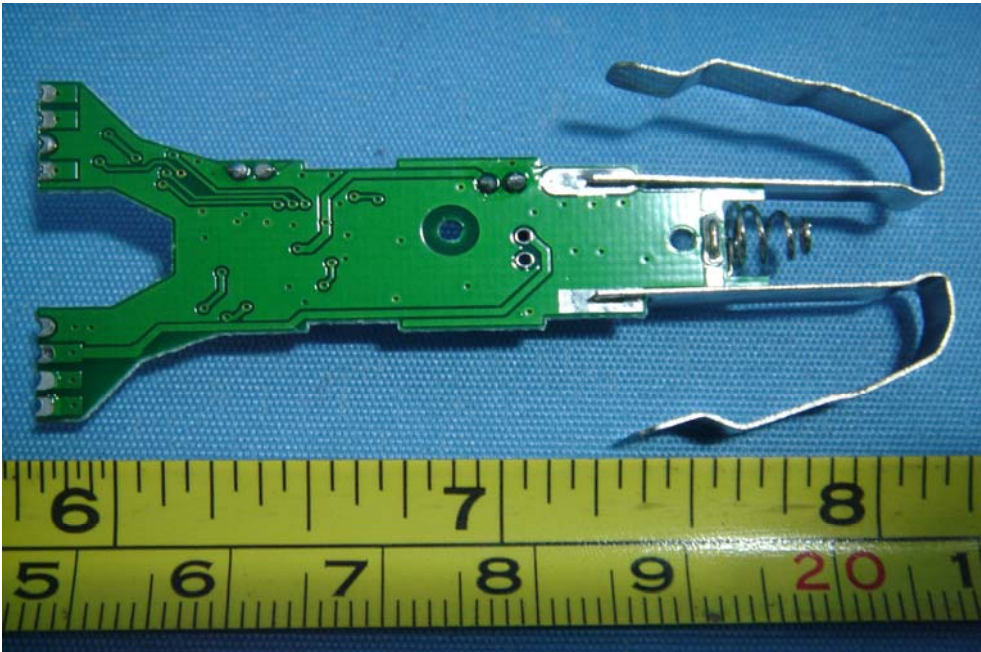

11 FCC ID Label

This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions:(1)this device may not cause harmful interference,and (2) this device must accept any interference received, including interference that may cause undesired operation.

The Label must not be a stick-on paper. The Label on these products must be permanently affixed to the product and readily visible at the time of purchase and must last the expected lifetime of the equipment not be readily detachable.

Proposed Label Location on EUT
EUT Bottom View/proposed FCC Mark Location

