



NVLAP LAB CODE 200707-0



FCC PART 18 MEASUREMENT AND TEST REPORT

For

Guangdong Galanz Enterprise Co., Ltd.

25 Ronggui Nan.Rd., Shunde, Foshan, Guangdong.

FCC ID: UHW10028002

This Report Concerns: <input checked="" type="checkbox"/> Original Report		Equipment Type: Microwave Oven	
Test Engineer:	William Chan <i>William Chan</i>	Hansen Hu <i>Hansen Hu</i>	
Report No.:	RSZ07091852		
Test Date:	2005-08-16 to 2005-08-26		
Report Date:	2007-09-29		
Reviewed By:	EMC Manager: Boni Baniqued		<i>Boni Baniqued</i>
Prepared By:	Bay Area Compliance Laboratory Corp. (Shenzhen) 6/F, the 3rd Phase of WanLi Industrial Building, ShiHua Road, FuTian Free Trade Zone Shenzhen, Guangdong, China Tel: +86-755-33320018 Fax: +86-755-33320008		

Note: This test report is for the customer shown above and their specific product only. It may not be duplicated or used in part without prior written consent from Bay Area Compliance Laboratory Corp. (Shenzhen) This report **must not** be used by the customer to claim product certification, approval, or endorsement by NVLAP, NIST, or any agency of the Federal Government.

TABLE OF CONTENTS

GENERAL INFORMATION.....	3
PRODUCT DESCRIPTION FOR EQUIPMENT UNDER TEST (EUT)	3
OBJECTIVE	3
RELATED SUBMITTAL(S)/GRANT(S).....	3
TEST METHODOLOGY	3
TEST FACILITY	3
SYSTEM TEST CONFIGURATION.....	5
JUSTIFICATION	5
EQUIPMENT MODIFICATIONS	5
EXTERNAL I/O CABLE.....	5
CONFIGURATION OF TEST SETUP	6
BLOCK DIAGRAM OF TEST SETUP	6
CONDUCTED EMISSION.....	7
MEASUREMENT UNCERTAINTY	7
EUT SETUP	7
EMI TEST RECEIVER SETUP.....	8
TEST EQUIPMENT LIST AND DETAILS.....	8
TEST PROCEDURE	8
TEST RESULTS SUMMARY	8
TEST DATA	9
PLOT(S) OF TEST DATA	9
RADIATION HAZARD MEASUREMENT.....	12
ENVIRONMENTAL CONDITIONS.....	12
TEST EQUIPMENT LIST AND DETAILS.....	12
RADIATION HAZARD MEASUREMENT	12
INPUT POWER.....	12
LOAD FOR MICROWAVE OVENS	13
RF OUTPUT POWER MEASUREMENT	14
OPERATING FREQUENCY MEASUREMENT	15
RADIATED EMISSION DATA.....	21
MEASUREMENT UNCERTAINTY	21
EUT SETUP	21
EMI TEST RECEIVER SETUP AND SPECTRUM ANALYZER SETUP.....	22
TEST EQUIPMENT LIST AND DETAILS.....	22
TEST PROCEDURE	22
CORRECTED AMPLITUDE & MARGIN CALCULATION	22
TEST RESULTS SUMMARY	23
TEST DATA	23
PLOT(S) OF TEST DATA	24

GENERAL INFORMATION

Product Description for Equipment Under Test (EUT)

The Guangdong Galanz Enterprise Co., Ltd.'s model: WP900AL28-2 or the "EUT" as referred to in this report is a Microwave Oven which measures approximately 50.5cmL x38.0cmW x 30.0cmH, rated input voltage: AC 120V/60Hz.

The series products, model WP900(X)28-Z

X=P,AP,SP,ASP,AL,SL,L,ASL,FL,EL,ESL

Z='Z' mean suffix and the suffix maybe blank or maybe from 0 to 9 and from A to Z , the suffix could be from two digits to five digits to denote cosmetic difference. we select WP900AL28-2 to test.

** The test data gathered are from production sample, serial number: S025WO7761, provided by the manufacturer*

Objective

The following test report is prepared on behalf of *Guangdong Galanz Enterprise Co., Ltd.* in accordance with Part 2, Subpart J, and Part 18, Subparts A, B and C of the Federal Communication Commissions rules and regulations.

The objective of the manufacturer is to determine compliance with FCC Part 18 limits.

Related Submittal(s)/Grant(s)

No related submittal(s).

Test Methodology

All measurements contained in this report were conducted with MP-5, FCC Methods of Measurements of Radio Noise Emissions from ISM Equipment, February 1986. All measurement was performed at Bay Area Compliance Laboratory Corp. (Shenzhen). The radiated testing was performed at an antenna-to-EUT distance of 3 meters.

Test Facility

The Test site used by Bay Area Compliance Laboratory Corp. (Shenzhen) to collect test data is located in the 6/F, the 3rd Phase of WanLi Industrial Building, ShiHua Road, FuTian Free Trade Zone Shenzhen, Guangdong, China.

Test site at Bay Area Compliance Laboratory Corp. (Shenzhen) has been fully described in reports submitted to the Federal Communication Commission (FCC). The details of these reports have been found to be in compliance with the requirements of Section 2.948 of the FCC Rules on November 04, 2004. The facility also complies with the radiated and AC line conducted test site criteria set forth in ANSI C63.4-2003.

The Federal Communications Commission has the reports on file and is listed under FCC Registration No.: 382179. The test site has been approved by the FCC for public use and is listed in the FCC Public Access Link (PAL) database.

Additionally, Bay Area Compliance Laboratory Corp. (Shenzhen) is a National Institute of Standards and Technology (NIST) accredited laboratory, under the National Voluntary Laboratory Accredited Program (Lab Code 200707-0).



NVLAP LAB CODE 200707-0

The current scope of accreditations can be found at
<http://ts.nist.gov/ts/htdocs/210/214/scopes/2007070.htm>.

SYSTEM TEST CONFIGURATION

Justification

The EUT was provided for tests as a stand-alone device. It was prepared for testing in accordance with the manufacturer's instructions. The EUT was operated at maximum (continuous) RF output power. The loads consisted of water in a glass beaker in the amounts specified in the test procedure.


Equipment Modifications

Bay Area Compliance Laboratory Corp. (Shenzhen) has not done any modification on the EUT.

External I/O Cable


Cable Description	Length (M)	From/Port	To
Unshielded Undetachable AC Line	1.0	EUT	AC Power

Configuration of Test Setup

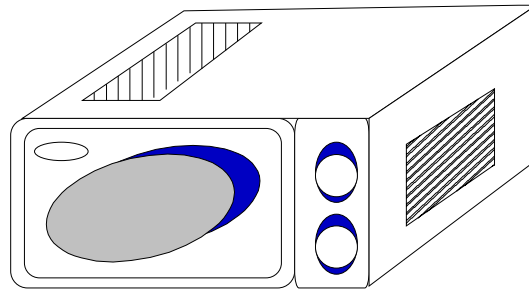

EUT

Block Diagram of Test Setup

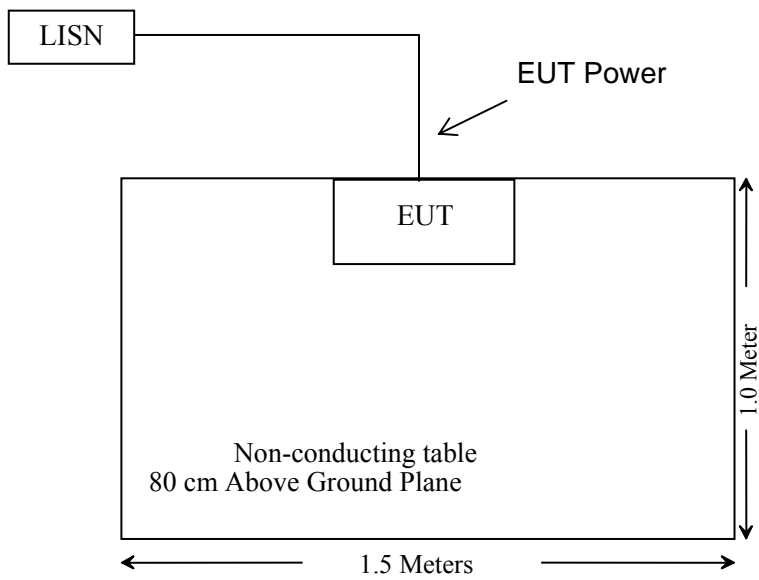


CONDUCTED EMISSION

Measurement Uncertainty

All measurements involve certain levels of uncertainties, especially in field of EMC. The factors contributing to uncertainties are spectrum analyzer, cable loss, and LISN.

Based on NIS 81, The Treatment of Uncertainty in EMC Measurements, the best estimate of the uncertainty of any conducted emissions measurement at Bay Area Compliance Laboratory Corp. (Shenzhen) is ± 3.2 dB.

EUT Setup

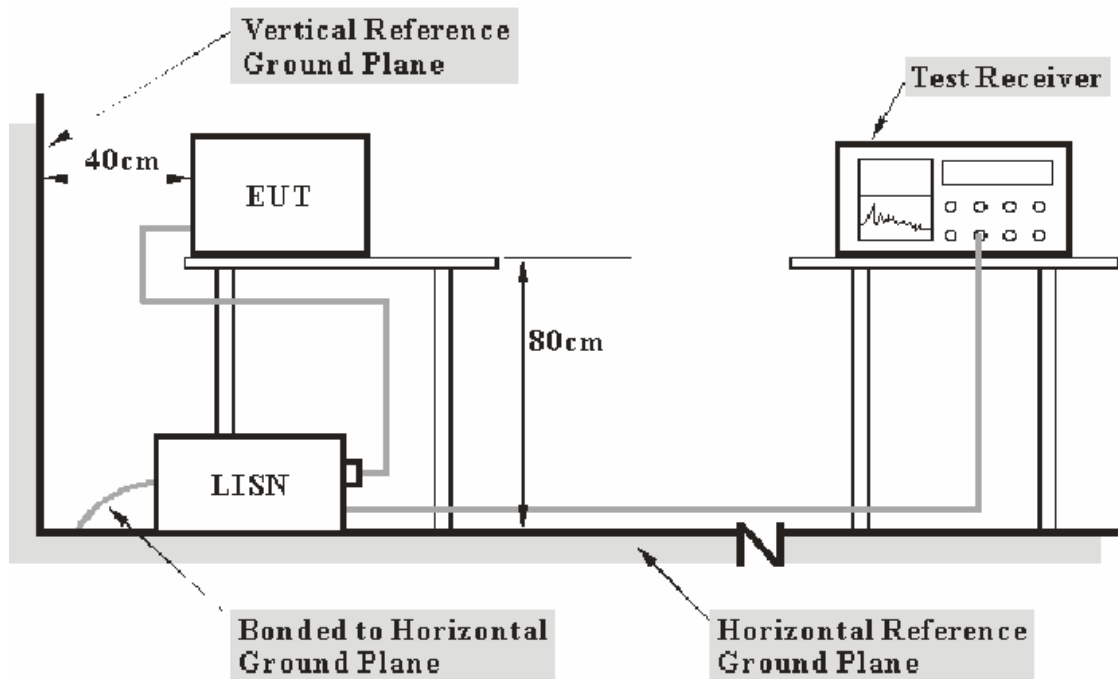

- Note:**
1. Support units were connected to second LISN.
 2. Both of LISNs (AMN) 80 cm from EUT and at the least 80 cm from other units and other metal planes support units.

The setup of EUT is according with MP-5: 1986 measurement procedure. Specification used was with the FCC Part 18 limits.

The EUT was connected to a 120 VAC/ 60Hz power source.

EMI Test Receiver Setup

The test receiver was set to investigate the spectrum from 150 kHz to 30 MHz.

During the conducted emission test, the EMI test receiver was set with the following configurations:

<u>Frequency Range</u>	<u>IFBW</u>
150 kHz – 30 MHz	9 kHz

Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
Com-Power	L.I.S.N.	LI-200	12005	N/A	N/A
Com-Power	L.I.S.N.	LI-200	12008	N/A	N/A
Rohde & Schwarz	EMI Test Receiver	ESCS30	830245/006	2005-1-26	2006-1-26
Rohde & Schwarz	L.I.S.N.	ESH2-Z5	892107/021	2005-2-28	2006-2-28

* Com-Power's LISN were used as the supporting equipment.

* **Statement of Traceability:** Bay Area Compliance Laboratory Corp. (Shenzhen) attests that all calibrations have been performed in accordance to NVLAP requirements, traceable to the NIST.

Test Procedure

During the conducted emission test, the EUT power cord was connected to the outlet of the LISN.

Maximizing procedure were performed on the six (6) highest emissions of the EUT.

All data was recorded in the Quasi-peak detection mode.

Test Results Summary

According to the recorded data in following table, the EUT complied with the FCC Part 18, with the worst margin reading of:

7.5 dB at 0.606 MHz in the **Line** conductor mode.

Test Data**Environmental Conditions**

Temperature:	26 °C
Relative Humidity:	55 %
ATM Pressure:	94.0 kPa

Testing was performed by Hansen Hu on 2005-08-15.

Test mode: MAX Power

Frequency MHz	LINE CONDUCTED EMISSIONS			FCC Part 18	
	Amplitude dB μ V	Detector QP	Phase Line/Neutral	Limit dB μ V	Margin dB
0.606	48.50	QP	Line	56.00	7.50
0.515	45.70	QP	Line	56.00	10.30
19.680	48.90	QP	Neutral	60.00	11.10
19.700	48.70	QP	Line	60.00	11.30
0.665	41.30	QP	Line	56.00	14.70
1.645	41.30	QP	Line	56.00	14.70
19.700	34.10	AV	Line	50.00	15.90
19.905	33.30	AV	Neutral	50.00	16.70
1.370	39.20	QP	Neutral	56.00	16.80
0.150	48.40	QP	Line	66.00	17.60
13.025	39.40	QP	Neutral	60.00	20.60
0.180	43.80	QP	Neutral	64.49	20.69
0.265	37.80	QP	Neutral	61.27	23.47
13.025	25.30	AV	Neutral	50.00	24.70
0.340	33.60	QP	Neutral	59.20	25.60
0.515	14.20	AV	Line	46.00	31.80
0.606	13.60	AV	Line	46.00	32.40
0.340	14.20	AV	Neutral	49.20	35.00
1.645	10.50	AV	Line	46.00	35.50
0.665	10.20	AV	Line	46.00	35.80
1.370	9.30	AV	Neutral	46.00	36.70
0.265	10.90	AV	Neutral	51.27	40.37
0.180	13.60	AV	Neutral	54.49	40.89
0.150	13.40	AV	Line	56.00	42.60

Plot(s) of Test Data

Plot(s) of Test Data is presented hereinafter as reference.


EUT: Microwave oven M/N:wp900x28-z
 Manuf: GALANZ
 Op Cond: Max power
 Operator: Hansen
 Test Spec: AC 120V/60Hz L
 Comment: Temp:27
 Humi:65%
 Date: 15. Aug 05 14:32

Scan Settings (1 Range)

Frequencies			Receiver Settings			
Start	Stop	Step	IF BW	Detector	M-Time	Atten Preamp
150k	30M	5k	9k	PK+AV	10ms AUTO	LN OFF

Transducer No.	Start	Stop	Name
1	9k	30M	ESH3

Final Measurement: x QP / + AV
 Meas Time: 1 s
 Subranges: 25
 Acc Margin: 6dB

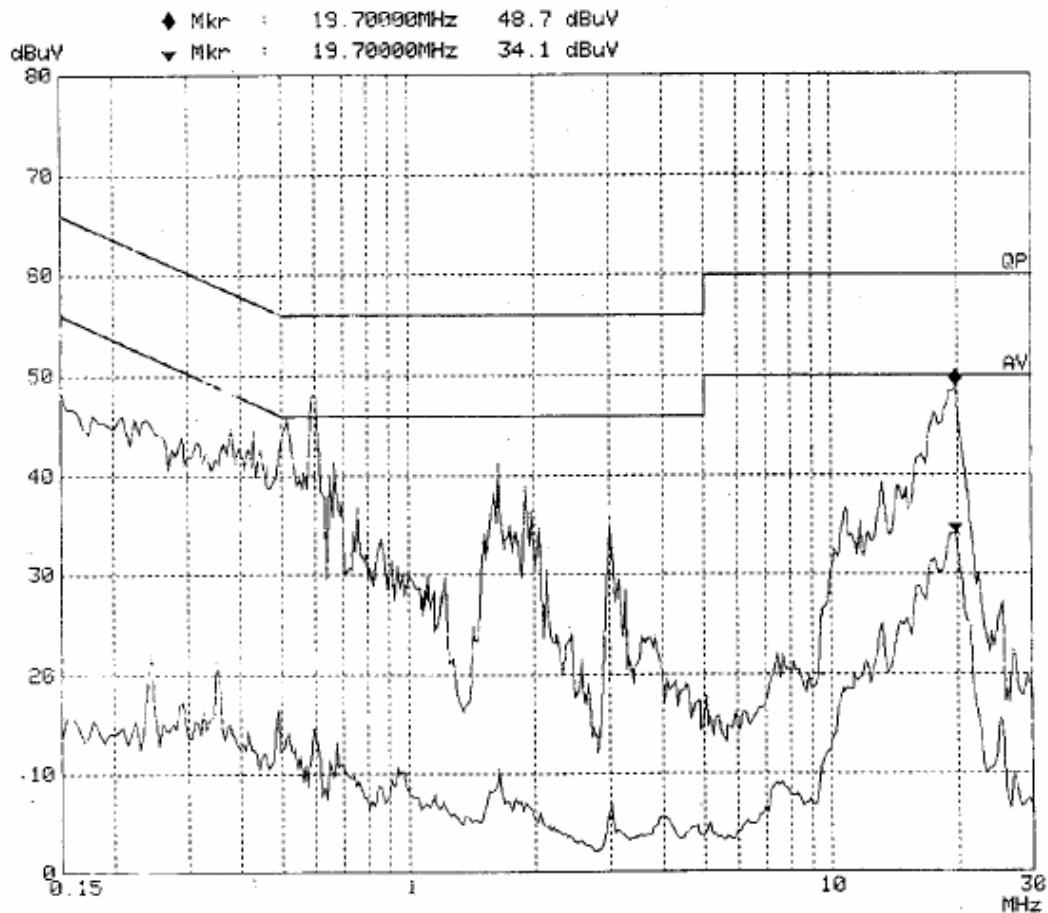


EUT: Microwave oven M/N:wp900x28-z
 Manuf: GALANZ
 Op Cond: Max power
 Operator: Hansen
 Test Spec: AC 120V/60Hz N
 Comment: Temp:27
 Humi:65%
 Date: 15. Aug 05 14:21

Scan Settings (1 Range)

Frequencies			Receiver Settings			
Start	Stop	Step	IF BW	Detector	M-Time	Atten Preamp
150k	30M	5k	9k	PK+AV	10ms AUTO	LN OFF

Transducer No.	Start	Stop	Name
1	9k	30M	ESH3

Final Measurement: x QP / + AV
 Meas Time: 1 s
 Subranges: 25
 Acc Margin: 6dB

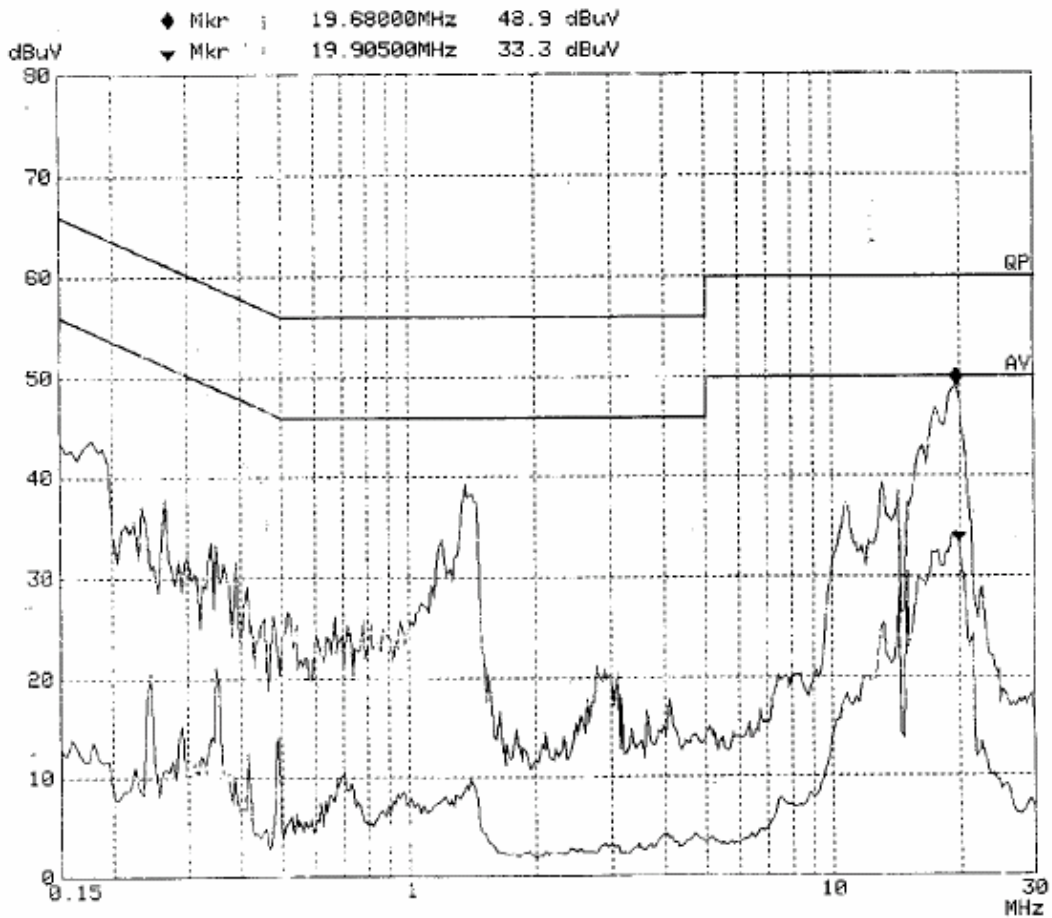

RADIATION HAZARD MEASUREMENT

Environmental Conditions

Temperature:	25 °C
Relative Humidity:	50 %
ATM Pressure:	117.5 kPa

Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
Rohde & Schwarz	EMI Test Receiver	ESCI	100028	2004-9-15	2005-9-15
Sunol Sciences	Horn Antenna	DRH-118	A052604	2005-6-2	2006-6-2
HP	Preamplifier	8449B	3008A00277	2004-9-1	2005-8-31
Ainuo	Digital Power Analyzer	8732B	028706117	2004-12-23	2005-12-23
HY	AC Power Source	9020117	GY053(1)	2005-8-21	2006-8-21

* **Statement of Traceability:** Bay Area Compliance Laboratory Corp. (Shenzhen) attests that all calibrations have been performed in accordance to NVLAP requirements, traceable to the NIST.

Radiation Hazard Measurement

Radiation leakage was measured in the as-received condition with the oven door closed using a microwave leakage meter.

A 1000ml water load was placed in the center of the oven and the oven was operated at maximum output power.

There was no microwave leakage exceeding a power level of $0.66\text{mW}/\text{cm}^2$ observed at any point 5cm or more from the external surface of the oven.

A maximum of $1.0\text{mW}/\text{cm}^2$ is allowed in accordance with the applicable Federal Standards. Hence, microwave leakage in the as-received condition with the oven door closed was below the maximum allowed.

Input Power

Input power and current was measured using a power analyzer. A 1000ml water load was placed in the center of the oven and the oven was operated at maximum output power. A 1000ml water load was chosen for its compatibility with the procedure commonly used by manufacturers to determine their input ratings.

Input Voltage (Vac/Hz)	Input Current (amps)	Measured Input Power (watts)	Rated Input Power (watts)
120.160	11.56	1310	1450

Based on the measured input power, the EUT was found to be operating within the intended specifications.

Load for Microwave Ovens

For all measurements, the energy developed by the oven was absorbed by a dummy load consisting of a quantity of tap water in a beaker. If the oven was provided with a shelf or other utensil support, this support was in its initial normal position. For ovens rated at 1000 watts or less power output, the beaker contained quantities of water as listed in the following subparagraphs. For ovens rated at more than 1000watts output, each quantity was increased by 50% for each 500watts or fraction thereof in excess of 1000watts. Additional beakers were used if necessary.

- Load for power output measurement: 1000 milliliters of water in the beaker located in the center of the oven.
- Load for frequency measurement: 1000 milliliters of water in the beaker located in the center of the oven.
- Load for measurement of radiation on second and third harmonic: Two loads, one of 700 and the other of 300 milliliters, of water are used. Each load is tested both with the beaker located in the center of the oven and with it in the right front corner.

The RF output power is rated at 1000 watts

Load used for power output measurement = 1000 milliliters of water
Load used for frequency measurement = 1000 milliliters of water
Load used for harmonic measurement = 700 & 300 milliliters of water
Load used for other measurement = 700 milliliters of water

RF Output Power Measurement

The Caloric Method was used to determine maximum RF output power. The initial temperature of the water load was measured. The water load was placed in the center of the oven. The oven was operated at maximum output power for 200 seconds, the temperature of the water was re-measured.

Quality of Water (ml)	Starting Temperature (°C)	Final Temperature (°C)	Elapsed Time (Seconds)
1000	24	63.8	200

Power = (4.2 joules/calorie)(volume in milliliters)(temperature rise)/(time in seconds)

Power = 4.2 joules/calorie x 1000 x (63.8-24) / 200

Power = 835.8 watts

The measurement output power was found to be less than 500watts. Therefore, in accordance with Section 18.305 of Subpart-C, the measured out-of-band emissions were compared to the limit of 25 μ V/meter at a 300-meter measurement distance.

The measured output power was found to exceed 500watts. Therefore, in accordance with Section 18.305 of Subpart-C, the measured out-of-band emissions were compared with the limit calculated as following:

$$LFS = 25 * \text{SQRT}(\text{Power Output}/500)$$

$$LFS = 25 * \text{SQRT}(835.8/500)$$

$$LFS \approx 32.32$$

Where: LFS is the maximum allowable field strength for out-of-band emissions in μ V/meter at a 300-meter measurement distance. Power Output is the measured output power in watts.

Manufacturer	Model	LFS	dB (μ V/M)	dB (μ V/M)@3m
Guangdong Galanz Enterprise Co., Ltd.	WP900AL28-2	32.32	30.18	70.18

Operating Frequency Measurement

Variation in Operating Frequency with Time

The operating frequency was measured using a spectrum analyzer. Starting with the EUT at room temperature, a 1000ml water load was placed in the center of the oven and the oven was operated at maximum output power. The fundamental operating frequency was monitored until the water load was reduced to 20 percent of the original load.

The results of this test are as follows:

Manufacturer	Model	Minimum Frequency (MHz)	Maximum Frequency (MHz)
Guangdong Galanz Enterprise Co., Ltd.	WP900AL28-2	2.4570	2.4606

Refer to data pages for details of the variation in operating frequency with time measurement.




*RBW 1 MHz Marker 1 [T1]
*VBW 1 MHz 82.60 dBμV
*SWT 1 s 2.460600000 GHz

Ref 102 dBμV

*Att 10 dB

1 PK
MAXH

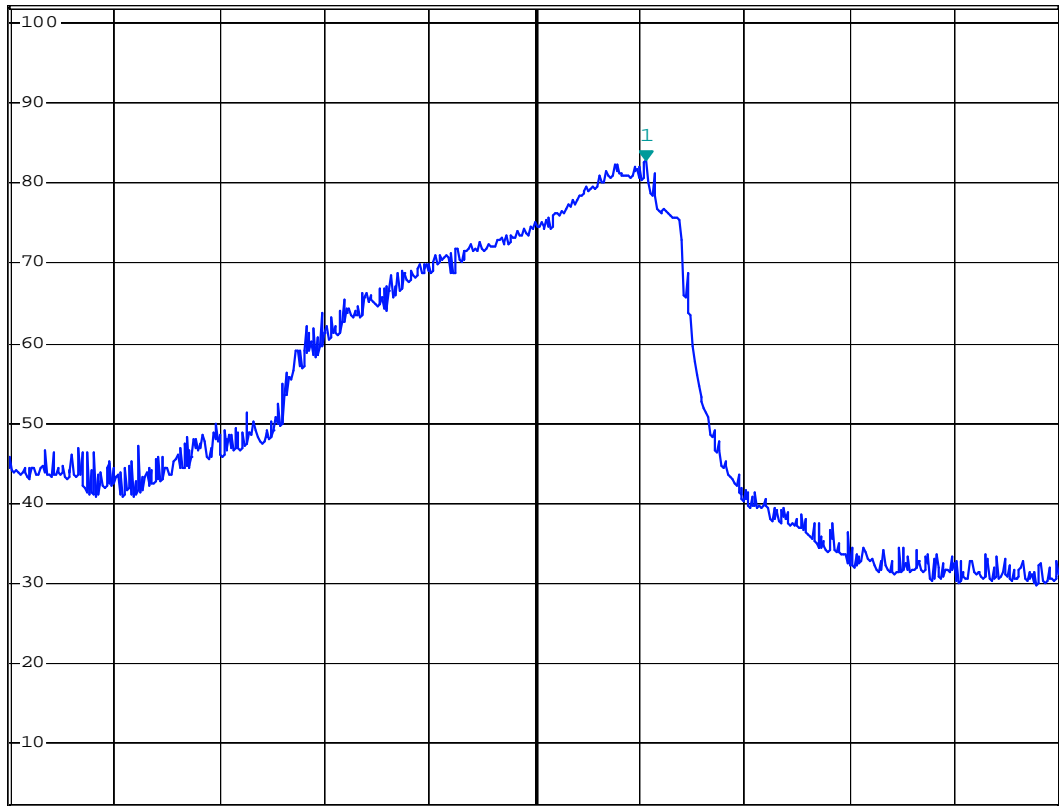

Start 2.4 GHz

10 MHz/

Stop 2.5 GHz

GALANZ WP900(X)28-Z Frequency VS Time (Start)

Date: 26.AUG.2005 14:09:49




*RBW 1 MHz Marker 1 [T1]
*VBW 1 MHz 81.29 dBμV
*SWT 1 s 2.457000000 GHz

Ref 102 dBμV

*Att 10 dB

1 PK
MAXH

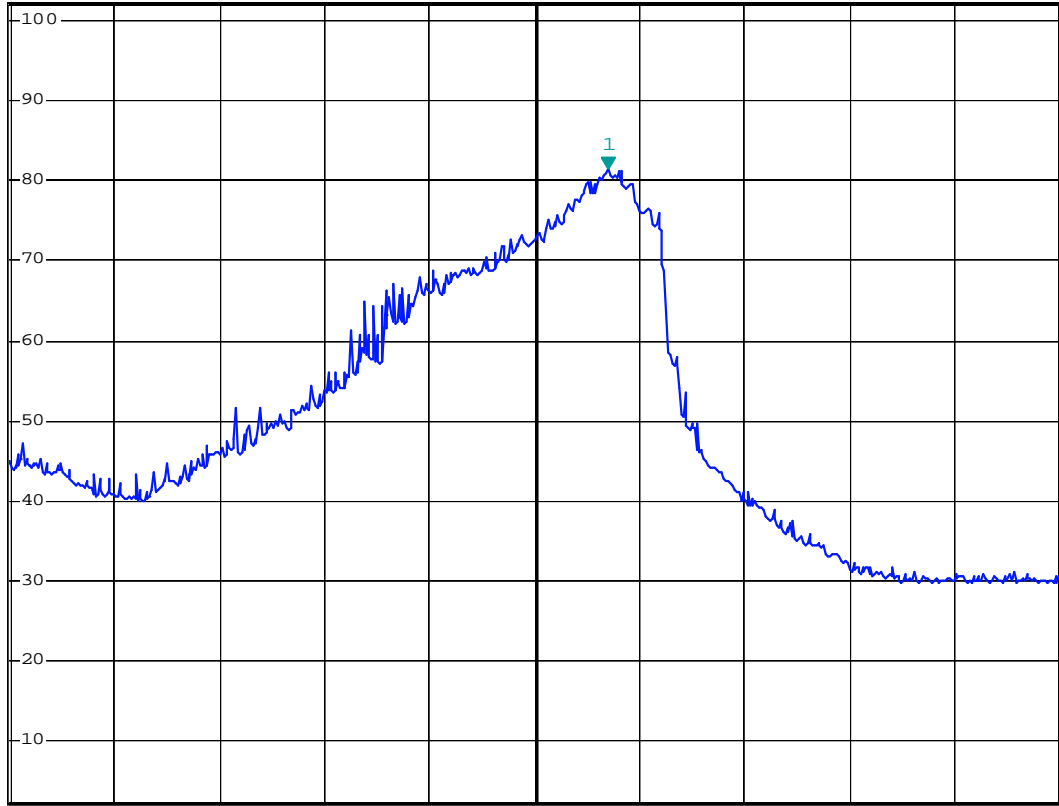

Start 2.4 GHz

10 MHz/

Stop 2.5 GHz

GALANZ WP900(X)28-Z Frequency VS Time (End)

Date: 26.AUG.2005 14:28:58

Variation in Operating Frequency with Line Voltage

The EUT was operated / warmed by at least 10 minutes of use with a 1000ml water load at room temperature at the beginning of the test. Then the operating frequency was monitored as the input voltage was varied between 80 and 125 percent of the nominal rating.

The results of this test are as follows:

Line voltage varied from 96Vac to 150Vac.

Manufacturer	Model	Minimum Frequency (MHz)	Maximum Frequency (MHz)
Guangdong Galanz Enterprise Co., Ltd.	WP900AL28-2	2.4576	2.4598

Please refer to following pages for details of the variation in operating frequency with line voltage measurement.




* RBW 1 MHz Marker 1 [T1]
* VBW 1 MHz 79.10 dBμV
* SWI 1 s 2.457600000 GHz

Ref 102 dBμV

* Att 10 dB

L PK
MAXH

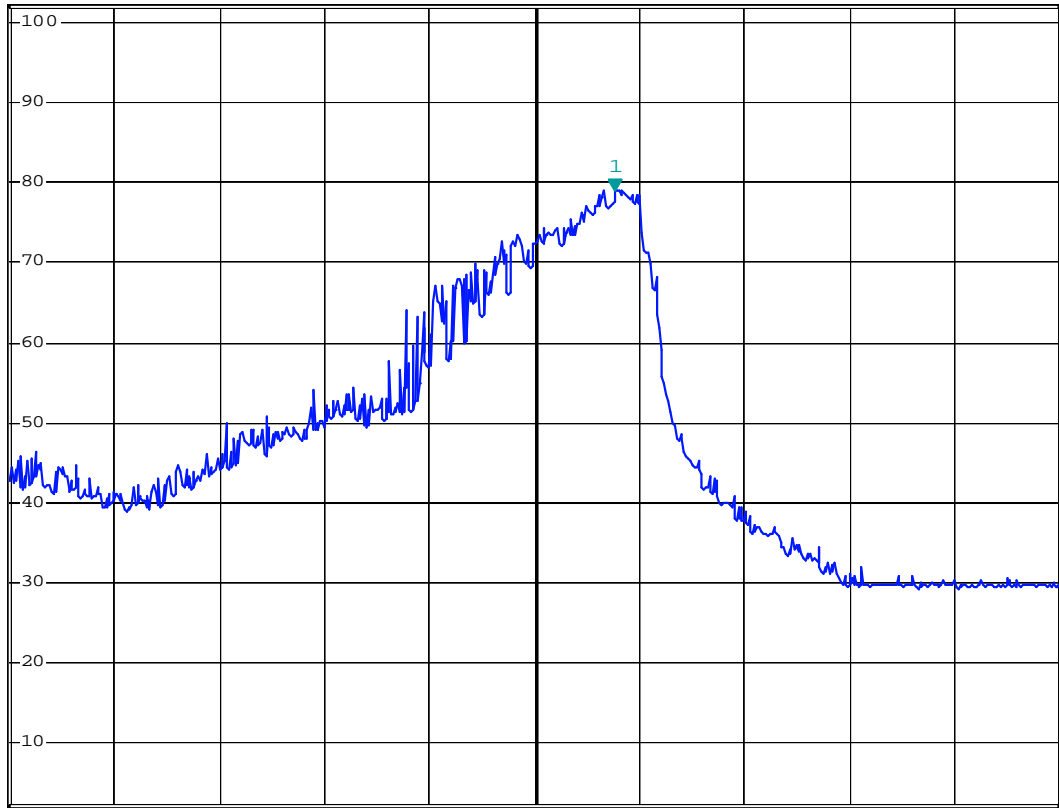

Start 2.4 GHz

10 MHz/

Stop 2.5 GHz

GALANZ WP900(X)28-Z Frequency VS Voltage (start)

Date: 26.AUG.2005 14:31:53




*RBW 1 MHz Marker 1 [T1]
*VBW 1 MHz 80.82 dBμV
*SWT 1 s 2.459800000 GHz

Ref 102 dBμV

*Att 10 dB

1 PK
MAXH

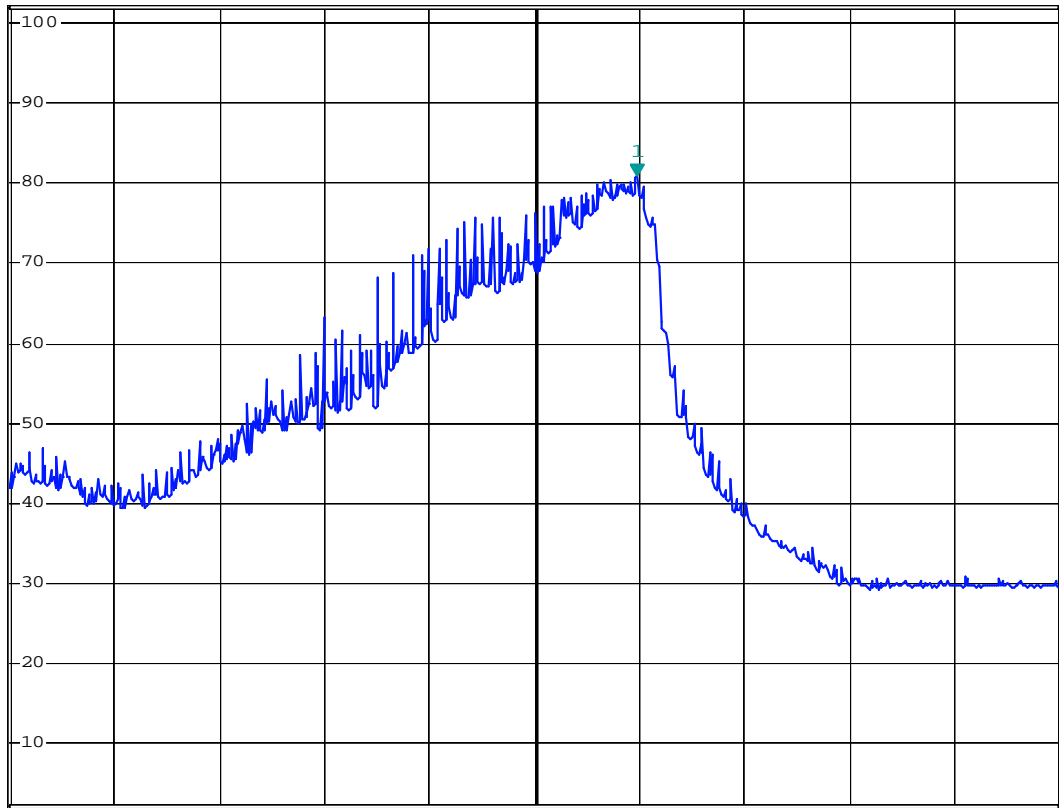

Start 2.4 GHz

10 MHz/

Stop 2.5 GHz

GALANZ WP900(X)28-Z Frequency VS Voltage (End)

Date: 26.AUG.2005 14:37:00


RADIATED EMISSION DATA

Measurement Uncertainty

All measurements involve certain levels of uncertainties, especially in field of EMC. The factors contributing to uncertainties are spectrum analyzer, cable loss, antenna factor calibration, antenna directivity, antenna factor variation with height, antenna phase center variation, antenna factor frequency interpolation, measurement distance variation, site imperfections, mismatch (average), and system repeatability.

Based on NIS 81, The Treatment of Uncertainty in EMC Measurements, the best estimate of the uncertainty of a radiation emissions measurement at Bay Area Compliance Laboratory Corp. (Shenzhen) is ± 4.4 dB.

EUT Setup

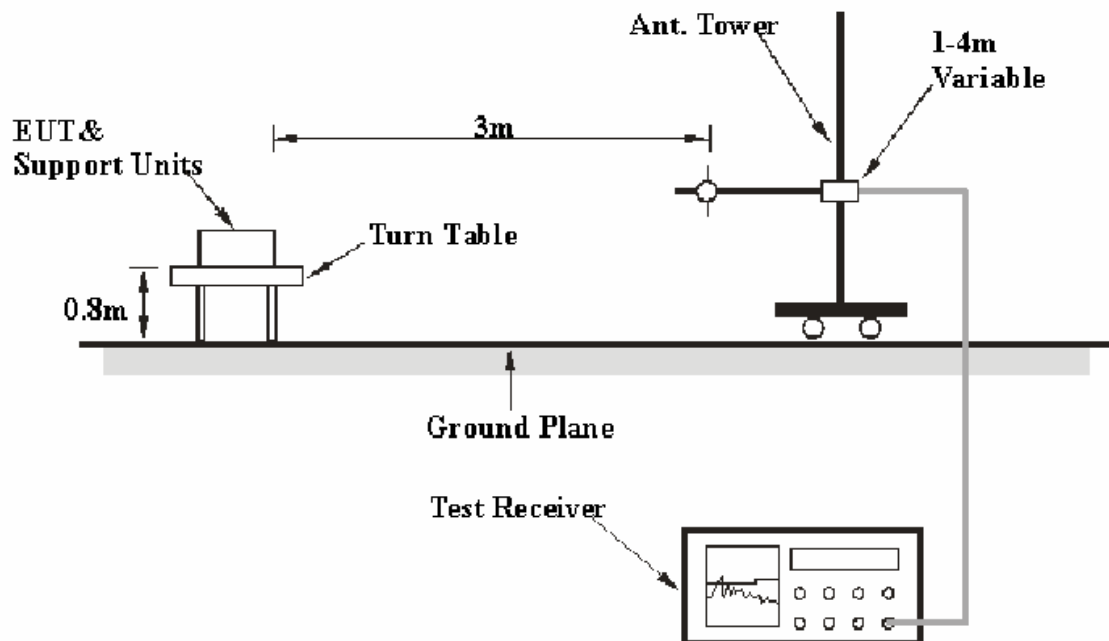

The radiated emission tests were performed in the 3 meters chamber B, using the setup accordance with the FCC MP - 5. The specification used was the FCC part 18 limits.

The EUT was connected to 120 VAC/60 Hz power source.

EMI Test Receiver Setup and Spectrum Analyzer Setup

The system was investigated from 30 MHz to 25 GHz.

During the radiated emission test, the EMI test receiver was set with the following configurations:

<i>Frequency Range</i>	<i>R B/W</i>	<i>Video B/W</i>	<i>IF B/W</i>
30 – 1000 MHz	100 kHz	100 kHz	120 kHz
Start Frequency.....			1 GHz
Stop Frequency.....			25 GHz
Sweep Speed.....			Auto
Video Bandwidth.....			30 Hz
Resolution Bandwidth.....			1 MHz

Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
HP	Amplifier	8447D	2994A09795	2004-9-1	2005-8-31
Rohde & Schwarz	Test Receiver	ESCI	100028	2004-9-15	2005-9-15
Sunol Sciences	Bilog Antenna	JB1	A040904-1	2005-4-28	2006-4-28
HP	Amplifier	8449B	3008A00277	2004-9-1	2005-8-31
Sunol Sciences	Horn Antenna	DRH-118	A052604	2004-6-2	2005-6-2
Rohde&Schwarz	Spectrum Analyzer	FSEM30	849720/019	2004-11-10	2005-11-10

* **Statement of Traceability:** Bay Area Compliance Laboratory Corp. (Shenzhen) attests that all calibrations have been performed in accordance to NVLAP requirements, traceable to the NIST.

Test Procedure

For the radiated emissions test, the power cord of the EUT was connected to the AC floor outlet.

Maximizing procedure was performed on the six (6) highest emissions to ensure that the EUT complied with all installation combinations.

The EUT was in the normal (naïve) operating mode during the final qualification test to represent the worst results.

All data was recorded in the Quasi-Peak detection mode from 30 MHz to 1GHz and average detection mode above 1 GHz.

Corrected Amplitude & Margin Calculation

The Corrected Amplitude is calculated by adding the Antenna Loss and Cable Loss, and subtracting the Amplifier Gain from the Meter reading. The basic equation is as follows:

$$\text{Corr. Ampl.} = \text{Meter Reading} + \text{Antenna Loss} + \text{Cable Loss} - \text{Amplifier Gain}$$

The “**Margin**” column of the following data tables indicates the degree of compliance with the applicable limit. For example, a margin of -7dB means the emission is 7dB below the maximum limit for Class B. The equation for margin calculation is as follows:

$$\text{Margin} = \text{Limit} - \text{Cord. Amp.}$$

Test Results Summary

According to the data in the following table, the EUT complied with the FCC Part 18, with the worst margin reading of:

Max Power (1GHz-25 GHz): **9.28 dB** at **7360.67 MHz** in the **Horizontal** polarization.

Max Power (30 MHz-1000 MHz): **8.2 dB** at **739.68 MHz** in the **Vertical** polarization.

Test Data

Environmental Conditions

Temperature:	18 °C
Relative Humidity:	53 %
ATM Pressure:	101.5 kPa

The testing was performed by William Chan on 2005-8-25.

Test mode: Max Power (1GHz-25 GHz)

INDICATED		TABLE Angle Degree	ANTENNA		CORRECTION FACTOR			CORRECTED AMPLITUDE dBμV/m	FCC PART 18	
Frequency MHz	Meter Reading dBμV/m		Height Meter	Polar H/ V	Antenna Loss dB	Cable Loss dB	Amplifier Gain dB		Limit dBμV/m	Margin dB
2467.5	108.35	180	1.0	V	29.0	3.7	35.8	105.25		
2466.5	113.5	180	1.2	H	29.0	3.7	35.8	110.4		
7360.67	52.70	120	1.0	H	35.8	6.1	33.7	60.9	70.18	9.28
2212.02	65.48	120	1.0	H	28.4	3.4	35.0	62.28	70.18	7.90
2209.22	66.43	90	1.2	V	28.4	3.4	35.0	63.23	70.18	6.95
4908.71	59.22	90	1.0	V	33.8	5.2	33.4	64.82	70.18	5.36
4412.02	34.36	60	1.0	V	32.0	4.9	32.5	38.76	70.18	31.42
4908.71	61.01	90	1.2	H	33.8	5.2	33.4	66.61	70.18	3.57
2693.09	46.08	45	1.2	V	28.1	3.7	35.0	42.88	70.18	27.30
4418.33	40.33	120	1.0	H	32.0	4.9	32.5	44.73	70.18	25.45
8290.08	37.01	180	1.2	V	36.7	6.5	34.3	45.91	70.18	24.27
8299.49	40.38	90	1.2	H	36.7	6.5	34.3	49.28	70.18	20.90
7358.48	59.37	60	1.0	V	35.8	6.1	33.7	67.57	70.18	2.61
9825.75	43.69	45	1.2	V	37.6	7.3	34.1	54.49	70.18	15.69
2692.38	59.32	90	1.2	H	28.1	3.7	35.0	56.12	70.18	14.06
9818.74	45.92	180	1.0	H	37.6	7.3	34.1	56.72	70.18	13.46

Test mode: Max Power (30 MHz-1000 MHz)

INDICATED		TABLE	ANTENNA		CORRECTION FACTOR			CORRECTED	FCC PART 18	
Frequency	Meter Reading	Angle	Height	Polar	Antenna Loss	Cable Loss	Amplifier Gain	AMPLITUDE	Limit	Margin
MHz	dB μ V/m	Degree	Meter	H/ V	dB	dB	dB	dB μ V/m	dB μ V/m	dB
739.66	61.9	289	1.0	V	21.2	5.8	26.9	62.0	70.18	8.2
245.95	71.6	45	1.0	H	12.3	2.8	26	60.8	70.18	9.4
986.07	49.8	60	1.2	H	23.5	7.0	26.5	53.8	70.18	16.4
492.46	57.3	289	1.0	V	18.2	4.6	26.5	53.5	70.18	16.7
245.95	64.2	60	1.0	V	12.3	2.8	26	53.4	70.18	16.8
771.44	53.3	45	1.0	V	21.0	5.9	26.9	53.3	70.18	16.8
739.66	51.0	35	3.8	H	21.2	5.8	26.9	51.0	70.18	19.1
67.2	66.1	45	1.2	V	8.5	1.6	26.8	49.4	70.18	20.8
307.83	54.0	35	3.8	H	13.9	3.2	25.8	45.3	70.18	24.9
492.6	46.2	45	1.2	H	18.2	4.6	26.5	42.5	70.18	27.7
327.88	49.9	180	1.2	V	14.3	3.3	25.8	41.7	70.18	28.5
191.07	49.8	0	1.0	H	11.8	2.4	26.6	37.4	70.18	32.8
63.09	53.9	90	1.2	H	8.1	1.6	26.8	36.8	70.18	33.4
129.01	45.7	180	1.2	H	14.4	2.4	26.6	35.9	70.18	34.3

Plot(s) of Test Data

Plot(s) of Test Data is presented hereinafter as reference.




*RBW 100 kHz
*VBW 100 kHz
*SWT 300 ms

Ref 80 dBμV

*Att 10 dB

1 PK
VIEW

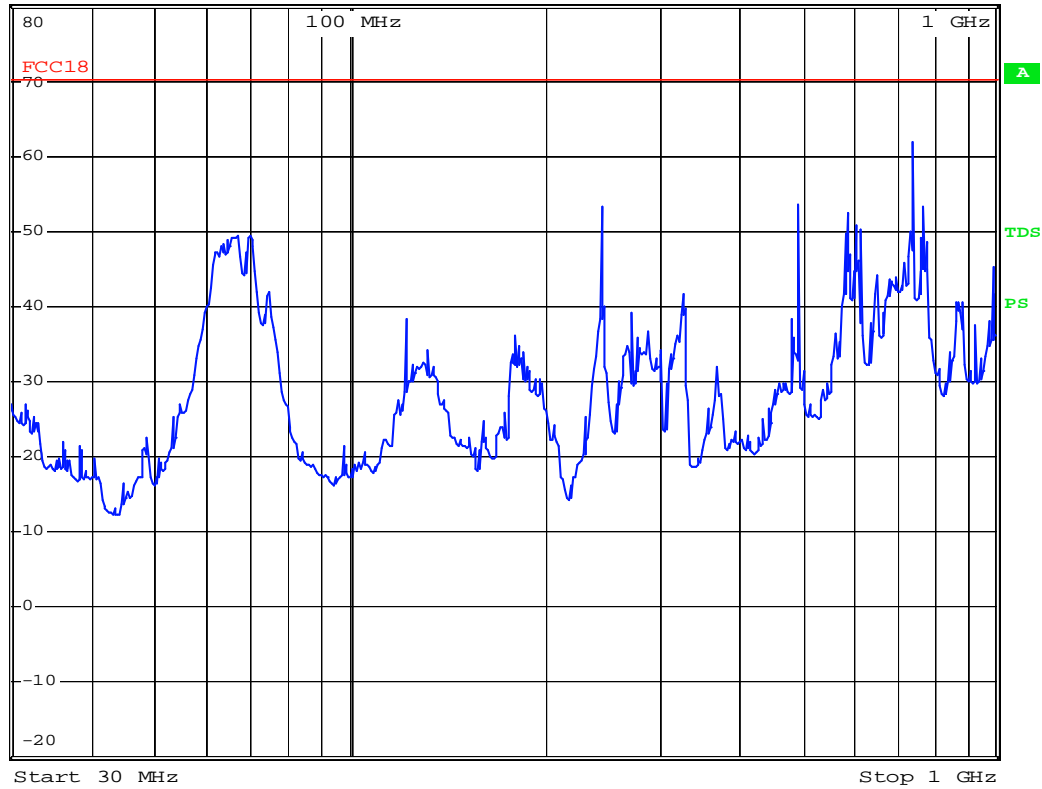

Galanz Microwave Oven WP900(X)28-Z Below 1G Radiation Vertical

Date: 25.AUG.2005 11:17:08

*****END OF REPORT*****