



Inter**Lab**[®]

FCC Measurement/Technical Report on

Main Unit of Car Multimedia System
NR-218

FCC ID: UJHNR218

IC: 662K-NR218

Report Reference: MDE_MEE_1309_FCCa

Test Laboratory:

Borsigstrasse 11
Germany
7Layers AG
40880 Ratingen



Note:

The following test results relate only to the devices specified in this document. This report shall not be reproduced in parts without the written approval of the test laboratory.

7 layers AG
Borsigstrasse 11
40880 Ratingen, Germany
Phone: +49 (0) 2102 749 0
Fax: +49 (0) 2102 749 350
www.7Layers.com

Aufsichtsratsvorsitzender •
Chairman of the Supervisory Board:
Peter Mertel
Vorstand • Board:
Dr. H.-J. Meckelburg

Registergericht • registered in:
Düsseldorf, HRB 44096
USt-IdNr • VAT No.:
DE 203159652
TAX No. 147/5869/0385



Table of Contents

0	Summary	3
0.1	Technical Report Summary	3
0.2	Measurement Summary	4
1	Administrative Data	7
1.1	Testing Laboratory	7
1.2	Project Data	7
1.3	Applicant Data	7
1.4	Manufacturer Data	7
2	Test object Data	8
2.1	General EUT Description	8
2.2	EUT Main components	9
2.3	Ancillary Equipment	9
2.4	Auxiliary Equipment	9
2.5	EUT Setups	10
2.6	Operating Modes	10
2.7	Product labelling	11
3	Test Results	12
3.1	Occupied bandwidth	12
3.2	Peak power output	15
3.3	Spurious RF conducted emissions	18
3.4	Spurious radiated emissions	22
3.5	Band edge compliance	29
3.6	Power density	33
4	Test Equipment	37
5	Photo Report	43
6	Setup Drawings	43
7	FCC and IC Correlation of measurement requirements	44
8	Annex measurement plots	45
8.1	Occupied bandwidth	45
8.2	Peak power output	49
8.3	Band edge compliance	53
8.4	Band edge compliance radiated	57
8.5	Spurious RF conducted emissions	59
8.6	Power density	63



0 Summary

0.1 Technical Report Summary

Type of Authorization

Certification for an Intentional Radiator (Digital Device / Spread Spectrum).

Applicable FCC Rules

Prepared in accordance with the requirements of FCC Rules and Regulations as listed in 47 CFR Ch.1 Parts 2 (10-1-13 Edition) and 15 (10-1-13 Edition). The following subparts are applicable to the results in this test report.

Part 2, Subpart J - Equipment Authorization Procedures, Certification

Part 15, Subpart C – Intentional Radiators

§ 15.201 Equipment authorization requirement

§ 15.207 Conducted limits

§ 15.209 Radiated emission limits; general requirements

§ 15.247 Operation within the bands 902-928 MHz, 2400-2483.5 MHz and 5725-5850 MHz

Note:

The tests were selected and performed with reference to the FCC measurement guide line "Measurement of Digital Transmission Systems Operating under Section 15.247 March 23, 2005".

Instead of applying ANSI C63.4–1992 which is referenced in the FCC Public Note, the newer ANSI C63.4–2009 is applied.

Summary Test Results:

The EUT complied with all performed tests as listed in chapter 0.2 Measurement Summary.



0.2 Measurement Summary

FCC Part 15, Subpart C § 15.207

Conducted emissions (AC power line)

OP-Mode	Setup	Port	Final Result
-	-	-	N/A

FCC Part 15, Subpart C § 15.247 (a) (1)

Occupied bandwidth

The measurement was performed according to FCC § 15.31

10-1-11 Edition

OP-Mode	Setup	Port	Final Result
op-mode 1b	Setup_01	WLAN/BT ant.connector	passed
op-mode 1g	Setup_01	WLAN/BT ant.connector	passed
op-mode 1n	Setup_01	WLAN/BT ant.connector	passed
op-mode 2b	Setup_01	WLAN/BT ant.connector	passed
op-mode 2g	Setup_01	WLAN/BT ant.connector	passed
op-mode 2n	Setup_01	WLAN/BT ant.connector	passed
op-mode 3b	Setup_01	WLAN/BT ant.connector	passed
op-mode 3g	Setup_01	WLAN/BT ant.connector	passed
op-mode 3n	Setup_01	WLAN/BT ant.connector	passed
op-mode 4	Setup_03	KLEER temp. ant.connector	passed
op-mode 5	Setup_03	KLEER temp. ant.connector	passed
op-mode 6	Setup_03	KLEER temp. ant.connector	passed

FCC Part 15, Subpart C § 15.247 (b) (1)

Peak power output

The measurement was performed according to FCC § 15.31

10-1-11 Edition

OP-Mode	Setup	Port	Final Result
op-mode 1b	Setup_01	WLAN/BT ant.connector	passed
op-mode 1g	Setup_01	WLAN/BT ant.connector	passed
op-mode 1n	Setup_01	WLAN/BT ant.connector	passed
op-mode 2b	Setup_01	WLAN/BT ant.connector	passed
op-mode 2g	Setup_01	WLAN/BT ant.connector	passed
op-mode 2n	Setup_01	WLAN/BT ant.connector	passed
op-mode 3b	Setup_01	WLAN/BT ant.connector	passed
op-mode 3g	Setup_01	WLAN/BT ant.connector	passed
op-mode 3n	Setup_01	WLAN/BT ant.connector	passed
op-mode 4	Setup_03	KLEER temp. ant.connector	passed
op-mode 5	Setup_03	KLEER temp. ant.connector	passed
op-mode 6	Setup_03	KLEER temp. ant.connector	passed



FCC Part 15, Subpart C

§ 15.247 (d)

Spurious RF conducted emissions

The measurement was performed according to FCC § 15.31

10-1-11 Edition

OP-Mode	Setup	Port	Final Result
op-mode 1b	Setup_01	WLAN/BT ant.connector	passed
op-mode 1g	Setup_01	WLAN/BT ant.connector	passed
op-mode 1n	Setup_01	WLAN/BT ant.connector	passed
op-mode 2b	Setup_01	WLAN/BT ant.connector	passed
op-mode 2g	Setup_01	WLAN/BT ant.connector	passed
op-mode 2n	Setup_01	WLAN/BT ant.connector	passed
op-mode 3b	Setup_01	WLAN/BT ant.connector	passed
op-mode 3g	Setup_01	WLAN/BT ant.connector	passed
op-mode 3n	Setup_01	WLAN/BT ant.connector	passed
op-mode 4	Setup_03	KLEER temp. ant.connector	passed
op-mode 5	Setup_03	KLEER temp. ant.connector	passed
op-mode 6	Setup_03	KLEER temp. ant.connector	passed

FCC Part 15, Subpart C

§ 15.247 (d), § 15.35 (b), § 15.209

Spurious radiated emissions

The measurement was performed according to ANSI C63.4

2009

OP-Mode	Setup	Port	Final Result
op-mode 1b	Setup_02	WLAN/BT antenna radiating	passed
op-mode 2b	Setup_02	WLAN/BT antenna radiating	passed
op-mode 3b	Setup_02	WLAN/BT antenna radiating	passed
op-mode 1g	Setup_02	WLAN/BT antenna radiating	passed
op-mode 2g	Setup_02	WLAN/BT antenna radiating	passed
op-mode 3g	Setup_02	WLAN/BT antenna radiating	passed
op-mode 1n	Setup_02	WLAN/BT antenna radiating	passed
op-mode 2n	Setup_02	WLAN/BT antenna radiating	passed
op-mode 3n	Setup_02	WLAN/BT antenna radiating	passed
op-mode 4	Setup_01	KLEER integrated ant. radiating	passed
op-mode 5	Setup_01	KLEER integrated ant. radiating	passed
op-mode 6	Setup_01	KLEER integrated ant. radiating	passed

FCC Part 15, Subpart C

§ 15.247 (d)

Band edge compliance

The measurement was performed according to FCC § 15.31 / ANSI C63.4

10-1-11 Edition / 2009

OP-Mode	Setup	Port	Final Result
op-mode 1b	Setup_01	WLAN/BT ant.connector	passed
op-mode 1g	Setup_01	WLAN/BT ant.connector	passed
op-mode 1n	Setup_01	WLAN/BT ant.connector	passed
op-mode 3b	Setup_01	WLAN/BT ant.connector	passed
op-mode 3g	Setup_01	WLAN/BT ant.connector	passed
op-mode 3n	Setup_01	WLAN/BT ant.connector	passed
op-mode 4	Setup_03	KLEER temp. ant.connector	passed
op-mode 6	Setup_03	KLEER temp. ant.connector	passed
op-mode 3b	Setup_02	WLAN/BT antenna radiating	passed
op-mode 3g	Setup_02	WLAN/BT antenna radiating	passed
op-mode 3n	Setup_02	WLAN/BT antenna radiating	passed
op-mode 6	Setup_01	KLEER integrated ant. radiating	passed



FCC Part 15, Subpart C

§ 15.247 (e)

Power density

The measurement was performed according to FCC § 15.31

10-1-11 Edition

OP-Mode	Setup	Port	Final Result
op-mode 1b	Setup_01	WLAN/BT ant.connector	passed
op-mode 1g	Setup_01	WLAN/BT ant.connector	passed
op-mode 1n	Setup_01	WLAN/BT ant.connector	passed
op-mode 2b	Setup_01	WLAN/BT ant.connector	passed
op-mode 2g	Setup_01	WLAN/BT ant.connector	passed
op-mode 2n	Setup_01	WLAN/BT ant.connector	passed
op-mode 3b	Setup_01	WLAN/BT ant.connector	passed
op-mode 3g	Setup_01	WLAN/BT ant.connector	passed
op-mode 3n	Setup_01	WLAN/BT ant.connector	passed
op-mode 4	Setup_03	KLEER temp. ant.connector	passed
op-mode 5	Setup_03	KLEER temp. ant.connector	passed
op-mode 6	Setup_03	KLEER temp. ant.connector	passed

Responsible for
Accreditation Scope:

B. Roth

Responsible
for Test Report:

M. Kullik



7 layers AG, Borsigstr. 11
40658 Ratingen, Germany
Phone +49 (0)2102 749 0



1 Administrative Data

1.1 Testing Laboratory

Company Name: 7 Layers AG
Address Borsigstr. 11
40880 Ratingen
Germany

This facility has been fully described in a report submitted to the FCC and accepted under the registration number 96716 .

The test facility is also accredited by the following accreditation organisation:
Laboratory accreditation no.: DAkkS D-PL-12140-01-01

Responsible for Accreditation Scope: Dipl.-Ing. Bernhard Retka
Dipl.-Ing. Robert Machulec
Dipl.-Ing. Thomas Hoell
Dipl.-Ing. Andreas Petz
Dipl.-Ing. Marco Kullik
Report Template Version: 2012-08-27

1.2 Project Data

Responsible for testing and report: Dipl.-Ing. Marco Kullik
Date of Test(s): 2013-12-25 to 2014-01-15
Date of Report: 2014-01-27

1.3 Applicant Data

Company Name: Mitsubishi Electric Europe B. V.
Address: Mündelheimer Weg 35
40472 Düsseldorf
Germany
Contact Person: Mr. Rolf Borchert

1.4 Manufacturer Data

Company Name: Mitsubishi Electric Corporation (Hyogo)
Address: Sanda Works, 2-3-33, Miwa
Sanda-City, Hyogo 669-1513
Japan
Contact Person: Yuji Funaba

2 Test object Data

2.1 General EUT Description

Equipment under Test:	Main Unit of Car Multimedia System
Type Designation:	NR-218
Kind of Device:	WLAN and KLEER transceivers
(optional)	
Voltage Type:	DC (Car battery)
Voltage Level:	12 V
Tested Modulation Type:	WLAN: DBPSK; OFDM:BPSK; OFDM:64-QAM KLEER: FSK

General product description:

The WLAN (Wireless Local Area Network) Transceiver is operating in the 2.4 GHz ISM band in the range 2412.0 – 2462.0 MHz and uses the Direct Sequence Spread Spectrum (DSSS) Modulation. The KLEER Transceiver is operating in the 2.4 GHz ISM band in the range 2403.0 – 2478.0 MHz and uses DSSS modulation too.

Specific product description for the EUT:

The EUT supports the following modes:

WLAN: IEEE802.11b, IEEE802.11g and IEEE802.11n (up to 72.2 Mbps data rate / MCS7).

The KLEER technology supports 16 channels, each spaced by 5 MHz whilst the nominal bandwidth is designed as 3 MHz.

Besides WLAN and KLEER transceivers, the EUT contains also a BLUETOOTH transceiver and GPS receiver.

The WLAN/BT antenna has a gain of 2.3 dBi (at 2480 MHz).

The integrated KLEER antenna has a gain of -4.3 dBi (at 2442 MHz).

The EUT provides the following ports:

Ports

Cable harness including DC port,
WLAN/BT antenna port,
FM/AM antenna port,
GPS antenna port,
USB port,
Auxiliary audio port,
Display port,
Night view camera port,
TV tuner port,
RVC/UCI port,
Rear seat entertainment port,
Enclosure.

The main components of the EUT are listed and described in Chapter 2.2



2.2 EUT Main components

Type, S/N, Short Descriptions etc. used in this Test Report

Short Description	Equipment under Test	Type Designation	Serial No.	HW Status	SW Status	Date of Receipt
EUT A (Code: 08850a01) Remark:	WLAN and KLEER transceivers	NR-218	ME8240D 9045021	A2189019300 (13/36/00)	A2189021701 (13/40/00)	-
EUT A is equipped with integral KLEER antenna (gain -4.3 dBi) and a permanent WLAN/BT antenna connector.						
EUT B (Code: 08850c01) Remark:	WLAN and KLEER transceivers	NR-218	ME8240D 9045006	A2189019300 (13/36/00)	A2189021701 (13/40/00)	-
EUT B is equipped with temporary KLEER antenna connector and a permanent WLAN/BT antenna connector.						

NOTE: The short description is used to simplify the identification of the EUT in this test report.

2.3 Ancillary Equipment

For the purposes of this test report, ancillary equipment is defined as equipment which is used in conjunction with the EUT to provide operational and control features to the EUT. It is necessary to configure the system in a typical fashion, as a customer would normally use it. But nevertheless Ancillary Equipment can influence the test results.

Short Description	Equipment under Test	Type Designation	HW Status	SW Status	Serial no.	FCC ID
AE1 (Code: No 8-1, wite label)	Bluetooth & WLAN antenna	AG 90	-	-	-	-

2.4 Auxiliary Equipment

For the purposes of this test report, auxiliary equipment is defined as equipment which is used temporarily to enable operational and control features especially used for the tests of the EUT which is not used during normal operation or equipment that is used during the tests in combination with the EUT but is not subject of this test report. It is necessary to configure the system in a typical fashion, as a customer would normally use it. But nevertheless Auxiliary Equipment can influence the test results.

Short Description	Equipment under Test	Type Designation	Serial no.	HW Status	SW Status	FCC ID
AUX1	Display Unit	Display No.02	B345 - 16	-	-	-
AUX2	Turning knob	CCE-No.02	-	A205 905 19 00-	A205 902 11 00	-
AUX3	Cable harness		-	-	-	-

2.5 EUT Setups

This chapter describes the combination of EUTs and equipment used for testing. The rationale for selecting the EUTs, ancillary and auxiliary equipment and interconnecting cables, is to test a representative configuration meeting the requirements of the referenced standards.

Setup No.	Combination of EUTs	Description and Rationale
Setup_01	EUT A + AUX1 + AUX2 + AUX3	setup for WLAN conducted measurements or KLEER radiated measurements
Setup_02	EUT B + AE1 + AUX1 + AUX2 + AUX3	setup for WLAN radiated measurements
Setup_03	EUT B + AUX1 + AUX2 + AUX3	setup for KLEER conducted measurements

2.6 Operating Modes

This chapter describes the operating modes of the EUTs used for testing.

Op. Mode	Description of Operating Modes	Remarks
op-mode 1b	TX-mode, the EUT transmits on the lowest channel (2412 MHz)	Worst case data rate 1 Mbps (channel 1)
op-mode 1g	TX-mode, the EUT transmits on the lowest channel (2412 MHz)	Worst case data rate 6 Mbps (channel 1)
op-mode 1n	TX-mode, the EUT transmits on the lowest channel (2412 MHz)	Worst case data rate 54 Mbps (channel 1)
op-mode 2b	TX-mode, the EUT transmits on the mid channel (2437 MHz)	Worst case data rate 1 Mbps (channel 6)
op-mode 2g	TX-mode, the EUT transmits on the mid channel (2437 MHz)	Worst case data rate 6 Mbps (channel 6)
op-mode 2n	TX-mode, the EUT transmits on the mid channel (2437 MHz)	Worst case data rate 54 Mbps (channel 6)
op-mode 3b	TX-mode, the EUT transmits on the highest channel (2462 MHz)	Worst case data rate 1 Mbps (channel 11)
op-mode 3g	TX-mode, the EUT transmits on the highest channel (2462 MHz)	Worst case data rate 6 Mbps (channel 11)
op-mode 3n	TX-mode, the EUT transmits on the highest channel (2462 MHz)	Worst case data rate 54 Mbps (channel 11)
op-mode 4	TX-mode, the EUT transmits on the lowest channel (2403 MHz)	KLEER transmitter. Operation on lowest frequency (channel 0)
op-mode 5	TX-mode, the EUT transmits on the mid channel (2438 MHz)	KLEER transmitter. Operation on mid frequency (channel 7)
op-mode 6	TX-mode, the EUT transmits on the highest channel (2478 MHz)	KLEER transmitter. Operation on highest frequency (channel 15)

2.6.1 Special software used for testing

None



2.7 Product labelling

Please refer to the documentation of the applicant.

2.7.1 FCC ID label

Please refer to the documentation of the applicant.

2.7.2 Location of the label on the EUT

Please refer to the documentation of the applicant.



3 Test Results

3.1 Occupied bandwidth

Standard FCC Part 15, Subpart C

The test was performed according to: FCC §15.31

3.1.1 Test Description

The Equipment Under Test (EUT) was setup to perform the occupied bandwidth measurements.

The reference level is the level of the highest amplitude signal observed from the transmitter at either the fundamental frequency or first-order modulation products in all typical modes of operation, including the unmodulated carrier, even if atypical.

The results recorded were measured with the modulation which produces the worst-case (widest) occupied bandwidth.

The EUT was connected to spectrum analyzer via a short coax cable with a known loss.

Analyzer settings:

- Resolution Bandwidth (RBW): 100 kHz
- Video Bandwidth (VBW): 300 kHz
- Span: 30 MHz

3.1.2 Test Requirements / Limits

FCC Part 15, Subpart C, §15.247 (a) (2)

Systems using digital modulation techniques may operate in the 902-928 MHz, 2400-2483.5 MHz and 5725-5850 MHz bands. The minimum 6 dB bandwidth shall be at least 500 kHz.

Used conversion factor: Output power (dBm) = 10 log (Output power (W) / 1mW)

3.1.3 Test Protocol

Temperature: 24° C
 Air Pressure: 1020 hPa
 Humidity: 42 %

Op. Mode	Setup	Port
op-mode 1b	Setup_01	WLAN/BT antenna connector

6 dB bandwidth MHz	Remarks
10.164	-

Remark: Please see annex for the measurement plot.

Op. Mode	Setup	Port
op-mode 1g	Setup_01	WLAN/BT antenna connector

6 dB bandwidth MHz	Remarks
16.116	-

Op. Mode	Setup	Port
op-mode 1n	Setup_01	WLAN/BT antenna connector

6 dB bandwidth MHz	Remarks
16.536	-

Op. Mode	Setup	Port
op-mode 2b	Setup_01	WLAN/BT antenna connector

6 dB bandwidth MHz	Remarks
10.164	-

Op. Mode	Setup	Port
op-mode 2g	Setup_01	WLAN/BT antenna connector

6 dB bandwidth MHz	Remarks
15.996	-

Op. Mode	Setup	Port
op-mode 2n	Setup_01	WLAN/BT antenna connector

6 dB bandwidth MHz	Remarks
17.076	-

Op. Mode	Setup	Port
op-mode 3b	Setup_01	WLAN/BT antenna connector

6 dB bandwidth MHz	Remarks
10.164	-



Op. Mode	Setup	Port
op-mode 3g	Setup_01	WLAN/BT antenna connector

6 dB bandwidth MHz	Remarks
15.756	-

Remark: Please see annex for the measurement plot.

Op. Mode	Setup	Port
op-mode 3n	Setup_01	WLAN/BT antenna connector

6 dB bandwidth MHz	Remarks
16.416	-

Remark: Please see annex for the measurement plot.

Op. Mode	Setup	Port
op-mode 4	Setup_03	KLEER temp. antenna connector

6 dB bandwidth MHz	Remarks
1.932	-

Op. Mode	Setup	Port
op-mode 5	Setup_03	KLEER temp. antenna connector

6 dB bandwidth MHz	Remarks
1.872	-

Remark: Please see annex for the measurement plot.

Op. Mode	Setup	Port
op-mode 6	Setup_03	KLEER temp. antenna connector

6 dB bandwidth MHz	Remarks
1.992	-

3.1.4 Test result: Occupied bandwidth

FCC Part 15, Subpart C	Op. Mode	Result
	op-mode 1b	passed
	op-mode 1g	passed
	op-mode 1n	passed
	op-mode 2b	passed
	op-mode 2g	passed
	op-mode 2n	passed
	op-mode 3b	passed
	op-mode 3g	passed
	op-mode 3n	passed
	op-mode 4	passed
	op-mode 5	passed
	op-mode 6	passed



3.2 Peak power output

Standard FCC Part 15, Subpart C

The test was performed according to: FCC §15.31

3.2.1 Test Description

The Equipment Under Test (EUT) was set up to perform the output power measurements. The results recorded were measured with the modulation which produces the worst-case (highest) output power. The reference level of the spectrum analyzer was set higher than the output power of the EUT. The EUT was connected to the spectrum analyzer via a short coax cable with a known loss.

Analyzer settings:

- Detector: RMS

3.2.2 Test Requirements / Limits

FCC Part 15, Subpart C, §15.247 (b) (3)

For systems using digital modulation techniques in the 902-928 MHz, 2400-2483.5 MHz and 5725-5850 MHz bands: 1 watt.

==> Maximum conducted peak output power: 30 dBm (excluding antenna gain, if antennas with directional gains that do not exceed 6 dBi are used).

Used conversion factor: $\text{Limit (dBm)} = 10 \log (\text{Limit (W)}/1\text{mW})$

3.2.3 Test Protocol

Temperature: 23° C
 Air Pressure: 1020 hPa
 Humidity: 42 %

Op. Mode	Setup	Port
op-mode 1b	Setup_01	WLAN/BT antenna connector

Output power dBm	Remarks
22.0	The EIRP including antenna directional gain (2.3 dBi) is 22.0 dBm

Remark: Please see annex for the measurement plot.

Op. Mode	Setup	Port
op-mode 1g	Setup_01	WLAN/BT antenna connector

Output power dBm	Remarks
22.0	The EIRP including antenna directional gain (2.3 dBi) is 22.0 dBm

Op. Mode	Setup	Port
op-mode 1n	Setup_01	WLAN/BT antenna connector

Output power dBm	Remarks
22.0	The EIRP including antenna directional gain (2.3 dBi) is 22.0 dBm

Op. Mode	Setup	Port
op-mode 2b	Setup_01	WLAN/BT antenna connector

Output power dBm	Remarks
22.0	The EIRP including antenna directional gain (2.3 dBi) is 22.0 dBm

Op. Mode	Setup	Port
op-mode 2g	Setup_01	WLAN/BT antenna connector

Output power dBm	Remarks
22.0	The EIRP including antenna directional gain (2.3 dBi) is 22.0 dBm

Remark: Please see annex for the measurement plot.

Op. Mode	Setup	Port
op-mode 2n	Setup_01	WLAN/BT antenna connector

Output power dBm	Remarks
22.0	The EIRP including antenna directional gain (2.3 dBi) is 22.0 dBm



Op. Mode	Setup	Port
op-mode 3b	Setup_01	WLAN/BT antenna connector
Output power dBm	Remarks	
22.0	The EIRP including antenna directional gain (2.3 dBi) is 22.0 dBm	

Op. Mode	Setup	Port
op-mode 3g	Setup_01	WLAN/BT antenna connector
Output power dBm	Remarks	
22.0	The EIRP including antenna directional gain (2.3 dBi) is 22.0 dBm	

Op. Mode	Setup	Port
op-mode 3n	Setup_01	WLAN/BT antenna connector
Output power dBm	Remarks	
22.0	The EIRP including antenna directional gain (2.3 dBi) is 22.0 dBm	

Remark: Please see annex for the measurement plot.

Op. Mode	Setup	Port
op-mode 4	Setup_03	KLEER temp. antenna connector
Output power dBm	Remarks	
-4.2	The EIRP including antenna directional gain (-4.3 dBi) is -4.2 dBm	

Op. Mode	Setup	Port
op-mode 5	Setup_03	KLEER temp. antenna connector
Output power dBm	Remarks	
-4.2	The EIRP including antenna directional gain (-4.3 dBi) is -4.2 dBm	

Remark: Please see annex for the measurement plot.

Op. Mode	Setup	Port
op-mode 6	Setup_03	KLEER temp. antenna connector
Output power dBm	Remarks	
-5.0	The EIRP including antenna directional gain (-4.3 dBi) is -5.0 dBm	

3.2.4 Test result: Peak power output

FCC Part 15, Subpart C	Op. Mode	Result
	op-mode 1b	passed
	op-mode 1g	passed
	op-mode 1n	passed
	op-mode 2b	passed
	op-mode 2g	passed
	op-mode 2n	passed
	op-mode 3b	passed
	op-mode 3g	passed
	op-mode 3n	passed
	op-mode 4	passed
	op-mode 5	passed
	op-mode 6	passed



3.3 Spurious RF conducted emissions

Standard FCC Part 15, Subpart C

The test was performed according to: FCC §15.31

3.3.1 Test Description

The Equipment Under Test (EUT) was set up to perform the spurious emissions measurements.

The EUT was connected to spectrum analyzer via a short coax cable with a known loss. Analyzer settings:

- Detector: Peak-Maxhold
- Frequency range: 30 – 25000 MHz
- Resolution Bandwidth (RBW): 100 kHz
- Video Bandwidth (VBW): 300 kHz
- Sweep Time: 330 s

The reference value for the measurement of the spurious RF conducted emissions is determined during the test "band edge compliance" (cf. chapter 3.5). This value is used to calculate the 20 dBc limit.

3.3.2 Test Requirements / Limits

FCC Part 15, Subpart C, §15.247 (c)

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB.

3.3.3 Test Protocol

Temperature: 24° C
 Air Pressure: 1020 hPa
 Humidity: 42 %

Op. Mode	Setup	Port
op-mode 1b	Setup_01	WLAN/BT antenna connector

Frequency MHz	Corrected measurement value dBm	Reference value dBm	Limit dBm	Margin dB
-	-	-	-	-

Remark: No spurious emissions in the range 20 dB below the limit found. Please see annex for the measurement plot.

Op. Mode	Setup	Port
op-mode 1g	Setup_01	WLAN/BT antenna connector

Frequency MHz	Corrected measurement value dBm	Reference value dBm	Limit dBm	Margin dB
-	-	-	-	-

Remark: No spurious emissions in the range 20 dB below the limit found.

Op. Mode	Setup	Port
op-mode 1n	Setup_01	WLAN/BT antenna connector

Frequency MHz	Corrected measurement value dBm	Reference value dBm	Limit dBm	Margin dB
-	-	-	-	-

Remark: No spurious emissions in the range 20 dB below the limit found.

Op. Mode	Setup	Port
op-mode 2b	Setup_01	WLAN/BT antenna connector

Frequency MHz	Corrected measurement value dBm	Reference value dBm	Limit dBm	Margin dB
-	-	-	-	-

Remark: No spurious emissions in the range 20 dB below the limit found.

Op. Mode	Setup	Port
op-mode 2g	Setup_01	WLAN/BT antenna connector

Frequency MHz	Corrected measurement value dBm	Reference value dBm	Limit dBm	Margin dB
-	-	-	-	-

Remark: No spurious emissions in the range 20 dB below the limit found. Please see annex for the measurement plot.

Op. Mode	Setup	Port
op-mode 2n	Setup_01	WLAN/BT antenna connector

Frequency MHz	Corrected measurement value dBm	Reference value dBm	Limit dBm	Margin dB
-	-	-	-	-

Remark: No spurious emissions in the range 20 dB below the limit found.

Op. Mode	Setup	Port
op-mode 3b	Setup_01	WLAN/BT antenna connector

Frequency MHz	Corrected measurement value dBm	Reference value dBm	Limit dBm	Margin dB
-	-	-	-	-

Remark: No spurious emissions in the range 20 dB below the limit found.

Op. Mode	Setup	Port
op-mode 3g	Setup_01	WLAN/BT antenna connector

Frequency MHz	Corrected measurement value dBm	Reference value dBm	Limit dBm	Margin dB
-	-	-	-	-

Remark: No spurious emissions in the range 20 dB below the limit found.

Op. Mode	Setup	Port
op-mode 3n	Setup_01	WLAN/BT antenna connector

Frequency MHz	Corrected measurement value dBm	Reference value dBm	Limit dBm	Margin dB
-	-	-	-	-

Remark: No spurious emissions in the range 20 dB below the limit found. Please see annex for the measurement plot.

Op. Mode	Setup	Port		
op-mode 4	Setup_03	KLEER temp. antenna connector		
Frequency MHz	Corrected measurement value dBm	Reference value dBm	Limit dBm	Margin dB
-	-	-	-	-

Remark: No spurious emissions in the range 20 dB below the limit found.

Op. Mode	Setup	Port		
op-mode 5	Setup_03	KLEER temp. antenna connector		
Frequency MHz	Corrected measurement value dBm	Reference value dBm	Limit dBm	Margin dB
-	-	-	-	-

Remark: No spurious emissions in the range 20 dB below the limit found. Please see annex for the measurement plot.

Op. Mode	Setup	Port		
op-mode 6	Setup_03	KLEER temp. antenna connector		
Frequency MHz	Corrected measurement value dBm	Reference value dBm	Limit dBm	Margin dB
-	-	-	-	-

Remark: No spurious emissions in the range 20 dB below the limit found.

3.3.4 Test result: Spurious RF conducted emissions

FCC Part 15, Subpart C	Op. Mode	Result
	op-mode 1b	passed
	op-mode 1g	passed
	op-mode 1n	passed
	op-mode 2b	passed
	op-mode 2g	passed
	op-mode 2n	passed
	op-mode 3b	passed
	op-mode 3g	passed
	op-mode 3n	passed
	op-mode 4	passed
	op-mode 5	passed
	op-mode 6	passed

3.4 Spurious radiated emissions

Standard FCC Part 15, Subpart C

The test was performed according to: ANSI C63.4

3.4.1 Test Description

The test set-up was made in accordance to the general provisions of ANSI C63.4 in a typical installation configuration. The Equipment Under Test (EUT) was set up on a non-conductive table 1.0 x 2.0 m² in the semi-anechoic chamber. The influence of the EUT support table that is used between 30–1000 MHz was evaluated.

The measurement procedure is implemented into the EMI test software ES-K1 from R&S. Exploratory tests are performed at 3 orthogonal axes to determine the worst-case orientation of a body-worn or handheld EUT. The final test on all kind of EUTs is performed at 2 axes. A pre-check is also performed while the EUT is powered from both AC and DC (battery) power in order to find the worst-case operating condition.

1. Measurement up to 30 MHz

The Loop antenna HFH2-Z2 is used.

Step 1: pre measurement

- Anechoic chamber
- Antenna distance: 10 m
- Detector: Peak-Maxhold
- Frequency range: 0.009 – 0.15 MHz and 0.15 – 30 MHz
- Frequency step: 0.1 and 5 kHz
- IF Bandwidth: 0.2 and 10 kHz
- Measuring time / Frequency step: 100 ms

Intention of this step is, to determine the radiated EMI-profile of the EUT. Afterwards the relevant emissions for the final measurement are identified.

Step 2: final measurement

For the relevant emissions determined in step 1, an additional measurement with the following settings will be performed. Intention of this step is to find the maximum emission level.

- Open area test side
- Antenna distance: according to the Standard
- Detector: Quasi-Peak
- Frequency range: 0.009 – 30 MHz
- Frequency steps: measurement at frequencies detected in step 1
- IF-Bandwidth: 0.2 – 10 kHz
- Measuring time / Frequency step: 100 ms

2. Measurement above 30 MHz and up to 1 GHz

Step 1: Preliminary scan

Preliminary test to identify the highest amplitudes relative to the limit.

Settings for step 1:

- Antenna distance: 3 m
- Detector: Peak-Maxhold
- Frequency range: 30 – 1000 MHz
- Frequency steps: 60 kHz
- IF-Bandwidth: 120 kHz
- Measuring time / Frequency step: 100 μ s
- Turntable angle range: -180° to 180°
- Turntable step size: 90°
- Height variation range: 1 – 3 m
- Height variation step size: 2 m
- Polarisation: Horizontal + Vertical

Intention of this step is, to determine the radiated EMI-profile of the EUT. Afterwards the relevant emissions for the final measurement are identified.

Step 2: second measurement

For the relevant emissions determined in step 1, an additional measurement with the following settings will be performed. Intention of this step is, to find out the approximate turntable angle and antenna height for each frequency.

- Detector: Peak – Maxhold
- Measured frequencies: in step 1 determined frequencies
- IF – Bandwidth: 120 kHz
- Measuring time: 100 ms
- Turntable angle range: -180° to 180°
- Turntable step size: 45°
- Height variation range: 1 – 4 m
- Height variation step size: 0.5 m
- Polarisation: horizontal + vertical

After this step the EMI test system has determined the following values for each frequency (of step 1):

- Frequency
- Azimuth value (of turntable)
- Antenna height

The last two values have now the following accuracy:

- Azimuth value (of turntable): 45°
- Antenna height: 0.5 m

Step 3: final measurement

In this step the accuracy of the turntable azimuth and antenna height will be improved.

This is necessary to find out the maximum value of every frequency.

For each frequency, which was determined the turntable azimuth and antenna height will be adjusted. The turntable azimuth will be slowly varied by $\pm 22.5^\circ$ around this value. During this action the value of emission is continuously measured. The turntable azimuth at the highest emission will be recorded and adjusted. In this position the antenna height is also slowly varied by ± 25 cm around the antenna height determined. During this action the value of emission is also continuously measured. The antenna height of the highest emission will also be recorded and adjusted.

- Detector: Peak – Maxhold
- Measured frequencies: in step 1 determined frequencies
- IF – Bandwidth: 120 kHz
- Measuring time: 100 ms
- Turntable angle range: -22.5° to $+22.5^\circ$ around the determined value
- Height variation range: -0.25 m to $+0.25$ m around the determined value

Step 4: final measurement with QP detector

With the settings determined in step 3, the final measurement will be performed:



EMI receiver settings for step 4:

- Detector: Quasi-Peak (< 1 GHz)
- Measured frequencies: in step 1 determined frequencies
- IF – Bandwidth: 120 kHz
- Measuring time: 1 s

3. Measurement above 1 GHz

The following modifications apply to the measurement procedure for the frequency range above 1 GHz:

The Equipment Under Test (EUT) was set up on a non-conductive support at 1.4 m height in the fully-anechoic chamber. The measurement distance was reduced to 1 m. The results were extrapolated by the extrapolation factor of 20 dB/decade (inverse linear-distance for field strength measurements, inverse linear-distance squared for the power reference level measurements). Due to the fact that in this frequency range a double ridged wave guided horn antenna (up to 18 GHz) and a horn antenna (18–25 GHz) are used, the steps 2-4 are omitted. Step 1 was performed with one height of the receiving antenna only.

EMI receiver settings:

- Detector: Peak, Average
- IF Bandwidth = 1 MHz

After the measurement a plot will be generated which contains a diagram with the results of the preliminary scan and a chart with the frequencies and values of the results of the final measurement.

For the data rate in mode n the test is performed as worst-case-check in order to verify that emissions have a comparable level as found at modes b and g. Typically, the measurement is performed in the frequency range 1 to 8 GHz but it depends on the emissions found during the test for the modes b and g. Please refer to the results for the used frequency range.

3.4.2 Test Requirements / Limits

FCC Part 15, Subpart C, §15.247 (d)

... In addition, radiated emissions which fall in the restricted bands, as defined in Section 15.205(a), must also comply with the radiated emission limits specified in Section 15.209(a) (see Section 15.205(c)).

FCC Part 15, Subpart C, §15.209, Radiated Emission Limits

Frequency in MHz	Limit (µV/m)	Measurement distance (m)	Calculated Limits (dBµV/m @10m)	Limits (dBµV/m) @10m
0.009 – 0.49	2400/F (kHz)	300 59.1 dB	(48.5 – 13.8) + 30 dB	78.5 – 43.8
0.49 – 1.705	24000/F (kHz)	30 19.1 dB	(48.9 – 23.0) + 10 dB	58.9 – 33.0
1.705 – 30	30	30 19.1 dB	29.5 + 10 dB	39.5

Frequency in MHz	Limits (µV/m)	Measurement distance (m)	Limits (dBµV/m)
30 – 88	100	3	40.0
88 – 216	150	3	43.5
216 – 960	200	3	46.0
above 960	500	3	54.0

§15.35(b) ..., there is also a limit on the radio frequency emissions, as measured using instrumentation with a peak detector function, corresponding to 20 dB above the maximum permitted average limit....

Used conversion factor: Limit (dBµV/m) = 20 log (Limit (µV/m)/1µV/m)

3.4.3 Test Protocol

Temperature: 25 °C
 Air Pressure: 1023 hPa
 Humidity: 49 %

3.4.3.1 Measurement up to 30 MHz

Op. Mode	Setup	Port
op-mode 2b	Setup_02	WLAN/BT antenna radiating

Polarisation	Frequency MHz	Corrected value dBµV/m			Limit dBµV/m			Margin dB	
		QP	PK	AV	QP	PK	AV	QP/PK	AV
-	-	-	-	-	-	-	-	-	-

Remark: No spurious emissions in the range 20 dB below the limit found.

Op. Mode	Setup	Port
op-mode 2g	Setup_02	WLAN/BT antenna radiating

Polarisation	Frequency MHz	Corrected value dBµV/m			Limit dBµV/m			Margin dB	
		QP	PK	AV	QP	PK	AV	QP/PK	AV
-	-	-	-	-	-	-	-	-	-

Remark: No spurious emissions in the range 20 dB below the limit found.

Op. Mode	Setup	Port
op-mode 2n	Setup_02	WLAN/BT antenna radiating

Polarisation	Frequency MHz	Corrected value dBµV/m			Limit dBµV/m			Margin dB	
		QP	PK	AV	QP	PK	AV	QP/PK	AV
-	-	-	-	-	-	-	-	-	-

Remark: No spurious emissions in the range 20 dB below the limit found.

Op. Mode	Setup	Port
op-mode 6	Setup_03	KLEER integral antenna radiating

Polarisation	Frequency MHz	Corrected value dBµV/m			Limit dBµV/m			Margin dB	
		QP	PK	AV	QP	PK	AV	QP/PK	AV
-	-	-	-	-	-	-	-	-	-

Remark: No spurious emissions in the range 20 dB below the limit found.

3.4.3.2 Measurement above 30 MHz

Op. Mode	Setup	Port
op-mode 1b	Setup_02	WLAN/BT antenna radiating

Polarisation	Frequency MHz	Corrected value dBµV/m			Limit dBµV/m			Margin dB	
		QP	PK	AV	QP	PK	AV	QP/PK	AV
Vert. + Hor.	1475	-	46.3	36.9	-	74	54	27.7	17.1
	2792	-	51.1	41.0	-	74	54	22.9	13.1
	4825	-	65.1	49.1	-	74	54	8.9	22.7

Remark: No further spurious emissions in the range 20 dB below the limit found.

Op. Mode	Setup	Port
op-mode 1g	Setup_02	WLAN/BT antenna radiating

Polarisation	Frequency MHz	Corrected value dBµV/m			Limit dBµV/m			Margin dB	
		QP	PK	AV	QP	PK	AV	QP/PK	AV
Vert. + Hor.	1475	-	46.5	37.2	-	74	54	27.5	16.8
	4824	-	63.4	29.9	-	74	54	10.6	24.1

Remark: No further spurious emissions in the range 20 dB below the limit found.

Op. Mode	Setup	Port
op-mode 1n	Setup_02	WLAN/BT antenna radiating

Polarisation	Frequency MHz	Corrected value dBµV/m			Limit dBµV/m			Margin dB	
		QP	PK	AV	QP	PK	AV	QP/PK	AV
Vert. + Hor.	1475	-	46.3	36.9	-	74	54	27.7	17.1
	2792	-	51.1	41.0	-	74	54	22.9	13.1
	4825	-	65.1	31.3	-	74	54	8.9	22.7

Remark: No further spurious emissions in the range 20 dB below the limit found.

Op. Mode	Setup	Port
op-mode 2b	Setup_02	WLAN/BT antenna radiating

Polarisation	Frequency MHz	Corrected value dBµV/m			Limit dBµV/m			Margin dB	
		QP	PK	AV	QP	PK	AV	QP/PK	AV
Vert. + Hor.	1475	-	46.5	38.0	-	74	54	27.5	16.0
	4874	-	67.7	47.4	-	74	54	6.6	6.6
	7313	-	55.4	34.9	-	74	54	18.7	19.1

Remark: No further spurious emissions in the range 20 dB below the limit found.

Op. Mode	Setup	Port
op-mode 2g	Setup_02	WLAN/BT antenna radiating

Polarisation	Frequency MHz	Corrected value dBµV/m			Limit dBµV/m			Margin dB	
		QP	PK	AV	QP	PK	AV	QP/PK	AV
Vert. + Hor.	1475	-	46.2	37.2	-	74	54	27.8	16.8
	2792	-	52.9	41.1	-	74	54	21.1	12.9
	4871	-	61.7	27.7	-	74	54	12.3	26.3

Remark: No further spurious emissions in the range 20 dB below the limit found.

Op. Mode **Setup** **Port**
 op-mode 2n Setup_02 WLAN/BT antenna radiating

Polarisation	Frequency MHz	Corrected value dB μ V/m			Limit dB μ V/m			Margin dB	
		QP	PK	AV	QP	PK	AV	QP/PK	AV
Vert. + Hor.	1475	-	46.1	36.7	-	74.0	54.0	27.9	17.3
	2792	-	50.8	41.2	-	74.0	54.0	23.2	12.8
	4876	-	63.6	29.0	-	74.0	54.0	10.4	25.0

Remark: No further spurious emissions in the range 20 dB below the limit found.

Op. Mode **Setup** **Port**
 op-mode 3b Setup_02 WLAN/BT antenna radiating

Polarisation	Frequency MHz	Corrected value dB μ V/m			Limit dB μ V/m			Margin dB	
		QP	PK	AV	QP	PK	AV	QP/PK	AV
Hor. + Vert.	1475	-	47.1	37.9	-	74.0	54.0	26.9	16.1
	2792	-	51.0	41.5	-	74.0	54.0	23.0	12.5
	4924	-	67.0	46.8	-	74.0	54.0	7.0	7.2
	7387	-	57.0	36.1	-	74.0	54.0	17.0	17.9

Remark: No further spurious emissions in the range 20 dB below the limit found.

Op. Mode **Setup** **Port**
 op-mode 3g Setup_02 WLAN/BT antenna radiating

Polarisation	Frequency MHz	Corrected value dB μ V/m			Limit dB μ V/m			Margin dB	
		QP	PK	AV	QP	PK	AV	QP/PK	AV
Vert. + Hor.	1475	-	45.9	37.1	-	74	54	28.1	16.9
	2792	-	51.5	41.1	-	74	54	22.5	12.9
	4923	-	60.2	28.7	-	74	54	13.8	25.3

Remark: No further spurious emissions in the range 20 dB below the limit found.

Op. Mode **Setup** **Port**
 op-mode 3n Setup_02 WLAN/BT antenna radiating

Polarisation	Frequency MHz	Corrected value dB μ V/m			Limit dB μ V/m			Margin dB	
		QP	PK	AV	QP	PK	AV	QP/PK	AV
Vert. + Hor.	1475	-	46.6	36.6	-	74	54	27.4	17.4
	1475	-	46.6	36.6	-	74	54	27.4	17.4
	2792	-	51.4	41.1	-	74	54	22.6	12.9

Remark: No further spurious emissions in the range 20 dB below the limit found.



Op. Mode **Setup** **Port**
 op-mode 4 Setup_03 KLEER integrated antenna radiating

Polarisation	Frequency MHz	Corrected value dB μ V/m			Limit dB μ V/m			Margin dB	
		QP	PK	AV	QP	PK	AV	QP/PK	AV
Vert. + Hor.	1106	-	45.4	35.3	-	74	54	28.6	18.7
	1475	-	46.7	38.0	-	74	54	27.3	16.0
	2792	-	51.7	44.1	-	74	54	22.3	10.0
	4805	-	46.2	38.2	-	74	54	27.8	15.8

Remark: No further spurious emissions in the range 20 dB below the limit found.

Op. Mode **Setup** **Port**
 op-mode 5 Setup_03 KLEER integrated antenna radiating

Polarisation	Frequency MHz	Corrected value dB μ V/m			Limit dB μ V/m			Margin dB	
		QP	PK	AV	QP	PK	AV	QP/PK	AV
Vert. + Hor.	1106	-	45.1	35.2	-	74	54	28.9	18.8
	1475	-	46.8	38.0	-	74	54	27.2	16.0
	2792	-	52.1	44.5	-	74	54	21.9	9.5
	4875	-	49.9	42.7	-	74	54	24.1	11.3
	7313	-	48.8	38.8	-	74	54	25.2	15.9

Remark: No further spurious emissions in the range 20 dB below the limit found.

Op. Mode **Setup** **Port**
 op-mode 6 Setup_03 KLEER integrated antenna radiating

Polarisation	Frequency MHz	Corrected value dB μ V/m			Limit dB μ V/m			Margin dB	
		QP	PK	AV	QP	PK	AV	QP/PK	AV
Vert. + Hor.	1106	-	45.8	35.2	-	74	54	28.2	18.8
	1475	-	46.2	38.0	-	74	54	27.8	16.0
	2792	-	53.3	44.3	-	74	54	20.7	9.7
	4955	-	48.2	41.1	-	74	54	25.8	12.9
	7436	-	47.3	37.3	-	74	54	26.7	16.7

Remark: No further spurious emissions in the range 20 dB below the limit found.

3.4.4 Test result: Spurious radiated emissions

FCC Part 15, Subpart C	Op. Mode	Result
	op-mode 1b	passed
	op-mode 1g	passed
	op-mode 1n	passed
	op-mode 2b	passed
	op-mode 2g	passed
	op-mode 2n	passed
	op-mode 3b	passed
	op-mode 3g	passed
	op-mode 3n	passed
	op-mode 4	passed
	op-mode 5	passed
	op-mode 6	passed

3.5 Band edge compliance

Standard FCC Part 15, Subpart C

The test was performed according to: ANSI C63.4-2009, FCC §15.31

3.5.1 Test Description

The procedure to show compliance with the band edge requirement is divided into two measurements:

1. Show compliance of the lower and higher band edge by a conducted measurement. For the conducted measurement, the Equipment Under Test (EUT) is placed in a shielded room. The EUT is set to transmit on the lowest channel (respectively ch1 - 2412 MHz for WLAN and ch 0 - 2403 MHz for KLEER). The lower band edge is 2400 MHz. Then the EUT is set to transmit on the highest channel (respectively ch 11 - 2462 MHz for WLAN and ch 15 - 2478 MHz for KLEER). The higher band edge is 2483.5 MHz.

Analyzer settings for conducted measurement:

- Detector: Peak
- RBW / VBW = 100 / 300 kHz

2. Show compliance of the higher band edge falls in to restricted bands by a radiated measurement.

The radiated emissions measurements are performed in a typical installation configuration inside the fully anechoic chamber using a horn antenna at 1 m distance.

EMI receiver settings for radiated measurement:

- Detector: Peak, Average
- IF Bandwidth = 1 MHz

3.5.2 Test Requirements / Limits

FCC Part 15.247 (d)

"In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. ...

If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in Section 15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in Section 15.205(a), must also comply with the radiated emission limits specified in Section 15.209(a) (see Section 15.205(c))."

For the conducted measurement the RF power at the band edge shall be "at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power..."

For the radiated measurement of the higher band edge connected to a restricted band the limit is "specified in Section 15.209(a)".

3.5.3 Test Protocol

3.5.3.1 Lower band edge

Conducted measurement

Temperature: 24° C
 Air Pressure: 1020 hPa
 Humidity: 43 %

Op. Mode	Setup	Port
op-mode 1b	Setup_01	WLAN/BT antenna connector

Frequency MHz	Measured value dBm	Reference value dBm	Limit dBm	Margin dB
2400.00	-38.4	5	-15	23.4

Op. Mode	Setup	Port
op-mode 1g	Setup_01	WLAN/BT antenna connector

Frequency MHz	Measured value dBm	Reference value dBm	Limit dBm	Margin dB
2400.00	-34.3	2.7	-17.3	17.0

Remark: Please see annex for the measurement plot.

Op. Mode	Setup	Port
op-mode 1n	Setup_01	WLAN/BT antenna connector

Frequency MHz	Measured value dBm	Reference value dBm	Limit dBm	Margin dB
2400.00	-41.9	0.6	-19.4	22.5

Op. Mode	Setup	Port
op-mode 4	Setup_03	KLEER temp. antenna connector

Frequency MHz	Measured value dBm	Reference value dBm	Limit dBm	Margin dB
2400.00	-39.4	-5.9	-25.9	13.5

Remark: Please see annex for the measurement plot.

Higher band edge

Conducted measurement

Temperature: 23 °C
 Air Pressure: 1020 hPa
 Humidity: 42 %

Op. Mode	Setup	Port		
op-mode 3b	Setup_01	WLAN/BT antenna connector		
Frequency MHz	Measured value dBm	Reference value dBm	Limit dBm	Margin dB
2483.50	-42.2	-14.2	-34.2	23.7

Op. Mode	Setup	Port		
op-mode 3g	Setup_01	WLAN/BT antenna connector		
Frequency MHz	Measured value dBm	Reference value dBm	Limit dBm	Margin dB
2483.50	-41.7	-17.3	-37.3	21.5

Remark: Please see annex for the measurement plot.

Op. Mode	Setup	Port		
op-mode 3n	Setup_01	WLAN/BT antenna connector		
Frequency MHz	Measured value dBm	Reference value dBm	Limit dBm	Margin dB
2483.50	-49.1	-19.2	-39.2	22.5

Op. Mode	Setup	Port		
op-mode 6	Setup_03	KLEER temp. antenna connector		
Frequency MHz	Measured value dBm	Reference value dBm	Limit dBm	Margin dB
2483.50	-51.4	-7.2	-27.2	24.2

Remark: Please see annex for the measurement plot.

Radiated measurement

Temperature: 24 °C
 Air Pressure: 1023 hPa
 Humidity: 47 %

Op. Mode	Setup	Port
op-mode 3b	Setup_02	WLAN/BT antenna radiating

Frequency MHz	Polarisation	Corrected value dBµV/m		Limit dBµV/m		Margin dB	
		PK	AV	PK	AV	PK	AV
2483.50	Hor. + Vert.	49.5	37.3	74.0	54.0	24.5	16.7

Op. Mode	Setup	Port
op-mode 3g	Setup_02	WLAN/BT antenna radiating

Frequency MHz	Polarisation	Corrected value dBµV/m		Limit dBµV/m		Margin dB	
		PK	AV	PK	AV	PK	AV
2483.50	Hor. + Vert.	49.5	37.2	74.0	54.0	24.5	16.8

Op. Mode	Setup	Port
op-mode 3n	Setup_02	WLAN/BT antenna radiating

Frequency MHz	Polarisation	Corrected value dBµV/m		Limit dBµV/m		Margin dB	
		PK	AV	PK	AV	PK	AV
2483.50	Hor. + Vert.	49.4	37.3	74.0	54.0	24.6	16.7

Remark: Please see annex for the measurement plot.

Op. Mode	Setup	Port
op-mode 6	Setup_01	KLEER integrated antenna radiating

Frequency MHz	Polarisation	Corrected value dBµV/m		Limit dBµV/m		Margin dB	
		PK	AV	PK	AV	PK	AV
2483.50	Hor. + Vert.	51.7	40	74.0	54.0	22.3	14

Remark: Please see annex for the measurement plot.

3.5.4 Test result: Band edge compliance

FCC Part 15, Subpart C	Op. Mode	Result
	op-mode 1b	passed
	op-mode 1g	passed
	op-mode 1n	passed
	op-mode 3 b	passed
	op-mode 3 g	passed
	op-mode 3 n	passed
	op-mode 4	passed
	op-mode 6	passed



3.6 Power density

Standard FCC Part 15, 10-1-11 Subpart C

The test was performed according to: FCC §15.31

3.6.1 Test Description

The EUT was connected to spectrum analyzer via a short coax cable with a known loss.
Analyzer settings:

- Detector: Peak-Maxhold
- Resolution Bandwidth (RBW): 3 kHz
- Video Bandwidth (VBW): 30 kHz
- Sweep Time: Coupled

3.6.2 Test Requirements / Limits

FCC Part 15, Subpart C, §15.247 (e)

For digitally modulated systems, the peak power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission.

...

The same method of determining the conducted output power shall be used to determine the power spectral density.

3.6.3 Test Protocol

Temperature: 23 °C
 Air Pressure: 1020 hPa
 Humidity: 42 %

Op. Mode	Setup	Port
op-mode 1b	Setup_01	WLAN/BT antenna conector

Power density dBm/3 kHz	Remarks
-3.8	-

Remark: Please see annex for the measurement plot.

Op. Mode	Setup	Port
op-mode 1g	Setup_01	WLAN/BT antenna conector

Power density dBm/3 kHz	Remarks
-12.7	-

Op. Mode	Setup	Port
op-mode 1n	Setup_01	WLAN/BT antenna conector

Power density dBm/3 kHz	Remarks
-15.0	-

Op. Mode	Setup	Port
op-mode 2b	Setup_01	WLAN/BT antenna conector

Power density dBm/3 kHz	Remarks
-5.9	-

Op. Mode	Setup	Port
op-mode 2g	Setup_01	WLAN/BT antenna conector

Power density dBm/3 kHz	Remarks
-12.9	-

Remark: Please see annex for the measurement plot.

Op. Mode	Setup	Port
op-mode 2n	Setup_01	WLAN/BT antenna conector

Power density dBm/3 kHz	Remarks
-15.4	-

Op. Mode	Setup	Port
op-mode 3b	Setup_01	WLAN/BT antenna conector

Power density dBm/3 kHz	Remarks
-3.8	-

Op. Mode	Setup	Port
op-mode 3g	Setup_01	WLAN/BT antenna conector

Power density dBm/3 kHz	Remarks
-11.9	-

Op. Mode	Setup	Port
op-mode 3n	Setup_01	WLAN/BT antenna conector

Power density dBm/3 kHz	Remarks
-15.1	-

Remark: Please see annex for the measurement plot.

Op. Mode	Setup	Port
op-mode 4	Setup_03	KLEER temp. antenna conector

Power density dBm/3 kHz	Remarks
-19.6	-

Op. Mode	Setup	Port
op-mode 5	Setup_03	KLEER temp. antenna conector

Power density dBm/3 kHz	Remarks
-19.6	-

Remark: Please see annex for the measurement plot.



Op. Mode	Setup	Port
op-mode 6	Setup_03	KLEER temp. antenna conector

Power density dBm/3 kHz	Remarks
-20.9	-

3.6.4 Test result: Power density

FCC Part 15, Subpart C	Op. Mode	Result
	op-mode 1b	passed
	op-mode 1g	passed
	op-mode 1n	passed
	op-mode 2b	passed
	op-mode 2g	passed
	op-mode 2n	passed
	op-mode 3b	passed
	op-mode 3g	passed
	op-mode 3n	passed
	op-mode 4	passed
	op-mode 5	passed
	op-mode 6	passed



4 Test Equipment

The calibration, hardware and software states are shown for the testing period.

Test Equipment Anechoic Chamber

Lab ID:	Lab 1		
<i>Manufacturer:</i>	Frankonia		
<i>Description:</i>	Anechoic Chamber for radiated testing		
<i>Type:</i>	10.58x6.38x6.00 m ³		
	<i>Calibration Details</i>		<i>Last Execution</i> <i>Next Exec.</i>
	NSA (FCC, IC)	2011/01/10	2014/01/10

Single Devices for Anechoic Chamber

<i>Single Device Name</i>	<i>Type</i>	<i>Serial Number</i>	<i>Manufacturer</i>
Air compressor	none	-	Atlas Copco
Anechoic Chamber	10.58 x 6.38 x 6.00 m ³	none	Frankonia
	<i>Calibration Details</i>		<i>Last Execution</i> <i>Next Exec.</i>
	FCC listing 96716 3m Part15/18		2011/01/11 2014/01/10
	IC listing 3699A-1 3m		2011/02/07 2014/02/06
Controller Maturo	MCU	961208	Maturo GmbH
EMC camera	CE-CAM/1	-	CE-SYS
EMC camera Nr.2	CCD-400E	0005033	Mitsubishi
Filter ISDN	B84312-C110-E1		Siemens&Matsushita
Filter Universal 1A	BB4312-C30-H3	-	Siemens&Matsushita



Test Equipment Auxiliary Equipment for Radiated emissions

Lab ID: Lab 1
Description: Equipment for emission measurements
Serial Number: see single devices

Single Devices for Auxiliary Equipment for Radiated emissions

Single Device Name	Type	Serial Number	Manufacturer		
Antenna mast	AM 4.0	AM4.0/180/119205	Maturo GmbH		
Antenna mast	AS 620 P	620/37	HD GmbH		
Biconical Broadband Antenna	SBA 9119	9119-005	Schwarzbeck		
	<i>Calibration Details</i>			<i>Last Execution</i>	<i>Next Exec.</i>
	Standard Calibration			2009/06/04	2014/06/03
Biconical dipole	VUBA 9117	9117-108	Schwarzbeck		
	<i>Calibration Details</i>			<i>Last Execution</i>	<i>Next Exec.</i>
	Standard Calibration			2008/10/27	2013/10/26
	Standard Calibration			2012/01/18	2015/01/17
Broadband Amplifier 18MHz-26GHz	JS4-18002600-32-5P	849785	Miteq		
Broadband Amplifier 1GHz-4GHz	AFS4-01000400-1Q-10P-4	-	Miteq		
Broadband Amplifier 30MHz-18GHz	JS4-00101800-35-5P	896037	Miteq		
Cable "ESI to EMI Antenna"	EcoFlex10	W18.01-2+W38.01-2	Kabel Kusch		
Cable "ESI to Horn Antenna"	UFB311A+UFB293C	W18.02-2+W38.02-2	Rosenberger Micro-Coax		
Double-ridged horn	HF 906	357357/001	Rohde & Schwarz GmbH & Co. KG		
	<i>Calibration Details</i>			<i>Last Execution</i>	<i>Next Exec.</i>
	Standard Calibration			2012/05/18	2015/05/17
Double-ridged horn	HF 906	357357/002	Rohde & Schwarz GmbH & Co. KG		
	<i>Calibration Details</i>			<i>Last Execution</i>	<i>Next Exec.</i>
	Standard Calibration			2012/06/26	2015/06/25
High Pass Filter	4HC1600/12750-1.5-KK	9942011	Trilithic		
High Pass Filter	5HC2700/12750-1.5-KK	9942012	Trilithic		
High Pass Filter	5HC3500/12750-1.2-KK	200035008	Trilithic		
High Pass Filter	WHKX 7.0/18G-8SS	09	Wainwright		
Horn Antenna Schwarzbeck 15-26 GHz BBHA 9170	BBHA 9170				
Log.-per. Antenna	HL 562 Ultralog	100609	Rohde & Schwarz GmbH & Co. KG		
	<i>Calibration Details</i>			<i>Last Execution</i>	<i>Next Exec.</i>
	Standard Calibration			2012/12/18	2015/12/17
Log.-per. Antenna	HL 562 Ultralog	830547/003	Rohde & Schwarz GmbH & Co. KG		
Loop Antenna	HFH2-Z2	829324/006	Rohde & Schwarz GmbH & Co. KG		
	<i>Calibration Details</i>			<i>Last Execution</i>	<i>Next Exec.</i>
	Standard calibration			2011/10/27	2014/10/26

Single Devices for Auxiliary Equipment for Radiated emissions (continued)

Single Device Name	Type	Serial Number	Manufacturer
Pyramidal Horn Antenna 26,5 GHz	3160-09	00083069	EMCO Elektronik GmbH
Pyramidal Horn Antenna 40 GHz	3160-10	00086675	EMCO Elektronik GmbH
Tilt device Maturo (Rohacell)	Antrieb TD1.5-10kg	TD1.5- 10kg/024/3790709	Maturo GmbH

Test Equipment Auxiliary Test Equipment

Lab ID:	Lab 1, Lab 2
Manufacturer:	see single devices
Description:	Single Devices for various Test Equipment
Type:	various
Serial Number:	none

Single Devices for Auxiliary Test Equipment

Single Device Name	Type	Serial Number	Manufacturer
AC Power Source	Chroma 6404	64040001304	Chroma ATE INC.
Broadband Power Divider N (Aux)	1506A / 93459	LM390	Weinschel Associates
Broadband Power Divider SMA	WA1515	A855	Weinschel Associates
Digital Multimeter 03 (Multimeter)	Fluke 177	86670383	Fluke Europe B.V.
	<i>Calibration Details</i>		<i>Last Execution</i> <i>Next Exec.</i>
	Customized calibration		2011/10/19 2013/10/18
Fibre optic link Satellite (Aux)	FO RS232 Link	181-018	Pontis
Fibre optic link Transceiver (Aux)	FO RS232 Link	182-018	Pontis
Isolating Transformer	LTS 604	1888	Thalheimer Transformatorenwerke GmbH
Notch Filter Ultra Stable (Aux)	WRCA800/960-6EEK	24	Wainwright
Spectrum Analyser	FSP3	836722/011	Rohde & Schwarz GmbH & Co. KG
	<i>Calibration Details</i>		<i>Last Execution</i> <i>Next Exec.</i>
	Standard		2012/06/13 2015/06/12
Vector Signal Generator	SMIQ 03B	832492/061	Rohde & Schwarz GmbH & Co.KG



Test Equipment Digital Signalling Devices

Lab ID: Lab 1, Lab 2
Description: Signalling equipment for various wireless technologies.

Single Devices for Digital Signalling Devices

Single Device Name	Type	Serial Number	Manufacturer
Bluetooth Signalling Unit CBT		100589	Rohde & Schwarz GmbH & Co. KG
	<i>Calibration Details</i>		<i>Last Execution</i> <i>Next Exec.</i>
	Standard calibration		2011/11/24 2014/11/23
CMW500		107500	Rohde & Schwarz GmbH & Co. KG
	<i>Calibration Details</i>		<i>Last Execution</i> <i>Next Exec.</i>
	Initial factory calibration		2012/01/26 2014/01/25
Digital Radio Communication Tester		831050/020	Rohde & Schwarz GmbH & Co. KG
	<i>Calibration Details</i>		<i>Last Execution</i> <i>Next Exec.</i>
	Standard calibration		2011/11/28 2014/11/27
Universal Radio Communication Tester		102366	Rohde & Schwarz GmbH & Co. KG
	<i>HW/SW Status</i>		<i>Date of Start</i> <i>Date of End</i>
	Hardware: B11, B21V14, B21-2, B41, B52V14, B52-2, B53-2, B56V14, B68 3v04, PCMCIA, U65V04 Software: K21 4v21, K22 4v21, K23 4v21, K24 4v21, K42 4v21, K43 4v21, K53 4v21, K56 4v22, K57 4v22, K58 4v22, K59 4v22, K61 4v22, K62 4v22, K63 4v22, K64 4v22, K65 4v22, K66 4v22, K67 4v22, K68 4v22, K69 4v22 Firmware: µP1 8v50 02.05.06 ---		2007/07/16
Universal Radio Communication Tester		837983/052	Rohde & Schwarz GmbH & Co. KG
	<i>Calibration Details</i>		<i>Last Execution</i> <i>Next Exec.</i>
	Standard calibration		2011/12/07 2014/12/06
	<i>HW/SW Status</i>		<i>Date of Start</i> <i>Date of End</i>
	HW options: B11, B21V14, B21-2, B41, B52V14, B52-2, B53-2, B54V14, B56V14, B68 3v04, B95, PCMCIA, U65V02 SW options: K21 4v11, K22 4v11, K23 4v11, K24 4v11, K27 4v10, K28 4v10, K42 4v11, K43 4v11, K53 4v10, K65 4v10, K66 4v10, K68 4v10, Firmware: µP1 8v40 01.12.05 ---		2007/01/02
	SW: K62, K69		2008/11/03
Vector Signal Generator	SMU200A	100912	Rohde & Schwarz GmbH & Co. KG



Test Equipment Emission measurement devices

Lab ID: Lab 1
Description: Equipment for emission measurements
Serial Number: see single devices

Single Devices for Emission measurement devices

<i>Single Device Name</i>	<i>Type</i>	<i>Serial Number</i>	<i>Manufacturer</i>	
Personal Computer	Dell	30304832059	Dell	
Power Meter	NRVD	828110/016	Rohde & Schwarz GmbH & Co.KG	
	<i>Calibration Details</i>		<i>Last Execution</i>	<i>Next Exec.</i>
	Standard calibration		2013/05/03	2014/05/02
Sensor Head A	NRV-Z1	827753/005	Rohde & Schwarz GmbH & Co.KG	
	<i>Calibration Details</i>		<i>Last Execution</i>	<i>Next Exec.</i>
	Standard calibration		2013/04/30	2014/04/29
Signal Generator	SMR 20	846834/008	Rohde & Schwarz GmbH & Co. KG	
	<i>Calibration Details</i>		<i>Last Execution</i>	<i>Next Exec.</i>
	standard calibration		2011/05/12	2014/05/11
Spectrum Analyzer	ESIB 26	830482/004	Rohde & Schwarz GmbH & Co. KG	
	<i>Calibration Details</i>		<i>Last Execution</i>	<i>Next Exec.</i>
	Standard Calibration		2011/12/05	2013/12/04
	<i>HW/SW Status</i>		<i>Date of Start</i>	<i>Date of End</i>
	Firmware-Update 4.34.4 from 3.45 during calibration		2009/12/03	



Test Equipment Radio Lab Test Equipment

Lab ID: Lab 2
Description: Radio Lab Test Equipment


Single Devices for Radio Lab Test Equipment

Single Device Name	Type	Serial Number	Manufacturer
Broadband Power Divider SMA	WA1515	A856	Weinschel Associates
Coax Attenuator 10dB SMA 2W	4T-10	F9401	Weinschel Associates
Coax Attenuator 10dB SMA 2W	56-10	W3702	Weinschel Associates
Coax Attenuator 10dB SMA 2W	56-10	W3711	Weinschel Associates
Coax Cable Huber&Suhner	Sucotest 2,0m		Huber&Suhner
Coax Cable Rosenberger Micro Coax FA210A0010003030 SMA/SMA 1,0m	FA210A0010003030	54491-2	Rosenberger Micro-Coax
Power Meter	NRVD	828110/016	Rohde & Schwarz GmbH & Co.KG
	<i>Calibration Details</i>		<i>Last Execution</i> <i>Next Exec.</i>
	Standard calibration		2013/05/03 2014/05/02
RF Step Attenuator RSP	RSP	833695/001	Rohde & Schwarz GmbH & Co.KG
Rubidium Frequency Standard	Datum, Model: MFS	5489/001	Datum-Beverly
	<i>Calibration Details</i>		<i>Last Execution</i> <i>Next Exec.</i>
	Standard calibration		2012/06/21 2013/06/23
	Standard calibration		2013/06/24 2014/06/23
Sensor Head A	NRV-Z1	827753/005	Rohde & Schwarz GmbH & Co.KG
	<i>Calibration Details</i>		<i>Last Execution</i> <i>Next Exec.</i>
	Standard calibration		2013/04/30 2014/04/29
Signal Generator SME	SME03	827460/016	Rohde & Schwarz GmbH & Co.KG
	<i>Calibration Details</i>		<i>Last Execution</i> <i>Next Exec.</i>
	Standard calibration		2011/11/25 2014/11/24
Signal Generator SMP	SMP02	836402/008	Rohde & Schwarz GmbH & Co. KG
	<i>Calibration Details</i>		<i>Last Execution</i> <i>Next Exec.</i>
	Standard calibration		2013/05/06 2016/05/05
Spectrum Analyser	FSIQ26	840061/005	Rohde & Schwarz GmbH & Co. KG
	<i>Calibration Details</i>		<i>Last Execution</i> <i>Next Exec.</i>
	Standard Calibration		2013/02/12 2015/02/11
Temperature Chamber Vötsch 03	VT 4002	58566002150010	Vötsch
	<i>Calibration Details</i>		<i>Last Execution</i> <i>Next Exec.</i>
	Customized calibration		2012/03/12 2014/03/11

5 Photo Report

Photos are included in an external report.

6 Setup Drawings

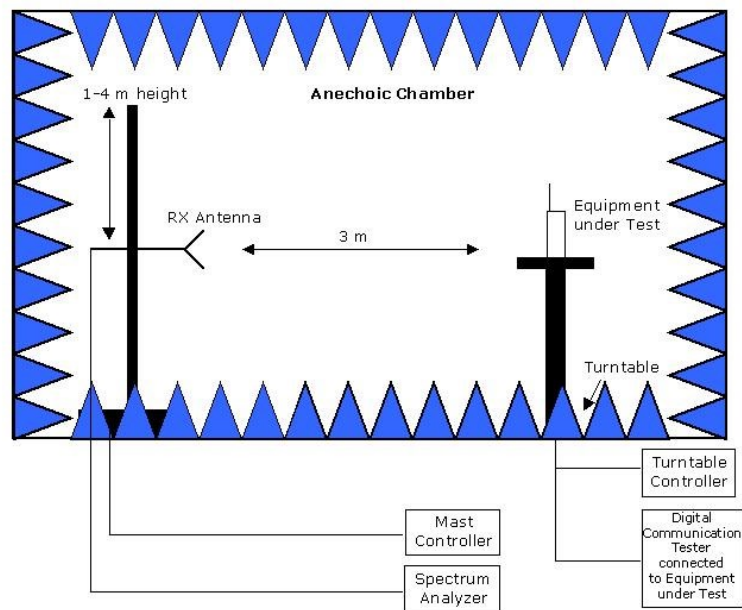

Remark: Depending on the frequency range suitable antenna types, attenuators or preamplifiers are used.

Drawing 1: Setup in the Anechoic chamber:
Measurements below 1 GHz: Semi-anechoic, conducting ground plane.
Measurements above 1 GHz: Fully-anechoic, absorbers on all surfaces.

7 FCC and IC Correlation of measurement requirements

The following tables show the correlation of measurement requirements for DTS (e.g. WLAN) equipment and Information Technology Equipment (ITE) from FCC and IC standards.

DTS equipment

Measurement	FCC reference	IC reference
Conducted emissions on AC Mains	§ 15.207	RSS-Gen Issue 3: 7.2.4
Occupied bandwidth	§ 15.247 (a) (2)	RSS-210 Issue 8: A8.2 (a)
Peak power output	§ 15.247 (b) (3), (4)	RSS-210 Issue 8: A8.4 (4)
Spurious RF conducted emissions	§ 15.247 (d)	RSS-Gen Issue 3: 6; RSS-210 Issue 8: A8.5
Spurious radiated emissions	§ 15.247 (d); § 15.209 (a)	RSS-Gen Issue 3: 6; RSS-210 Issue 8: A8.5
Band edge compliance	§ 15.247 (d)	RSS-210 Issue 8: A8.5
Power density	§ 15.247 (e)	RSS-210 Issue 8: A8.2 (b)
Antenna requirement	§ 15.203 / 15.204	RSS-Gen Issue 3: 7.1.2
Receiver spurious emissions	-	RSS-210 Issue 8: 2.3 RSS Gen Issue 3: 6 *)

*) Receivers which are part of Transceivers are exempted with respect to Notice 2012-DRS0126.

Information Technology Equipment (ITE)

Measurement	FCC reference	IC reference
Conducted emissions on AC Mains	§ 15.107	ICES-003 Issue 5: 6.1
Spurious Radiated Emissions	§ 15.109	ICES-003 Issue 5: 6.2


8 Annex measurement plots

8.1 Occupied bandwidth

Op. Mode

WLAN

op-mode 1b

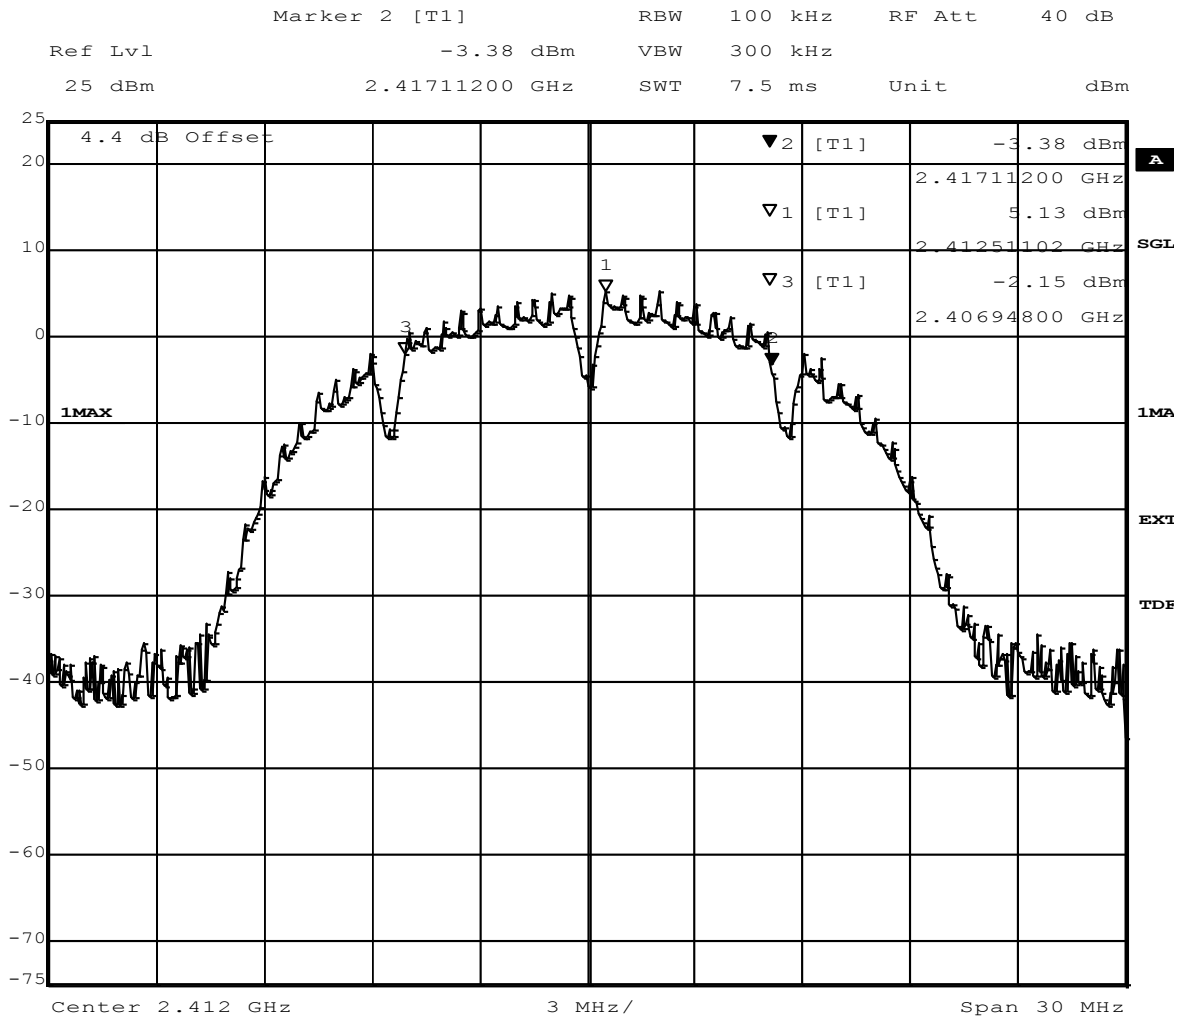

Title: 6dB Bandwidth

Comment A: CH B: 2412 MHz; 6dB bandwidth (kHz):10164

Date: 6.JAN.2014 10:44:03




Op. Mode

WLAN

op-mode 3g

Ref Lvl	Marker 2 [T1]	RBW	100 kHz	RF Att	20 dB
5 dBm	-4.74 dBm	VBW	300 kHz		
	2.46999800 GHz	SWT	7.5 ms	Unit	dBm

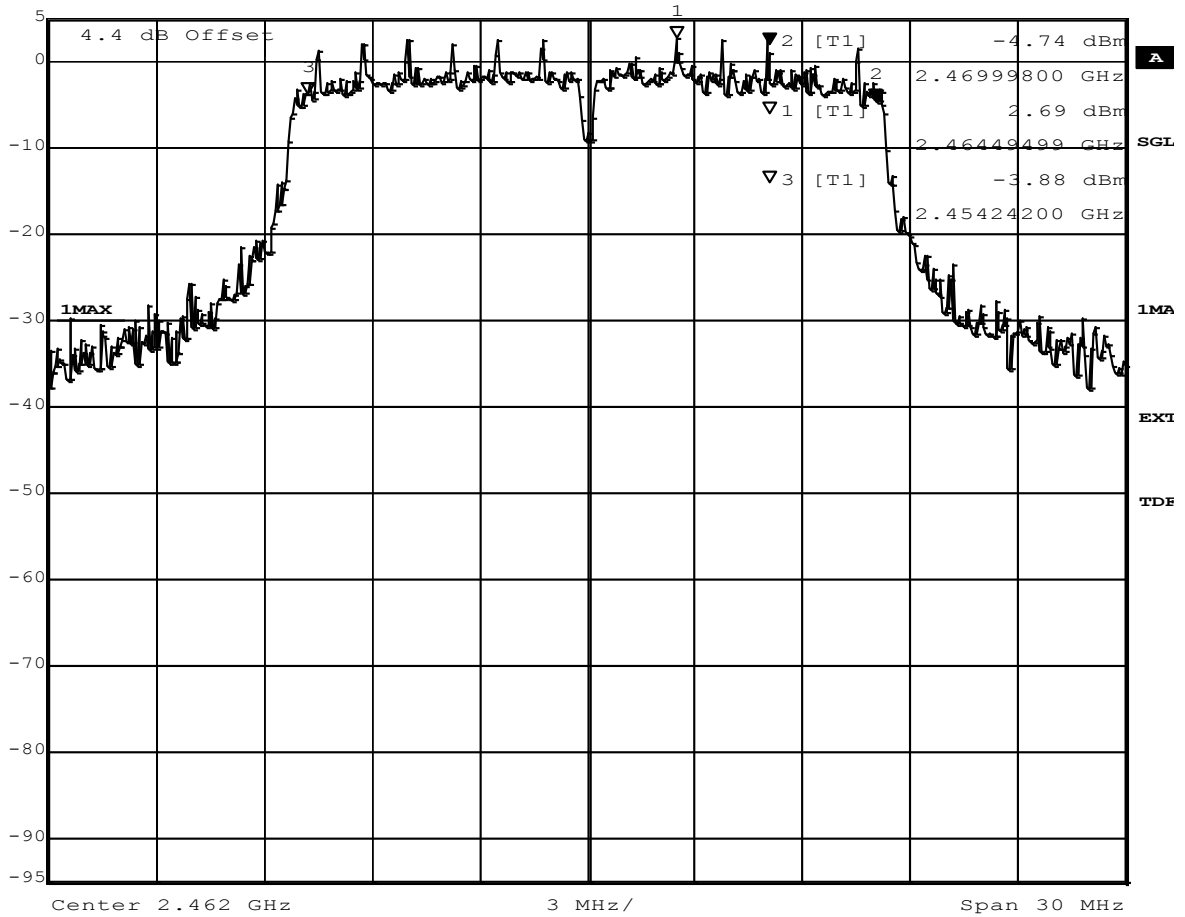

Title: 6dB Bandwidth
 Comment A: CH T: 2462 MHz; 6dB bandwidth (kHz):15756
 Date: 6.JAN.2014 13:56:56




Op. Mode

WLAN

op-mode 3n

Ref Lvl	Marker 2 [T1]	RBW	100 kHz	RF Att	20 dB
5 dBm	-5.11 dBm	VBW	300 kHz		
	2.47023800 GHz	SWT	7.5 ms	Unit	dBm

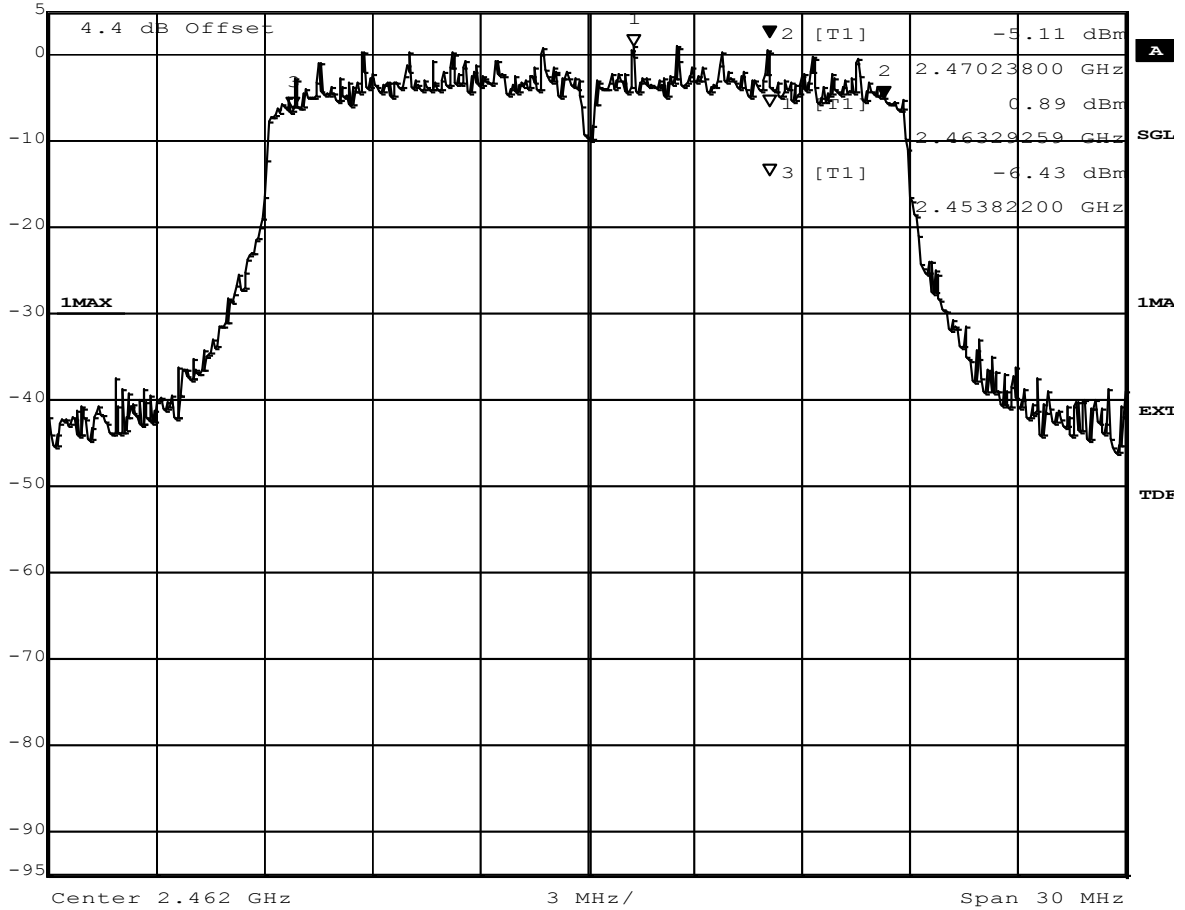


Title: 6dB Bandwidth
 Comment A: CH T: 2462 MHz; 6dB bandwidth (kHz):16416
 Date: 6.JAN.2014 15:32:38



Op. Mode
op-mode 5

KLEER

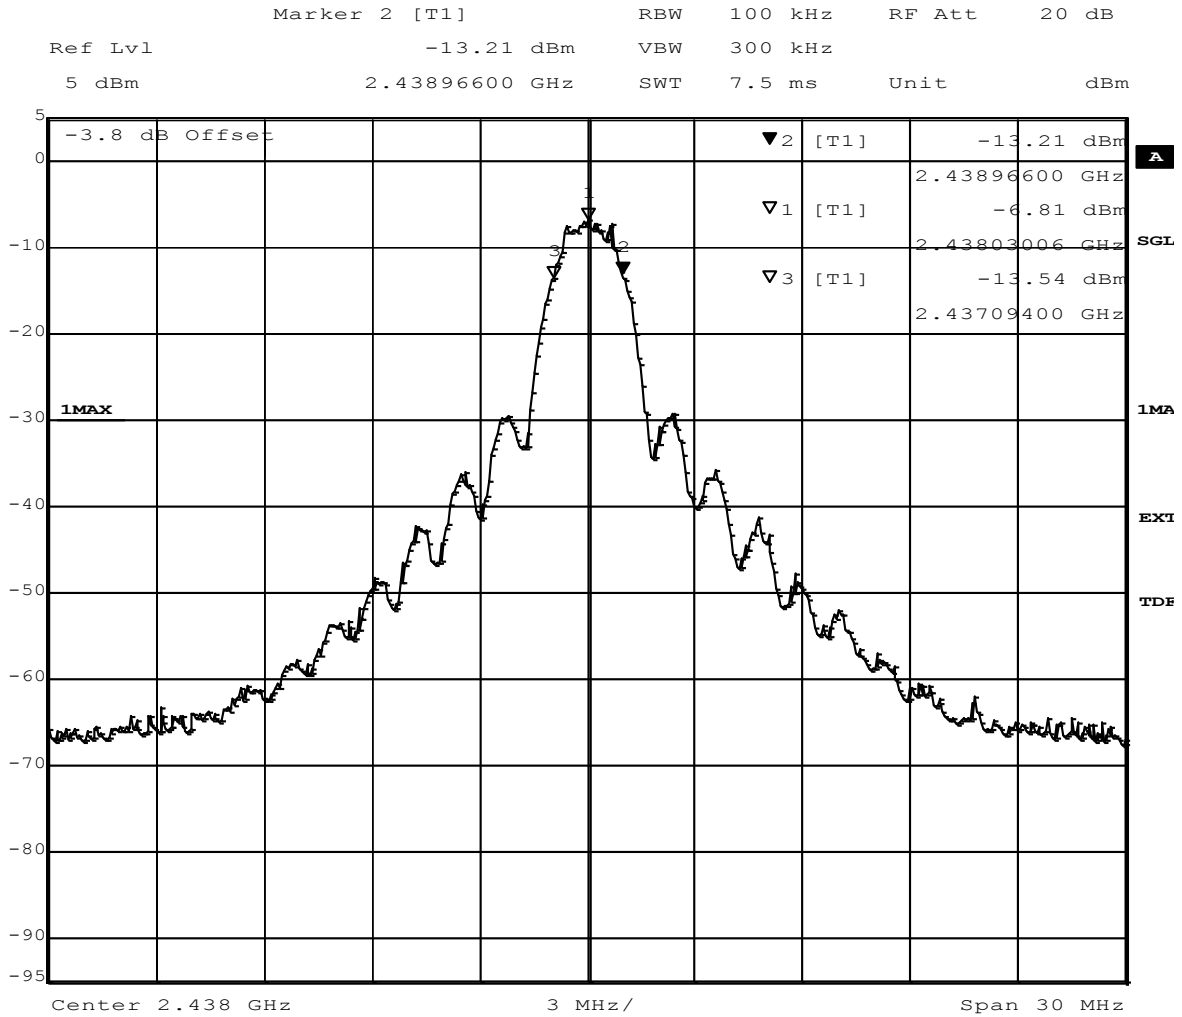


Title: 6dB Bandwidth
 Comment A: CH M: 2438 MHz; 6dB bandwidth (kHz):1872
 Date: 3.JAN.2014 12:53:07

8.2 Peak power output

Op. Mode

WLAN

op-mode 1b

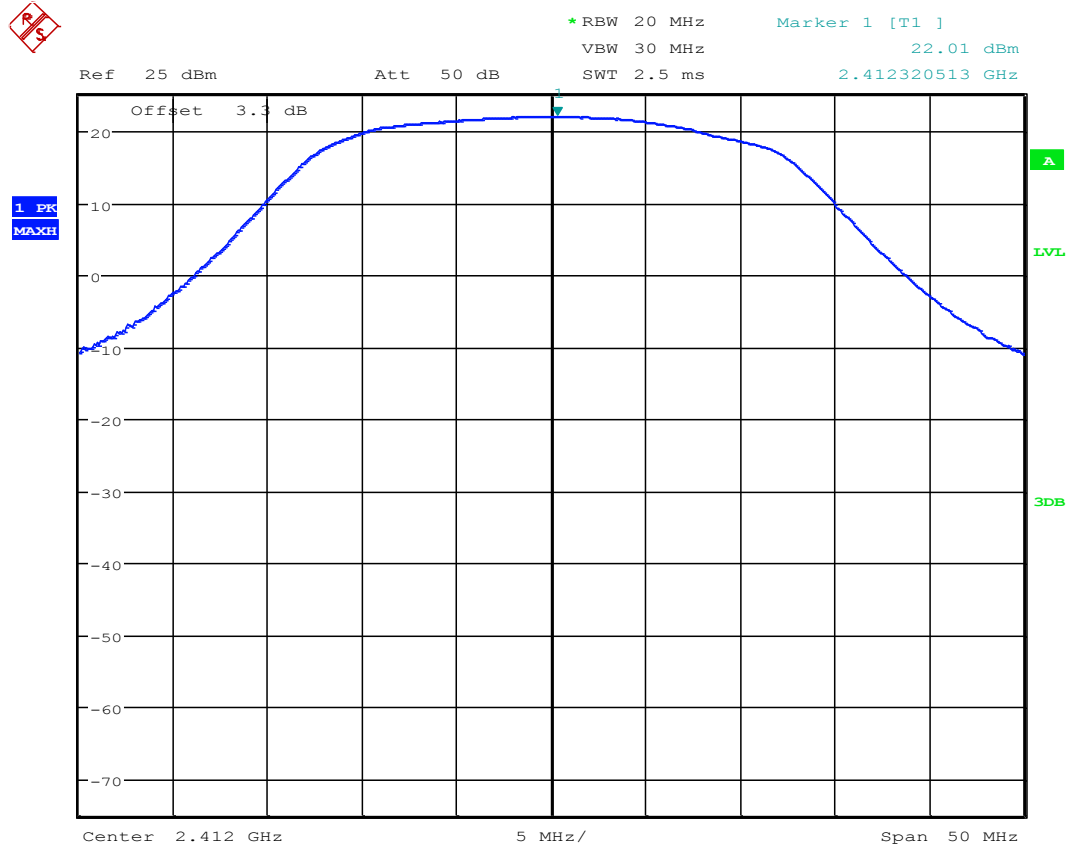

Date: 7.JAN.2014 09:09:07


Op. Mode

WLAN

op-mode 2g



*RBW 20 MHz Marker 1 [T1]
VBW 30 MHz 22.02 dBm
SWT 2.5 ms 2.437080128 GHz

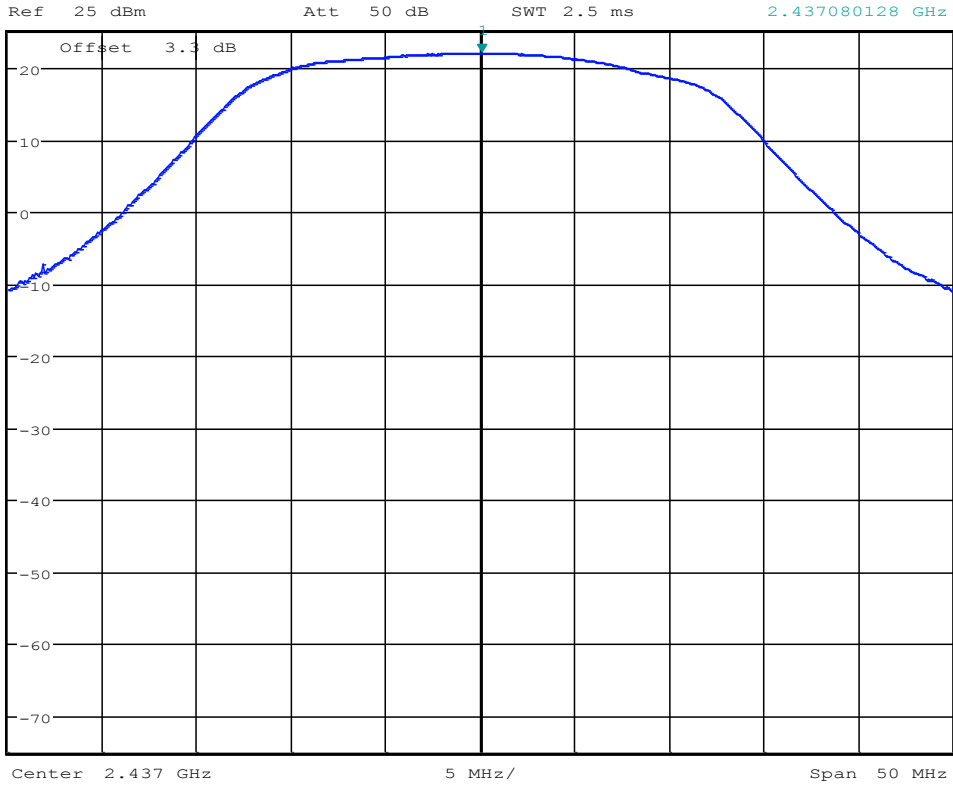

Date: 7.JAN.2014 09:11:45


Op. Mode

WLAN

op-mode 3n



*RBW 20 MHz Marker 1 [T1]
 VBW 30 MHz 22.05 dBm
 SWT 2.5 ms 2.461759615 GHz

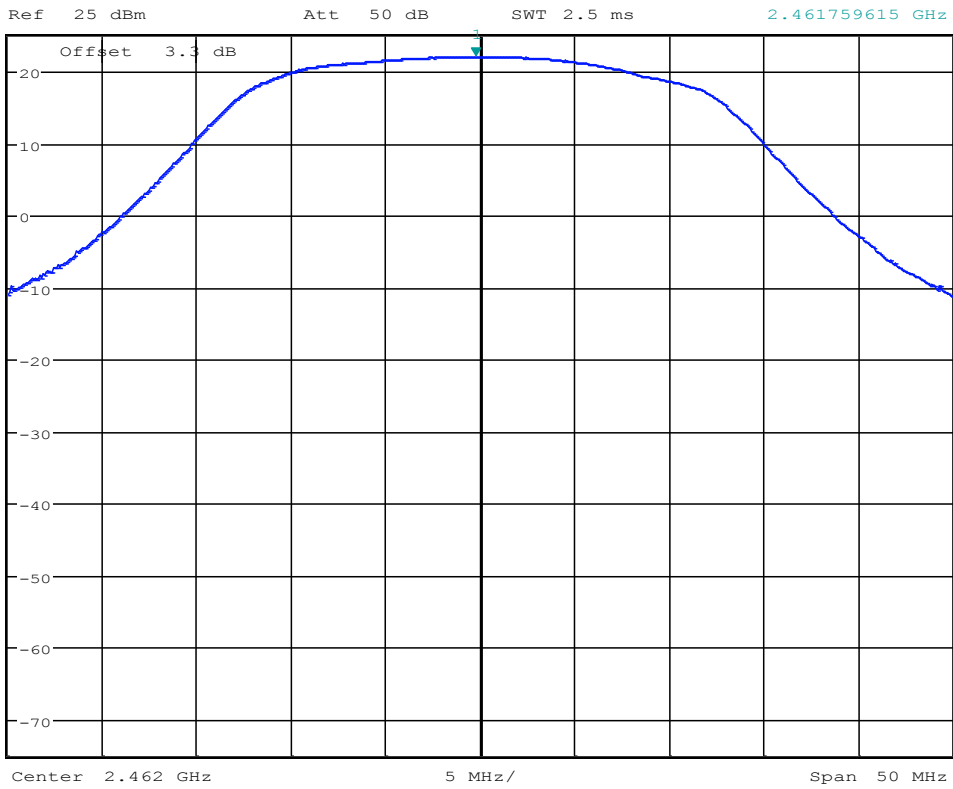

Date: 7.JAN.2014 09:15:38



Op. Mode

KLEER


op-mode 5



*RBW 3 MHz Marker 1 [T1]
*VBW 10 MHz -4.15 dBm
SWT 2.5 ms 2.437342949 GHz

Ref 0 dBm

Att 35 dB

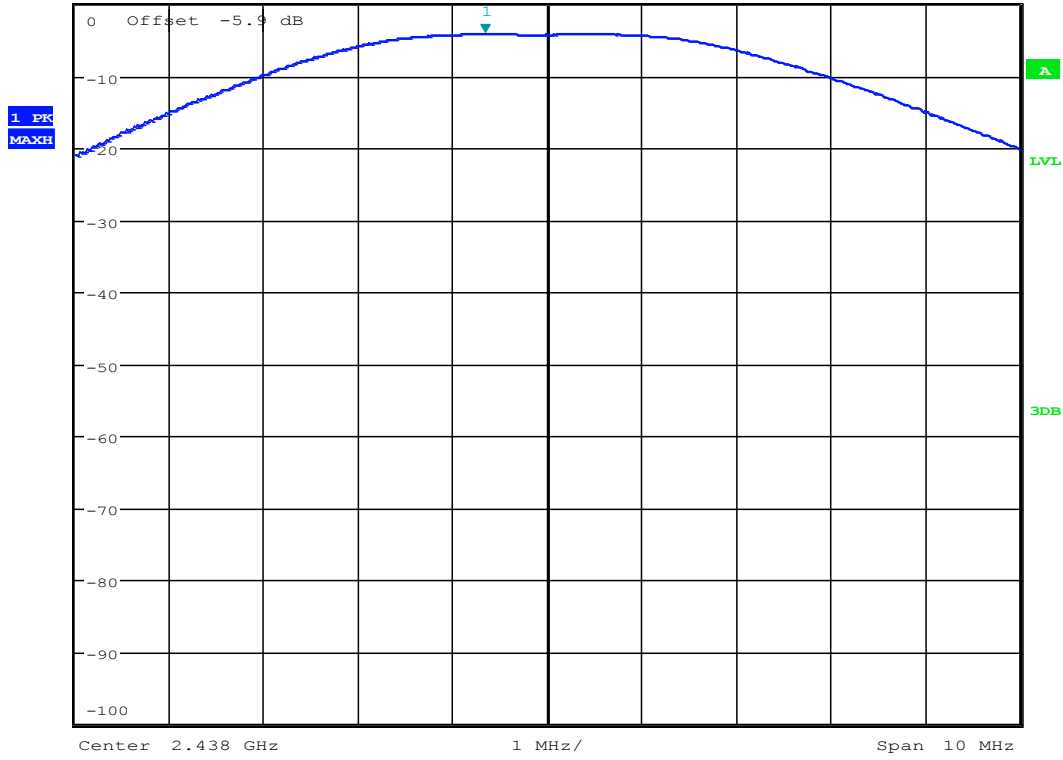

Date: 10.JAN.2014 08:54:53




8.3 Band edge compliance

8.3.1 Band edge compliance conducted

Op. Mode **low end band edge** **WLAN**

op-mode 1g

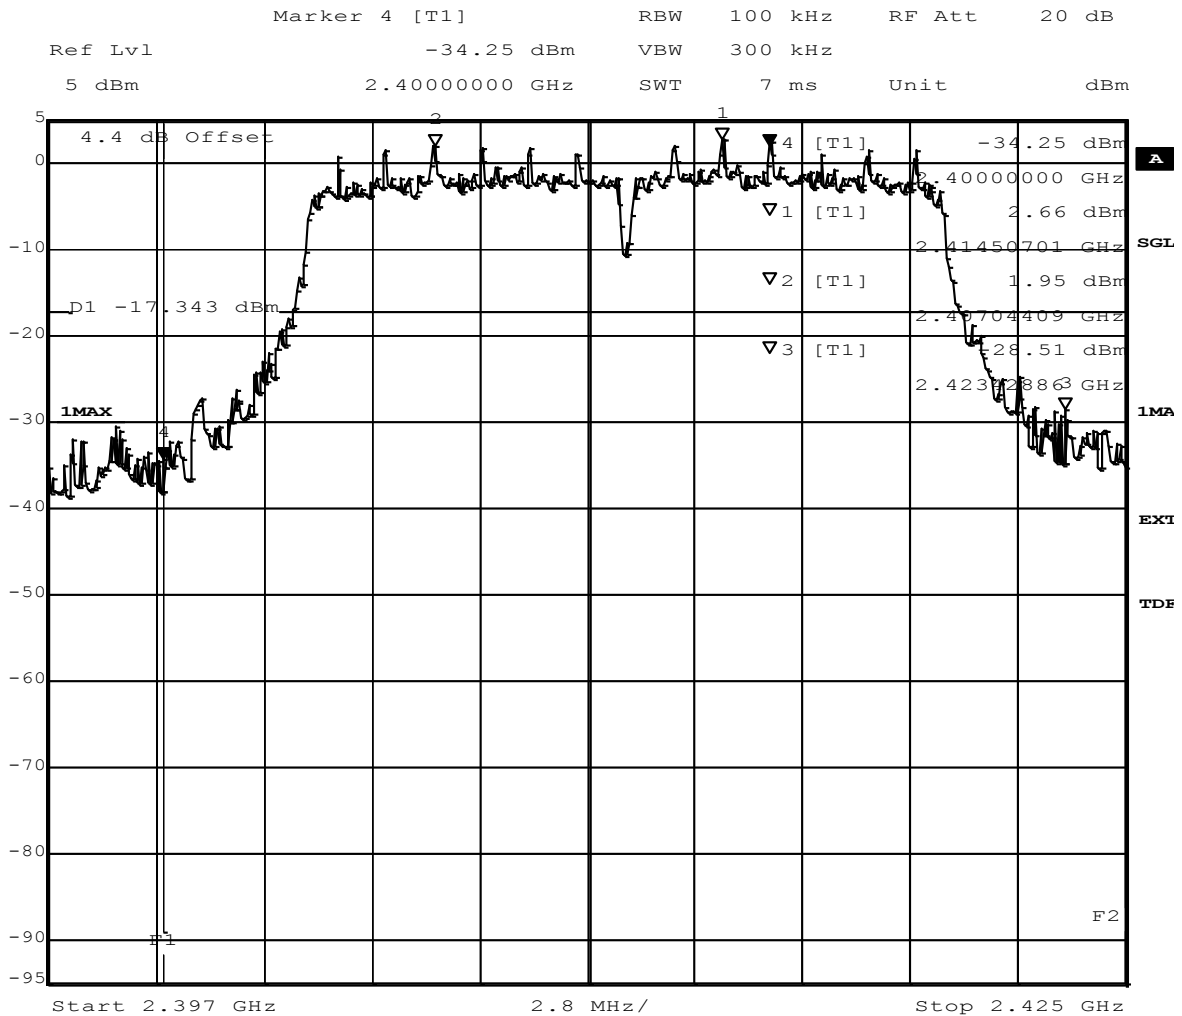


Title: Band Edge Compliance
 Comment A: CH B: 2412 MHz
 Date: 6.JAN.2014 12:38:11



Op. Mode **low end band edge** **KLEER**
 op-mode 4

Marker 4 [T1] RBW 100 kHz RF Att 20 dB
 Ref Lvl -39.42 dBm VBW 300 kHz
 5 dBm 2.40000000 GHz SWT 7 ms Unit dBm

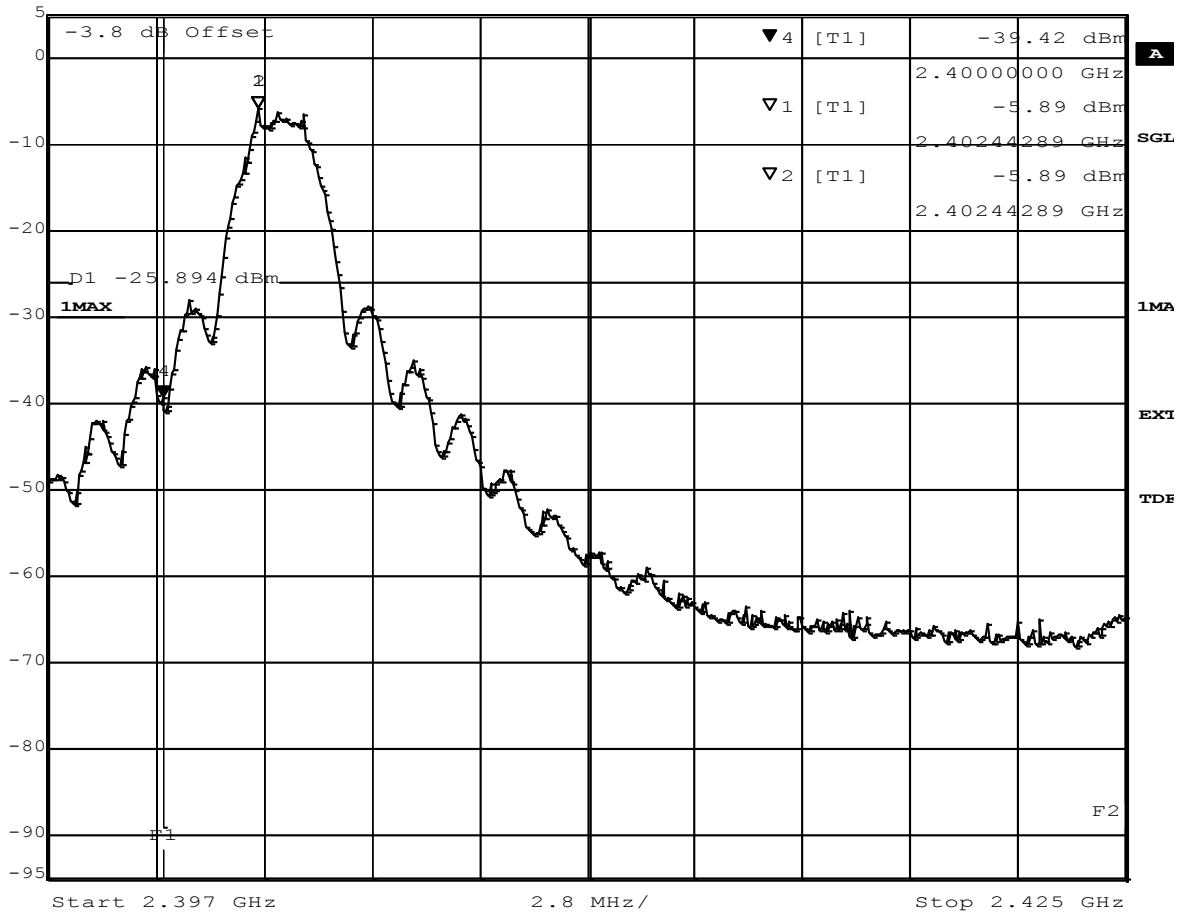


Title: Band Edge Compliance
 Comment A: CH B: 2403 MHz
 Date: 3.JAN.2014 11:49:23



Op. Mode high end band edge (WLAN)

op-mode 3g

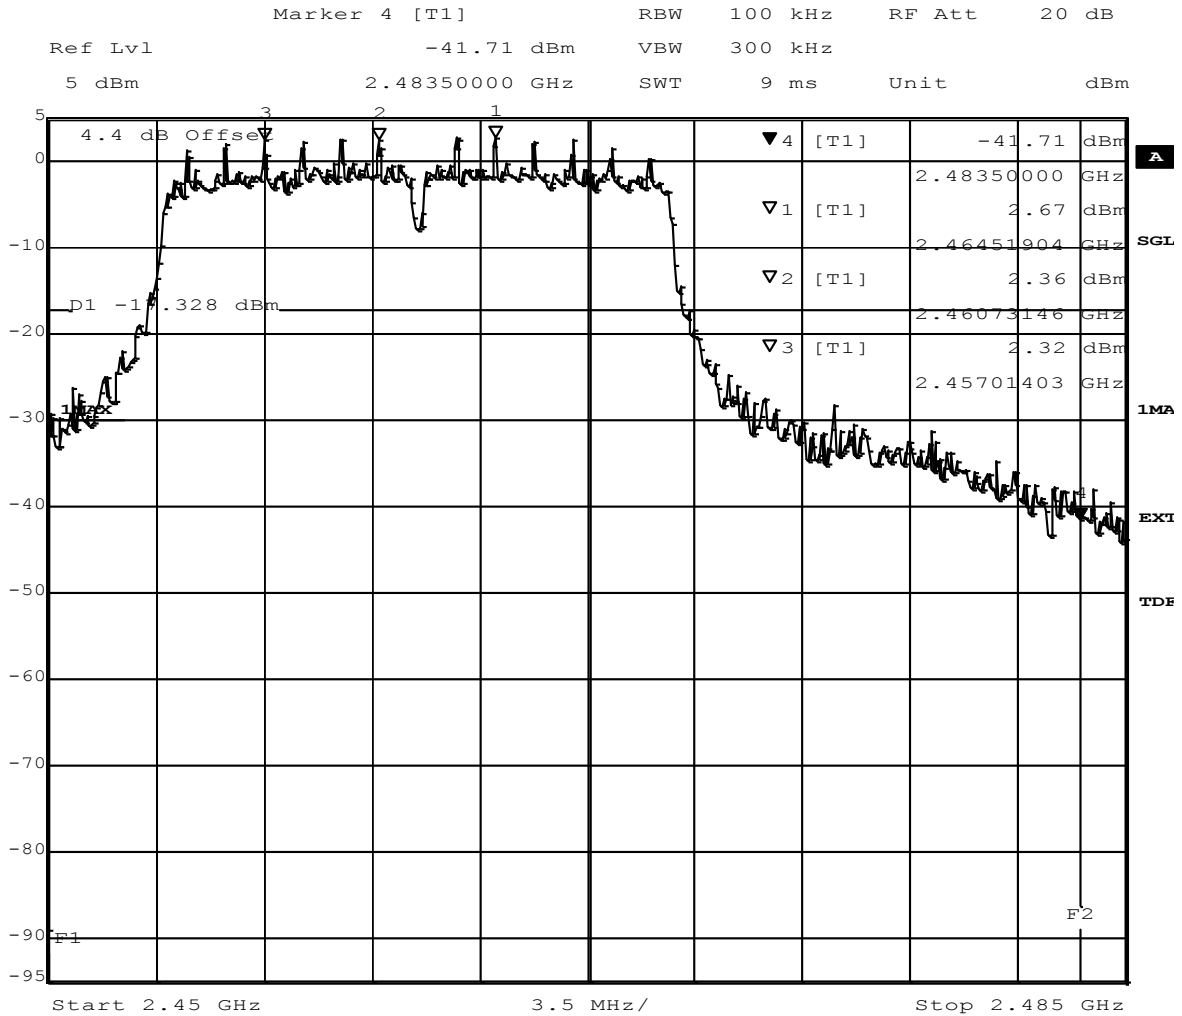


Title: Band Edge Compliance
 Comment A: CH T: 2462 MHz
 Date: 6.JAN.2014 13:43:19



Op. Mode high end band edge (KLEER)

op-mode 6

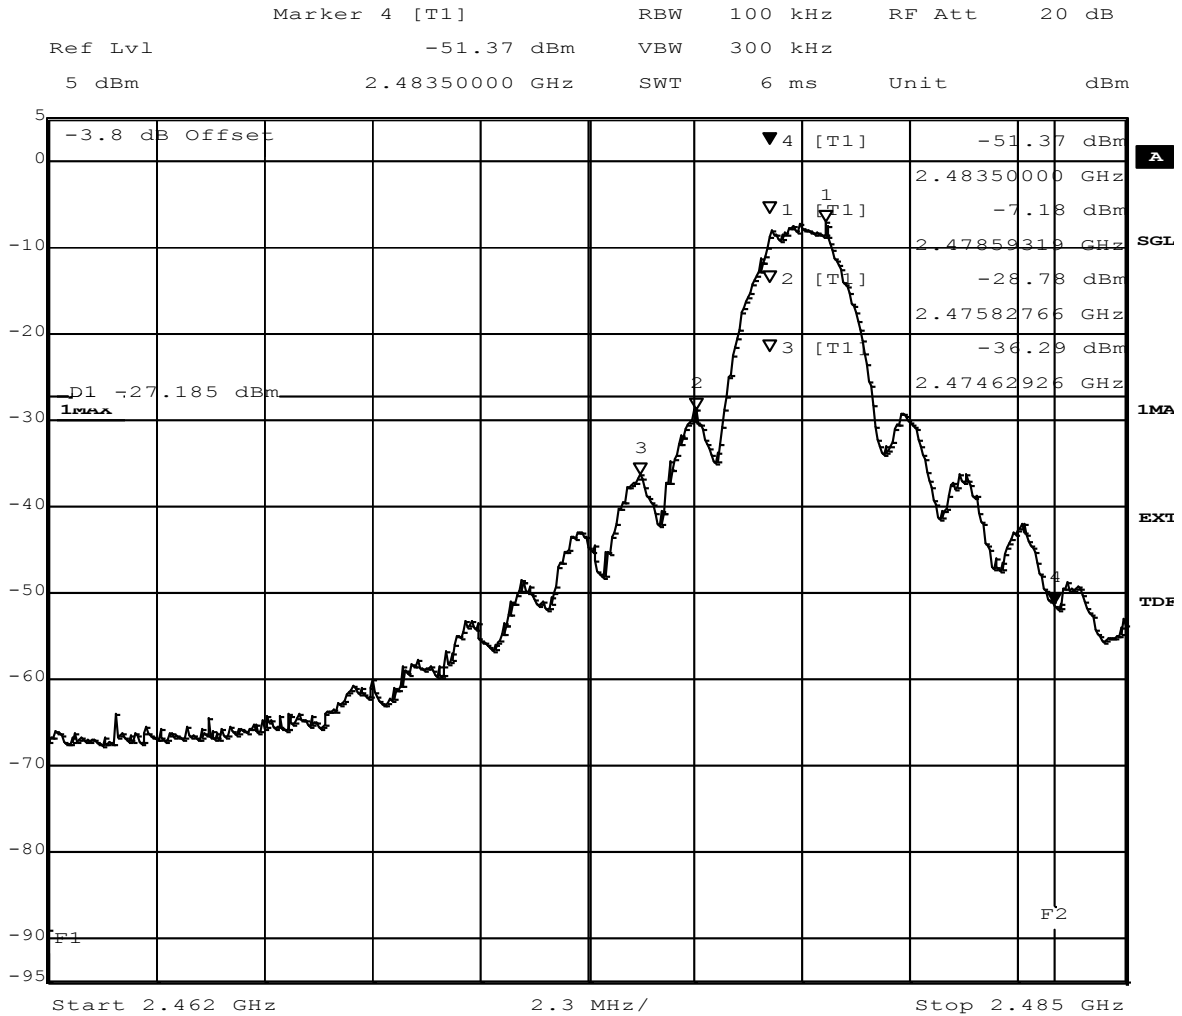


Title: Band Edge Compliance
 Comment A: CH T: 2478 MHz
 Date: 3.JAN.2014 13:35:18


8.4 Band edge compliance radiated

Op. Mode **high end band edge** **WLAN**

op-mode 3n

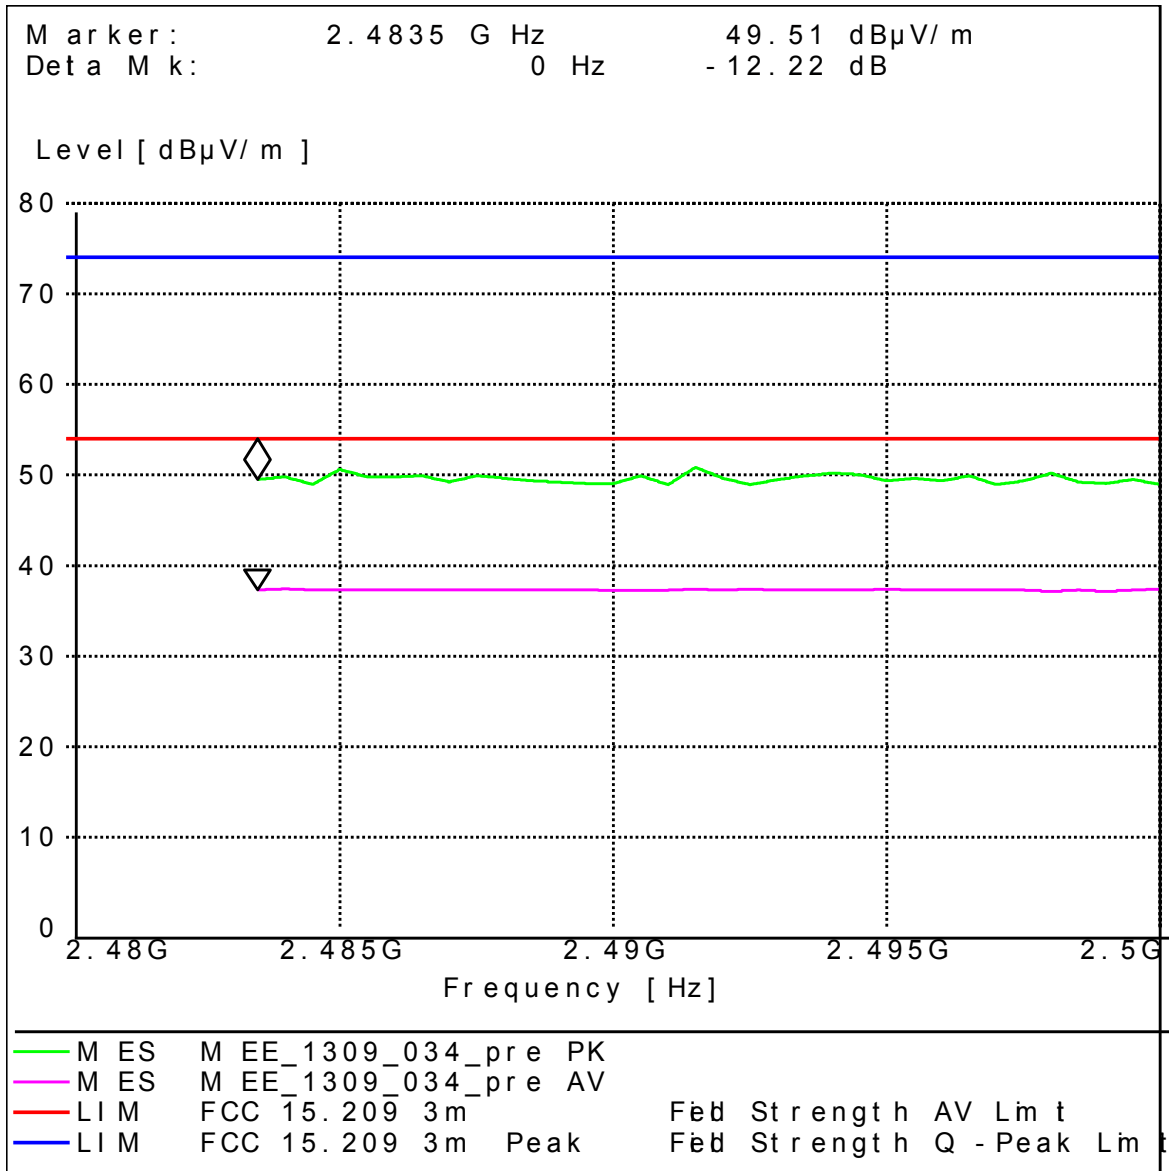

Op. Mode high end band edge KLEER
 op-mode 6

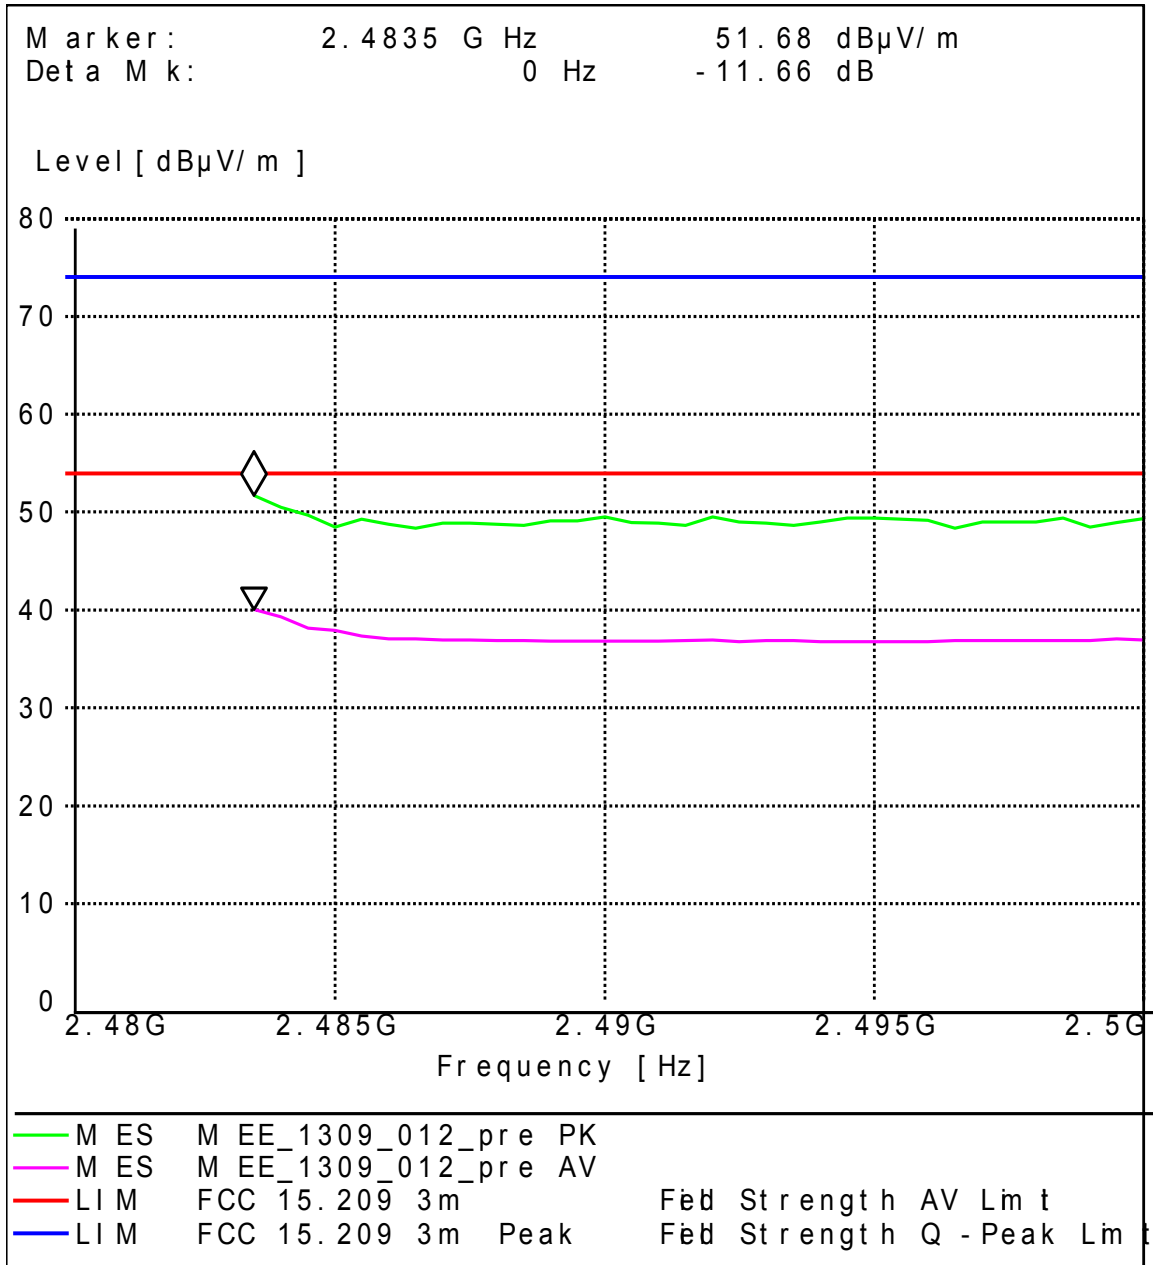


8.5 Spurious RF conducted emissions

Op. Mode

WLAN

op-mode 1b

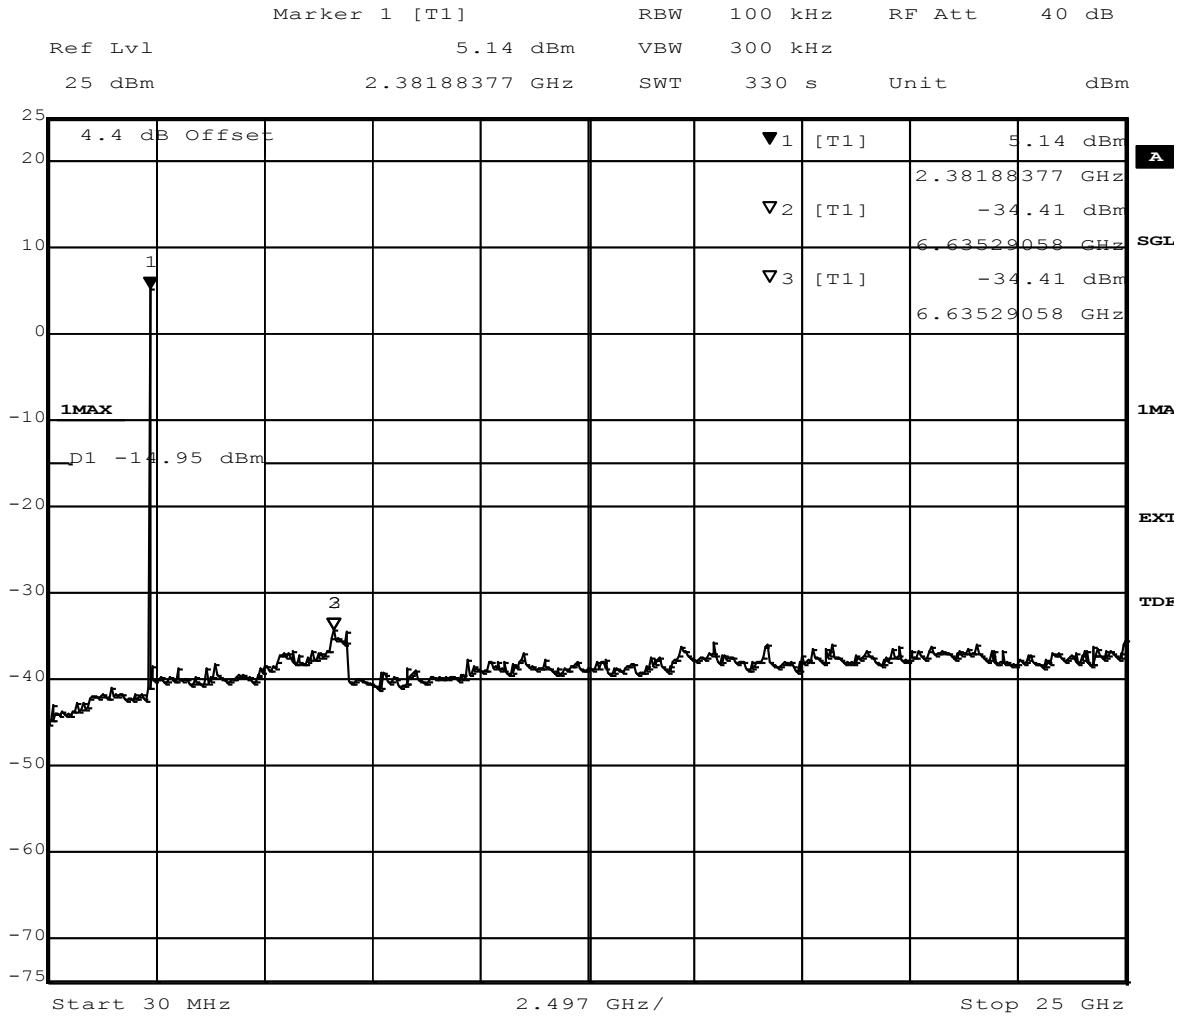


Title: spurious emissions
 Comment A: CH B: 2412 MHz
 Date: 6.JAN.2014 10:41:34

Op. Mode

WLAN

op-mode 2g

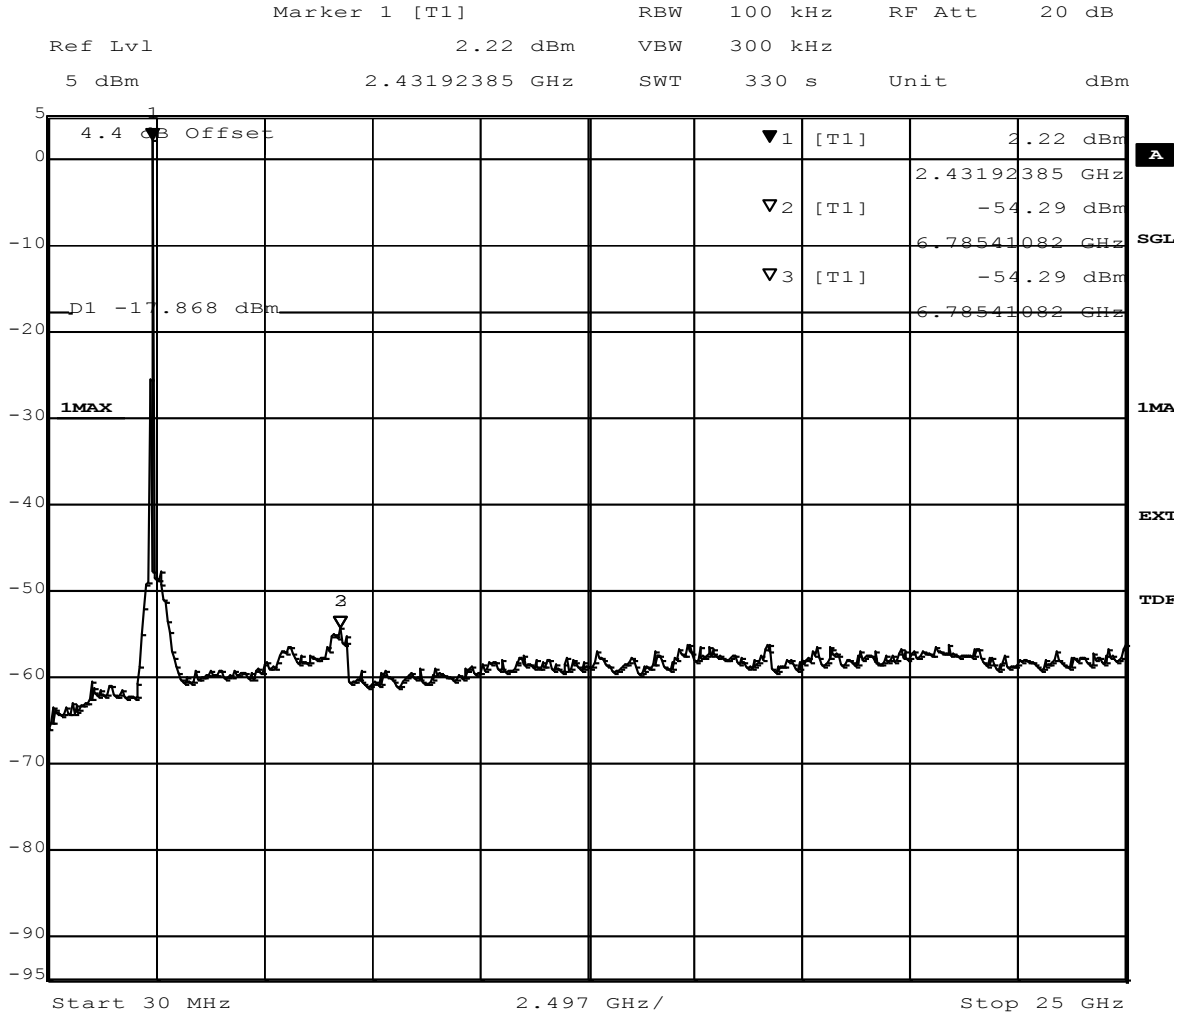


Title: spurious emissions
 Comment A: CH M: 2437 MHz
 Date: 6.JAN.2014 13:20:20



Op. Mode

WLAN

op-mode 3n

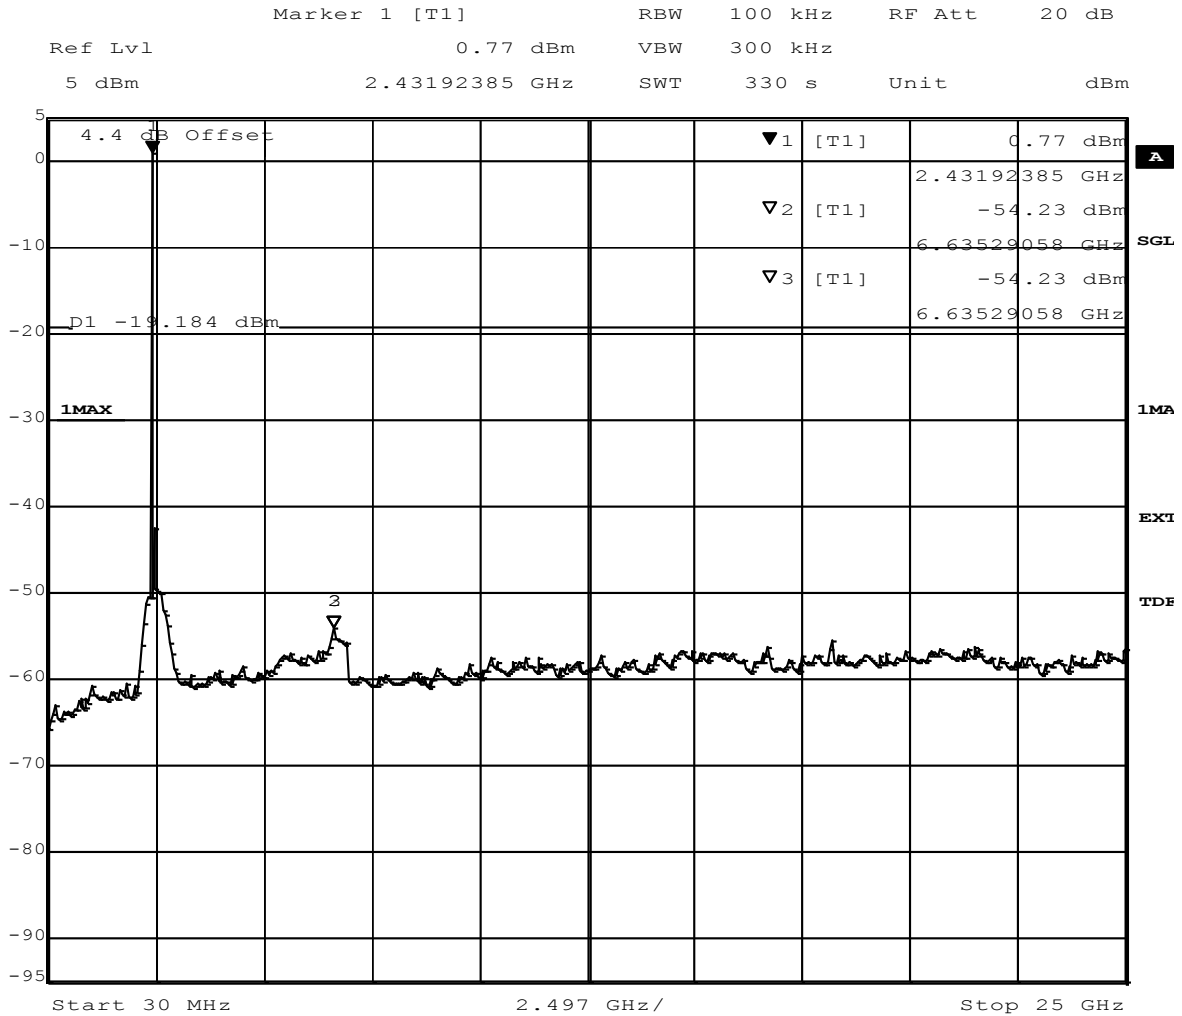


Title: spurious emissions
 Comment A: CH T: 2462 MHz
 Date: 6.JAN.2014 15:30:42



Op. Mode
op-mode 5

KLEER

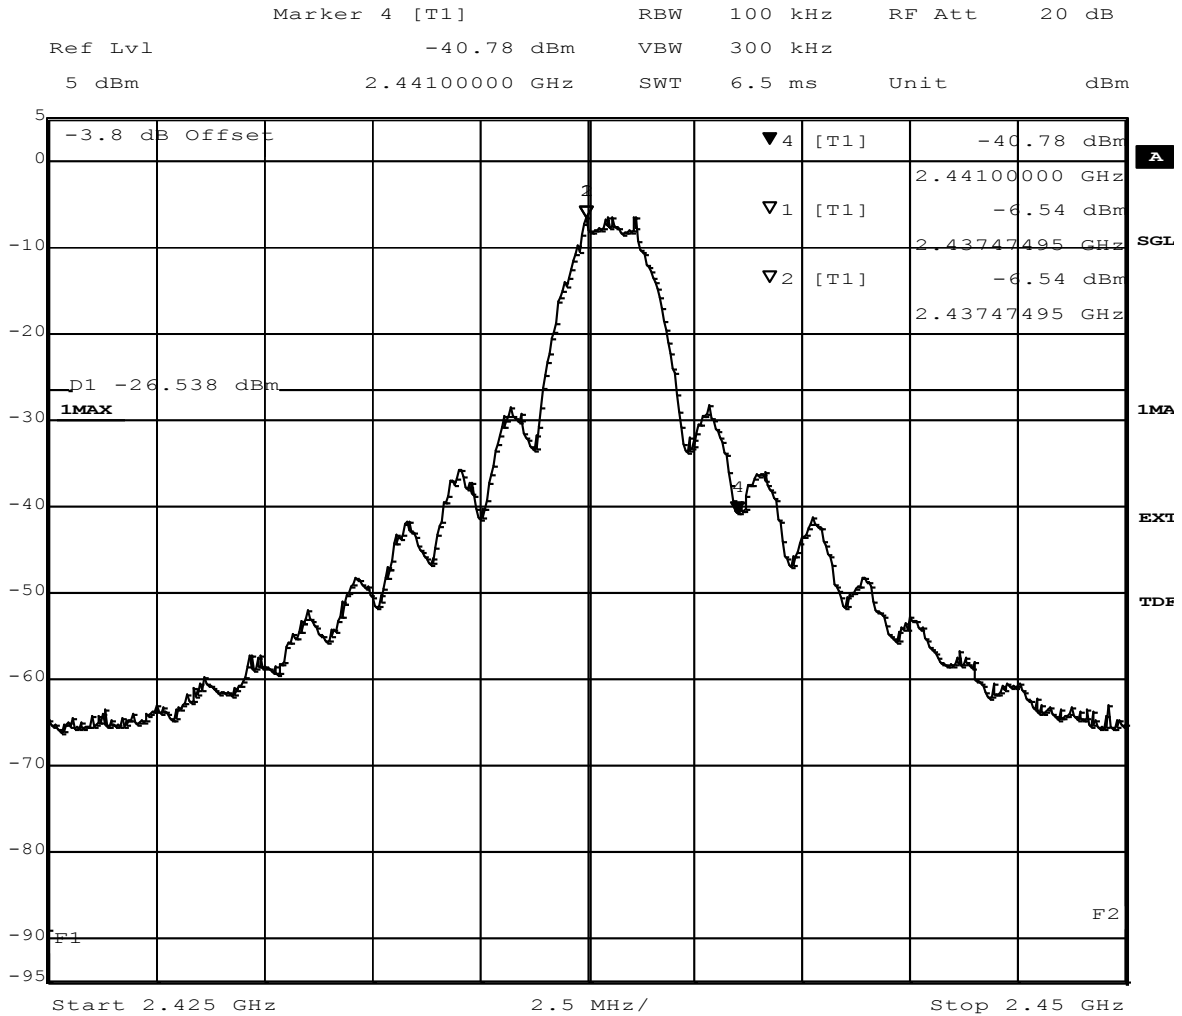

Title: Band Edge Compliance
 Comment A: CH M: 2438 MHz
 Date: 3.JAN.2014 12:38:14




8.6 Power density

Op. Mode

WLAN

op-mode 1b

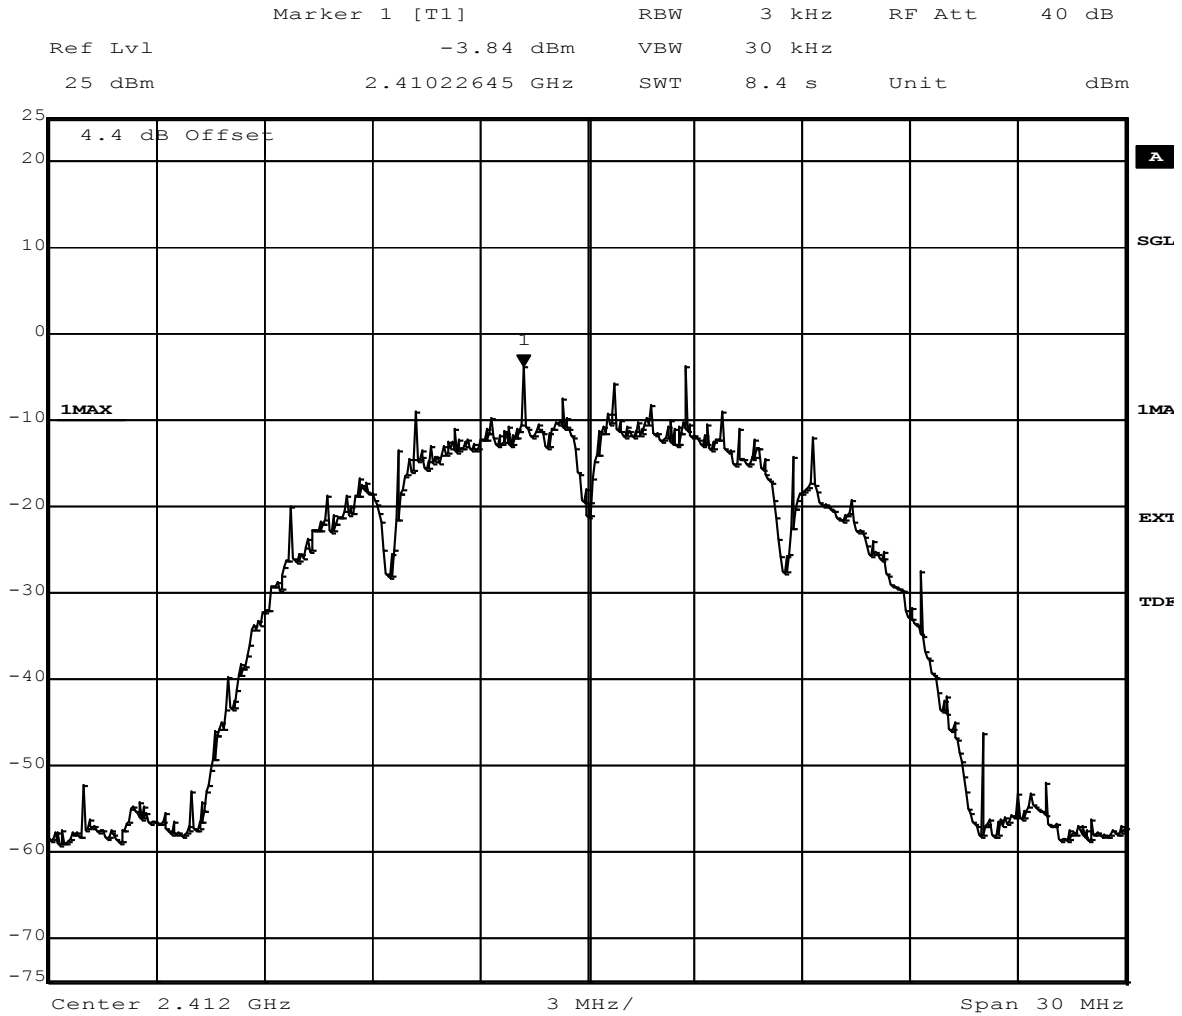


Title: Power Density
Comment A: CH B: 2412 MHz;
Date: 6.JAN.2014 10:58:47



Op. Mode

WLAN

op-mode 3g

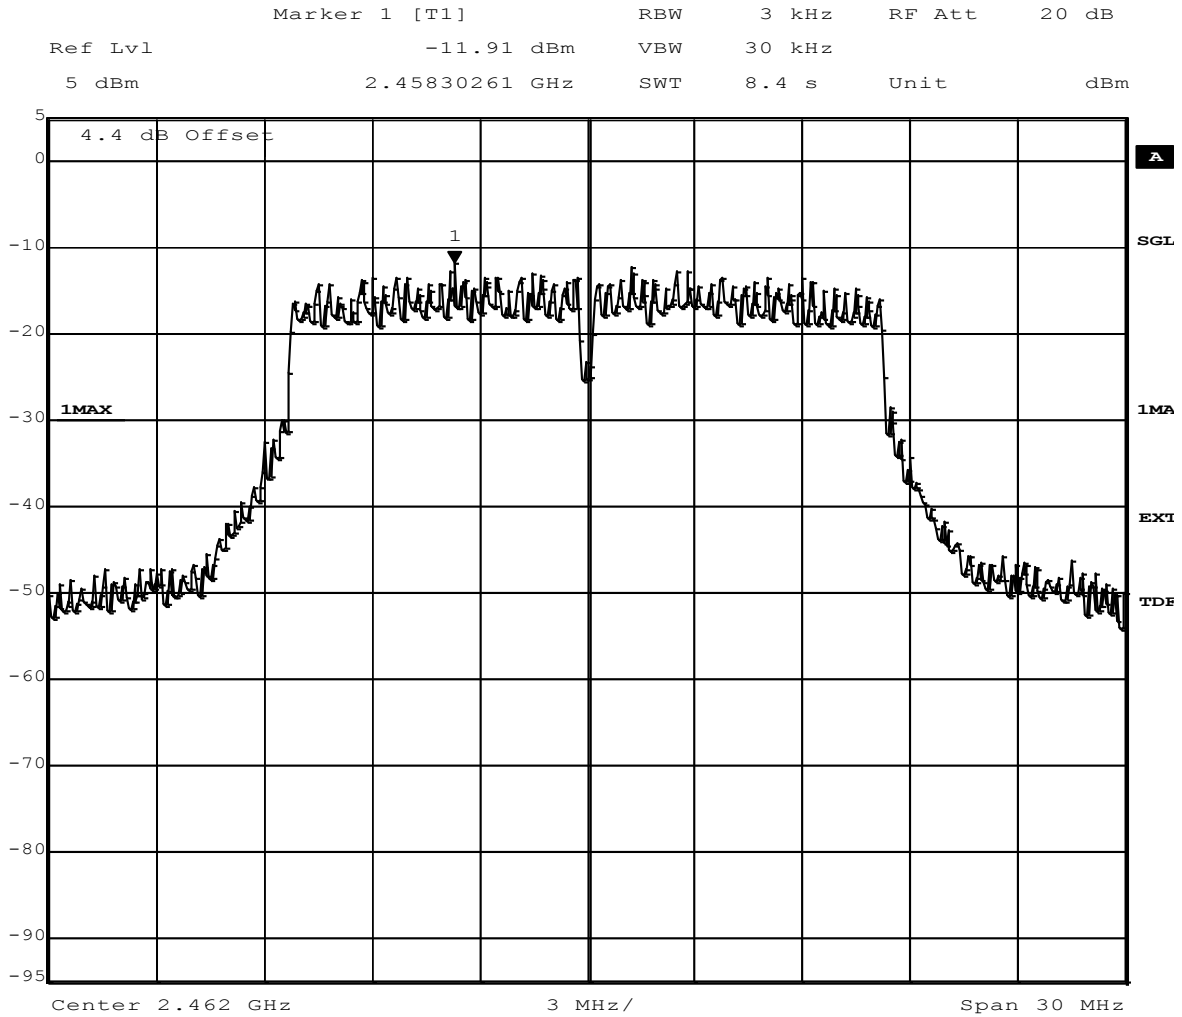


Title: Power Density
Comment A: CH T: 2462 MHz;
Date: 6.JAN.2014 14:11:38



Op. Mode

WLAN

op-mode 1n

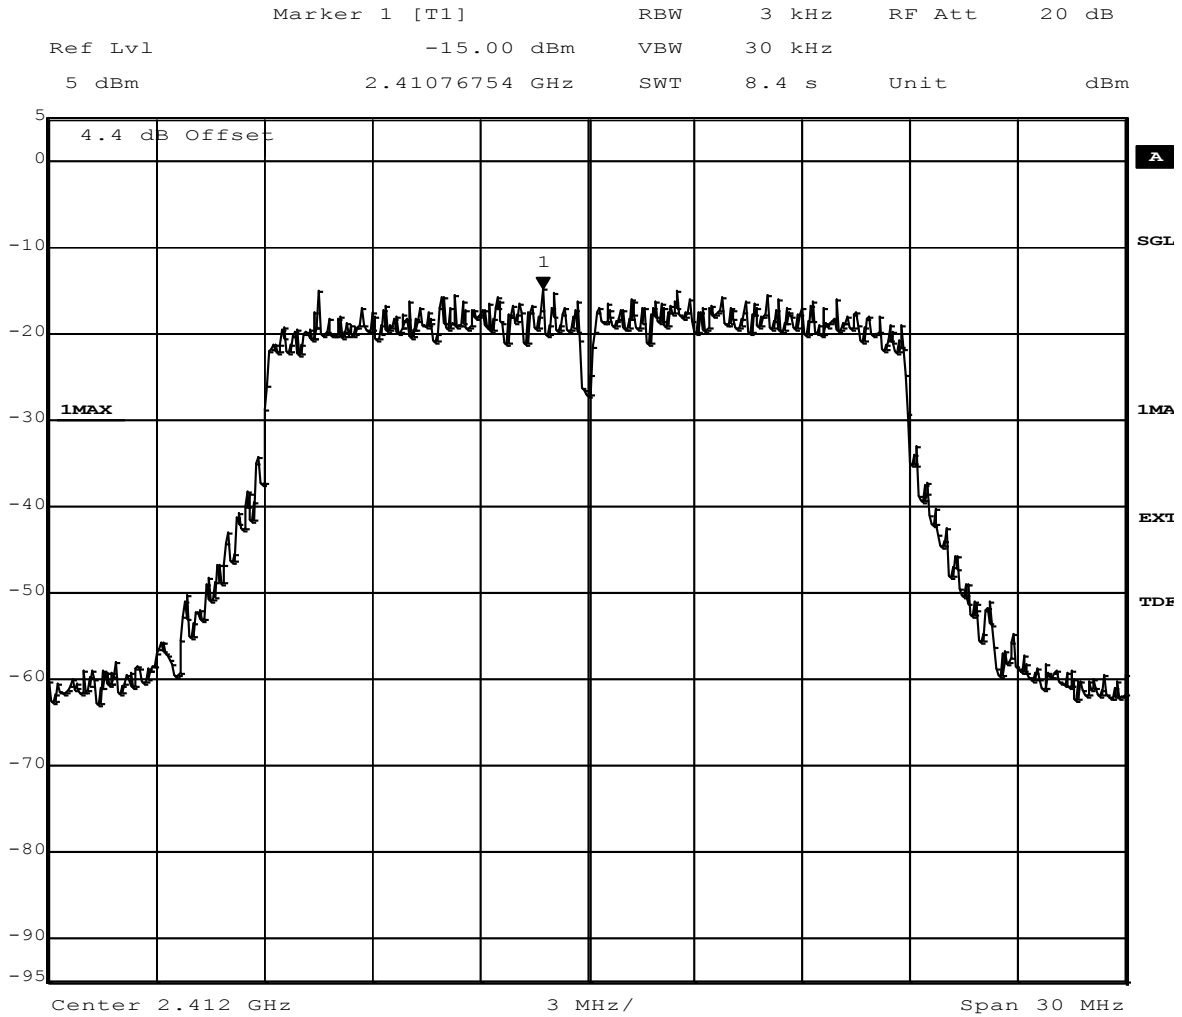


Title: Power Density
Comment A: CH B: 2412 MHz;
Date: 6.JAN.2014 14:44:45



Op. Mode
op-mode 5

KLEER

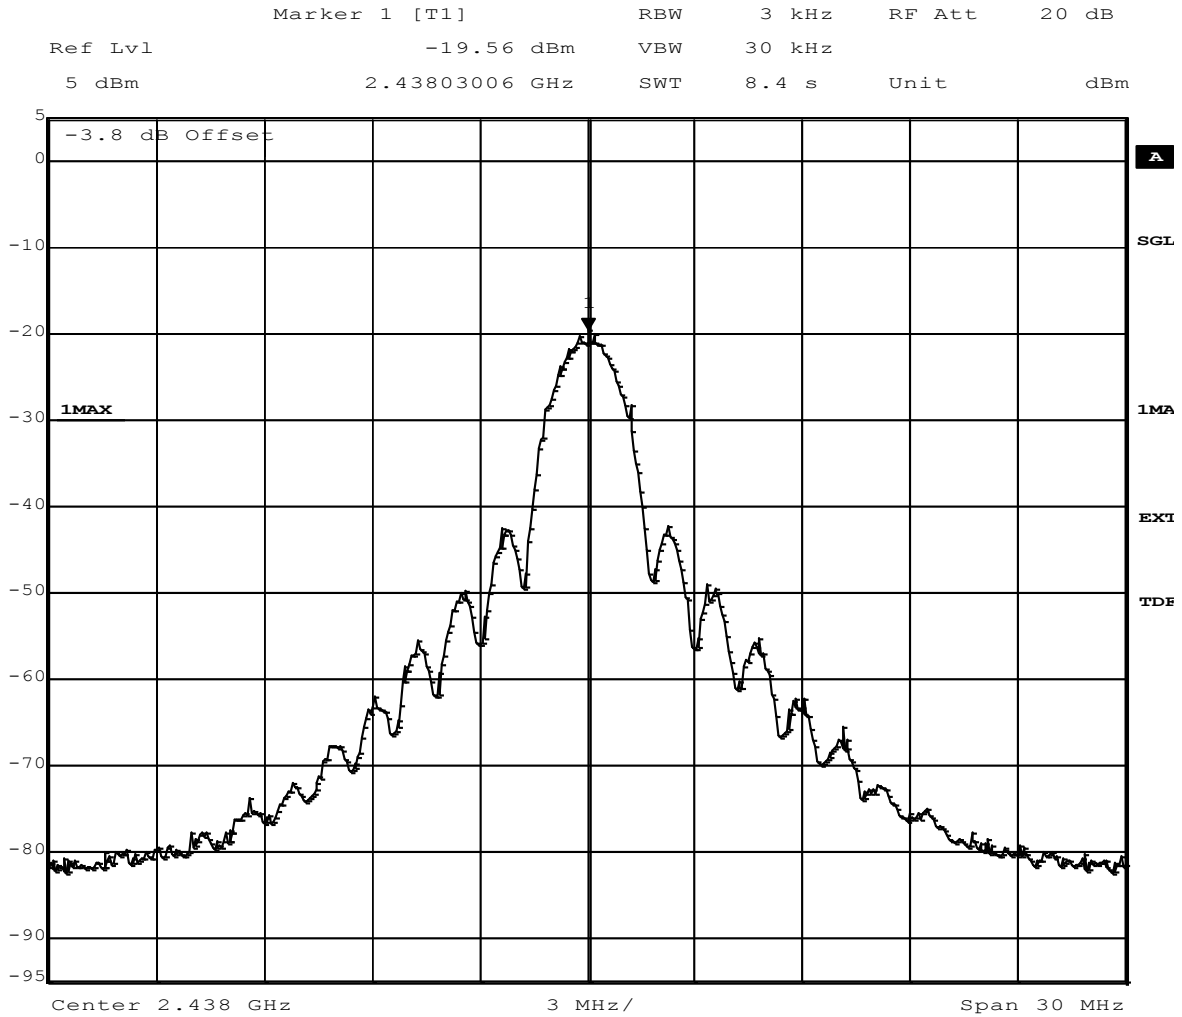

Title: Power Density
Comment A: CH M: 2438 MHz;
Date: 3.JAN.2014 13:07:49