

ISED CABid: ES1909

Test Report No:

Lab. Company Number: 4621A

74675RRF.003

## Test Report

### USA FCC Part 15.247, 15.209

### CANADA RSS-247, RSS-Gen

|   |  |
|---|--|
| (*) Identification of item tested         | IQ3 Mini   |
| (*) Trademark                             | SALTO  |
| (*) Model and /or type reference          | IQ3M0B1 (Type reference: P2336)  |
| Other identification of the product       | UKCIQ3M0B1, Contains: FCC ID: XPNINAW106<br>10088A-IQ3M0B1, Contains: IC: 8595A-NINAW106   |
| (*) Features                              | Features: Wi-Fi and Bluetooth LE<br>HW version: 1.0<br>SW version: 0210 (Control FW), 0211 (Wi-Fi FW)<br>0186 (FUS FW), 0187 (BLE FW)  |
| Applicant                                 | SALTO SYSTEMS, S.L.<br>Arkotz 9, Polígono Lanbarren<br>20180, Oiartzun, Gipuzkoa, SPAIN  |
| Test method requested, standard           | USA FCC Part 15.247 (10-1-21 Edition): Operation within the bands 902 - 928 MHz, 2400 -2483.5 MHz, and 5725 - 5850 MHz.<br>USA FCC Part 15.209 (10-1-21 Edition): Radiated emission limits; general requirements.<br>CANADA RSS-247 Issue 2 (February 2017).<br>CANADA RSS-Gen Issue 5 amendment 2 (February 2021).<br>Guidance for Performing Compliance Measurements on Digital Transmission System, Frequency Hopping Spread Spectrum System, and Hybrid Systems Devices Operating Under Section 15.247 of the FCC Rules. 558074 D01 Meas Guidance v05r02 dated April 2, 2019.<br>ANSI C63.10-2013: American National Standard for Testing Unlicensed Wireless Devices. |
| Summary                                   | IN COMPLIANCE  |
| Approved by (name / position & signature) | José Manuel Gómez Galván<br>EMC Consumer & RF<br>Lab. Manager  |
| Date of issue                             | 2023-06-19   |
| Report template No                        | FDT08_24<br>(* "Data provided by the client")  |

## Index

---

|  |           |
|--|-----------|
| INDEX .....  | 2         |
| ACRONYMS .....   | 3         |
| COMPETENCES AND GUARANTEES .....                                     | 3         |
| GENERAL CONDITIONS .....   | 4         |
| UNCERTAINTY .....  | 4         |
| DATA PROVIDED BY THE CLIENT .....                                    | 4         |
| USAGE OF SAMPLES .....   | 5         |
| TEST SAMPLE DESCRIPTION .....  | 6         |
| IDENTIFICATION OF THE CLIENT .....                                   | 7         |
| TESTING PERIOD AND PLACE .....                                       | 7         |
| DOCUMENT HISTORY .....   | 7         |
| ENVIRONMENTAL CONDITIONS .....                                       | 7         |
| REMARKS AND COMMENTS .....   | 8         |
| TESTING VERDICTS .....   | 8         |
| SUMMARY .....  | 9         |
| <b>APPENDIX A: TEST RESULTS. BLUETOOTH LOW ENERGY 4.2 (1M)</b> ..... | <b>10</b> |

## Acronyms

| Acronym ID      | Acronym Description                 |
|-----------------|-------------------------------------|
| # of Tx Chains  | Number of Transmission Chains       |
| BW              | Bandwidth                           |
| Detector        | Detector used                       |
| Ebw             | Emission Bandwidth                  |
| Equipment       | Equipment Type                      |
| Freq            | Frequency                           |
| Freq Rng        | Frequency Range                     |
| Inband Peak Lvl | Inband Peak Level                   |
| Lvl             | Level                               |
| MP              | Measurement Point                   |
| Mod             | Modulation                          |
| Occ Ch BW       | Occupied Channel Bandwidth          |
| PSD             | Power Spectrum Density              |
| PeakPower       | Maximum Peak Conducted Output Power |
| Pol             | Polarization                        |
| Port            | Active Port                         |
| Unwanted Freq   | Unwanted Emissions Frequency        |
| Unwanted Lvl    | Unwanted Emissions Level            |

## Competences and guarantees

DEKRA Testing and Certification S.A.U. is a testing laboratory accredited by the National Accreditation Body (ENAC -Entidad Nacional de Acreditación), to perform the tests indicated in the Certificate No. 51/LE 147.

DEKRA Testing and Certification S.A.U. is an FCC-recognized accredited testing laboratory with appropriate scope of accreditation that covers the performed tests in this report.

DEKRA Testing and Certification S.A.U. is an ISED-recognized accredited testing laboratory, CABid: ES1909, Company Number: 4621A, with the appropriate scope of accreditation that covers the performed tests in this report.

In order to assure the traceability to other national and international laboratories, DEKRA Testing and Certification S.A.U. has a calibration and maintenance program for its measurement equipment.

DEKRA Testing and Certification S.A.U. guarantees the reliability of the data presented in this report, which is the result of the measurements and the tests performed to the item under test on the date and under the conditions stated on the report and, it is based on the knowledge and technical facilities available at DEKRA Testing and Certification S.A.U. at the time of performance of the test.

DEKRA Testing and Certification S.A.U. is liable to the client for the maintenance of the confidentiality of all information related to the item under test and the results of the test.

The results presented in this Test Report apply only to the particular item under test established in this document.

**IMPORTANT:** No parts of this report may be reproduced or quoted out of context, in any form or by any means, except in full, without the previous written permission of DEKRA Testing and Certification S.A.U.

## General conditions

---

1. This report is only referred to the item that has undergone the test.
2. This report does not constitute or imply on its own an approval of the product by the Certification Bodies or competent Authorities.
3. This document is only valid if complete; no partial reproduction can be made without previous written permission of DEKRA Testing and Certification S.A.U.
4. This test report cannot be used partially or in full for publicity and/or promotional purposes without previous written permission of DEKRA Testing and Certification S.A.U. and the Accreditation Bodies.

## Uncertainty

---

Uncertainty (factor  $k=2$ ) was calculated according to the DEKRA Testing and Certification S.A.U. internal document PODT000.

The total uncertainty of the measurement system for the radiated emissions of EUT from 30 MHz to 1 GHz is:  
Measurement uncertainty  $\leq \pm 5,35$  dB with factor ( $k = 2$ ).

The total uncertainty of the measurement system for the radiated emissions of EUT from 1 GHz to 17 GHz is:  
Measurement uncertainty  $\leq \pm 4,32$  dB with factor ( $k = 2$ ).

The total uncertainty of the measurement system for the radiated emissions of EUT from 17 GHz to 26 GHz is:  
Measurement uncertainty  $\leq \pm 5,51$  dB with factor ( $k = 2$ ).

The total uncertainty of the measurement system for the conducted testing of EUT is:

RF Peak Output Power: Measurement uncertainty  $\leq \pm 0,80$  dB

Power Spectral Density: Measurement uncertainty  $\leq \pm 0,99$  dB

6dB Bandwidth: Measurement uncertainty  $\leq \pm 2,84$  %

Occupied Channel Bandwidth: Measurement uncertainty  $\leq \pm 1,17$  %

Conducted Band-edge spurious emissions: Measurement uncertainty  $\leq \pm 1,76$  dB

## Data provided by the client

---

The following data has been provided by the client:

1. Information relating to the description of the sample ("Identification of the item tested", "Trademark", "Model and/or type reference tested").
2. The sample consists of an IQ3 Mini with Bluetooth LE and Wi-Fi technology.

DEKRA Testing and Certification S.A.U. declines any responsibility with respect to the information provided by the client and that may affect the validity of results.

## Usage of samples

Samples undergoing test have been selected by: The client.

| Id   | Control Number | Description   | Model   | Serial N°      | Date of Reception | Application        |
|------|----------------|---------------|---------|----------------|-------------------|--------------------|
| S/01 | 74675_1.1      | IQ3 Mini      | IQ3M0B1 | --             | 2023-03-22        | Element Under Test |
| S/01 | 74483_6.1      | AC/DC adapter | --      | MF-05001000EM1 | 2023-01-11        | Element Under Test |
| S/01 | 74483_15.1     | USB cable     | --      | --             | 2023-03-23        | Element Under Test |
| S/02 | 74483_14.1     | IQ3 Mini      | IQ3M0B1 | --             | 2023-03-23        | Element Under Test |
| S/02 | 74483_15.1     | USB cable     | --      | --             | 2023-03-23        | Element Under Test |

Notes referenced to samples during the project:

| Id   | Type                           |
|------|--------------------------------|
| S/01 | Sample used for radiated test  |
| S/02 | Sample used for conducted test |

## Test sample description

|   |   |                                |                      |          |                                   |     |     |
|---|---|--------------------------------|----------------------|----------|-----------------------------------|-----|-----|
| Ports..... :                                  | Port name and description   | Cable                          |                      |          |                                   |     |     |
|   |   | Specified max length [m]       | Attached during test | Shielded | Coupled to patient <sup>(3)</sup> |     |     |
|   | --  |                                | [ ]                  | [ ]      | [ ]                               |     |     |
| Supplementary information to the ports..... : |   |                                |                      |          |                                   |     |     |
| Rated power supply .....                      | Voltage and Frequency   |                                | Reference poles      |          |                                   |     |     |
|   |   |                                | L1                   | L2       | L3                                | N   | PE  |
|   | [X]   | AC: 115Vac, 60 Hz              | [ ]                  | [ ]      | [ ]                               | [ ] | [ ] |
|   | [ ]   | DC:                            |                      |          |                                   |     |     |
| Rated Power .....                             | --  |                                |                      |          |                                   |     |     |
| Clock frequencies..... :                      | 32 MHz, 32.768 KHz  |                                |                      |          |                                   |     |     |
| Other parameters .....                        | --  |                                |                      |          |                                   |     |     |
| Software version .....                        | 0210 (Control FW) + 0211 (Wi-Fi FW) + 0186 (FUS FW) + 0187 (BLE FW) |                                |                      |          |                                   |     |     |
| Hardware version .....                        | 1.0   |                                |                      |          |                                   |     |     |
| Dimensions in cm (W x H x D) .....            | Ø 5.3 cm, D=3.2 cm  |                                |                      |          |                                   |     |     |
| Mounting position .....                       | [X]   | Table top equipment            |                      |          |                                   |     |     |
|   | [X]   | Wall/Ceiling mounted equipment |                      |          |                                   |     |     |
|   | [ ]   | Floor standing equipment       |                      |          |                                   |     |     |
|   | [ ]   | Hand-held equipment            |                      |          |                                   |     |     |
|   | [ ]   | Other:                         |                      |          |                                   |     |     |
| Modules/parts..... :                          | Module/parts of test item   |                                | Type                 |          | Manufacturer                      |     |     |
|   | SoC + Antenna   |                                | BLE                  |          | ST + JOHANSON                     |     |     |
|   | Wi-Fi module  |                                | Wi-Fi Module         |          | u-blox                            |     |     |
|   | --  |                                |                      |          |                                   |     |     |
| Accessories (not part of the test item) ..... | Description   |                                | Type                 |          | Manufacturer                      |     |     |
|   | --  |                                |                      |          |                                   |     |     |
| Documents as provided by the applicant .....  | Description   |                                | File name            |          | Issue date                        |     |     |
|   | User Manual   |                                |                      |          |                                   |     |     |
|   | FW Explanation Document   |                                |                      |          |                                   |     |     |
|   | --  |                                |                      |          |                                   |     |     |

<sup>(3)</sup> Only for Medical Equipment

## Identification of the client

SALTO SYSTEMS, S.L.  
Arkotz 9, Polígono Lanbarren  
20180, Oiartzun, Gipuzkoa, SPAIN

## Testing period and place

|                      |  |
|----------------------|--|
| <b>Test Location</b> | DEKRA Testing and Certification S.A.U. |
| <b>Date (start)</b>  | 2022-11-30                             |
| <b>Date (finish)</b> | 2023-03-28                             |

## Document history

| Report number | Date       | Description    |
|---------------|------------|----------------|
| 74675RRF.003  | 2023-06-19 | First release. |

## Environmental conditions

In the control chamber, the following limits were not exceeded during the test:

|                          |                              |
|--------------------------|------------------------------|
| <b>Temperature</b>       | Min. = 15 °C<br>Max. = 35 °C |
| <b>Relative humidity</b> | Min. = 20 %<br>Max. = 75 %   |

In the semianechoic chamber, the following limits were not exceeded during the test.

|                          |                              |
|--------------------------|------------------------------|
| <b>Temperature</b>       | Min. = 15 °C<br>Max. = 35 °C |
| <b>Relative humidity</b> | Min. = 20 %<br>Max. = 75 %   |

In the chamber for conducted measurements, the following limits were not exceeded during the test:

|                          |                              |
|--------------------------|------------------------------|
| <b>Temperature</b>       | Min. = 15 °C<br>Max. = 35 °C |
| <b>Relative humidity</b> | Min. = 20 %<br>Max. = 75 %   |

## Remarks and comments

The tests have been performed by the technical personnel: Fernando Chito, Miguel Manuel López, Pablo Redondo and Rafael Fernandez.

Used instrumentation:

| Control No. | Equipment                               | Model           | Manufacturer      | Next Calibration |
|-------------|---|-----------------|-------------------|------------------|
| 6791        | SEMIANECHOIC ABSORBER LINED CHAMBER     | FACT 3 200 STP  | ETS LINDGREN      | N/A              |
| 6792        | SHIELDED ROOM                           | S101            | ETS LINDGREN      | N/A              |
| 6143        | HYBRID BILOG ANTENNA 30MHz-6GHz         | 3142E           | ETS LINDGREN      | 2023-10-29       |
| 6142        | PRE-AMPLIFIER G>38dB 30MHz-6GHz         | BLNA 0360-01N   | BONN ELEKTRONIK   | 2023-06-16       |
| 7817        | EMI TEST RECEIVER 2Hz-44GHz             | ESW44           | ROHDE AND SCHWARZ | 2023-12-30       |
| 6496        | HORN ANTENNA 1-18GHz                    | BBHA 9120 D     | SCHWARZBECK       | 2023-08-24       |
| 3783        | PRE-AMPLIFIER G>30dB 1GHz-18GHz         | BLMA 0118-3A    | BONN ELEKTRONIK   | 2023-12-29       |
| 4657        | HORN ANTENNA 18-40GHz                   | BBHA 9170       | SCHWARZBECK       | 2023-05-05       |
| 8856        | PRE-AMPLIFIER G>30dB 17-40GHz           | BLMA 1840-4A    | BONN ELEKTRONIK   | 2023-11-02       |
| 4848        | SOFTWARE FOR EMC/RF TESTING             | EMC32           | ROHDE AND SCHWARZ | N/A              |
| 7794        | SIGNAL AND SPECTRUM ANALYZER 10Hz-40GHz | FSV40           | ROHDE AND SCHWARZ | 2025-04-21       |
| 8848        | OPEN SWITCH UNIT UP TO 7.5 GHz          | OSP-B157W8 PLUS | ROHDE & SCHWARZ   | 2023-08-20       |
| 7798        | SOFTWARE FOR EMC/RF TESTING             | WMS32           | ROHDE AND SCHWARZ | N/A              |

## Testing verdicts

|                |     |
|----------------|-----|
| Fail           | F   |
| Inconclusive   | I   |
| Not applicable | N/A |
| Not measured   | N/M |
| Pass           | P   |



## Summary

### Bluetooth Low Energy 4.2 (1M).

| FCC PART 15 PARAGRAPH/ RSS-247                |  |         |        |
|---|--|---------|--------|
| Requirement – Test case                       |  | Verdict | Remark |
| FCC 15.247 (a)(2) / RSS-247 5.2. (a)          | 6 dB Bandwidth                               | P       | --     |
| FCC 15.247 (b) / RSS-247 5.4. (d)             | Maximum output power and antenna gain        | P       | --     |
| FCC 15.247 (d) / RSS-247 5.5.                 | Band-edge emissions compliance (Transmitter) | P       | --     |
| FCC 15.247 (e) / RSS-247 5.2. (b)             | Power spectral density                       | P       | --     |
| FCC 15.247 (d) / RSS-247 5.5.                 | Emission limitations radiated (Transmitter)  | P       | --     |
| <u>Supplementary information and remarks:</u> |  |         |        |
| None  |  |         |        |

## Appendix A: Test results. Bluetooth Low Energy 4.2 (1M)

## INDEX

---

|  |    |
|--|----|
| TEST CONDITIONS .....  | 12 |
| TEST CASES DETAILS .....   | 15 |
| <i>Occupied Channel Bandwidth 99%</i> .....  | 15 |
| <i>RSS-247 5.2 (a) / FCC 15.247 (a) (2) 6 dB Bandwidth</i> .....                       | 19 |
| <i>RSS-247 5.2 (b) / FCC 15.247 (e) Power spectral density</i> .....                   | 23 |
| <i>RSS-247 5.4 (d) / FCC 15.247 (b) (3) Maximum Peak Conducted output power</i> .....  | 27 |
| <i>RSS-247 5.5 / FCC 15.247 (d) Band-edge emissions compliance (Transmitter)</i> ..... | 31 |
| <i>RSS-247 5.5 / FCC 15.247 (d) Emission limitations radiated (Transmitter)</i> .....  | 37 |

## TEST CONDITIONS

---

(\*): Data provided by the client.

### POWER SUPPLY (\*):

|                       |                                 |
|-----------------------|---------------------------------|
| Vnominal:             | 115Vac                          |
| Type of Power Supply: | AC mains supply (AC/DC adapter) |

### ANTENNA (\*):


|                                |                  |
|--------------------------------|------------------|
| Type of Antenna:               | Integral antenna |
| Maximum Declared Antenna Gain: | +1.5dBi          |

### TEST FREQUENCIES (\*):

|                 |          |
|-----------------|----------|
| Low Channel:    | 2402 MHz |
| Middle Channel: | 2440 MHz |
| High Channel:   | 2480 MHz |

### CONDUCTED MEASUREMENTS:

The equipment under test was set up in a shielded room and it is connected to the TS8997 using a low loss RF cable. The reading of the spectrum analyser is corrected taking into account the cable loss.

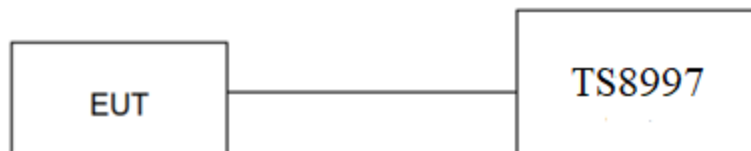

### RADIATED MEASUREMENTS:

All radiated tests were performed in a semi-anechoic chamber. The measurement antenna (Bilog antenna for the range between 30 MHz to 1000 MHz and 1 GHz-17 GHz Double ridge horn antenna) is situated at a distance of 3 m and at a distance of 1.5 m for the frequency range 17 GHz-26 GHz (17 GHz-40 GHz horn antenna).


For radiated emissions in the range 17 GHz-26 GHz that is performed at a distance closer than the specified distance, an inverse proportionality factor of 20 dB per decade is used to normalize the measured data for determining compliance.

The equipment under test was set up on a non-conductive platform above the ground plane and the situation and orientation was varied to find the maximum radiated emission. It was also rotated 360° and the antenna height (Bilog antenna and Double ridge horn antenna) was varied from 1 to 4 meters to find the maximum radiated emission.


Measurements were made in both horizontal and vertical planes of polarization.

A resolution bandwidth/video bandwidth of 100 kHz / 300 kHz was used for frequencies below 1 GHz and 1 MHz / 3 MHz for frequencies above 1 GHz.


Radiated measurements setup from 30 MHz to 1 GHz:

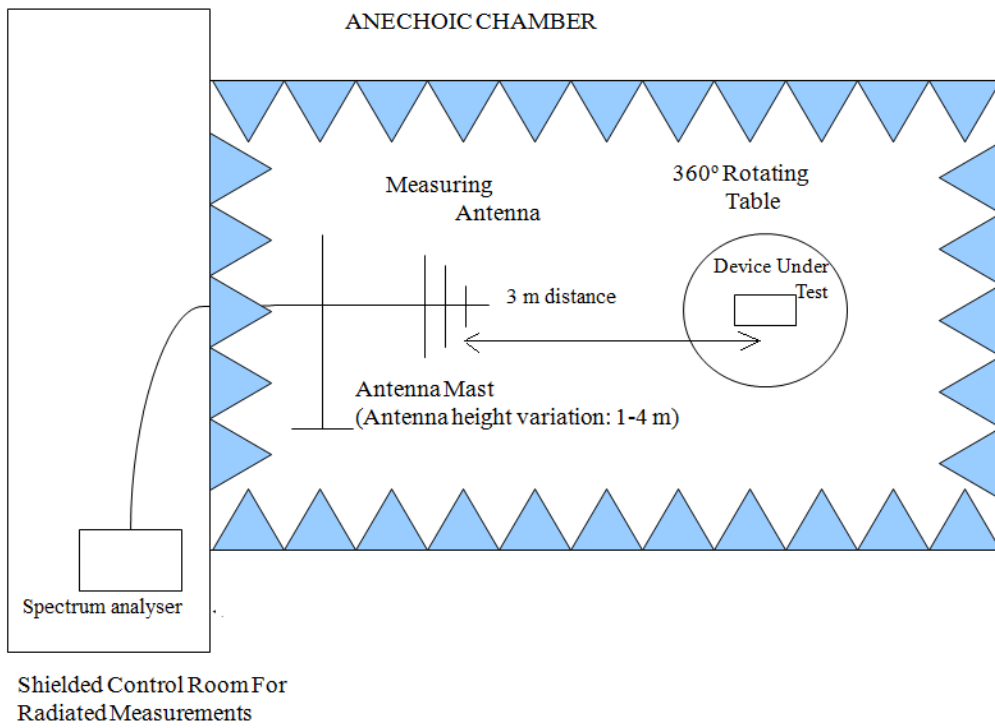

Radiated measurements setup from 1 GHz to 17 GHz:

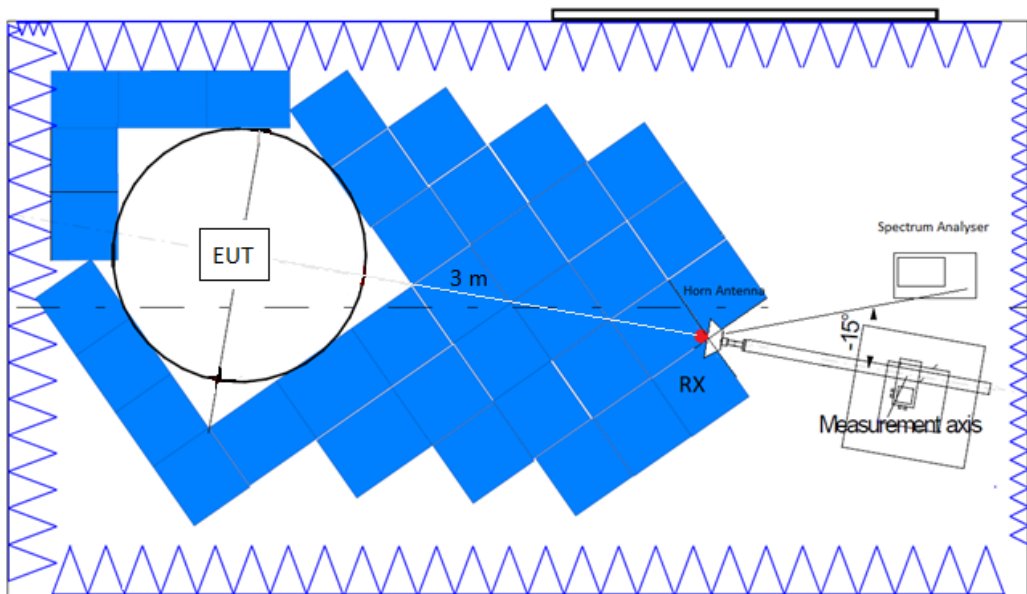

Radiated measurements setup  $f > 17$  GHz:

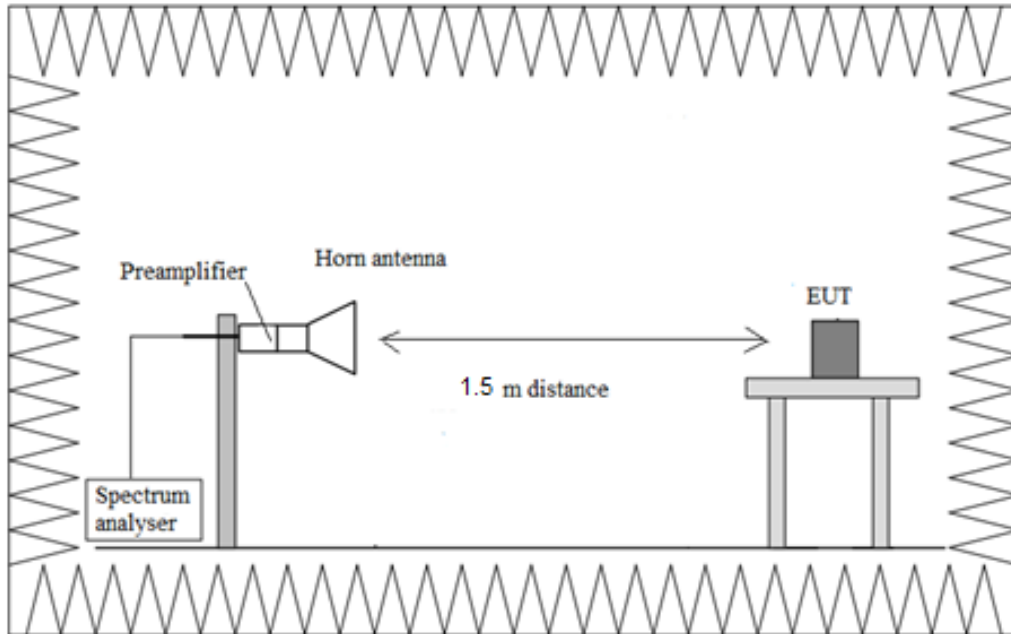

## TEST CASES DETAILS

---

### Occupied Channel Bandwidth 99%

#### Results



Modulation: BTLE 4.2 (GFSK 1 Mbit/s)

| Freq (MHz) | Occ Ch BW (MHz) |
|------------|-----------------|
| 2402.00000 | 1.040           |
| 2440.00000 | 1.030           |
| 2480.00000 | 1.020           |

**Attachments**

Equipment Type = Digital Transmission System (DTS)    Bandwidth MHz = 1  
Modulation = BTLE 4.2 (GFSK 1 Mbit/s)                      Frequency MHz = 2402.00000  
Number of Transmission Chains = 1                              Active Port = 1



**Images:**

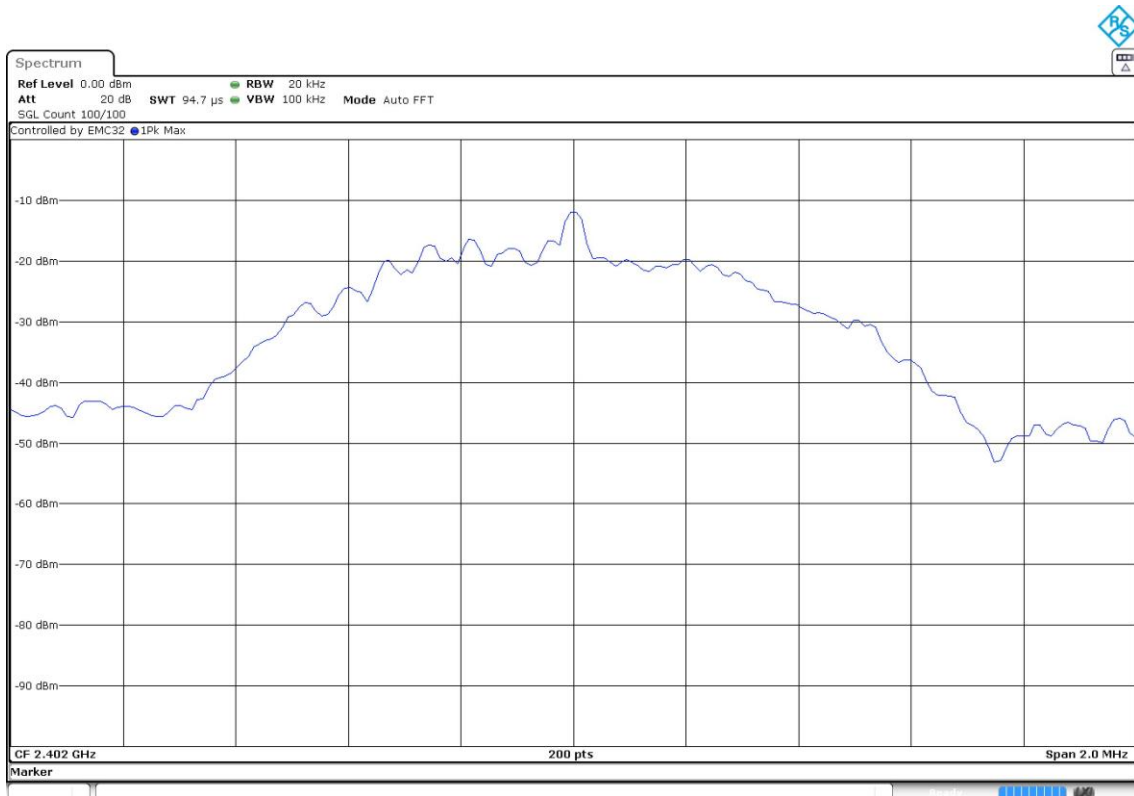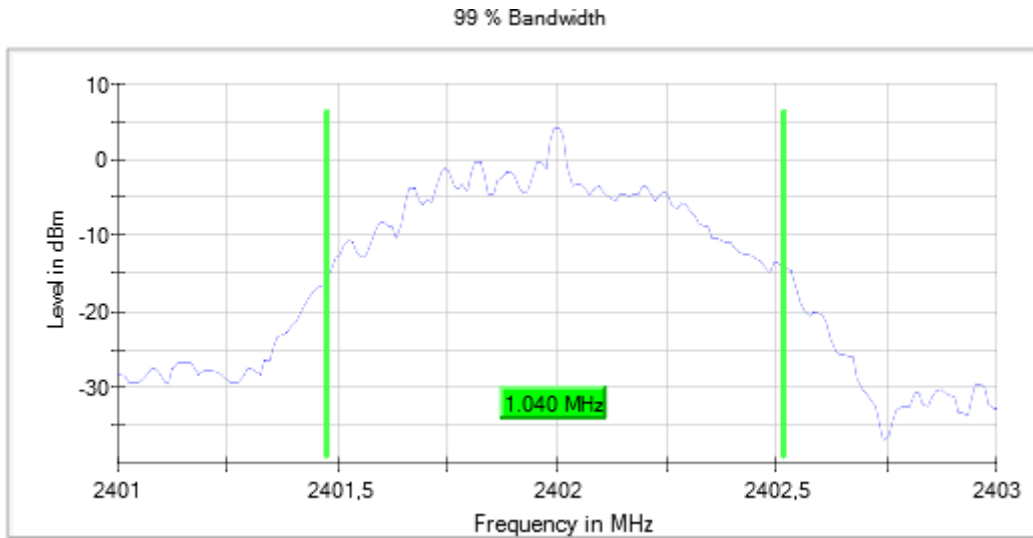





Equipment Type = Digital Transmission System (DTS)    Bandwidth MHz = 1  
Modulation = BTLE 4.2 (GFSK 1 Mbit/s)                      Frequency MHz = 2440.00000  
Number of Transmission Chains = 1                              Active Port = 1

Images:

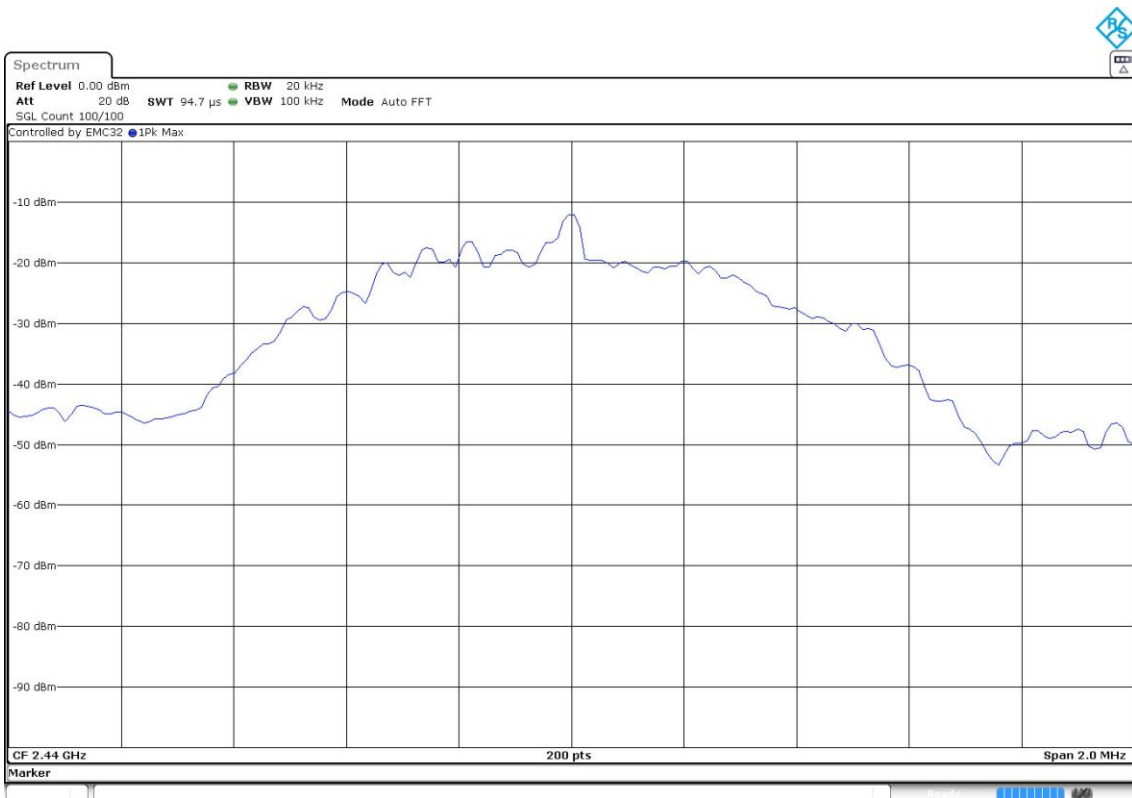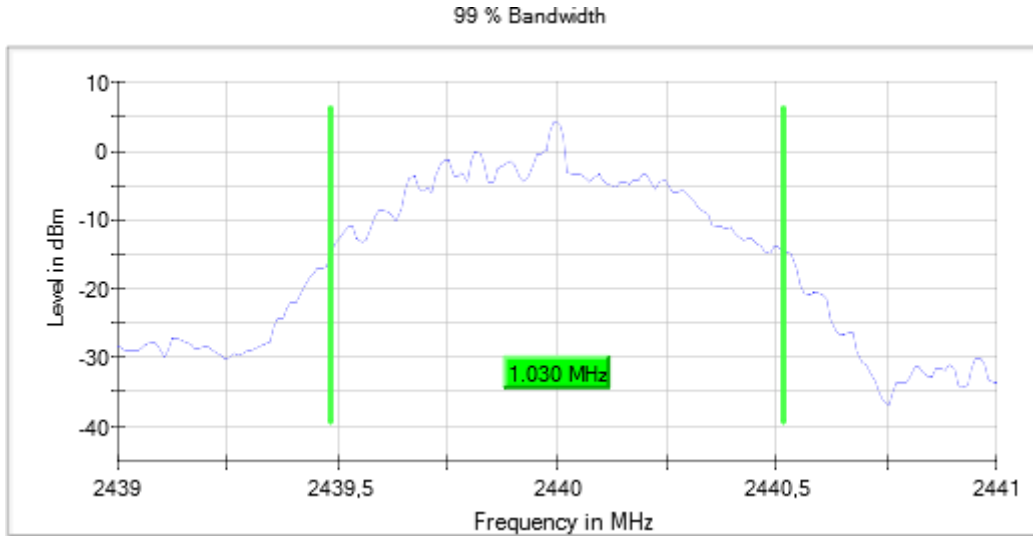

Equipment Type = Digital Transmission System (DTS)    Bandwidth MHz = 1  
Modulation = BTLE 4.2 (GFSK 1 Mbit/s)                      Frequency MHz = 2480.00000  
Number of Transmission Chains = 1                              Active Port = 1

Images:

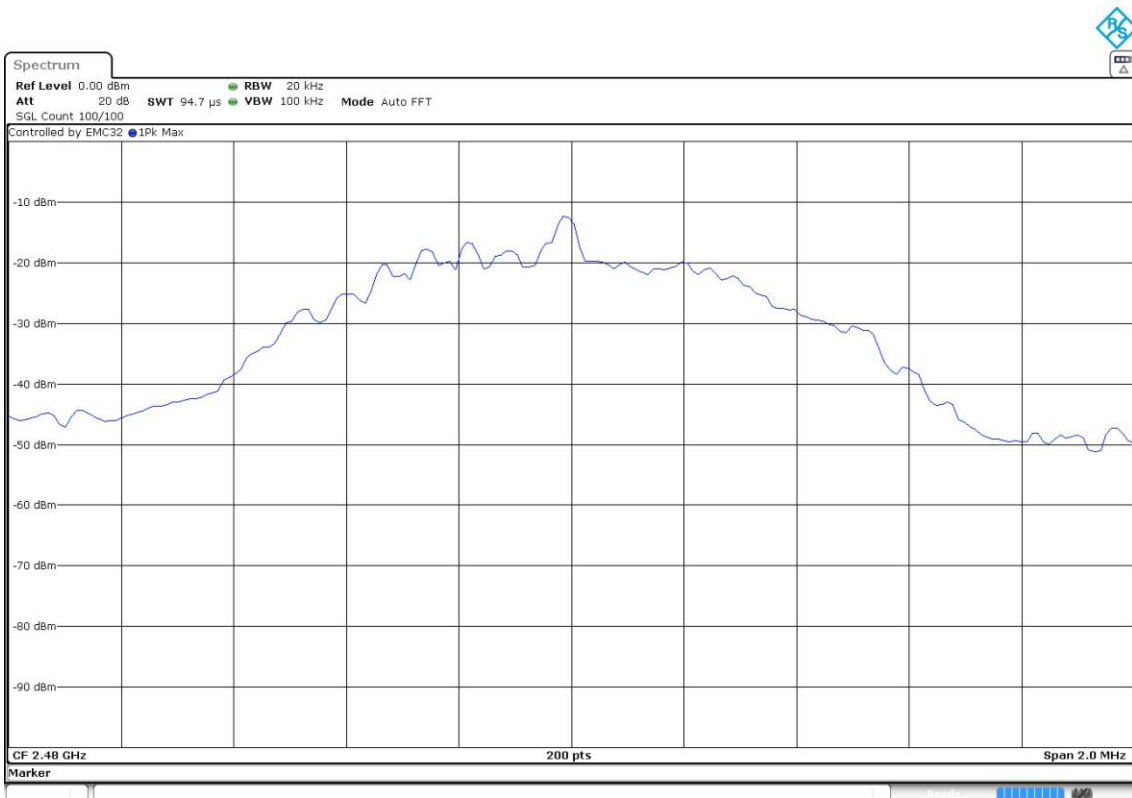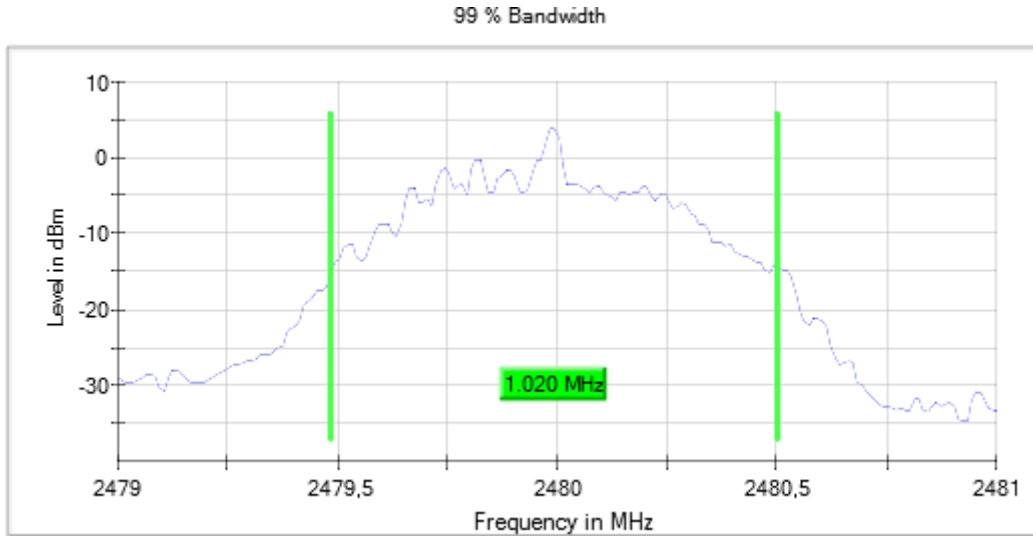

## RSS-247 5.2 (a) / FCC 15.247 (a) (2) 6 dB Bandwidth

### Limits

The minimum 6 dB bandwidth shall be at least 500 kHz.

### Results

Modulation: BTLE 4.2 (GFSK 1 Mbit/s)

| Freq (MHz) | 6 dB Bandwidth (MHz) |
|------------|----------------------|
| 2402.00000 | 0.693                |
| 2440.00000 | 0.693                |
| 2480.00000 | 0.693                |



### Verdict

Pass

**Attachments**



Bandwidth MHz = 1                      Modulation = BTLE 4.2 (GFSK 1 Mbit/s)  
Frequency MHz = 2402.00000      Number of Transmission Chains = 1  
Active Port = 1

**Images:**

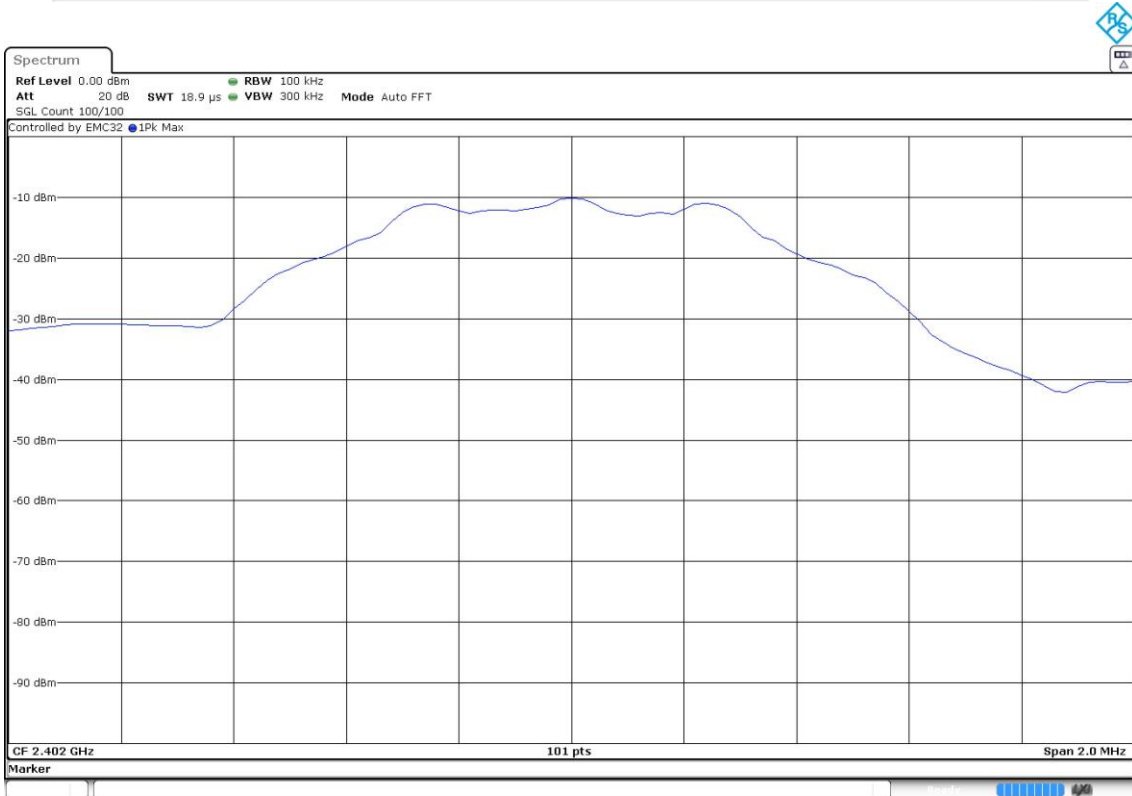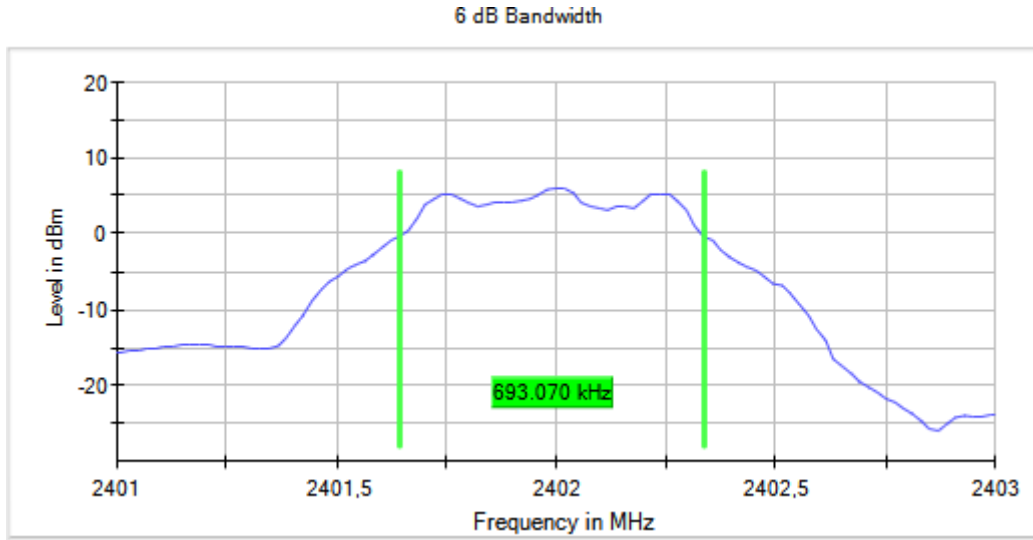



Bandwidth MHz = 1                      Modulation = BTLE 4.2 (GFSK 1 Mbit/s)  
Frequency MHz = 2440.00000      Number of Transmission Chains = 1  
Active Port = 1

Images:

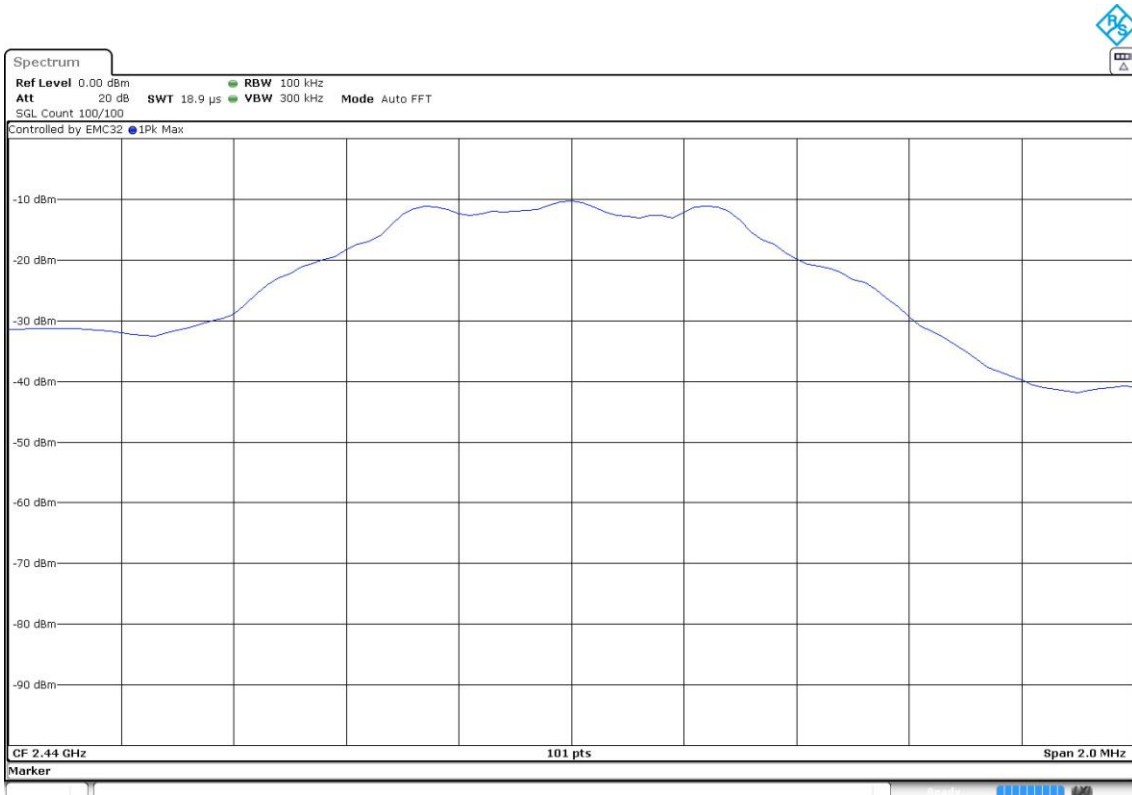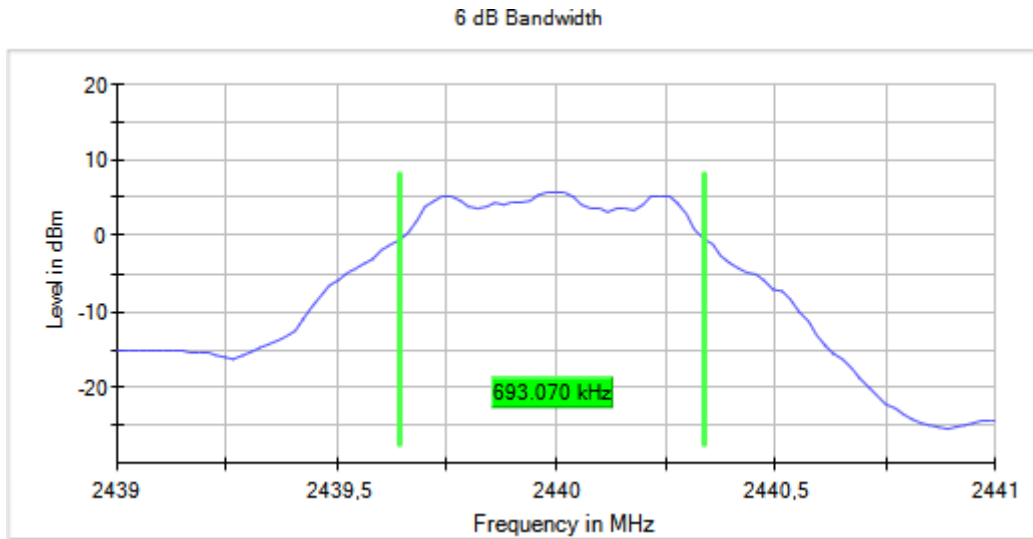

Bandwidth MHz = 1                      Modulation = BTLE 4.2 (GFSK 1 Mbit/s)  
Frequency MHz = 2480.00000      Number of Transmission Chains = 1  
Active Port = 1

Images:

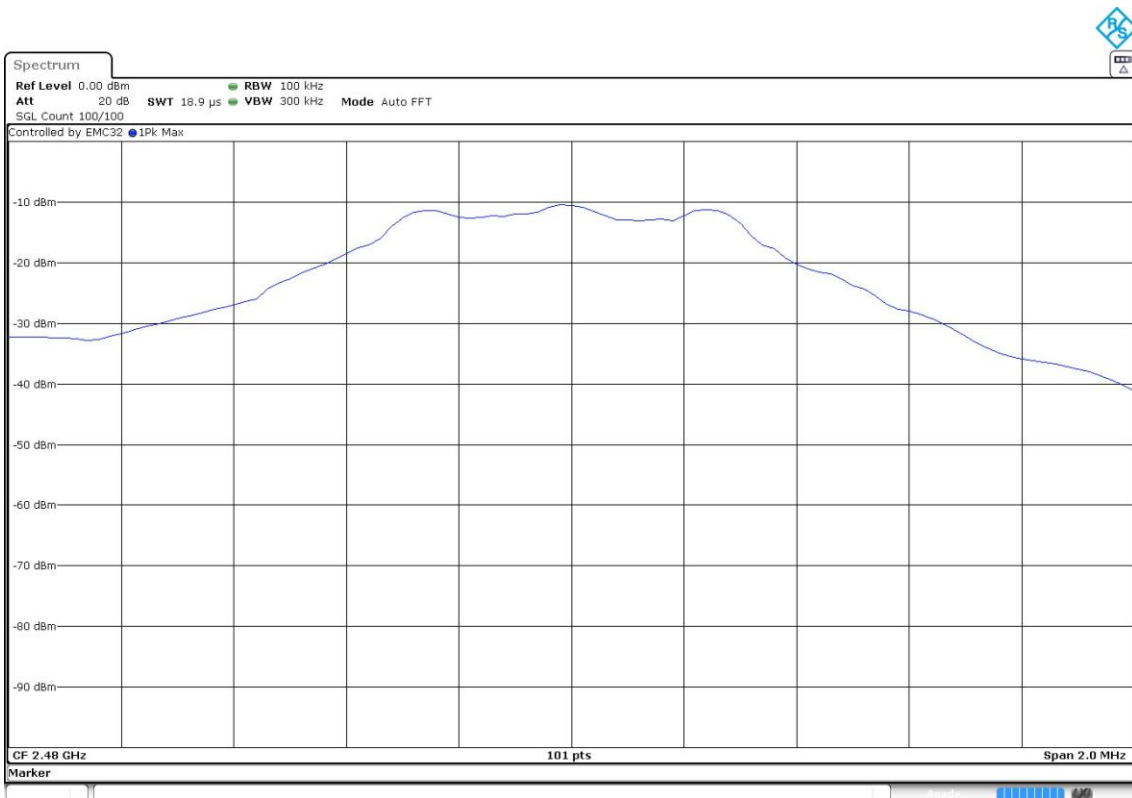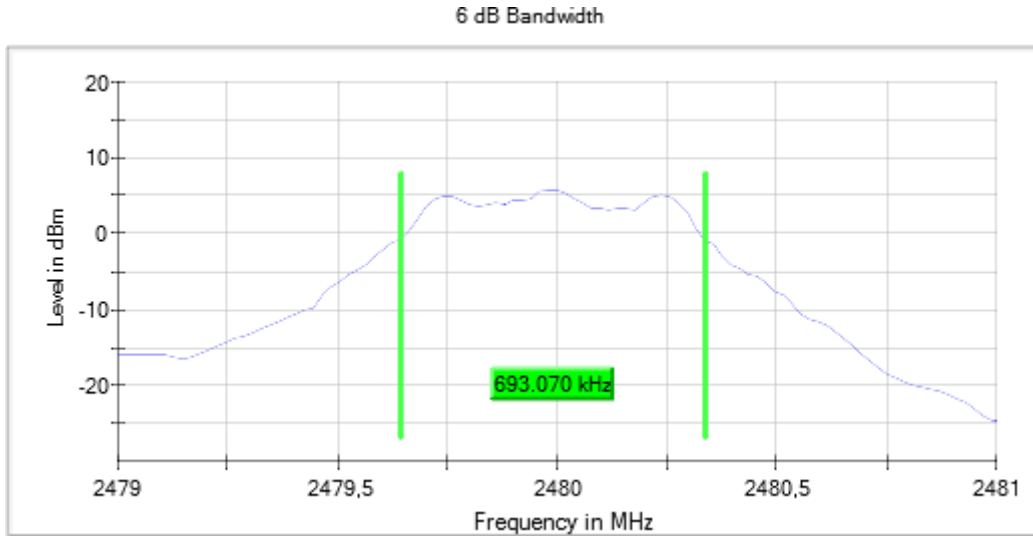

## RSS-247 5.2 (b) / FCC 15.247 (e) Power spectral density

### Limits

For digitally modulated systems, the power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission.

### Results

Modulation: BTLE 4.2 (GFSK 1 Mbit/s)

| Freq (MHz) | Measured Freq (MHz) | PSD (dBm) |
|------------|---------------------|-----------|
| 2402.00000 | 2401.99750          | -0.119    |
| 2440.00000 | 2439.98750          | -0.008    |
| 2480.00000 | 2479.98750          | -0.052    |



### Verdict

Pass

**Attachments**

Equipment Type = Digital Transmission System (DTS)    Bandwidth MHz = 1  
 Modulation = BTLE 4.2 (GFSK 1 Mbit/s)                      Frequency MHz = 2402.00000  
 Number of Transmission Chains = 1                              Active Port = 1



**Images:**

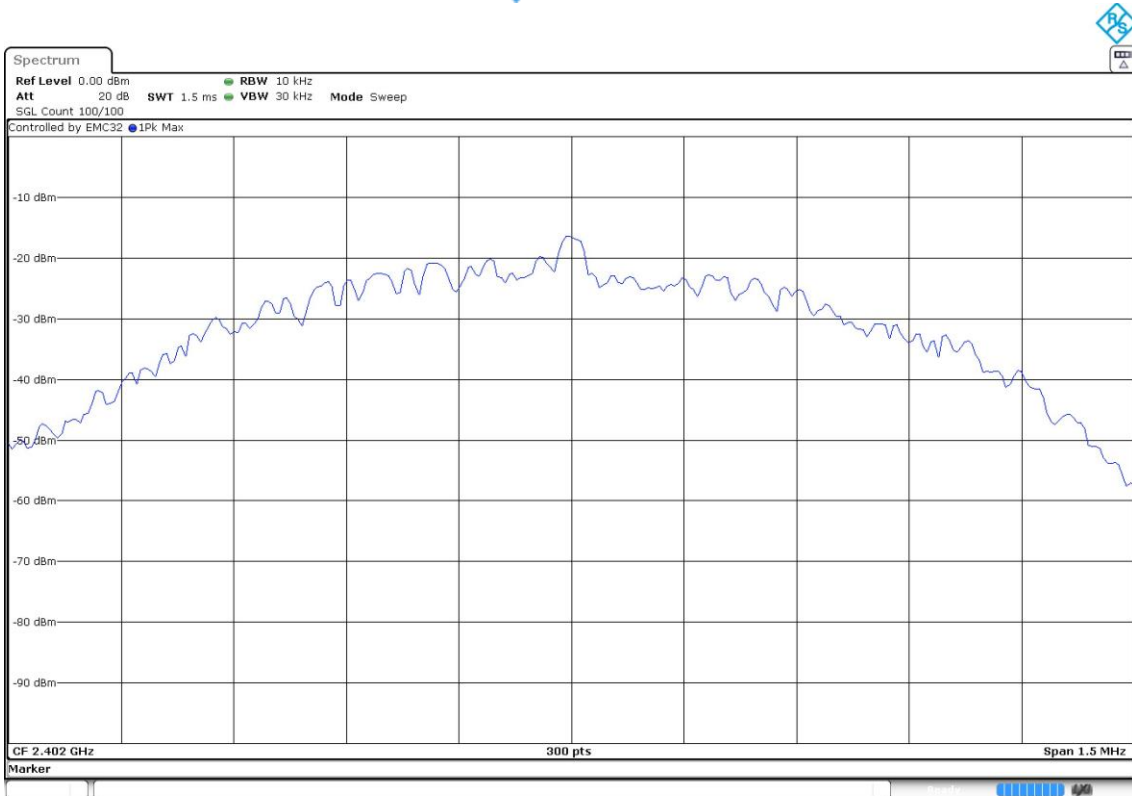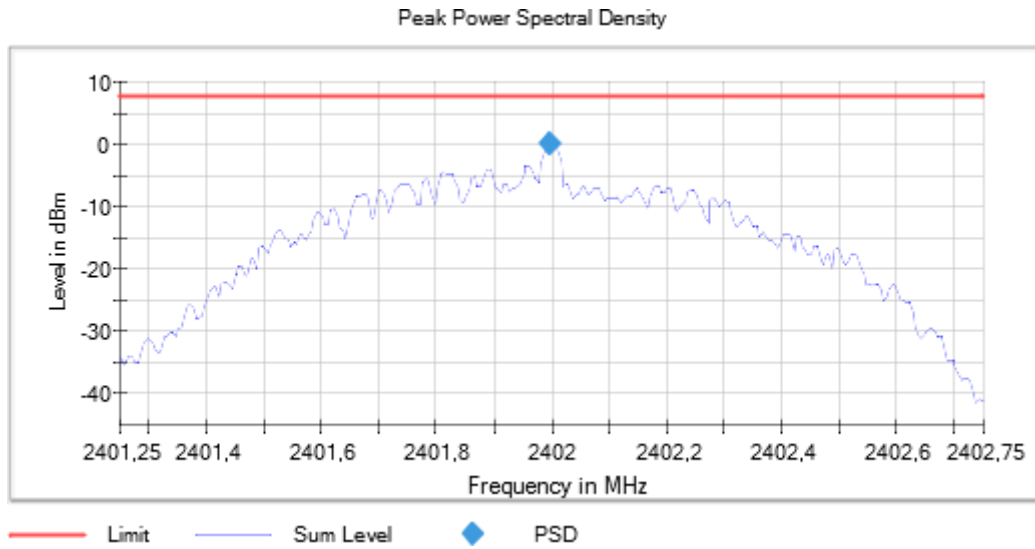





Equipment Type = Digital Transmission System (DTS)    Bandwidth MHz = 1  
Modulation = BTLE 4.2 (GFSK 1 Mbit/s)                      Frequency MHz = 2440.00000  
Number of Transmission Chains = 1                              Active Port = 1

Images:

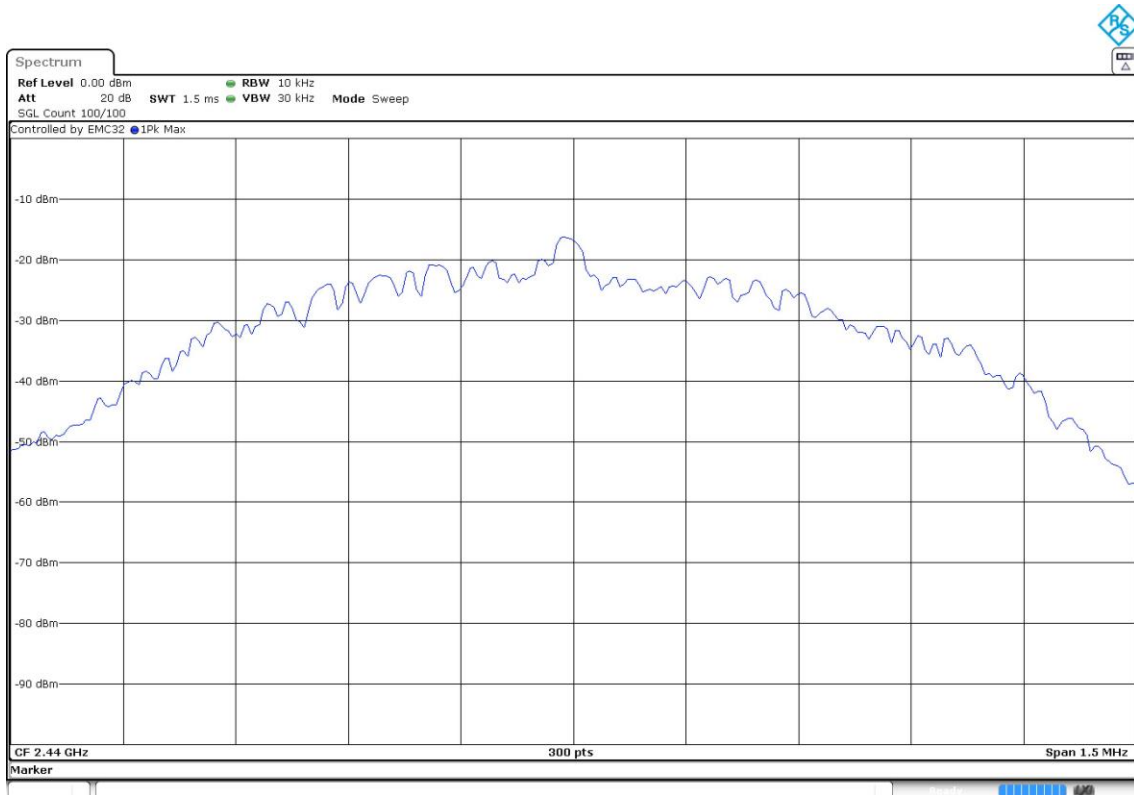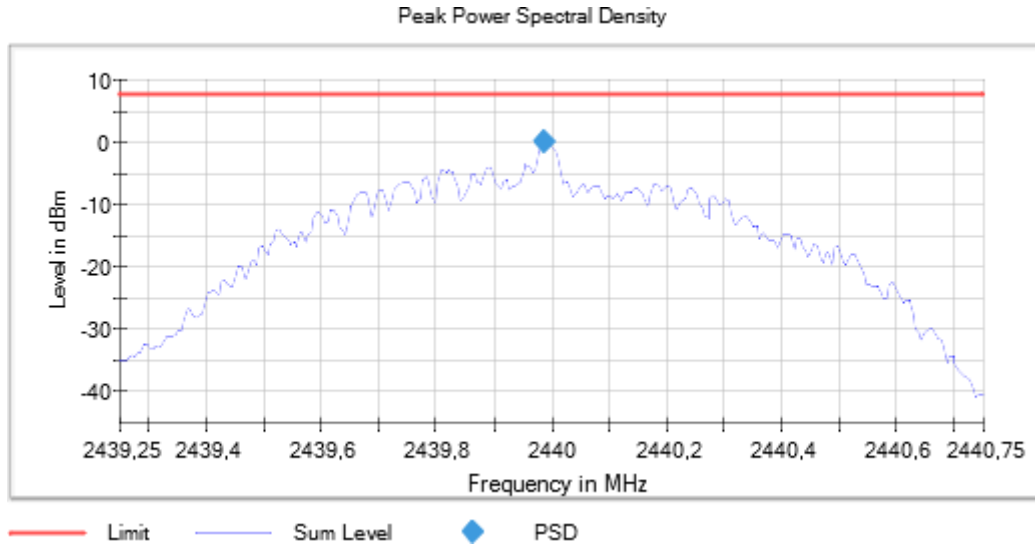

Equipment Type = Digital Transmission System (DTS)    Bandwidth MHz = 1  
Modulation = BTLE 4.2 (GFSK 1 Mbit/s)                      Frequency MHz = 2480.00000  
Number of Transmission Chains = 1                              Active Port = 1

Images:

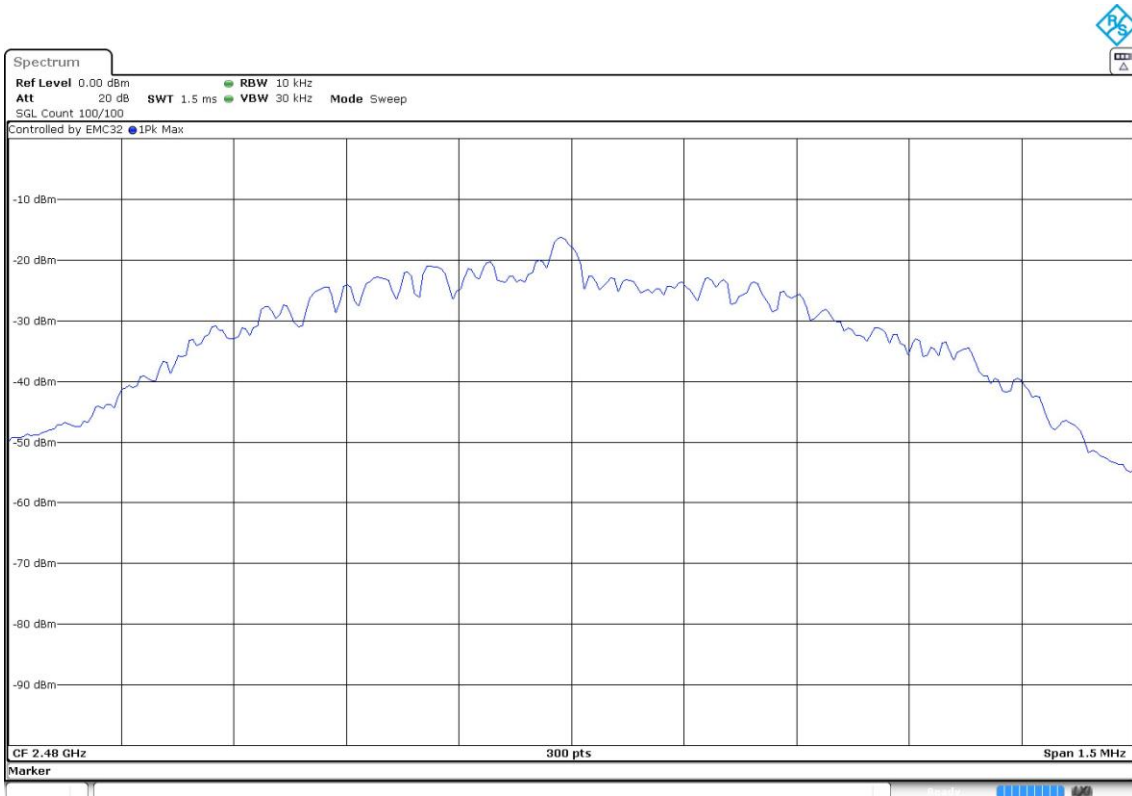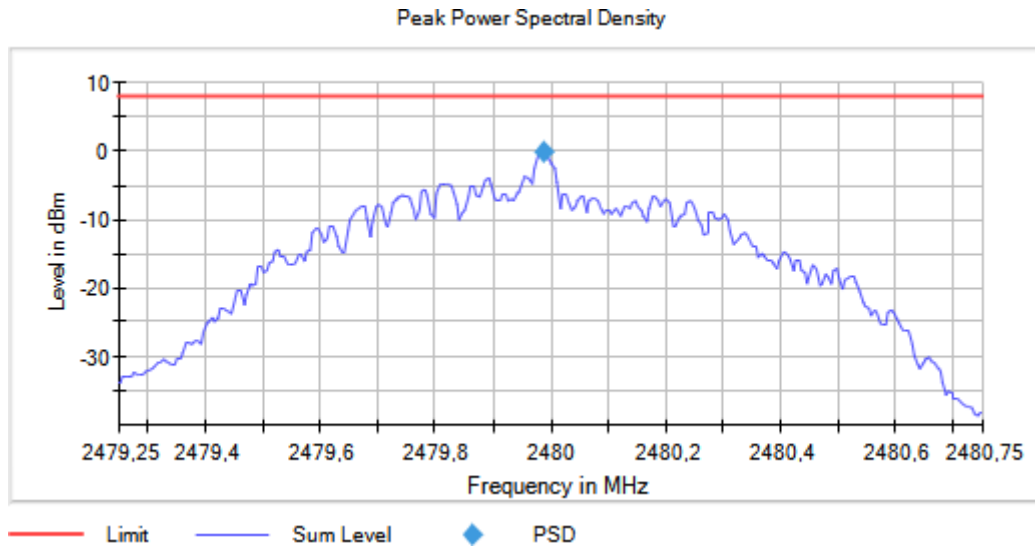

## RSS-247 5.4 (d) / FCC 15.247 (b) (3) Maximum Peak Conducted output power

### Limits

For systems using digital modulation in the 2400-2483.5 MHz band: 1 watt (30 dBm).  
The e.i.r.p. shall not exceed 4 W (36 dBm) (RSS-247).

The maximum peak conducted output power level in the fundamental emission was measured using the method according to point 11.9.1.1 "RBW  $\geq$  DTS bandwidth" of ANSI C.63.10-2013.

The EIRP power (dBm) is calculated by adding the declared maximum antenna gain to the measured conducted power.

Maximum Declared Antenna Gain: +1.5 dBi

### Results

Modulation: BTLE 4.2 (GFSK 1 Mbit/s)

| Freq (MHz) | Maximum Conducted Power (dBm) | Maximum EIRP Power (dBm) |
|------------|-------------------------------|--------------------------|
| 2402.00000 | 6.063                         | 7.563                    |
| 2440.00000 | 6.037                         | 7.537                    |
| 2480.00000 | 5.894                         | 7.394                    |



### Verdict

Pass

**Attachments**



Equipment Type = Digital Transmission System (DTS)    Bandwidth MHz = 1  
Modulation = BTLE 4.2 (GFSK 1 Mbit/s)                      Frequency MHz = 2402.00000  
Number of Transmission Chains = 1                              Active Port = 1

**Images:**

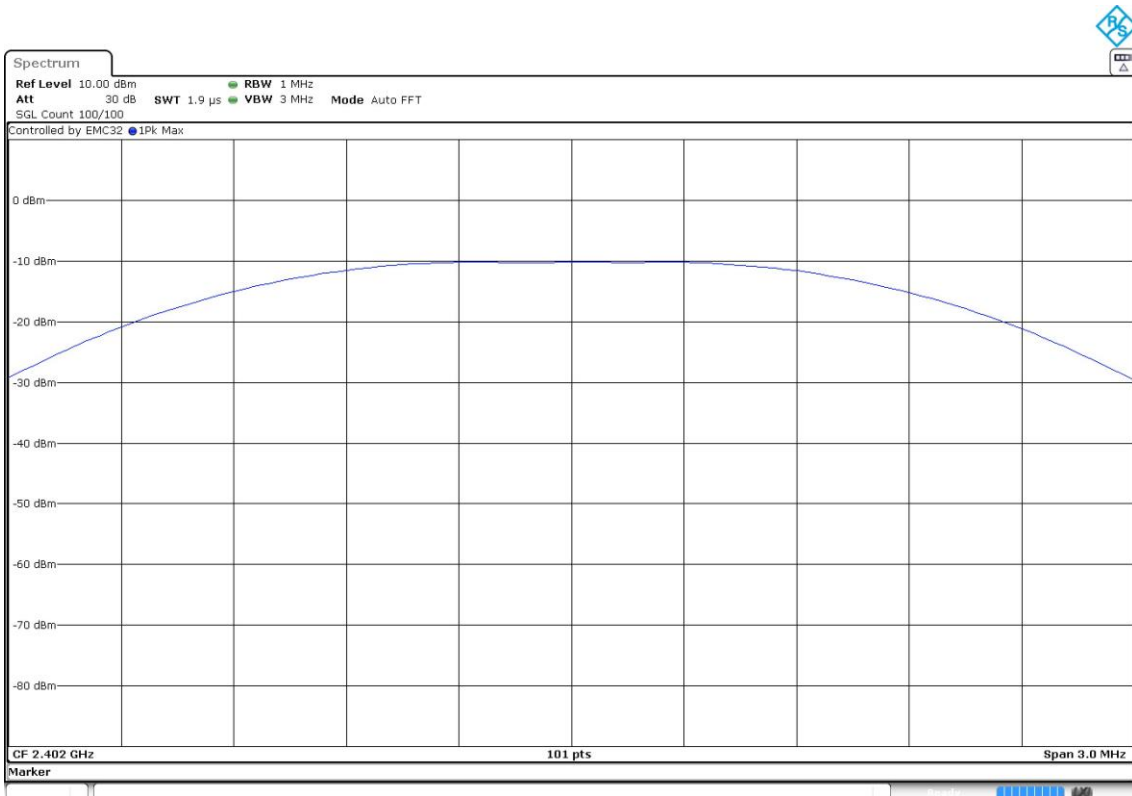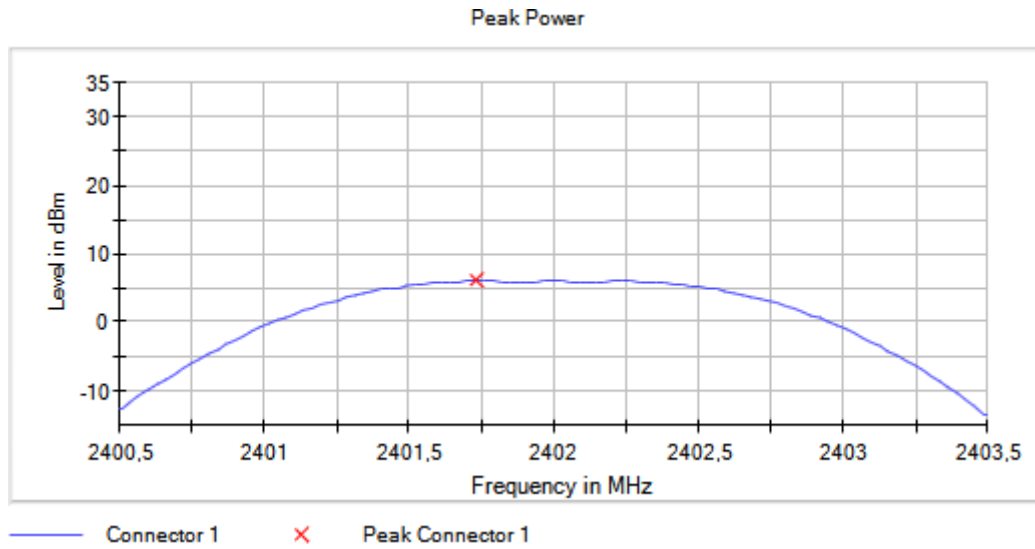



Equipment Type = Digital Transmission System (DTS) Bandwidth MHz = 1  
Modulation = BTLE 4.2 (GFSK 1 Mbit/s) Frequency MHz = 2440.00000  
Number of Transmission Chains = 1 Active Port = 1

Images:

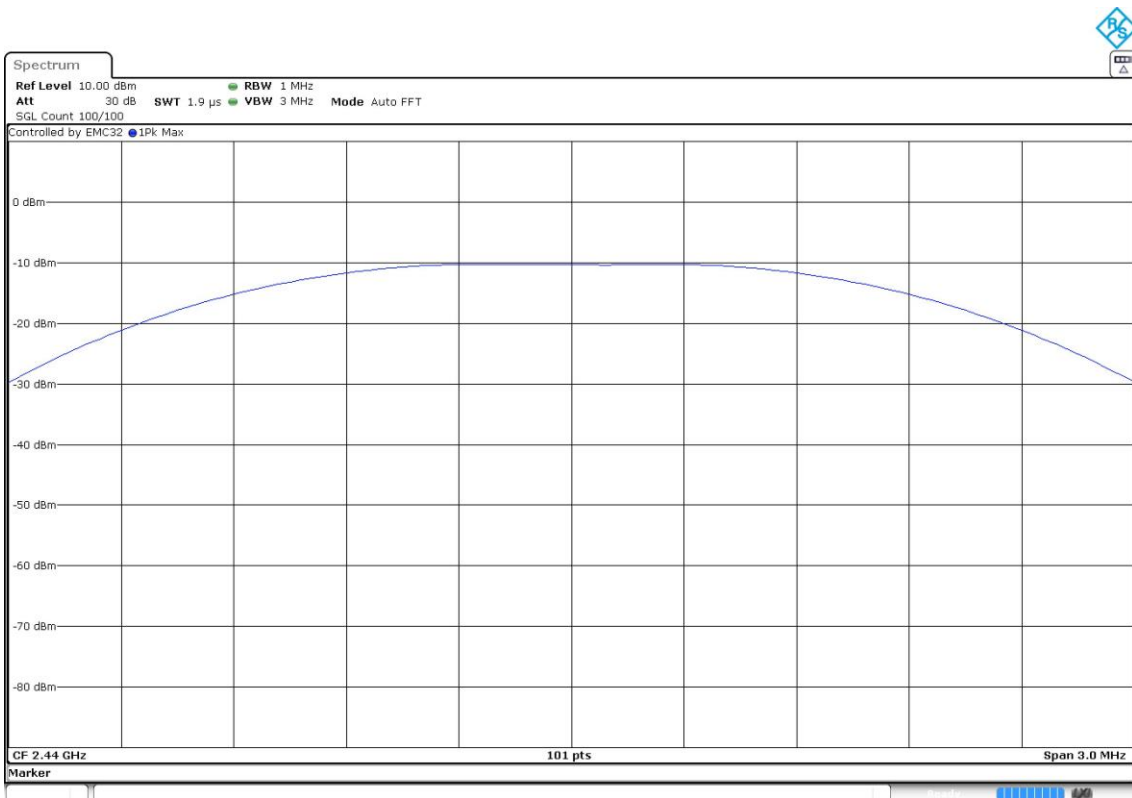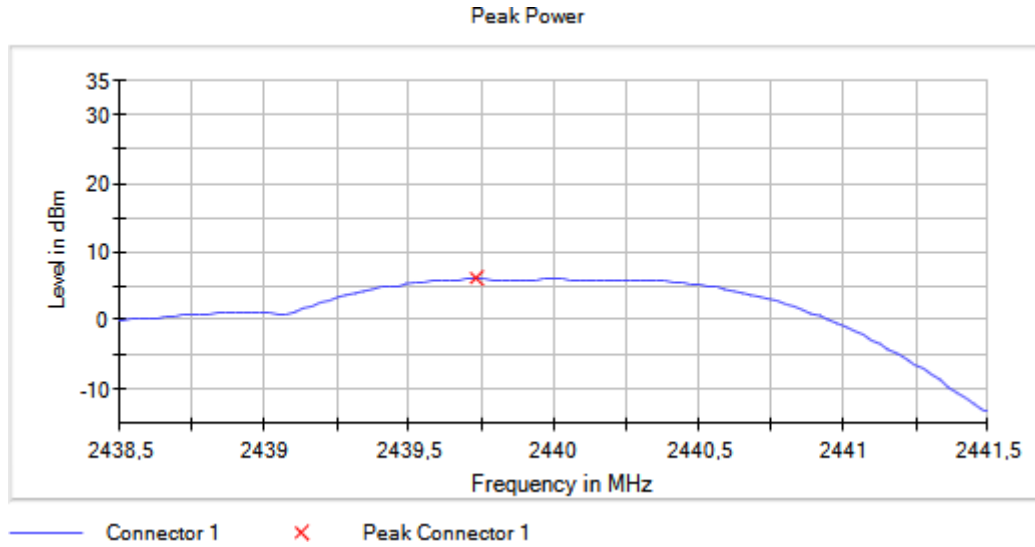

Equipment Type = Digital Transmission System (DTS) Bandwidth MHz = 1  
 Modulation = BTLE 4.2 (GFSK 1 Mbit/s) Frequency MHz = 2480.00000  
 Number of Transmission Chains = 1 Active Port = 1

Images:

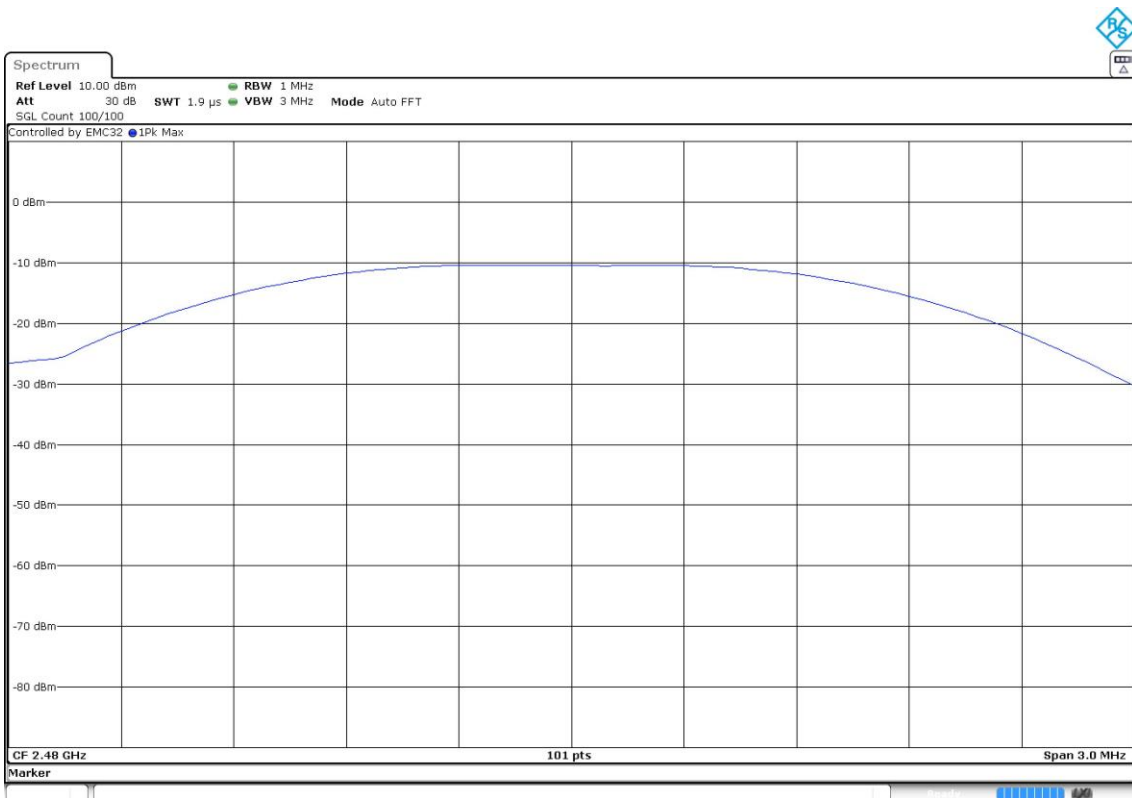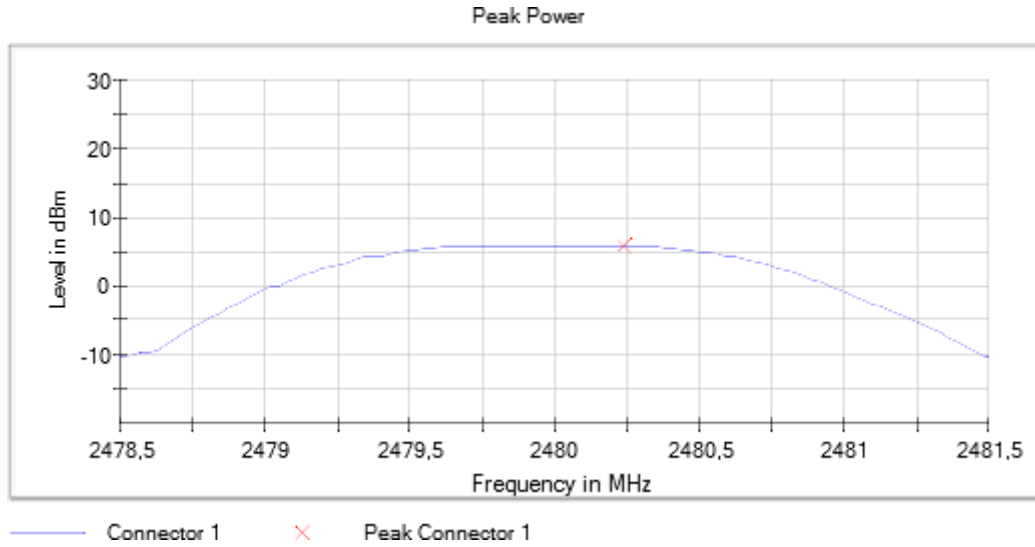

## RSS-247 5.5 / FCC 15.247 (d) Band-edge emissions compliance (Transmitter)

### Limits

In any 100 kHz bandwidths outside the frequency band in which the intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, the attenuation required under this paragraph shall be 30 dB instead of 20 dB.

### Results

Radiated measurements were used to show compliance with the limits in the restricted bands 2.31-2.39 GHz and 2.4835-2.5 GHz.

Modulation: BTLE 4.2 (GFSK 1 Mbit/s)

| Freq (MHz)  | Inband Peak Level (dBm) | Measured Freq (MHz) | Level (dBm) | Limit (dBm) |
|-------------|-------------------------|---------------------|-------------|-------------|
| 2402.00000  | 5.839                   | 2399.975000         | -31.018     | -14.161     |
|             |                         | 2399.925000         | -32.555     |             |
|             |                         | 2399.875000         | -34.226     |             |
|             |                         | 2399.825000         | -35.846     |             |
|             |                         | 2399.775000         | -37.155     |             |
|             |                         | 2399.725000         | -38.179     |             |
|             |                         | 2399.675000         | -39.204     |             |
|             |                         | 2399.625000         | -40.335     |             |
|             |                         | 2399.575000         | -41.302     |             |
|             |                         | 2399.525000         | -43.013     |             |
|             |                         | 2399.475000         | -45.693     |             |
|             |                         | 2399.175000         | -48.990     |             |
|             |                         | 2399.225000         | -49.021     |             |
|             |                         | 2399.125000         | -49.384     |             |
| 2399.275000 | -49.521                 |                     |             |             |

| Freq (MHz) | Inband Peak Level (dBm) | Measured Freq (MHz) | Level (dBm) | Limit (dBm) |
|------------|-------------------------|---------------------|-------------|-------------|
| 2480.00000 | 5.579                   | 2483.775000         | -50.127     | -14.421     |
|            |                         | 2483.725000         | -50.331     |             |
|            |                         | 2484.625000         | -50.559     |             |
|            |                         | 2484.675000         | -50.668     |             |
|            |                         | 2484.925000         | -50.668     |             |
|            |                         | 2484.225000         | -50.738     |             |
|            |                         | 2485.875000         | -50.791     |             |
|            |                         | 2485.825000         | -50.850     |             |
|            |                         | 2484.125000         | -50.896     |             |
|            |                         | 2486.325000         | -50.901     |             |
|            |                         | 2484.275000         | -50.903     |             |
|            |                         | 2483.675000         | -50.975     |             |
|            |                         | 2483.575000         | -51.033     |             |
|            |                         | 2483.625000         | -51.057     |             |
|            |                         | 2483.825000         | -51.065     |             |

**Verdict**



Pass




### Attachments

Equipment Type = Digital Transmission System (DTS)    Bandwidth MHz = 1  
Modulation = BTLE 4.2 (GFSK 1 Mbit/s)                      Frequency MHz = 2402.00000  
Number of Transmission Chains = 1                              Measurement Point = 1  
Active Port = 1



### Images:

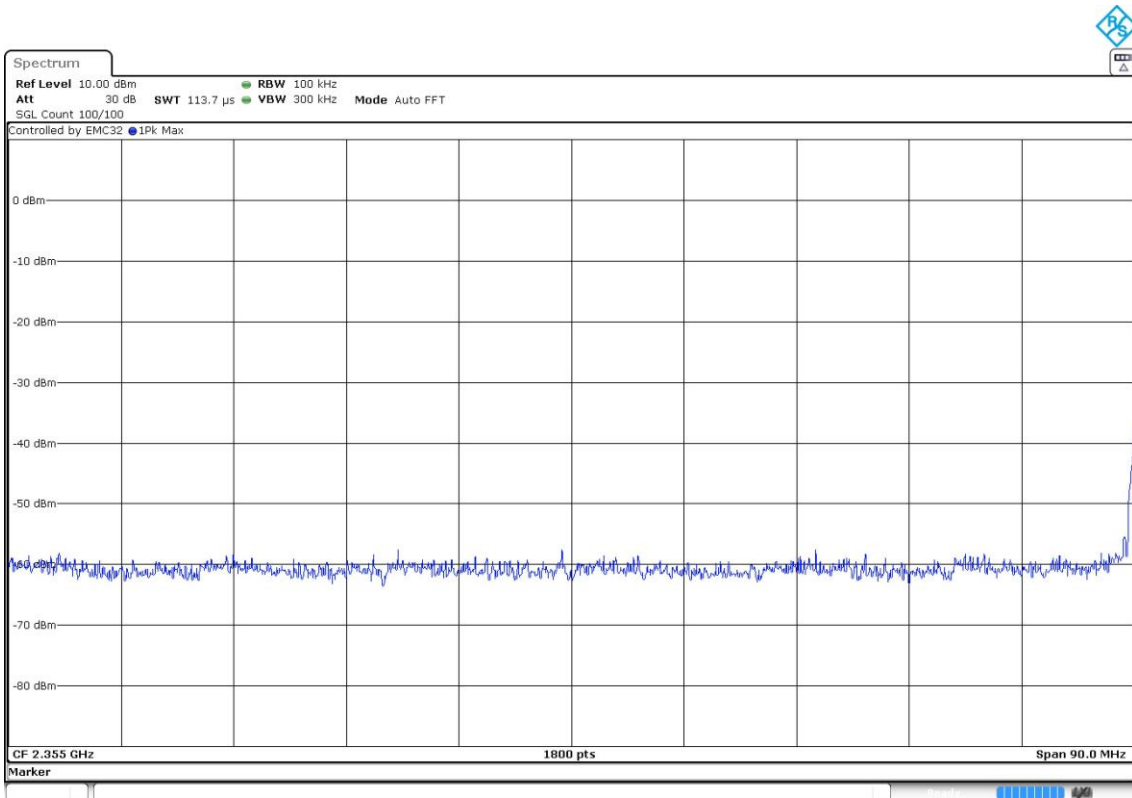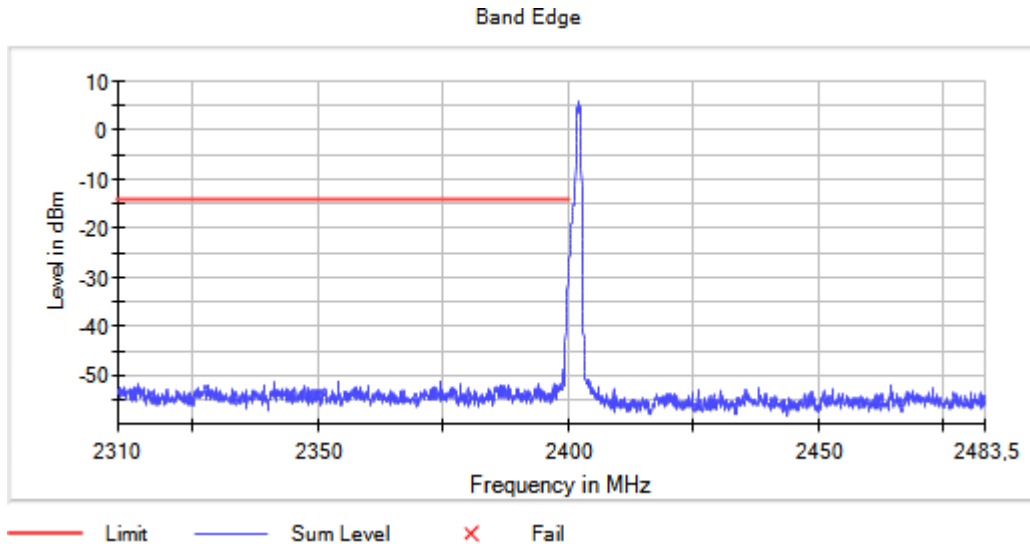


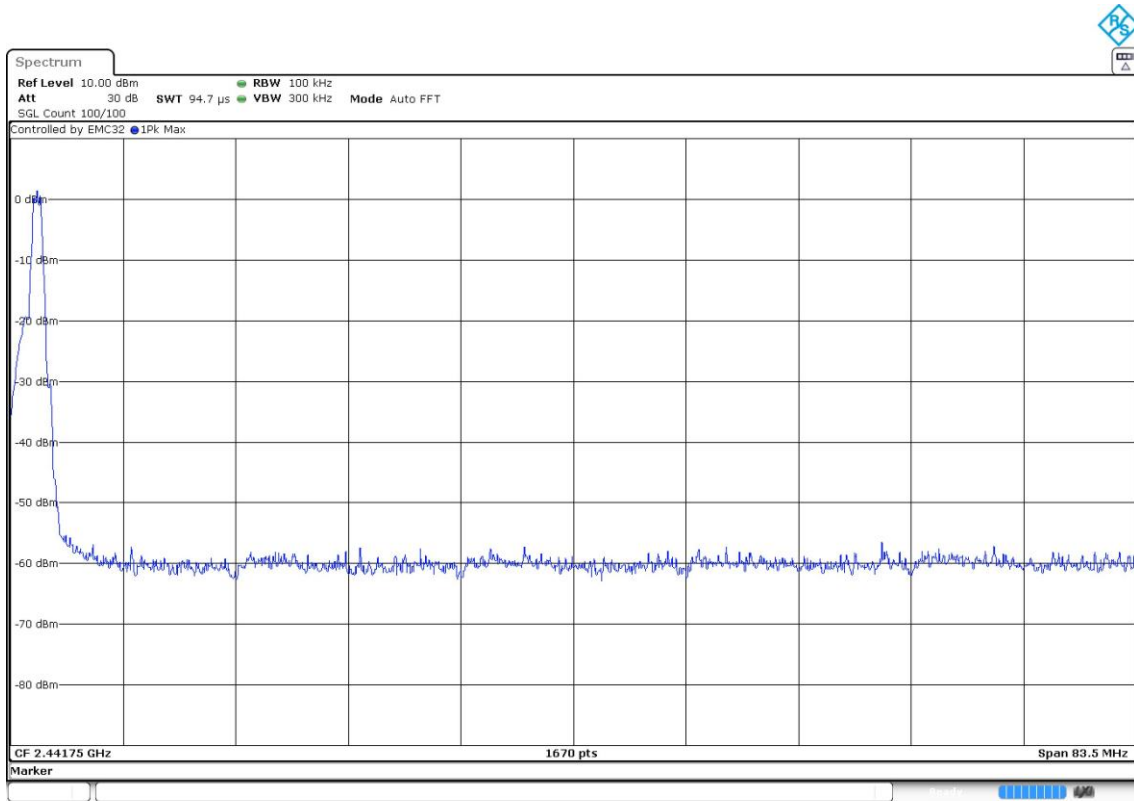

Equipment Type = Digital Transmission System (DTS)    Bandwidth MHz = 1  
Modulation = BTLE 4.2 (GFSK 1 Mbit/s)                      Frequency MHz = 2480.00000  
Number of Transmission Chains = 1                              Measurement Point = 1  
Active Port = 1

Images:

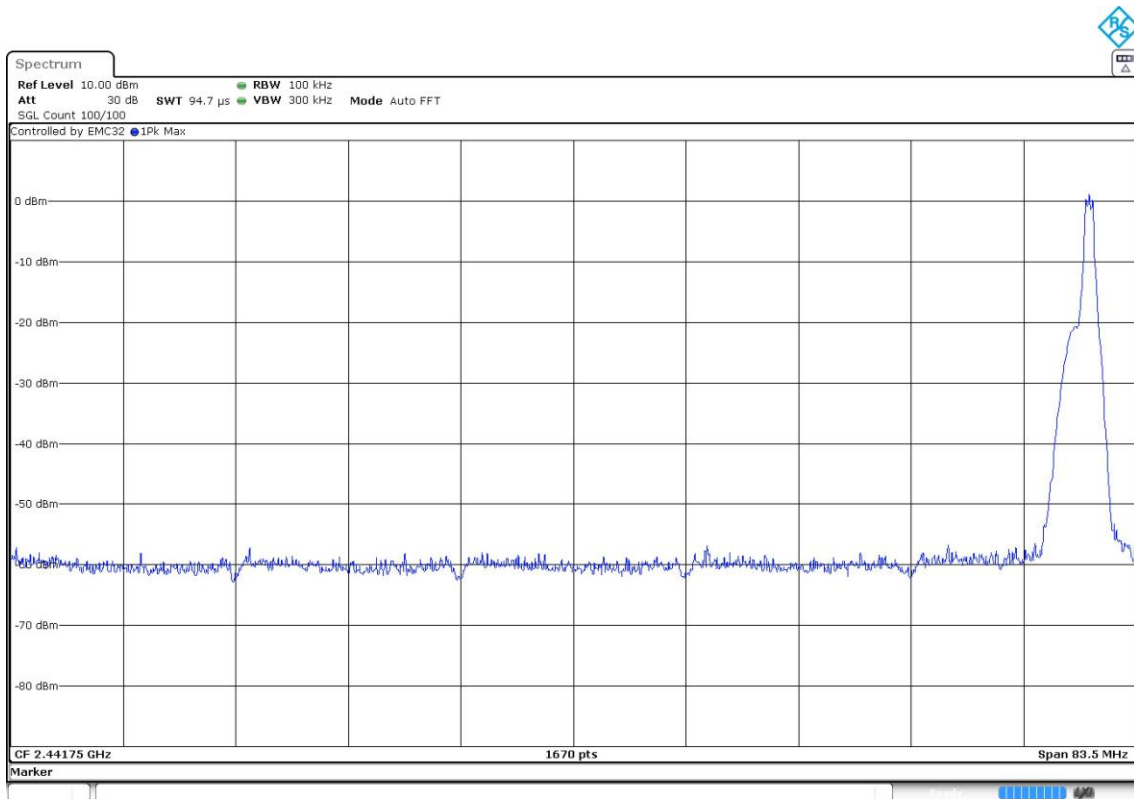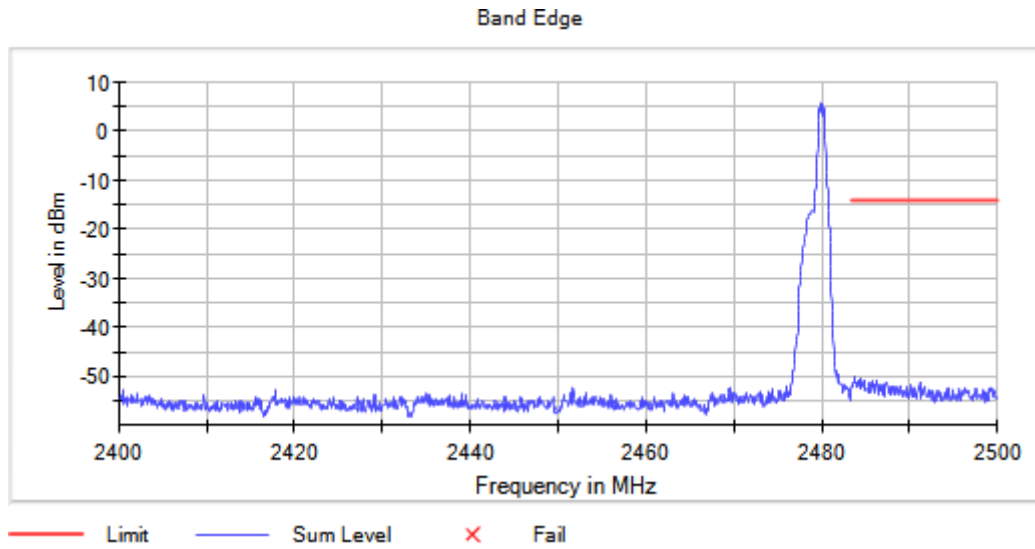

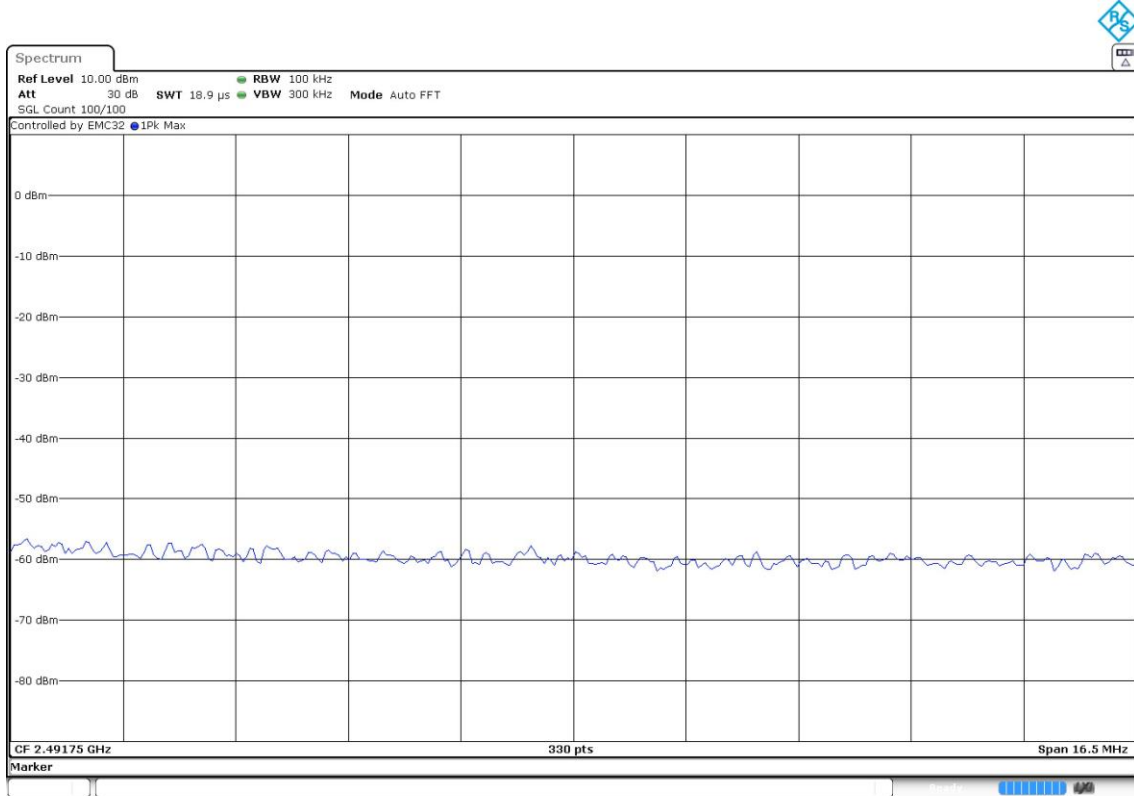

## RSS-247 5.5 / FCC 15.247 (d) Emission limitations radiated (Transmitter)

### Limits

Radiated emissions which fall in the restricted bands, as defined in Section 15.205(a), must also comply with the radiated emission limits specified in Section 15.209(a) (see Section 15.205(c)/RSS-Gen):

| Frequency Range (MHz) | Field strength ( $\mu\text{V/m}$ ) | Field strength ( $\text{dB}\mu\text{V/m}$ ) | Measurement distance (m) |
|-----------------------|------------------------------------|---|--------------------------|
| 0.009-0.490           | 2400/F(kHz)                        | -   | 300                      |
| 0.490-1.705           | 24000/F(kHz)                       | -   | 30                       |
| 1.705 - 30.0          | 30                                 | -   | 30                       |
| 30 - 88               | 100                                | 40  | 3                        |
| 88 - 216              | 150                                | 43.5  | 3                        |
| 216 - 960             | 200                                | 46  | 3                        |
| Above 960             | 500                                | 54  | 3                        |

The emission limits shown in the above table are based on measurements employing CISPR quasi-peak detector except for the frequency bands 9-90 kHz, 110-490 kHz and above 1000 MHz. Radiated emission limits in these three bands are based on measurements employing an average detector.

For average radiated emission measurements above 1000 MHz, there is also a limit corresponding to 20 dB above the indicated values in the table is specified when measuring with peak detector function.

RSS-247: Attenuation below the general field strength limits specified in RSS-Gen is not required.

### Results

Modulation: BTLE 4.2 (GFSK 1 Mbit/s)

#### Frequency range 30 MHz – 1 GHz:

The spurious signals detected do not depend on the operating channel.

No spurious frequencies detected at less than 20 dB below the limit.

### Frequency range 1 GHz – 26 GHz:

The results below show the maximum measured levels in the 1 – 26 GHz range including the restricted bands 2.31 – 2.39 GHz and 2.4835 – 2.5 GHz.

Spurious frequencies with peak levels above the average limit (54 dB $\mu$ V/m at 3 m) are measured with average detector for compliance checking with the average limit.

- Low Channel:

Spurious frequencies found at less than 20 dB below the limit:

| Unwanted Freq (MHz) | Unwanted Lvl (dB $\mu$ V/m) | Pol | Detector |
|---------------------|-----------------------------|-----|----------|
| 4803.340            | 43.20                       | V   | PK       |
| 7205.740            | 52.84                       | V   | PK       |

- Middle Channel:

Spurious frequencies found at less than 20 dB below the limit:

| Unwanted Freq (MHz) | Unwanted Lvl (dB $\mu$ V/m) | Pol | Detector |
|---------------------|-----------------------------|-----|----------|
| 4879.920            | 45.34                       | V   | PK       |
| 7319.560            | 53.07                       | V   | PK       |

- High Channel:

Spurious frequencies found at less than 20 dB below the limit:

| Unwanted Freq (MHz) | Unwanted Lvl (dB $\mu$ V/m) | Pol | Detector |
|---------------------|-----------------------------|-----|----------|
| 4960.280            | 46.99                       | V   | PK       |
| 7439.680            | 53.01                       | V   | PK       |


### Verdict

Pass

**Attachments**

Frequency Range GHz = [0.03, 1]      Equipment Type = Digital Transmission System (DTS)  
 Modulation = BTLE 4.2 (GFSK 1 Mbit/s)  
 Number of Transmission Chains = 1      Measurement Point = 1  
 Active Port = 1

**Images:**

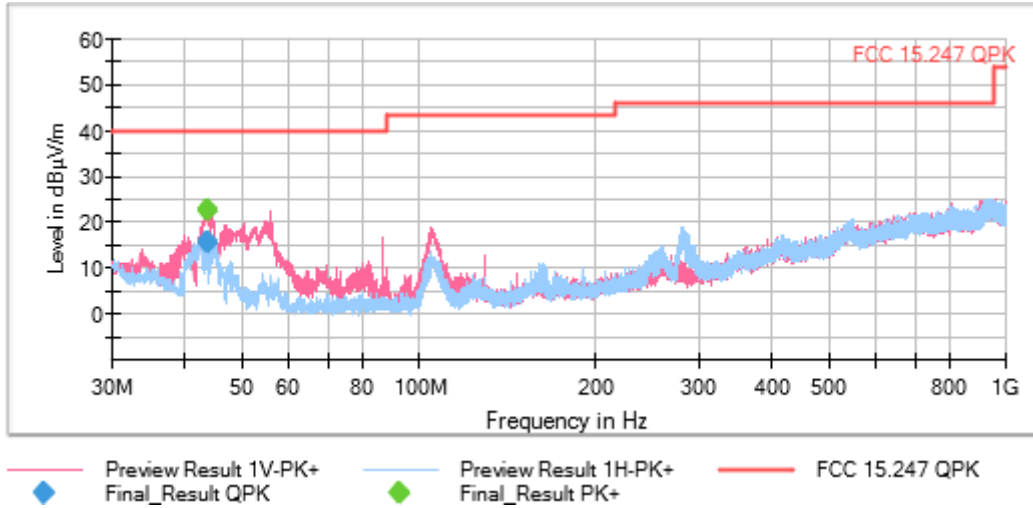

This plot is valid for all channels


**Tables:**

Spectrum Analyzer Parameters

|  | Subrange           | Step Size  | Detectors | Bandwidth | Sweep Time | Preamp |
|--|--------------------|------------|-----------|-----------|------------|--------|
|  | Receiver: [ESW 44] |            |           |           |            |        |
|  | 30 MHz - 1 GHz     | 30,312 kHz | PK+       | 100 kHz   | 1 s        | 0 dB   |


Frequency Range GHz = [1, 3]      Equipment Type = Digital Transmission System (DTS)  
 Modulation = BTLE 4.2 (GFSK 1 Mbit/s)      Frequency MHz = 2402.00000  
 Number of Transmission Chains = 1      Measurement Point = 1  
 Active Port = 1

**Images:**

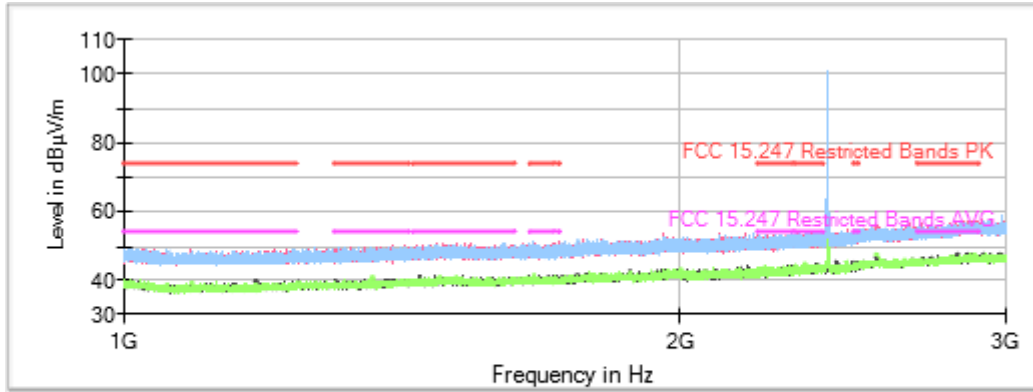

- Preview Result 2V-AVG
- Preview Result 2H-AVG
- FCC 15.247 Restricted Bands PK
- ◆ Final\_Result PK+
- Preview Result 1V-PK+
- Preview Result 1H-PK+
- FCC 15.247 Restricted Bands AVG
- ◆ Final\_Result AVG

Full Spectrum

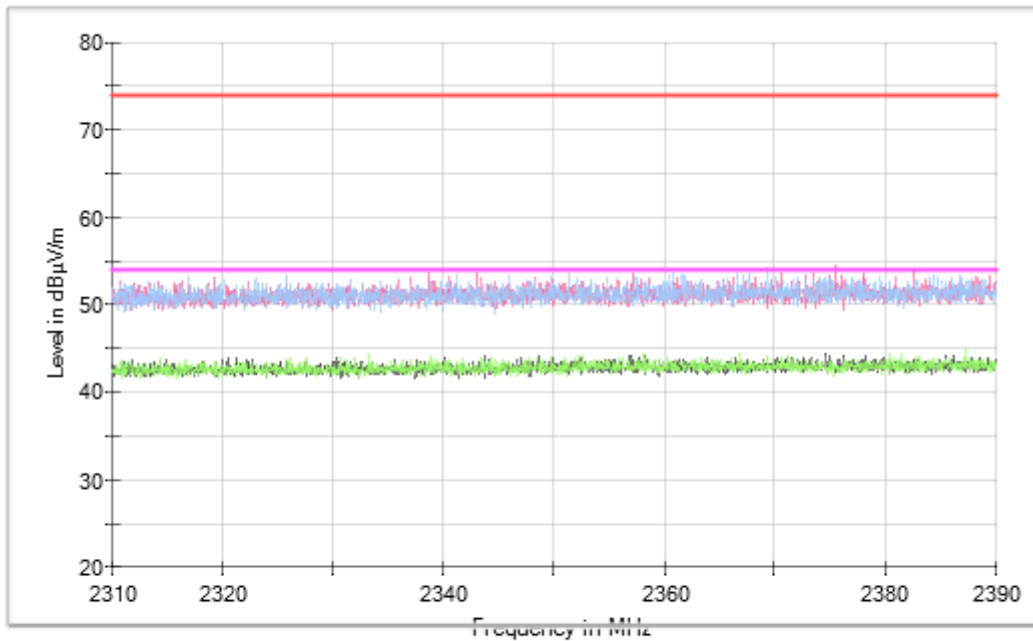

- Preview Result 2V-AVG
- Preview Result 2H-AVG
- FCC 15.247 Restricted Bands PK
- ◆ Final\_Result PK+
- Preview Result 1V-PK+
- Preview Result 1H-PK+
- FCC 15.247 Restricted Bands AVG
- ◆ Final\_Result AVG






**Tables:**

Spectrum Analyzer Parameters

|  | Subrange           | Step Size  | Detectors | Bandwidth | Sweep Time | Preamp |
|--|--------------------|------------|-----------|-----------|------------|--------|
|  | Receiver: [ESW 44] |            |           |           |            |        |
|  | 1 GHz - 3 GHz      | 30,769 kHz | PK+ ; AVG | 1 MHz     | 1 s        | 0 dB   |


Frequency Range GHz = [1, 3]      Equipment Type = Digital Transmission System (DTS)  
 Modulation = BTLE 4.2 (GFSK 1 Mbit/s)      Frequency MHz = 2440.00000  
 Number of Transmission Chains = 1      Measurement Point = 1  
 Active Port = 1

Images:

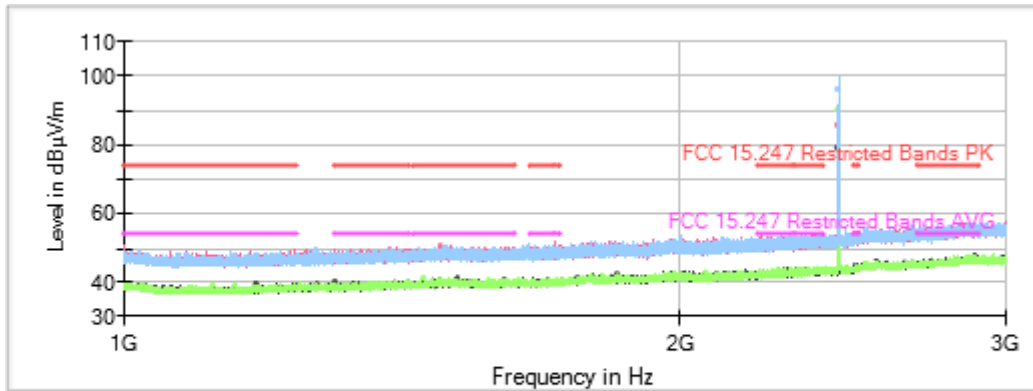


- Preview Result 2V-AVG
- Preview Result 2H-AVG
- FCC 15.247 Restricted Bands PK
- ◆ Final\_Result PK+
- Preview Result 1V-PK+
- Preview Result 1H-PK+
- FCC 15.247 Restricted Bands AVG
- ◆ Final\_Result AVG

Full Spectrum

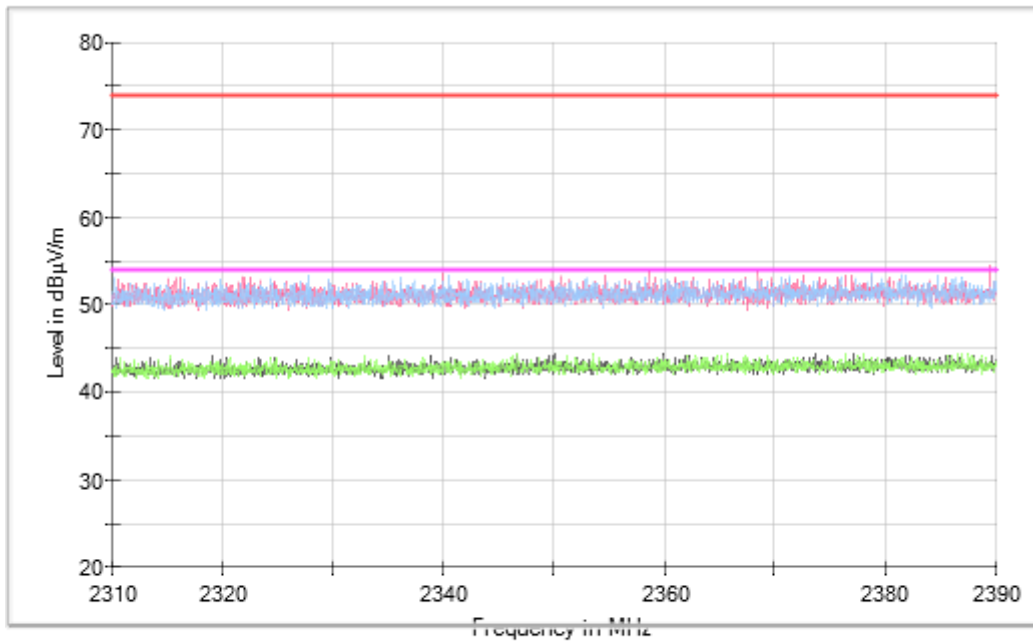

- Preview Result 2V-AVG
- Preview Result 2H-AVG
- FCC 15.247 Restricted Bands PK
- ◆ Final\_Result PK+
- Preview Result 1V-PK+
- Preview Result 1H-PK+
- FCC 15.247 Restricted Bands AVG
- ◆ Final\_Result AVG

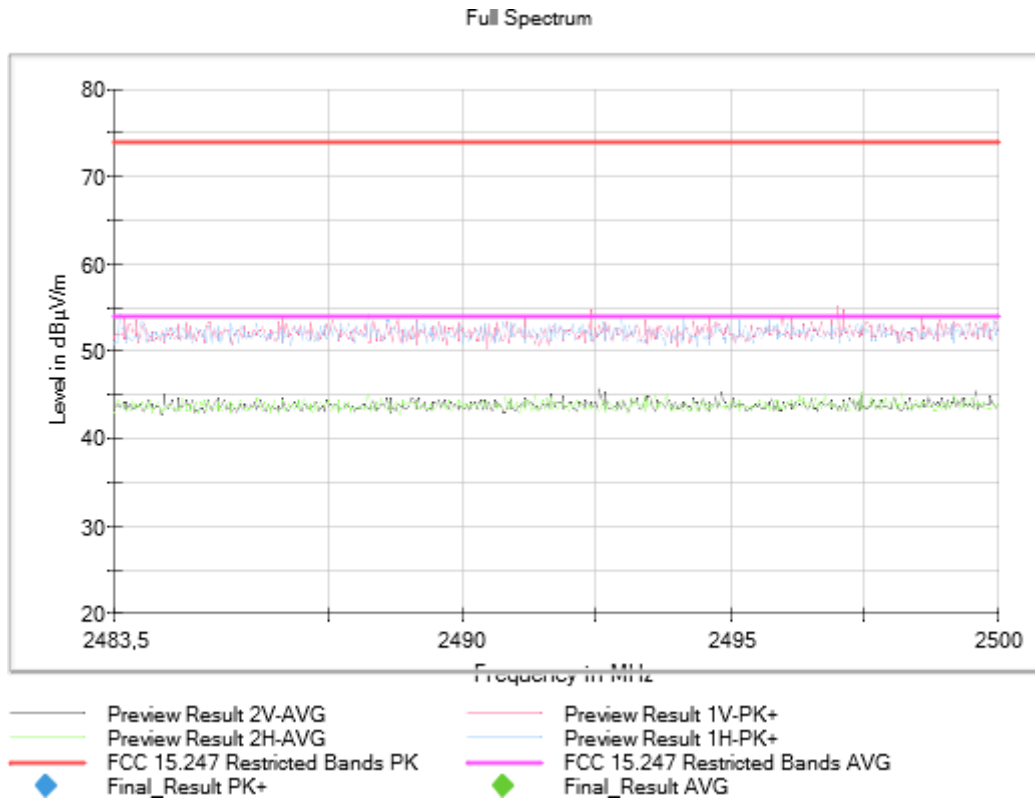


**Tables:**

Spectrum Analyzer Parameters

|  | Subrange           | Step Size  | Detectors | Bandwidth | Sweep Time | Preamp |
|--|--------------------|------------|-----------|-----------|------------|--------|
|  | Receiver: [ESW 44] |            |           |           |            |        |
|  | 1 GHz - 3 GHz      | 30,769 kHz | PK+ ; AVG | 1 MHz     | 1 s        | 0 dB   |


Frequency Range GHz = [1, 3]      Equipment Type = Digital Transmission System (DTS)  
 Modulation = BTLE 4.2 (GFSK 1 Mbit/s)      Frequency MHz = 2480.00000  
 Number of Transmission Chains = 1      Measurement Point = 1  
 Active Port = 1

**Images:**

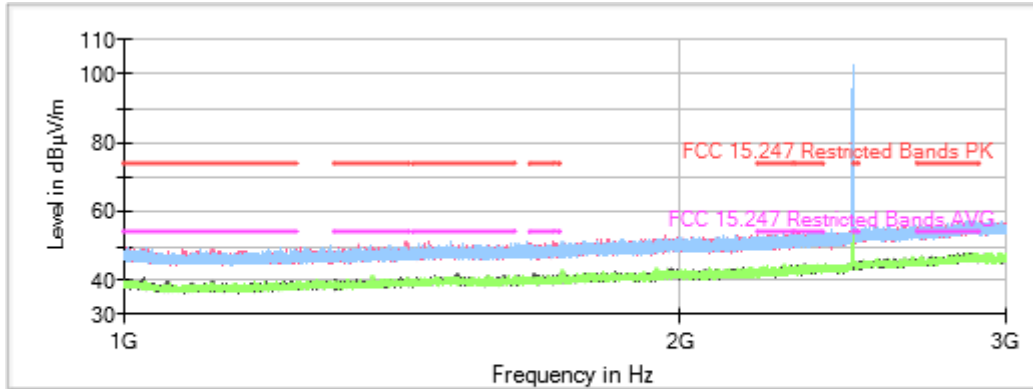


- Preview Result 2V-AVG
- Preview Result 2H-AVG
- FCC 15.247 Restricted Bands PK
- ◆ Final\_Result PK+
- Preview Result 1V-PK+
- Preview Result 1H-PK+
- FCC 15.247 Restricted Bands AVG
- ◆ Final\_Result AVG

Full Spectrum

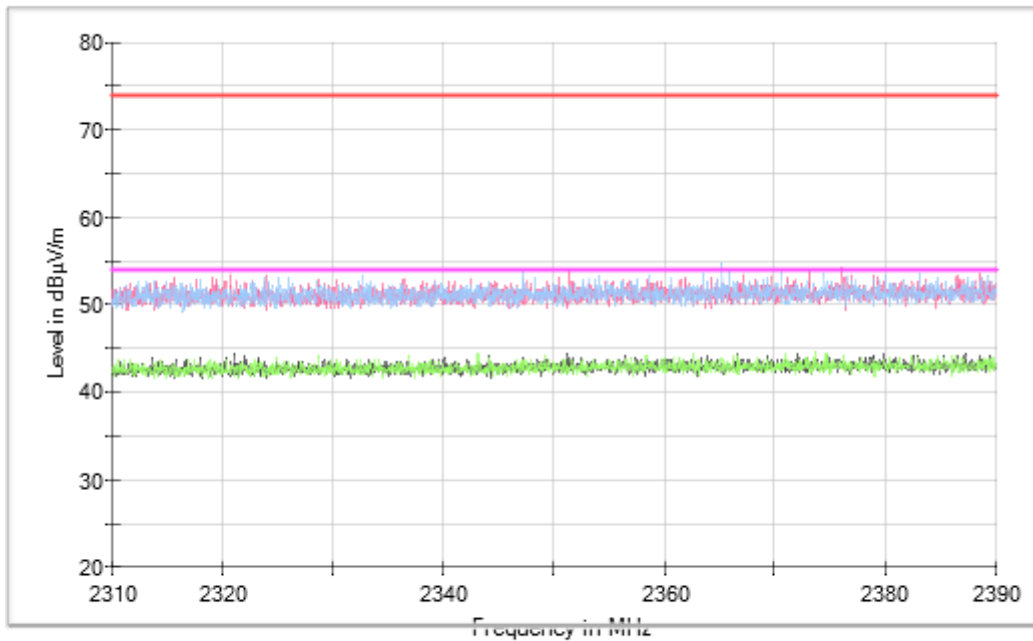

- Preview Result 2V-AVG
- Preview Result 2H-AVG
- FCC 15.247 Restricted Bands PK
- ◆ Final\_Result PK+
- Preview Result 1V-PK+
- Preview Result 1H-PK+
- FCC 15.247 Restricted Bands AVG
- ◆ Final\_Result AVG

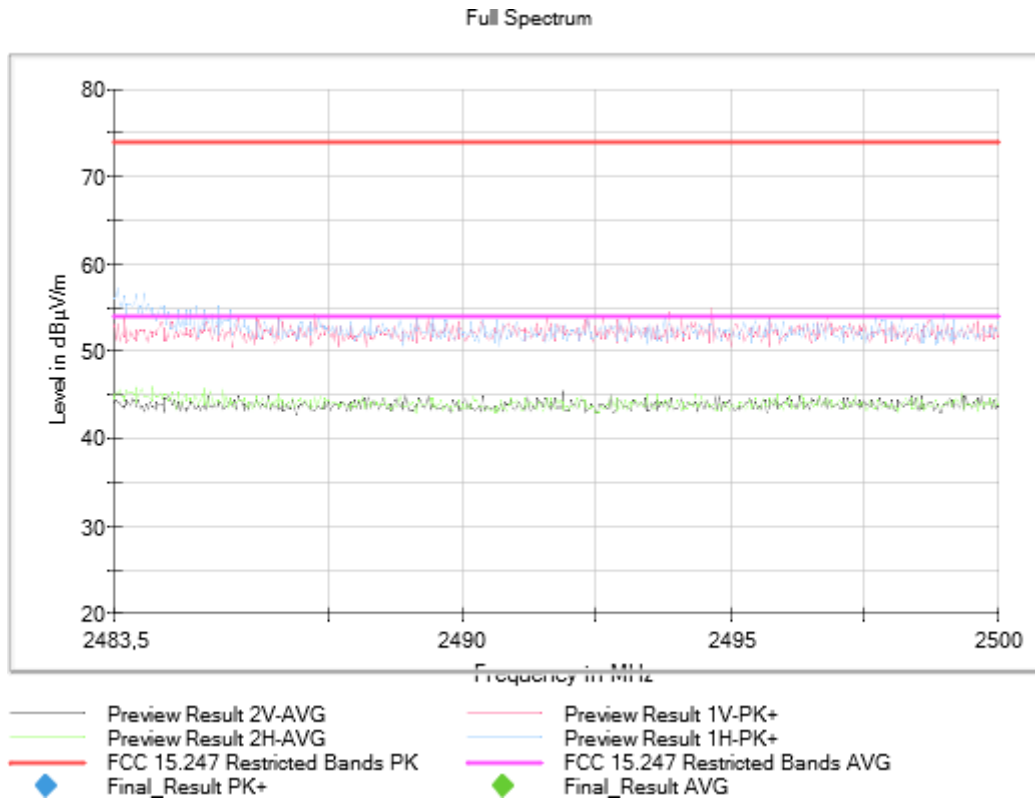


**Tables:**

Spectrum Analyzer Parameters

|  | Subrange           | Step Size  | Detectors | Bandwidth | Sweep Time | Preamp |
|--|--------------------|------------|-----------|-----------|------------|--------|
|  | Receiver: [ESW 44] |            |           |           |            |        |
|  | 1 GHz - 3 GHz      | 30,769 kHz | PK+ ; AVG | 1 MHz     | 1 s        | 0 dB   |

Frequency Range GHz = [3, 17]      Equipment Type = Digital Transmission System (DTS)  
 Modulation = BTLE 4.2 (GFSK 1 Mbit/s)      Frequency MHz = 2402.00000  
 Number of Transmission Chains = 1      Measurement Point = 1  
 Active Port = 1

**Images:**

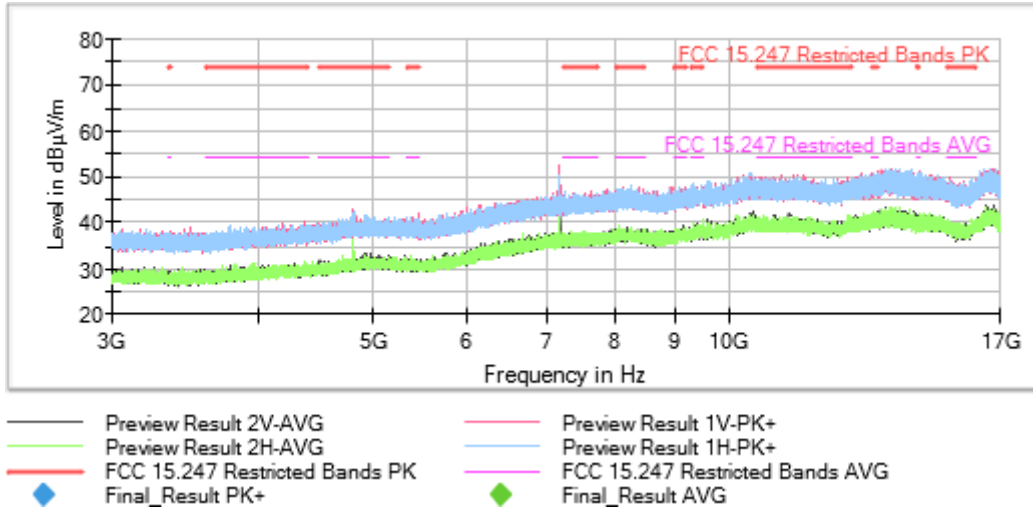


**Tables:**

Spectrum Analyzer Parameters

|  | Subrange           | Step Size | Detectors | Bandwidth | Sweep Time | Preamp |
|--|--------------------|-----------|-----------|-----------|------------|--------|
|  | Receiver: [ESW 44] |           |           |           |            |        |
|  | 3 GHz - 17 GHz     | 140 kHz   | PK+ ; AVG | 1 MHz     | 1 s        | 30 dB  |

Frequency Range GHz = [3, 17]      Equipment Type = Digital Transmission System (DTS)  
 Modulation = BTLE 4.2 (GFSK 1 Mbit/s)      Frequency MHz = 2440.00000  
 Number of Transmission Chains = 1      Measurement Point = 1  
 Active Port = 1

**Images:**

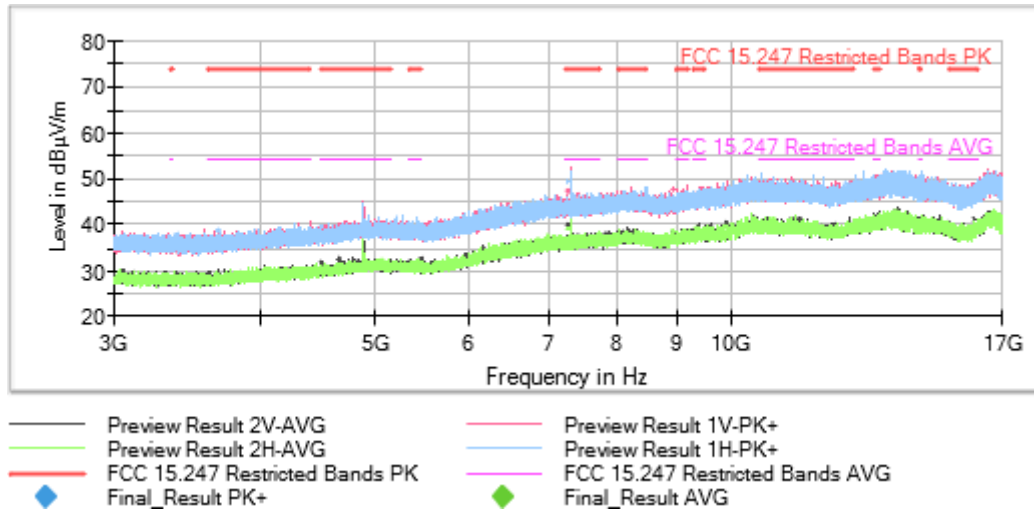


**Tables:**

Spectrum Analyzer Parameters

|  | Subrange           | Step Size | Detectors | Bandwidth | Sweep Time | Preamp |
|--|--------------------|-----------|-----------|-----------|------------|--------|
|  | Receiver: [ESW 44] |           |           |           |            |        |
|  | 3 GHz - 17 GHz     | 140 kHz   | PK+ ; AVG | 1 MHz     | 1 s        | 30 dB  |

Frequency Range GHz = [3, 17]      Equipment Type = Digital Transmission System (DTS)  
 Modulation = BTLE 4.2 (GFSK 1 Mbit/s)      Frequency MHz = 2480.00000  
 Number of Transmission Chains = 1      Measurement Point = 1  
 Active Port = 1

**Images:**

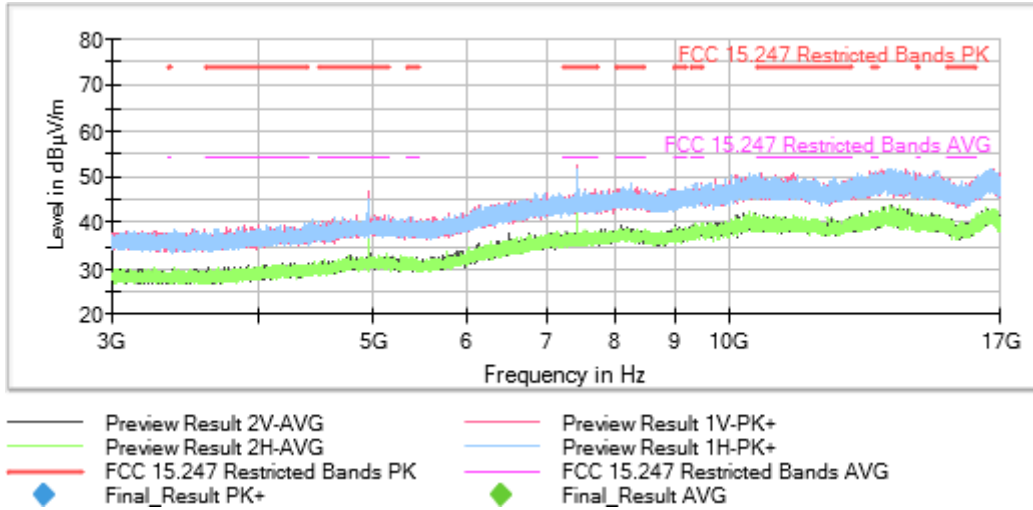

**Tables:**


Spectrum Analyzer Parameters

|  | Subrange           | Step Size | Detectors | Bandwidth | Sweep Time | Preamp |
|--|--------------------|-----------|-----------|-----------|------------|--------|
|  | Receiver: [ESW 44] |           |           |           |            |        |
|  | 3 GHz - 17 GHz     | 140 kHz   | PK+ ; AVG | 1 MHz     | 1 s        | 30 dB  |



Frequency Range GHz = [17, 26]      Equipment Type = Digital Transmission System (DTS)  
 Modulation = BTLE 4.2 (GFSK 1 Mbit/s)      Frequency MHz = 2402.00000  
 Number of Transmission Chains = 1      Measurement Point = 1  
 Active Port = 1

**Images:**

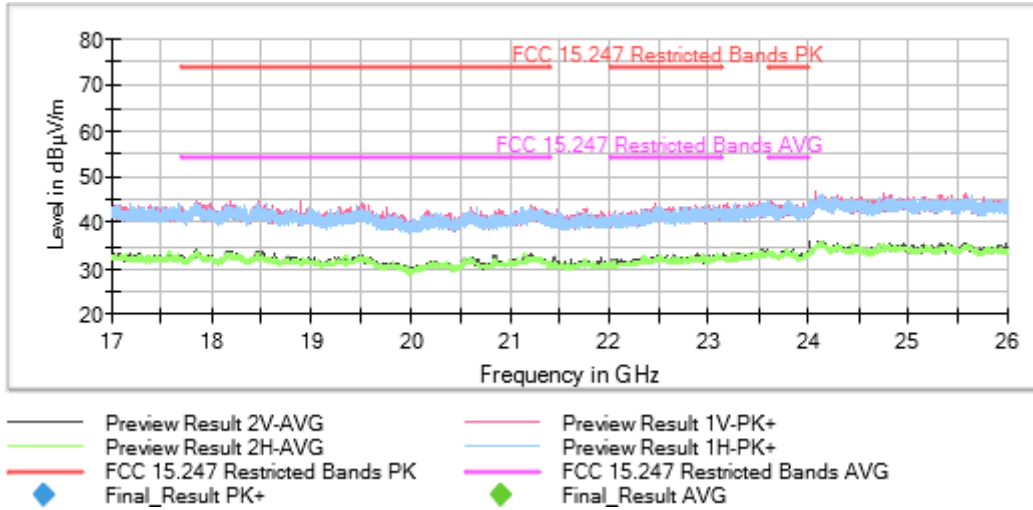


**Tables:**

Spectrum Analyzer Parameters

|  | Subrange           | Step Size | Detectors | Bandwidth | Sweep Time | Preamp |
|--|--------------------|-----------|-----------|-----------|------------|--------|
|  | Receiver: [FSV 40] |           |           |           |            |        |
|  | 17 GHz - 26 GHz    | 300 kHz   | PK+ ; AVG | 1 MHz     | 1 s        | 0 dB   |

Frequency Range GHz = [17, 26]      Equipment Type = Digital Transmission System (DTS)  
 Modulation = BTLE 4.2 (GFSK 1 Mbit/s)      Frequency MHz = 2440.00000  
 Number of Transmission Chains = 1      Measurement Point = 1  
 Active Port = 1

**Images:**

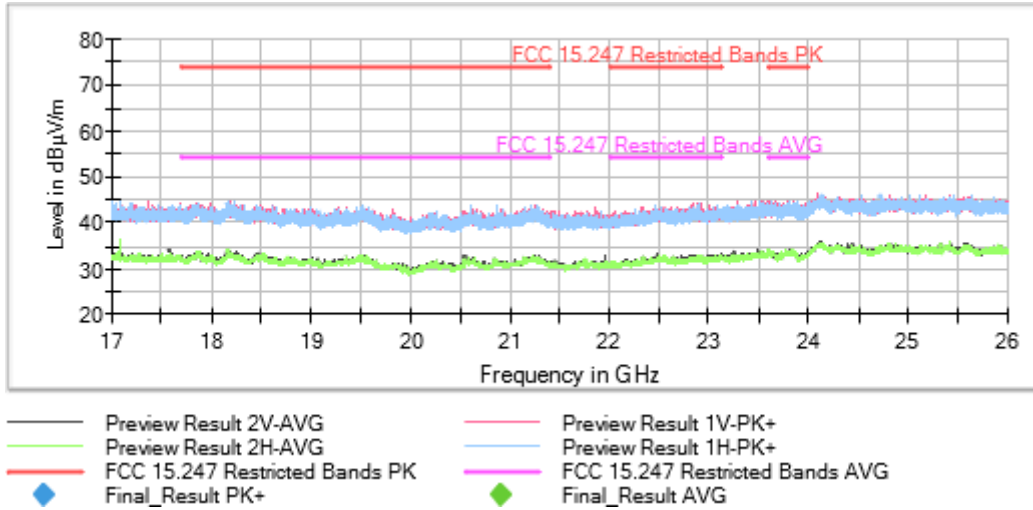


**Tables:**

Spectrum Analyzer Parameters

|  | Subrange           | Step Size | Detectors | Bandwidth | Sweep Time | Preamp |
|--|--------------------|-----------|-----------|-----------|------------|--------|
|  | Receiver: [FSV 40] |           |           |           |            |        |
|  | 17 GHz - 26 GHz    | 300 kHz   | PK+ ; AVG | 1 MHz     | 1 s        | 0 dB   |

Frequency Range GHz = [17, 26]      Equipment Type = Digital Transmission System (DTS)  
 Modulation = BTLE 4.2 (GFSK 1 Mbit/s)      Frequency MHz = 2480.00000  
 Number of Transmission Chains = 1      Measurement Point = 1  
 Active Port = 1

**Images:**

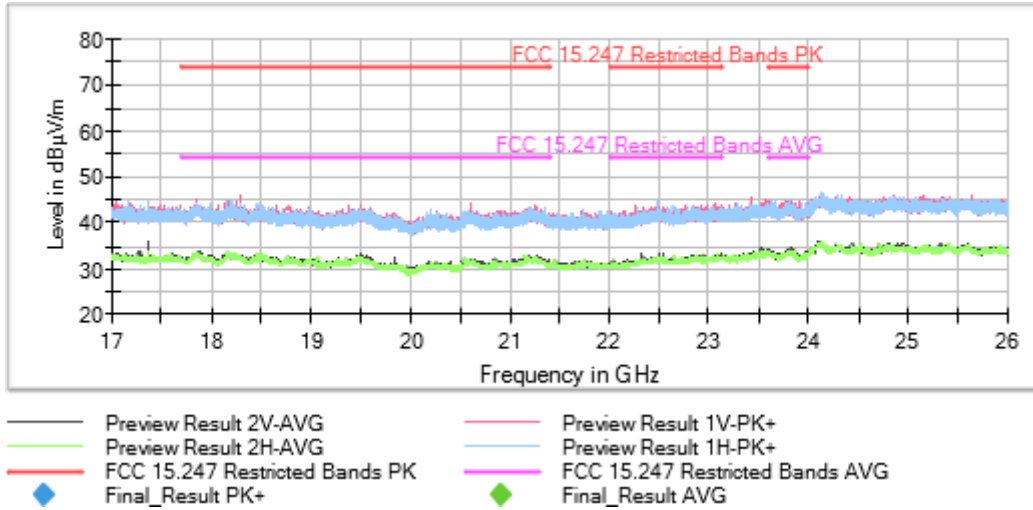

**Tables:**

Spectrum Analyzer Parameters

|  | Subrange           | Step Size | Detectors | Bandwidth | Sweep Time | Preamp |
|--|--------------------|-----------|-----------|-----------|------------|--------|
|  | Receiver: [FSV 40] |           |           |           |            |        |
|  | 17 GHz - 26 GHz    | 300 kHz   | PK+ ; AVG | 1 MHz     | 1 s        | 0 dB   |