



**FCC Part 1 Subpart I  
FCC Part 2 Subpart J**

**CERTIFICATION TEST REPORT**

**FOR**

**WIRELESS TRAVEL CASE CHARGER**

**MODEL NO: 3759**

**FCC ID: USQ3759**

**REPORT NUMBER: 12751212-E5V1**

**ISSUE DATE: 10/15/2019**

*Prepared for*

**BRAUN GMBH**

**T-QTA FRANKFURTER STRASSE 145**

**KRONBERG TS, D-61476 DE**

*Prepared by*

**UL VERIFICATION SERVICES INC.**

**47173 BENICIA STREET**

**FREMONT, CA 94538, U.S.A.**

**TEL: (510) 319-4000**

**FAX: (510) 661-0888**



Revision History

<u>Rev.</u>	<u>Issue Date</u>	<u>Revisions</u>	<u>Revised By</u>
V1	10/14/2019	Initial Issue	--
V2	10/15/2019	Updated KDB, duty cycle, dates, measurements	Tri Pham

---

## TABLE OF CONTENTS

<b>1. ATTESTATION OF TEST RESULTS .....</b>	<b>4</b>
<b>2. TEST METHODOLOGY .....</b>	<b>5</b>
<b>3. FACILITIES AND ACCREDITATION .....</b>	<b>5</b>
<b>4. EQUIPMENT UNDER TEST .....</b>	<b>6</b>
4.1. DESCRIPTION OF EUT .....	6
4.2. DESCRIPTION OF TEST SETUP.....	6
<b>5. TEST AND MEASUREMENT EQUIPMENT .....</b>	<b>9</b>
<b>6. DUTY CYCLE.....</b>	<b>10</b>
<b>7. MAXIMUM PERMISSIBLE RF EXPOSURE TEST RESULTS.....</b>	<b>12</b>
7.1. FCC LIMITS.....	12
7.2. SUMMARY OF TEST RESULTS .....	13
7.3. DETAILED TEST RESULTS.....	14
<b>8. SETUP PHOTO .....</b>	<b>15</b>
8.1. CONFIGURATION 1: STANDBY MODE.....	15
8.2. CONFIGURATION 2: WITH TOOTHBRUSH.....	18

# 1. ATTESTATION OF TEST RESULTS

**COMPANY NAME:** BRAUN GMBH  
T-QTA FRANKFURTER STRASSE 145  
KRONBERG TS, D-61476 DE

**EUT DESCRIPTION:** WIRELESS TRAVEL CASE CHARGER

**MODEL NUMBER:** 3759

**SERIAL NUMBER:** D80192102474

**DATE TESTED:** 5-6-2019

APPLICABLE STANDARDS	
STANDARD	TEST RESULTS
FCC PART 1 SUBPART I & PART 2 SUBPART J	Complies

UL Verification Services Inc. tested the above equipment in accordance with the requirements set forth in the above standards. The test results show that the equipment tested is capable of demonstrating compliance with the requirements as documented in this report.

The results documented in this report apply only to the tested sample, under the conditions and modes of operation as described herein. It is the manufacturer's responsibility to assure that additional production units of this model are manufactured with identical electrical and mechanical components. All samples tested were in good operating condition throughout the entire test program. Measurement Uncertainties are published for informational purposes only and were not taken into account unless noted otherwise.

This document may not be altered or revised in any way unless done so by UL Verification Services Inc. and all revisions are duly noted in the revisions section. Any alteration of this document not carried out by UL Verification Services Inc. will constitute fraud and shall nullify the document. This report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, any agency of the Federal Government, or any agency of the U.S. government.

Approved & Released For  
UL Verification Services Inc. By:



Frank Ibrahim  
Operations Leader  
UL Verification Service Inc.

Prepared By:



Tri Pham  
Project Engineer  
UL Verification Services Inc.

## **2. TEST METHODOLOGY**

All calculations were made in accordance with FCC KDB 447498 D01, KDB 447498 D03, and KDB 680106 D01 v03.

## **3. FACILITIES AND ACCREDITATION**

The test sites and measurement facilities used to collect data are located at 47173 and 47266 Benicia Street, Fremont, California, USA.

The test sites and facilities are covered under FCC Test Firm Registration # 208313.

UL Verification Services Inc. is accredited by NVLAP, Laboratory Code 200065-0

## 4. EQUIPMENT UNDER TEST

### 4.1. DESCRIPTION OF EUT

The EUT is wireless charging base capable of up to 1.2 Watt power transfer at 88 kHz fundamental frequency.

### 4.2. DESCRIPTION OF TEST SETUP

#### SUPPORT EQUIPMENT

SUPPORT EQUIPMENT & PERIPHERALS LIST			
Description	Manufacturer	Model	Serial Number
AC Adapter	Braun GMBH	492-5217	N/A
Toothbrush	Braun GMBH	3758	W477

#### I/O CABLES

N/A

#### TEST SETUP

The following three configurations are tested:


Configuration	Mode	Descriptions
1	Standby ( < 10% Power Detecting)	EUT Alone powered by AC/DC adapter
2	Operating (With toothbrush charging) Note: Measurements were made when the battery level of the toothbrush was at a state of <10%, 50%, and 100%.	EUT and toothbrush powered by AC/DC adapter

#### MEASUREMENT SETUP


The measurement was taken using a probe placed 15cm surrounding the device and 20cm above the top surface of the EUT.

Measurements were taken from the top and all sides of the EUT per KDB 680106 D01 v03.

**CONFIGURATION 1**

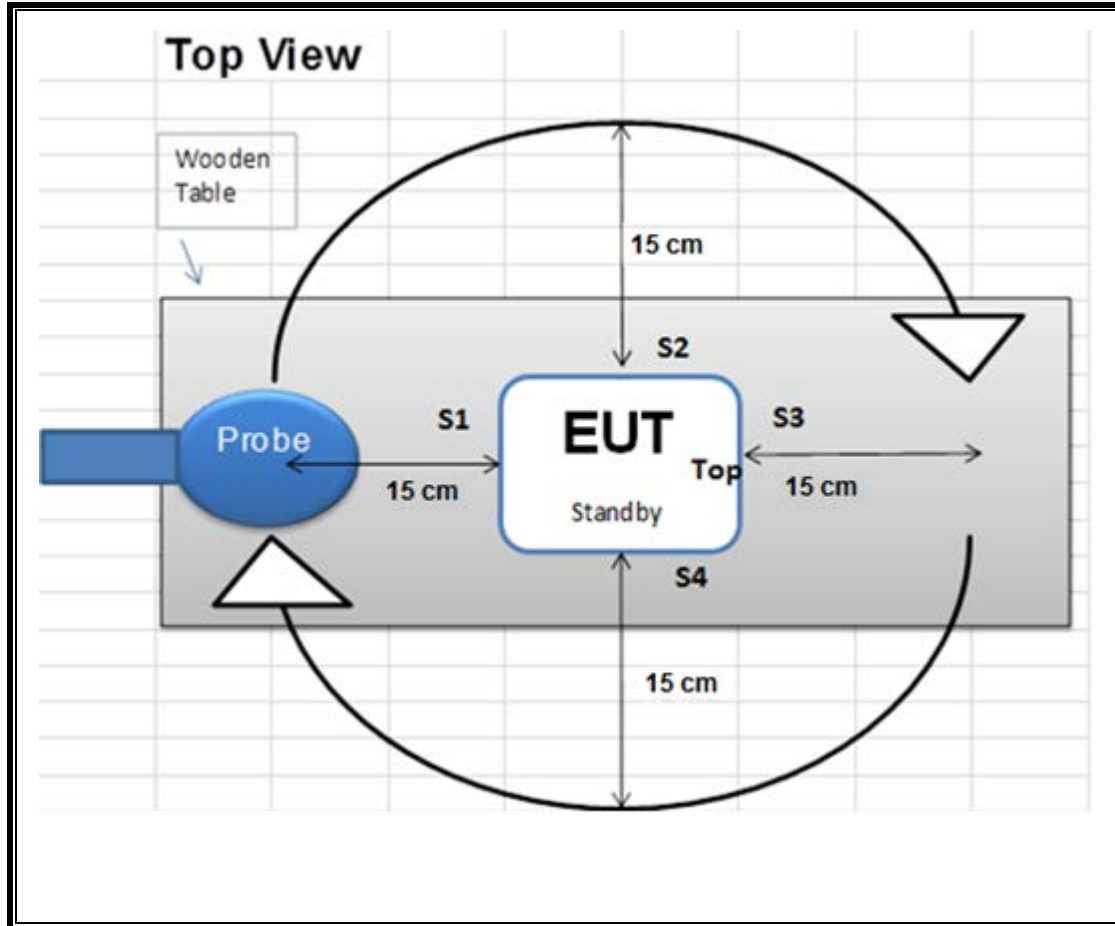

**CONFIGURATIONS 2**

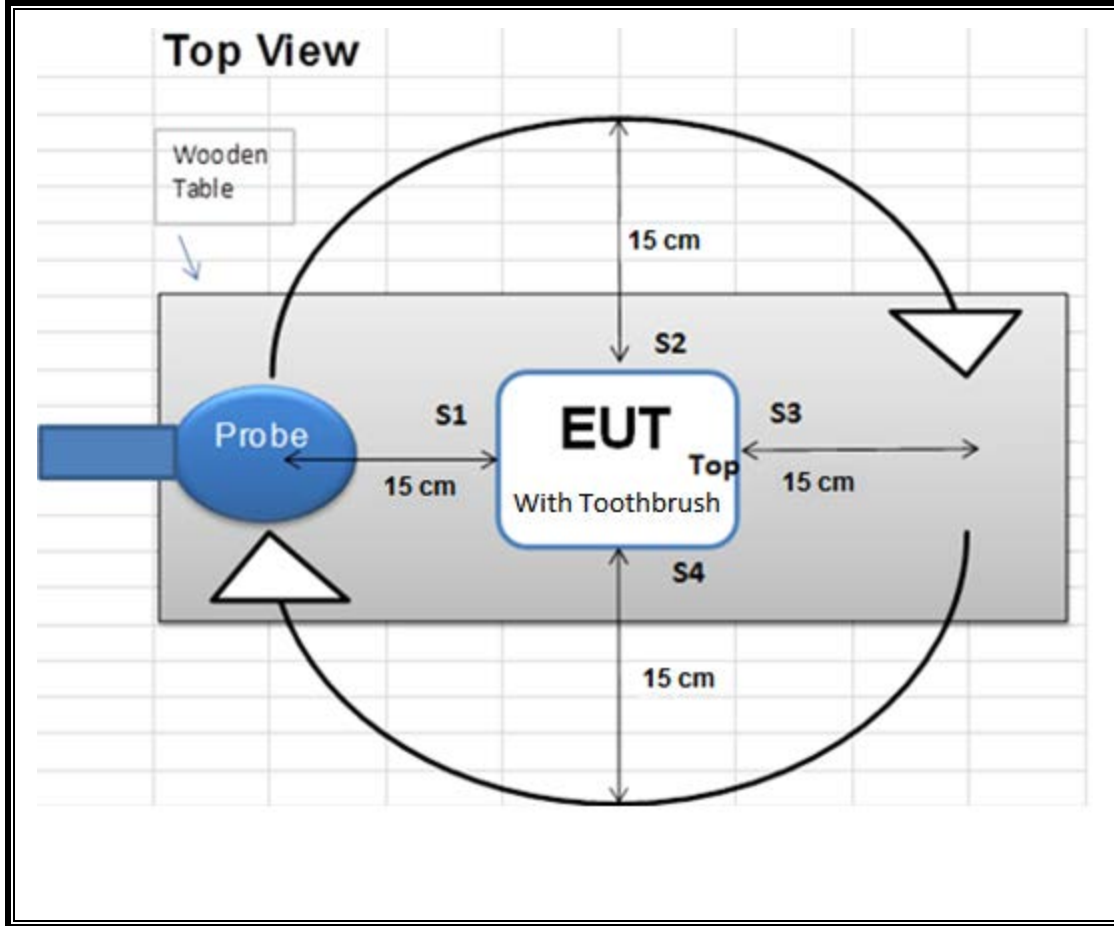



## 5. TEST AND MEASUREMENT EQUIPMENT

The following test and measurement equipment were used for the tests documented in this report:

Test Equipment List					
Description	Manufacturer	Model	S/N	Cal Date	Cal Due
Electric and Magnetic Field Probe	Narda	EHP-200A	170WX80318	10/24/2018	10/24/2019
Spectrum Analyzer	Agilent	E4446A	MY43360112	01/28/2019	01/28/2020

## 6. DUTY CYCLE

### LIMITS



None; for reporting purposes only.

### PROCEDURE

Zero-Span Spectrum Analyzer Method.

### ON TIME AND DUTY CYCLE RESULTS

Mode	ON Time B (msec)	Period (msec)	Duty Cycle x (linear)	Duty Cycle (%)
Standby (Config 1)	1.28	604.20	0.0021	0.21%
Operating(Config 2)	100.00	100.00	1.00	100.00%

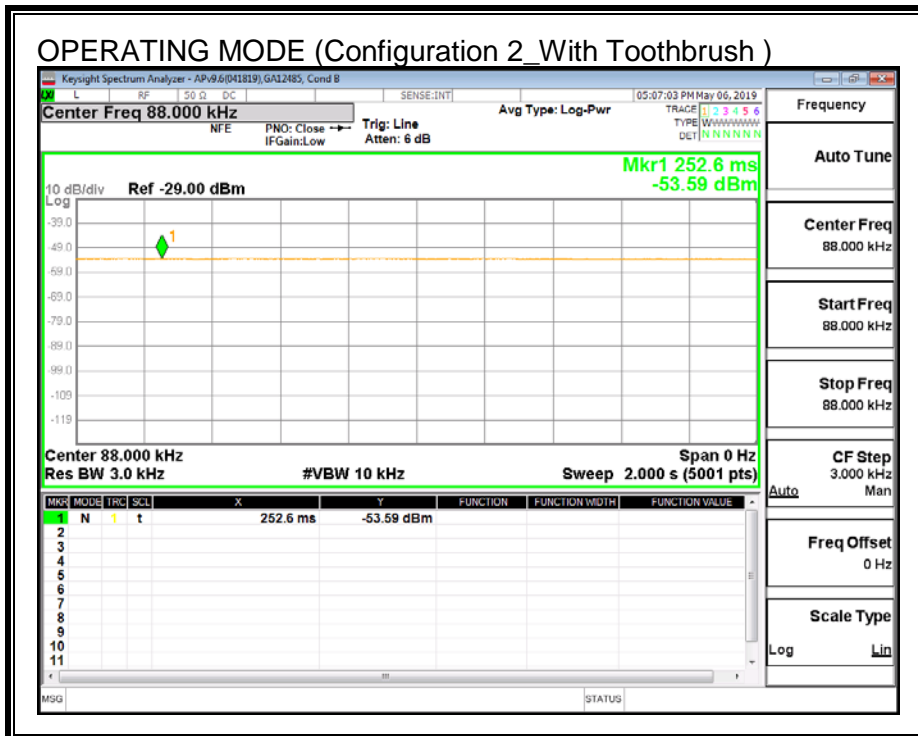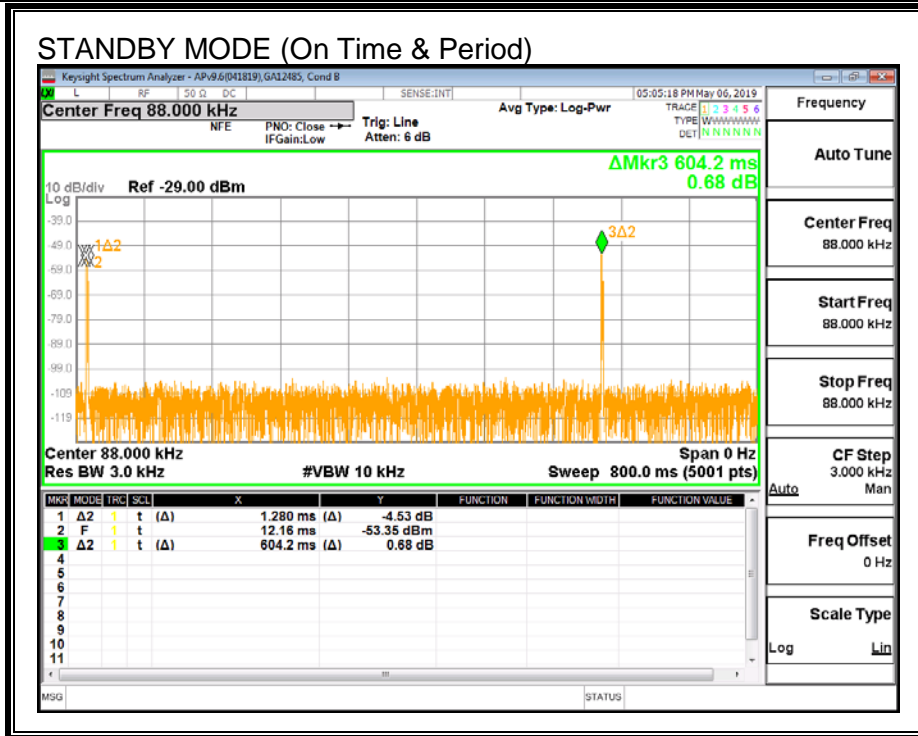

## 7. MAXIMUM PERMISSIBLE RF EXPOSURE TEST RESULTS

### 7.1. FCC LIMITS

§1.1310 The criteria listed in Table 1 shall be used to evaluate the environmental impact of human exposure to radio-frequency (RF) radiation as specified in §1.1307(b), except in the case of portable devices which shall be evaluated according to the provisions of §2.1093 of this chapter.

TABLE 1—LIMITS FOR MAXIMUM PERMISSIBLE EXPOSURE (MPE)

Frequency range (MHz)	Electric field strength (V/m)	Magnetic field strength (A/m)	Power density (mW/cm <sup>2</sup> )	Averaging time (minutes)
(A) Limits for Occupational/Controlled Exposures				
0.3–3.0 .....	614	1.63	*(100)	6
3.0–30 .....	1842/f	4.89/f	*(900/f <sup>2</sup> )	6
30–300 .....	61.4	0.163	1.0	6
300–1500 .....			f/300	6
1500–100,000 .....			5	6
(B) Limits for General Population/Uncontrolled Exposure				
0.3–1.34 .....	614	1.63	*(100)	30
1.34–30 .....	824/f	2.19/f	*(180/f <sup>2</sup> )	30

TABLE 1—LIMITS FOR MAXIMUM PERMISSIBLE EXPOSURE (MPE)—Continued

Frequency range (MHz)	Electric field strength (V/m)	Magnetic field strength (A/m)	Power density (mW/cm <sup>2</sup> )	Averaging time (minutes)
30–300 .....	27.5	0.073	0.2	30
300–1500 .....			f/1500	30
1500–100,000 .....			1.0	30

f = frequency in MHz

\* = Plane-wave equivalent power density

NOTE 1 TO TABLE 1: Occupational/controlled limits apply in situations in which persons are exposed as a consequence of their employment provided those persons are fully aware of the potential for exposure and can exercise control over their exposure. Limits for occupational/controlled exposure also apply in situations when an individual is transient through a location where occupational/controlled limits apply provided he or she is made aware of the potential for exposure.

NOTE 2 TO TABLE 1: General population/uncontrolled exposures apply in situations in which the general public may be exposed, or in which persons that are exposed as a consequence of their employment may not be fully aware of the potential for exposure or can not exercise control over their exposure.

**Note:** The limit at 300 kHz was used for this device based on KDB enquiry

## 7.2. SUMMARY OF TEST RESULTS

### RESULTS

<b>ID:</b>	29435	<b>Date:</b>	5/6/2019
------------	-------	--------------	----------

Note: Both magnetic and electric field strengths have been investigated from 9 kHz to 30 MHz at 15cm surrounding the device and 20cm above the top surface of the EUT operation frequency is at 88 kHz.

The inductive wireless power transfer device meets all of the following requirements:

- Power transfer frequency is less than 1 MHz
- Output power from each primary coil is less than or equal to 15 watts.
- The transfer system includes only single primary and secondary coils. This includes charging systems that may have multiple primary coils and clients that are able to detect and allow coupling only between individual pairs of coils.
- Client device is placed directly in contact with the transmitter.
- Mobile exposure conditions only (portable exposure conditions are not covered by this exclusion).
- The aggregate H-field strengths at 15 cm surrounding the device and 20 cm above the top surface from all simultaneous transmitting coils are demonstrated to be less than 50% of the MPE limit.

### FCC RF Exposure Summary of Results

Electric Field			Magnetic Field		
FCC Limit (V/m)	Maximum Average Reading (V/m)	Percentage (%)	FCC Limit (A/m)	Maximum Average Reading (A/m)	Percentage (%)
614	4.129	0.67%	1.63	0.808	49.57%

**Note:** since the E and H field are lower than the limit by more than 50% of the limit then a PAG is not required.

### 7.3. DETAILED TEST RESULTS

#### E- FIELD AND H- FIELD MEASUREMENTS

Note: Peak measurements were performed. RMS values were calculated from the peak measurement. Please refer to the formula for calculating the RMS values: [Field Strength x √Duty Cycle].

Configuration	Test Mode	Measuring Distance (cm)	Electric Field Limit	Electric Field Reading				Magnetic Field Limit	Magnetic Field Reading					
			(V/m)	(V/m)				(A/m)	(A/m)					
			FCC	Location	Peak	Duty Cycle %	FCC Average	FCC	Location	Peak	Duty Cycle %	FCC Average		
1	Standby	15 cm surrounding the device (S1-S4) and 20 cm above the top surface of the EUT	614	S1	0.352	0.21		0.016	S1	0.053	0.21		0.002	
				S2	0.485			0.022	S2	0.562			0.026	
				S3	0.406			0.019	S3	0.057			0.003	
				S4	0.398			0.018	S4	0.053			0.002	
				Top	0.362			0.017	Top	0.054			0.002	
				Max	0.485			0.022	Max	0.562			0.026	
				S1	2.940			2.940	S1	0.274			0.274	
				S2	2.171			2.171	S2	0.104			0.104	
				S3	3.125			3.125	S3	0.309			0.309	
				S4	1.981			1.981	S4	0.808			0.808	
Top	2.458	2.458	Top	0.172	0.172									
Max	3.125	3.125	Max	0.808	0.808									
2	Operating Power ~ 0% Charging	15 cm surrounding the device (S1-S4) and 20 cm above the top surface of the EUT	614	S1	2.790	100.00		2.790	S1	0.245	100		0.245	
				S2	1.883			1.883	S2	0.082			0.082	
				S3	3.258			3.258	S3	0.341			0.341	
				S4	1.577			1.577	S4	0.766			0.766	
				Top	2.570			2.570	Top	0.182			0.182	
				Max	3.258			3.258	Max	0.766			0.766	
	Operating Power 20-50% Charging				S1	2.812	100.00		2.812	S1	0.259	100		0.259
					S2	1.982			1.982	S2	0.093			0.093
					S3	4.129			4.129	S3	0.475			0.475
					S4	1.595			1.595	S4	0.800			0.800
					Top	2.547			2.547	Top	0.170			0.170
					Max	4.129			4.129	Max	0.800			0.800
	Operating Power 100% Charged				S1	2.812	100.00		2.812	S1	0.259	100		0.259
					S2	1.982			1.982	S2	0.093			0.093
					S3	4.129			4.129	S3	0.475			0.475
					S4	1.595			1.595	S4	0.800			0.800
					Top	2.547			2.547	Top	0.170			0.170
					Max	4.129			4.129	Max	0.800			0.800