




# SPORTON International Inc.

No. 52, Hwa Ya 1st Rd., Kwei-Shan Hsiang, TaoYuan Hsien, Taiwan, R.O.C.  
Ph: 886-3-327-3456 / FAX: 886-3-327-0973 / www.sporton.com.tw

## FCC RADIO TEST REPORT

Applicant's company	<b>Samwell International Inc.</b>
Applicant Address	317-1, See 2, An Kang Rd., Hsintien, Taipei 231, Taiwan
FCC ID	<b>UUN-SR668</b>
Manufacturer's company	<b>Samwell International Inc.</b>
Manufacturer Address	317-1, See 2, An Kang Rd., Hsintien, Taipei 231, Taiwan

Product Name	Ruggedbook 10.4" Table PC
Brand Name	Ruggedbook
Model Name	SR668
Test Rule	47 CFR FCC Part 15 Subpart C § 15.247
Test Freq. Range	2400 ~ 2483.5MHz
Received Date	Oct. 30, 2006
Final Test Date	Jan. 25, 2007
Submission Type	Original Equipment

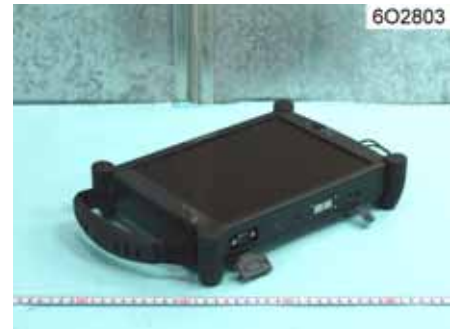

### Statement

**Test result included is only for the Bluetooth part of the product.**

The test result in this report refers exclusively to the presented test model / sample.

Without written approval of SPORTON International Inc., the test report shall not be reproduced except in full.

The measurements and test results shown in this test report were made in accordance with the procedures and found in compliance with the limit given in **ANSI C63.4-2003** and **47 CFR FCC Part 15 Subpart C**.

The test equipment used to perform the test is calibrated and traceable to NML/ROC.



Lab Code: 200079-0



## Table of Contents

<b>1. CERTIFICATE OF COMPLIANCE .....</b>	<b>1</b>
<b>2. SUMMARY OF THE TEST RESULT .....</b>	<b>2</b>
<b>3. GENERAL INFORMATION.....</b>	<b>3</b>
3.1. Product Details.....	3
3.2. Accessories.....	3
3.3. Table for Filed Antenna .....	3
3.4. Table for Carrier Frequencies.....	3
3.5. Table for Test Modes .....	4
3.6. Table for Testing Locations .....	4
3.7. Table for Supporting Units.....	5
3.8. Table for Parameters of Test Software Setting .....	5
3.9. Test Configurations .....	6
<b>4. TEST RESULT .....</b>	<b>8</b>
4.1. AC Power Line Conducted Emissions Measurement.....	8
4.2. Maximum Peak Output Power Measurement .....	14
4.3. Hopping Channel Separation Measurement .....	16
4.4. Number of Hopping Frequency Measurement .....	21
4.5. Dwell Time Measurement.....	23
4.6. Radiated Emissions Measurement .....	30
4.7. Band Edge Emissions Measurement.....	42
4.8. Antenna Requirements.....	45
<b>5. LIST OF MEASURING EQUIPMENTS .....</b>	<b>46</b>
<b>6. TEST LOCATION.....</b>	<b>47</b>
<b>7. NVLAP CERTIFICATE OF ACCREDITATION .....</b>	<b>48</b>
<b>APPENDIX A. PHOTOGRAPHS OF EUT .....</b>	<b>A1 ~ A22</b>
<b>APPENDIX B. TEST PHOTOS .....</b>	<b>B1 ~ B6</b>
<b>APPENDIX C. MAXIMUM PERMISSIBLE EXPOSURE.....</b>	<b>C1 ~ C3</b>



## 1. CERTIFICATE OF COMPLIANCE

**Product Name** : Ruggedbook 10.4" Table PC  
**Brand Name** : Ruggedbook  
**Model Name** : SR668  
**Applicant** : Samwell International Inc.  
**Test Rule Part(s)** : 47 CFR FCC Part 15 Subpart C § 15.247

Sporton International as requested by the applicant to evaluate the EMC performance of the product sample received on Oct. 30, 2006 would like to declare that the tested sample has been evaluated and found to be in compliance with the tested rule parts. The data recorded as well as the test configuration specified is true and accurate for showing the sample's EMC nature.



Roger Sheng / Manager  
SPORTON INTERNATIONAL INC.

Reviewed Data: Jan. 30, 2007

## 2. SUMMARY OF THE TEST RESULT

Applied Standard: 47 CFR FCC Part 15 Subpart C				
Part	Rule Section	Description of Test	Result	Under Limit
4.1	15.207	AC Power Line Conducted Emissions	Complies	14.82 dB
4.2	15.247(b)(1)	Maximum Peak Conducted Output Power	Complies	26.11 dB
4.3	15.247(a)(1)	Hopping Channel Separation	Complies	-
4.4	15.247(b)(1)	Number of Hopping Frequency	Complies	-
4.5	15.247(a)(1)	Dwell Time	Complies	-
4.6	15.247(d)	Radiated Emissions	Complies	7.48 dB
4.7	15.247(d)	Band Edge Emissions	Complies	11.12 dB
4.8	15.203	Antenna Requirements	Complies	-

Test Items	Uncertainty	Remark
AC Power Line Conducted Emissions	±2.3dB	Confidence levels of 95%
Maximum Peak Conducted Output Power	±0.8dB	Confidence levels of 95%
Hopping Channel Separation	±8.5×10 <sup>-8</sup>	Confidence levels of 95%
Radiated Emissions (9kHz~30MHz)	±0.8dB	Confidence levels of 95%
Radiated Emissions (30MHz~1000MHz)	±1.9dB	Confidence levels of 95%
Radiated / Band Edge Emissions (1GHz~18GHz)	±1.9dB	Confidence levels of 95%
Radiated Emissions (18GHz~40GHz)	±1.9dB	Confidence levels of 95%
Temperature	±0.7	Confidence levels of 95%
Humidity	±3.2%	Confidence levels of 95%
DC / AC Power Source	±1.4%	Confidence levels of 95%

### 3. GENERAL INFORMATION

#### 3.1. Product Details

EUT is a Ruggedbook 10.4" Table PC with IEEE 802.11b/g and Bluetooth radio functions. Only the radio detail of Bluetooth is shown in the table below. For more detailed features description, please refer to the manufacturer's specifications or user's manual.

Items	Description
Power Type	20VDC from adapter
Modulation	FHSS (GFSK)
Data Rate (Mbps)	1
Frequency Range	2400 ~ 2483.5MHz
Channel Number	79
Channel Band Width (99%)	870 kHz
Conducted Output Power	3.89 dBm

#### 3.2. Accessories

Power	Brand	Model	Rating
Adapter 1	LI SHIN	0335A2065	INPUT: 100-240V~, 50-60Hz 1.7A OUTPUT: 20V 3.25A
Others			
Plug			

#### 3.3. Table for Filed Antenna

Ant.	Antenna Type	Connector	Gain (dBi)
1	PIFA Antenna	UFL	2.70

#### 3.4. Table for Carrier Frequencies

Frequency Band	Channel No.	Frequency
2400~2483.5MHz	0	2402 MHz
	1	2403 MHz
	:	:
	38	2440 MHz
	39	2441 MHz
	40	2442 MHz
	:	:
	77	2479 MHz
	78	2480 MHz

### 3.5. Table for Test Modes

Preliminary tests were performed in different data rate to find the worst radiated emission. The data rate shown in the table below is the worst-case rate with respect to the specific test item. Investigation has been done on all the possible configurations for searching the worst cases. The following table is a list of the test modes shown in this test report.

Test Items	Mode	Data Rate	Channel	Antenna
AC Power Conducted Emissions	Mode1 / Mode 2	1 Mbps	Hopping 0~78	1
Max. Conducted Output Power	GFSK	1 Mbps	0/39/78	NA
Hopping Channel Separation	GFSK	1 Mbps	0~1/39~40/77~78	NA
Number of Hopping Frequency	GFSK	1 Mbps	0~78	NA
Dwell Time	DH1/DH3/DH5	1 Mbps	0/39/78	NA
Radiated Emissions Below 1GHz	GFSK	1 Mbps	39	1
Radiated Emissions Above 1GHz	GFSK	1 Mbps	0/39/78	1
Band Edge Emissions	GFSK	1 Mbps	0/78	1

For EMI test, the following modes were tested:

Mode 1: 1024\*768 60Hz 120V/60Hz, BT Link, WLAN Link, LAN:1Gbps, CF Card R/W, PCMCIA Card CF R/W, RJ11 Link Mode

Mode 2: 800\*600 60Hz 120V/60Hz, BT Link, WLAN Link, LAN:100Mbps, CF Card R/W, PCMCIA Card CF R/W, RJ11 Link Mode

### 3.6. Table for Testing Locations

Test Site No.	Site Category	Location	FCC Reg. No.	IC File No.	VCCI Reg. No
03CH03-HY	SAC	Hwa Ya	101377	IC 4088	-
CO01-HY	Conduction	Hwa Ya	101377	IC 4088	-
TH01-HY	OVEN Room	Hwa Ya	-	-	-

Open Area Test Site (OATS); Semi Anechoic Chamber (SAC); Fully Anechoic Chamber (FAC).

Please refer section 6 for Test Site Address.

### 3.7. Table for Supporting Units

Support Unit	Brand	Model	FCC ID
Modem	ACEEX	DM1414	IFAXDM1414
MIC+Headset	J-S	CD-87MV	DoC
CF CARD x2	SanDisk	16MB / 64MB	-
PCMCIA Card	Adapte	Compact flash	-
i-Pod nano x2	Apple	A1199	R33057
Notebook (Remote Workstation)	DELL	D400	DoC
AP (Remote Workstation)	D-Link	DNS-G120	DoC
GSM Phone (Remote Workstation)	Sony Ericsson	W800i	PY7-A1022013
Central Office (Remote Workstation)	Easy Switch	SMS-4 PLUS	-

### 3.8. Table for Parameters of Test Software Setting

During testing, Channel & Power Controlling Software provided by the customer was used to control the operating channel as well as the output power level. The RF output power selection is for the setting of RF output power expected by the customer and is going to be fixed on the firmware of the final end product.


#### Power Parameters of Bluetooth


Test Software Version	Bluetest		
Frequency	2402 MHz	2441 MHz	2480 MHz
Power Parameters	57	62	62



### 3.9. Test Configurations

#### 3.9.1. Radiation Emissions Test Configuration

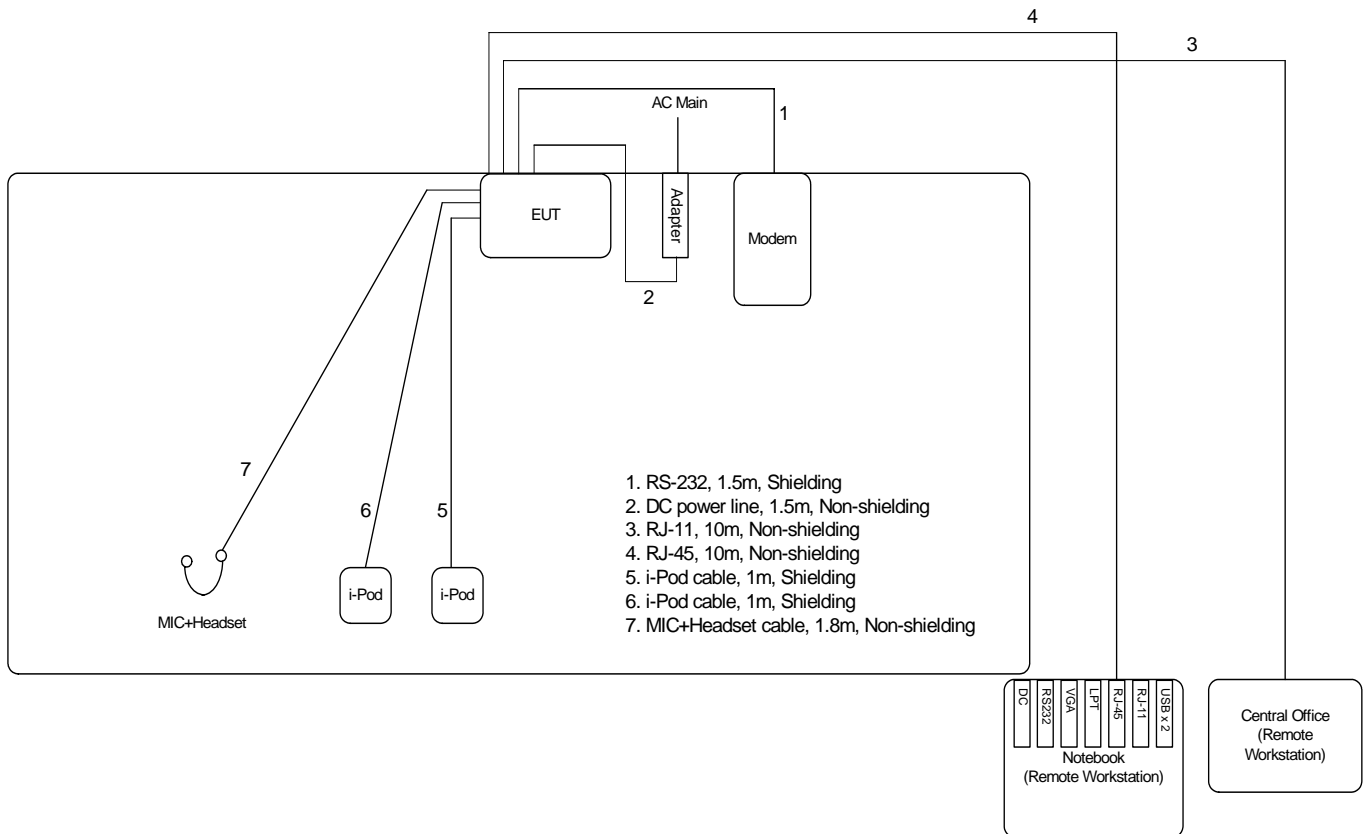

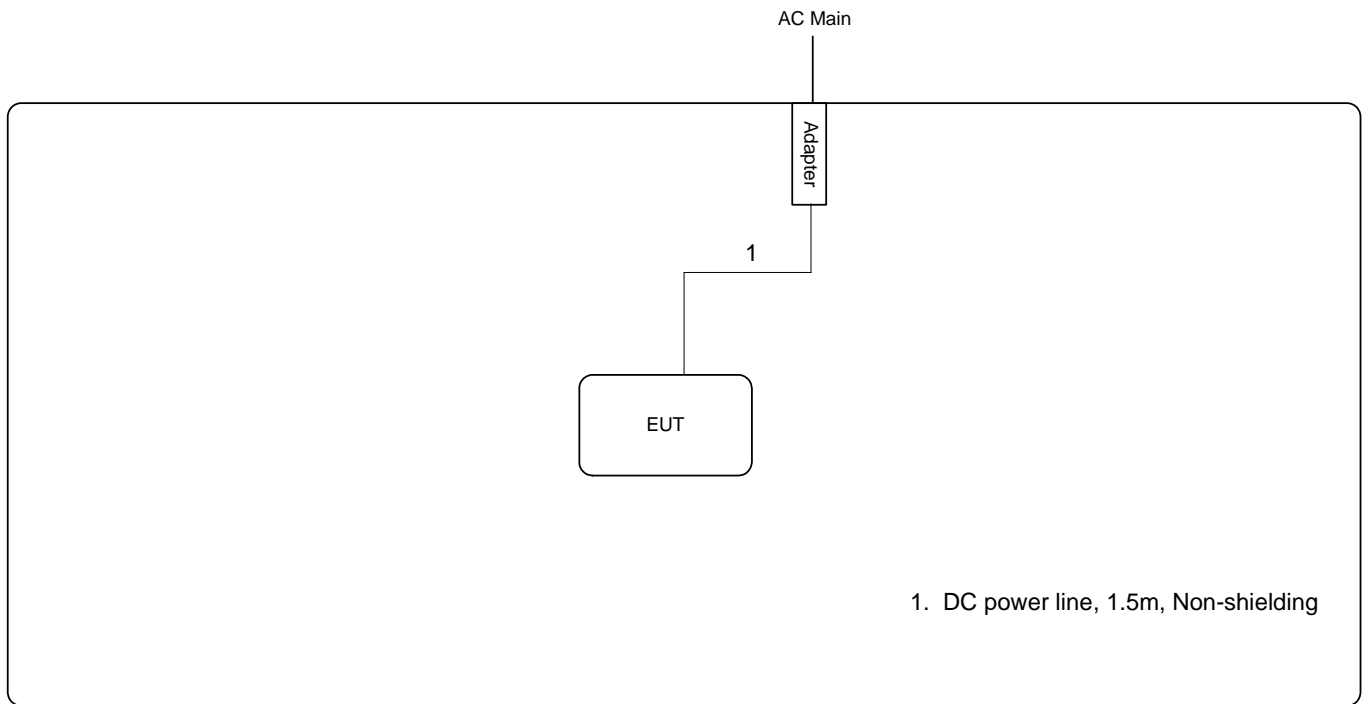

## 4. TEST RESULT

### 4.1. AC Power Line Conducted Emissions Measurement

#### 4.1.1. Limit

For a Low-power Radio-frequency Device which is designed to be connected to the AC power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed below limits table.

Frequency (MHz)	QP Limit (dBuV)	AV Limit (dBuV)
0.15~0.5	66~56	56~46
0.5~5	56	46
5~30	60	50

#### 4.1.2. Measuring Instruments and Setting

Please refer to section 5 of equipments list in this report. The following table is the setting of the receiver.

Receiver Parameters	Setting
Attenuation	10 dB
Start Frequency	0.15 MHz
Stop Frequency	30 MHz
IF Bandwidth	9 KHz

#### 4.1.3. Test Procedures

1. Configure the EUT according to ANSI C63.4. The EUT or host of EUT has to be placed 0.4 meter far from the conducting wall of the shielding room and at least 80 centimeters from any other grounded conducting surface.
2. Connect EUT or host of EUT to the power mains through a line impedance stabilization network (LISN).
3. All the support units are connected to the other LISNs. The LISN should provide 50uH/50ohms coupling impedance.
4. The frequency range from 150 KHz to 30 MHz was searched.
5. Set the test-receiver system to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
6. The measurement has to be done between each power line and ground at the power terminal.



**4.1.5. Test Deviation**


There is no deviation with the original standard.

**4.1.6. EUT Operation during Test**

The EUT was placed on the test table and programmed in normal function.


**4.1.7. Results of AC Power Line Conducted Emissions Measurement**

<b>Temperature</b>	25	<b>Humidity</b>	44%
<b>Test Engineer</b>	Tom Lee	<b>Phase</b>	Line
<b>Configuration</b>	Mode 1		

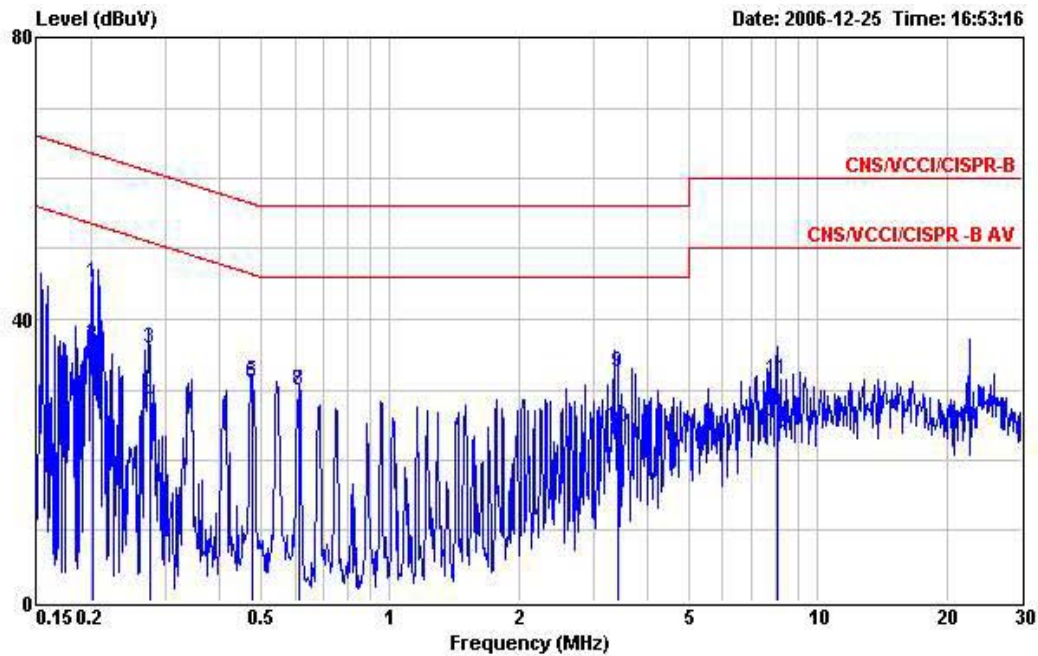

	Freq	Level	Over Limit	Limit Line	Read Level	Probe Factor	Cable Loss	Remark
	MHz	dBuV	dB	dBuV	dBuV	dB	dB	
1	0.203	45.19	-18.30	63.49	45.05	0.10	0.04	QP
2	0.203	36.25	-17.24	53.49	36.11	0.10	0.04	Average
3	0.275	35.91	-25.07	60.98	35.76	0.10	0.05	QP
4	0.275	28.08	-22.90	50.98	27.93	0.10	0.05	Average
5	0.476	31.16	-25.25	56.41	30.99	0.10	0.07	QP
6	0.476	30.84	-15.57	46.41	30.67	0.10	0.07	Average
7	0.612	29.79	-26.21	56.00	29.61	0.10	0.08	QP
8	0.612	29.89	-16.11	46.00	29.71	0.10	0.08	Average
9	3.399	32.50	-23.50	56.00	32.26	0.18	0.06	QP
10	3.399	24.71	-21.29	46.00	24.47	0.18	0.06	Average
11	8.020	31.34	-28.66	60.00	30.98	0.28	0.08	QP
12	8.020	23.96	-26.04	50.00	23.60	0.28	0.08	Average

<b>Temperature</b>	25	<b>Humidity</b>	44%
<b>Test Engineer</b>	Tom Lee	<b>Phase</b>	Neutral
<b>Configuration</b>	Mode 1		

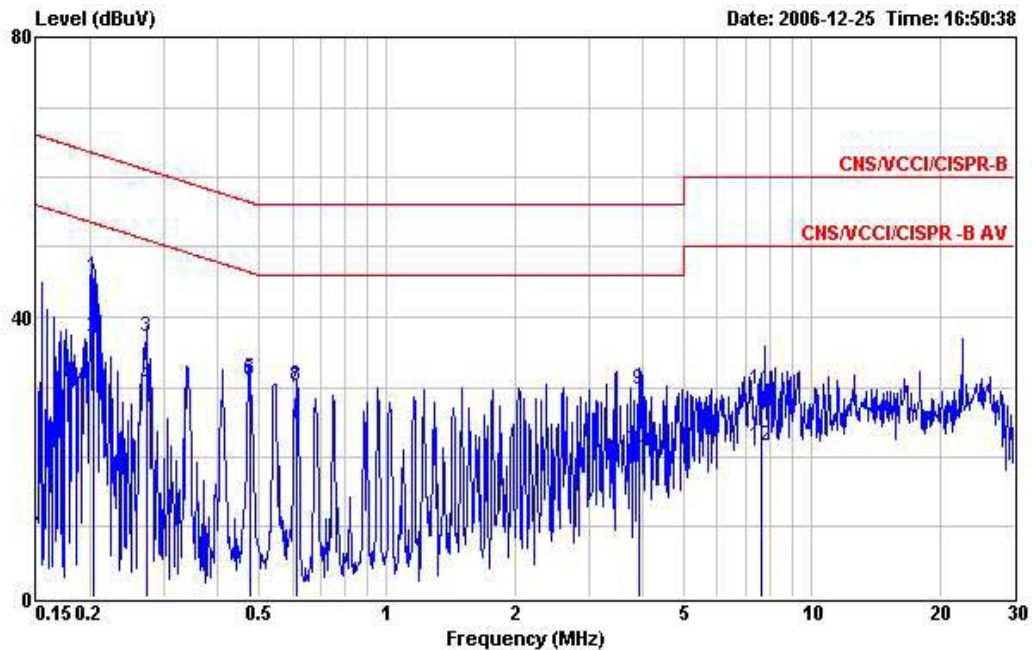


	Freq	Level	Over	Limit	Read	Probe	Cable	
	MHz	dBuV	Limit	Line	Level	Factor	Loss	Remark
			dB	dBuV	dBuV	dB	dB	
1	0.204	45.76	-17.69	63.45	45.62	0.10	0.04	QP
2	0.204	37.03	-16.42	53.45	36.89	0.10	0.04	Average
3	0.273	37.12	-23.91	61.03	36.97	0.10	0.05	QP
4	0.273	30.06	-20.97	51.03	29.91	0.10	0.05	Average
5	0.477	31.22	-25.18	56.40	31.05	0.10	0.07	QP
6	0.477	31.03	-15.37	46.40	30.86	0.10	0.07	Average
7	0.612	29.99	-26.01	56.00	29.81	0.10	0.08	QP
8	0.612	30.16	-15.84	46.00	29.98	0.10	0.08	Average
9	3.944	29.53	-26.47	56.00	29.37	0.10	0.06	QP
10	3.944	21.39	-24.61	46.00	21.23	0.10	0.06	Average
11	7.635	29.51	-30.49	60.00	29.27	0.17	0.07	QP
12	7.635	21.66	-28.34	50.00	21.42	0.17	0.07	Average

Note:

Level = Read Level + LISN Factor + Cable Loss.




Temperature	25	Humidity	44%
Test Engineer	Tom Lee	Phase	Line
Configuration	Mode 2		

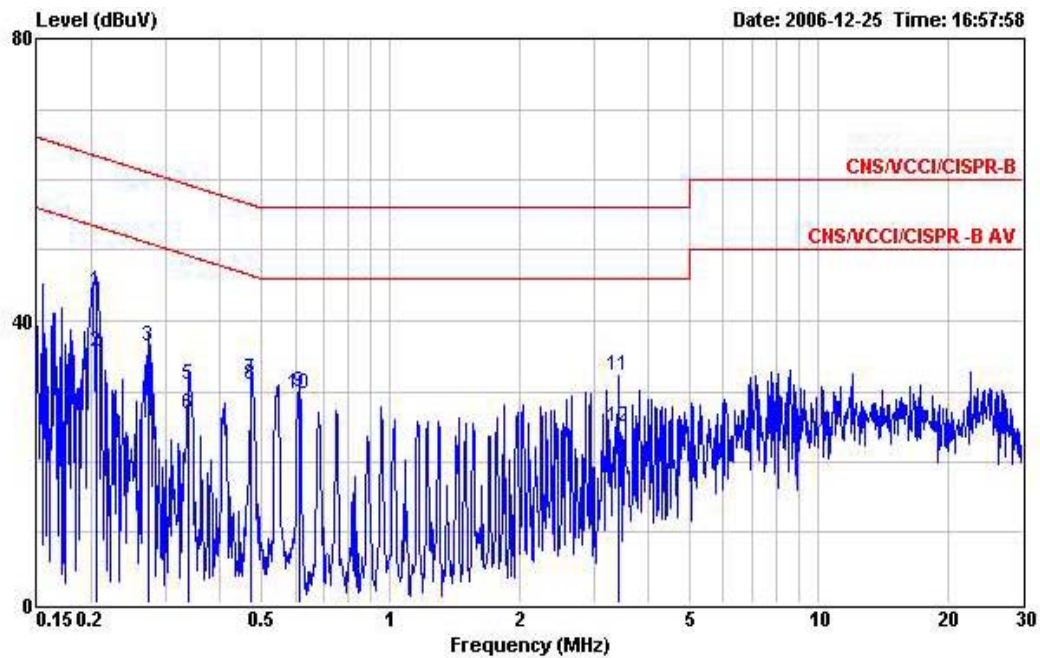

	Freq	Level	Over Limit	Limit Line	Read Level	Probe Factor	Cable Loss	Remark
	MHz	dBuV	dB	dBuV	dBuV	dB	dB	
1	0.205	44.22	-19.17	63.39	44.08	0.10	0.04	QP
2	0.205	35.62	-17.77	53.39	35.48	0.10	0.04	Average
3	0.273	36.27	-24.75	61.02	36.12	0.10	0.05	QP
4	0.273	28.84	-22.18	51.02	28.69	0.10	0.05	Average
5	0.339	30.94	-28.29	59.23	30.78	0.10	0.06	QP
6	0.339	26.69	-22.54	49.23	26.53	0.10	0.06	Average
7	0.474	31.65	-24.79	56.44	31.48	0.10	0.07	QP
8	0.474	30.85	-15.59	46.44	30.68	0.10	0.07	Average
9	0.612	29.84	-16.16	46.00	29.66	0.10	0.08	Average
10	0.612	29.71	-26.29	56.00	29.53	0.10	0.08	QP
11	3.399	32.32	-23.68	56.00	32.08	0.18	0.06	QP
12	3.399	25.05	-20.95	46.00	24.81	0.18	0.06	Average



<b>Temperature</b>	25	<b>Humidity</b>	44%
<b>Test Engineer</b>	Tom Lee	<b>Phase</b>	Neutral
<b>Configuration</b>	Mode 2		

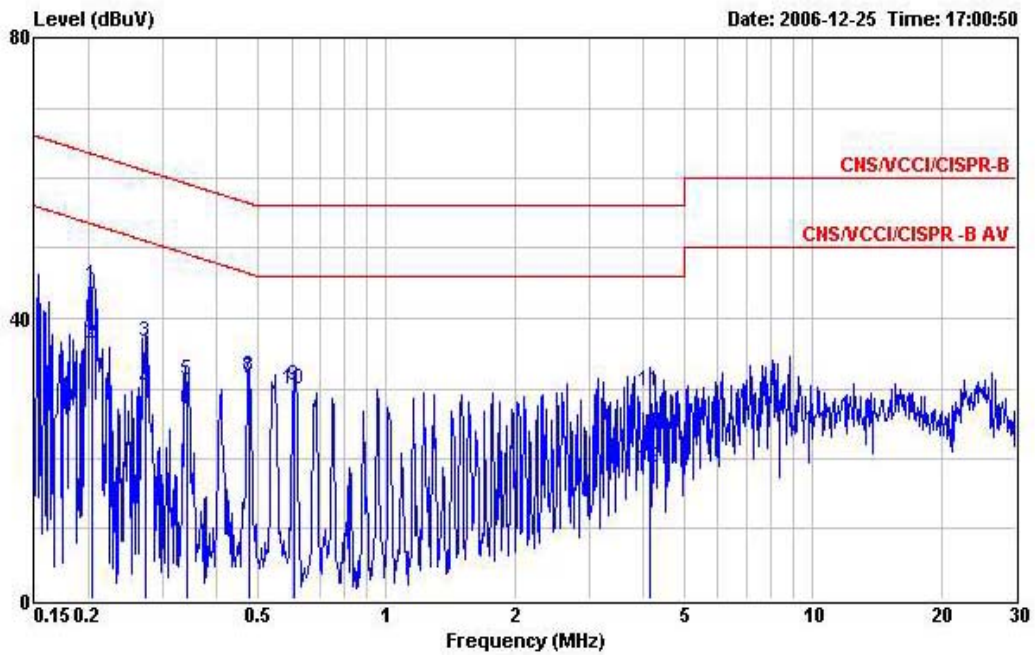

	Freq	Level	Over Limit	Limit Line	Read Level	Probe Factor	Cable Loss	Remark
	MHz	dBuV	dB	dBuV	dBuV	dB	dB	
1	0.204	44.69	-18.74	63.43	44.55	0.10	0.04	QP
2	0.204	36.29	-17.14	53.43	36.15	0.10	0.04	Average
3	0.272	36.65	-24.41	61.06	36.50	0.10	0.05	QP
4	0.272	29.92	-21.14	51.06	29.77	0.10	0.05	Average
5	0.340	31.16	-28.04	59.20	31.00	0.10	0.06	QP
6	0.340	27.09	-22.11	49.20	26.93	0.10	0.06	Average
7	0.476	31.48	-24.93	56.41	31.31	0.10	0.07	QP
8	0.476	31.59	-14.82	46.41	31.42	0.10	0.07	Average
9	0.609	30.31	-15.69	46.00	30.13	0.10	0.08	Average
10	0.609	29.93	-26.07	56.00	29.75	0.10	0.08	QP
11	4.140	29.52	-26.48	56.00	29.36	0.10	0.06	QP
12	4.140	18.62	-27.38	46.00	18.46	0.10	0.06	Average

Note:

Level = Read Level + LISN Factor + Cable Loss.



## 4.2. Maximum Peak Output Power Measurement

### 4.2.1. Limit

For frequency hopping systems operating in the 2400-2483.5 MHz band employing at least 75 non-overlapping hopping channels, the limit for peak output power is 30dBm. The limit has to be reduced by the amount in dB that the gain of the antenna exceeds 6dBi. In case of point-to-point operation, the limit has to be reduced by 1dB for every 3dB that the directional gain of the antenna exceeds 6dBi.

### 4.2.2. Measuring Instruments and Setting


Please refer to section 5 of equipments list in this report. The following table is the setting of the power meter.

Power Meter Parameter	Setting
Filter No.	Auto
Measurement time	0.135 s ~ 26 s
Used Peak Sensor	NRV-Z32 (model 04)

### 4.2.3. Test Procedures

1. The transmitter output (antenna port) was connected to the power meter.
2. Turn on the EUT and power meter and then record the peak power value.
3. Repeat above procedures on all channels needed to be tested.

### 4.2.4. Test Setup Layout

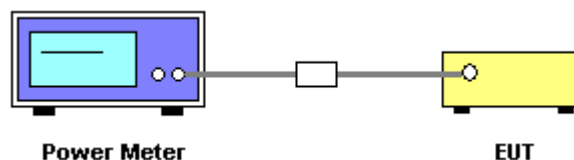

### 4.2.5. Test Deviation

There is no deviation with the original standard.

### 4.2.6. EUT Operation during Test

The EUT was programmed to be in continuously transmitting mode.

**4.2.7. Test Result of Maximum Peak Output Power**

<b>Temperature</b>	26.8	<b>Humidity</b>	54%
<b>Test Engineer</b>	Eason Lu	<b>Configurations</b>	GFSK

<b>Channel</b>	<b>Frequency</b>	<b>Conducted Power (dBm)</b>	<b>Max. Limit (dBm)</b>	<b>Result</b>
0	2402 MHz	3.62	30.00	<b>Complies</b>
39	2441 MHz	3.89	30.00	<b>Complies</b>
78	2480 MHz	3.49	30.00	<b>Complies</b>

### 4.3. Hopping Channel Separation Measurement

#### 4.3.1. Limit

Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater. Alternatively, frequency hopping systems operating in the 2400-2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater.

#### 4.3.2. Measuring Instruments and Setting


Please refer to section 5 of equipments list in this report. The following table is the setting of spectrum analyzer.

Spectrum Parameter	Setting
Attenuation	Auto
Span Frequency	> Measurement Bandwidth or Channel Separation
RB	30 kHz (20dB Bandwidth) / 100 kHz (Channel Separation)
VB	100 kHz (20dB Bandwidth) / 300 kHz (Channel Separation)
Detector	Peak
Trace	Max Hold
Sweep Time	Auto

#### 4.3.3. Test Procedures

1. The transmitter output (antenna port) was connected to the spectrum analyser in peak hold mode.
2. The resolution bandwidth of 30 kHz and the video bandwidth of 100 kHz were utilised for 20 dB bandwidth measurement.
3. The resolution bandwidth of 100 kHz and the video bandwidth of 300 kHz were utilised for channel separation measurement.

#### 4.3.4. Test Setup Layout

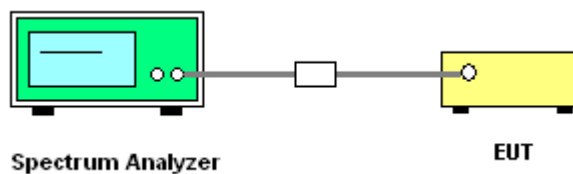

#### 4.3.5. Test Deviation

There is no deviation with the original standard.

#### 4.3.6. EUT Operation during Test

The EUT was programmed to be in continuously transmitting mode.


#### 4.3.7. Test Result of Hopping Channel Separation

<b>Temperature</b>	26.8	<b>Humidity</b>	54%
<b>Test Engineer</b>	Eason Lu	<b>Configurations</b>	GFSK

Frequency	Ch. Separation (MHz)	20dB Bandwidth (kHz)	99% Occupied Bandwidth (kHz)	Result
2402 MHz	1.00	834.00	864.00	<b>Complies</b>
2441 MHz	1.00	834.00	864.00	<b>Complies</b>
2480 MHz	1.00	834.00	870.00	<b>Complies</b>


**Ch. Separation Limits: >20dB bandwidth**

### 20 dB Bandwidth Plot on Channel 0 / 2402 MHz

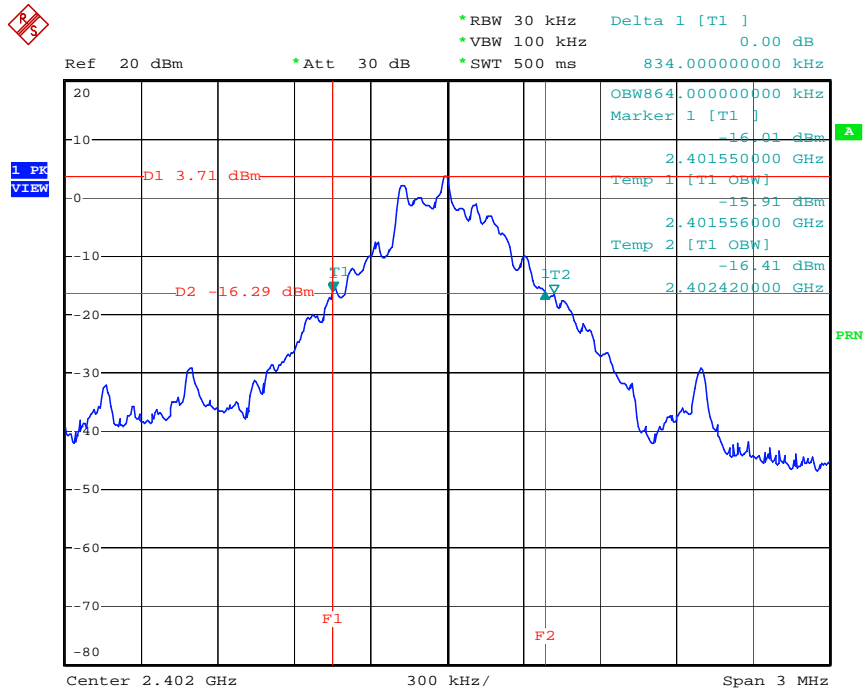

Date: 23.JAN.2007 18:49:51


### 20 dB Bandwidth Plot on Channel 39 / 2441 MHz

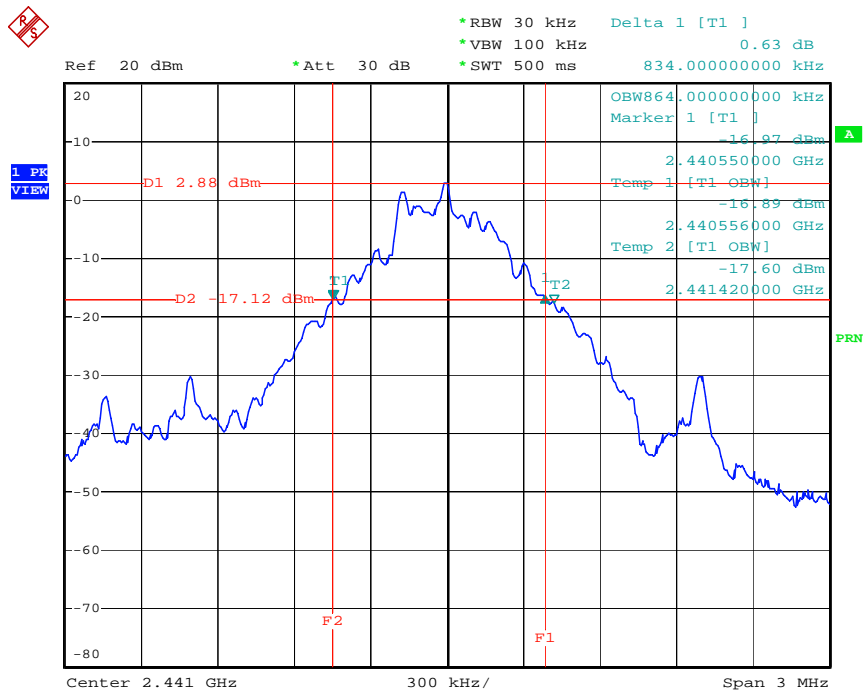

Date: 23.JAN.2007 18:53:16




### 20 dB Bandwidth Plot on Channel 78 / 2480 MHz

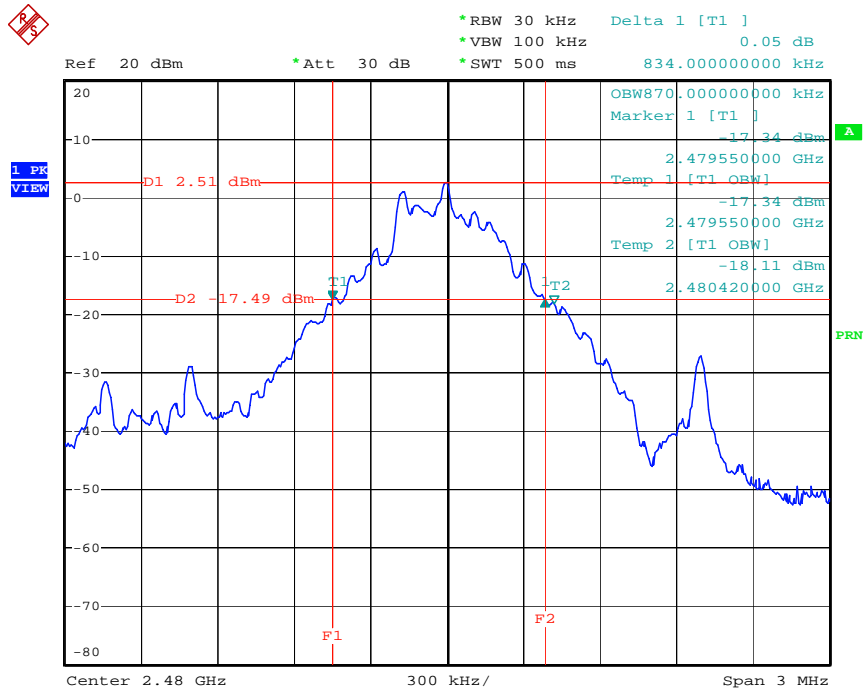


Date: 23.JAN.2007 18:55:42

### Channel Separation Plot on Channel 0~1 / 2402 MHz ~ 2403 MHz

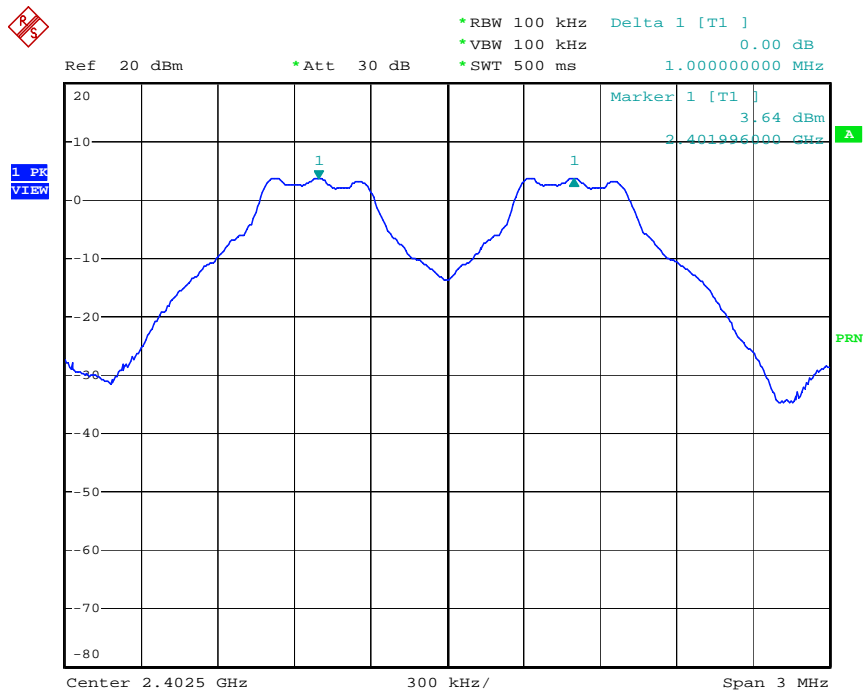


Date: 23.JAN.2007 19:04:26

### Channel Separation Plot on Channel 39~40 / 2441 MHz ~ 2442 MHz

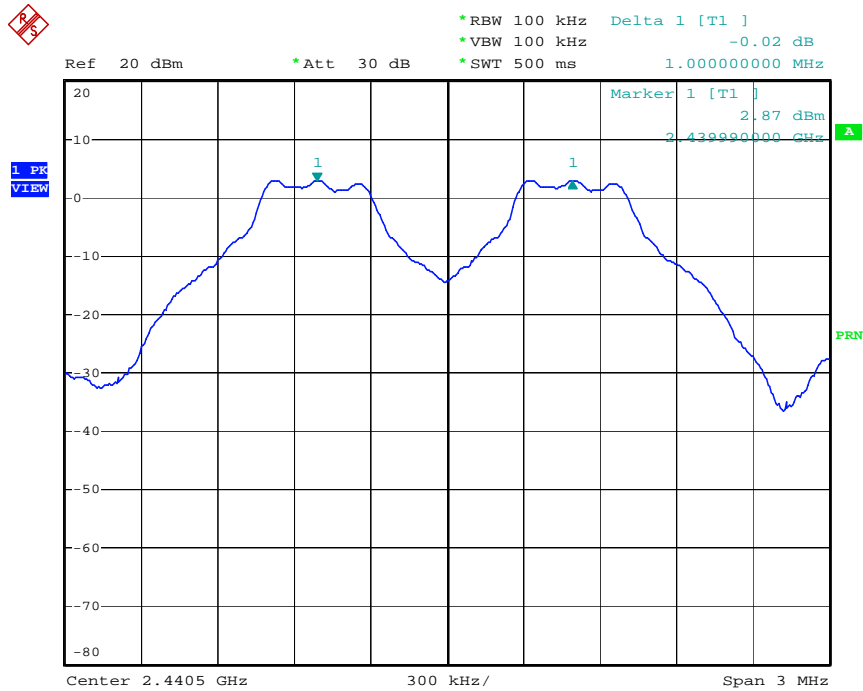

Date: 23.JAN.2007 19:06:29

### Channel Separation Plot on Channel 77~78 / 2479 MHz ~ 2480 MHz

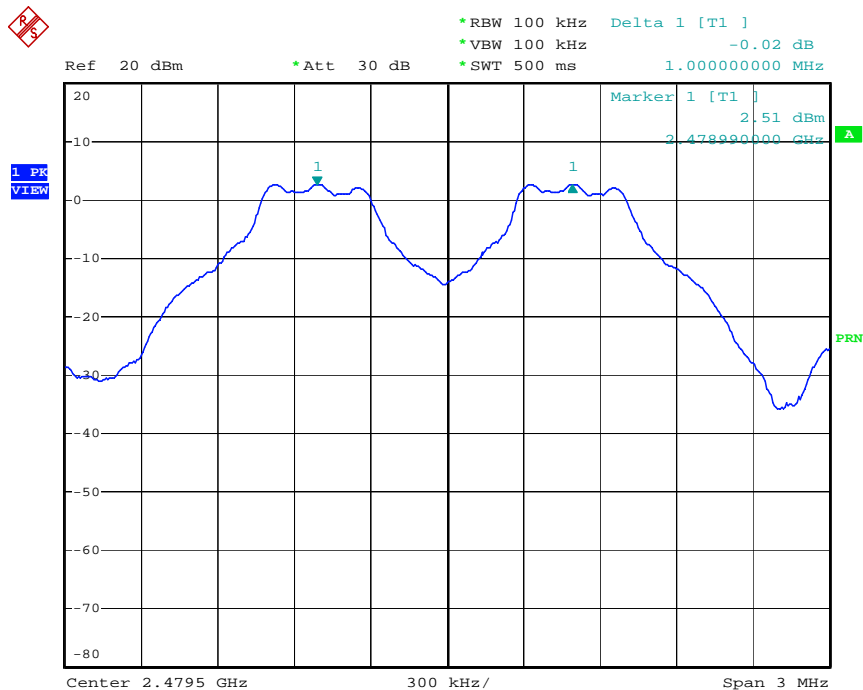

Date: 23.JAN.2007 19:07:59

## 4.4. Number of Hopping Frequency Measurement

### 4.4.1. Limit

For frequency hopping systems operating in the 2400-2483.5 MHz band employing at least 75 non-overlapping hopping channels.

### 4.4.2. Measuring Instruments and Setting


Please refer to section 5 of equipments list in this report. The following table is the setting of spectrum analyzer.

Spectrum Parameters	Setting
Attenuation	Auto
Span Frequency	> Operating Frequency Range
RB	100 kHz
VB	100 kHz
Detector	Peak
Trace	Max Hold
Sweep Time	Auto

### 4.4.3. Test Procedures

1. The transmitter output (antenna port) was connected to the spectrum analyser in peak hold mode.
2. The resolution bandwidth of 100 kHz and the video bandwidth of 100 kHz were utilised.
3. Observe frequency hopping in 2400MHz~2483.5MHz, there are at least 75 non-overlapping channels.

### 4.4.4. Test Setup Layout

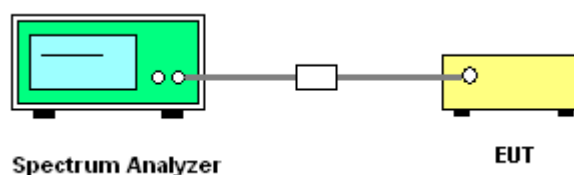



**4.4.5. Test Deviation**

There is no deviation with the original standard.

**4.4.6. EUT Operation during Test**


The EUT was programmed to be in continuously transmitting mode.

**4.4.7. Test Result of Number of Hopping Frequency**

<b>Temperature</b>	26.8	<b>Humidity</b>	54%
<b>Test Engineer</b>	Eason Lu	<b>Configurations</b>	GFSK

Modulation Type	Channel No.	Frequency (MHz)	Hopping Ch. (Channels)	Min. Limit (Channels)	Test Result
GFSK	0 ~ 78	2402 ~ 2480	79	75	Complies

**Number of Hopping Channel Plot on Channel 0~78 / 2402 MHz ~ 2480 MHz**

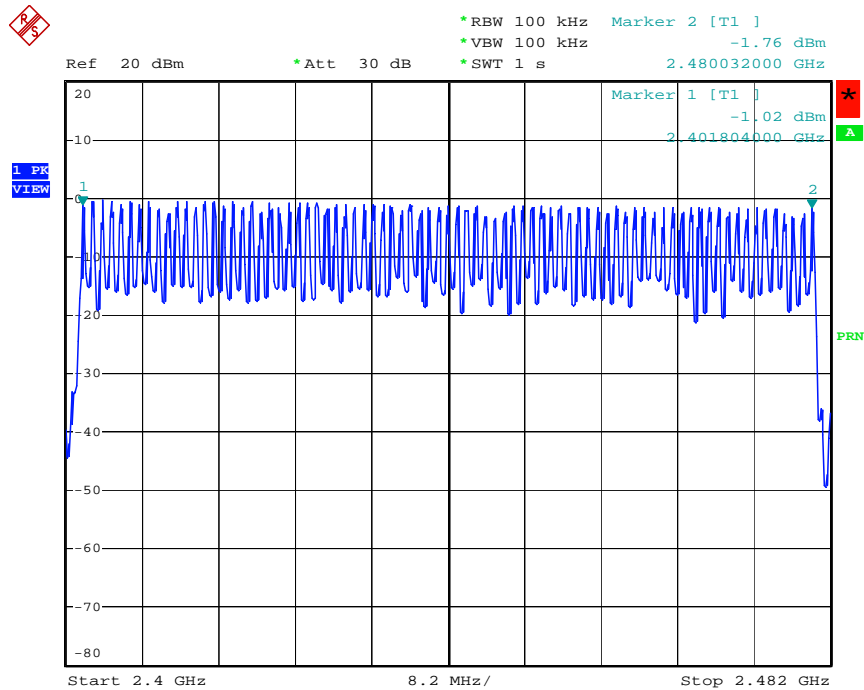

Date: 23.JAN.2007 19:30:42

## 4.5. Dwell Time Measurement

### 4.5.1. Limit

Frequency hopping systems in the 2400-2483.5 MHz band shall use at least 15 channels. The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed.

### 4.5.2. Measuring Instruments and Setting


Please refer to section 5 of equipments list in this report. The following table is the setting of spectrum analyzer.

Spectrum Parameter	Setting
Attenuation	Auto
Span Frequency	0 MHz
RB	1000 kHz
VB	1000 kHz
Detector	Peak
Trace	Single Trigger

### 4.5.3. Test Procedures

1. The transmitter output (antenna port) was connected to the spectrum analyser
2. Set RBW of spectrum analyzer to 1000kHz and VBW to 1000kHz.
3. Use a video trigger with the trigger level set to enable triggering only on full pulses.
4. Sweep Time is more than once pulse time.
5. Set the center frequency on any frequency would be measure and set the frequency span to zero span.
6. Measure the maximum time duration of one single pulse.
7. Set the EUT for DH5, DH3 and DH1 packet transmitting.
8. Measure the maximum time duration of one single pulse.
9. DH5 Packet permit maximum  $1600 / 79 / 6 = 3.37$  hops per second in each channel (5 time slots RX, 1 time slot TX). So, the dwell time is the time duration of the pulse times  $3.37 \times 31.6 = 106.6$  within 31.6 seconds
10. DH3 Packet permit maximum  $1600 / 79 / 4 = 5.06$  hops per second in each channel (3 time slots RX, 1 time slot TX). So, the dwell time is the time duration of the pulse times  $5.06 \times 31.6 = 160$  within 31.6 seconds.
11. DH1 Packet permit maximum  $1600 / 79 / 2 = 10.12$  hops per second in each channel (1 time slot RX, 1 time slot TX). So, the dwell time is the time duration of the pulse times  $10.12 \times 31.6 = 320$  within 31.6 seconds.

### 4.5.4. Test Setup Layout

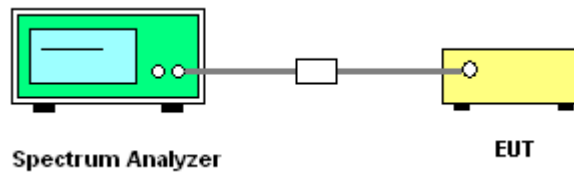

#### 4.5.5. Test Deviation

There is no deviation with the original standard.

#### 4.5.6. EUT Operation during Test


The EUT was programmed to be in continuously transmitting mode.

#### 4.5.7. Test Result of Dwell Time

<b>Temperature</b>	26.8	<b>Humidity</b>	54%
<b>Test Engineer</b>	Eason Lu	<b>Configurations</b>	DH1, DH3, DH5


Data Packet	Frequency	Pulse Duration (ms)	Dwell Time (s)	Limits (s)	Test Result
DH5	2402 MHz	3.1200	0.3328	0.4000	<b>Complies</b>
DH3	2402 MHz	1.8600	0.2976	0.4000	<b>Complies</b>
DH1	2402 MHz	0.6000	0.1920	0.4000	<b>Complies</b>
DH5	2441 MHz	3.1500	0.3360	0.4000	<b>Complies</b>
DH3	2441 MHz	1.8600	0.2976	0.4000	<b>Complies</b>
DH1	2441 MHz	0.6000	0.1920	0.4000	<b>Complies</b>
DH5	2480 MHz	0.5800	0.0619	0.4000	<b>Complies</b>
DH3	2480 MHz	1.8400	0.2944	0.4000	<b>Complies</b>
DH1	2480 MHz	3.1200	0.9984	0.4000	<b>Complies</b>

### DH5 Dwell Time Plot on Channel 0 / 2402 MHz

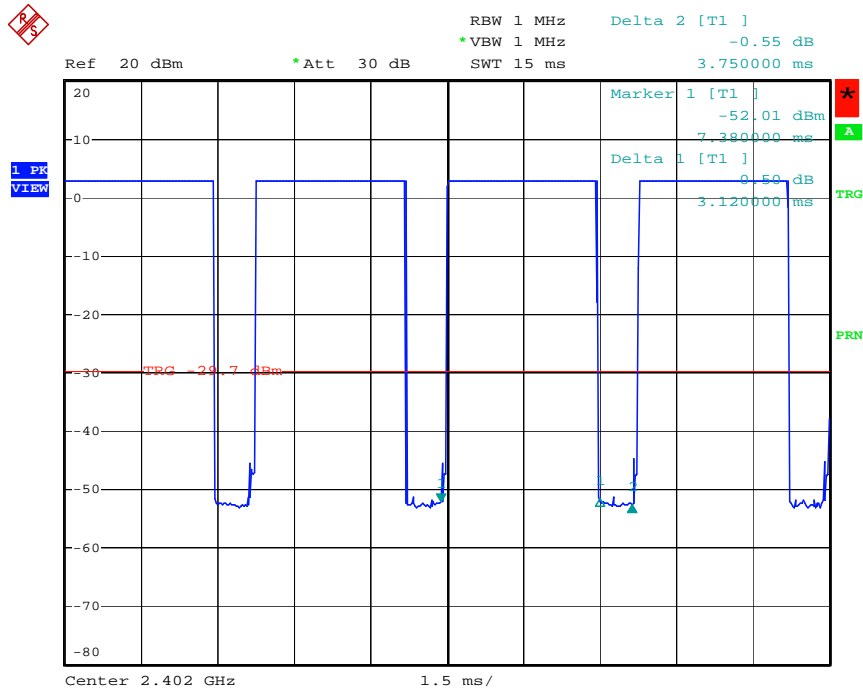


Date: 23.JAN.2007 19:18:51

### DH3 Dwell Time Plot on Channel 0 / 2402 MHz

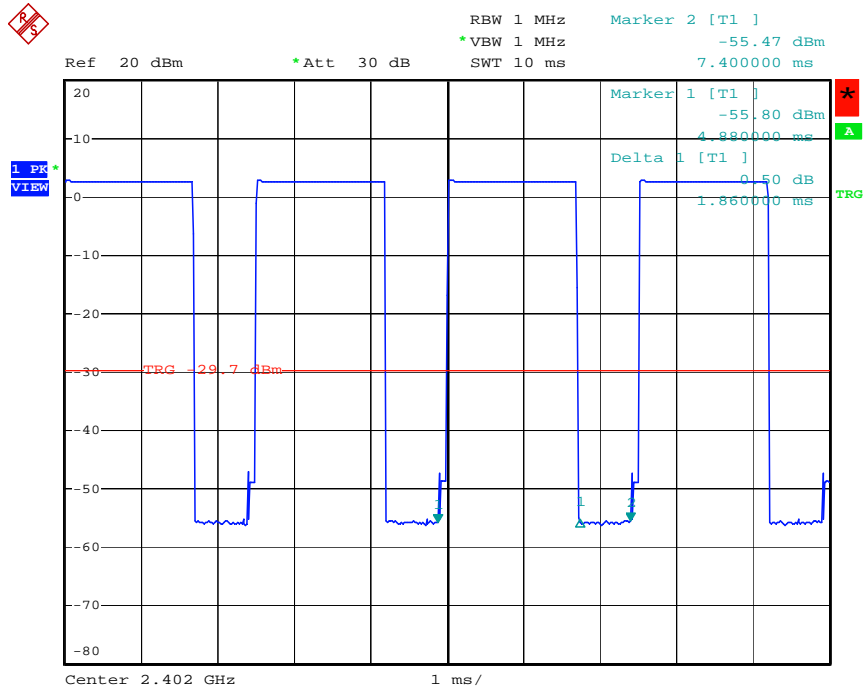


Date: 23.JAN.2007 19:23:19

### DH1 Dwell Time Plot on Channel 0 / 2402 MHz

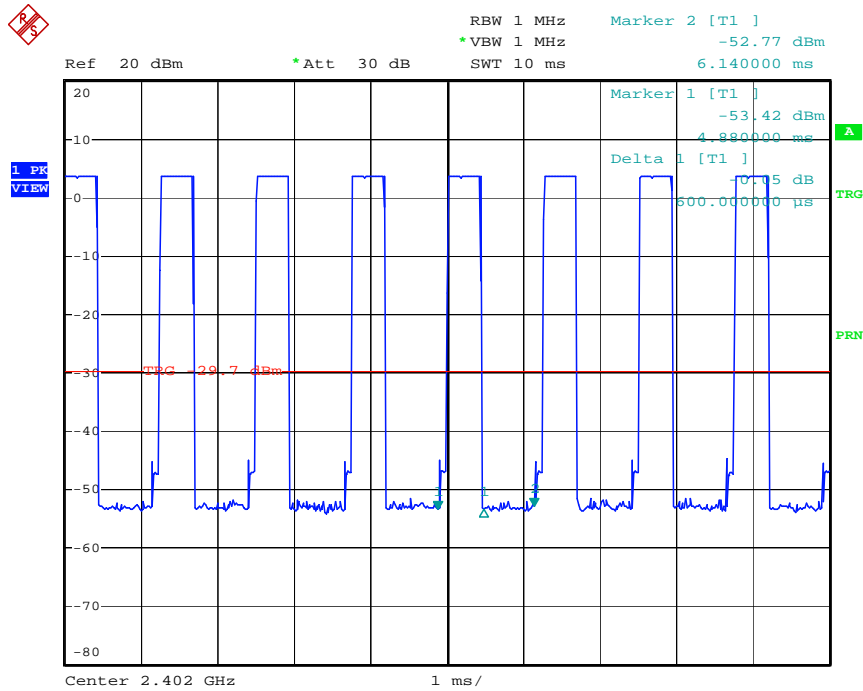


Date: 23.JAN.2007 19:25:26

### DH5 Dwell Time Plot on Channel 39 / 2441 MHz

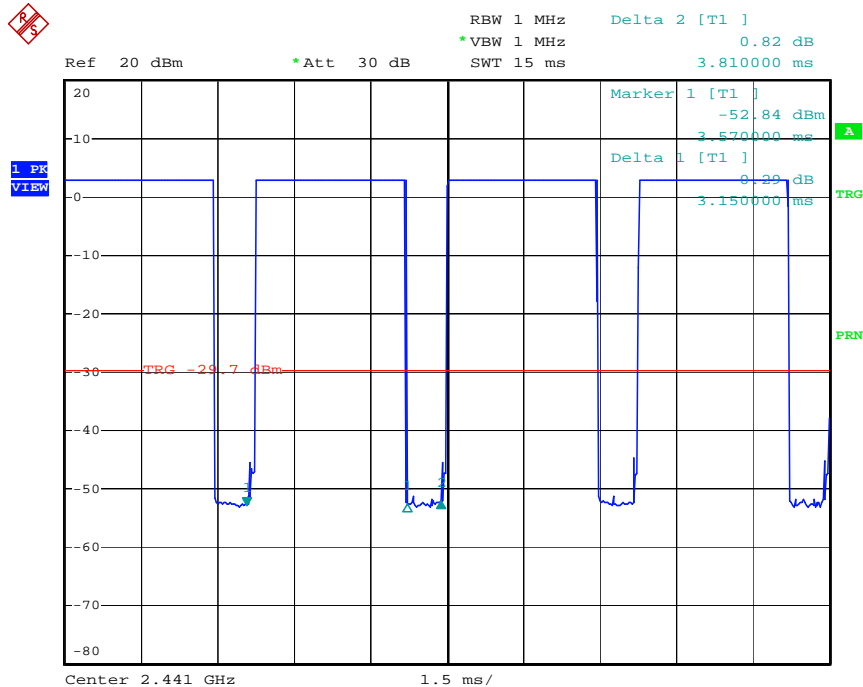


Date: 23.JAN.2007 19:16:22

### DH3 Dwell Time Plot on Channel 39 / 2441 MHz

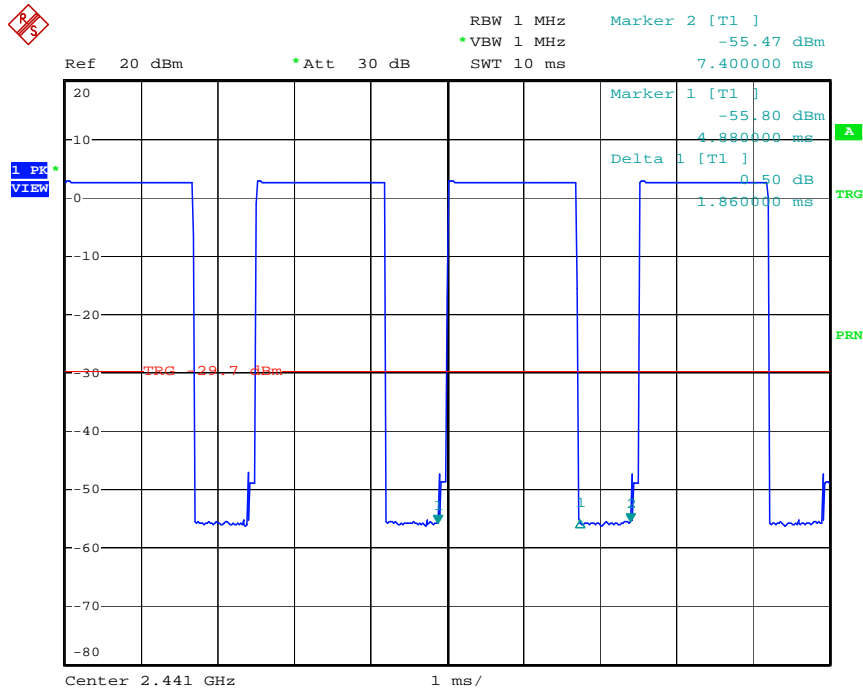


Date: 23.JAN.2007 19:20:44

### DH1 Dwell Time Plot on Channel 39 / 2441 MHz

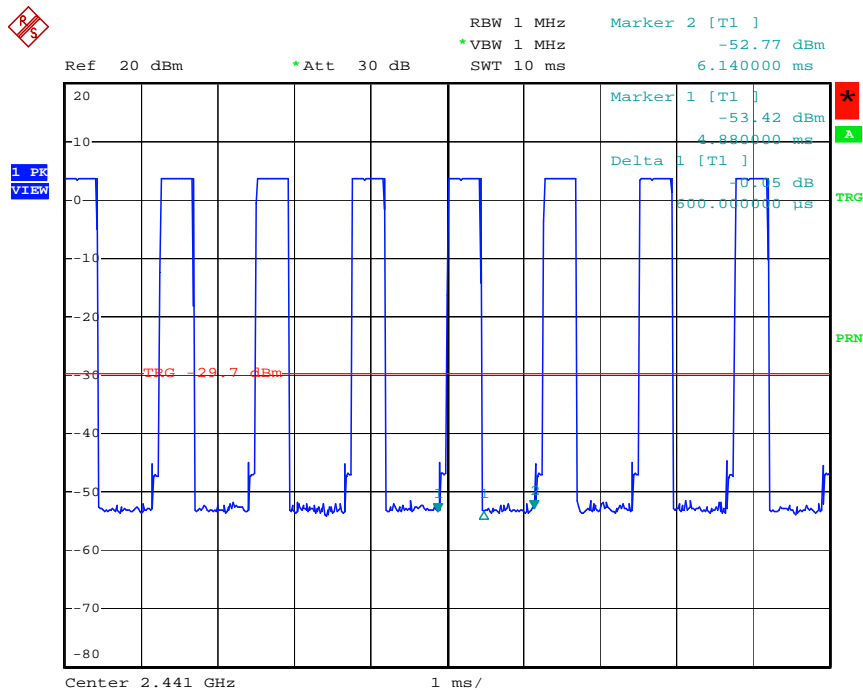


Date: 23.JAN.2007 19:26:09

### DH5 Dwell Time Plot on Channel 78 / 2480 MHz

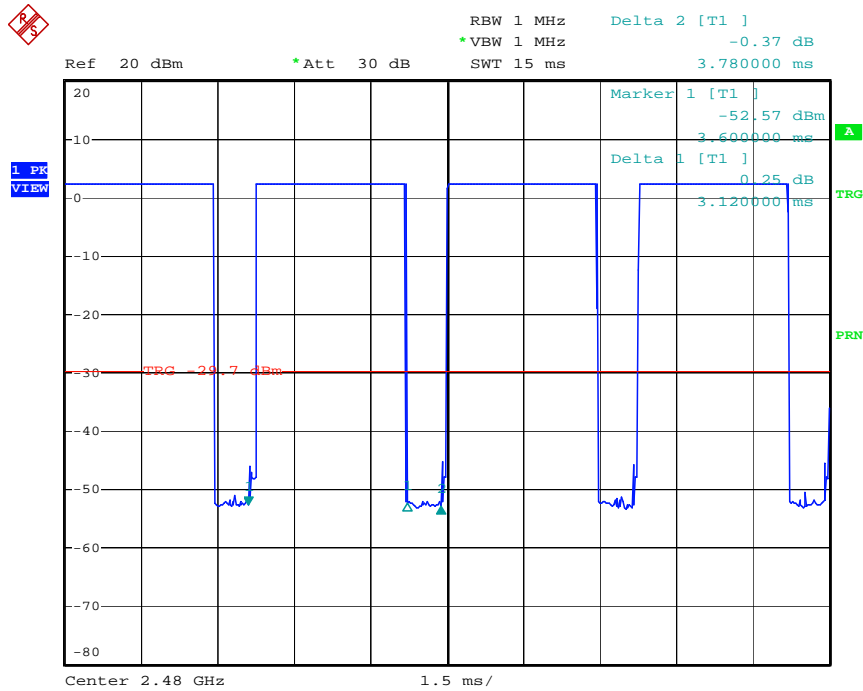


Date: 23.JAN.2007 19:14:18

### DH3 Dwell Time Plot on Channel 78 / 2480 MHz

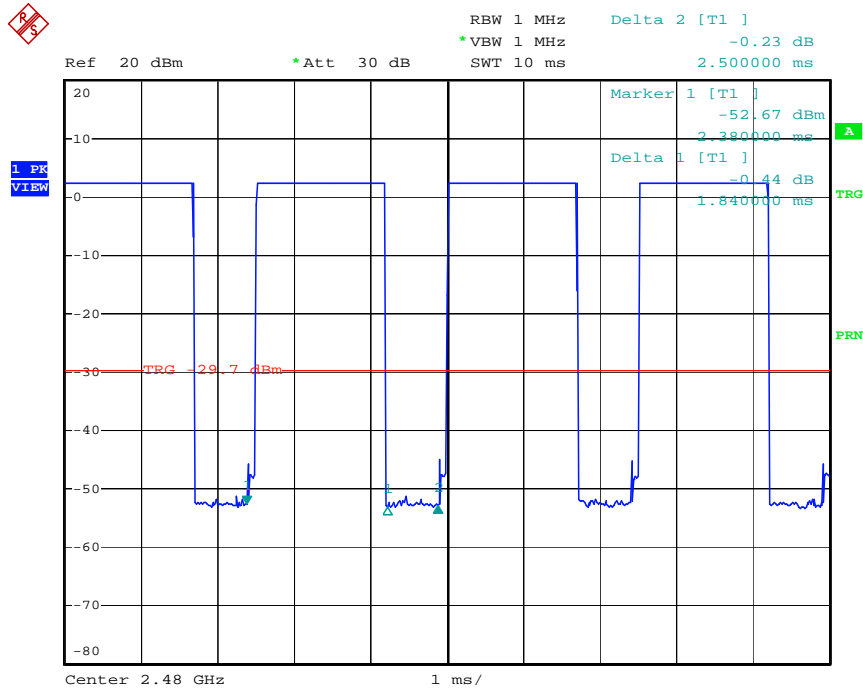

Date: 23.JAN.2007 19:12:37

### DH1 Dwell Time Plot on Channel 78 / 2480 MHz

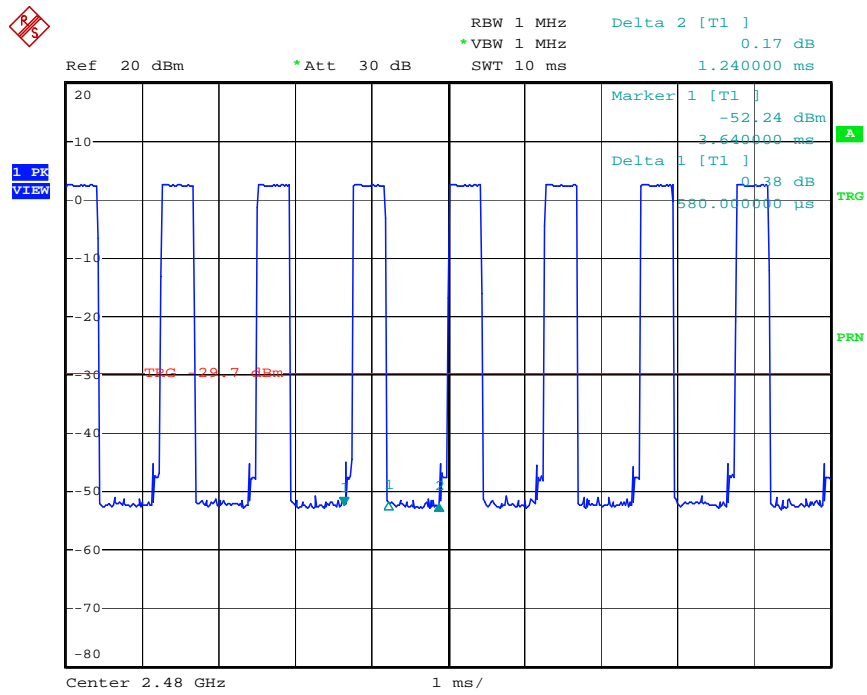

Date: 23.JAN.2007 19:11:05



## 4.6. Radiated Emissions Measurement

### 4.6.1. Limit

20dBc in any 100 kHz bandwidth outside the operating frequency band. In case the emission fall within the restricted band specified on 15.205(a), then the 15.209(a) limit in the table below has to be followed.

Frequencies (MHz)	Field Strength (micorvolts/meter)	Measurement Distance (meters)
0.009~0.490	2400/F(KHz)	300
0.490~1.705	24000/F(KHz)	30
1.705~30.0	30	30
30~88	100	3
88~216	150	3
216~960	200	3
Above 960	500	3

### 4.6.2. Measuring Instruments and Setting

Please refer to section 5 of equipments list in this report. The following table is the setting of spectrum analyzer and receiver.

Spectrum Parameter	Setting
Attenuation	Auto
Start Frequency	1000 MHz
Stop Frequency	10th carrier harmonic
RB / VB (Emission in restricted band)	1MHz / 1MHz for Peak, 1 MHz / 10Hz for Average
RB / VB (Emission in non-restricted band)	1000KHz / 1000KHz for peak


Receiver Parameter	Setting
Attenuation	Auto
Start ~ Stop Frequency	9kHz~150kHz / RB 200Hz for QP
Start ~ Stop Frequency	150kHz~30MHz / RB 9kHz for QP
Start ~ Stop Frequency	30MHz~1000MHz / RB 120kHz for QP

#### 4.6.3. Test Procedures


1. Configure the EUT according to ANSI C63.4. The EUT was placed on the top of the turntable 0.8 meter above ground. The phase center of the receiving antenna mounted on the top of a height-variable antenna tower was placed 3 meters far away from the turntable.
2. Power on the EUT and all the supporting units. The turntable was rotated by 360 degrees to determine the position of the highest radiation.
3. The height of the broadband receiving antenna was varied between one meter and four meters above ground to find the maximum emissions field strength of both horizontal and vertical polarization.
4. For each suspected emissions, the antenna tower was scan (from 1 M to 4 M) and then the turntable was rotated (from 0 degree to 360 degrees) to find the maximum reading.
5. Set the test-receiver system to Peak or CISPR quasi-peak Detect Function with specified bandwidth under Maximum Hold Mode.
6. For emissions above 1GHz, use 1MHz VBW and RBW for peak reading. Then 1MHz RBW and 10Hz VBW for average reading in spectrum analyzer.
7. When the radiated emissions limits are expressed in terms of the average value of the emissions, and pulsed operation is employed, the measurement field strength shall be determined by averaging over one complete pulse train, including blanking intervals, as long as the pulse train does not exceed 0.1 seconds. As an alternative (provided the transmitter operates for longer than 0.1 seconds) or in cases where the pulse train exceeds 0.1 seconds, the measured field strength shall be determined from the average absolute voltage during a 0.1 second interval during which the field strength is at its maximum value.
8. If the emissions level of the EUT in peak mode was 3 dB lower than the average limit specified, then testing will be stopped and peak values of EUT will be reported, otherwise, the emissions which do not have 3 dB margin will be repeated one by one using the quasi-peak method for below 1GHz.
9. For testing above 1GHz, the emissions level of the EUT in peak mode was lower than average limit (that means the emissions level in peak mode also complies with the limit in average mode), then testing will be stopped and peak values of EUT will be reported, otherwise, the emissions will be measured in average mode again and reported.
10. In case the emission is lower than 30MHz, loop antenna has to be used for measurement and the recorded data should be QP measured by receiver. High – Low scan is not required in this case.

#### 4.6.4. Test Setup Layout

For radiated emissions below 30MHz

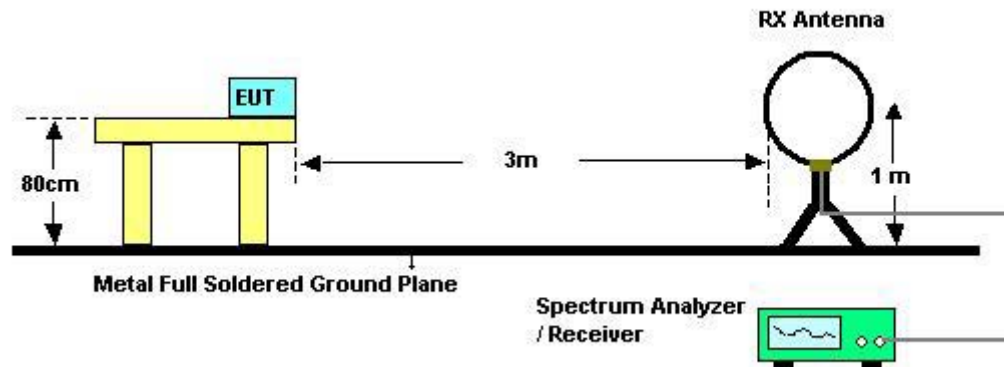

For radiated emissions above 30MHz

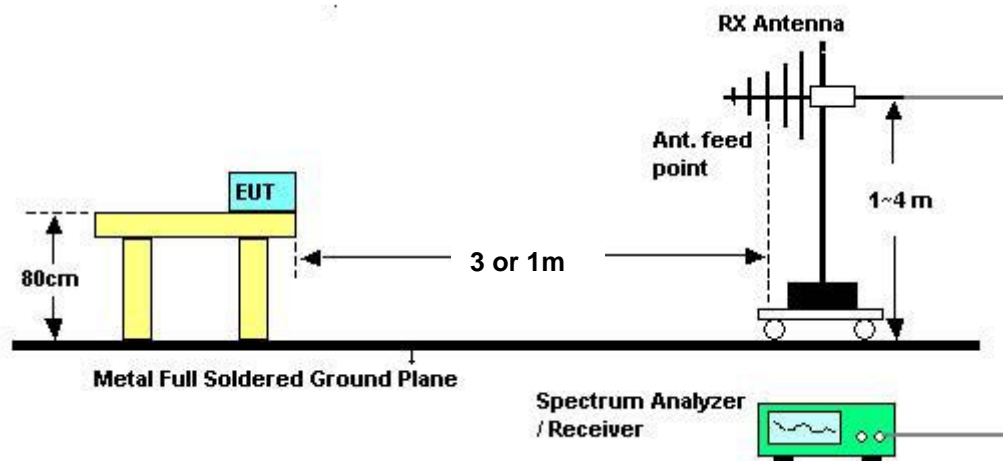

Above 10 GHz shall be extrapolated to the specified distance using an extrapolation factor of 20 dB/decade from 3m to 1m.

Distance extrapolation factor =  $20 \log (\text{specific distance [3m]} / \text{test distance [1m]})$  (dB);

Limit line = specific limits (dBuV) + distance extrapolation factor [9.54 dB].

#### 4.6.5. Test Deviation

There is no deviation with the original standard.

#### 4.6.6. EUT Operation during Test

The EUT was programmed to be in continuously transmitting mode.

#### 4.6.7. Results of Radiated Emissions (9kHz~30MHz)

<b>Temperature</b>	26	<b>Humidity</b>	56%
<b>Test Engineer</b>	Vic Hsiao		

<b>Freq. (MHz)</b>	<b>Level (dBuV)</b>	<b>Over Limit (dB)</b>	<b>Limit Line (dBuV)</b>	<b>Remark</b>
-	-	-	-	See Note

Note:

The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.


Distance extrapolation factor =  $40 \log(\text{specific distance} / \text{test distance})$  (dB);

Limit line = specific limits (dBuV) + distance extrapolation factor.

## 4.6.8. Results of Radiated Emissions (30MHz~1GHz)


Temperature	26	Humidity	56%
Test Engineer	Vic Hsiao	Configurations	Channel 39

Horizontal

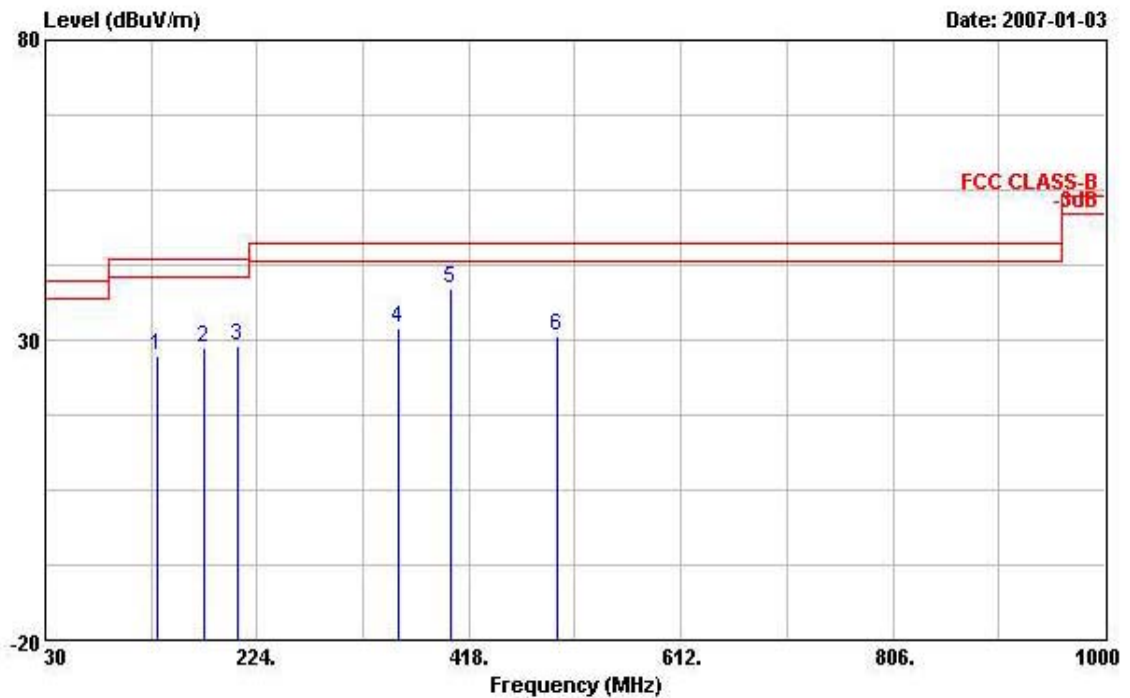

	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Antenna Factor	Cable Loss	Preamp Factor	Remark	Ant Pos	Table Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB		cm	deg
1 @	132.820	27.53	-15.97	43.50	41.70	12.10	1.80	28.07	Peak	---	---
2 @	175.500	28.69	-14.81	43.50	45.14	9.38	2.19	28.02	Peak	---	---
3 @	206.540	28.89	-14.61	43.50	45.35	9.48	2.28	28.22	Peak	---	---
4 @	353.980	32.12	-13.88	46.00	42.60	15.08	3.31	28.87	Peak	---	---
5 @	400.540	38.52	-7.48	46.00	47.83	16.48	3.37	29.16	Peak	---	---
6 @	498.510	30.58	-15.42	46.00	38.36	18.09	3.81	29.68	Peak	---	---

**Vertical**

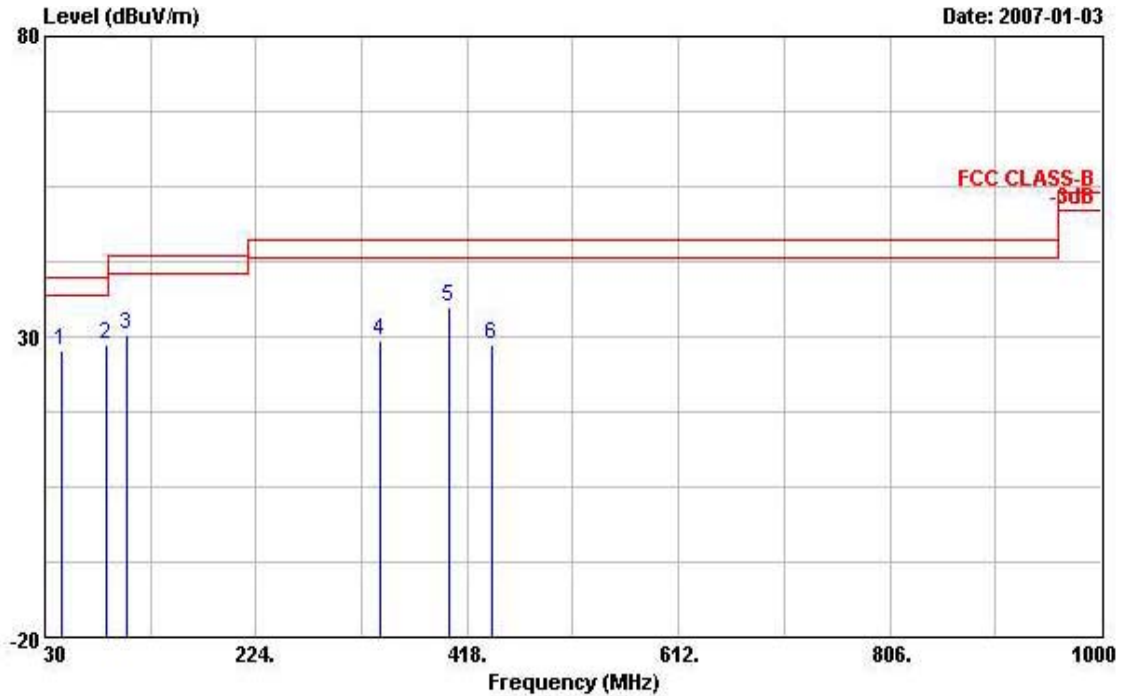

	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Antenna Factor	Cable Loss	Preamp Factor	Remark	Ant Pos	Table Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB		cm	deg
1 @	44.550	27.68	-12.32	40.00	44.29	10.51	0.73	27.86	Peak	---	---
2 @	87.230	28.79	-11.21	40.00	46.43	8.86	1.30	27.80	Peak	---	---
3 @	105.660	30.31	-13.19	43.50	44.86	11.92	1.43	27.90	Peak	---	---
4 @	338.460	29.34	-16.66	46.00	40.14	14.71	3.29	28.81	Peak	---	---
5 @	400.540	35.04	-10.96	46.00	44.35	16.48	3.37	29.16	Peak	---	---
6 @	440.310	28.58	-17.42	46.00	37.12	16.95	3.59	29.08	Peak	---	---

**Note:**

The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.


Emission level (dBuV/m) = 20 log Emission level (uV/m).

Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level.

4.6.9. Results for Radiated Emissions (1GHz~10<sup>th</sup> Harmonic)


Temperature	26	Humidity	56%
Test Engineer	Vic Hsiao	Configurations	Channel 0

Horizontal

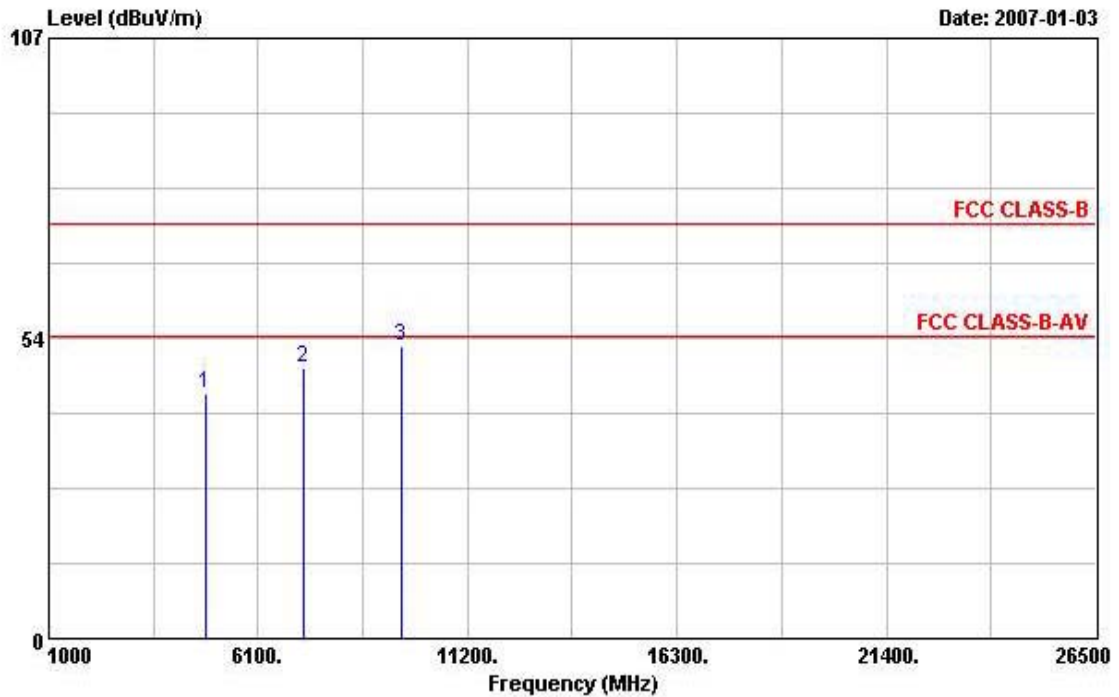

	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Antenna Factor	Cable Loss	Preamp Factor	Remark	Ant Pos	Table Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB		cm	deg
1 @	4804.000	43.55	-30.45	74.00	40.18	33.06	2.65	32.34	PEAK	---	---
2 @	7206.000	48.16	-25.84	74.00	41.48	35.90	3.32	32.54	PEAK	---	---
3 @	9608.000	52.14	-21.86	74.00	41.93	38.49	4.52	32.80	PEAK	---	---

**Vertical**

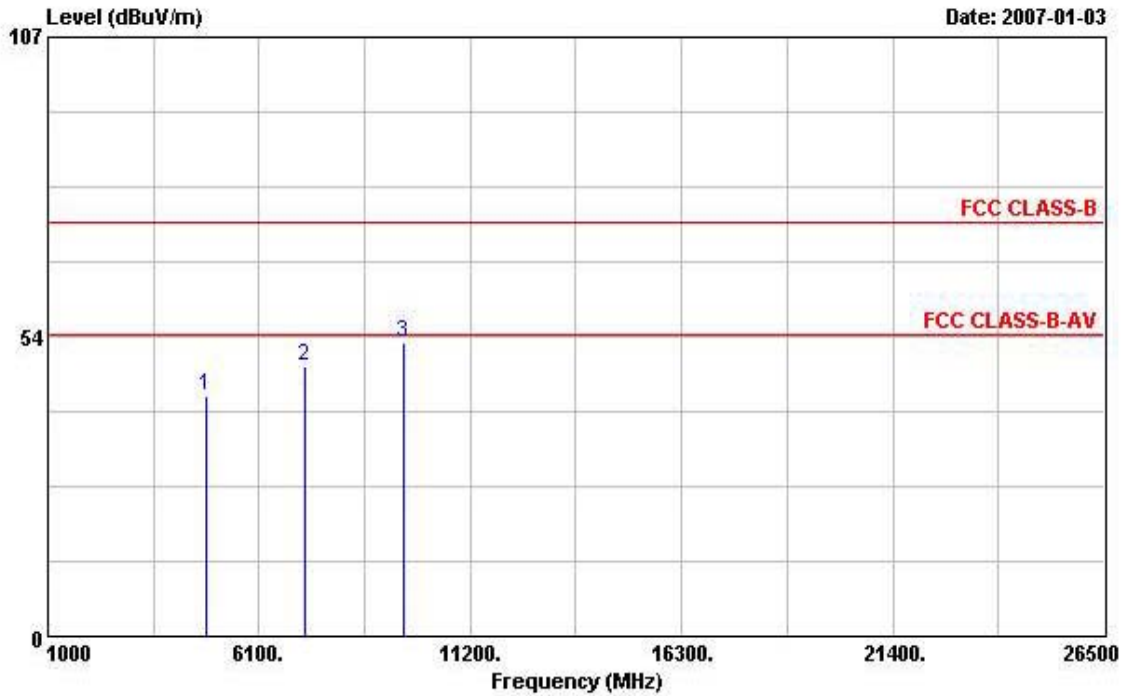


	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Antenna Factor	Cable Loss	Preamp Factor	Remark	Ant Pos	Table Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB		cm	deg
1 @	4804.000	43.10	-30.90	74.00	39.72	33.06	2.65	32.34	PEAK	---	---
2 @	7210.000	48.18	-25.82	74.00	41.51	35.90	3.32	32.55	PEAK	---	---
3 @	9608.000	52.61	-21.39	74.00	42.40	38.49	4.52	32.80	PEAK	---	---




<b>Temperature</b>	26	<b>Humidity</b>	56%
<b>Test Engineer</b>	Vic Hsiao	<b>Configurations</b>	Channel 39

**Horizontal**

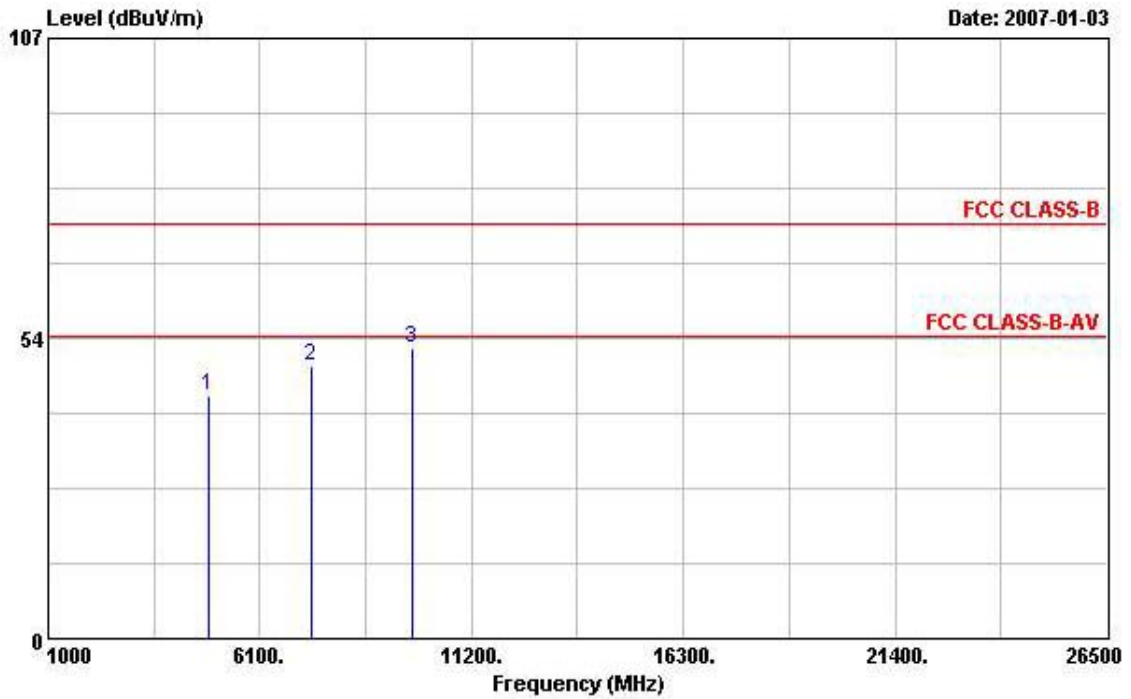

	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Antenna Factor	Cable Loss	Preamp Factor	Remark	Ant Pos	Table Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB		cm	deg
1 @	4882.000	43.36	-30.64	74.00	39.79	33.18	2.69	32.30	PEAK	---	---
2 @	7323.000	48.64	-25.36	74.00	41.65	36.19	3.41	32.61	PEAK	---	---
3 @	9764.000	51.81	-22.19	74.00	41.22	38.80	4.59	32.79	PEAK	---	---


**Vertical**

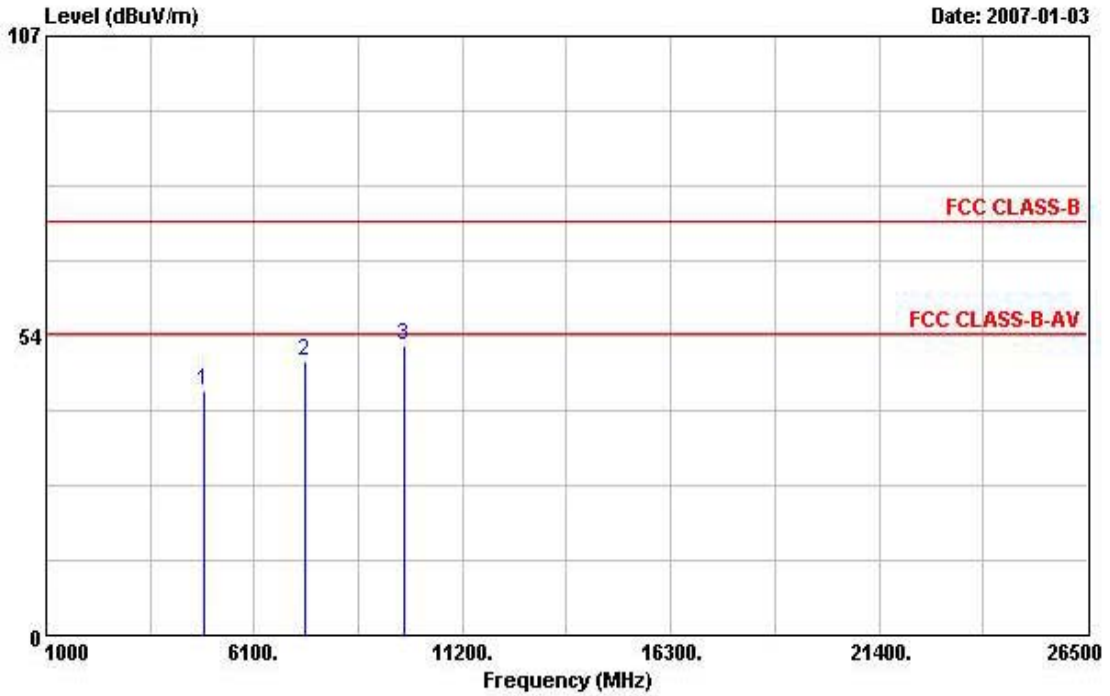

	Freq	Level	Over Limit	Limit Line	Read Level	Antenna Factor	Cable Loss	Preamp Factor	Remark	Ant Pos	Table Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB		cm	deg
1 @	4880.000	43.70	-30.30	74.00	40.13	33.18	2.69	32.30	PEAK	---	---
2 @	7327.000	48.79	-25.21	74.00	41.80	36.19	3.41	32.61	PEAK	---	---
3 @	9764.000	51.85	-22.15	74.00	41.26	38.80	4.59	32.79	PEAK	---	---


<b>Temperature</b>	26	<b>Humidity</b>	56%
<b>Test Engineer</b>	Vic Hsiao	<b>Configurations</b>	Channel 78

**Horizontal**

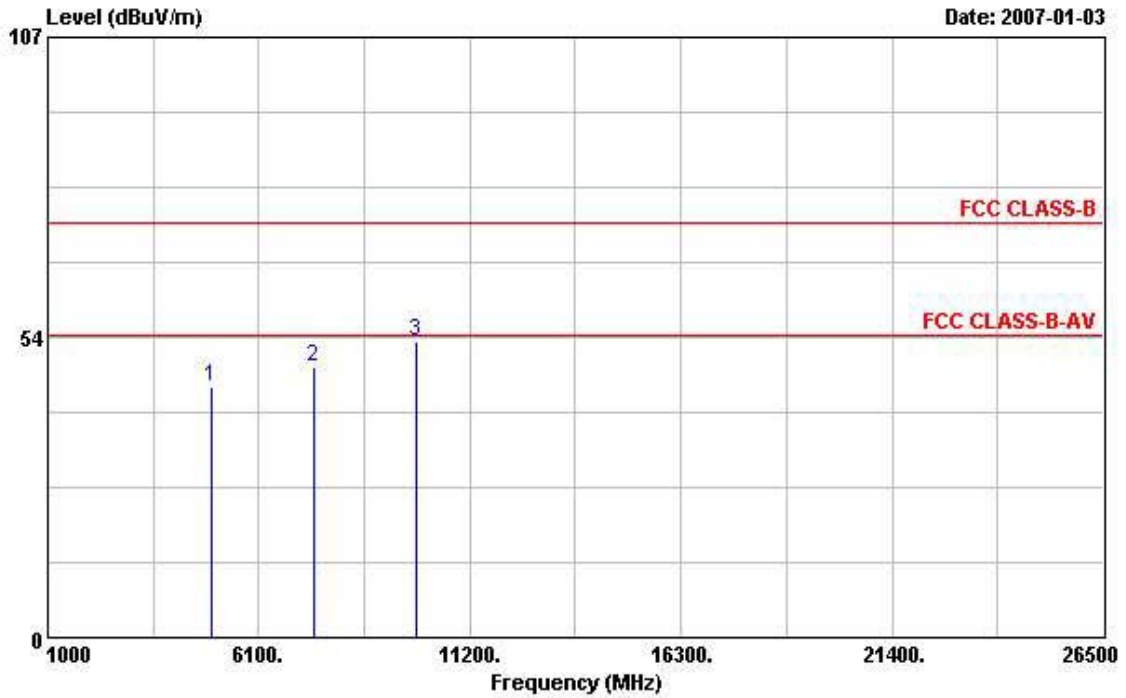

	Over	Limit	ReadAntenna	Cable	Preamp		Ant	Table			
	Limit	Line	Level	Loss	Factor	Remark	Pos	Pos			
	dB	dBuV/m	dBuV	dB	dB		cm	deg			
1 @	4956.000	44.63	-29.37	74.00	40.83	33.34	2.73	32.26	PEAK	---	---
2 @	7440.000	48.06	-25.94	74.00	40.76	36.48	3.50	32.67	PEAK	---	---
3 @	9920.000	52.78	-21.22	74.00	41.84	39.08	4.65	32.79	PEAK	---	---

**Vertical**

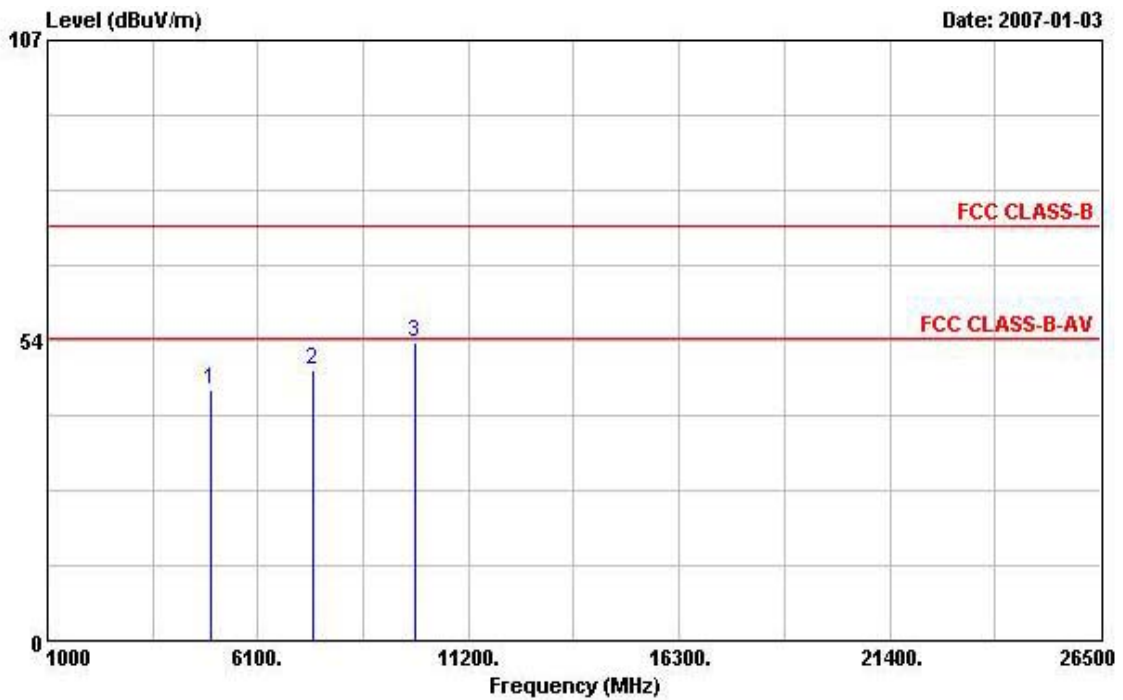

	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Antenna Factor	Cable Loss	Preamp Factor	Remark	Ant Pos	Table Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB		cm	deg
1 @	4964.000	44.63	-29.37	74.00	40.83	33.34	2.73	32.26	PEAK	---	---
2 @	7436.000	48.28	-25.72	74.00	40.99	36.48	3.47	32.66	PEAK	---	---
3 @	9916.000	53.09	-20.91	74.00	42.18	39.04	4.65	32.79	PEAK	---	---

**Note:**

The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.

Emission level (dBuV/m) = 20 log Emission level (uV/m).

Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level.

## 4.7. Band Edge Emissions Measurement

### 4.7.1. Limit

20dBc in any 100 kHz bandwidth outside the operating frequency band. In case the emission fall within the restricted band specified on 15.205(a), then the 15.209(a) limit in the table below has to be followed.

Frequencies (MHz)	Field Strength (micorvolts/meter)	Measurement Distance (meters)
0.009~0.490	2400/F(KHz)	300
0.490~1.705	24000/F(KHz)	30
1.705~30.0	30	30
30~88	100	3
88~216	150	3
216~960	200	3
Above 960	500	3

### 4.7.2. Measuring Instruments and Setting

Please refer to section 5 of equipments list in this report. The following table is the setting of the spectrum analyzer.

Spectrum Parameter	Setting
Attenuation	Auto
Span Frequency	100 MHz
RB / VB (Emission in restricted band)	1MHz / 1MHz for Peak, 1 MHz / 10Hz for Average
RB / VB (Emission in non-restricted band)	100 KHz /100 KHz for Peak

### 4.7.3. Test Procedures

1. The test procedure is the same as section 4.5.3, only the frequency range investigated is limited to 100MHz around bandedges.
2. In case the emission is fail due to the used RB/VB is too wide, marker-delta method of FCC Public Notice DA00-705 will be followed.

### 4.7.4. Test Setup Layout

This test setup layout is the same as that shown in section 4.6.4.

### 4.7.5. Test Deviation

There is no deviation with the original standard.

### 4.7.6. EUT Operation during Test

The EUT was programmed to be in continuously transmitting mode.



4.7.7. Test Result of Band Edge and Fundamental Emissions

<b>Temperature</b>	26	<b>Humidity</b>	56%
<b>Test Engineer</b>	Vic Hsiao	<b>Configurations</b>	Channel 0, 78

Channel 0

	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Antenna Factor	Cable Loss	Preamp Factor	Remark	Ant Pos	Table Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB		cm	deg
1 @	2390.000	53.13	-20.87	74.00	23.20	28.29	1.64	0.00	Peak	---	---
2 @	2401.770	74.29				28.29	1.64	0.00	Peak	---	---
1 @	2390.000	42.60	-11.40	54.00	12.67	28.29	1.64	0.00	Average	---	---
2 @	2401.770	73.61				28.29	1.64	0.00	Average	---	---

Channel 78

	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Antenna Factor	Cable Loss	Preamp Factor	Remark	Ant Pos	Table Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB		cm	deg
1 @	2480.050	68.28				28.47	1.68	0.00	Peak	---	---
2 @	2483.500	54.04	-19.96	74.00	23.89	28.47	1.68	0.00	Peak	---	---
1 @	2480.050	66.80				28.47	1.68	0.00	Average	---	---
2 @	2483.500	42.88	-11.12	54.00	12.73	28.47	1.68	0.00	Average	---	---


Note:

Emission level (dBuV/m) = 20 log Emission level (uV/m).

Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level.


**For Emission not in Restricted Band**

**Low Band Edge Plot on Channel 0 / 2402 MHz**

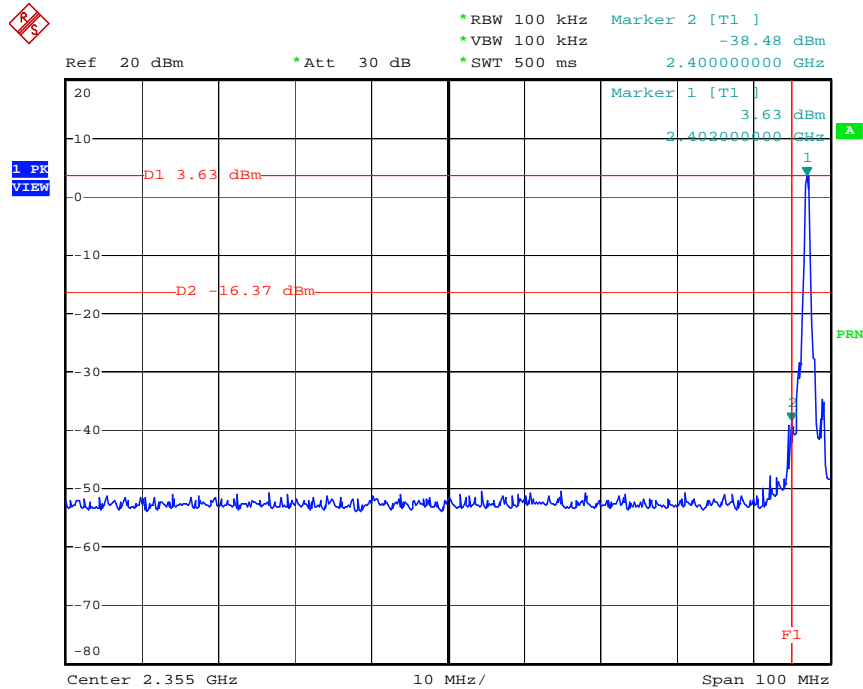

Date: 23.JAN.2007 19:02:11

**High Band Edge Plot on Channel 78 / 2480 MHz**

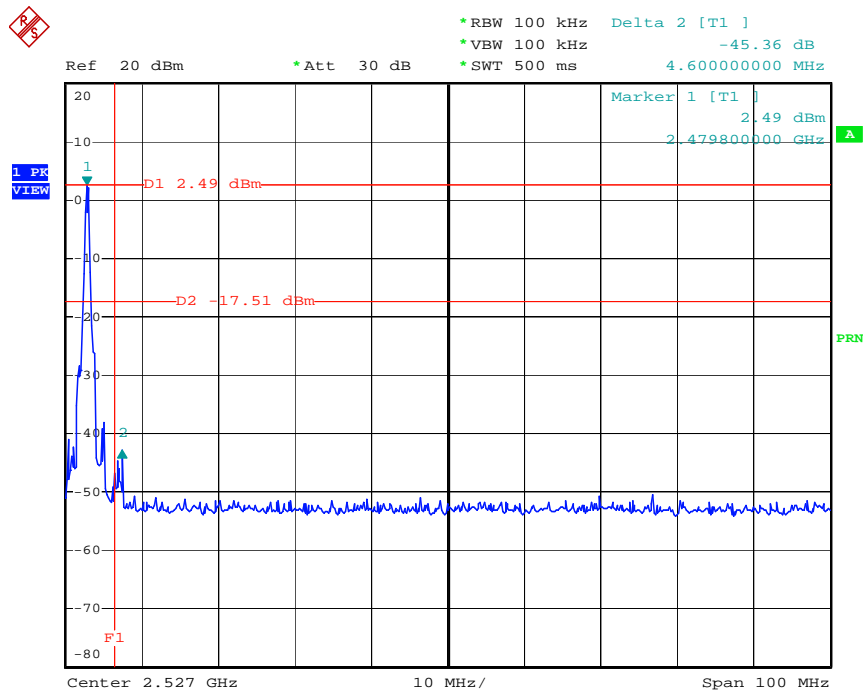

Date: 23.JAN.2007 18:58:57

## **4.8. Antenna Requirements**

### **4.8.1. Limit**

Except for special regulations, the Low-power Radio-frequency Devices must not be equipped with any jacket for installing an antenna with extension cable. An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this Section. The manufacturer may design the unit so that the user can replace a broken antenna, but the use of a standard antenna jack or electrical connector is prohibited. Further, this requirement does not apply to intentional radiators that must be professionally installed.

### **4.8.2. Antenna Connector Construction**

Please refer to section 3.3 in this test report, antenna connector complied with the requirements.



## 5. LIST OF MEASURING EQUIPMENTS

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Remark
EMC Receiver	R&S	ESCS 30	100132	9kHz – 2.75GHz	July. 04, 2006	Conduction (CO01-HY)
LISN	MessTec	NNB-2/16Z	2001/004	9kHz – 30MHz	Apr. 28, 2006	Conduction (CO01-HY)
LISN (Support Unit)	MessTec	NNB-2/16Z	2001/009	9kHz – 30MHz	Apr. 19, 2006	Conduction (CO01-HY)
EMI Filter	LINDGREN	LRE-2060	1004	< 450Hz	N/A	Conduction (CO01-HY)
EMI Filter	LINDGREN	N6006	201052	0 – 60Hz	N/A	Conduction (CO01-HY)
RF Cable-CON	Suhner Switzerland	RG223/U	CB029	9kHz – 30MHz	Dec. 21, 2006	Conduction (CO01-HY)
3m Semi Anechoic Chamber	SIDT FRANKONIA	SAC-3M	03CH03-HY	30 MHz - 1 GHz 3m	Jun. 15, 2006	Radiation (03CH03-HY)
Amplifier	SCHAFFNER	CPA9231A	3565	9 kHz - 2 GHz	Mar. 14, 2006	Radiation (03CH03-HY)
Amplifier	Agilent	8449B	3008A02120	1 GHz - 26.5 GHz	May 29, 2006	Radiation (03CH03-HY)
Spectrum Analyzer	R&S	FSP40	100004/040	9 kHz - 40 GHz	Sep. 21, 2006	Radiation (03CH03-HY)
Bilog Antenna	SCHAFFNER	CBL 6112D	22237	30 MHz – 1 GHz	Jul. 24, 2006	Radiation (03CH03-HY)
Horn Antenna	EMCO	3115	6741	1GHz ~ 18GHz	Apr. 27, 2006	Radiation (03CH03-HY)
Horn Antenna	SCHWARZBECK	BBHA9170	BBHA9170154	15 GHz - 40 GHz	NCR	Radiation (03CH03-HY)
RF Cable-R03m	Jye Bao	RG142	CB021	30 MHz - 1 GHz	Dec. 02, 2006	Radiation (03CH03-HY)
RF Cable-HIGH	SUHNER	SUCOFLEX 106	03CH03-HY	1 GHz - 40 GHz	Dec. 02, 2006	Radiation (03CH03-HY)
Turn Table	HD	DS 420	420/650/00	0 – 360 degree	N/A	Radiation (03CH03-HY)
Antenna Mast	HD	MA 240	240/560/00	1 m - 4 m	N/A	Radiation (03CH03-HY)
Spectrum Analyzer	R&S	FSP30	100023	9kHz ~ 30GHz	Nov. 25, 2006	Conducted (TH01-HY)
Power Meter	R&S	NRVS	100764	DC ~ 40GHz	Jul. 20, 2006	Conducted (TH01-HY)
Power Sensor	R&S	NRV-Z51	100666	DC ~ 40GHz	Jul. 20, 2006	Conducted (TH01-HY)
Power Sensor	R&S	NRV-Z32	100057	30MHz ~ 6GHz	Jun. 10, 2006	Conducted (TH01-HY)
DC Power Source	G.W.	GPC-6030D	C671845	DC 1V ~ 60V	Dec. 27, 2006	Conducted (TH01-HY)
Temp. and Humidity Chamber	KSON	THS-C3L	612	N/A	Oct. 02, 2006	Conducted (TH01-HY)
RF CABLE-1m	Jye Bao	RG142	CB034-1m	20MHz ~ 7GHz	Dec. 1, 2006	Conducted (TH01-HY)
RF CABLE-2m	Jye Bao	RG142	CB035-2m	20MHz ~ 1GHz	Dec. 1, 2006	Conducted (TH01-HY)
Oscilloscope	Tektronix	TDS1012	CO38515	100MHz / 1GS/s	Jun. 20, 2006	Conducted (TH01-HY)
Signal Generator	R&S	SMR40	100116	10MHz ~ 40GHz	Dec. 29, 2006	Conducted (TH01-HY)
Data Generator	Tektronix	DG2030	063-2920-50	0.1Hz~400MHz	Jun. 16, 2006	Conducted (TH01-HY)

Note: Calibration Interval of instruments listed above is one year. NCR: Non-Calibration required.

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Remark
Amplifier	MITEQ	AMF-6F-260400	923364	26.5 GHz - 40 GHz	Jan. 24, 2006*	Radiation (03CH03-HY)
Loop Antenna	R&S	HFH2-Z2	860004/001	9 kHz - 30 MHz	May 23, 2006*	Radiation (03CH03-HY)
AC Power Source	HPC	HPA-500W	HPA-9100024	AC 0 ~ 300V	Apr. 21, 2005*	Conducted (TH01-HY)

Note: Calibration Interval of instruments listed above is two year.

## 6. TEST LOCATION

SHIJR	ADD : 6Fl., No. 106, Sec. 1, Shintai 5th Rd., Shijr City, Taipei, Taiwan 221, R.O.C. TEL : 886-2-2696-2468 FAX : 886-2-2696-2255
HWA YA	ADD : No. 52, Hwa Ya 1st Rd., Kwei-Shan Hsiang, Tao Yuan Hsien, Taiwan, R.O.C. TEL : 886-3-327-3456 FAX : 886-3-318-0055
LINKOU	ADD : No. 30-2, Dingfu Tsuen, Linkou Shiang, Taipei, Taiwan 244, R.O.C TEL : 886-2-2601-1640 FAX : 886-2-2601-1695
DUNGHU	ADD : No. 3, Lane 238, Kangle St., Neihu Chiu, Taipei, Taiwan 114, R.O.C. TEL : 886-2-2631-4739 FAX : 886-2-2631-9740
JUNGHE	ADD : 7Fl., No. 758, Jungjeng Rd., Junghe City, Taipei, Taiwan 235, R.O.C. TEL : 886-2-8227-2020 FAX : 886-2-8227-2626
NEIHU	ADD : 4Fl., No. 339, Hsin Hu 2 <sup>nd</sup> Rd., Taipei 114, Taiwan, R.O.C. TEL : 886-2-2794-8886 FAX : 886-2-2794-9777
JHUBEI	ADD : No.8, Lane 728, Bo-ai St., Jhubei City, HsinChu County 302, Taiwan, R.O.C. TEL : 886-3-656-9065 FAX : 886-3-656-9085

## 7. NVLAP CERTIFICATE OF ACCREDITATION

United States Department of Commerce  
National Institute of Standards and Technology

**NVLAP<sup>®</sup>**

---

**Certificate of Accreditation to ISO/IEC 17025:2005**

---

NVLAP LAB CODE: 200079-0

**Sporton International, Inc. Hwa Ya EMC Laboratory**  
Tao Yuan Hsien 333  
TAIWAN

*is accredited by the National Voluntary Laboratory Accreditation Program for specific services,  
listed on the Scope of Accreditation, for:*

**ELECTROMAGNETIC COMPATIBILITY AND TELECOMMUNICATIONS**

*This laboratory is accredited in accordance with the recognized International Standard ISO/IEC 17025:2005.  
This accreditation demonstrates technical competence for a defined scope and the operation of a laboratory quality  
management system (refer to joint ISO-ILAC-IAF Communique dated 18 June 2005).*

2007-01-01 through 2007-12-31  
*Effective dates*



*Dolly S. Bruce*  
For the National Institute of Standards and Technology

NVLAP-01C (REV. 2006-09-13)