





<b>TEST REPORT nr. R14138301</b>	
<b>Federal Communication Commission (FCC)</b>	
<b>Test item</b>	
Description .....	R1250IU – QUARK UP – 500 mW UHF RFID ULTRA COMPACT MODULE WITH USB INTERFACE
Trademark .....	CAEN RFID
Model/Type .....	R1250IU
FCC ID .....	UVECAENRFID019
<b>Test Specification</b>	
Standard .....	FCC Rules & Regulations, Title 47:2013 Part 15 paragraph(s): 107 and 109
<b>Client's name</b> .....	
CAEN RFID S.r.l.	
<b>Address</b> .....	
Via Vetraia, 11 – 55049 Viareggio (LU) – ITALY	
<b>Manufacturer's name</b> :	
Same as client	
<b>Address</b> .....	
--	
<b>Report</b>	
Tested by .....	G. Gandini – Technician 
Approved by .....	R. Beghetto – Laboratory Manager 
Date of issue .....	08.07.15
Contents .....	19 pages

This test report shall not be reproduced except in full without the written approval of CMC.  
 The test results presented in this report relate only to the item tested.



## Index

<b>1. SUMMARY</b> .....	<b>3</b>
<b>2. DESCRIPTION OF EQUIPMENT UNDER TEST (EUT)</b> .....	<b>4</b>
2.1 TEST SITE .....	4
<b>3. TESTING AND SAMPLING</b> .....	<b>4</b>
<b>4. OPERATIVE CONDITIONS</b> .....	<b>4</b>
<b>5. PHOTOGRAPH(S) OF EUT</b> .....	<b>5</b>
5.1 PHOTOGRAPH(S) OF EUT .....	5
5.2 PHOTOGRAPH(S) OF SETUP .....	6
<b>6. EQUIPMENT LIST</b> .....	<b>7</b>
<b>7. MEASUREMENT UNCERTAINTY</b> .....	<b>8</b>
<b>8. REFERENCE DOCUMENTS</b> .....	<b>9</b>
<b>9. DEVIATION FROM TEST SPECIFICATION</b> .....	<b>10</b>
<b>10. TEST CASE VERDICTS</b> .....	<b>10</b>
<b>11. RESULTS</b> .....	<b>11</b>
11.1 CONTINUOUS DISTURBANCE VOLTAGE TEST (150 kHz – 30 MHz) .....	12
11.2 RADIATED DISTURBANCE TEST.....	16



## 1. Summary

### Emission Test:

FCC Rules & Regulations, Title 47:2013  
Part 15 paragraph(s): 107 and 109

Test specifications	Environmental Phenomena	Port	Tests sequence	Result
Part 15.107 Class B	Continuous disturbance voltage	Mains terminal	2	Complies
Part 15.109 Class B	Radiated disturbance	Enclosure	1	Complies

The Test Report was given to the Client representatives for necessary documentation of ratification of the tested equipment and it is valid for the FCC certification.



## 2. Description of Equipment under test (EUT)

Power supply ..... : 5 Vdc from USB  
 Power cable ..... : Unshielded  
 Serial Number ..... : --

### 2.1 Test Site

Company ..... : CMC Centro Misure Compatibilità S.r.l.  
 Address ..... : Via dell'Elettronica, 12/C  
 36016 Thiene (VI) – ITALY  
 Test site facility's FCC registration number ..... : 271947

## 3. Testing and sampling

Date of receipt of test item ..... : 14.07.14  
 Testing start date ..... : 25.07.14  
 Testing end date ..... : 25.07.14  
 Samples tested nr ..... : 1  
 Sampling procedure ..... : Equipment used for testing was picked up by  
 the manufacturer, at the end of the production  
 process with random criterion  
 Internal identification ..... : adhesive label with the product number  
 P140779

## 4. Operative conditions

EUT exercising ..... : EUT connected to auxiliary PC  
 Auxiliary equipment ..... : PC Acer Travel Mate 5735Z



## 5. Photograph(s) of EUT

### 5.1 Photograph(s) of EUT






## 5.2 Photograph(s) of setup

Continuous disturbance voltage



Radiated disturbance

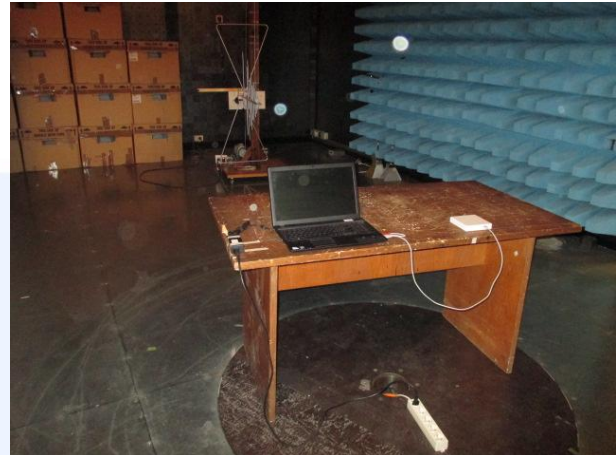



## 6. Equipment list

<i>Id. number</i>	<i>Manufacturer</i>	<i>Model</i>	<i>Description</i>	<i>Serial number</i>	<i>Last calibration</i>	<i>Due date calibration</i>
CMC S010	Rohde & Schwarz	ESH3-Z2	Impulses Limiting Device	---	January '14	January '15
CMC S108	EMCO	3115	Horn Antenna	9811-5622	May '13	May '16
CMC S127	Schaffner	HLA6120	Loop Antenna	1191	January '13	January '16
CMC S136	Schwarzbeck	VULB 9163	Broadband Antenna	9136-205	May '13	May '16
CMC S164	Rohde & Schwarz	ESU26	EMC interference receiver	100052	January '14	January '15
CMC S200	Schwarzbeck	NSLK 8128	V-LISN	8128-273	January '14	January '15
CMC S227	Rohde & Schwarz	ESR7	EMI Test Receiver 7GHz	101121	January '14	January '15



## 7. Measurement uncertainty

Test	Expanded Uncertainty	note
<b>Conducted Emission</b>		
(50Ω/50μH AMN) - (9 kHz – 150 kHz)	±3.8 dB	1
(50Ω/50μH AMN) - (150 kHz – 30 MHz)	±3.3 dB	1
(Voltage probe) - (150 kHz – 30 MHz)	±3.3 dB	1
(50Ω/5μH AMN) - (150 kHz – 108 MHz)	±2.8 dB	1
<b>Discontinuous Conducted Emission</b>		
Conducted Emission (50Ω/50μH AMN) - (150 kHz – 30 MHz)	±3.3 dB	1
<b>Disturbance Power (30 MHz – 300 MHz)</b>		
	±3.9 dB	1
<b>Radiated Emission</b>		
(0,150 MHz – 30 MHz)	±4.3 dB	1
(30 MHz – 1000 MHz)	±4.4 dB	1
(1 GHz – 6 GHz)	±4.6 dB	1
<b>Electromagnetic field EMF</b>		
	±15.0 %	1
<b>Harmonic current emissions test</b>		
	±2.7 %	1
<b>Voltage fluctuation and flicker test</b>		
	±2.9 %	1
<b>Insertion loss test</b>		
	±2.7 dB	1
<b>Radiated electromagnetic disturbance test (loop antenna)</b>		
	±2.7 dB	1
<b>Radiated electromagnetic field immunity test</b>		
	0.77 V/m at 3V/m	1
<b>Pulse modulated radiated electromagnetic field immunity test</b>		
	0.77 V/m at 3V/m	1
<b>Injected currents immunity test</b>		
	0.48 V at 3V	1
<b>Bulk current</b>		
	5.3 mA at 60 mA	1
<b>Power frequency magnetic field immunity test</b>		
	0.1 A/m at 10 A/m	1
<b>Effective radiated power (F &lt; 1GHz)</b>		
	±4.4 dB	1
<b>Effective radiated power (F &gt; 1GHz)</b>		
	±3.9 dB	1
<b>Frequency error</b>		
	< 1x10 <sup>-7</sup>	1
<b>Modulation bandwidth</b>		
	< 1x10 <sup>-7</sup>	1
<b>Adjacent channel power</b>		
	±2.6 dB	1
<b>Blocking</b>		
	±2.6 dB	1
<b>Electrostatic discharge immunity test</b>		
		2
<b>Electrical fast transients / burst immunity test</b>		
		2
<b>Surge immunity test</b>		
		2
<b>Pulse magnetic field immunity test</b>		
		2
<b>Damped oscillatory magnetic field immunity test</b>		
		2
<b>Short interruption immunity test</b>		
		2
<b>Voltage transient emission test</b>		
	±2.2 %	1
<b>Transient immunity test</b>		
		2

### Notes

#### Note 1:

The expanded uncertainty reported according to EN55016-4-2:2011 is based on a standard uncertainty multiplied by a coverage factor of k=2, providing a level of confidence of p = 95%

#### Note 2:

It has been demonstrated that the used test equipment meets the specified requirements in the standard with at least a 95% confidence, covering factor k = 2.





## 8. Reference documents

Reference no.	Description
FCC Rules and Regulation Title 47 part 15:2013	--
ANSI C63.4:2009	American National Standard for Methods of Measuring of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the Range of 9 kHz – 40 GHz
Internal Procedure PM001 rev. 2.0 (Quality Manual)	Measure procedure
Internal procedure INC_M rev. 8.2 (Quality Manual)	Measurement uncertainty calculation



## 9. Deviation from test specification

In agreement with the client, emission tests were performed with peak detector.

At the frequencies where the measures exceed the limit or within 6 dB from it, the test was repeated with quasi-peak detector and/or average detector.

## 10. Test case verdicts

Test case does not apply to the test object..... : N.A.

Test item does meet the requirement..... : Complies

Test item does not meet the requirement..... : Does not comply

Test not performed ..... : N.E.

CMC Centro Misure Compatibilità S.r.l.







## 11. Results

In this clause tests results are reported.

Measurement uncertainty is in accordance with document CMC INC\_M rev. 8.2.

*Judgement of compliance:*

Case 1	Case 2	Case 3	Case 4
			
<p>The sample complies with the requirement.</p> <p>The measurement results is within the specification limit when the measurement uncertainty is taken into account.</p>	<p>The sample complies with the requirement.</p> <p>It is not possible to state compliance using a 95% coverage probability for the expanded uncertainty although the measurement result is below the limit.</p>	<p>The sample does not comply with the requirement.</p> <p>It is not possible to state compliance using a 95% coverage probability for the expanded uncertainty also the measurement result is upper the limit.</p>	<p>The sample does not comply with the requirement.</p> <p>The measurement results is outside the specification limit when the measurement uncertainty is taken into account.</p>

In agreement with ILAC-G8: 03/2009 Guidelines on the Reporting of Compliance with Specification.

CMC Centro Misure Compatibilità S.r.l.



## 11.1 Continuous disturbance voltage test (150 kHz – 30 MHz)

### Test set-up and execution

- FCC Rules and Regulation; Titles 47 Part. 15.107
- Internal procedure PM001
- See clause 4 of this test report

### Test configuration and test method

Test site:  
Shielded chamber

Auxiliary equipment:  
See clause 4 of this test report

### EUT exercising

See clause 4 of this test report

### Test equipment used

CMC S010, CMC S200, CMC S206  
Measurement uncertainty: See clause 7 of this test report

### Test specification


Port: Mains terminal  
Frequency range: 150 kHz – 30 MHz

### Acceptance limits

Limits for class A equipment		
Frequency range (MHz)	dB(μV) Quasi-peak	dB(μV) Average
0,15 to 0,50	79	66
0,5 to 5	73	60
5 to 30	73	60

Limits for class B equipment		
Frequency range (MHz)	dB(μV) Quasi-peak	dB(μV) Average
0,15 to 0,50	66 to 56	56 to 46
0,5 to 5	56	46
5 to 30	60	50

## Setup

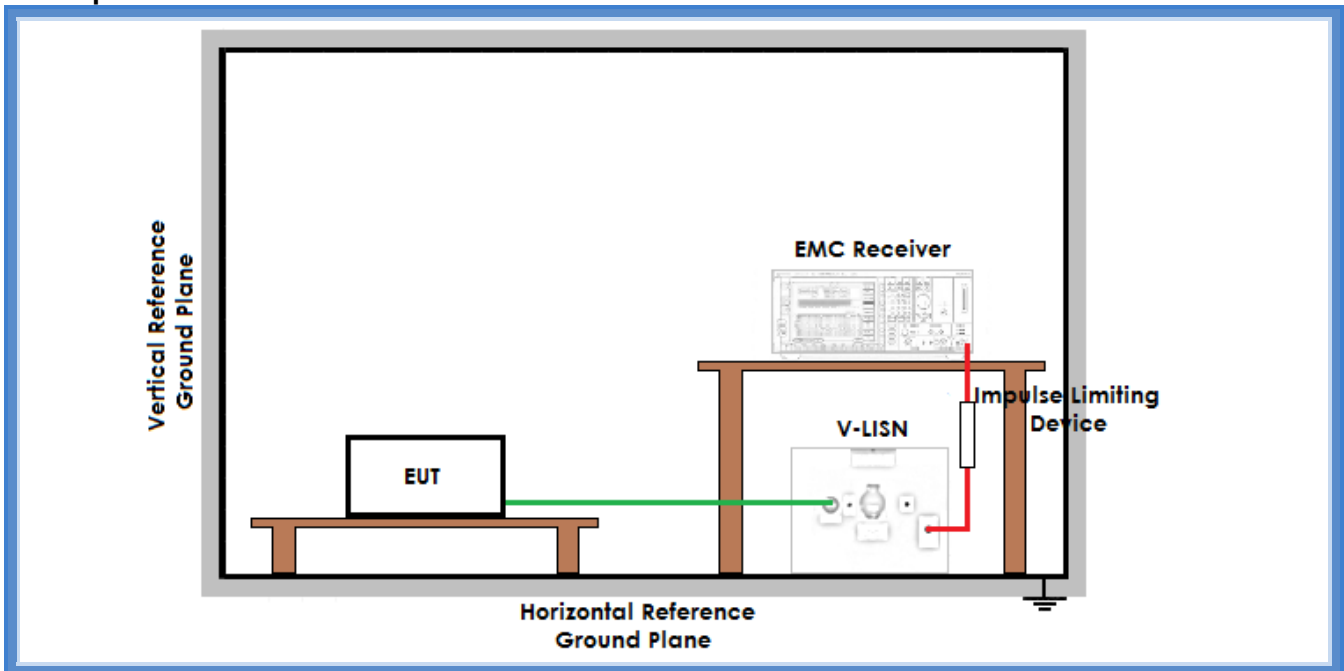

## Result

Line	Graphs	Remarks	Result
N	G14138303	--	Complies
L1	G14138304	--	Complies


**Remarks:** Test performed on 120 V ~ 60 Hz power supply of PC

### Graphs Legend


PK: Peak; QP [1s] (quasi-peak at 1 second) values are marked with a +  
AV: Average; AV [1s] (average at 1 second) values are marked with a X



## Graphs

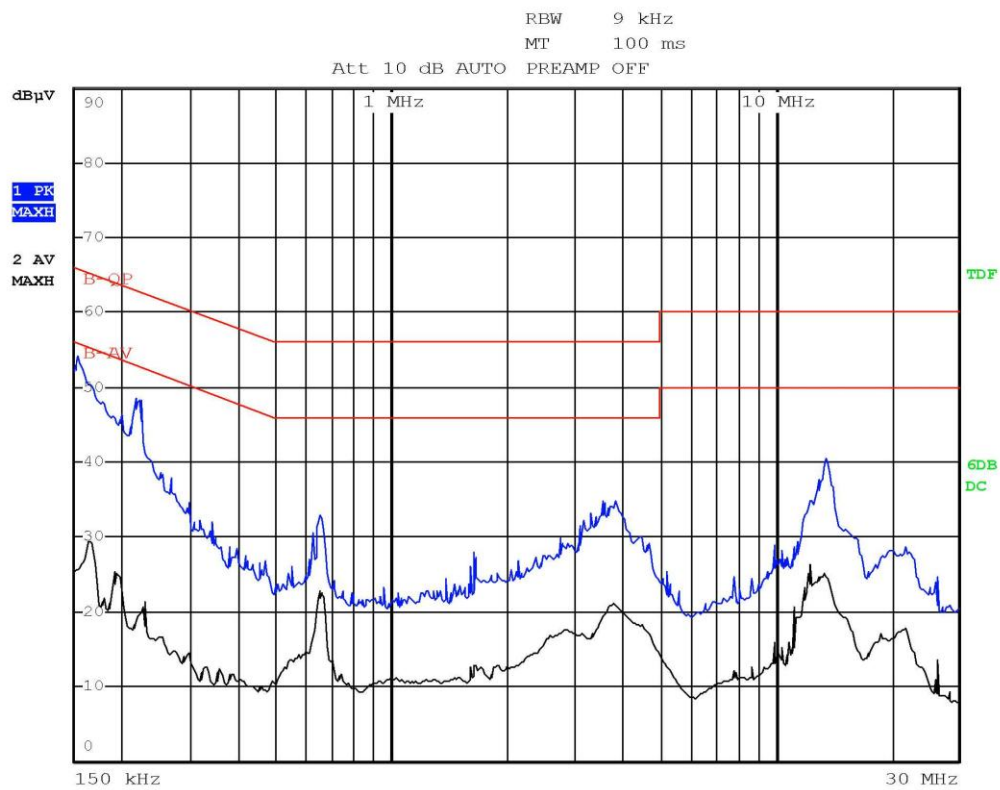

Gandini 14138303-Line N-In funzione

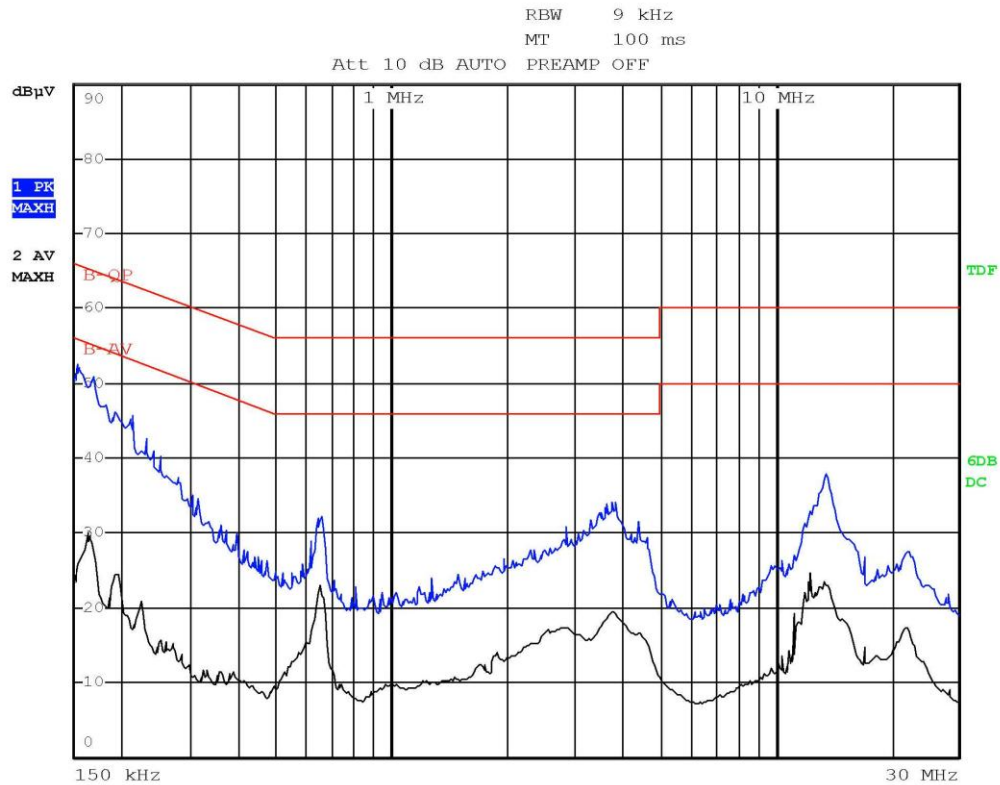

Gandini 14138304-Line L-In funzione

**Result:** The requirements are met

CMC Centro Misure Compatibilità S.r.l.



## 11.2 Radiated disturbance test

### Test set-up and execution

- FCC Rules and Regulation; Titles 47 Part. 15.109
- Internal procedure PM001
- See clause 4 of this test report

### Test configuration and test method

*Test site:*  
Semi-anechoic chamber

*Auxiliary equipment:*  
See clause 4 of this test report

### EUT exercising

See clause 4 of this test report

### Test equipment used

CMC S108, CMC S127, CMC S136, CMC S164  
Measurement uncertainty: See clause 7 of this test report

### Test specification

Port: Enclosure  
Frequency range: 30 MHz – 6000 MHz  
Antenna polarization: Horizontal (H) – Vertical (V)  
EUT – Antenna distance: 3 m


### Acceptance limits

<i>Limits for class A equipment</i>	
<i>Frequency range (MHz)</i>	<i>Limits [dB(μV/m)]</i>
30 to 88	49,08
88 to 216	53,52
216 to 960	56,44
Above 960	59,54

<i>Limits for class B equipment</i>	
<i>Frequency range (MHz)</i>	<i>Limits [dB(μV/m)]</i>
30 to 88	40
88 to 216	43,52
216 to 960	46,02
Above 960	53,98



## Setup

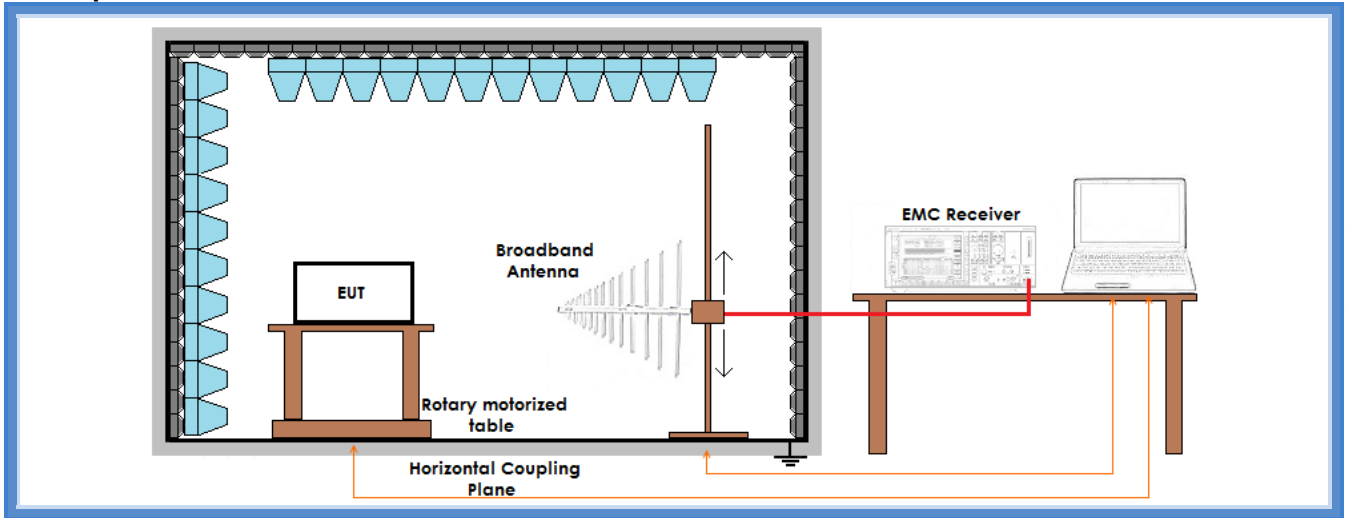

## Result

Polarization	Frequency Range (MHz)	Graphs	Remarks	Result
V	30 – 1000	G14138301	--	Complies
H	30 – 1000	G14138302	--	Complies

Remarks: --


### Graphs Legend

PK: Peak; QP [1s] (quasi-peak at 1 second) values are marked with a +  
 AV: Average; AV [1s] (average at 1 second) values are marked with a x



## Graphs

**Meas Type** Emission 30-1000MHz  
**Equipment under Test**  
**Manufacturer**  
**OP Condition** In funzione  
**Operator** Gandini 14138305  
**Test Spec**  
 Vert

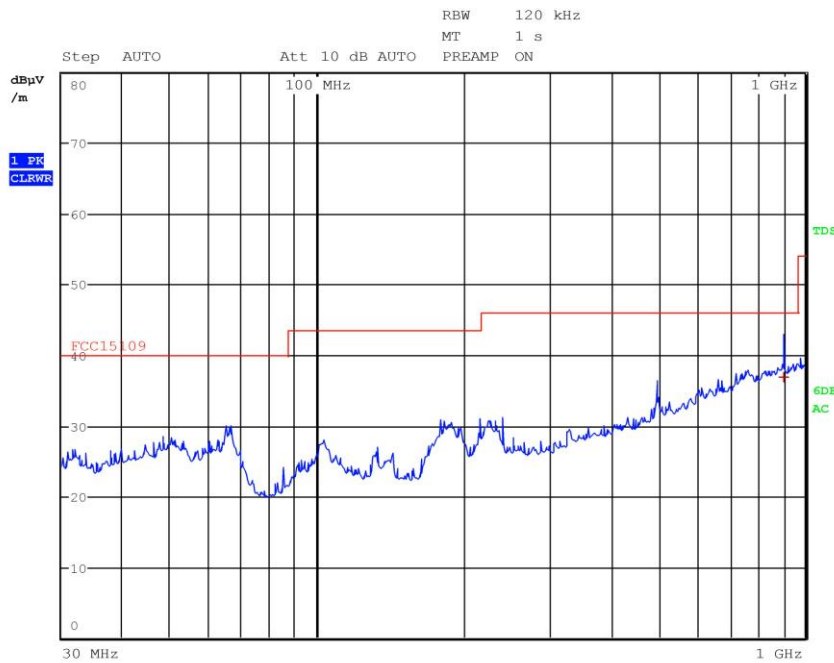


### Final Measurement

Meas Time: 1 s  
 Margin: 6 dB  
 Subranges: 1

Trace	Frequency	Level (dBµV/m)	Detector	Delta Limit/dB
1	904.640000000 MHz	36.96	Quasi Peak	-9.06



**Meas Type** Emission 30-1000MHz  
**Equipment under Test**  
**Manufacturer**  
**OP Condition** In funzione  
**Operator** Gandini 14138302  
**Test Spec**  
 Horiz

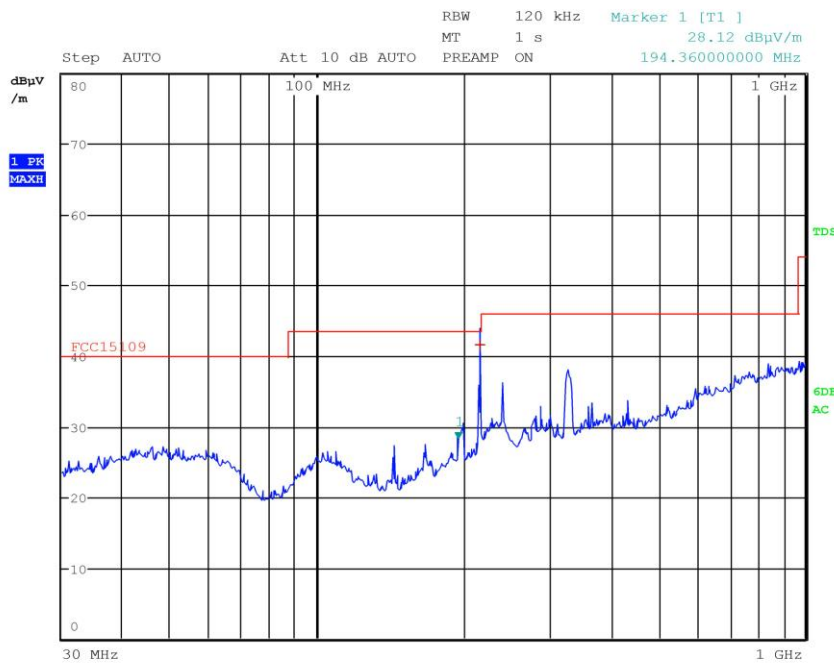

### Final Measurement

Meas Time: 1 s  
 Margin: 6 dB  
 Subranges: 1

Trace	Frequency	Level (dBµV/m)	Detector	Delta Limit/dB
1	215.20000000 MHz	41.66	Quasi Peak	-1.86

**Result:** The requirements are met