



TEST REPORT

Nr. R21247001

Federal Communication Commission (FCC)

Report Reference No.	R21247001
Date of issue:	09.11.2021
Total number pages:	59
Applicant's name	Caen RFID S.r.l.
Address	Via Vetraia, 11 – 55049 Viareggio (LU) – Italy
Test specification:	
Standards	FCC Rules & Regulations, Title 47:2020 Part 15 paragraph(s): 203, 204, 205, 207, 209, 215 and 247
Non-standard test method	N/A
Test Report Form No.	15-247_HoppingCMC
Test Report Form(s) Originator ..	CMC Centro Misure Compatibilità S.r.l.
Master TRF	2021-07
General disclaimer:	
The test results presented in this report relate only to the object tested. This report shall not be reproduced, except in full, without the written approval of CMC Centro Misure Compatibilità S.r.l.	
Test item description	R1210IU – Trid – RAIN RFID Smart Tray Reader – FCC
Trademark	Caen RFID
Manufacturer	Caen RFID S.r.l.
Model / Type reference	WR1210IXUSAA
FCC ID	UVECAENRFID033
Rating(s)	5 Vdc from USB 3,7 Vdc from internal battery
Report	
Tested by (name + signature)	M. Segalla 
Approved by (name + signature)	R. Beghetto 

1	Summary	
1	Summary.....	2
2	Reference standard	3
3	List of attachments.....	3
4	Deviation(s) from test specification.....	3
5	Testing location.....	3
6	General description of tested item and testing condition(s)	5
6.1	Photos of the test item.....	6
7	Verdict summary section	8
8	Test conditions.....	10
8.1	General.....	10
9	Test results	11
9.1	Antenna requirements	11
9.2	Conducted emission	12
9.3	Emissions in restricted frequency bands and in unrestricted frequency bands	18
9.4	20 dB bandwidth.....	38
9.5	Channel separation.....	41
9.6	Number of hopping channels.....	43
9.7	Time of occupancy.....	45
9.8	Band edge	48
9.9	Peak Output Power.....	52

2 Reference standard	
FCC Rules and Regulation Title 47 part 15:2020	--
3 List of attachments	
Attachment 1: Instruments list, measurement uncertainty, judgement of compliance and quality manual references	
4 Deviation(s) from test specification	
None	
5 Testing location	
CMC Centro Misure Compatibilità S.r.l. Via della Fisica, 20 – 36016 Thiene (VI) – Italy Test site facility's FCC registration number: 182474	

<i>Revision index</i>	<i>Date</i>	<i>Change history</i>
1.0	09.11.2021	--

Testing and sampling:	
Date of receipt of test item	25.10.2021
Testing start date	28.10.2021
Testing end date	04.11.2021
Sampling procedure.....	Equipment used for testing was picked up by the manufacturer, at the end of the production process with random criterion. The results relate to the sample as it has been received.
Internal identification.....	Adhesive label with the product number P211207
General remarks:	
<p>This report shall not be reproduced, except in full, without the written approval of CMC. The test results presented in this report relate only to the object tested. "(see appended table)": refers to a table appended to the report. Throughout this report a comma is used as the decimal separator.</p>	
Possible test case verdicts:	
Test case does not apply to the test object:	N/A (Not Applicable)
Test object does meet the requirement:	P (Pass)
Test object does not meet the requirement:	F (Fail)
Test object does not performed:	N/E (Not Executed)
Definition of symbols used in this test report:	
<input checked="" type="checkbox"/> Indicates that the listed condition, standard or equipment is applicable for this report. <input type="checkbox"/> Indicates that the listed condition, standard or equipment is not applicable for this report.	

6 General description of tested item and testing condition(s)

Description	R1210IU – Trid – RAIN RFID Smart Tray Reader – FCC						
Model Number	WR1210IXUSAA						
FCC ID	UVECAENRFID033						
Serial Number	0001000121360003						
Brand name	Caen RFID						
Frequency band	902 – 928 MHz						
Nominal frequencies	F _L : 902,75 MHz	F _M : 914,75 MHz	F _H : 927,25 MHz				
Test power supply		Voltage and Frequency	Reference poles				
			N	L1	L2	L3	PE
	<input type="checkbox"/>	AC:	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
	<input type="checkbox"/>	AC:	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
	<input checked="" type="checkbox"/>	DC: 5 V from USB					<input type="checkbox"/>
Software version	1.0.0						
Pseudo randomly ordered list of hopping frequencies	See document R1210IU_Operational_Description						
Test configuration	<input checked="" type="checkbox"/>	Table top equipment					
	<input type="checkbox"/>	Floor standing equipment					
	<input type="checkbox"/>	Hand-held equipment					
Type of equipment	<input checked="" type="checkbox"/>	Transmitter unit					
	<input type="checkbox"/>	Receiver unit					
Type of station	<input type="checkbox"/>	Portable station					
	<input checked="" type="checkbox"/>	Mobile station					
Operating modes	No.	Operating mode of test item					
	1	EUT in continuous transmission at maximum power					



7 Verdict summary section

FCC Rules & Regulations, Title 47:2020			
Part 15 paragraph(s): 203, 204, 205, 207, 209, 215 and 247			
Clause	Requirement – Test case	Basic standard	Verdict
Part 15.247 (a) (1)	Pseudo randomly ordered list of hopping frequencies	--	P
Part 15.203	Antenna requirements	ANSI C63.10	P
Part 15.207	Conducted emissions	ANSI C63.10	P
Part 15.209	Radiated emissions and spurious emission	ANSI C63.10	P
Part 15.247	20 dB Bandwidth	ANSI C63.10	P
Part 15.247	Channel Separation	ANSI C63.10	P
Part 15.247	Number of Hopping Channel	ANSI C63.10	P
Part 15.247	Time of occupancy	ANSI C63.10	P
Part 15.247	Band edge	ANSI C63.10	P
Part 15.209 and 15.247	Peak Output Power	ANSI C63.10	P

Normative references	
Reference no.	Description
FCC Rules and Regulation Title 47 part 15:2020	--
KDB 558074 D01 15.247 Meas Guidance v05r02	Guidance for compliance measurements on Digital Transmission System, Frequency Hopping Spread Spectrum System, and Hybrid System Devices operating under section 15.247 of the FCC rules
ANSI C63.4:2014	American National Standard for Methods of Measuring of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the Range of 9 kHz – 40 GHz
ANSI C63.10:2013	American National Standard of Procedures for Compliance Testing of Unlicensed Wireless Devices

8 Test conditions

8.1 General

Environmental reference conditions.....:	The climatic conditions during the tests are within the limits specified by the manufacturer for the operation of the EUT and the test equipment.		
	The climatic conditions during the tests were within the following limits:		
	Temperature	Humidity	Atmospheric pressure
	15 °C – 35 °C	30 % - 60 %	800 hPa – 1060 hPa
	If explicitly required in the basic standard or applied product standard the climatic values are recorded and documented separately in this test report.		
Measurement uncertainties	Attachment 1		

9 Test results

9.1 Antenna requirements

Tested by	M. Segalla	
Test date	28.10.2021	
Reference standards	FCC Rules and Regulation; Titles 47 Part. 15.203 and 15.204	
Test specification	<p>An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited. This requirement does not apply to carrier current devices or to devices operated under the provisions of §§ 15.211, 15.213, 15.217, 15.219, 15.221, or § 15.236. Further, this requirement does not apply to intentional radiators that must be professionally installed, such as perimeter protection systems and some field disturbance sensors, or to other intentional radiators which, in accordance with § 15.31(d), must be measured at the installation site. However, the installer shall be responsible for ensuring that the proper antenna is employed so that the limits in this part are not exceeded</p>	
Antenna type.....	<input checked="" type="checkbox"/>	Integral antenna
	<input type="checkbox"/>	External antenna
Antenna gain.....	-4 dBi	
External R.F. power amplifier	Not Present	


9.2 Conducted emission

Tested by	M. Segalla	
Test date	04.11.2021	
Test location (stand)	Shielded chamber (CMC A001)	
Reference standards	FCC Rules and Regulation; Titles 47 Part. 15.207 ANSI C63.10 cl. 6.2	
Test set-up description	<input checked="" type="checkbox"/>	Table top equipment set-up (80 cm above the reference ground plane)
	<input type="checkbox"/>	Floor standing equipment set-up (insulating material up to 12 mm thick)
	<input type="checkbox"/>	False floor installation equipment set-up (insulating material up to 34 cm above the reference ground plane)
Supplementary Test set-up description	--	
Test method applied	<input checked="" type="checkbox"/>	Artificial mains network, 50 μ H/50 Ω LISN
	<input type="checkbox"/>	Other:

Acceptance limits

Frequency range (MHz)	$dB(\mu V)$ Quasi-peak	$dB(\mu V)$ Average
0,15 to 0,50	66 to 56	56 to 46
0,5 to 5	56	46
5 to 30	60	50

Test setup

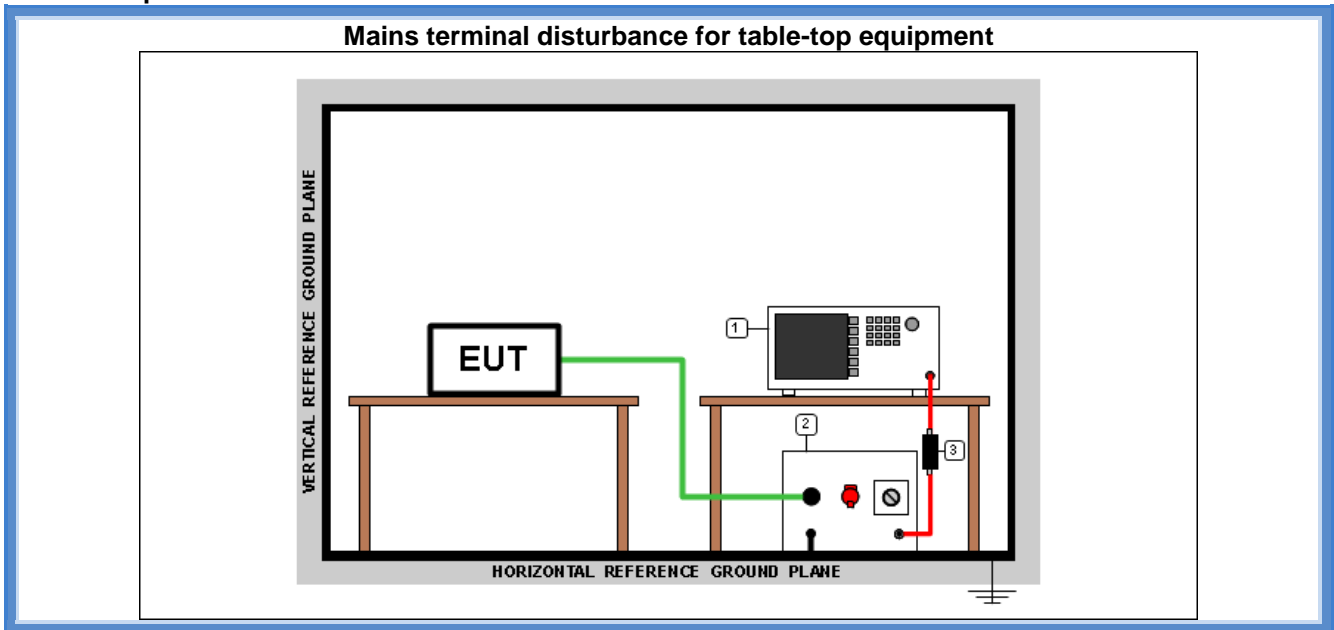

Test setup PE001_01

Nr.	Id. Number	Manufacturer	Model	Description
3	CMC S010	Rohde & Schwarz	ESH3-Z2	Pulse limiter
2	CMC S200	Schwarzbeck	NSLK 8128	V-LISN
1	CMC S206	Rohde & Schwarz	ESCI 7	EMC Receiver 9KHz-7GHz

Result


Line	Frequency Range (MHz)	Graphs	Remarks	Result
N	0,15 – 30	G21247035	--	P
L1	0,15 – 30	G21247036	--	P

Remarks: test performed on 120 Vac side of auxiliary PC power unit

Graphs Legend

PK: Peak; QP [1s] (quasi-peak at 1 second) values are marked with a +
AV: Average; AV [1s] (average at 1 second) values are marked with a X


Graphs

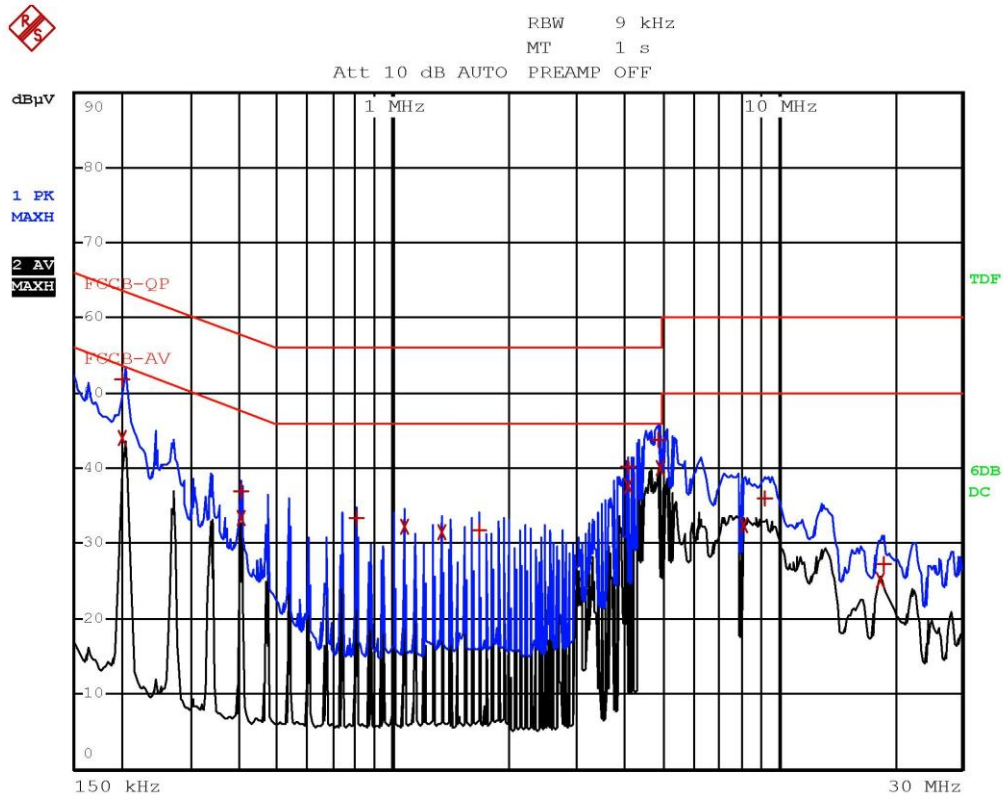

Segalla 21247035

EDIT PEAK LIST (Final Measurement Results)			
TRACE	FREQUENCY	LEVEL dB μ V	DELTA LIMIT dB
Trace1:	FCCB-QP		
Trace2:	FCCB-AV		
Trace3:	---		
1 Quasi Peak	202 kHz	51.88	-11.64
2 Average	202 kHz	44.00	-9.51
1 Quasi Peak	402 kHz	36.89	-20.91
2 Average	402 kHz	33.32	-14.48
1 Quasi Peak	806 kHz	33.35	-22.64
2 Average	1.074 MHz	32.22	-13.77
2 Average	1.342 MHz	31.56	-14.43
1 Quasi Peak	1.678 MHz	31.84	-24.15
1 Quasi Peak	4.098 MHz	40.35	-15.64
2 Average	4.098 MHz	37.59	-8.41
1 Quasi Peak	4.902 MHz	43.79	-12.20
2 Average	4.97 MHz	40.10	-5.89
2 Average	8.126 MHz	32.50	-17.49
1 Quasi Peak	9.202 MHz	35.99	-24.00
2 Average	18.41 MHz	25.08	-24.91
1 Quasi Peak	18.74 MHz	27.22	-32.77

Segalla 21247035

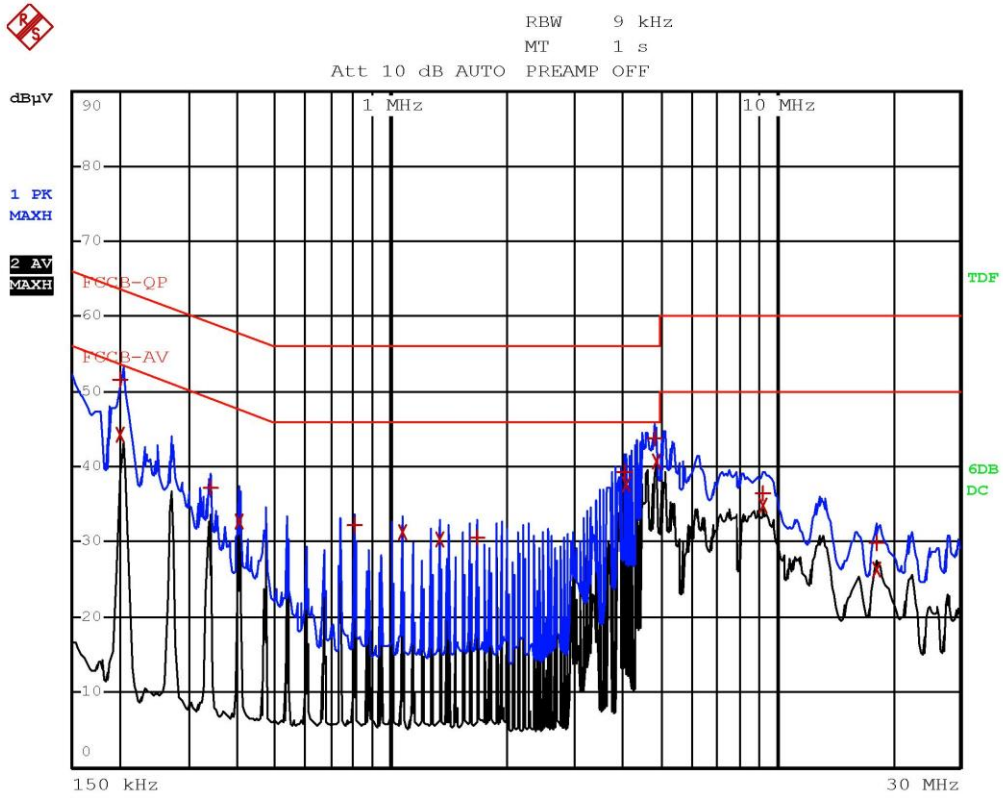

Segalla 21247036

EDIT PEAK LIST (Final Measurement Results)				
Trace1:		FCCB-QP		
Trace2:		FCCB-AV		
Trace3:		---		
TRACE		FREQUENCY	LEVEL dB μ V	DELTA LIMIT dB
1	Quasi Peak	202 kHz	51.65	-11.87
2	Average	202 kHz	44.24	-9.28
1	Quasi Peak	338 kHz	37.24	-22.00
2	Average	402 kHz	32.71	-15.09
1	Quasi Peak	806 kHz	32.13	-23.87
2	Average	1.074 MHz	31.31	-14.68
2	Average	1.346 MHz	30.28	-15.71
1	Quasi Peak	1.678 MHz	30.70	-25.29
1	Quasi Peak	4.03 MHz	39.23	-16.76
2	Average	4.098 MHz	37.64	-8.35
1	Quasi Peak	4.838 MHz	43.92	-12.07
2	Average	4.906 MHz	40.76	-5.23
1	Quasi Peak	9.206 MHz	36.50	-23.49
2	Average	9.274 MHz	34.85	-15.14
2	Average	18.21 MHz	26.28	-23.71
1	Quasi Peak	18.28 MHz	29.93	-30.06

Segalla 21247036

9.3 Emissions in restricted frequency bands and in unrestricted frequency bands

Tested by	M. Segalla	
Test date	29.10.2021	
Test location (stand)	Semi-anechoic chamber (CMC A070)	
Reference standards	FCC Rules and Regulation; Titles 47 Part. 15.209 ANSI C63.10 cl. 6.3, 6.4, 6.5 and 6.6	
Test set-up description	<input checked="" type="checkbox"/>	Table top equipment set-up (80 cm above the reference ground plane)
	<input type="checkbox"/>	Floor standing equipment set-up (insulating material up to 12 mm thick)
	<input type="checkbox"/>	False floor installation equipment set-up (insulating material up to 34 cm above the reference ground plane)
Supplementary test set-up description	--	
Test method applied	SAC with measurement distance [m]: 10	
Supplementary information.....	--	

Acceptance limits

Acceptance limits for emissions in restricted frequency bands ($f < 1000$ MHz)		
Frequency range (MHz)	Test distance (m)	Limits [dB(μ V/m)]
0,009 to 0,490	300	48,5 to 13,8
0,490 to 1,705	30	33,8 to 22,9
1,705 to 30	30	29,5
30 to 88	3	40
88 to 216	3	43,5
216 to 960	3	46,0
960 to 1000	3	54

Remarks: The emission limits shown in the above table are based on measurements employing a CISPR quasi-peak detector except for the frequency bands 9–90 kHz and 110–490 kHz. Radiated emission limits in these two bands are based on measurements employing an average detector. The results have been extrapolated to the specified distance using an extrapolation factor

Acceptance limits for emissions in restricted frequency bands ($f \geq 1000$ MHz)			
Frequency (MHz)	Test distance (m)	AV limits [dB(μ V/m)]	Peak limits [dB(μ V/m)]
> 1000	3	54	74


The restricted frequency bands are listed in the following table

<i>MHz</i>	<i>MHz</i>	<i>MHz</i>	<i>GHz</i>
0,090 – 0,110	16,42 – 16,423	399,9 – 410	4,5 – 5,15
0,495 – 0,505	16,69475 – 16,69525	608 – 614	5,35 – 5,46
2,1735 – 2,1905	16,80425 – 16,80475	960 – 1240	7,25 – 7,75
4,125 – 4,128	25,5 – 25,67	1300 – 1427	8,025 – 8,5
4,17725 – 4,17775	37,5 – 38,25	1435 – 1626,5	9,0 – 9,2
4,20725 – 4,20775	73 – 74,6	1645,5 – 1646,5	9,3 – 9,5
6,215 – 6,218	74,8 – 75,2	1660 – 1710	10,6 – 12,7
6,26775 – 6,26825	108 – 121,94	1718,8 – 1722,2	13,25 – 13,4
6,31175 – 6,31225	123 – 138	2200 – 2300	14,47 – 14,5
8,291 – 8,294	149,9 – 150,05	2310 – 2390	15,35 – 16,2
8,362 – 8,366	156,52475 – 156,52525	2483,5 – 2500	17,7 – 21,4
8,37625 – 8,38675	156,7 – 156,9	2690 – 2900	22,01 – 23,12
8,41425 – 8,41475	162,0125 – 167,17	3260 – 3267	23,6 – 24,0
12,29 – 12,293	167,72 – 173,2	3332 – 3339	31,2 – 31,8
12,51975 – 12,52025	240 – 285	3345,8 – 3358	36,43 – 36,5
12,57675 – 12,57725	322 – 335,4	3600 – 4400	Above 38,6
13,36 – 13,41			

Acceptance limits for emissions in non-restricted frequency bands


In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits.

Test setup

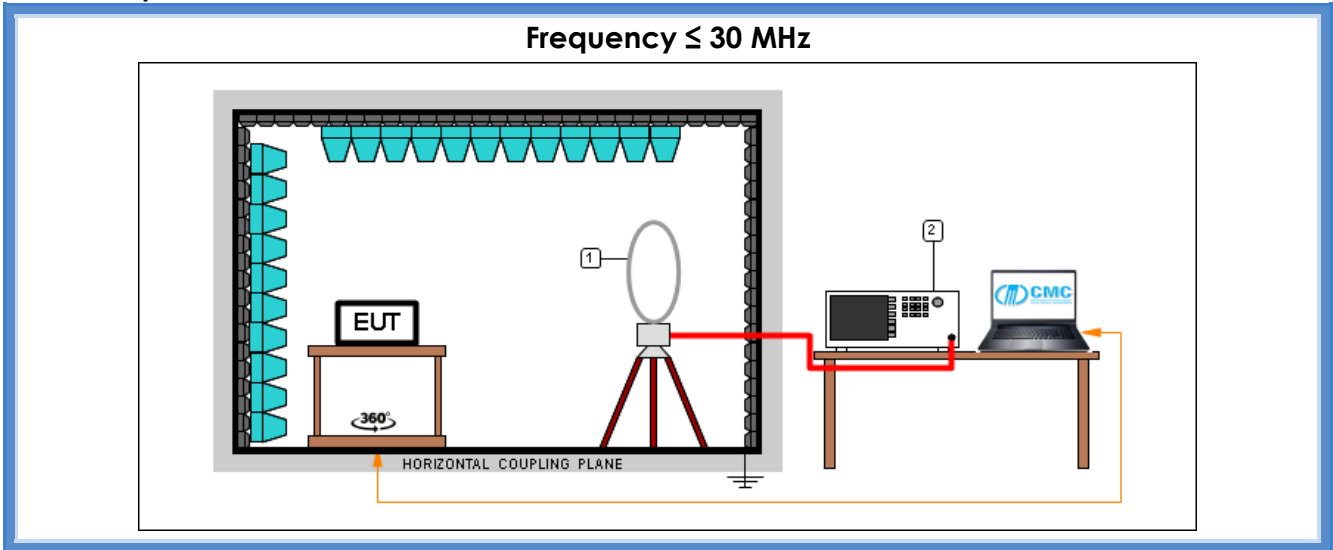

Test setup PE004_01

Nr.	Id. Number	Manufacturer	Model	Description
2	CMC S353	Rohde & Schwarz	ESW26	EMI Test Receiver 1 Hz - 26.5 GHz
1	CMC S127	Schaffner	HLA6120	Loop Antenna 9kHz - 30MHz

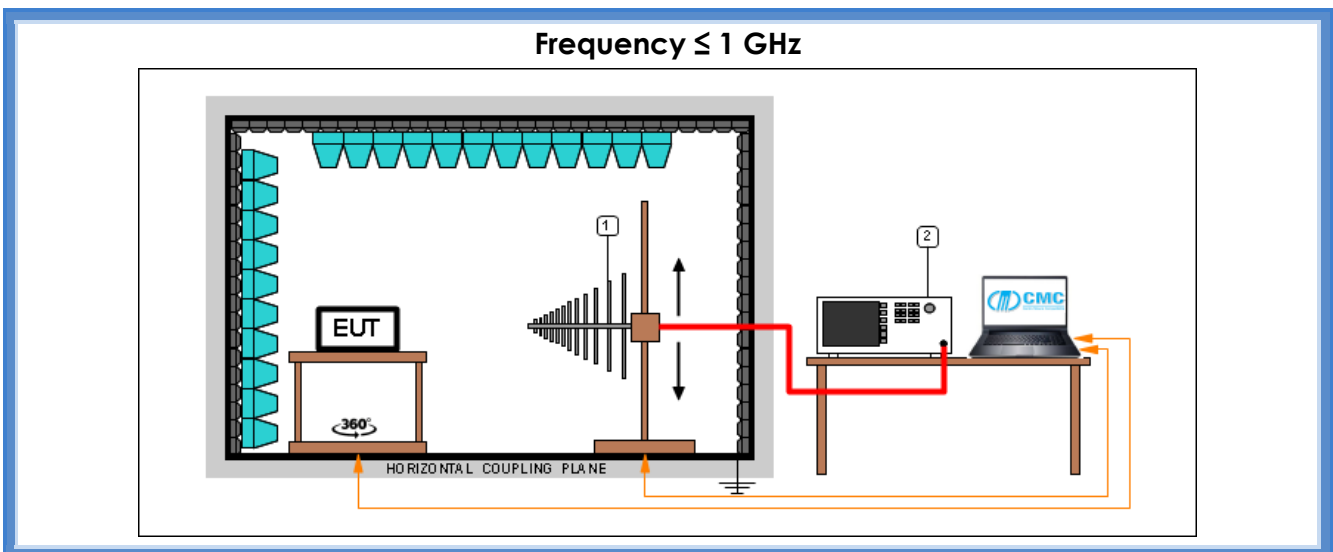


Test setup PE004_02

Nr.	Id. Number	Manufacturer	Model	Description
2	CMC S353	Rohde & Schwarz	ESW26	EMI Test Receiver 1 Hz - 26.5 GHz
1	CMC S271	Schwarzbeck	BBA 9106 + VHBB 9124	Broadband Antenna

Test setup PE004_03

Nr.	Id. Number	Manufacturer	Model	Description
2	CMC S353	Rohde & Schwarz	ESW26	EMI Test Receiver 1 Hz - 26.5 GHz
1	CMC S287	Schwarzbeck	VUSLP 9111B	Broadband Antenna

Frequency > 1 GHz

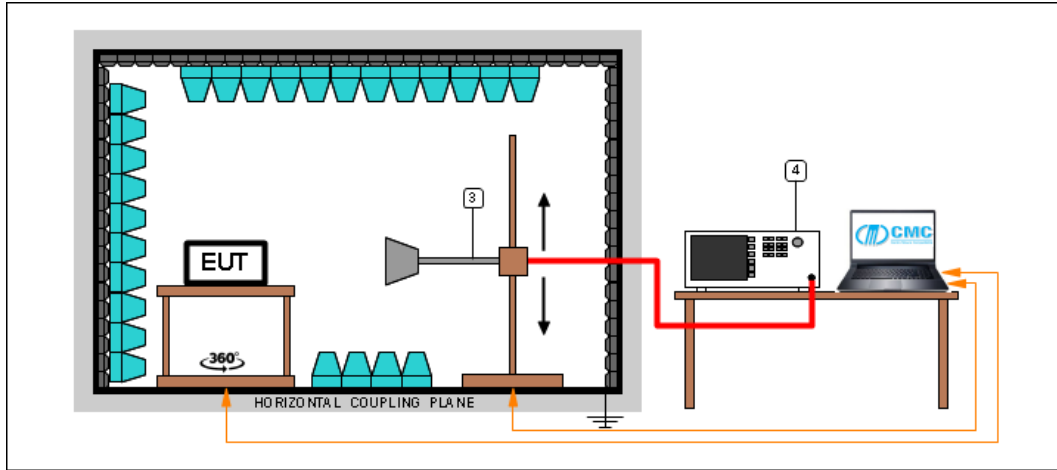

Test setup PE004_04

Nr.	Id. Number	Manufacturer	Model	Description
4	CMC S353	Rohde & Schwarz	ESW26	EMI Test Receiver 1 Hz - 26.5 GHz
3	CMC S108	Emco	3115	Waveguide antenna

Test setup PE004_05

Nr.	Id. Number	Manufacturer	Model	Description
4	CMC S353	Rohde & Schwarz	ESW26	EMI Test Receiver 1 Hz - 26.5 GHz
3	CMC S290	Schwarzbeck	BBHA 9170	Horn Antenna (15-40 GHz)

Result

Channel (MHz)	Polarization	Frequency Range (MHz)	Graphs	Result
902,75	H	300 – 1000	G21247020	P
902,75	V	300 – 1000	G21247021	P
914,75	V	300 – 1000	G21247022	P
914,75	H	300 – 1000	G21247023	P
927,25	H	300 – 1000	G21247024	P
927,25	V	300 – 1000	G21247025	P
Worst case	V	30 – 300	G21247026	P
Worst case	H	30 – 300	G21247027	P
Worst case	Loop	0,009 – 30	G21247028	P
902,75	V	1000 – 10000	G21247029	P
902,75	H	1000 – 10000	G21247030	P
914,75	H	1000 – 10000	G21247031	P
914,75	V	1000 – 10000	G21247032	P
927,25	V	1000 – 10000	G21247033	P
927,25	H	1000 – 10000	G21247034	P


Remarks: EUT was tested in 3 orthogonal planes, graphs are related to the highest detected levels. Measurements at frequencies lower than 30 MHz have been performed with an EUT – antenna distance of 10 m. Measured values have been corrected with conversion factor $40\log(\text{test distance}/10)$ based on the measuring distance provided by the standard. Measurements at frequencies higher than 30 MHz and lower than 1000 MHz have been performed with an EUT – antenna distance of 10 m. Measured values have been corrected with conversion factor $20\log(\text{test distance}/10)$ based on the measuring distance provided by the standard. Peaks above the limits are caused by the nominal transmitting frequencies

Graphs Legend

PK: Peak; QP [1s] (quasi-peak at 1 second) values are marked with a +
AV: Average; AV [1s] (average at 1 second) values are marked with a X

Graphs

Sega11a 21247020

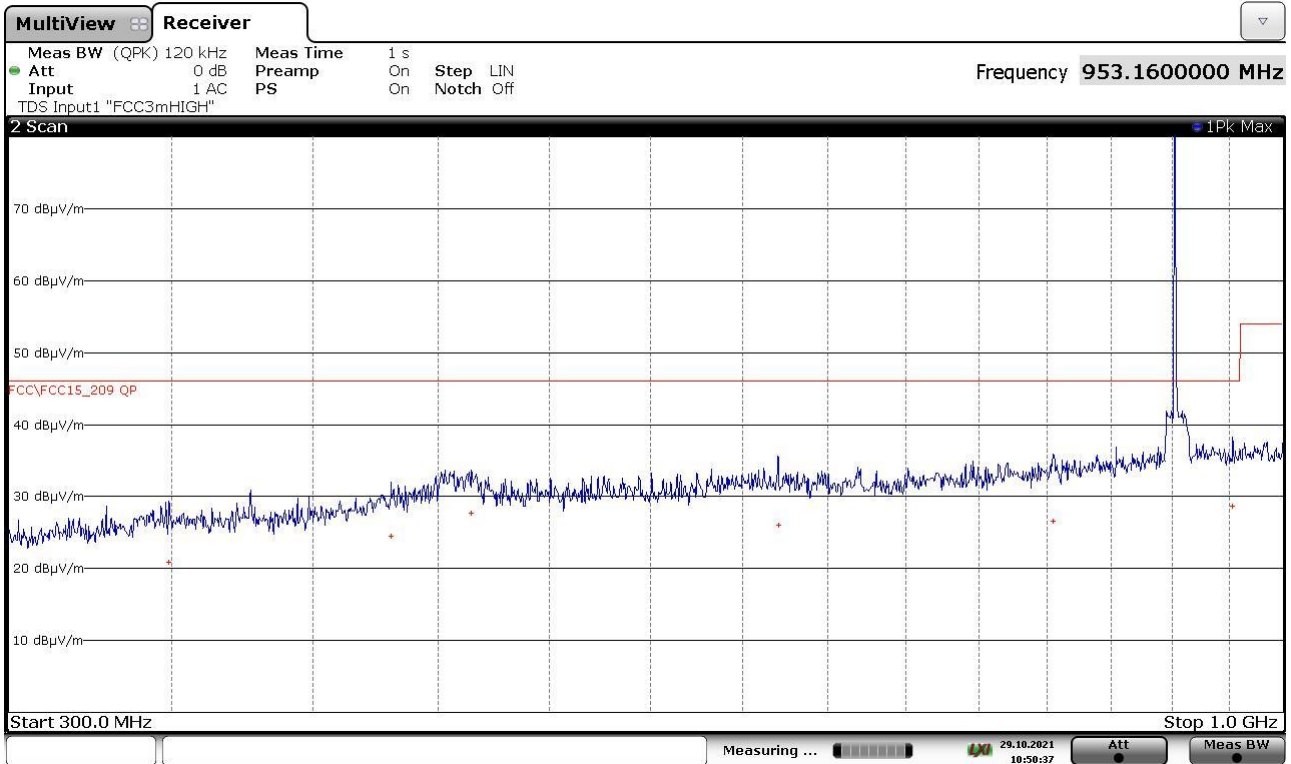


FINAL RESULT TABLE

QUASI PEAK

Freq Hz	Lev dBuV/m	Margin dB
349160000	+20,92	-25,10
430440000	+24,51	-21,51
464520000	+27,63	-18,39
620560000	+26,06	-19,96
804720000	+26,63	-19,39
953160000	+28,70	-17,32

21247020_2

Segalla 21247021

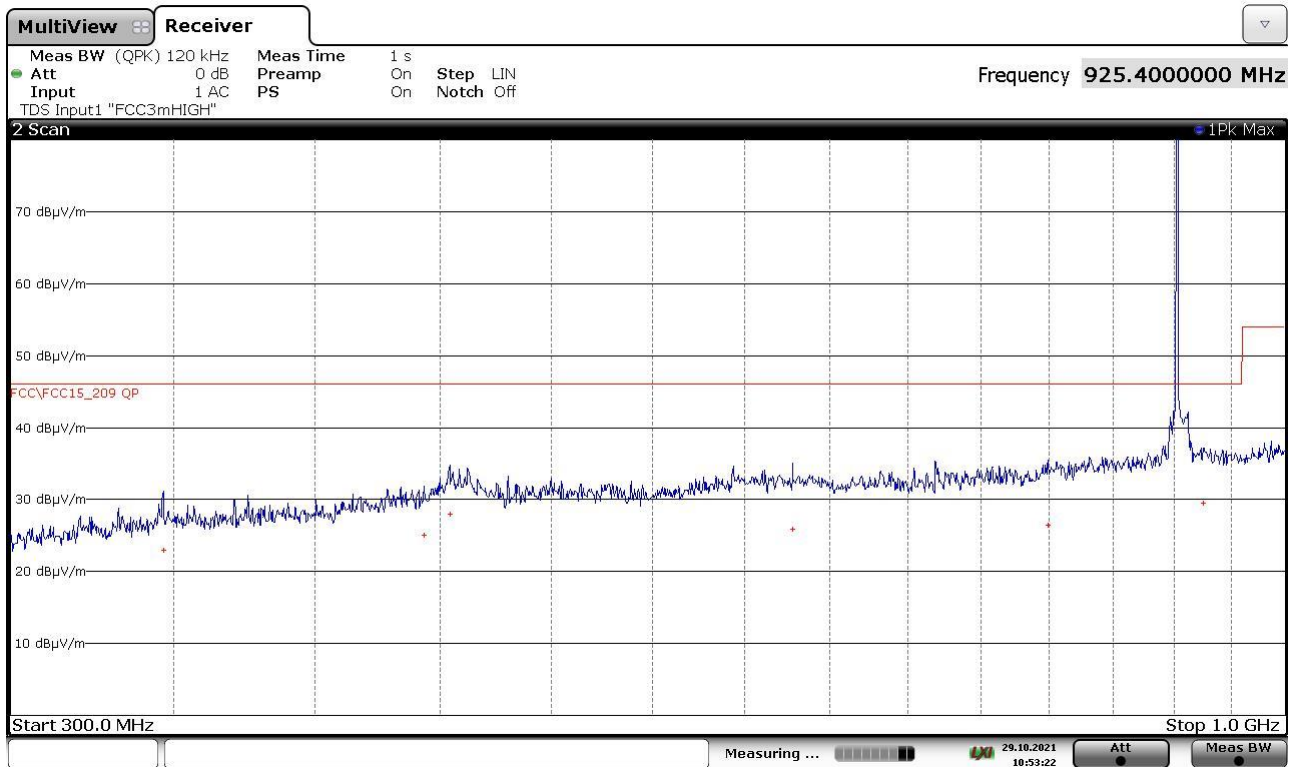


FINAL RESULT TABLE

QUASI PEAK		
Freq Hz	Lev dBuV/m	Margin dB
346600000	+22,93	-23,09
443280000	+25,05	-20,97
454240000	+28,03	-17,99
628040000	+25,88	-20,14
798960000	+26,50	-19,52
925400000	+29,43	-16,59

21247021_2

Segalla 21247022

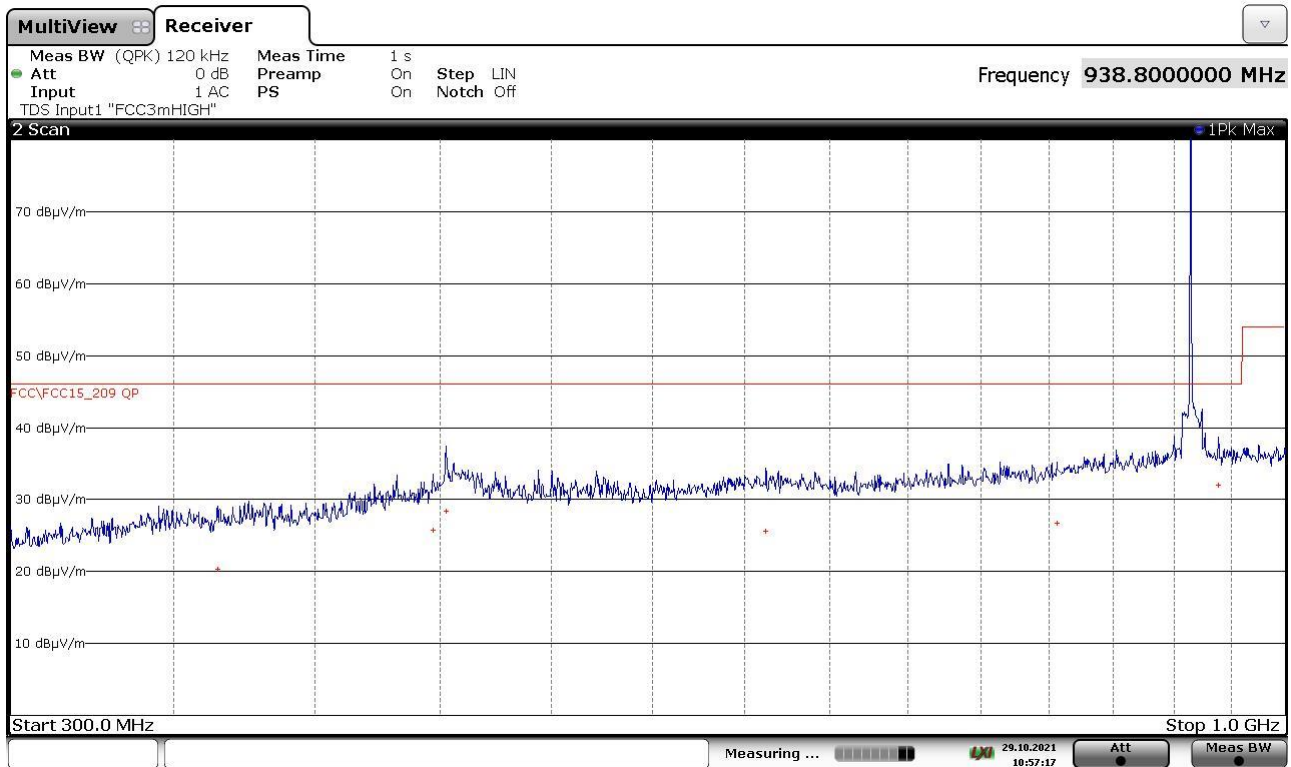


FINAL RESULT TABLE

QUASI PEAK		
Freq Hz	Lev dBuV/m	Margin dB
364720000	+20,25	-25,77
447080000	+25,69	-20,33
452600000	+28,32	-17,70
612320000	+25,64	-20,38
806080000	+26,72	-19,30
938800000	+32,02	-14,00

21247022_2

Segalla 21247023

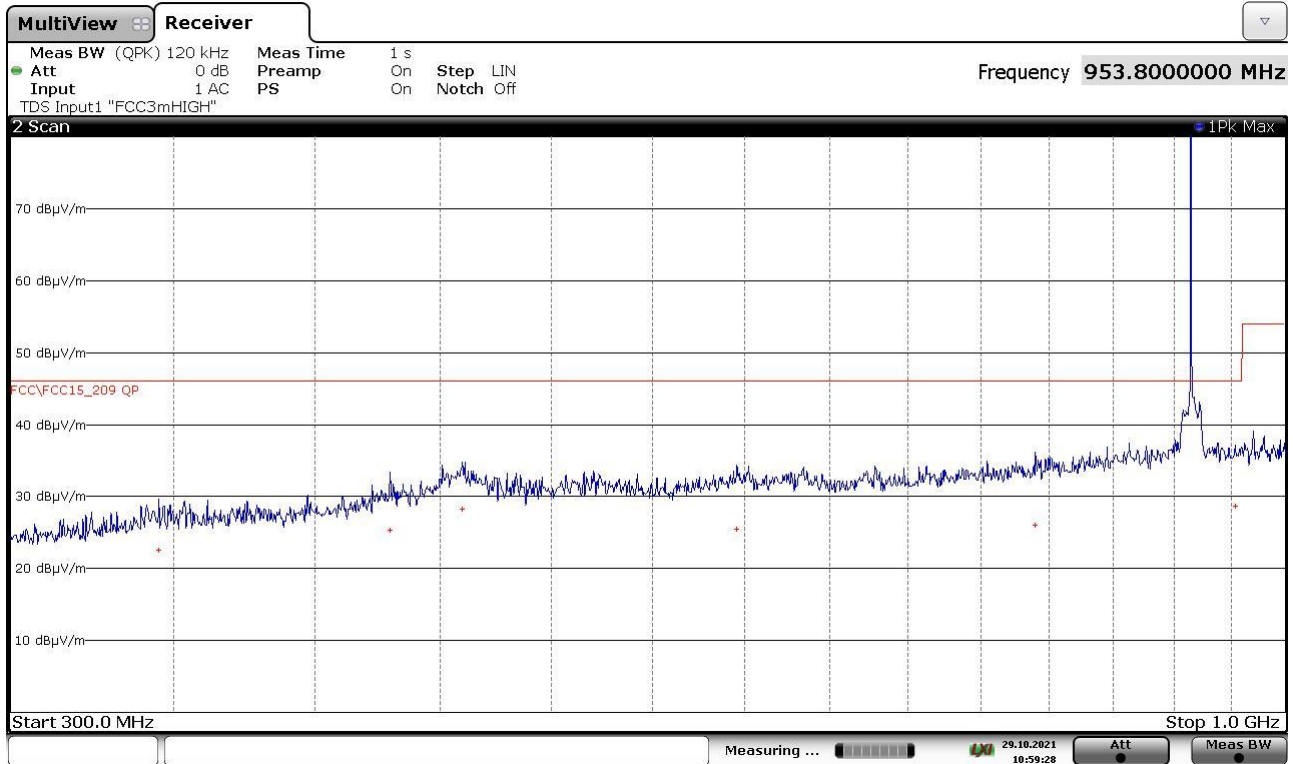


FINAL RESULT TABLE

QUASI PEAK		
Freq Hz	Lev dBuV/m	Margin dB
345160000	+22,49	-23,53
429320000	+25,32	-20,70
459680000	+28,25	-17,77
595680000	+25,49	-20,53
789600000	+25,98	-20,04
953800000	+28,64	-17,38

21247023_2

Segalla 21247024

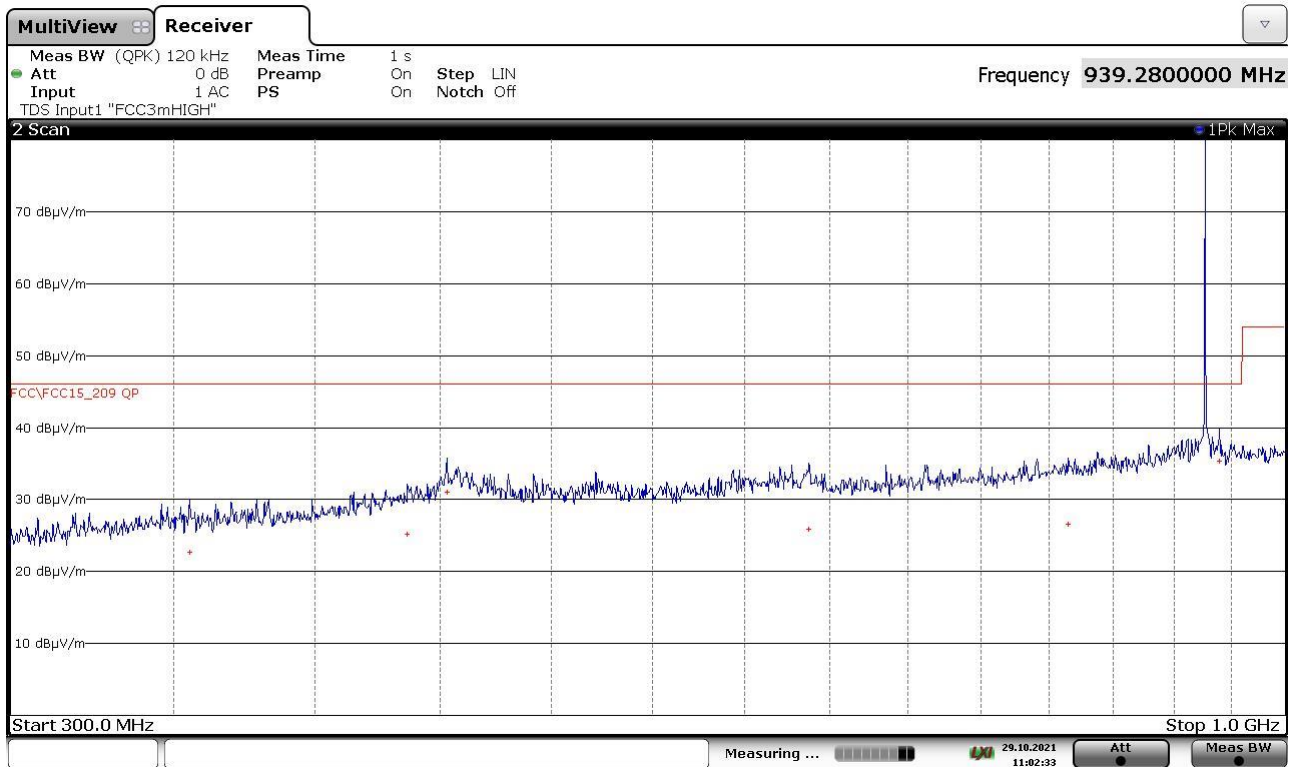


FINAL RESULT TABLE

QUASI PEAK		
Freq Hz	Lev dBuV/m	Margin dB
355280000	+22,68	-23,34
436400000	+25,25	-20,77
453000000	+30,99	-15,03
637680000	+25,81	-20,21
814600000	+26,62	-19,40
939280000	+35,32	-10,70

21247024_2

Segalla 21247025

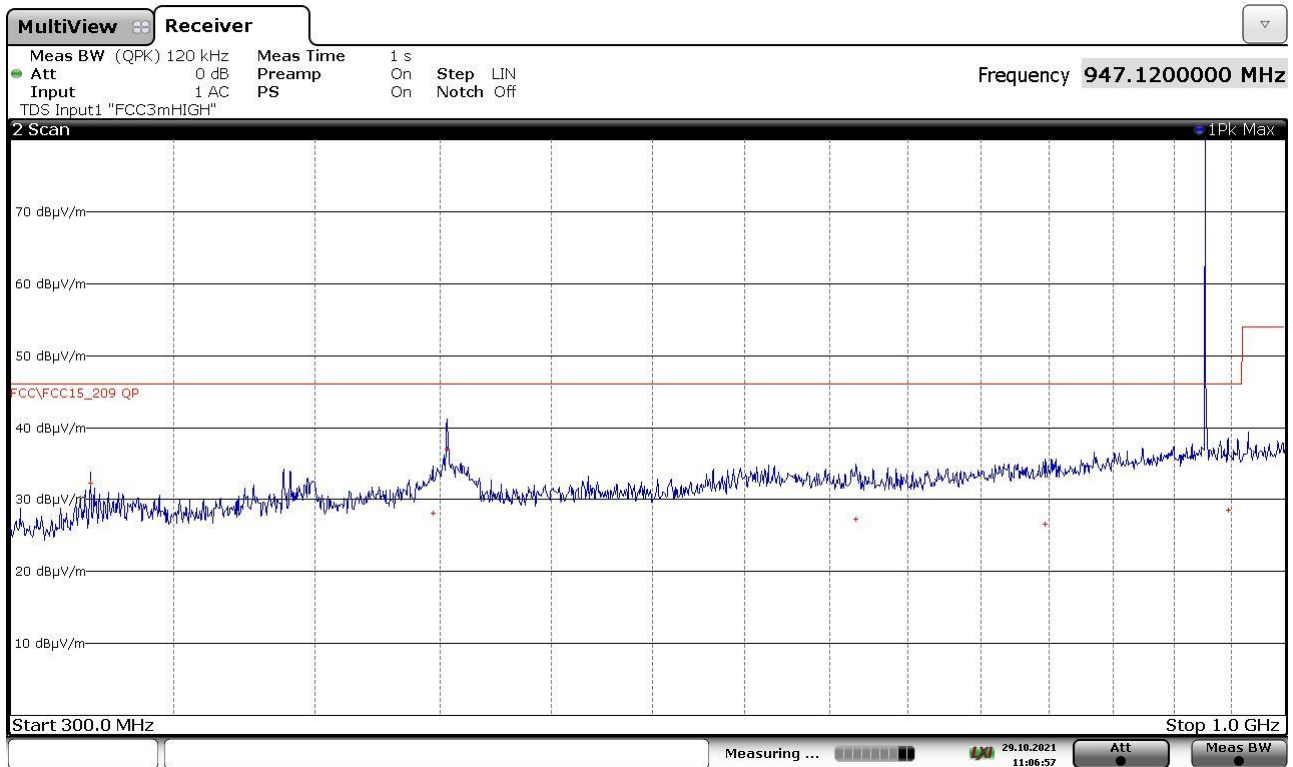


FINAL RESULT TABLE

QUASI PEAK		
Freq Hz	Lev dBuV/m	Margin dB
323560000	+32,22	-13,80
447080000	+28,06	-17,96
452920000	+37,05	-8,97
666600000	+27,29	-18,73
797080000	+26,59	-19,43
947120000	+28,51	-17,51

21247025_2

Segalla 21247026

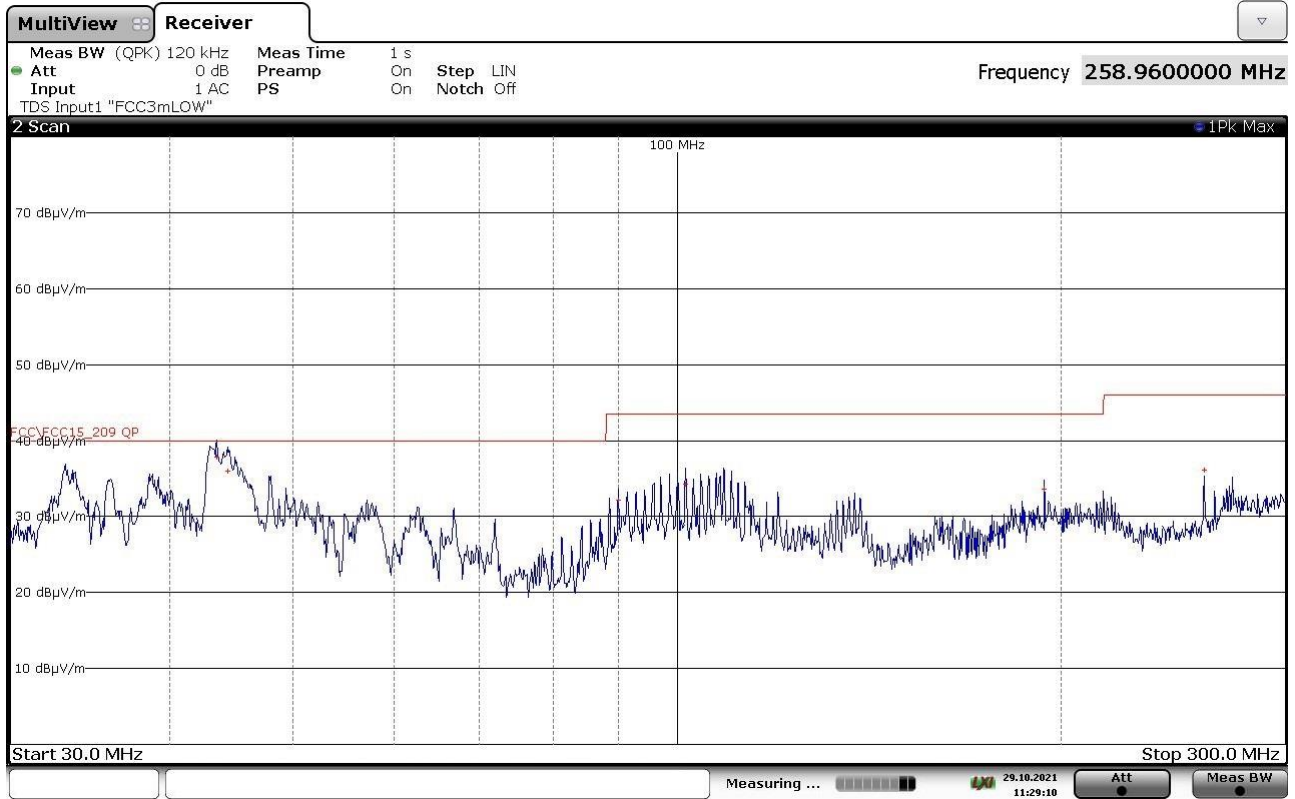

FINAL RESULT TABLE

QUASI PEAK		
Freq Hz	Lev dBuV/m	Margin dB
43520000	+37,78	-2,22
44400000	+35,94	-4,06
89920000	+32,15	-11,37
101560000	+34,28	-9,24
194080000	+33,63	-9,89
258960000	+36,16	-9,86

21247026_2