

Radio Test Report

EUT Name: Remote Control

Model Name: 1012000409, 1012000410, 1012000411

CFR 47 Part 15.247: 2021 and RSS 247: 2017

Prepared for:

Hunter Douglas Window Fashions Division
1 Duette Way
Broomfield, CO, 80020
U.S.A.

Prepared by:

TUV Rheinland of North America, Inc.
5015 Brandin Ct.
Fremont, CA 94538
Tel: (925) 249-9123
Fax: (925) 249-9124
<http://www.tuv.com/>

Report/Issue Date: July 12, 2021
Report Number: 32064402.001
Revision Number: 0
Job Number: 234158663

Statement of Compliance

Manufacturer: Hunter Douglas Window Fashions Division
1 Duette Way,
Broomfield, CO, 80020, USA
Requester / Applicant: Hunter Douglas Window Fashions Division
Name of Equipment: Remote Control
Model No. 1012000409, 1012000410, 1012000411
Type of Equipment: Intentional Radiator
Application of Regulations: CFR 47 Part 15.247: 2021 and RSS 247: 2017
Test Dates: June 24, 2021 to June 28, 2021

Guidance Documents:

Emissions: ANSI C63.10-2013, KDB 558074 D01 DTS Measurement Guidance v05r02

Test Methods:

Emissions: ANSI C63.10-2013, KDB 558074 D01 DTS Measurement Guidance v05r02

The electromagnetic compatibility test and documented data described in this report has been performed and recorded by TUV Rheinland, in accordance with the standards and procedures listed herein. As the responsible authorized agent of the EMC laboratory, I hereby declare that the equipment described above has been shown to be compliant with the EMC requirements of the stated regulations and standards based on these results. If any special accessories and/or modifications were required for compliance, they are listed in the Executive Summary of this report.

This report must not be used to claim product endorsement by A2LA or any agency of the U.S. Government. This report shall not be reproduced except in full, without the written authorization of TUV Rheinland of North America.



Rachana Khanduri

Prepared By

Date July 12, 2021



Richard Decker

Reviewer Signatory

Date July 12, 2021



Industry
Canada Industrie
Canada

Testing Cert #3331.02

US1131

2932D

Table of Contents

1	Executive Summary	7
1.1	Scope	7
1.2	Purpose	7
1.3	Summary of Test Results	7
1.4	Special Accessories	8
1.5	Equipment Modifications	8
2	Laboratory Information	9
2.1	Accreditations & Endorsements	9
2.1.1	US Federal Communications Commission	9
2.1.2	A2LA	9
2.1.3	Industry Canada	9
2.1.4	Japan – VCCI	9
2.1.5	Acceptance by Mutual Recognition Arrangement	10
2.2	Test Facilities	10
2.2.1	Emission Test Facility	10
2.3	Measurement Uncertainty	10
2.3.1	Sample Calculation – radiated & conducted emissions	11
2.3.2	Measurement Uncertainty	11
2.4	Calibration Traceability	11
3	Product Information	12
3.1	Product Description	12
3.2	Equipment Configuration	12
3.3	Operating Mode	12
3.4	Unique Antenna Connector	13
3.4.1	Results	13
3.5	Duty Cycle	14
3.5.1	Results	14
4	Emissions	16
4.1	Output Power Requirements	16
4.1.1	Test Method	16
4.1.2	Test Setup: (Conducted)	16
4.1.3	Results	17
4.2	DTS Bandwidth (6dB) and Occupied Bandwidth	21
4.2.1	Test Method	21
4.2.2	Test Setup: (Conducted)	21
4.2.3	Results	21
4.3	Peak Power Spectral Density	29
4.3.1	Test Method	29
4.3.2	Test Setup: (Conducted)	29
4.3.3	Results	29

Table of Contents

4.4	Out of Band Emissions: Non-Restricted Bands	34
4.4.1	Test Method	34
4.4.2	Test Setup: (Conducted)	34
4.4.3	Results	35
4.5	Out of Band Emissions: Restricted Band Edge	42
4.5.1	Test Method	42
4.5.2	Test Results	42
4.6	Transmitter Spurious Emissions	47
4.6.1	Test Methodology	47
4.6.2	Test Setup:	48
4.6.3	Transmitter Spurious Emission Limit	49
4.6.4	Test Results	49
4.7	AC Conducted Emissions	58
4.7.1	Test Methodology	58
4.7.2	Test Results	58
5	Test Equipment List	59
5.1	Equipment List	59
6	EMC Test Plan	60
6.1	Introduction	60
6.2	Customer	60
6.3	Equipment Under Test (EUT)	61
6.4	Product Specifications	62
6.5	Test Specifications	64

Index of Tables

Table 1: Summary of Test Results 7
Table 2: RF Output Power at the Antenna Port – Test Results 17
Table 3: Occupied Bandwidth – Test Results 22
Table 4: Peak Power Spectral Density – Test Results 30
Table 5: Emissions at the Band-Edge – Test Results 35
Table 6: Customer Information 60
Table 7: Technical Contact Information 60
Table 8: EUT Designation 61
Table 9: EUT Specifications* 62
Table 10: Antenna Information 63
Table 11: Interface Specifications 63
Table 12: Accessory Equipment 63
Table 13: Ancillary Equipment (used for test purposes only) 63
Table 14: Description of Sample used for Testing 64
Table 15: Description of Test Configuration used for Radiated Measurement. 64
Table 16: Test Specifications 64

1 Executive Summary

1.1 Scope

This report is intended to document the status of conformance with the requirements of the CFR 47 Part 15.247: 2021 and RSS 247: 2017 based on the results of testing performed on June 24, 2021 to June 28, 2021 on the 1012000410 manufactured by Hunter Douglas Window Fashions Division. This report only applies to the specific samples tested under the stated test conditions. It is the responsibility of the manufacturer to assure that additional production units of this model are manufactured with identical or EMI equivalent electrical and mechanical components. This report is further intended to document changes and modifications to the EUT throughout its life cycle. All documentation will be included as a supplement.

1.2 Purpose

Testing was performed to evaluate the EMC performance of the EUT in accordance with the applicable requirements, procedures, and criteria defined in the application of regulations and application of standards listed in this report. The 2402 MHz to 2480 MHz frequency band for Bluetooth, Low Energy is covered in this document.

1.3 Summary of Test Results

Table 1: Summary of Test Results

Test	Test Method ANSI C 63.10 & C63.4	Worse Case (Measured)	Result
Maximum Output Power	CFR47 15.247 (b), RSS 247 Sect. 5.4 (d)	6.93 dBm @ 2402MHz Channel, 1Mbps	Complied
DTS Bandwidth (6dB)	CFR47 15.247 (a)(2), RSS 247 Sect. 5.2 (a)	0.716MHz @ 2402MHz Channel, 1Mbps	Complied
Peak Power Spectral Density	CFR47 15.247 (e), RSS 247 Sect. 5.2 (b)	-6.67 dBm/ kHz @ 2402MHz channel, 1Mbps	Complied
Out of Band Emissions: Non-Restricted	CFR47 15.247 (d), RSS 247 Sect.5.5	-26.32 dBc @ 2400 MHz, Lower Band Edge	Complied
Out of Band Emissions: Restricted	CFR47 15.205, RSS GEN Sect.8.10	-13.95dB margin @ 2483.5 MHz, Average	Complied
Transmitter Spurious Emissions	CFR47 15.209, CFR47 15.247 (d), RSS-GEN Sect.8.9	-1.47dB Margin @ 12010.86MHz, Average	Complied
AC Power Conducted Emission	CFR47 15.207, RSS-GEN Sect.8.8	EUT is DC powered	N/A
Note: This test report covers 2400 MHz to 2480 MHz band. Class B limits were applied where applicable. N/A = Test not applicable since EUT is DC powered.			

1.4 Special Accessories

No special accessories were necessary in order to achieve compliance.


1.5 Equipment Modifications

None

2 Laboratory Information

2.1 Accreditations & Endorsements

2.1.1 US Federal Communications Commission

 TUV Rheinland of North America EMC test facilities located at 1279 Quarry Lane, Ste. A, Pleasanton, CA, 94566, and 5015 Brandin Ct, Fremont, CA. 94538, are recognized by the Commission for performing testing services for the general public on a fee basis. These laboratory test facilities have been fully described in reports submitted to and accepted by the FCC (Pleasanton Registration No. US1131, Fremont Registration No. US1131). The laboratory Scopes of Accreditation include Title 47 CFR Parts 15, 18 and 90. The accreditations are updated every three years.

2.1.2 A2LA



TUV Rheinland of North America EMC test facilities are accredited by the American Association for Laboratory Accreditation (A2LA). The laboratories have been assessed and accredited by A2LA in accordance with ISO Standard 17025:2017 (Testing Certificate #3331.02). The Scope of Laboratory Accreditation includes emission and immunity testing. The accreditations are updated annually.

2.1.3 Industry Canada



Industry
Canada Industrie
Canada

The Pleasanton 5-meter Semi-Anechoic Chamber, Registration No. 2932M-1, has been accepted by Industry Canada to perform testing to 3 and 5 meters based on the test procedures described in ANSI C63.4-2014. The Fremont 10-meter Semi-Anechoic Chamber, Registration No. 2932D-1, has been accepted by Industry Canada to perform testing to 3 and 10 meters based on the test procedures described in ANSI C63.4-2014.

2.1.4 Japan – VCCI



The Voluntary Control Council for Interference by Information Technology Equipment (VCCI) is a group that consists of Information Technology Equipment (ITE) manufacturers and EMC test laboratories. The purpose of the Council is to take voluntary control measures against electromagnetic interference from Information Technology Equipment, and thereby contribute to the development of a socially beneficial and responsible state of affairs in the realm of Information Technology Equipment in Japan. TUV Rheinland of North America EMC test facilities located at 1279 Quarry Lane, Ste. A, Pleasanton, CA, 94566, and 5015 Brandin Ct, Fremont, CA. 94538, have been assessed and approved in accordance with the Regulations for Voluntary Control Measures.

VCCI Registration No. for Pleasanton: A-0326

VCCI Registration No. for Fremont: A-0327

2.1.5 Acceptance by Mutual Recognition Arrangement



The United States has an established agreement with specific countries under the Asia Pacific Laboratory Accreditation Corporation (APLAC) Mutual Recognition Arrangement. Under this agreement, all TUV Rheinland at 1279 Quarry Ln, Pleasanton, CA 94566 test results and test reports within the scope of the laboratory NIST / A2LA accreditation will be accepted by each member country.

2.2 Test Facilities

Test facilities are located at 5015 Brandin Ct, Fremont, California, 94538, USA and 1279 Quarry Lane, Pleasanton, California 94566, USA (Fremont is the Pleasanton Annex).

2.2.1 Emission Test Facility

The Semi-Anechoic Chambers and AC Line Conducted measurement facilities used to collect radiated and conducted emissions data have been constructed in accordance with ANSI C63.7:1992. The Fremont 10 meter semi-anechoic chamber has been measured in accordance with and verified to comply with the theoretical volumetric normalized site attenuation of ANSI C63.4:2014 and SVSWR requirements of CISPR 16-1-4 Consol. Ed. 3.0 (2010-04), at test distances of 3 and 10 meters. This site has been described in reports dated November 1st, 2006, submitted to the FCC, and accepted by letter dated November 28, 2006. The site is listed with the FCC and accredited by A2LA (Testing Certificate #3331.02). The Pleasanton 5 meter semi-anechoic chamber has been verified to comply with the theoretical volumetric normalized site attenuation of ANSI C63.4:2009 and SVSWR requirements of CISPR 16-1-4 Consol. Ed. 3.0 (2010-04) at a test distance of 3 meters. This site has been described in reports dated November 1st, 2006, submitted to the FCC, and accepted by letter dated November 28, 2006. The site is listed with the FCC and accredited by A2LA (Testing Certificate #3331.02).

2.3 Measurement Uncertainty

Two types of measurement uncertainty are expressed in this report, per *ISO Guide To The Expression Of Uncertainty In Measurement*, 1st Edition, 1995.

The Combined Standard Uncertainty is the standard uncertainty of the result of a measurement when that result is obtained from the values of a number of other quantities; it is equal to the positive square root of the sum of the variances or co-variances of these other quantities, weighted according to how the measurement result varies with changes in these quantities. The term *standard uncertainty* is the result of a measurement expressed as a standard deviation.

The Expanded Uncertainty defines an interval about the result of a measurement that may be expected to encompass a large fraction of the distribution of values that could reasonably be attributed to the measurement and the fraction may be viewed as the coverage probability or level of confidence of the interval.

2.3.1 Sample Calculation – radiated & conducted emissions

The field strength is calculated by subtracting the Amplifier Gain and adding the Cable Loss and Antenna Correction Factor to the measured reading. The basic equation is as follows:

$$\text{Field Strength (dB}\mu\text{V/m)} = \text{RAW} - \text{AMP} + \text{CBL} + \text{ACF}$$

Where: RAW = Measured level before correction (dBμV)

AMP = Amplifier Gain (dB)

CBL = Cable Loss (dB)

ACF = Antenna Correction Factor (dB/m)

$$\mu\text{V/m} = 10^{\frac{\text{dB}\mu\text{V} / \text{m}}{20}}$$

Sample radiated emissions calculation @ 30 MHz

Measurement +Antenna Factor–Amplifier Gain+Cable loss=Radiated Emissions (dBuV/m)

$$25 \text{ dBuV/m} + 17.5 \text{ dB} - 20 \text{ dB} + 1.0 \text{ dB} = 23.5 \text{ dBuV/m}$$

2.3.2 Measurement Uncertainty

Per CISPR 16-4-2	U _{lab}	U _{cispr}
Radiated Disturbance @ 10 meters		
30 – 1,000 MHz	2.25 dB	4.51 dB
Radiated Disturbance @ 3 meters		
30 – 1,000 MHz	2.26 dB	4.52 dB
1 – 6 GHz	2.12 dB	4.25 dB
6 – 18 GHz	2.47 dB	4.93 dB
Conducted Disturbance @ Mains Terminals		
150 kHz – 30 MHz	1.09 dB	2.18 dB
Disturbance Power		
30 MHz – 300 MHz	3.92 dB	4.3 dB

2.4 Calibration Traceability

All measurement instrumentation is traceable to the National Institute of Standards and Technology (NIST). Measurement method complies with ANSI/NCSL Z540-1-1994 and ISO Standard 17025:2017. Equipment calibration records are kept on file at the test facility.

3 Product Information

3.1 Product Description

The 1012000409, 1012000410, 1012000411 are assembled into various remote assemblies and fabricated into Hunter Douglas window coverings via an easy to use and intuitive push-button handheld remote. This device utilized BLE in the 2400-2483.5MHz band.

Hunter Douglas Remotes which are model numbered differently for marketing purposes but utilize the same hardware and communication software. All devices are identical in componentry and wireless communication aspects. These different model numbers have unique Product Marketing Names and depending on the device utilize different product features which are independent of the device's wireless communication.

Model differences:

1012000409 REMOT; HD; PVG3; WHT; 000

1012000410 REMOT; HD; PVG3; HD; BLK; 000

1012000411 REMOT; NO LOGO; PVG3; WHT; 000

Model 1012000410 is considered worst case and used for testing.

3.2 Equipment Configuration

A description of the equipment configuration is given in the Test Plan Section. The EUT was tested as called for in the test standard and was configured and operated in a manner consistent with its intended use. The EUT was connected to rated power and allowed to reach intended operating conditions. The placement of the EUT system components was guided by the test standard and selected to represent typical installation conditions.

In the case of a EUT that can operate in more than one configuration, preliminary testing was performed to determine the configuration that produced maximum radiation.

The final configuration was selected to produce the worst case radiation for emissions testing and to place the EUT in the most susceptible state for immunity testing.

3.3 Operating Mode

A description of the operation mode is given in the Test Plan Section. In the case of a EUT that can operate in more than one state, preliminary testing was performed to determine the operating mode that produced maximum radiation.

The final operating mode was selected to produce the worst case radiation for emissions testing.

3.4 Unique Antenna Connector

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this Section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited. This requirement does not apply to carrier current devices or to devices operated under the provisions of CFR47 Parts 15.211, 15.213, 15.217, 15.219, or 15.221.

3.4.1 Results

The Remote Control has 1 dedicated Bluetooth integral, Trace antenna that has maximum gain of 0 dBi. It is not easily accessible to the end user.

It is integrated into the PCB of the device and is not easily accessible to the end user.

3.5 Duty Cycle

Model 1012000410 was measured for the duty cycle.

3.5.1 Results

Mode	On Time (ms)	Period (ms)	Duty Cycle (%)	Duty Factor (dB)
BLE-1Mbps	100	0	100	0
BLE-2Mbps	100	0	100	0

Notes: EUT was configured and measured for the duty cycle. All measurements use 100% duty cycle.

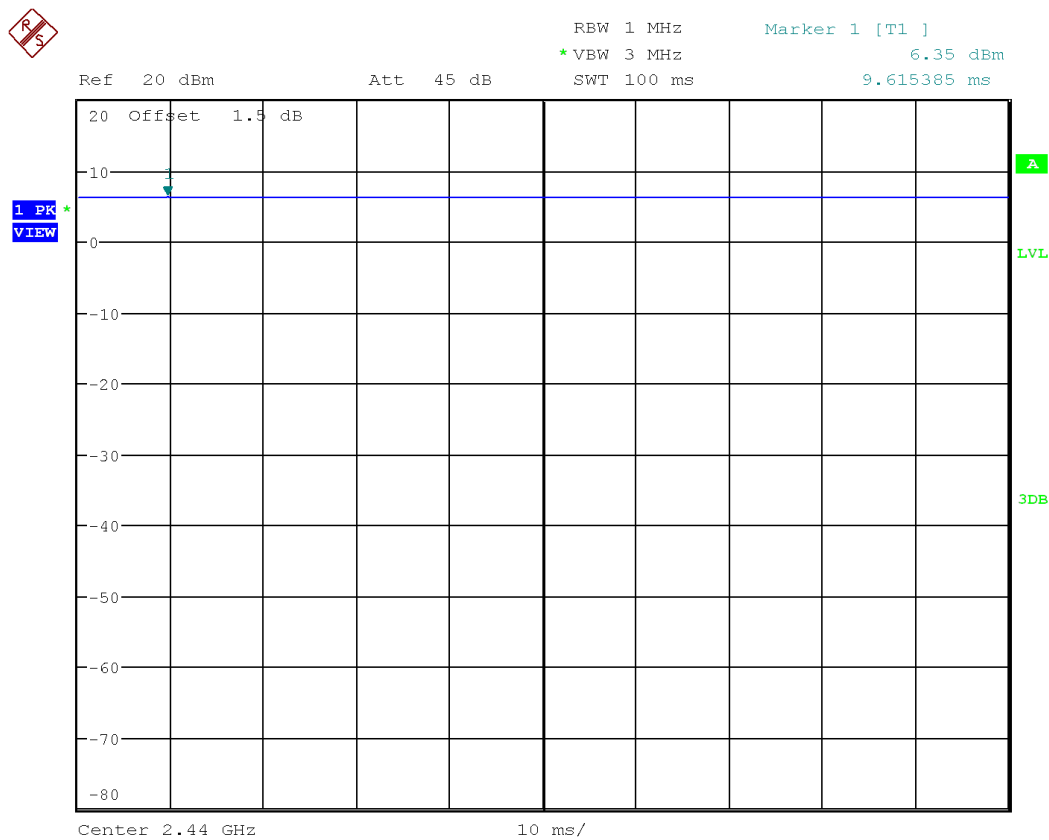


Figure 1: BLE-1Mbps Duty Cycle

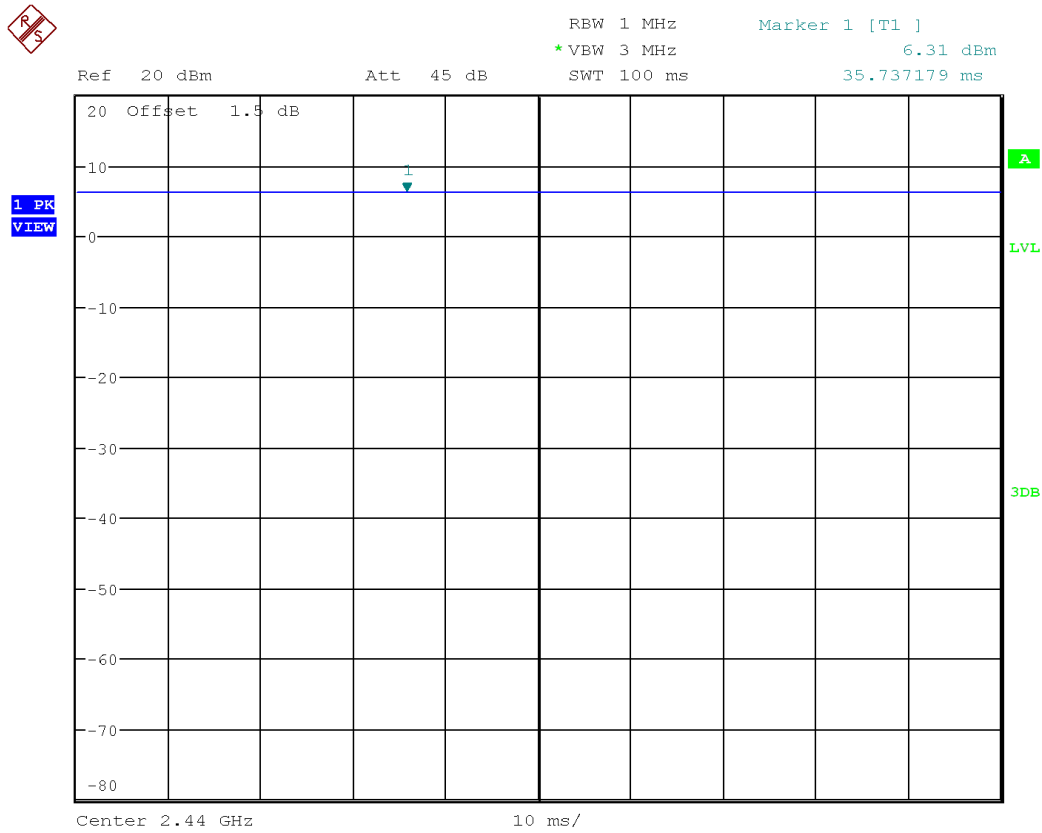


Figure 2: BLE-2Mbps Duty Cycle

4 Emissions

Testing was performed in accordance with CFR 47 Part 15.247: 2021 and RSS 247: 2017. These test methods are listed under the laboratory's A2LA Scope of Accreditation. This test measures the levels emanating from the EUT, thus evaluating the potential for the EUT to cause radio frequency interference to other electronic devices. Procedures described in section 8 of the standard were used.

4.1 Output Power Requirements

The maximum output power requirement is the maximum equivalent isotropic radiated power delivering at the transmitting antenna under specified conditions of measurements in the presence of modulation.


The maximum output power and harmonics shall not exceed CFR47 Part 15.247 (b) and RSS 247 Sect. 5.4.(d).

The maximum transmitted power in the frequency band 2400-2483.5 MHz: 1 W

4.1.1 Test Method

Conducted method was used to measure the channel power output. The worst findings were conducted on 3 channels in each operating range per CFR47 Part 15.247(b) and RSS 247 Sect. 5.4(d); 2400 MHz to 2483.5 MHz. The worst mode results indicated below.

4.1.2 Test Setup: (Conducted)

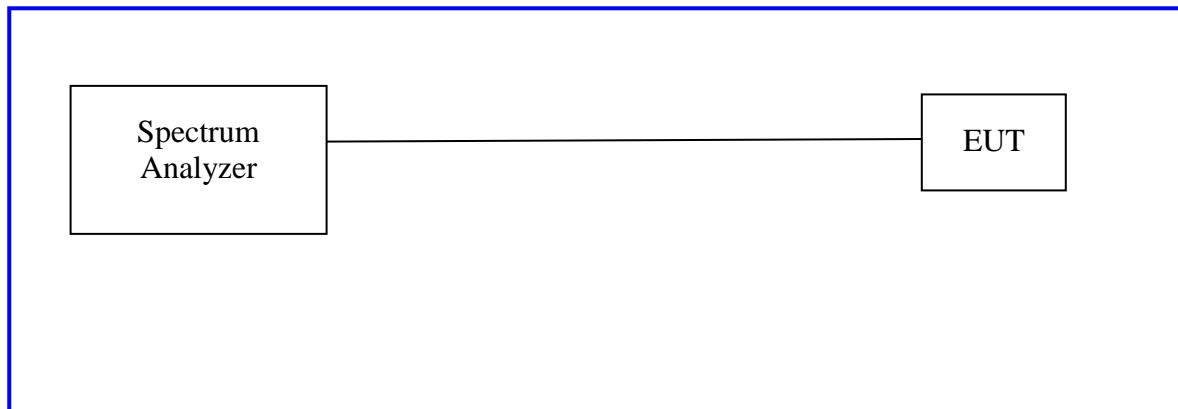

4.1.3 Results

As originally tested, the EUT was found to be compliant to the requirements of the test standard(s). Worse case data for each mode reported below. Plots of highest power included for low, medium, and high channels.

Table 2: RF Output Power at the Antenna Port – Test Results

Test Date: June 24, 2021		Test By: Rachana Khanduri		
Test Method: Conducted Measurements		Power Setting: +8 dBm		
Antenna Type: Integral, Trace		Max. Antenna Gain: 0 dBi		
Ambient Temp.: 21 °C		Relative Humidity: 37%		
Bluetooth LE – RF Output Power				
Data Rate	Operating Channel (MHz)	Measured Peak Output [dBm]	Limit [dBm]	Margin [dB]
1Mbps	2402	6.93	+30.00	-23.07
	2440	6.71	+30.00	-23.29
	2480	6.83	+30.00	-23.17
2Mbps	2402	6.80	+30.00	-23.20
	2440	6.64	+30.00	-23.36
	2480	6.79	+30.00	-23.21
Note: The EUT transmitted at 100% duty cycle. The highest power output observed was at 1 Mbps				

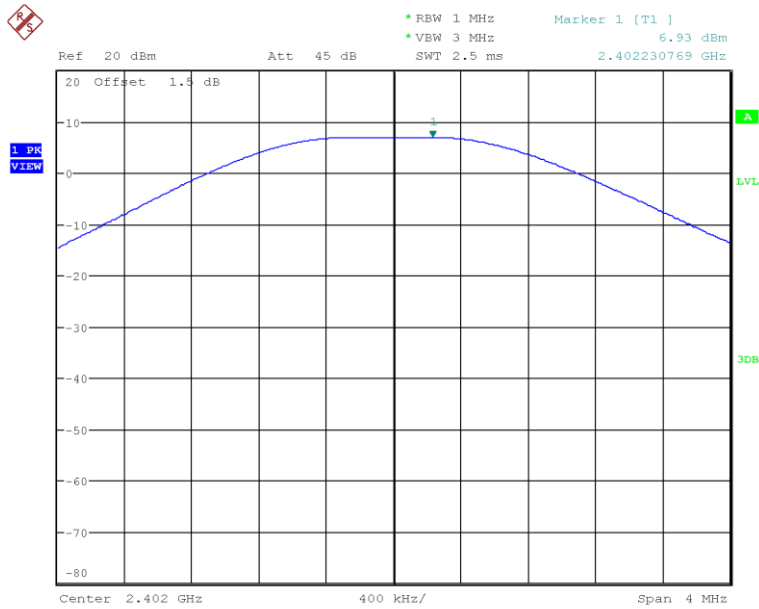


Figure 3: Maximum Conducted Power, 2402 MHz, 1Mbps

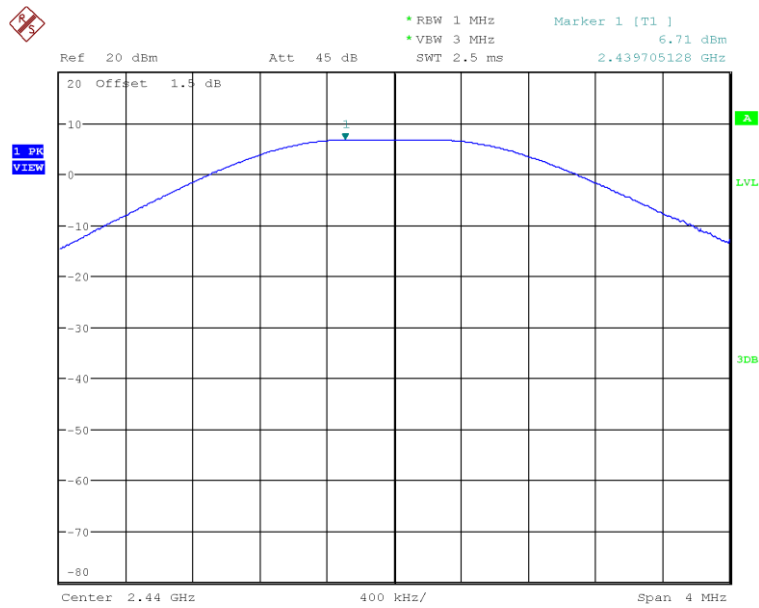


Figure 4: Maximum Conducted Power, 2440MHz, 1Mbps

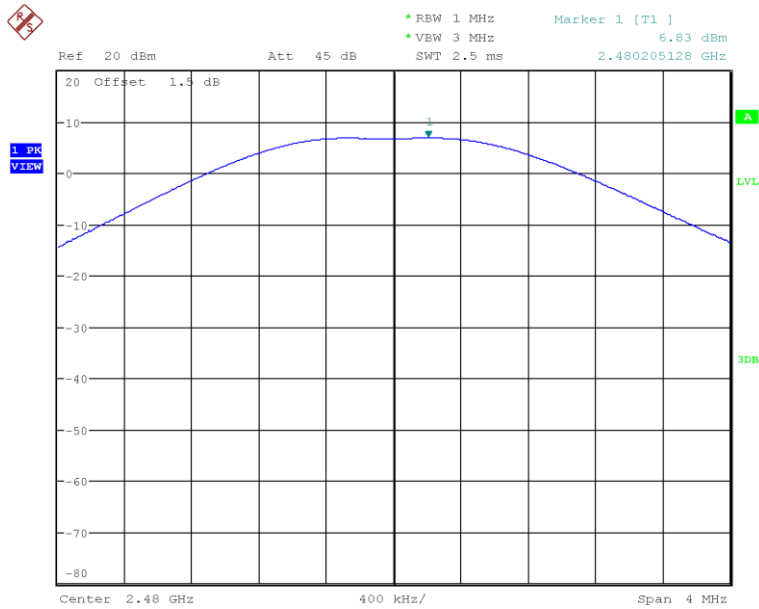


Figure 5: Maximum Conducted Power, 2480MHz, 1Mbps

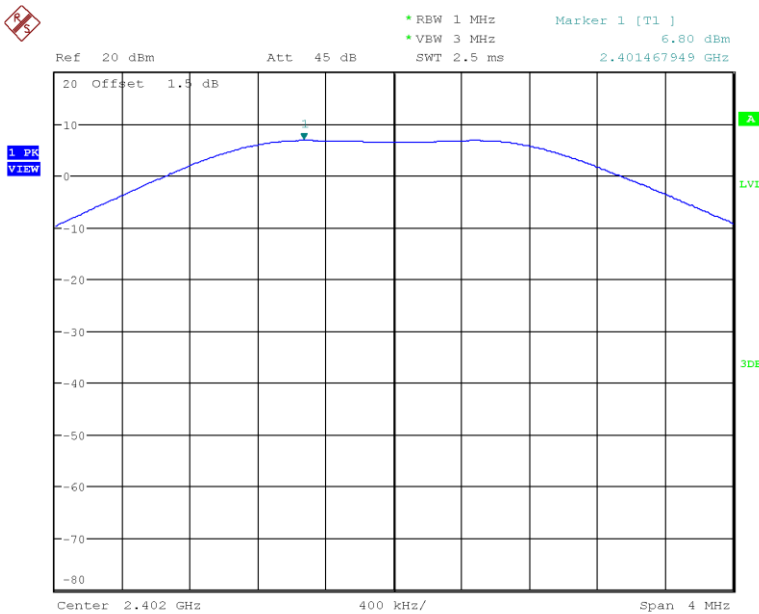


Figure 6: Maximum Conducted Power, 2402 MHz, 2Mbps

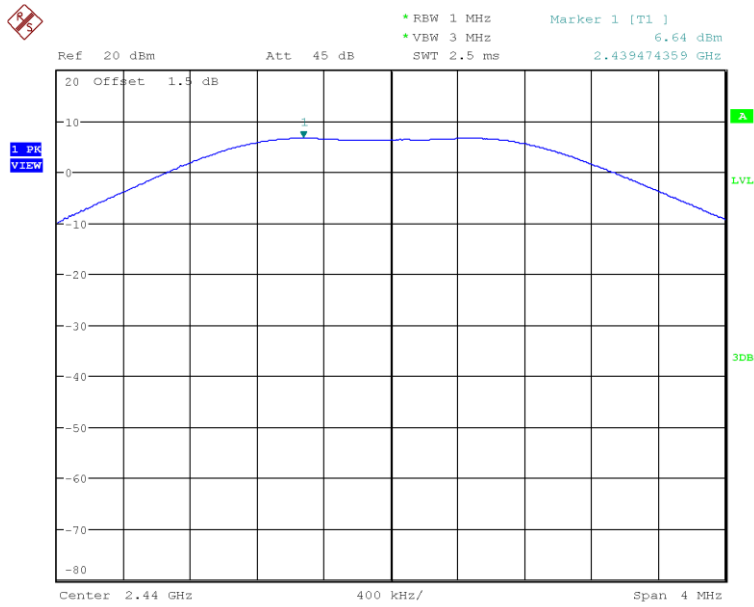


Figure 7: Maximum Conducted Power, 2440MHz, 2Mbps

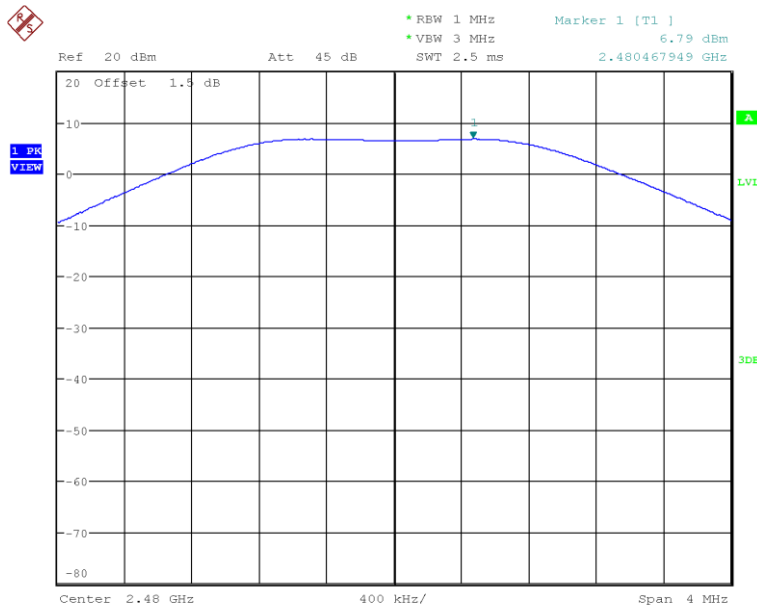


Figure 8: Maximum Conducted Power, 2480MHz, 2Mbps

4.2 DTS Bandwidth (6dB) and Occupied Bandwidth

The occupied bandwidth is measured at an amplitude level reduced from the reference level by a specified ratio. The reference level is the level of the highest amplitude signal observed from the transmitter at the fundamental frequency.


The 99% bandwidth is the bandwidth in which 99% of the transmitted power occupied.

The minimum 6 dB bandwidth shall be at least 500 kHz.

4.2.1 Test Method

The conducted method was used to measure the occupied bandwidth according to ANSI C63.10:2013 Section 11.8. The measurement was performed with modulation per CFR47 15.247 (a) (2) and RSS Gen Sect. 6.6. Measurements were performed on the low, middle and high channels of the operating frequency range; 2400 MHz to 2483.5 MHz.

4.2.2 Test Setup: (Conducted)

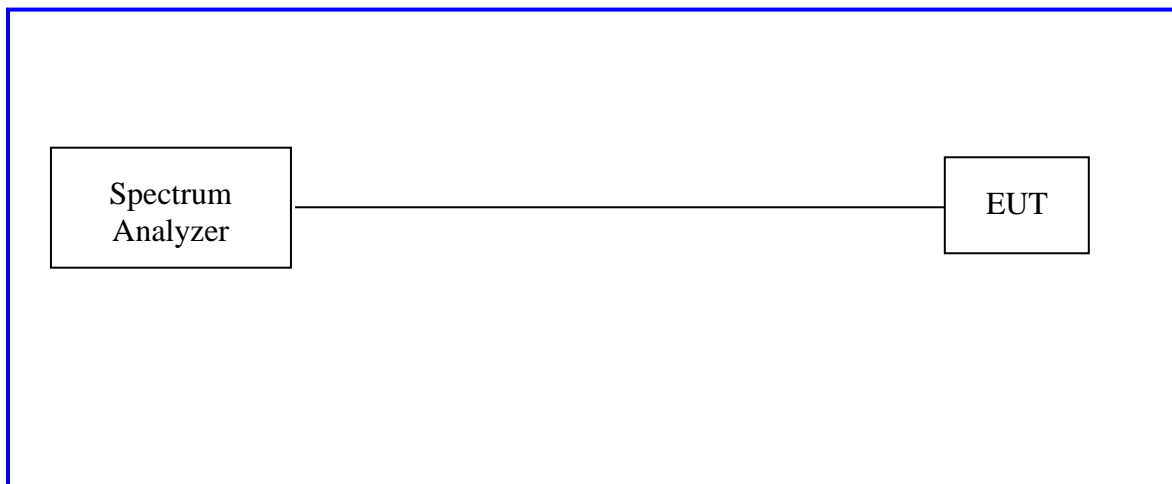

4.2.3 Results

As originally tested, the EUT was found to be compliant to the requirements of the test standard(s).

Table 3: Occupied Bandwidth – Test Results

Test Date: June 24, 2021		Test By: Rachana Khanduri	
Test Method: Conducted Measurements		Power Setting: +8 dBm	
Antenna Type: Integral, Trace		Max. Antenna Gain: 0 dBi	
Ambient Temp.: 21 °C		Relative Humidity: 37%	
Bluetooth LE – Occupied Bandwidth			
Data Rate	Operating Channel (MHz)	99% Bandwidth (MHz)	6dB (DTS) Bandwidth (MHz)
1Mbps	2402	1.063	0.716
	2440	1.063	0.731
	2480	1.082	0.716
2Mbps	2402	2.083	1.314
	2440	2.091	1.274
	2480	2.083	1.410
Note: The narrower bandwidth was measured at 1 Mbps and 100% duty cycle.			

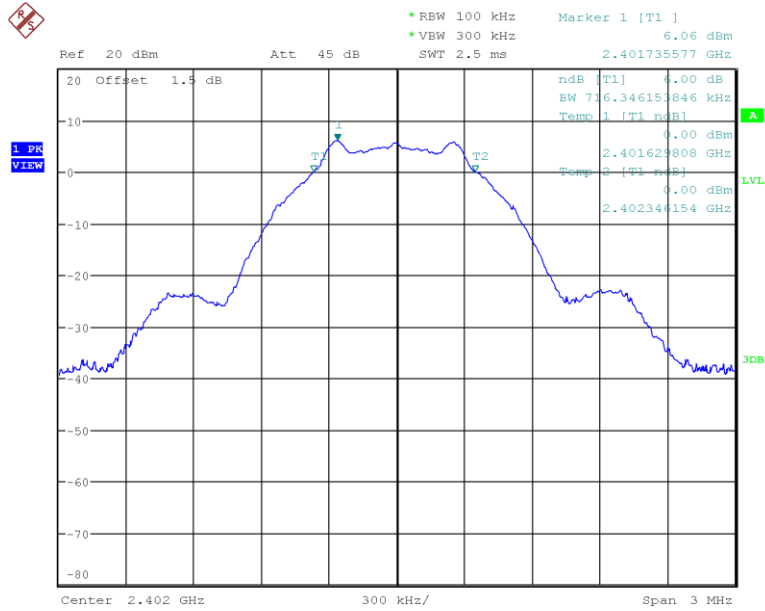


Figure 9: 2402MHz, 1Mbps, 6dB Bandwidth

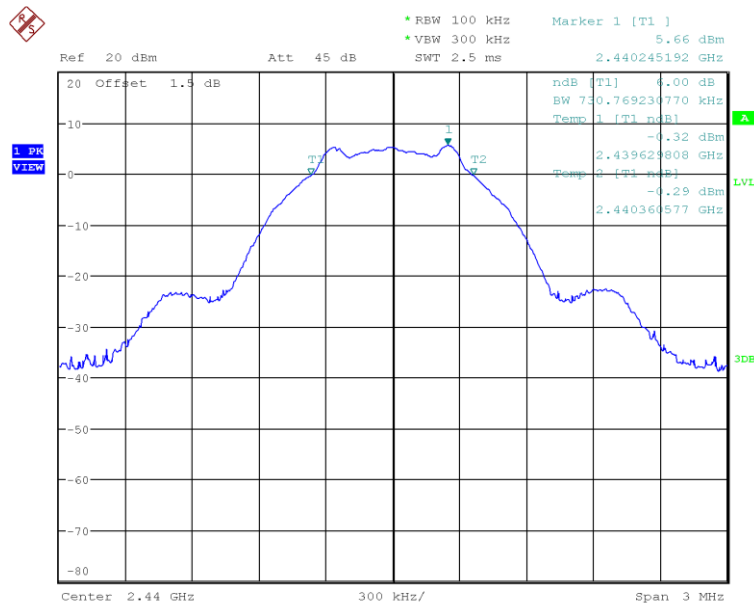


Figure 10: 2440MHz, 1Mbps, 6dB Bandwidth

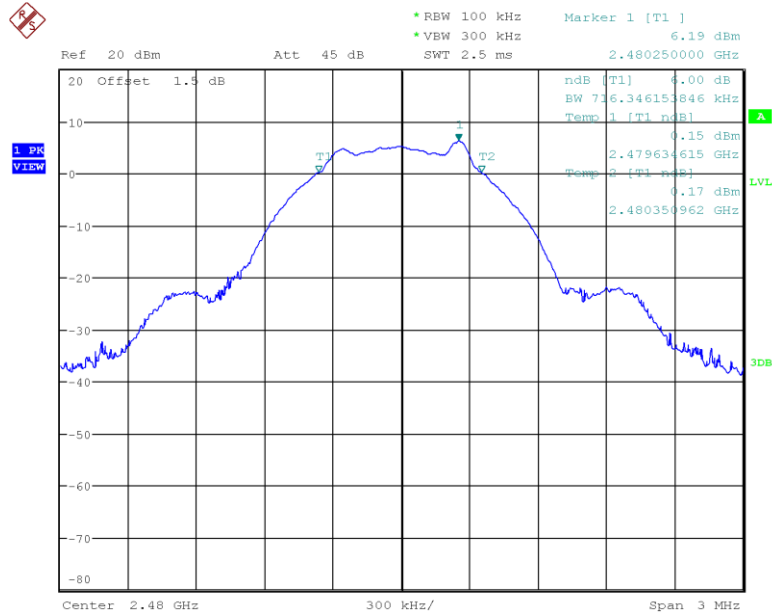


Figure 11: 2480MHz, 1Mbps, 6dB Bandwidth

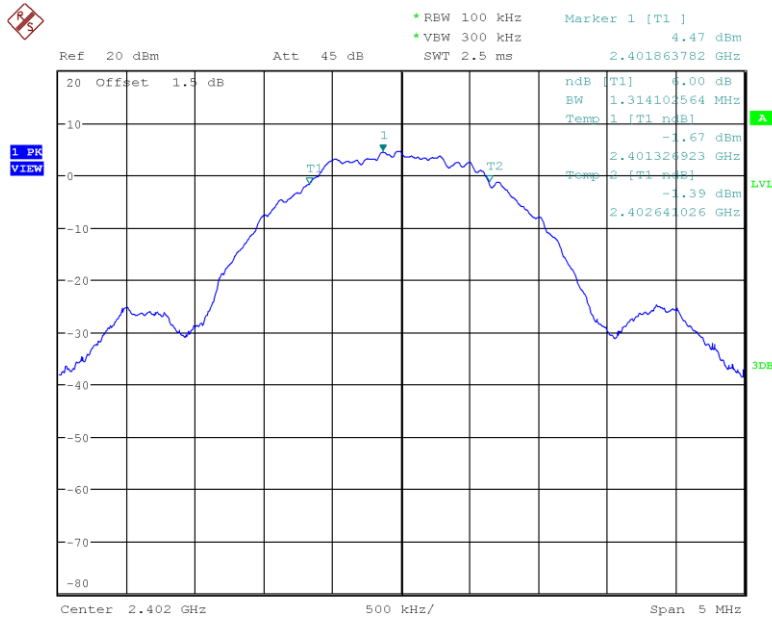


Figure 12: 2402MHz, 2Mbps, 6dB Bandwidth

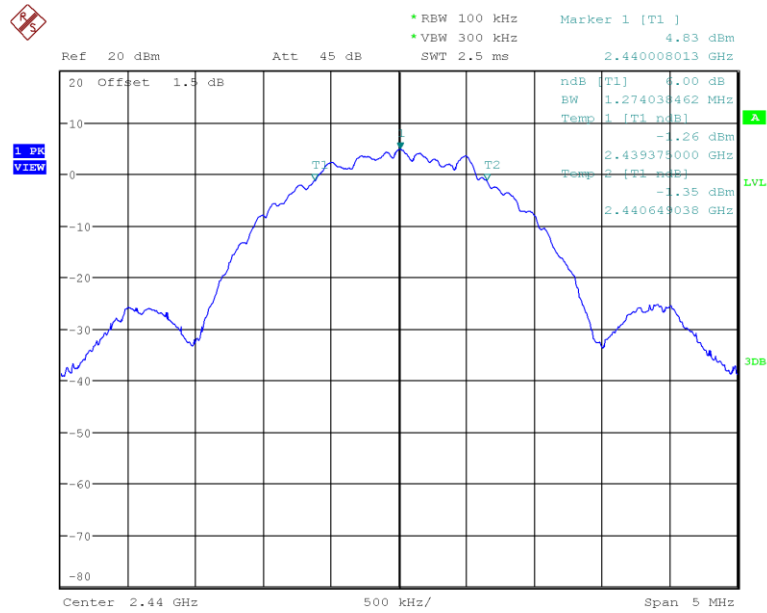


Figure 13: 2440MHz, 2Mbps, 6dB Bandwidth

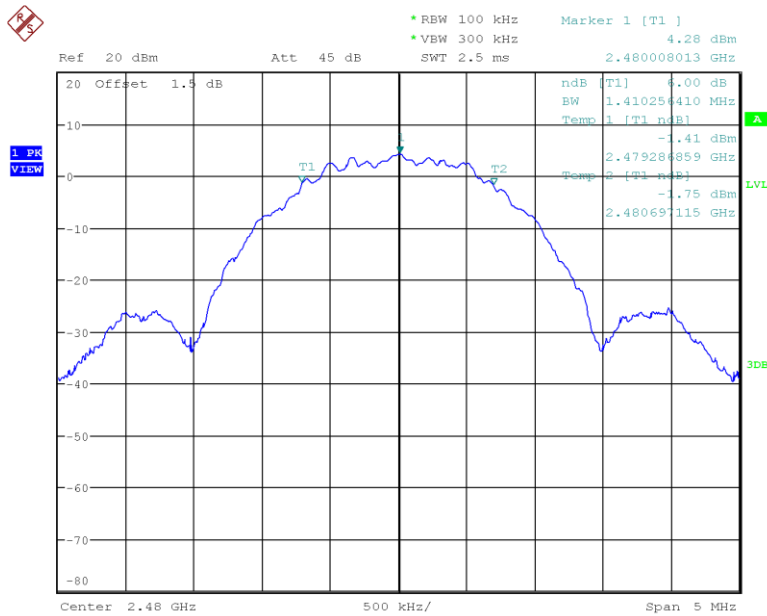


Figure 14: 2480MHz, 2Mbps, 6dB Bandwidth

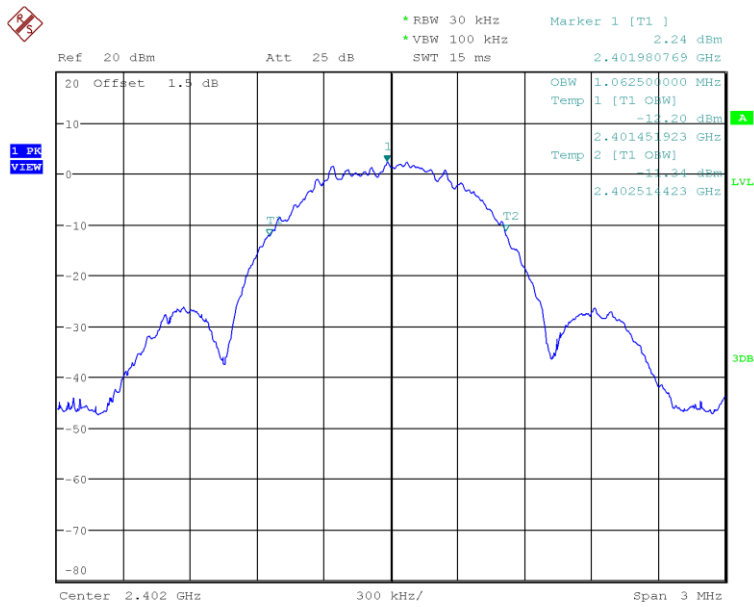


Figure 15: 2402MHz, 1Mbps, 99% Bandwidth

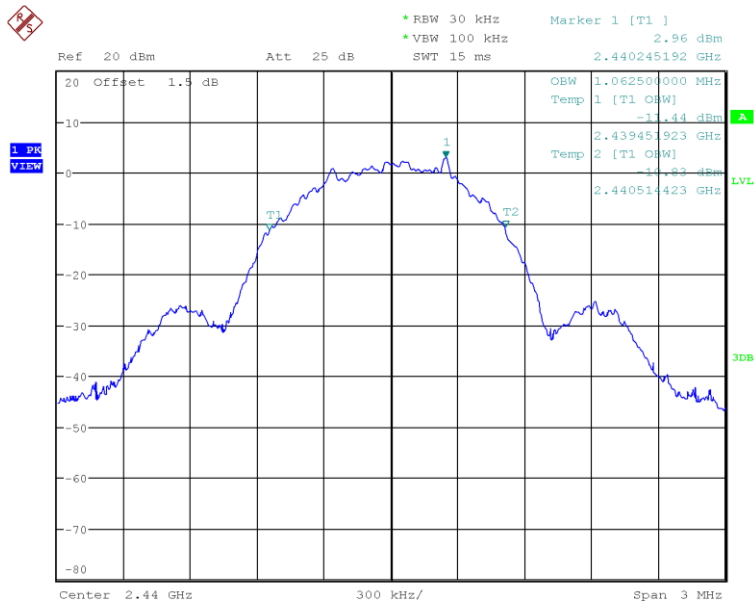


Figure 16: 2440MHz, 1Mbps, 99% Bandwidth

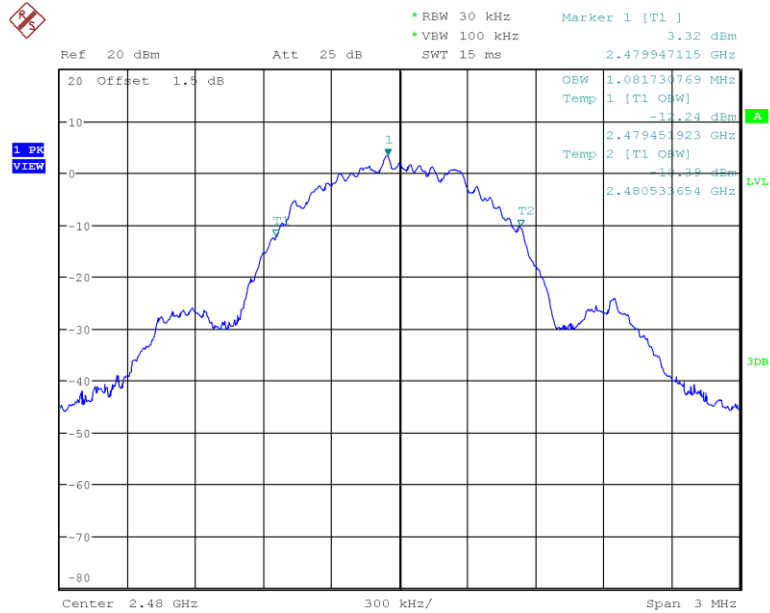


Figure 17: 2480MHz, 1Mbps, 99% Bandwidth

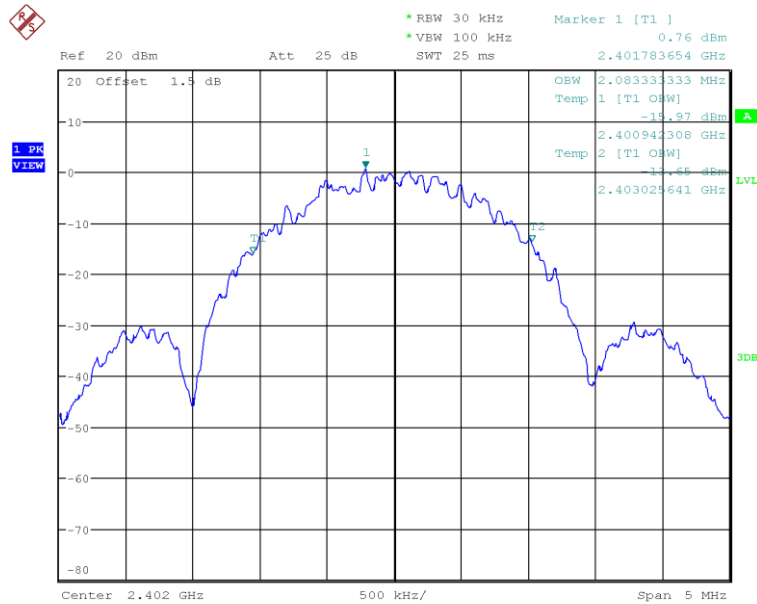


Figure 18: 2402MHz, 2Mbps, 99% Bandwidth

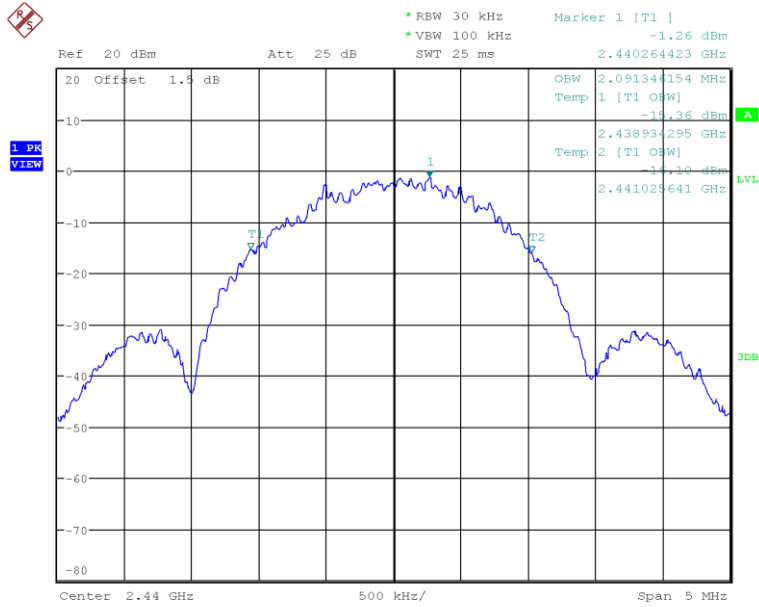


Figure 19: 2440MHz, 2Mbps, 99% Bandwidth

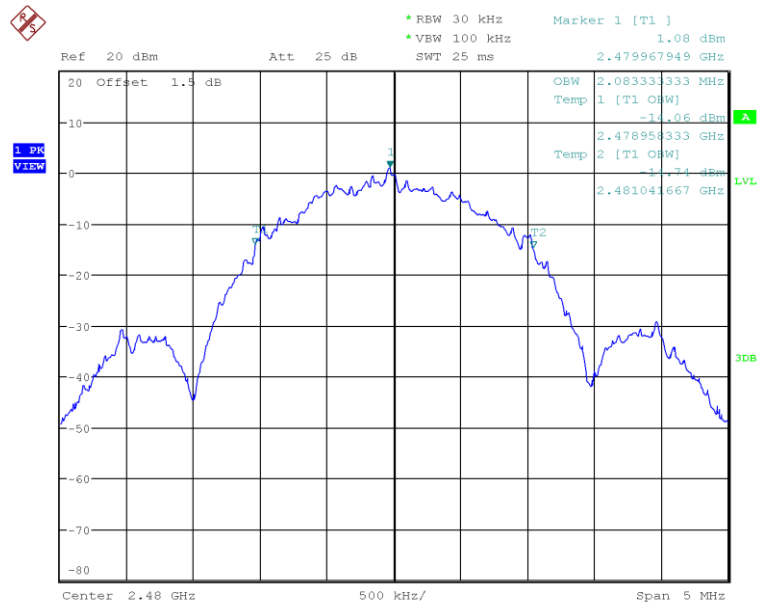


Figure 20: 2480MHz, 2Mbps, 99% Bandwidth


4.3 Peak Power Spectral Density

According to the CFR47 Part 15.247 (e) and RSS 247 Sect.5.2 (b), the power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission.

4.3.1 Test Method

The conducted method was used to measure the channel power output per ANSI C63.10-2013 Section 11.10.2. The measurement was performed with modulation per CFR47 Part 15.247 (e) and RSS 247 Sect.5.2 (b). The worst findings were conducted on 3 channels in each operating frequency range of 2400 MHz to 2483.5 MHz.

4.3.2 Test Setup: (Conducted)

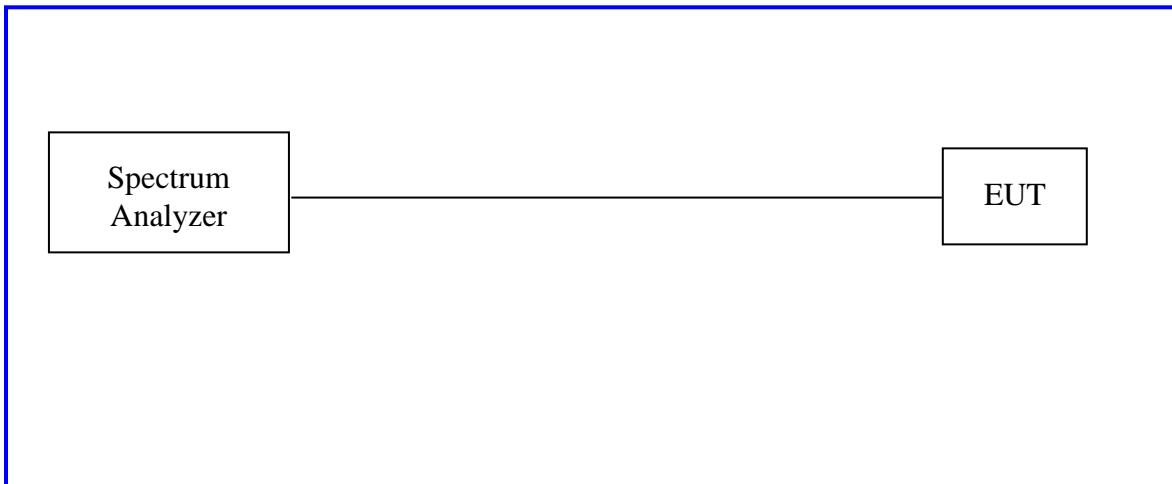

Method PKPSD of "KDB 558074 – DTS Measurement Guidance v04" was used.

4.3.3 Results

As originally tested, the EUT was found to be compliant to the requirements of the test standard(s).

Table 4: Peak Power Spectral Density – Test Results

Test Date: June 25, 2021		Test By: Rachana Khanduri		
Test Method: Conducted Measurements		Power Setting: +8 dBm		
Antenna Type: Integral, Trace		Max. Antenna Gain: 0 dBi		
Ambient Temp.: 21 °C		Relative Humidity: 37%		
Bluetooth LE – Peak Power Spectral Density				
Data Rate	Operating Channel (MHz)	Total PSD [dBm/kHz]	Limit [dBm/3kHz]	Margin [dB]
1Mbps	2402	-6.67	8.0dBm /3kHz	-14.67
	2440	-6.93	8.0dBm /3kHz	-14.93
	2480	-7.01	8.0dBm /3kHz	-15.01
2Mbps	2402	-10.14	8.0dBm /3kHz	-18.14
	2440	-9.48	8.0dBm /3kHz	-17.48
	2480	-10.03	8.0dBm /3kHz	-18.03
Note: The EUT transmitted at 100% duty cycle.				

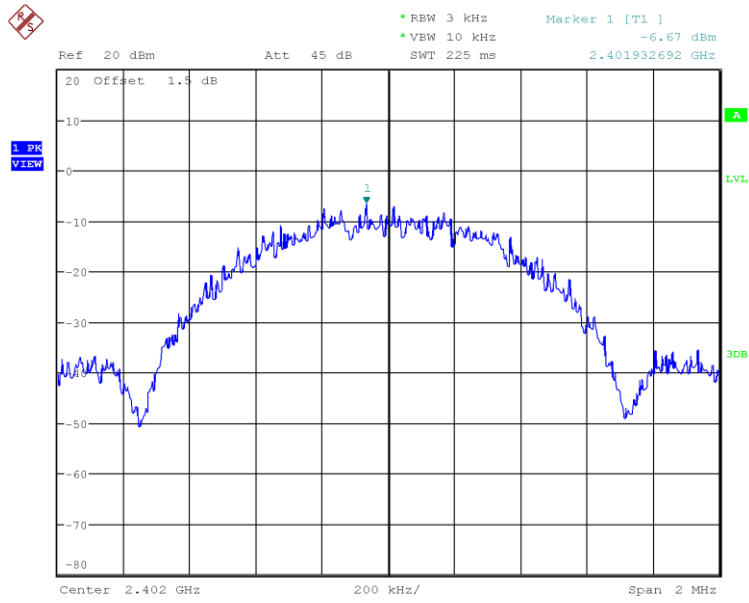


Figure 21: 2402 MHz, 1Mbps, PSD

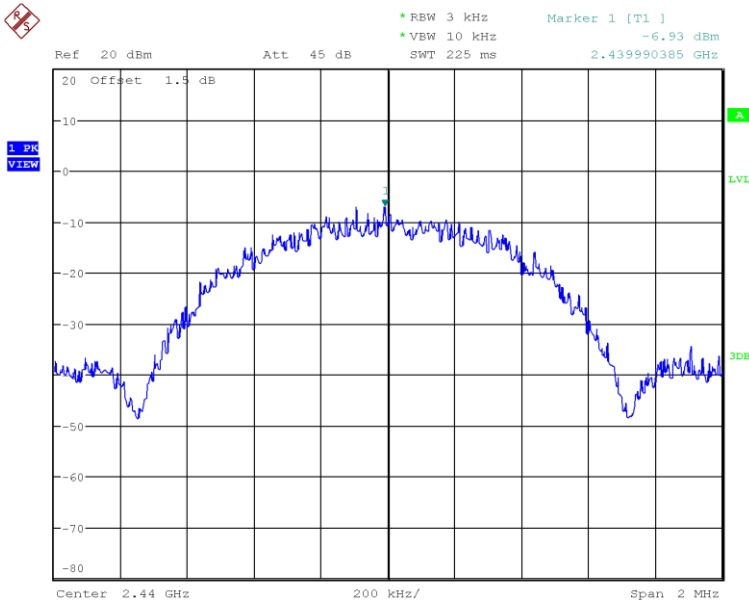


Figure 22: 2440 MHz, 1Mbps, PSD

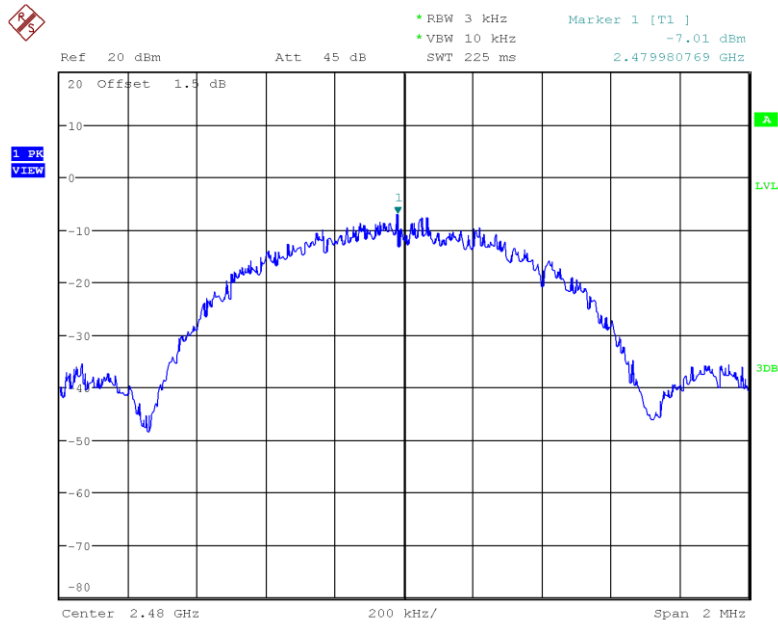


Figure 23: 2480MHz, 1Mbps, PSD

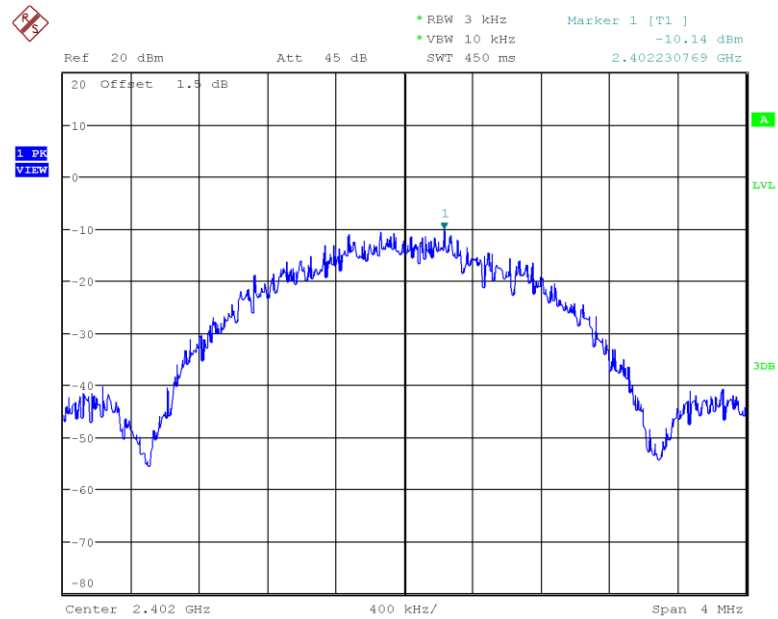


Figure 24: 2402 MHz, 2Mbps, PSD

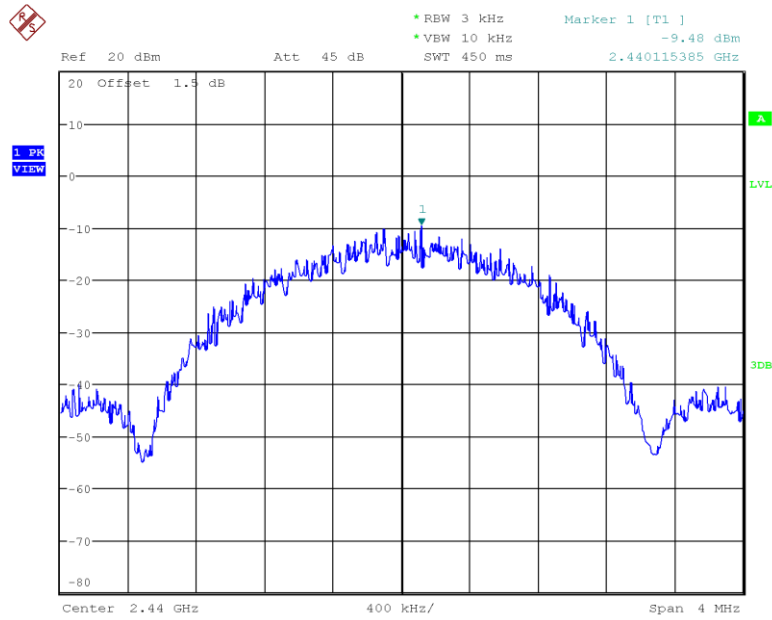


Figure 25: 2440 MHz, 2Mbps, PSD

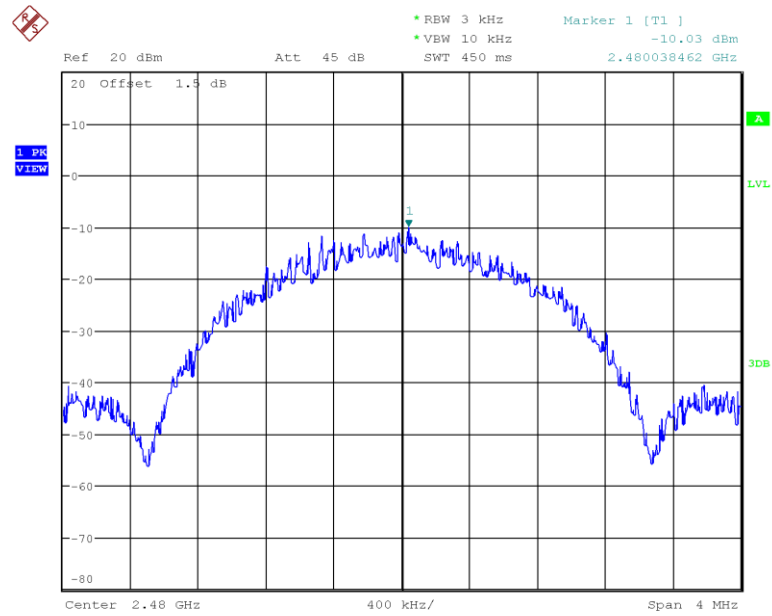


Figure 26: 2480MHz, 2Mbps, PSD


4.4 Out of Band Emissions: Non-Restricted Bands

Transmitter spurious emissions are emissions outside the frequency range of the equipment when the equipment is in transmitting mode; per requirement of CFR47 15.205, 15.209, 15.247(d), RSS-247 Sect. 5.5, RSS-GEN Sect. 8.9 and 8.10.

4.4.1 Test Method

Conducted measurements per ANSI C63.10-2013 Sections 6.10, 11.11, 14.3.3 were used to measure the undesirable emission requirement in non-restricted bands. The measurement was performed with modulation. The measurement was conducted from 30MHz to 26.5GHz on 3 channels in each mode on the EUT. Band edge tests were conducted on the low and high channel of each mode. The worst case measurement of each mode is recorded in this report.

4.4.2 Test Setup: (Conducted)

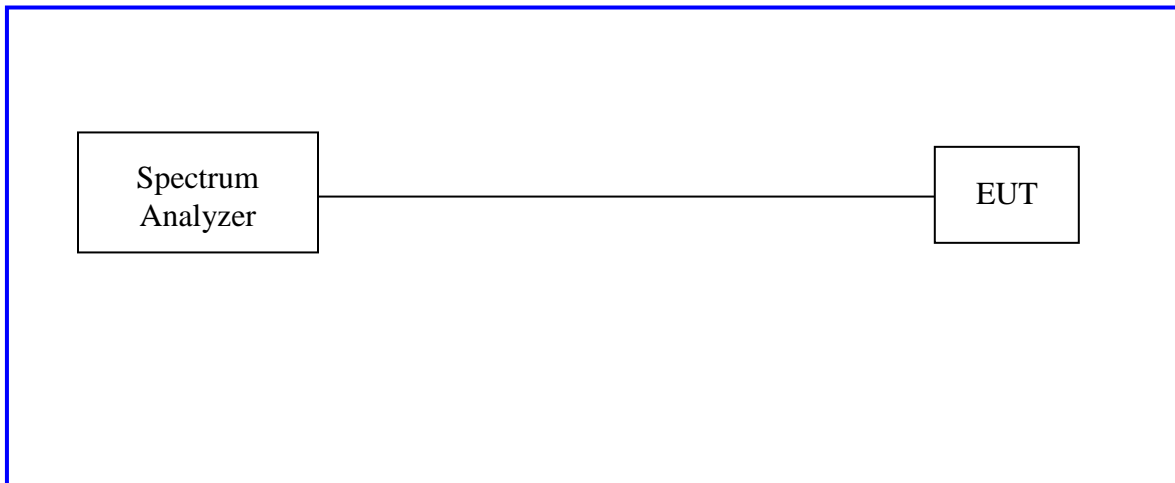

4.4.3 Results

As originally tested, the EUT was found to be compliant to the requirements of the test standard(s).

Table 5: Emissions at the Band-Edge – Test Results

Test Date: June 25, 2021			Test By: Rachana Khanduri			
Test Method: Conducted Measurements			Power Setting: +8 dBm			
Antenna Type: Integral, Trace			Max. Antenna Gain: 0 dBi			
Ambient Temp.: 21 °C			Relative Humidity: 37%			
Bluetooth LE – Emissions at the Band-Edge						
Data Rate	Band Edge	Center Freq (MHz)	Out of Band Level (dBm)	20dBc Level (dBm)	Measured Freq (MHz)	Results
1Mbps	Low	2402	-37.80	-14.60	2400.0	Pass
	High	2480	-40.37	-14.64	2483.5	Pass
2Mbps	Low	2402	-26.32	-14.99	2400.0	Pass
	High	2480	-40.67	-15.15	2483.5	Pass
Note: dBc is defined as the level below the main carrier. The band-edge level must be lower than the 20dBc level.						

4.4.3.1 Band Edge - conducted

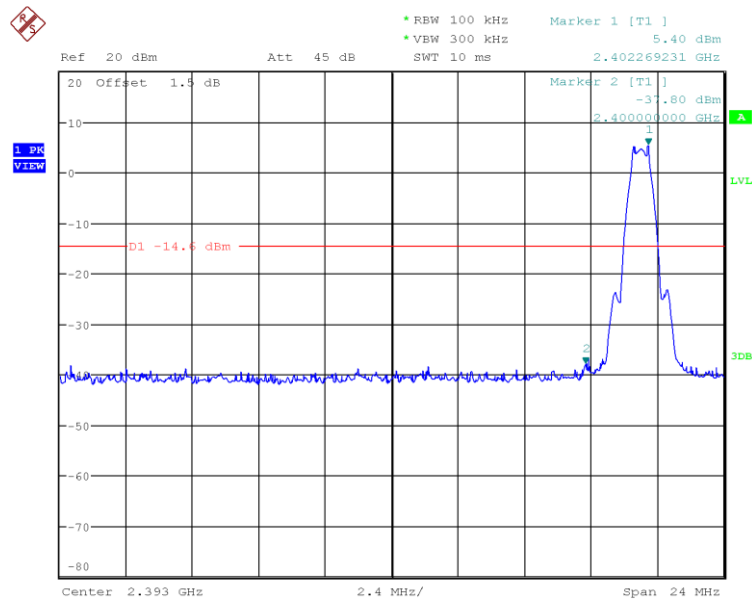


Figure 27: 2402MHz, 1Mbps, Lower Band Edge

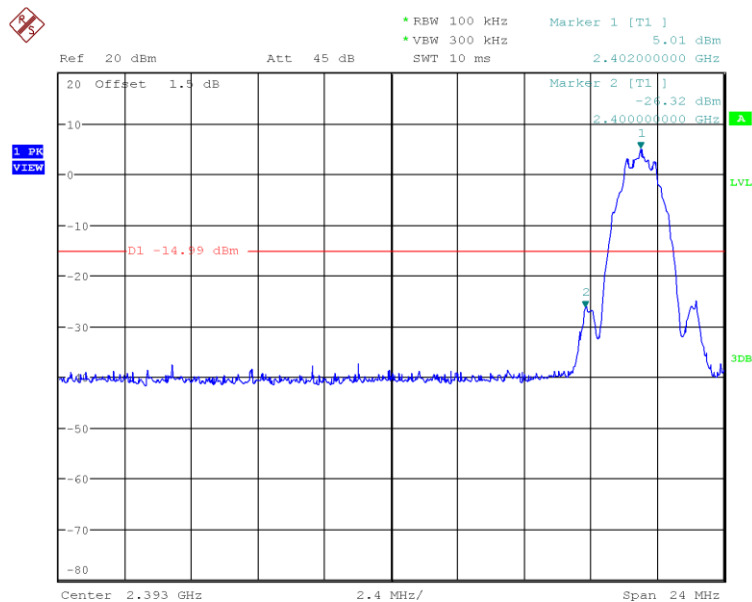


Figure 28: 2402MHz, 2Mbps, Lower Band Edge

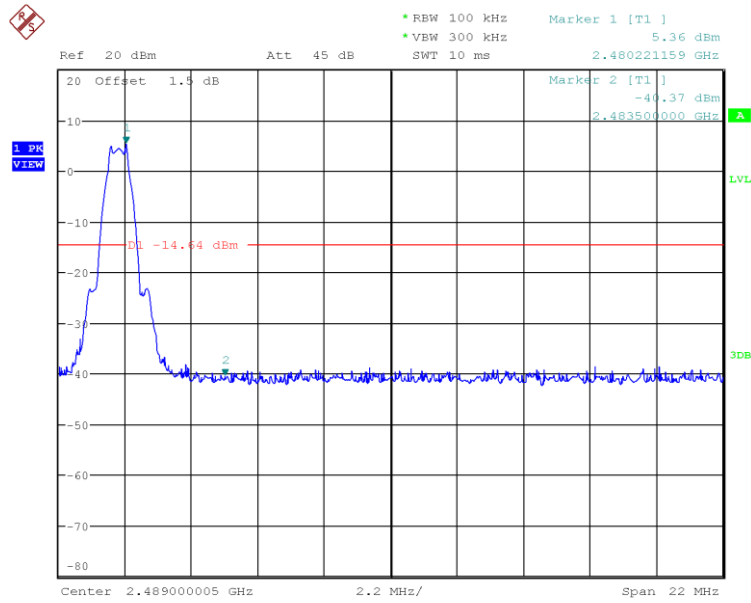


Figure 29: 2480MHz, 1Mbps Upper Band Edge

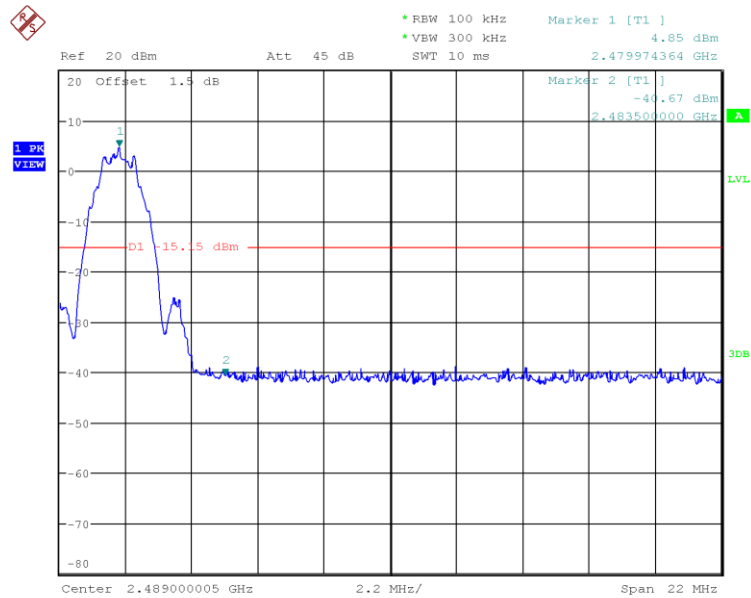


Figure 30: 2480MHz, 2Mbps Upper Band Edge

4.4.3.2 Conducted Spurious

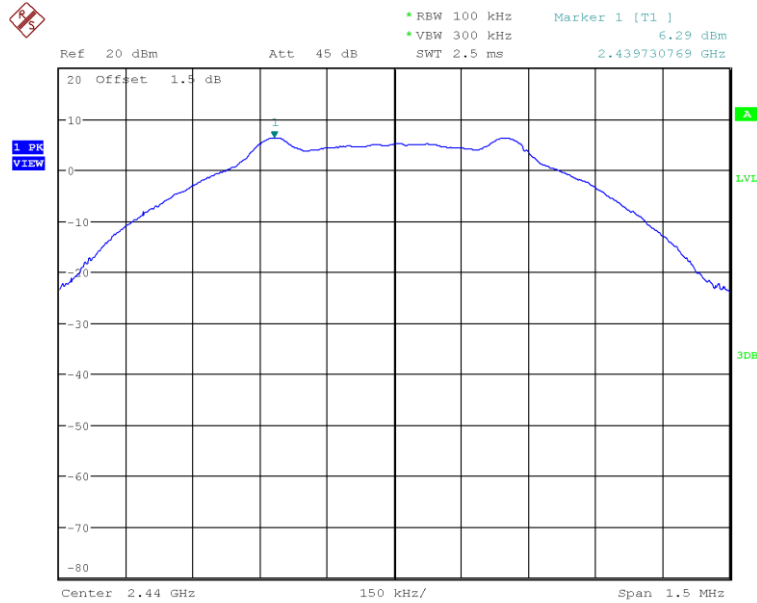


Figure 31: 1Mbps Ref Measurement

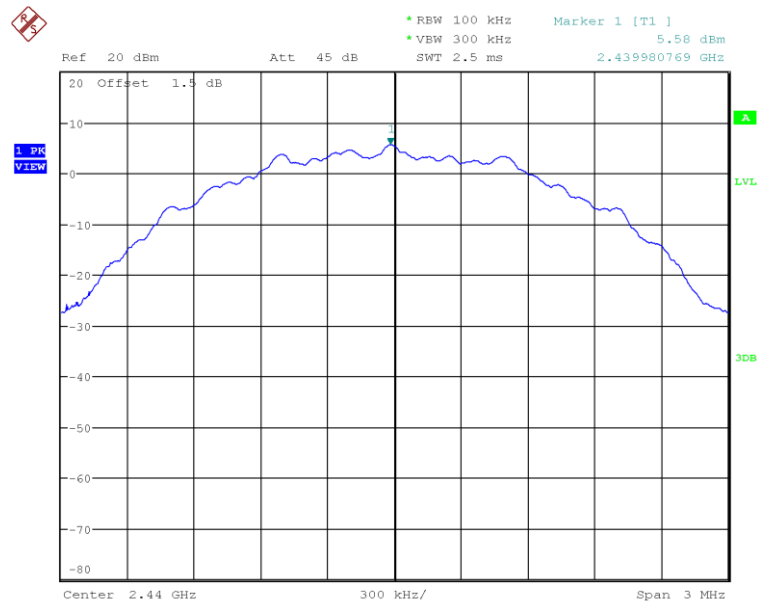


Figure 32: 2Mbps Ref Measurement

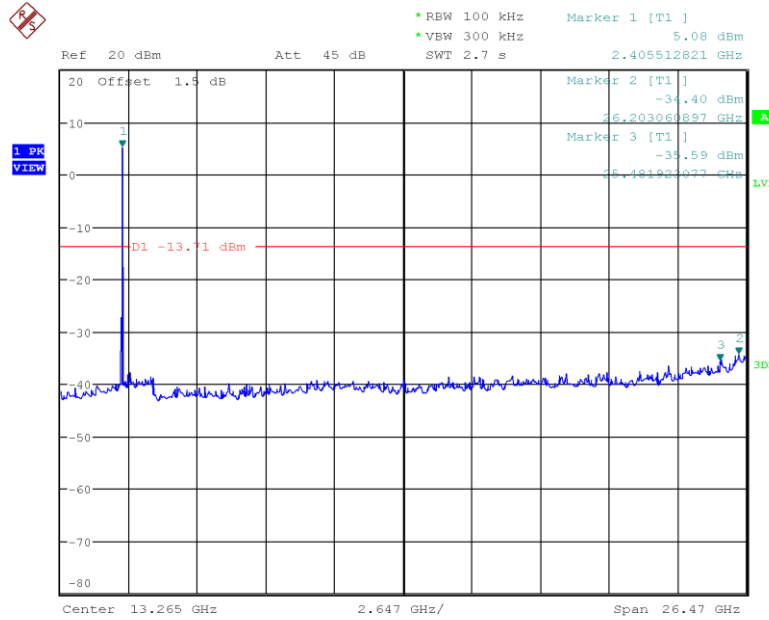


Figure 33: Conducted Emissions, 2402 MHz, 1Mbps

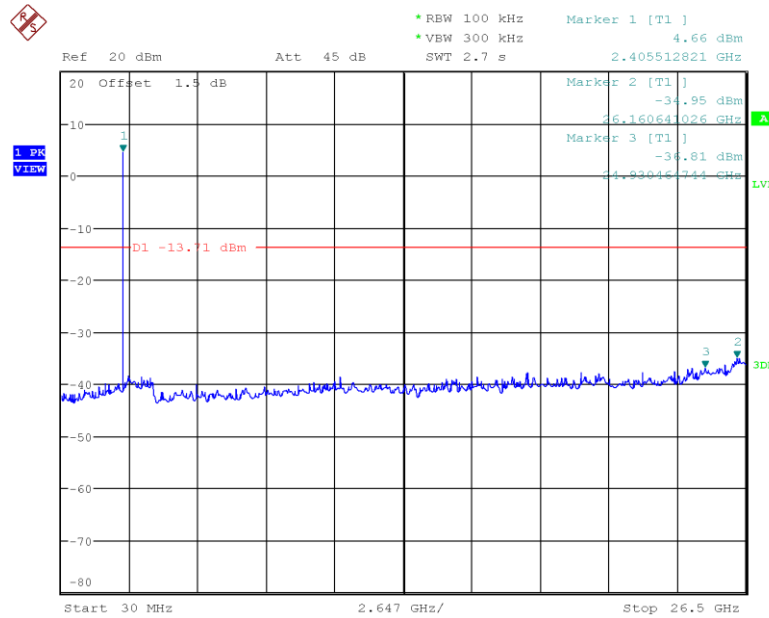


Figure 34: Conducted Emissions, 2440 MHz, 1Mbps

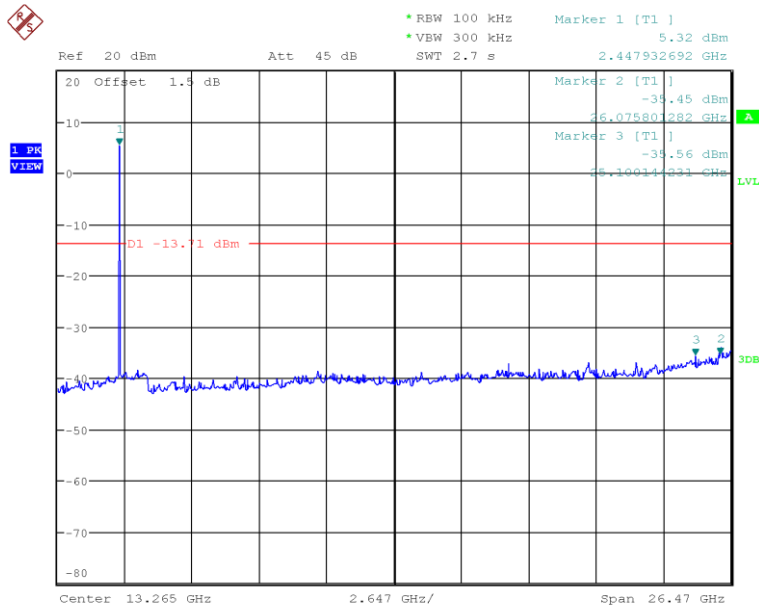


Figure 35: Conducted Emissions, 2480 MHz, 1Mbps

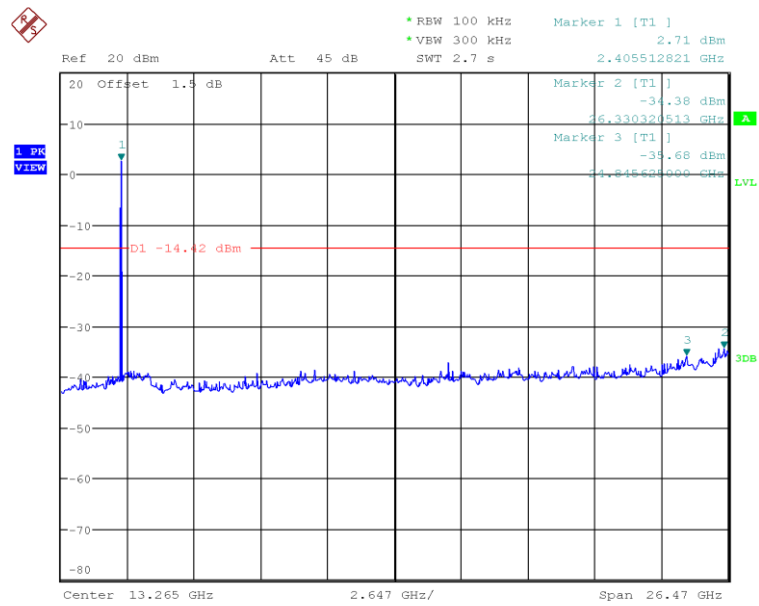


Figure 36: Conducted Emissions, 2402 MHz, 2Mbps

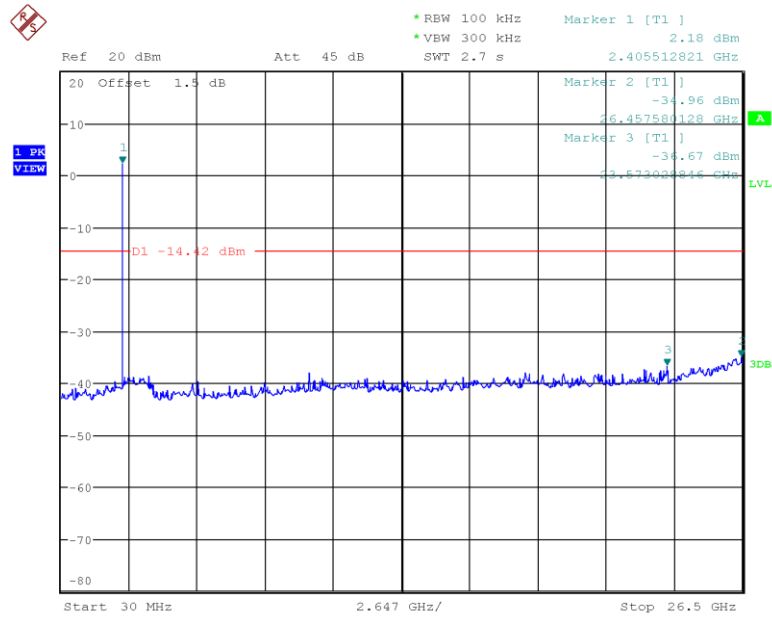


Figure 37: Conducted Emissions, 2440 MHz, 2Mbps

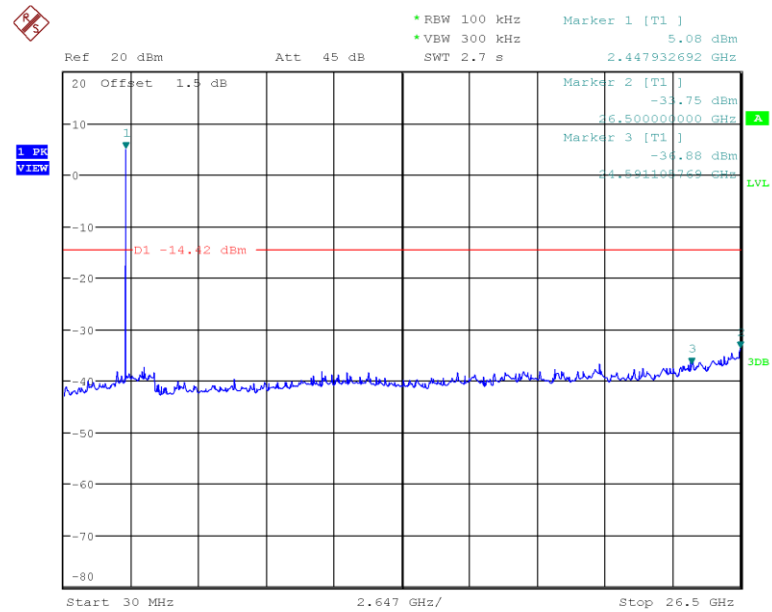


Figure 38: Conducted Emissions, 2480 MHz, 2Mbps


4.5 Out of Band Emissions: Restricted Band Edge

Transmitter spurious emissions are emissions outside the frequency range of the equipment when the equipment is in transmitting mode; per requirement of CFR47 15.205, 15.209, 15.247(d), RSS-247 Sect. 5.5, RSS-GEN Sect. 8.9 and 8.10.

4.5.1 Test Method

Radiated measurements per ANSI C63.10-2013 Section 6.10.5 were used to measure the undesirable emission requirement in restricted bands. Peak points were found and RMS Average was taken for each point found. The measurement was performed with modulation. This test was conducted on 3 channels in each mode on the EUT. The worst case measurement of each channel is recorded in this report. All channels were tested at highest power settings.

Test Setup

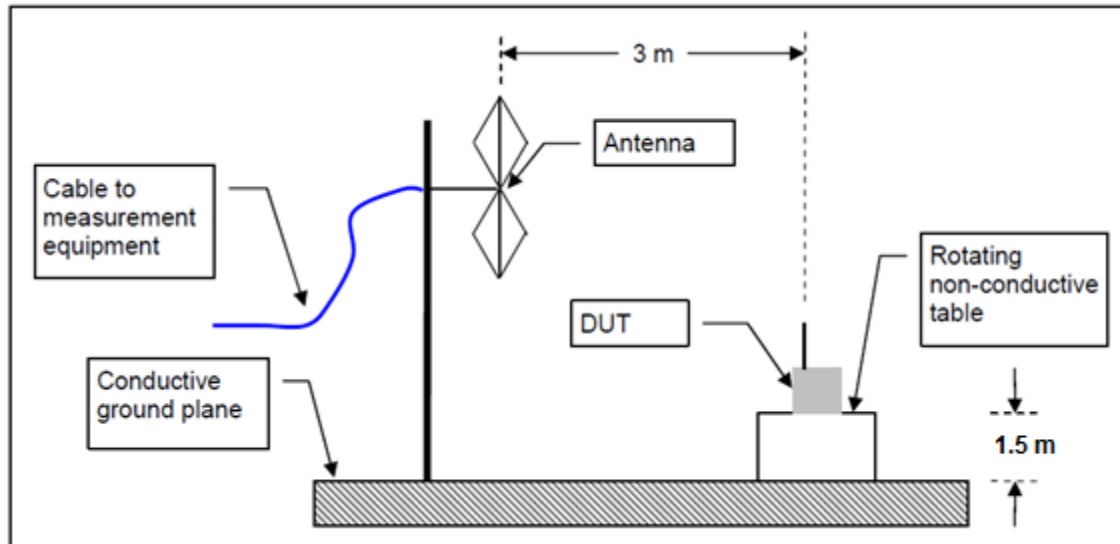


The DUT was stimulated by manufacturer provided test software that is not available to the end user.

4.5.2 Test Results

Test Conditions: Radiated Measurement, Normal Temperature and Voltage
Antenna Type: Integral, Trace
Power Setting: +8dBm
Max. Antenna Gain: 0dBi
Test Performed by: Rachana Khanduri

Final Result

Frequency (MHz)	MaxPeak (dBμV/m)	Average (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Bandwidth (kHz)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
2338.248000	36.92	---	74.00	37.08	1000.000	234.0	V	345.0	-2.3
2338.248000	---	23.95	54.00	30.05	1000.000	234.0	V	345.0	-2.3
2377.414400	36.85	---	74.00	37.15	1000.000	150.0	V	312.0	-2.2
2377.414400	---	24.16	54.00	29.84	1000.000	150.0	V	312.0	-2.2

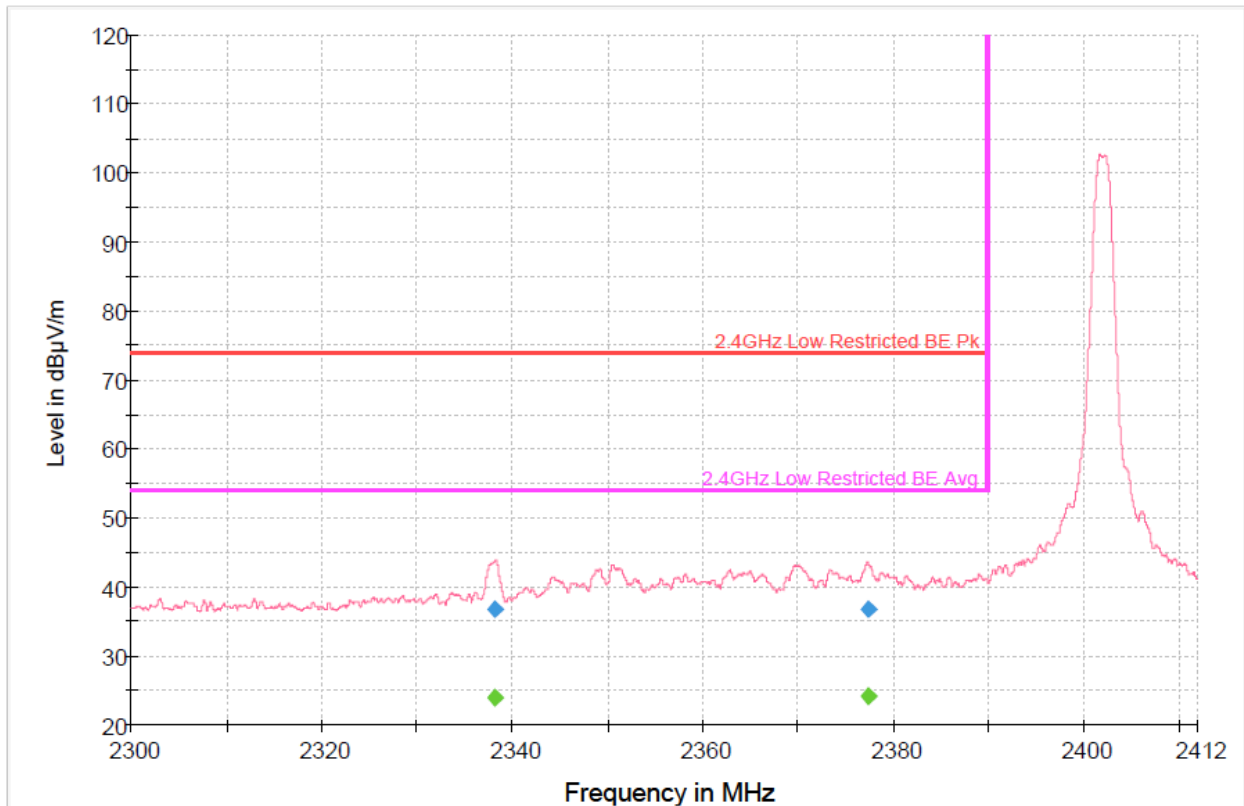


— Preview Result 1V-PK+ — 2.4GHz Low Restricted BE Pk — 2.4GHz Low Restricted BE Avg
◆ Final_Result PK+ ◆ Final_Result AVG

Figure 39: Restricted Band Edge, Low, 2402MHz, 1 Mbps

Final Result

Frequency (MHz)	MaxPeak (dBµV/m)	Average (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Bandwidth (kHz)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
2388.390400	---	24.18	54.00	29.82	1000.000	100.0	V	229.0	-2.2
2388.390400	38.05	---	74.00	35.95	1000.000	100.0	V	229.0	-2.2
2389.969600	---	24.17	54.00	29.83	1000.000	118.0	V	239.0	-2.2
2389.969600	37.54	---	74.00	36.46	1000.000	118.0	V	239.0	-2.2

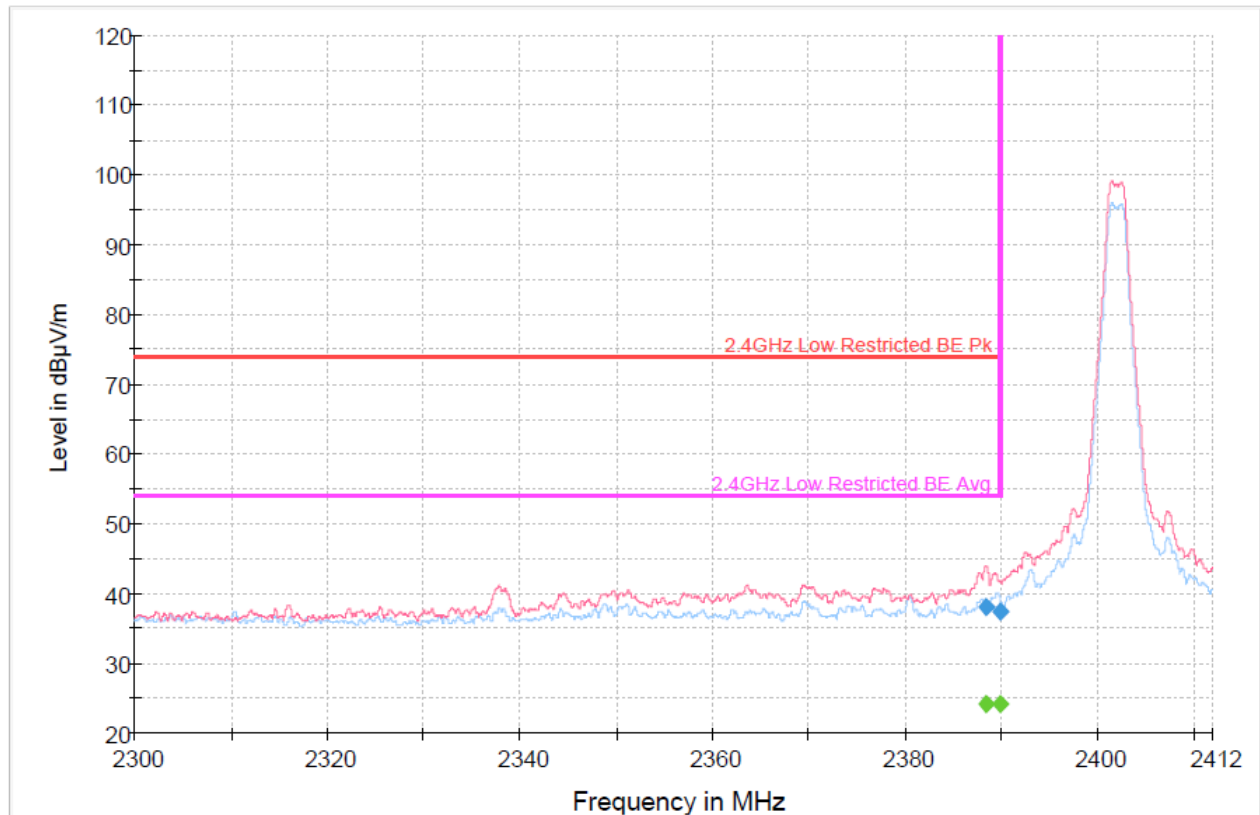


— Preview Result 1H-PK+
 — Preview Result 1V-PK+
 — 2.4GHz Low Restricted BE Pk
— 2.4GHz Low Restricted BE Avg
 ◆ Final_Result PK+
 ◆ Final_Result AVG

Figure 40: Restricted Band Edge, Low, 2402MHz, 2 Mbps

Final Result

Frequency (MHz)	MaxPeak (dBµV/m)	Average (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Bandwidth (kHz)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
2483.541800	53.47	---	74.00	20.53	1000.000	105.0	V	258.0	-1.6
2483.541800	---	40.05	54.00	13.95	1000.000	105.0	V	258.0	-1.6
2483.859200	52.23	---	74.00	21.77	1000.000	119.0	V	217.0	-1.6
2483.859200	---	38.99	54.00	15.01	1000.000	119.0	V	217.0	-1.6
2515.599200	---	31.16	54.00	22.84	1000.000	100.0	V	289.0	-1.2
2515.599200	43.29	---	74.00	30.71	1000.000	100.0	V	289.0	-1.2

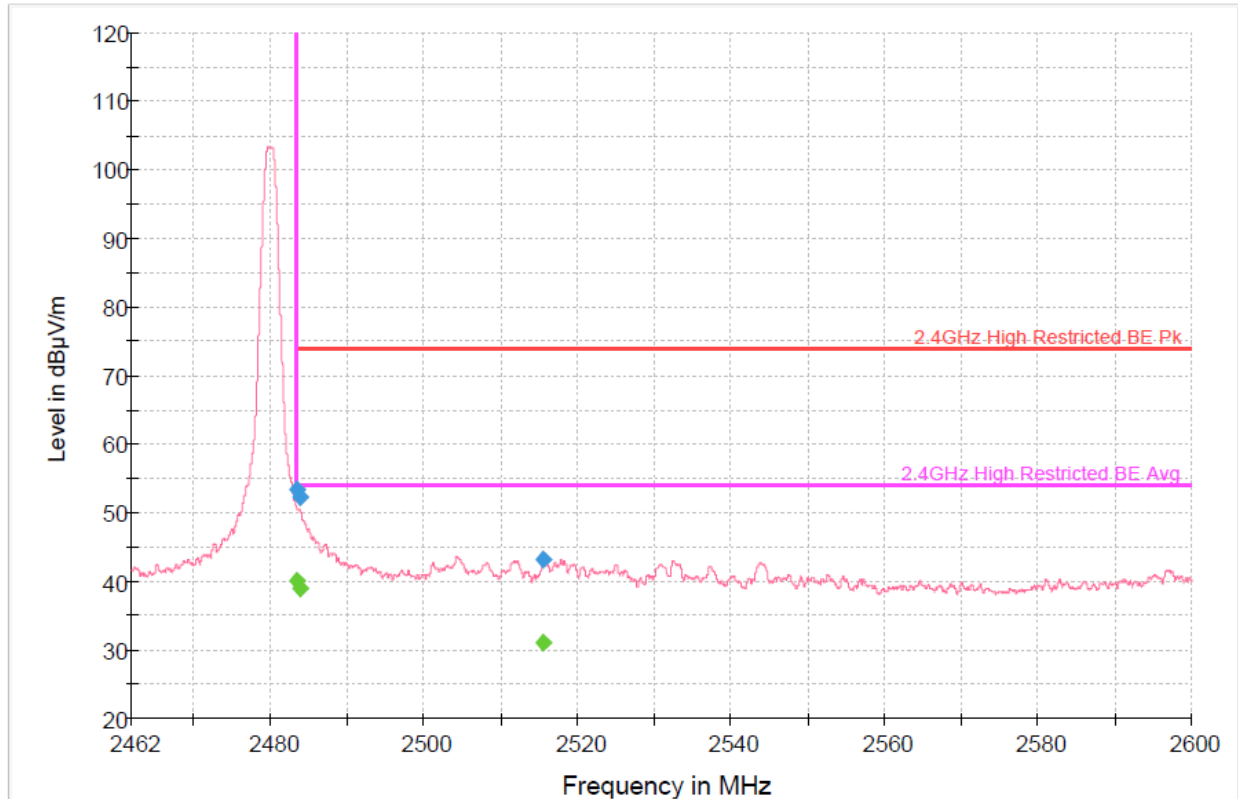


— Preview Result 1V-PK+ — 2.4GHz High Restricted BE Pk — 2.4GHz High Restricted BE Av
◆ Final_Result PK+ ◆ Final_Result AVG

Figure 41: Restricted Band Edge, High, 2480MHz, 1 Mbps

Final Result

Frequency (MHz)	MaxPeak (dBµV/m)	Average (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Bandwidth (kHz)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
2483.528000	---	24.03	54.00	29.97	1000.000	144.0	V	222.0	-1.6
2483.528000	36.53	---	74.00	37.47	1000.000	144.0	V	222.0	-1.6
2483.900600	---	24.03	54.00	29.97	1000.000	150.0	V	212.0	-1.6
2483.900600	36.81	---	74.00	37.19	1000.000	150.0	V	212.0	-1.6

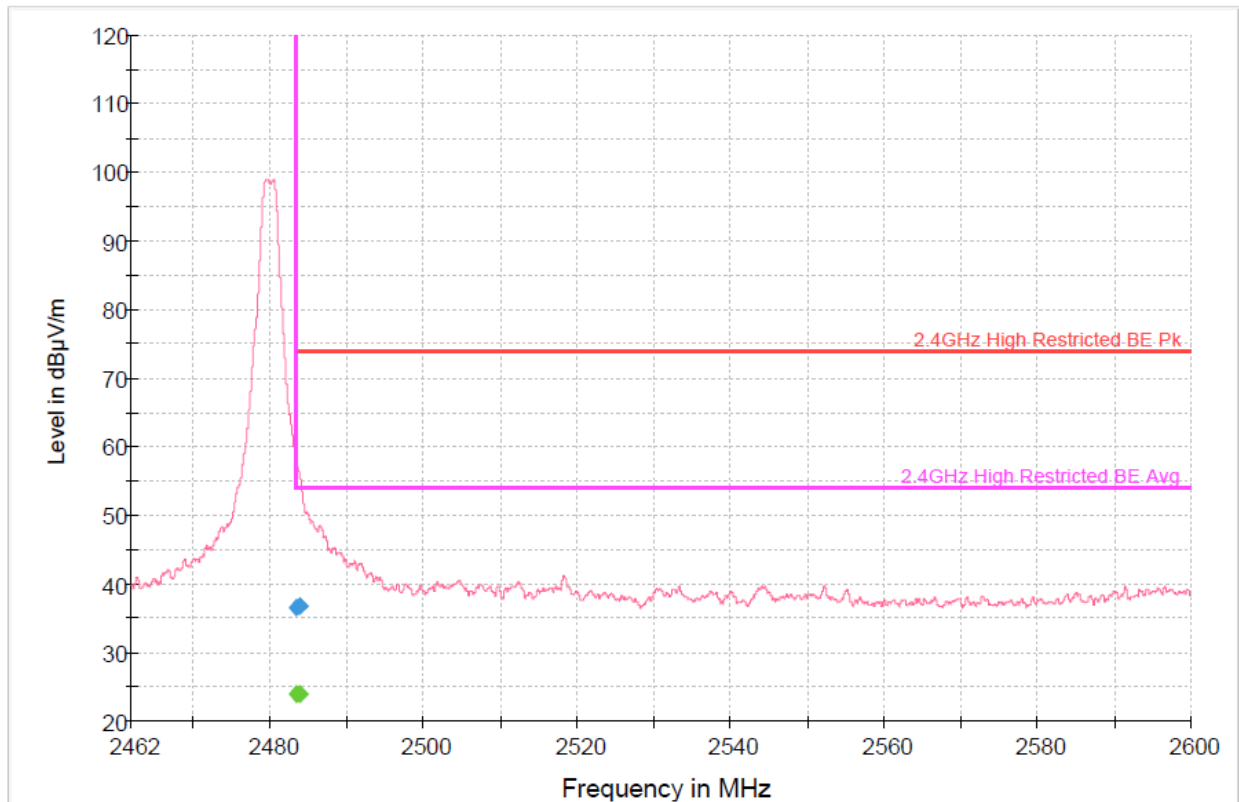

— Preview Result 1V-PK+ — 2.4GHz High Restricted BE Pk — 2.4GHz High Restricted BE Avg
◆ Final_Result PK+ ◆ Final_Result AVG

Figure 42: Restricted Band Edge, High, 2480MHz, 2 Mbps

4.6 Transmitter Spurious Emissions

Transmitter spurious emissions are emissions outside the frequency range of the equipment when the equipment is in transmit mode; per requirement of CFR47 15.205, 15.209, 15.247(d), RSS 247 Sect.5.5, RSS-GEN Sect. 8.9 and 8.10.

4.6.1 Test Methodology

4.6.1.1 Preliminary Test

A test program that controls instrumentation and data logging was used to automate the preliminary RF emission test procedure. The frequency range of interest was divided into sub-ranges to yield a frequency resolution of approximately 120 kHz and provide a reading at each frequency for no more than 12° of turntable rotation. For each frequency sub-range the turntable was rotated 360° while peak emission data was recorded and Figure 2: ted over the frequency range of interest in horizontal and vertical antenna polarization's.

Preliminary emission profile testing was performed inside the anechoic chamber. The EUT was placed on a 1.0m x 1.5m non-conductive table 80cm (<1 GHz) and 150cm (>1 GHz) above the floor. The EUT was positioned as shown in the setup photographs. The receiving antenna was placed at a distance of 3m at a fixed height of 1m. Measurement equipment was located outside of the chamber. A video camera was placed inside the chamber to view the EUT.

Pre-scans were performed to determine the worst data rate / chains.

4.6.1.2 Final Test

For each frequency measured, the peak emission was maximized by manipulating the receiving antenna from 1 to 4 meters above the ground plane and placing it at the position that produced the maximum signal strength reading. The turntable was then rotated through 360° while observing the peak signal and placing the EUT at the position that produced maximum radiation. The six highest emissions relative to the limit were measured unless such emissions were more than 20 dB below the limit. If less than six emissions are within 20 dB of the limit, than the noise level of the receiver is measured at frequencies where emissions are expected. Multiples of all oscillator and microprocessor frequencies were also checked.

Final testing was performed on an NSA compliant test site. The EUT was placed on a 1.0m x 1.5m non-conductive table 80cm (<1 GHz) and 150cm (>1 GHz) above the ground plane. The placement of EUT and cables were the same as for preliminary testing and is shown in the setup photographs.


4.6.1.3 Deviations

None.


4.6.2 Test Setup:

All tests were conducted at full power on low, middle, and high channels. The DUT was stimulated by manufacturer provided test software that is not available to the end user.

30MHz-1GHz

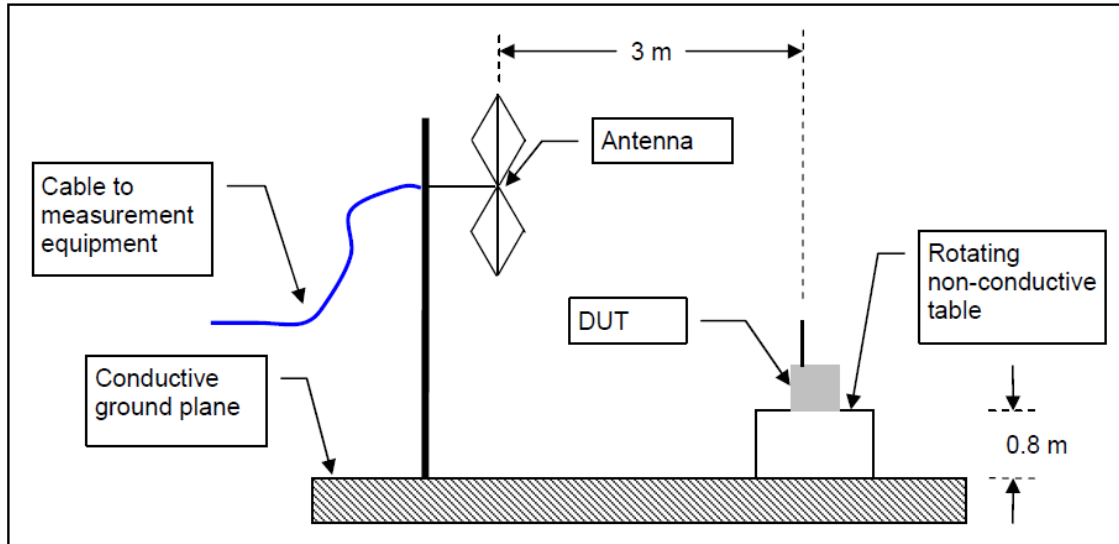

1-26GHz

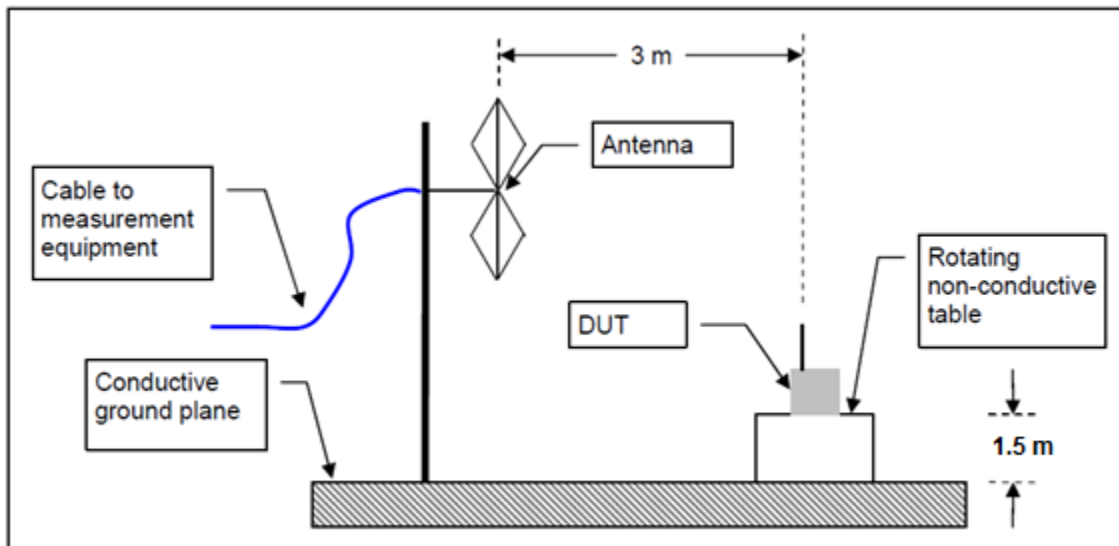

4.6.3 Transmitter Spurious Emission Limit

The spurious emissions of the transmitter shall not exceed the values in CFR47 Part 15.205, 15.209: 2015 and RSS Gen Sect. 8.9 and 8.10: 2014.

Frequency (MHz)	Field strength (microvolts/meter)	Measurement distance (meters)
0.009-0.490.....	2400/F (kHz)	300
0.490-1.705.....	24000/F (kHz)	30
1.705-30.0.....	30	30
30-88.....	100 **	3
88-216.....	150 **	3
216-960.....	200 **	3
Above 960.....	500	3

4.6.4 Test Results

The final measurement data was taken under the worst case operating modes, configurations, and/or cable positions. It also reflects the results including any modifications and/or special accessories listed in Sections 1.4 and test plan.

Frequencies below 30MHz and above 18GHz were investigated and no emissions were found above the noise floor. Both horizontal and vertical polarities were investigated. The results show only the worst case.

As originally tested, the EUT was found to be compliant to the requirements of the test standard(s).

Note: The 2.4 GHz notch filter was used to protect the front end of the pre-amp.

4.6.4.1 Measurement Results:

Final Result

Frequency (MHz)	QuasiPeak (dBµV/m)	MaxPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
39.599680	13.79	---	40.00	26.21	10000.0	120.000	153.0	V	243.0	-11.7
39.599680	---	21.52	---	---	10000.0	120.000	153.0	V	243.0	-11.7
55.993000	12.66	---	40.00	27.34	10000.0	120.000	100.0	V	116.0	-11.1
55.993000	---	20.38	---	---	10000.0	120.000	100.0	V	116.0	-11.1
199.982960	---	21.60	---	---	10000.0	120.000	100.0	V	101.0	-13.0
199.982960	17.33	---	43.52	26.19	10000.0	120.000	100.0	V	101.0	-13.0
479.792000	---	22.76	---	---	10000.0	120.000	105.0	H	42.0	-7.2
479.792000	14.71	---	46.02	31.31	10000.0	120.000	105.0	H	42.0	-7.2
599.199000	15.80	---	46.02	30.22	10000.0	120.000	154.0	V	243.0	-4.9
599.199000	---	24.20	---	---	10000.0	120.000	154.0	V	243.0	-4.9
937.631920	20.48	---	46.02	25.54	10000.0	120.000	100.0	V	40.0	-0.3
937.631920	---	28.40	---	---	10000.0	120.000	100.0	V	40.0	-0.3


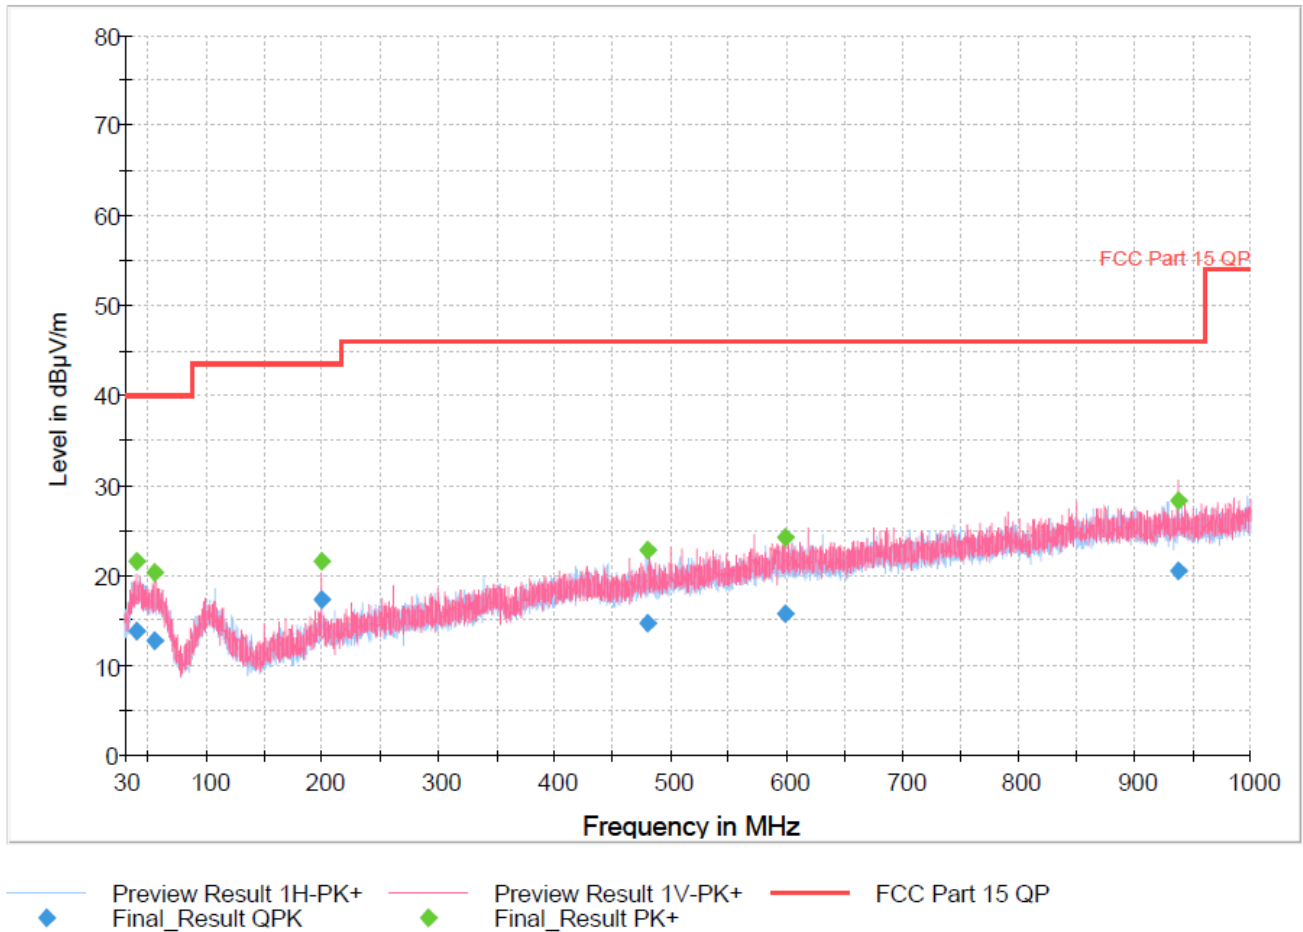


Figure 43: Radiated Spurious Emissions 30MHz – 1GHz, 2440MHz, 1Mbps

Final Result

Frequency (MHz)	QuasiPeak (dBµV/m)	MaxPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
53.374000	12.21	---	40.00	27.79	10000.0	120.000	155.0	V	229.0	-10.8
53.374000	---	19.84	---	---	10000.0	120.000	155.0	V	229.0	-10.8
103.191140	10.68	---	43.52	32.84	10000.0	120.000	100.0	H	145.0	-12.8
103.191140	---	18.47	---	---	10000.0	120.000	100.0	H	145.0	-12.8
200.007080	16.99	---	43.52	26.53	10000.0	120.000	100.0	V	339.0	-13.0
200.007080	---	21.29	---	---	10000.0	120.000	100.0	V	339.0	-13.0
428.943140	---	21.54	---	---	10000.0	120.000	150.0	V	68.0	-8.1
428.943140	13.23	---	46.02	32.79	10000.0	120.000	150.0	V	68.0	-8.1
640.886600	---	24.12	---	---	10000.0	120.000	150.0	V	2.0	-4.7
640.886600	15.76	---	46.02	30.26	10000.0	120.000	150.0	V	2.0	-4.7
857.412920	18.90	---	46.02	27.12	10000.0	120.000	155.0	V	76.0	-1.1
857.412920	---	27.14	---	---	10000.0	120.000	155.0	V	76.0	-1.1

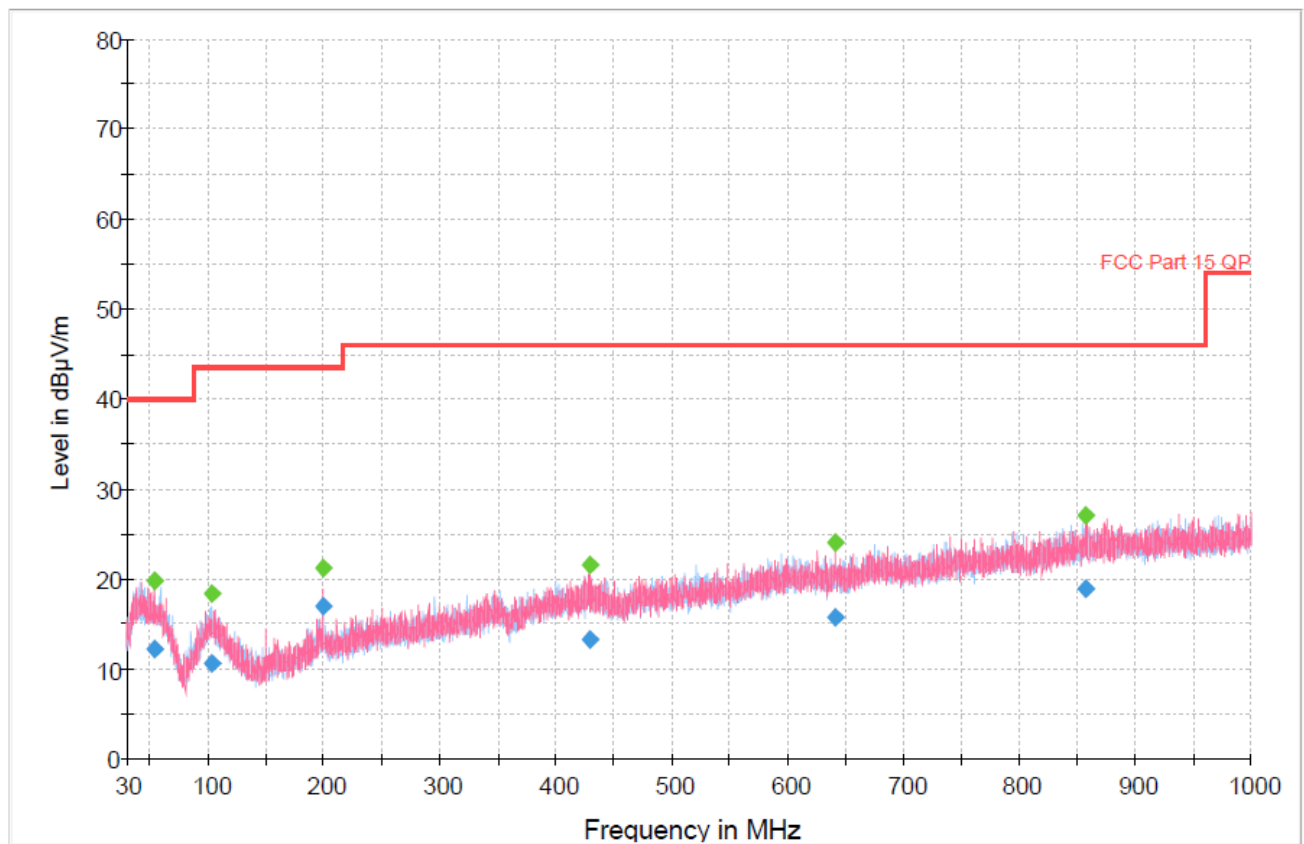


◆ Preview Result 1H-PK+ Final_Result QPK
 ◆ Preview Result 1V-PK+ Final_Result PK+
 — FCC Part 15 QP

Figure 44: Radiated Spurious Emissions 30MHz – 1GHz, 2440MHz, 2Mbps

Final Result

Frequency (MHz)	MaxPeak (dBµV/m)	Average (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Bandwidth (kHz)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
4803.499029	---	45.93	54.00	8.07	1000.000	100.0	H	170.0	5.7
4803.499029	53.42	---	74.00	20.58	1000.000	100.0	H	170.0	5.7
7206.000000	53.62	---	74.00	20.38	1000.000	104.0	V	192.0	8.4
7206.000000	---	45.88	54.00	8.12	1000.000	104.0	V	192.0	8.4
12010.860971	60.68	---	74.00	13.32	1000.000	194.0	H	133.0	12.9
12010.860971	---	52.53	54.00	1.47	1000.000	194.0	H	133.0	12.9
14346.716971	---	38.90	54.00	15.10	1000.000	118.0	V	174.0	16.3
14346.716971	53.73	---	74.00	20.27	1000.000	118.0	V	174.0	16.3
17489.000000	55.33	---	74.00	18.67	1000.000	150.0	V	328.0	20.1
17489.000000	---	42.52	54.00	11.48	1000.000	150.0	V	328.0	20.1
17839.880971	---	42.62	54.00	11.38	1000.000	150.0	H	107.0	20.7
17839.880971	55.50	---	74.00	18.50	1000.000	150.0	H	107.0	20.7

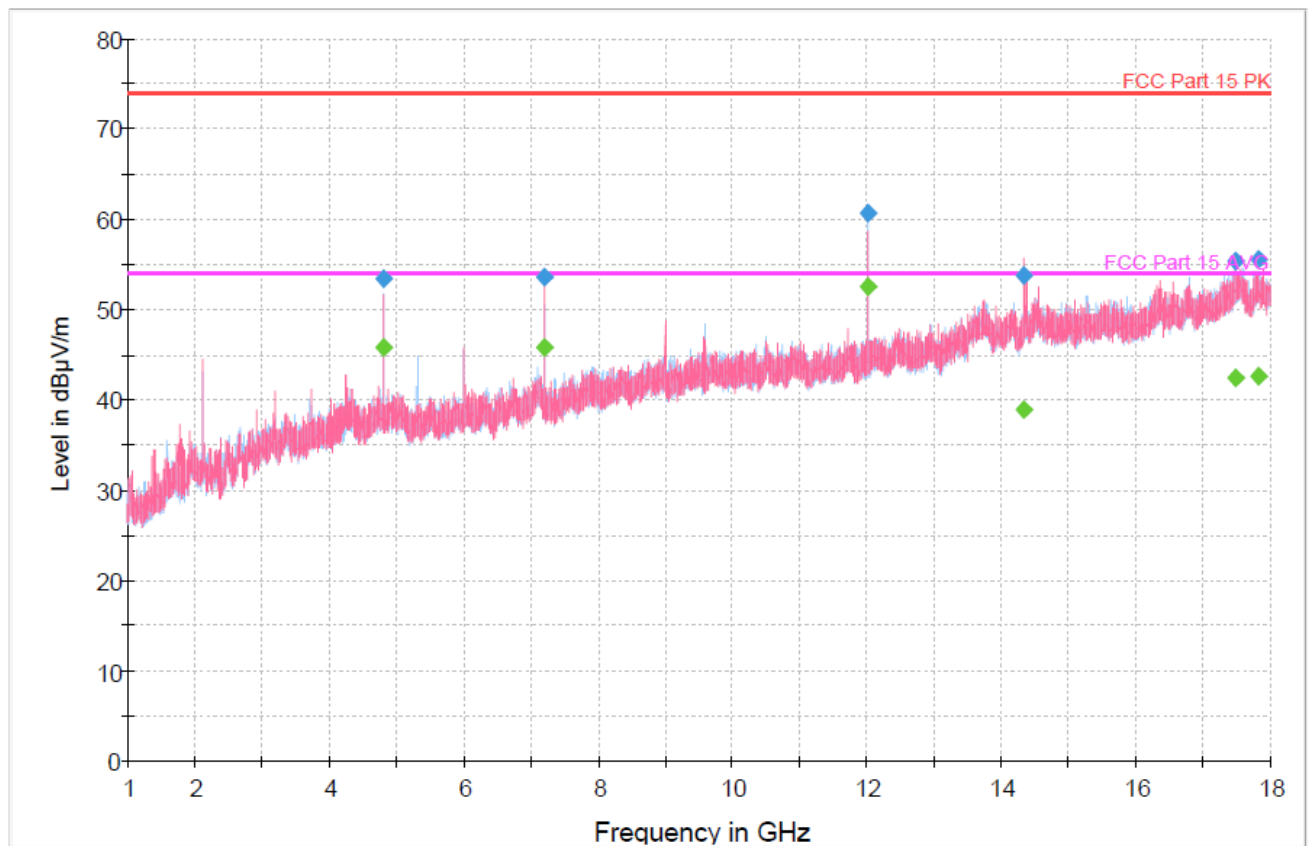


— Preview Result 1H-PK+
 — Preview Result 1V-PK+
 — FCC Part 15 PK
— FCC Part 15 AVG
 ◆ Final_Result PK+
 ◆ Final_Result AVG

Figure 45: Radiated Spurious Emissions 1GHz - 18GHz, 2402MHz, 1Mbps

Final Result

Frequency (MHz)	MaxPeak (dB μ V/m)	Average (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Bandwidth (kHz)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
4879.500000	---	37.24	54.00	16.76	1000.000	131.0	H	171.0	5.8
4879.500000	47.38	---	74.00	26.62	1000.000	131.0	H	171.0	5.8
7319.274971	54.18	---	74.00	19.82	1000.000	104.0	V	148.0	8.0
7319.274971	---	46.12	54.00	7.88	1000.000	104.0	V	148.0	8.0
9556.499029	---	33.00	54.00	21.00	1000.000	150.0	V	234.0	11.1
9556.499029	45.94	---	74.00	28.06	1000.000	150.0	V	234.0	11.1
9760.500000	54.75	---	74.00	19.25	1000.000	100.0	H	168.0	11.7
9760.500000	---	45.77	54.00	8.23	1000.000	100.0	H	168.0	11.7
12199.499029	57.37	---	74.00	16.63	1000.000	100.0	H	130.0	13.2
12199.499029	---	47.01	54.00	6.99	1000.000	100.0	H	130.0	13.2
14391.000000	58.20	---	74.00	15.80	1000.000	144.0	H	87.0	16.8
14391.000000	---	38.97	54.00	15.03	1000.000	144.0	H	87.0	16.8

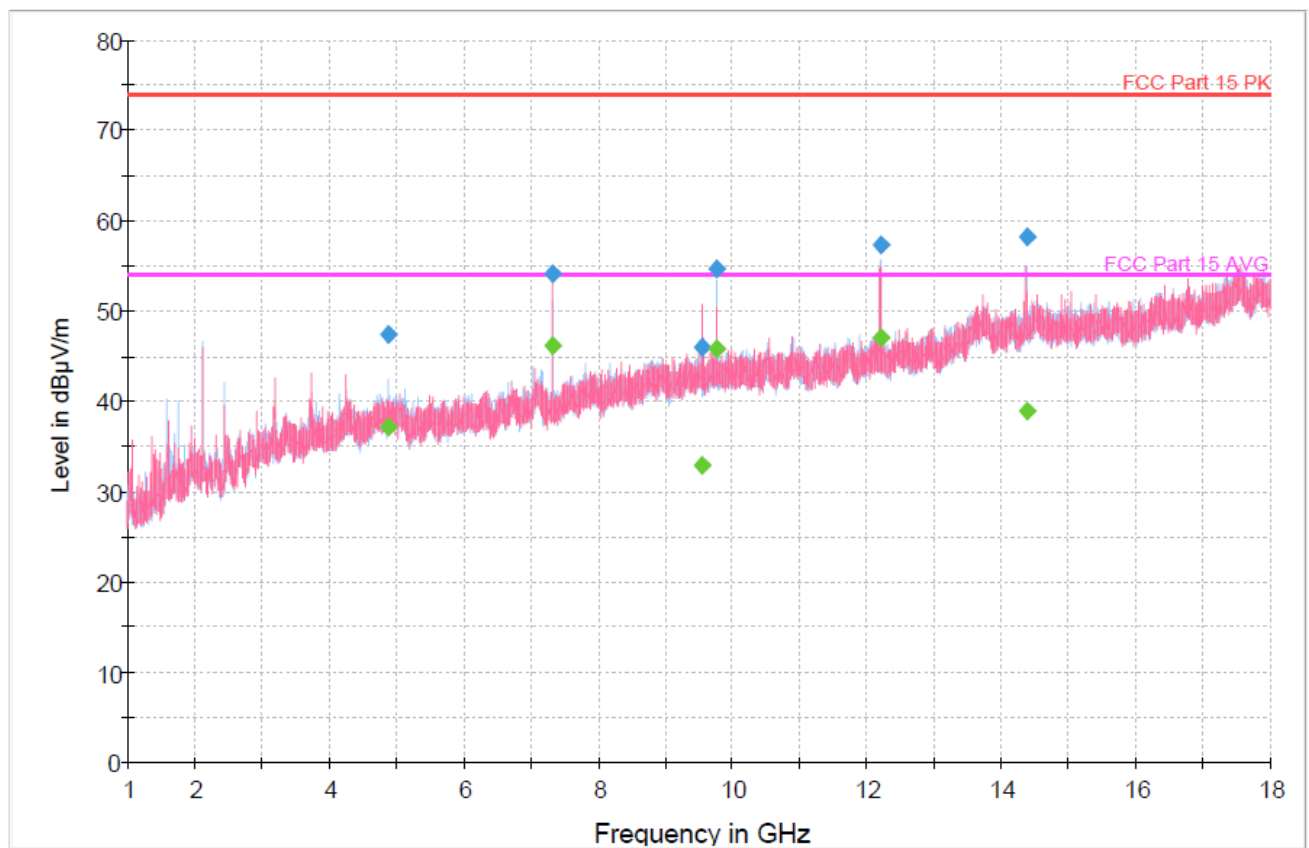


— Preview Result 1H-PK+
 — Preview Result 1V-PK+
 — FCC Part 15 PK
— FCC Part 15 AVG
◆ Final_Result PK+
◆ Final_Result AVG

Figure 46: Radiated Spurious Emissions 1GHz - 18GHz, 2440MHz, 1Mbps

Final Result

Frequency (MHz)	MaxPeak (dBµV/m)	Average (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Bandwidth (kHz)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
1592.617971	52.36	---	74.00	21.64	1000.000	250.0	V	185.0	-4.1
1592.617971	---	23.67	54.00	30.33	1000.000	250.0	V	185.0	-4.1
7439.270000	54.82	---	74.00	19.18	1000.000	103.0	V	144.0	8.5
7439.270000	---	47.29	54.00	6.71	1000.000	103.0	V	144.0	8.5
9919.500000	57.20	---	74.00	16.80	1000.000	100.0	H	162.0	11.6
9919.500000	---	49.16	54.00	4.84	1000.000	100.0	H	162.0	11.6
12399.000000	---	44.55	54.00	9.45	1000.000	100.0	V	5.0	13.2
12399.000000	53.80	---	74.00	20.20	1000.000	100.0	V	5.0	13.2
14379.892000	---	39.81	54.00	14.19	1000.000	169.0	V	90.0	16.7
14379.892000	56.51	---	74.00	17.49	1000.000	169.0	V	90.0	16.7
17508.539971	---	42.73	54.00	11.27	1000.000	196.0	V	330.0	20.2
17508.539971	55.02	---	74.00	18.98	1000.000	196.0	V	330.0	20.2
17804.000971	55.60	---	74.00	18.40	1000.000	250.0	V	13.0	20.5
17804.000971	---	42.60	54.00	11.40	1000.000	250.0	V	13.0	20.5

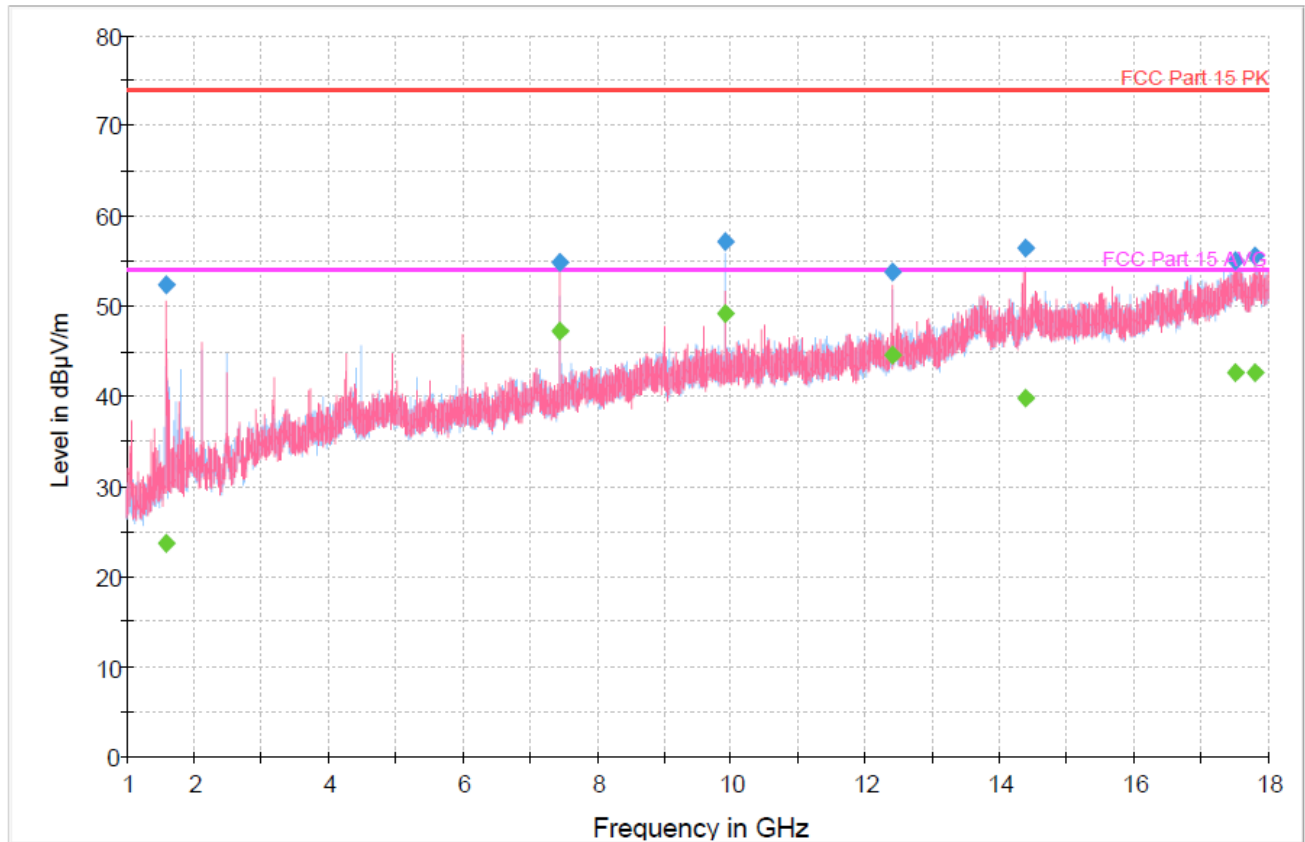

— Preview Result 1H-PK+
 — Preview Result 1V-PK+
 — FCC Part 15 PK
— FCC Part 15 AVG
◆ Final_Result PK+
◆ Final_Result AVG

Figure 47: Radiated Spurious Emissions 1GHz - 18GHz, 2480MHz, 1Mbps

Final Result

Frequency (MHz)	MaxPeak (dBµV/m)	Average (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Bandwidth (kHz)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
2132.000971	49.38	---	74.00	24.62	1000.000	180.0	V	143.0	-2.3
2132.000971	---	31.62	54.00	22.38	1000.000	180.0	V	143.0	-2.3
7204.810029	---	44.97	54.00	9.03	1000.000	104.0	V	185.0	8.4
7204.810029	52.80	---	74.00	21.20	1000.000	104.0	V	185.0	8.4
12012.909971	47.78	---	74.00	26.22	1000.000	105.0	V	201.0	12.9
12012.909971	---	35.11	54.00	18.89	1000.000	105.0	V	201.0	12.9
14337.500000	---	39.83	54.00	14.17	1000.000	181.0	V	176.0	16.3
14337.500000	57.42	---	74.00	16.58	1000.000	181.0	V	176.0	16.3
17605.000000	55.08	---	74.00	18.92	1000.000	250.0	V	140.0	20.0
17605.000000	---	42.41	54.00	11.59	1000.000	250.0	V	140.0	20.0
17788.500971	---	42.33	54.00	11.67	1000.000	100.0	H	179.0	20.3
17788.500971	55.47	---	74.00	18.53	1000.000	100.0	H	179.0	20.3

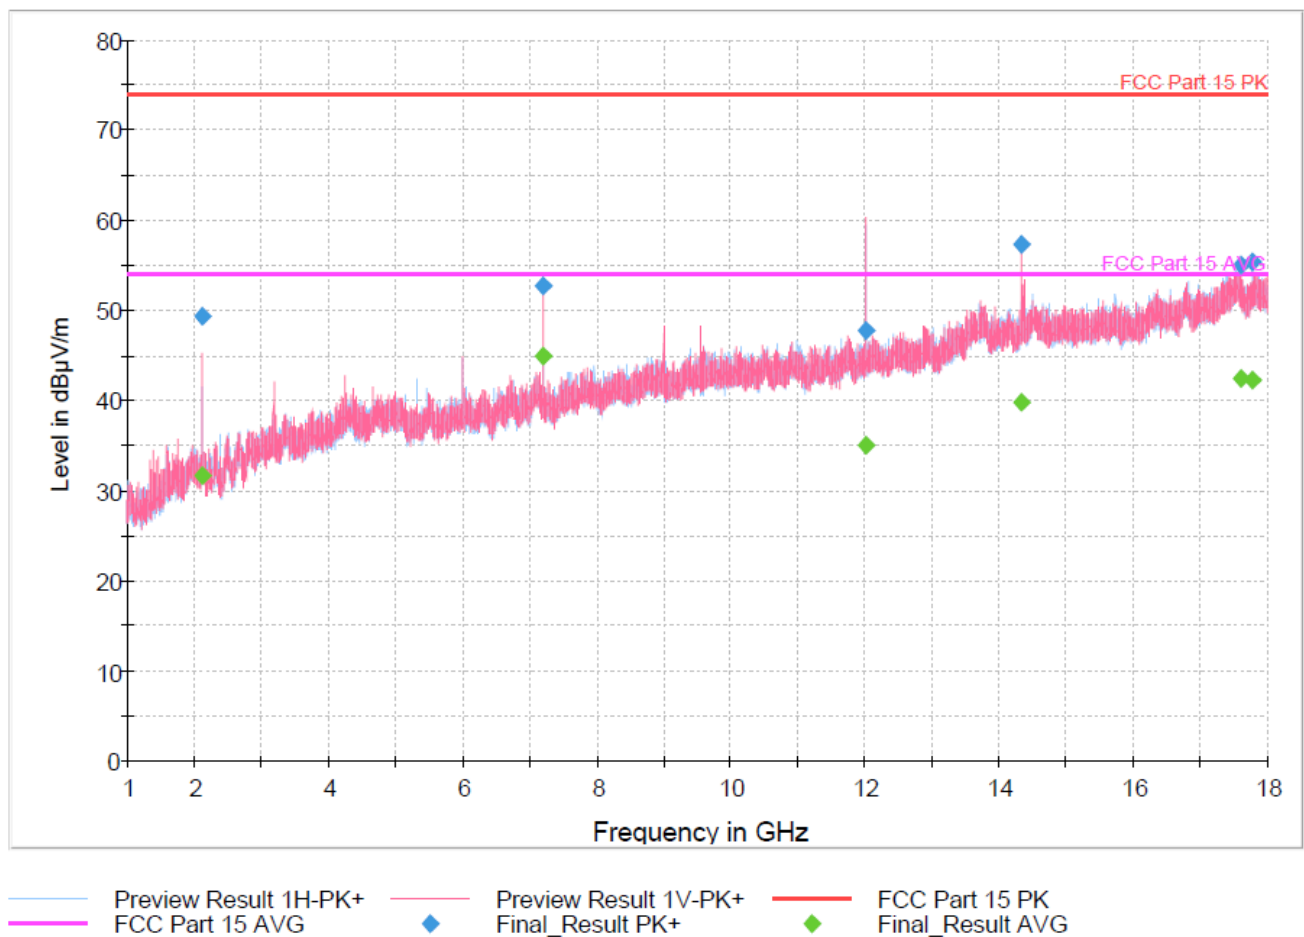


Figure 48: Radiated Spurious Emissions 1GHz - 18GHz, 2402MHz, 2Mbps

Final Result

Frequency (MHz)	MaxPeak (dB μ V/m)	Average (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Bandwidth (kHz)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
7320.500971	53.93	---	74.00	20.07	1000.000	106.0	V	188.0	8.0
7320.500971	---	44.55	54.00	9.45	1000.000	106.0	V	188.0	8.0
9761.500000	54.99	---	74.00	19.01	1000.000	197.0	H	206.0	11.7
9761.500000	---	46.39	54.00	7.61	1000.000	197.0	H	206.0	11.7
12197.845029	60.11	---	74.00	13.89	1000.000	233.0	H	178.0	13.2
12197.845029	---	51.55	54.00	2.45	1000.000	233.0	H	178.0	13.2
14343.000000	---	39.74	54.00	14.26	1000.000	150.0	V	123.0	16.3
14343.000000	57.30	---	74.00	16.70	1000.000	150.0	V	123.0	16.3
17030.339971	54.65	---	74.00	19.35	1000.000	195.0	V	57.0	19.2
17030.339971	---	40.92	54.00	13.08	1000.000	195.0	V	57.0	19.2
17523.387000	---	42.83	54.00	11.17	1000.000	117.0	H	138.0	20.3
17523.387000	55.49	---	74.00	18.51	1000.000	117.0	H	138.0	20.3
17818.788971	---	42.65	54.00	11.35	1000.000	150.0	V	100.0	20.6
17818.788971	56.02	---	74.00	17.98	1000.000	150.0	V	100.0	20.6


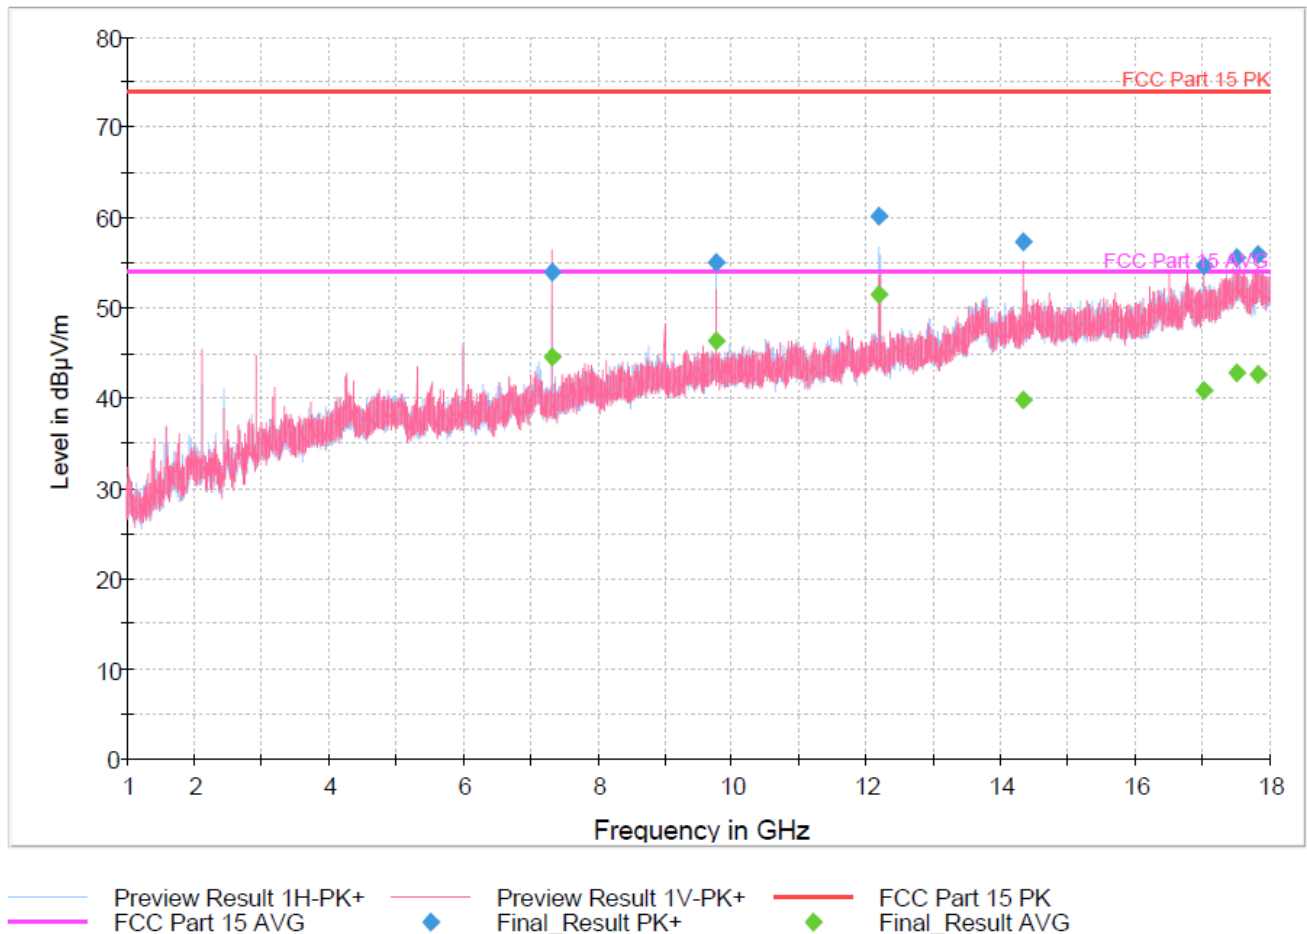


Figure 49: Radiated Spurious Emissions 1GHz - 18GHz, 2440MHz, 2Mbps

Final Result

Frequency (MHz)	MaxPeak (dBµV/m)	Average (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Bandwidth (kHz)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
7439.000000	56.77	---	74.00	17.23	1000.000	100.0	V	190.0	8.5
7439.000000	---	49.43	54.00	4.57	1000.000	100.0	V	190.0	8.5
9921.697971	56.88	---	74.00	17.12	1000.000	183.0	H	192.0	11.6
9921.697971	---	48.05	54.00	5.95	1000.000	183.0	H	192.0	11.6
12397.516000	55.47	---	74.00	18.53	1000.000	194.0	H	136.0	13.2
12397.516000	---	44.43	54.00	9.57	1000.000	194.0	H	136.0	13.2
14373.498971	52.41	---	74.00	21.59	1000.000	146.0	V	-2.0	16.6
14373.498971	---	38.83	54.00	15.17	1000.000	146.0	V	-2.0	16.6
16378.791029	53.28	---	74.00	20.72	1000.000	195.0	H	222.0	18.1
16378.791029	---	40.46	54.00	13.54	1000.000	195.0	H	222.0	18.1
17500.891971	---	42.62	54.00	11.38	1000.000	150.0	H	185.0	20.2
17500.891971	55.25	---	74.00	18.75	1000.000	150.0	H	185.0	20.2
17813.842000	56.12	---	74.00	17.88	1000.000	150.0	V	146.0	20.5
17813.842000	---	42.59	54.00	11.41	1000.000	150.0	V	146.0	20.5

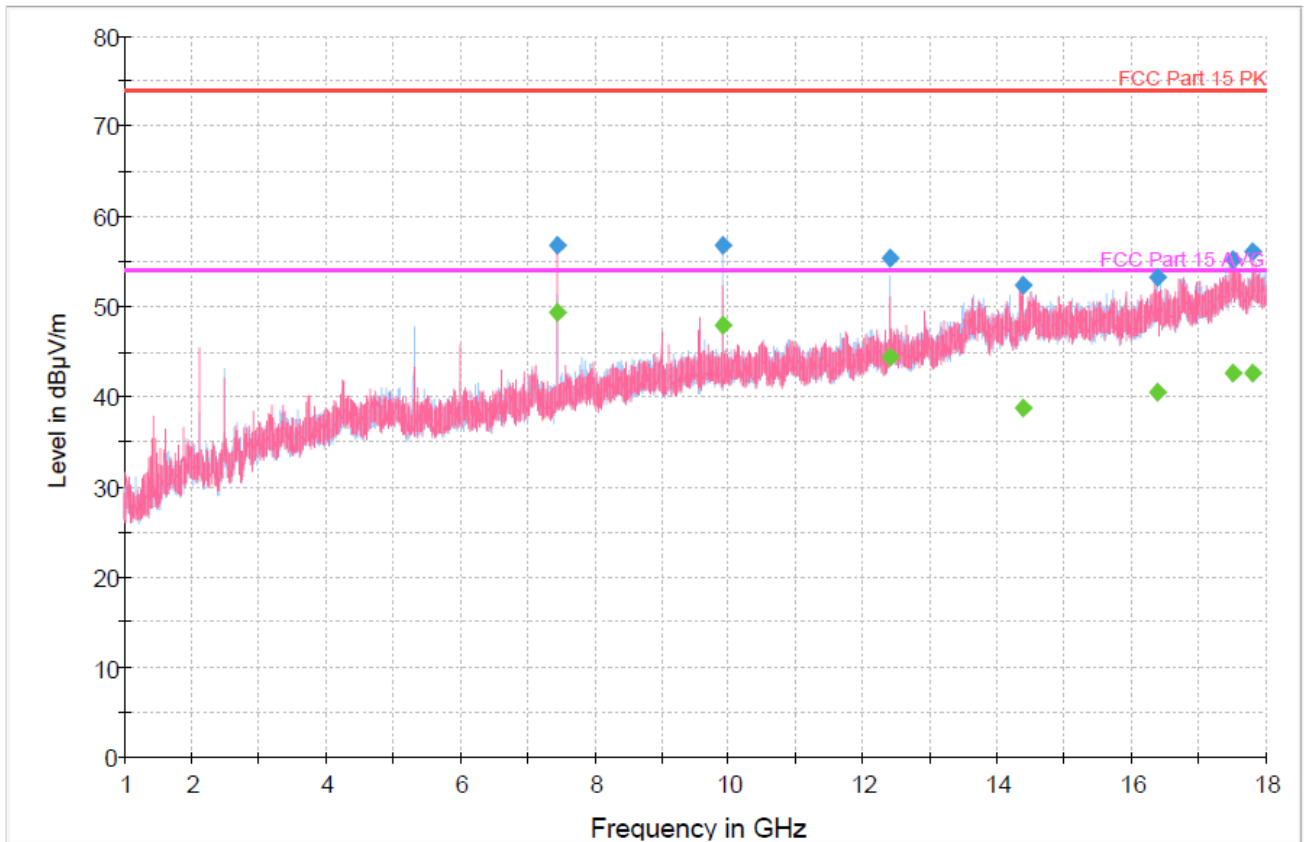

— Preview Result 1H-PK+
 — Preview Result 1V-PK+
 — FCC Part 15 PK
— FCC Part 15 AVG
 ◆ Final_Result PK+
 ◆ Final_Result AVG

Figure 50: Radiated Spurious Emissions 1GHz - 18GHz, 2480MHz, 2Mbps

4.7 AC Conducted Emissions

Testing was performed in accordance with ANSI C63.10: 2013. These test methods are listed under the laboratory's A2LA Scope of Accreditation.

This test measures the levels emanating from the EUT's AC input port, thus evaluating the potential for the EUT to cause radio frequency interference to other electronic devices.

The AC conducted emissions of equipment under test shall not exceed the values in CFR47 Part 15.207: 2021 and RSS Gen: 2019 Sect. 8.8.

4.7.1 Test Methodology

A test program that controls instrumentation and data logging was used to automate the AC Power Line Conducted emission test procedure. The frequency range of interest was divided into sub-ranges such as to yield a frequency resolution of 9 kHz. Each phase and neutral of the AC power line were measured with respect to ground. Measurements were performed using a set of 50 μ H / 50 Ω LISNs.

The setup photographs clearly identify which site was used. The vertical ground plane used in the semi-anechoic chamber is a 2m x 2m solid aluminum frame and panel, and it is bonded to the horizontal ground plane.

In the case of tabletop equipment, the EUT is placed on a 1.0m x 1.5m non-conductive table 80cm above the ground plane and 40cm from a vertical ground reference plane. The rear of the EUT was positioned flush with the backside of the table and directly over the LISNs. The power and I/O cables were routed over the edge of the table and bundled approximately 40cm from the ground plane. Support equipment was powered from a separate LISN.

4.7.1.1 Deviations

There were no deviations from this test methodology.

4.7.2 Test Results

Test is not applicable since the EUT is DC powered by a battery.

5 Test Equipment List

5.1 Equipment List

Equipment	Manufacturer	Model #	Serial/Inst #	Last Cal mm/dd/yyyy	Next Cal mm/dd/yyyy
Spectrum Analyzer	Rohde & Schwarz	FSU26.5	1166.1660.26	02/24/2021	02/24/2022
EMI Receiver	Rohde & Schwarz	ESW44	838399	02/12/2021	02/12/2022
Preamplifier, 9 kHz – 1 GHz	Sonoma	310N	213221	08/06/2020	08/06/2022
Bilog Antenna	Sunol Sciences	JB3	A061907	02/12/2021	02/12/2022
Preamplifier – 1-18GHz	Miteq	AMF-70-01001800-30-10P-L	2074297	02/12/2021	02/12/2022
Horn Antenna	Sunol Sciences	DRH-118	A040806	06/17/2020	06/17/2022
Preamplifier – 1-10GHz	HP	8449B	3008A01013	06/08/2020	06/08/2022
Horn Antenna	EMCO	RA42-K-F-B-C	100011	03/04/2019	03/04/2022
Amplifier	Rohde & Schwarz	TS-PR26	100011	06/13/2020	06/13/2022
2.4GHZ Band Filter	Microtronics	BRM50702	009	N/A (See Note)	

Note: Equipment is characterized before use.

6 EMC Test Plan

6.1 Introduction

This section provides a description of the Equipment Under Test (EUT), configurations, operating conditions, and performance acceptance criteria. It is an overview of information provided by the manufacturer (information supplied by the customer and can affect the validity of results) so that the test laboratory may perform the requested testing.

6.2 Customer

The information in the following tables is required, as it should appear in the final test report.

Table 6: Customer Information

Company Name	Hunter Douglas Window Fashions Division Division
Address	1 Duette Way
City, State, Zip	Broomfield, CO, 80020
Country	USA

Table 7: Technical Contact Information

Name	Mike Rockwood
E-mail	mike.rockwood@hunterdouglas.com
Phone	651-528-1165

6.3 Equipment Under Test (EUT)

The information provided in the following table should be listed as it should appear in the final report. For those products that have only a model name, list the model number as *non-applicable* and vice-versa.

Table 8: EUT Designation

Product Name	Remote Control
Model Number	1012000409, 1012000410, 1012000411
Product Description	<p>The 1012000409, 1012000410, 1012000411 are assembled into various remote assemblies and fabricated into Hunter Douglas window coverings via an easy to use and intuitive push-button handheld remote. This device utilized BLE in the 2400-2483.5MHz band.</p> <p>Hunter Douglas Remotes which are model numbered differently for marketing purposes but utilize the same hardware and communication software. All devices are identical in componentry and wireless communication aspects. These different model numbers have unique Product Marketing Names and depending on the device utilize different product features which are independent of the device's wireless communication.</p>

6.4 Product Specifications

The information provided in the following table should be listed as it should appear in the final report.

Table 9: EUT Specifications*

EUT Specifications	
DC Power Input	3 VDC (powered by battery)
Multiple Feeds:	<input type="checkbox"/> Yes and how many <input checked="" type="checkbox"/> No
Product Marketing Name (PMN)	Remote Control
Test Sample Number	1012000325
Hardware Version Identification Number (HVIN)	1012000409, 1012000410, 1012000411
Firmware Version Identification Number (FVIN)	N/A
Operating Modes	Bluetooth Low Energy
Transmitter Frequency Band	2400 MHz to 2483.5 MHz
Power Setting @ Operating Channel	+8dBm
Antenna Type	Integral, Trace
Antenna Gain	0 dBi
Modulation Type	<input type="checkbox"/> AM <input type="checkbox"/> FM <input type="checkbox"/> DSSS <input checked="" type="checkbox"/> OFDM <input checked="" type="checkbox"/> Other describe: GFSK
Data Rate	1 Mbps, 2Mbps
TX/RX Chain (s)	1
Type of Equipment	<input checked="" type="checkbox"/> Table Top <input type="checkbox"/> Wall-mount <input type="checkbox"/> Floor standing cabinet <input type="checkbox"/> Other:
Note: *All EUT specifications are provided by the manufacturer or the TUV direct customer. Information supplied by the customer and can affect the validity of results.	

Table 10: Antenna Information

Number	Antenna Type	Description	Max Gain (dBi)
1	Integral, Trace	Internal	0

Table 11: Interface Specifications

Interface Type	Cabled with what type of cable?	Is the cable shielded?	Maximum potential length of the cable?	Metallic (M), Coax (C), Fiber (F), or Not Applicable?
USB Cable	Serial to USB	<input type="checkbox"/> Yes	<input checked="" type="checkbox"/> Metric: <3.0m	<input checked="" type="checkbox"/> M
Note: Cable required for EUT configuration for regulatory test mode. 3pin to USB cable not utilized within final product. EUT powered via DC power supply during testing.				

Table 12: Accessory Equipment

Equipment	Manufacturer	Model	Serial	Comment
USB to Serial Connector cable	N/A (generic)	N/A (generic)	N/A	Used between test cases to configure EUT operational test mode.
Note: None.				

Table 13: Ancillary Equipment (used for test purposes only)

Equipment	Manufacturer	Model	Serial	Used for
Laptop	Lenovo	X201	N/A	Setup EUT operating channels via serial connection to EUT
Note: None.				

Table 14: Description of Sample used for Testing

Device	Sample Number	Configuration	Used For
Remote Control	1012000325	Integrated Antenna	Radiated Emissions, Radiated Band Edge
		Direct via temporary SMA connector	Transmit Power, Occupied Bandwidth, Out of Band Emission, PSD, Duty Cycle

Table 15: Description of Test Configuration used for Radiated Measurement.

Device	Antenna	Mode	Setup Description
Remote Control	Integral, Trace	Transmit	EUT Flat
Note: EUT was tested on its X-Axis as this was worse case			

6.5 Test Specifications

Table 16: Test Specifications

Emissions and Immunity	
Standard	Requirement
CFR 47 Part 15.247: 2021	All
RSS 247 Issue 2, 2017	All

END OF REPORT