

FCC Test Report (WLAN)

Report No.: RF170929E01

FCC ID: UXX-S5A803A

Test Model: S5A803A

Series Model: S5A808A, S5A804A, S5A809A

Received Date: Sep. 29, 2017

Test Date: Oct. 23 to 31, 2017

Issued Date: Nov. 10, 2017

Applicant: Cradlepoint, Inc

Address: 1111 W. Jefferson Street Suite 400 Boise, ID 83702 USA

Issued By: Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch
Hsin Chu Laboratory

Lab Address: E-2, No.1, Li Hsin 1st Road, Hsinchu Science Park, Hsinchu City 300,
Taiwan R.O.C.

Test Location: E-2, No.1, Li Hsin 1st Road, Hsinchu Science Park, Hsinchu City 300,
Taiwan R.O.C.



This report is for your exclusive use. Any copying or replication of this report to or for any other person or entity, or use of our name or trademark, is permitted only with our prior written permission. This report sets forth our findings solely with respect to the test samples identified herein. The results set forth in this report are not indicative or representative of the quality or characteristics of the lot from which a test sample was taken or any similar or identical product unless specifically and expressly noted. Our report includes all of the tests requested by you and the results thereof based upon the information that you provided to us. You have 60 days from date of issuance of this report to notify us of any material error or omission caused by our negligence, provided, however, that such notice shall be in writing and shall specifically address the issue you wish to raise. A failure to raise such issue within the prescribed time shall constitute your unqualified acceptance of the completeness of this report, the tests conducted and the correctness of the report contents. Unless specific mention, the uncertainty of measurement has been explicitly taken into account to declare the compliance or non-compliance to the specification. The report must not be used by the client to claim product certification, approval, or endorsement by TAF or any government agencies.

Table of Contents

Release Control Record	4
1 Certificate of Conformity	5
2 Summary of Test Results	6
2.1 Measurement Uncertainty	6
2.2 Modification Record	6
3 General Information	7
3.1 General Description of EUT (WLAN)	7
3.2 Description of Test Modes	11
3.2.1 Test Mode Applicability and Tested Channel Detail	12
3.3 Duty Cycle of Test Signal	14
3.4 Description of Support Units	15
3.4.1 Configuration of System under Test	16
3.5 General Description of Applied Standards	18
4 Test Types and Results	19
4.1 Radiated Emission and Bandedge Measurement	19
4.1.1 Limits of Radiated Emission and Bandedge Measurement	19
4.1.2 Test Instruments	20
4.1.3 Test Procedures	21
4.1.4 Deviation from Test Standard	21
4.1.5 Test Setup	22
4.1.6 EUT Operating Conditions	23
4.1.7 Test Results	24
4.2 Conducted Emission Measurement	37
4.2.1 Limits of Conducted Emission Measurement	37
4.2.2 Test Instruments	37
4.2.3 Test Procedures	38
4.2.4 Deviation from Test Standard	38
4.2.5 Test Setup	38
4.2.6 EUT Operating Conditions	38
4.2.7 Test Results (Mode 1)	39
4.2.8 Test Results (Mode 2)	41
4.2.9 Test Results (Mode 3)	43
4.3 6dB Bandwidth Measurement	45
4.3.1 Limits of 6dB Bandwidth Measurement	45
4.3.2 Test Setup	45
4.3.3 Test Instruments	45
4.3.4 Test Procedure	45
4.3.5 Deviation from Test Standard	45
4.3.6 EUT Operating Conditions	45
4.3.7 Test Result	46
4.4 Conducted Output Power Measurement	48
4.4.1 Limits of Conducted Output Power Measurement	48
4.4.2 Test Setup	48
4.4.3 Test Instruments	48
4.4.4 Test Procedures	48
4.4.5 Deviation from Test Standard	48
4.4.6 EUT Operating Conditions	48
4.4.7 Test Results	49
4.5 Power Spectral Density Measurement	51
4.5.1 Limits of Power Spectral Density Measurement	51
4.5.2 Test Setup	51
4.5.3 Test Instruments	51
4.5.4 Test Procedure	51

4.5.5	Deviation from Test Standard	51
4.5.6	EUT Operating Condition	51
4.5.7	Test Results	52
4.6	Conducted Out of Band Emission Measurement.....	55
4.6.1	Limits of Conducted Out of Band Emission Measurement.....	55
4.6.2	Test Setup.....	55
4.6.3	Test Instruments	55
4.6.4	Test Procedure	55
4.6.5	Deviation from Test Standard	55
4.6.6	EUT Operating Condition	55
4.6.7	Test Results	55
5	Pictures of Test Arrangements.....	64
	Appendix – Information on the Testing Laboratories	65

Release Control Record

Issue No.	Description	Date Issued
RF170929E01	Original release.	Nov. 10, 2017

1 Certificate of Conformity

Product: Integrated Mobile Broadband Router

Brand: cradlepoint

Test Model: S5A803A

Series Model: S5A808A, S5A804A, S5A809A

Sample Status: ENGINEERING SAMPLE

Applicant: Cradlepoint, Inc

Test Date: Oct. 23 to 31, 2017

Standards: 47 CFR FCC Part 15, Subpart C (Section 15.247)
ANSI C63.10: 2013

The above equipment has been tested by **Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch**, and found compliance with the requirement of the above standards. The test record, data evaluation & Equipment Under Test (EUT) configurations represented herein are true and accurate accounts of the measurements of the sample's EMC characteristics under the conditions specified in this report.

Prepared by :


Mary Ko

Date:

Nov. 10, 2017

Mary Ko / Specialist

Approved by :

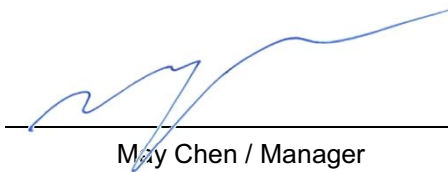

Date:

Nov. 10, 2017

May Chen / Manager

2 Summary of Test Results

47 CFR FCC Part 15, Subpart C (Section 15.247)			
FCC Clause	Test Item	Result	Remarks
15.207	AC Power Conducted Emission	PASS	Meet the requirement of limit. Minimum passing margin is -4.27dB at 0.44297MHz.
15.205 / 15.209 / 15.247(d)	Radiated Emissions and Band Edge Measurement	PASS	Meet the requirement of limit. Minimum passing margin is -0.1dB at 2390.00MHz, 2483.50MHz, 4874.00MHz.
15.247(d)	Antenna Port Emission	PASS	Meet the requirement of limit.
15.247(a)(2)	6dB bandwidth	PASS	Meet the requirement of limit.
15.247(b)	Conducted power	PASS	Meet the requirement of limit.
15.247(e)	Power Spectral Density	PASS	Meet the requirement of limit.
15.203	Antenna Requirement	PASS	Antenna connector is R-SMA not a standard connector.

2.1 Measurement Uncertainty

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the EUT as specified in CISPR 16-4-2:

Measurement	Frequency	Expanded Uncertainty (k=2) (\pm)
Conducted Emissions at mains ports	150kHz ~ 30MHz	1.84 dB
Radiated Emissions up to 1 GHz	30MHz ~ 1GHz	5.32 dB
Radiated Emissions above 1 GHz	1GHz ~ 6GHz	5.14 dB
	6GHz ~ 18GHz	5.04 dB
	18GHz ~ 40GHz	5.25 dB

2.2 Modification Record

There were no modifications required for compliance.

3 General Information

3.1 General Description of EUT (WLAN)

Product	Integrated Mobile Broadband Router
Brand	cradlepoint
Test Model	S5A803A
Series Model	S5A808A, S5A804A, S5A809A
Status of EUT	ENGINEERING SAMPLE
Power Supply Rating	DC 54V from power adapter
Modulation Type	CCK, DQPSK, DBPSK for DSSS 64QAM, 16QAM, QPSK, BPSK for OFDM 256QAM for OFDM in 11ac mode and VHT20/40 mode in 2.4GHz band
Modulation Technology	DSSS, OFDM
Transfer Rate	802.11b: up to 11Mbps 802.11a/g: up to 54Mbps 802.11n: up to 600Mbps 802.11ac: up to 1733.3Mbps 802.11ac (80+80): up to 3466.7Mbps
Operating Frequency	2.4GHz: 2.412 ~ 2.462GHz 5GHz: 5.18 ~ 5.24GHz, 5.745 ~ 5.825GHz
Number of Channel	2.4GHz: 802.11b/g, 802.11n (HT20), VHT20 : 11 802.11n (HT40), VHT40: 7 5GHz: 802.11a, 802.11n (HT20), 802.11ac (VHT20): 9 802.11n (HT40), 802.11ac (VHT40): 4 802.11ac (VHT80): 2 802.11ac (VHT80+80): 1 set
Output Power	Radio 1 2.4GHz: CDD Mode: 670.981mW Beamforming Mode: 659.725mW Radio 2 5.18 ~ 5.24GHz: Master Mode CDD Mode: 810.23mW Beamforming Mode: 417.221mW Client Mode CDD Mode: 244.827mW Beamforming Mode: 106.522mW 5.745 ~ 5.825GHz: Master Mode CDD Mode: 994.535mW Beamforming Mode: 427.651mW Client Mode CDD Mode: 994.535mW Beamforming Mode: 427.651mW
Antenna Type	Refer to Note
Antenna Connector	Refer to Note
Accessory Device	Adapter x 1
Data Cable Supplied	NA

Note:

1. The EUT has four model names, which are identical to each other in all aspects except for the following:

Brand	Model	Product name	Function	
			Wifi	LTE
cradlepoint	S5A803A	Integrated Mobile Broadband Router	√	√
	S5A808A		-	√
	S5A804A		√	-
	S5A809A		-	-

From the above models, model: **S5A803A** was selected as representative model for the test and its data was recorded in this report.

2. There are WLAN, 3G/LTE and GPS technology used for the EUT. The EUT has three radios as following table:

Radio 1	Radio 2	Radio 3
WLAN - 2.4GHz	WLAN - 5GHz	WWAN - 3G/LTE

3. The EUT contains certified 3G/LTE modular which FCC ID: RI7LM940. (Brand: Sierra Wireless; Model No.: RI7LM940).

4. The EUT must be supplied with power adapters and following different models could be chosen as following table:

No.	Brand	Model No.	Spec.
1	UMEC	UP0651S-54PB	AC Input: 100-240Vac, 1.3A, 50/60Hz AC input cable: Unshielded, 1.8m DC Output: 54V, 1.2A DC Output cable: Unshielded, 1m
2	FSP GROUP INC.	FSP065-DWAN2	AC Input: 100-240Vac, 1.8A, 50/60Hz AC input cable: Unshielded, 1.9m DC Output: 54V, 1.2A DC Output cable: Unshielded with one core, 1m
3	FSP GROUP INC.	FSP120-AWAN2	AC Input: 100-240Vac, 1.8A, 50/60Hz AC input cable: Unshielded, 1.9m DC Output: 54V, 2.22A DC Output cable: Unshielded with one core, 1m

Note:

1. From the above adapters, the worse emissions was found in Adapter 2. Therefore only the test data of the mode was recorded in this report.

5. Simultaneously transmission condition.

Condition	Technology		
1	WLAN (Radio 1) (2.4GHz)	WLAN (Radio 2) (5GHz)	WWAN (Radio 3) 3G/LTE

Note: The emission of the simultaneous operation has been evaluated and no non-compliance was found.

6. The antennas provided to the EUT, please refer to the following table:

WLAN									
Antenna Set	Transmitter Circuit		Model	excluding cable loss Antenna Gain (dBi)	Frequency Range (GHz)	Antenna Type	Connector Type	Cable Length (mm)	Cable Loss(dB)
	Radio 1 (2.4G)	Radio 2 (5G)							
1	Chain (0)	Chain (1)	RFA-25-F17M3-B70-25	2.5	2.4~2.4835	Dipole	R-SMA	230	0.8
				3.5	5.15~5.85				1.4
	-	Chain (0)		2.5	2.4~2.4835	Dipole	R-SMA	230	0.8
				3.5	5.15~5.85				1.4
	-	Chain (3)		2.5	2.4~2.4835	Dipole	R-SMA	230	0.8
				3.5	5.15~5.85				1.4
	Chain (1)	Chain (2)		2.5	2.4~2.4835	Dipole	R-SMA	230	0.8
				3.5	5.15~5.85				1.4
2	Chain (0)	Chain (1)	TWX-1513RSXX-711	5	2.4~2.4835	Dipole	R-SMA	230	0.8
				5	5.15~5.85				1.4
	-	Chain (0)		5	2.4~2.4835	Dipole	R-SMA	230	0.8
				5	5.15~5.85				1.4
	-	Chain (3)		5	2.4~2.4835	Dipole	R-SMA	230	0.8
				5	5.15~5.85				1.4
	Chain (1)	Chain (2)		5	2.4~2.4835	Dipole	R-SMA	230	0.8
				5	5.15~5.85				1.4
WWAN – 3G / LTE									
Antenna Set	Transmitter Circuit		Model	Antenna Gain including cable loss (dBi)	Frequency Range (MHz)	Antenna Type	Connector Type	Cable Length (mm)	Cable Loss(dB)
1	Main	Aux	YWX-6252SABX-711	2	698~960	Dipole	SMA	100	0.2
				3	1710~2700				0.4
	-			2	698~960	Dipole	SMA	100	0.2
				3	1710~2700				0.4
2	Main	Aux	YWX-6241SAXX-711D	2	698~960	Dipole	SMA	100	0.2
				3	1710~2700				0.4
	-			2	698~960	Dipole	SMA	100	0.2
				3	1710~2700				0.4
GPS (only for test not for sale)									
Antenna Gain including cable loss (dBi)		Frequency Range (MHz)			Antenna Type		Connector Type		
GPS	1.36	1574.42±3			Dipole		SMA		
GLONASS	0.09	1602±0.5							
Note: 1. For WLAN: Ant set 2 was selected for the final test.									

7. The EUT incorporates a MIMO function:

2.4GHz Band (Radio 1)			
MODULATION MODE	DATA RATE (MCS)	TX & RX CONFIGURATION	
802.11b	1 ~ 11Mbps	2TX	2RX
802.11g	6 ~ 54Mbps	2TX	2RX
802.11n (HT20)	MCS 0~7	2TX	2RX
	MCS 8~15	2TX	2RX
802.11n (HT40)	MCS 0~7	2TX	2RX
	MCS 8~15	2TX	2RX
VHT20	MCS0~8 Nss=1	2TX	2RX
	MCS0~8 Nss=2	2TX	2RX
VHT40	MCS0~9 Nss=1	2TX	2RX
	MCS0~9 Nss=2	2TX	2RX
5GHz Band (Radio 2)			
MODULATION MODE	DATA RATE (MCS)	TX & RX CONFIGURATION	
802.11a	6 ~ 54Mbps	4TX	4RX
802.11n (HT20)	MCS 0~7	4TX	4RX
	MCS 8~15	4TX	4RX
	MCS 16~23	4TX	4RX
	MCS 24~31	4TX	4RX
802.11n (HT40)	MCS 0~7	4TX	4RX
	MCS 8~15	4TX	4RX
	MCS 16~23	4TX	4RX
	MCS 24~31	4TX	4RX
802.11ac (VHT20)	MCS 0~8, Nss=1	4TX	4RX
	MCS 0~8, Nss=2	4TX	4RX
	MCS 0~9, Nss=3	4TX	4RX
	MCS 0~8, Nss=4	4TX	4RX
802.11ac (VHT40)	MCS 0~9, Nss=1	4TX	4RX
	MCS 0~9, Nss=2	4TX	4RX
	MCS 0~9, Nss=3	4TX	4RX
	MCS 0~9, Nss=4	4TX	4RX
802.11ac (VHT80)	MCS 0~9, Nss=1	4TX	4RX
	MCS 0~9, Nss=2	4TX	4RX
	MCS 0~9, Nss=3	4TX	4RX
	MCS 0~9, Nss=4	4TX	4RX

Note:

- All of modulation mode support beamforming function except 802.11a/b/g modulation mode.
- The EUT support Beamforming and CDD mode, therefore both mode were investigated and the worst case scenario was identified. The worst case data were presented in test report.

- This device can support different category application which switched by access point mode and client mode by software.
- The above EUT information is declared by manufacturer and for more detailed features description, please refer to the manufacturer's specifications or user's manual.

3.2 Description of Test Modes

11 channels are provided for 802.11b, 802.11g and 802.11n (HT20), VHT20:

Channel	Frequency	Channel	Frequency
1	2412MHz	7	2442MHz
2	2417MHz	8	2447MHz
3	2422MHz	9	2452MHz
4	2427MHz	10	2457MHz
5	2432MHz	11	2462MHz
6	2437MHz		

7 channels are provided for 802.11n (HT40), VHT40:

Channel	Frequency	Channel	Frequency
3	2422MHz	7	2442MHz
4	2427MHz	8	2447MHz
5	2432MHz	9	2452MHz
6	2437MHz		

3.2.1 Test Mode Applicability and Tested Channel Detail

EUT CONFIGURE MODE	APPLICABLE TO				DESCRIPTION
	RE \geq 1G	RE $<$ 1G	PLC	APCM	
1	-	-	√	-	With adapter 1
2	√	√	√	√	With adapter 2
3	-	-	√	-	With adapter 3

Where RE \geq 1G: Radiated Emission above 1GHz & Bandedge Measurement
 RE $<$ 1G: Radiated Emission below 1GHz
 PLC: Power Line Conducted Emission
 APCM: Antenna Port Conducted Measurement

NOTE: 1. The EUT had been pre-tested on the positioned of each 2 axis. The worst case was found when positioned on **X-plane**.
 2. "-" means no effect.

Radiated Emission Test (Above 1GHz):

- Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- Following channel(s) was (were) selected for the final test as listed below.

CDD Mode					
MODE	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TECHNOLOGY	MODULATION TYPE	DATA RATE (Mbps)
802.11b	1 to 11	1, 6, 11	DSSS	DBPSK	1
802.11g	1 to 11	1, 6, 11	OFDM	BPSK	6
VHT20	1 to 11	1, 6, 11	OFDM	BPSK	6.5
VHT40	3 to 9	3, 6, 9	OFDM	BPSK	13.5

Radiated Emission Test (Below 1GHz):

- Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- Following channel(s) was (were) selected for the final test as listed below.

CDD Mode					
MODE	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TECHNOLOGY	MODULATION TYPE	DATA RATE (Mbps)
802.11b	1 to 11	6	DSSS	DBPSK	1

Power Line Conducted Emission Test:

- Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- Following channel(s) was (were) selected for the final test as listed below.

CDD Mode					
MODE	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TECHNOLOGY	MODULATION TYPE	DATA RATE (Mbps)
802.11b	1 to 11	6	DSSS	DBPSK	1

Antenna Port Conducted Measurement:

- This item includes all test value of each mode, but only includes spectrum plot of worst value of each mode.
- Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- Following channel(s) was (were) selected for the final test as listed below.

CDD Mode					
MODE	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TECHNOLOGY	MODULATION TYPE	DATA RATE (Mbps)
802.11b	1 to 11	1, 6, 11	DSSS	DBPSK	1
802.11g	1 to 11	1, 6, 11	OFDM	BPSK	6
VHT20	1 to 11	1, 6, 11	OFDM	BPSK	6.5
VHT40	3 to 9	3, 6, 9	OFDM	BPSK	13.5
Beamforming Mode (Output power only)					
MODE	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TECHNOLOGY	MODULATION TYPE	DATA RATE (Mbps)
VHT20	1 to 11	1, 6, 11	OFDM	BPSK	6.5
VHT40	3 to 9	3, 6, 9	OFDM	BPSK	13.5

Test Condition:

APPLICABLE TO	ENVIRONMENTAL CONDITIONS	INPUT POWER	TESTED BY
RE \geq 1G	22deg. C, 67%RH	120Vac, 60Hz	Eason Tseng
RE<1G	25deg. C, 68%RH	120Vac, 60Hz	Eason Tseng
PLC	25deg. C, 73%RH	120Vac, 60Hz	Andy Ho
APCM	25deg. C, 60%RH	120Vac, 60Hz	Anderson Chen

3.3 Duty Cycle of Test Signal

If duty cycle of test signal is $\geq 98\%$, duty factor is not required.


If duty cycle of test signal is $< 98\%$, duty factor shall be considered.

802.11b: Duty cycle = $12.25/12.344 = 0.992$

802.11g: Duty cycle = $2.026/2.11 = 0.96$, Duty factor = $10 * \log(1/0.96) = 0.18$

VHT20: Duty cycle = $4.953/5.035 = 0.984$

VHT40: Duty cycle = $2.401/2.489 = 0.965$, Duty factor = $10 * \log(1/0.965) = 0.16$

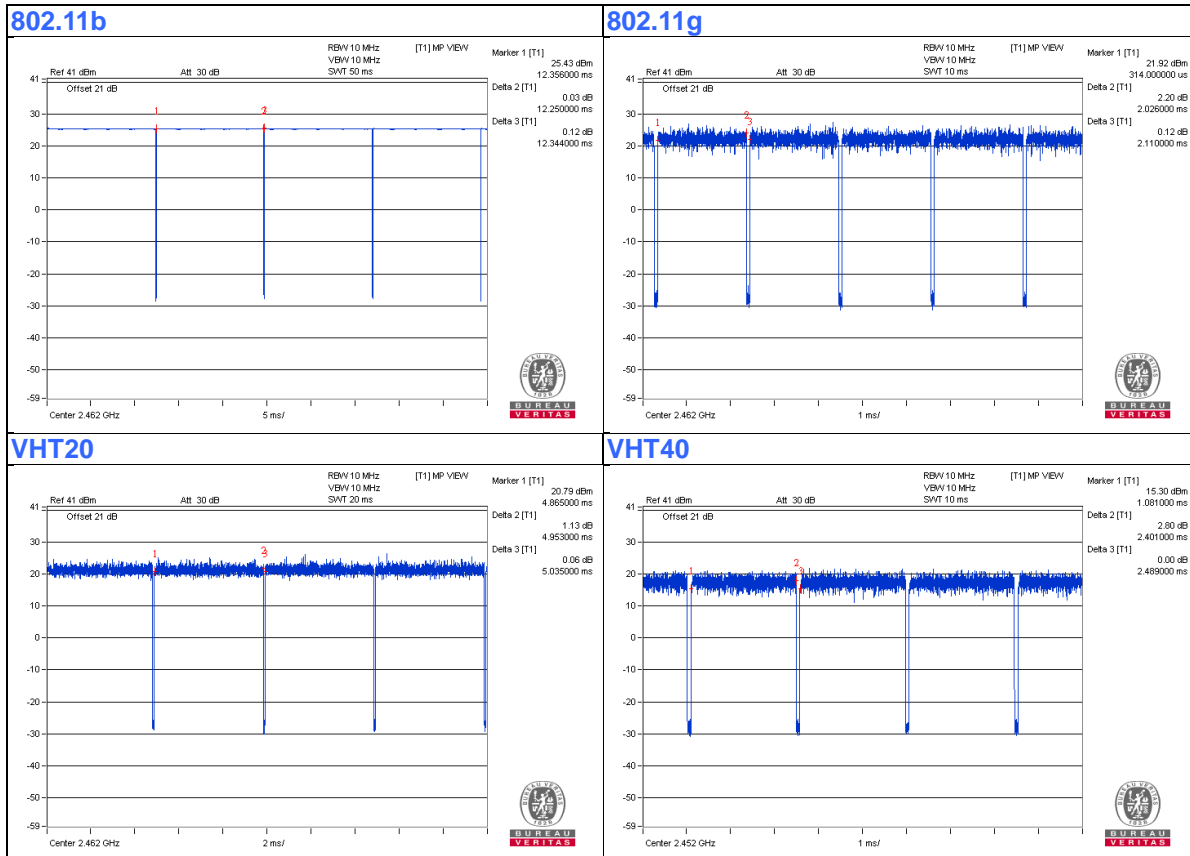

3.4 Description of Support Units

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

ID	Product	Brand	Model No.	Serial No.	FCC ID	Remarks
A.	Laptop	DELL	E6420	B92T3R1	FCC DoC	Provided by Lab
B.	Laptop	DELL	E6420	482T3R1	FCC DoC	Provided by Lab
C.	iPod	Apple	MD778TA/A	CC4JMH7LF4T1	NA	Provided by Lab
D.	3G/LTE Modem	NA	NA	NA	NA	Supplied by client
E.	SIM Card	NA	NA	NA	NA	Provided by Lab


Note:

1. All power cords of the above support units are non-shielded (1.8m).


ID	Descriptions	Qty.	Length (m)	Shielding (Yes/No)	Cores (Qty.)	Remarks
1.	DC Cable	1	1	No	1	Supplied by client
2.	RJ-45 Cable	1	3	No	0	Provided by Lab
3.	RJ-45 Cable	1	10	No	0	Provided by Lab
4.	RJ-45 Cable	1	10	No	0	Provided by Lab
5.	DC Cable	1	3	No	0	Provided by Lab
6.	USB Cable	1	0.1	Yes	0	Provided by Lab
7.	GPS Cable	2	3	No	0	Supplied by client
8.	AC Cable	1	1.9	No	0	Supplied by client

3.4.1 Configuration of System under Test

For Conducted Emission Test (Mode 1):

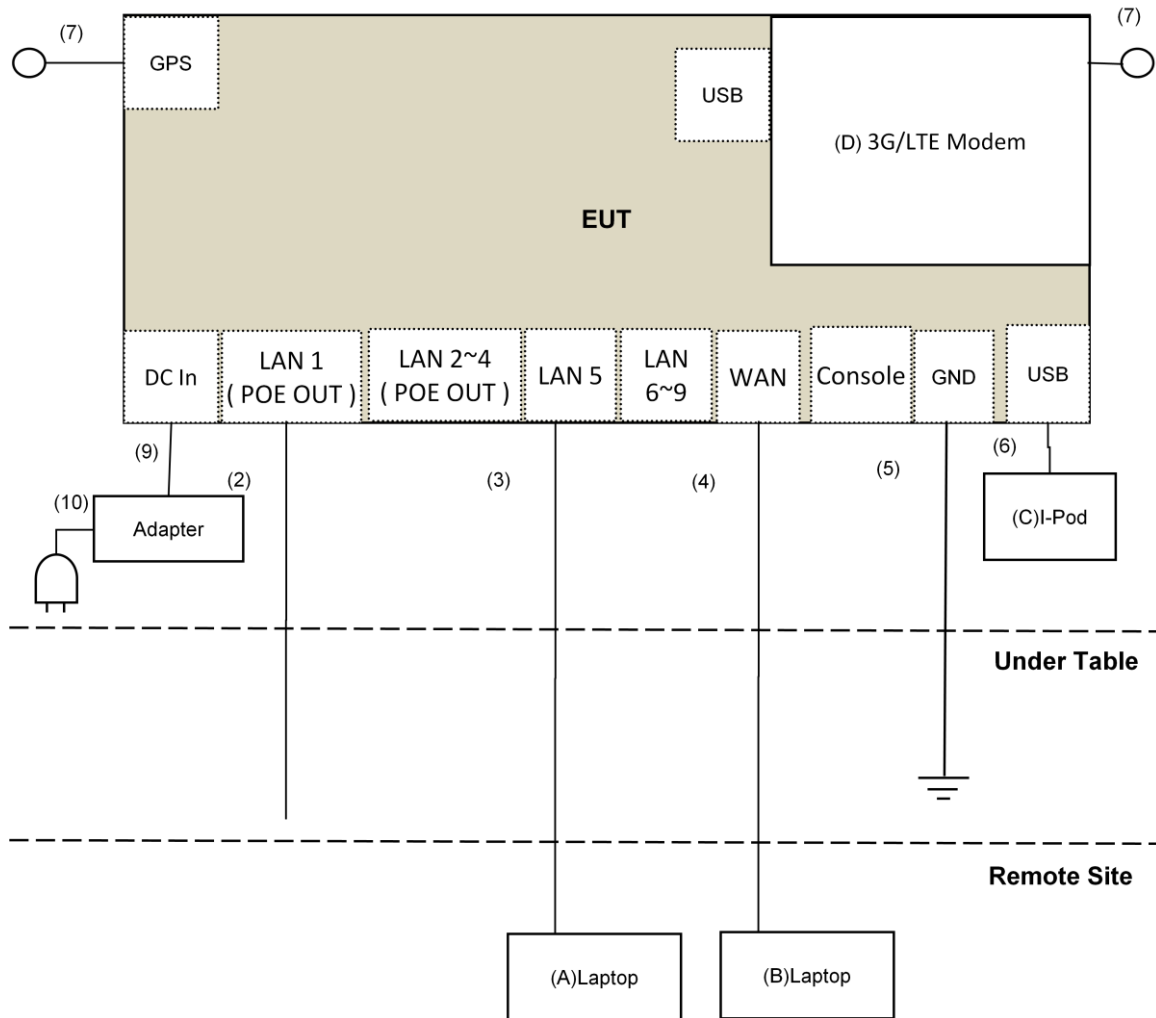

For other test:

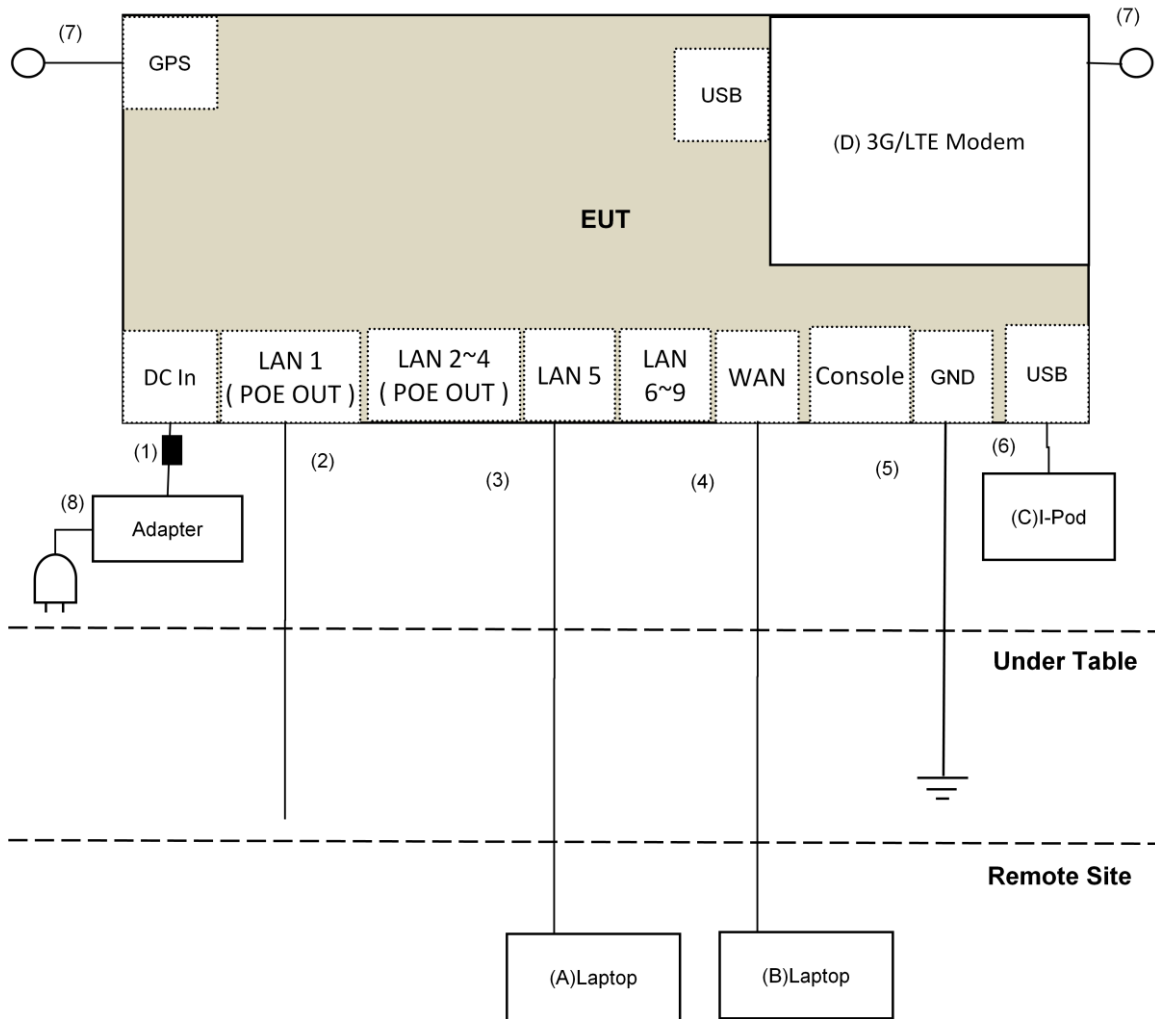

3.5 General Description of Applied Standards

The EUT is a RF Product. According to the specifications of the manufacturer, it must comply with the requirements of the following standards:

FCC Part 15, Subpart C (15.247)
KDB 558074 D01 DTS Meas Guidance v04
KDB 662911 D01 Multiple Transmitter Output v02r01
ANSI C63.10-2013

All test items have been performed and recorded as per the above standards.

NOTE: The EUT has been verified to comply with the requirements of FCC Part 15, Subpart B, Class B (DoC). The test report has been issued separately.

4 Test Types and Results

4.1 Radiated Emission and Bandedge Measurement

4.1.1 Limits of Radiated Emission and Bandedge Measurement

Radiated emissions which fall in the restricted bands must comply with the radiated emission limits specified as below table. Other emissions shall be at least 30dB below the highest level of the desired power:

Frequencies (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009 ~ 0.490	2400/F(kHz)	300
0.490 ~ 1.705	24000/F(kHz)	30
1.705 ~ 30.0	30	30
30 ~ 88	100	3
88 ~ 216	150	3
216 ~ 960	200	3
Above 960	500	3

NOTE:

1. The lower limit shall apply at the transition frequencies.
2. Emission level (dBuV/m) = 20 log Emission level (uV/m).
3. For frequencies above 1000MHz, the field strength limits are based on average detector, however, the peak field strength of any emission shall not exceed the maximum permitted average limits, specified above by more than 20dB under any condition of modulation.

4.1.2 Test Instruments

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	CALIBRATED DATE	CALIBRATED UNTIL
Test Receiver Agilent	N9038A	MY50010156	July 12, 2017	July 11, 2018
Pre-Amplifier ^(*) EMCI	EMC001340	980142	Jan. 20, 2016	Jan. 19, 2018
Loop Antenna ^(*) Electro-Metrics	EM-6879	264	Dec. 16, 2016	Dec. 15, 2018
RF Cable	NA	LOOPCAB-001 LOOPCAB-002	Jan. 17, 2017	Jan. 16, 2018
Pre-Amplifier Mini-Circuits	ZFL-1000VH2B	AMP-ZFL-05	May 06, 2017	May 05, 2018
Trilog Broadband Antenna SCHWARZBECK	VULB 9168	9168-361	Dec. 29, 2016	Dec. 28, 2017
RF Cable	8D	966-3-1 966-3-2 966-3-3	Apr. 01, 2017	Mar. 31, 2018
Fixed attenuator Mini-Circuits	UNAT-5+	PAD-3m-3-01	Oct. 03, 2017	Oct. 02, 2018
Horn_Antenna SCHWARZBECK	BBHA9120-D	9120D-406	Dec. 28, 2016	Dec. 27, 2017
Pre-Amplifier EMCI	EMC12630SE	980384	Feb. 02, 2017	Feb. 01, 2018
RF Cable	EMC104-SM-SM-1200 EMC104-SM-SM-2000 EMC104-SM-SM-5000	160922 150317 150322	Feb. 02, 2017 Mar. 29, 2017 Mar. 29, 2017	Feb. 01, 2018 Mar. 28, 2018 Mar. 28, 2018
Spectrum Analyzer Keysight	N9030A	MY54490679	July 25, 2017	July 24, 2018
Pre-Amplifier EMCI	EMC184045SE	980386	Feb. 02, 2017	Feb. 01, 2018
Horn_Antenna SCHWARZBECK	BBHA 9170	BBHA9170608	Dec. 15, 2016	Dec. 14, 2017
RF Cable	SUCOFLEX 102	36432/2 36433/2	Jan. 15, 2017	Jan. 14, 2018
Software	ADT_Radiated_V8.7.08	NA	NA	NA
Antenna Tower & Turn Table Max-Full	MF-7802	MF780208406	NA	NA
Boresight Antenna Fixture	FBA-01	FBA-SIP01	NA	NA
Spectrum Analyzer R&S	FSV40	100964	July 1, 2017	June 30, 2018
Power meter Anritsu	ML2495A	1014008	May 11, 2017	May 10, 2018
Power sensor Anritsu	MA2411B	0917122	May 11, 2017	May 10, 2018

Note:

1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.
2. *The calibration interval of the above test instruments is 24 months and the calibrations are traceable to NML/ROC and NIST/USA.
3. The test was performed in 966 Chamber No. 3.
4. The FCC Designation Number is TW2022.
5. Loop antenna was used for all emissions below 30 MHz.
6. The CANADA Site Registration No. is 20331-1
7. Tested Date: Oct. 24 to 31, 2017

4.1.3 Test Procedures

For Radiated emission below 30MHz

- a. The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter chamber room. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. Both X and Y axes of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to Quasi-Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.

NOTE:

1. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 9kHz at frequency below 30MHz.

For Radiated emission above 30MHz

- a. The EUT was placed on the top of a rotating table 0.8 meters (for 30MHz ~ 1GHz) / 1.5 meters (for above 1GHz) above the ground at 3 meter chamber room for test. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. The height of antenna is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to quasi-peak detect function and specified bandwidth with maximum hold mode when the test frequency is below 1 GHz.
- f. The test-receiver system was set to peak and average detect function and specified bandwidth with maximum hold mode when the test frequency is above 1 GHz. If the peak reading value also meets average limit, measurement with the average detector is unnecessary.

Note:


1. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 120kHz for Quasi-peak detection (QP) at frequency below 1GHz.
2. The resolution bandwidth of test receiver/spectrum analyzer is 1 MHz and the video bandwidth is 3 MHz for Peak detection (PK) at frequency above 1GHz.
3. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and the video bandwidth is $\geq 1/T$ (Duty cycle < 98%) or 10Hz (Duty cycle $\geq 98\%$) for Average detection (AV) at frequency above 1GHz.
4. All modes of operation were investigated and the worst-case emissions are reported.

4.1.4 Deviation from Test Standard


No deviation.

4.1.5 Test Setup


For Radiated emission below 30MHz

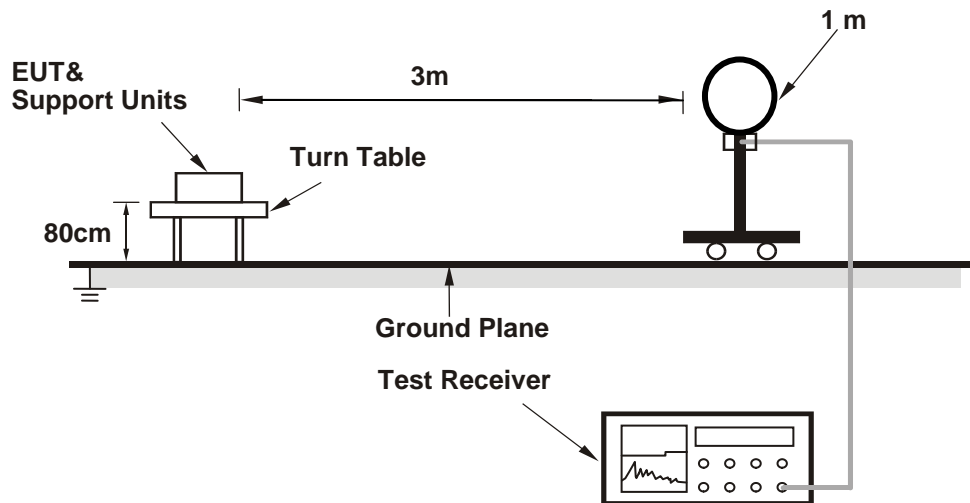

For Radiated emission 30MHz to 1GHz

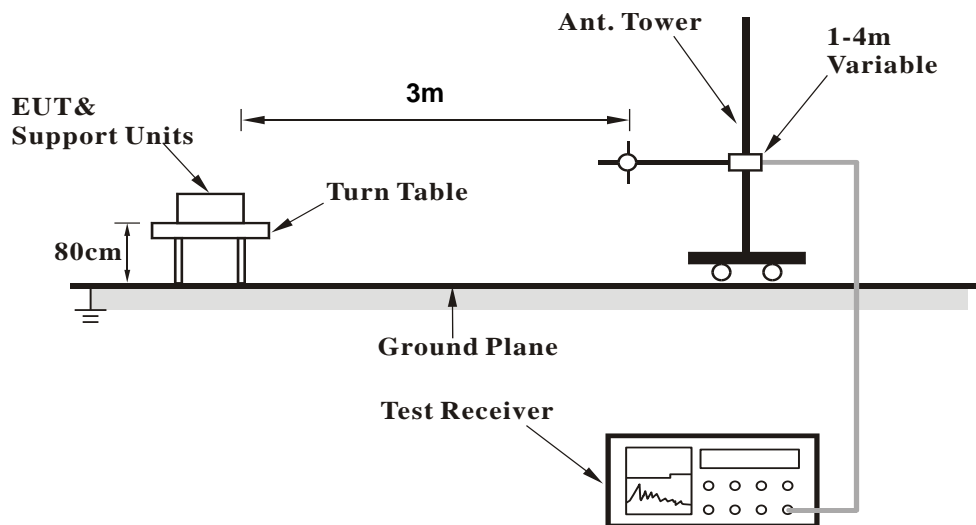

For Radiated emission above 1GHz

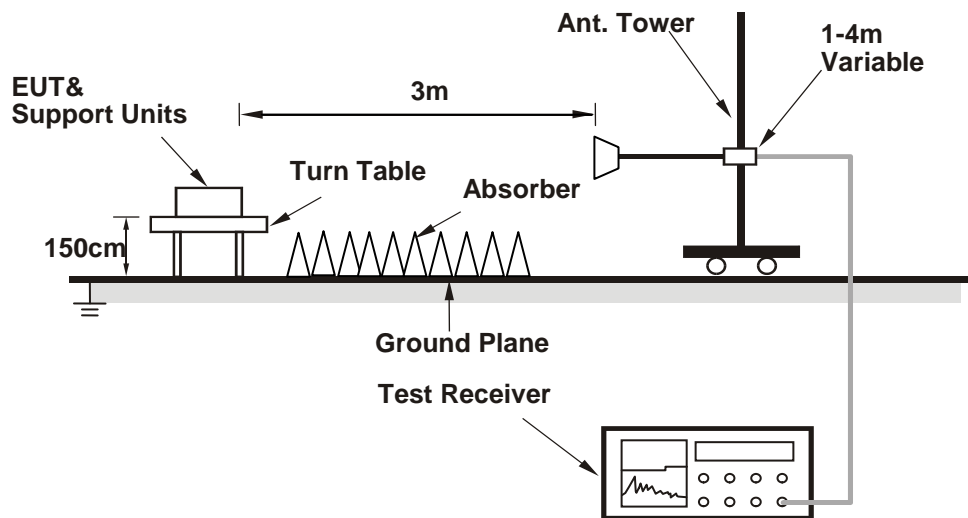

For the actual test configuration, please refer to the attached file (Test Setup Photo).

4.1.6 EUT Operating Conditions

- a. Connected the EUT with the Laptop which is placed on remote site.
- b. Controlling software (QCA Radio Control Toolkit Version 3.0.210.0) has been activated to set the EUT on specific status.

4.1.7 Test Results

Above 1GHz Data :

802.11b

CHANNEL	TX Channel 1	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 25GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2390.00	55.8 PK	74.0	-18.2	1.29 H	158	57.4	-1.6
2	2390.00	48.4 AV	54.0	-5.6	1.29 H	158	50.0	-1.6
3	*2412.00	120.2 PK			1.29 H	158	121.7	-1.5
4	*2412.00	108.1 AV			1.29 H	158	109.6	-1.5
5	4824.00	50.8 PK	74.0	-23.2	1.13 H	174	47.8	3.0
6	4824.00	47.3 AV	54.0	-6.7	1.13 H	174	44.3	3.0

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2390.00	60.9 PK	74.0	-13.1	1.65 V	42	62.5	-1.6
2	2390.00	53.9 AV	54.0	-0.1	1.65 V	42	55.5	-1.6
3	*2412.00	121.1 PK			1.65 V	42	122.6	-1.5
4	*2412.00	118.8 AV			1.65 V	42	120.3	-1.5
5	4824.00	52.1 PK	74.0	-21.9	1.30 V	332	49.1	3.0
6	4824.00	50.1 AV	54.0	-3.9	1.30 V	332	47.1	3.0

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " * ": Fundamental frequency.

CHANNEL	TX Channel 6	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 25GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2390.00	54.8 PK	74.0	-19.2	1.28 H	170	56.4	-1.6
2	2390.00	41.5 AV	54.0	-12.5	1.28 H	170	43.1	-1.6
3	*2437.00	122.4 PK			1.28 H	170	123.9	-1.5
4	*2437.00	109.8 AV			1.28 H	170	111.3	-1.5
5	2483.50	55.8 PK	74.0	-18.2	1.28 H	170	57.2	-1.4
6	2483.50	42.7 AV	54.0	-11.3	1.28 H	170	44.1	-1.4
7	4874.00	53.5 PK	74.0	-20.5	1.15 H	165	50.3	3.2
8	4874.00	51.5 AV	54.0	-2.5	1.15 H	165	48.3	3.2
9	7311.00	49.8 PK	74.0	-24.2	2.57 H	177	40.9	8.9
10	7311.00	44.7 AV	54.0	-9.3	2.57 H	177	35.8	8.9

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2390.00	57.5 PK	74.0	-16.5	1.35 V	44	59.1	-1.6
2	2390.00	44.3 AV	54.0	-9.7	1.35 V	44	45.9	-1.6
3	*2437.00	122.5 PK			1.35 V	44	124.0	-1.5
4	*2437.00	120.1 AV			1.35 V	44	121.6	-1.5
5	2483.50	58.2 PK	74.0	-15.8	1.35 V	44	59.6	-1.4
6	2483.50	45.2 AV	54.0	-8.8	1.35 V	44	46.6	-1.4
7	4874.00	55.7 PK	74.0	-18.3	1.38 V	351	52.5	3.2
8	4874.00	53.9 AV	54.0	-0.1	1.38 V	351	50.7	3.2
9	7311.00	51.2 PK	74.0	-22.8	1.26 V	136	42.3	8.9
10	7311.00	46.5 AV	54.0	-7.5	1.26 V	136	37.6	8.9

REMARKS:

- Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
- Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
- The other emission levels were very low against the limit.
- Margin value = Emission Level – Limit value
- " * ": Fundamental frequency.

CHANNEL	TX Channel 11	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 25GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2462.00	120.4 PK			1.26 H	161	121.8	-1.4
2	*2462.00	108.2 AV			1.26 H	161	109.6	-1.4
3	2483.50	56.3 PK	74.0	-17.7	1.26 H	161	57.7	-1.4
4	2483.50	49.1 AV	54.0	-4.9	1.26 H	161	50.5	-1.4
5	4924.00	50.9 PK	74.0	-23.1	1.13 H	158	47.6	3.3
6	4924.00	47.5 AV	54.0	-6.5	1.13 H	158	44.2	3.3
7	7386.00	46.6 PK	74.0	-27.4	2.55 H	170	37.5	9.1
8	7386.00	40.2 AV	54.0	-13.8	2.55 H	170	31.1	9.1

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2462.00	121.4 PK			1.27 V	43	122.8	-1.4
2	*2462.00	118.9 AV			1.27 V	43	120.3	-1.4
3	2483.50	61.0 PK	74.0	-13.0	1.27 V	43	62.4	-1.4
4	2483.50	53.9 AV	54.0	-0.1	1.27 V	43	55.3	-1.4
5	4924.00	54.1 PK	74.0	-19.9	1.25 V	350	50.8	3.3
6	4924.00	51.9 AV	54.0	-2.1	1.25 V	350	48.6	3.3
7	7386.00	49.5 PK	74.0	-24.5	1.00 V	146	40.4	9.1
8	7386.00	43.3 AV	54.0	-10.7	1.00 V	146	34.2	9.1

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " * ": Fundamental frequency.

802.11g

CHANNEL	TX Channel 1	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 25GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2390.00	58.1 PK	74.0	-15.9	2.74 H	180	59.7	-1.6
2	2390.00	44.6 AV	54.0	-9.4	2.74 H	180	46.2	-1.6
3	*2412.00	107.2 PK			2.74 H	180	108.7	-1.5
4	*2412.00	97.4 AV			2.74 H	180	98.9	-1.5
5	4824.00	37.6 PK	74.0	-36.4	1.45 H	182	34.6	3.0
6	4824.00	32.1 AV	54.0	-21.9	1.45 H	182	29.1	3.0

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2390.00	66.2 PK	74.0	-7.8	1.28 V	31	67.8	-1.6
2	2390.00	53.8 AV	54.0	-0.2	1.28 V	31	55.4	-1.6
3	*2412.00	120.2 PK			1.28 V	31	121.7	-1.5
4	*2412.00	109.8 AV			1.28 V	31	111.3	-1.5
5	4824.00	61.3 PK	74.0	-12.7	1.16 V	60	58.3	3.0
6	4824.00	47.2 AV	54.0	-6.8	1.16 V	60	44.2	3.0

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " * ": Fundamental frequency.

CHANNEL	TX Channel 6	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 25GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2390.00	65.8 PK	74.0	-8.2	2.78 H	186	67.4	-1.6
2	2390.00	50.2 AV	54.0	-3.8	2.78 H	186	51.8	-1.6
3	*2437.00	113.6 PK			2.78 H	186	115.1	-1.5
4	*2437.00	103.4 AV			2.78 H	186	104.9	-1.5
5	2483.50	64.2 PK	74.0	-9.8	2.78 H	186	65.6	-1.4
6	2483.50	47.1 AV	54.0	-6.9	2.78 H	186	48.5	-1.4
7	4874.00	58.5 PK	74.0	-15.5	1.53 H	189	55.3	3.2
8	4874.00	45.4 AV	54.0	-8.6	1.53 H	189	42.2	3.2
9	7311.00	51.2 PK	74.0	-22.8	1.39 H	181	42.3	8.9
10	7311.00	38.9 AV	54.0	-15.1	1.39 H	181	30.0	8.9

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2390.00	69.8 PK	74.0	-4.2	1.07 V	43	71.4	-1.6
2	2390.00	53.4 AV	54.0	-0.6	1.07 V	43	55.0	-1.6
3	*2437.00	125.4 PK			1.07 V	43	126.9	-1.5
4	*2437.00	115.4 AV			1.07 V	43	116.9	-1.5
5	2483.50	68.2 PK	74.0	-5.8	1.07 V	43	69.6	-1.4
6	2483.50	50.0 AV	54.0	-4.0	1.07 V	43	51.4	-1.4
7	4874.00	61.2 PK	74.0	-12.8	1.18 V	51	58.0	3.2
8	4874.00	47.1 AV	54.0	-6.9	1.18 V	51	43.9	3.2
9	7311.00	53.4 PK	74.0	-20.6	1.48 V	194	44.5	8.9
10	7311.00	40.3 AV	54.0	-13.7	1.48 V	194	31.4	8.9

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " * ": Fundamental frequency.

CHANNEL	TX Channel 11	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 25GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2462.00	108.5 PK			2.84 H	201	109.9	-1.4
2	*2462.00	98.7 AV			2.84 H	201	100.1	-1.4
3	2483.50	59.1 PK	74.0	-14.9	2.84 H	201	60.5	-1.4
4	2483.50	45.1 AV	54.0	-8.9	2.84 H	201	46.5	-1.4
5	4924.00	38.6 PK	74.0	-35.4	1.50 H	174	35.3	3.3
6	4924.00	33.2 AV	54.0	-20.8	1.50 H	174	29.9	3.3
7	7386.00	51.2 PK	74.0	-22.8	1.40 H	195	42.1	9.1
8	7386.00	38.9 AV	54.0	-15.1	1.40 H	195	29.8	9.1

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2462.00	121.9 PK			1.15 V	38	123.3	-1.4
2	*2462.00	110.7 AV			1.15 V	38	112.1	-1.4
3	2483.50	72.1 PK	74.0	-1.9	1.15 V	38	73.5	-1.4
4	2483.50	53.9 AV	54.0	-0.1	1.15 V	38	55.3	-1.4
5	4924.00	50.1 PK	74.0	-23.9	1.01 V	50	46.8	3.3
6	4924.00	35.7 AV	54.0	-18.3	1.01 V	50	32.4	3.3
7	7386.00	53.4 PK	74.0	-20.6	1.51 V	191	44.3	9.1
8	7386.00	40.1 AV	54.0	-13.9	1.51 V	191	31.0	9.1

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " * ": Fundamental frequency.

VHT20

CHANNEL	TX Channel 1	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 25GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2390.00	55.4 PK	74.0	-18.6	1.00 H	153	57.0	-1.6
2	2390.00	48.5 AV	54.0	-5.5	1.00 H	153	50.1	-1.6
3	*2412.00	109.6 PK			1.00 H	153	111.1	-1.5
4	*2412.00	98.3 AV			1.00 H	153	99.8	-1.5
5	4824.00	43.2 PK	74.0	-30.8	1.50 H	139	40.2	3.0
6	4824.00	25.4 AV	54.0	-28.6	1.50 H	139	22.4	3.0

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2390.00	69.4 PK	74.0	-4.6	1.50 V	36	71.0	-1.6
2	2390.00	53.9 AV	54.0	-0.1	1.50 V	36	55.5	-1.6
3	*2412.00	121.1 PK			1.50 V	36	122.6	-1.5
4	*2412.00	110.1 AV			1.50 V	36	111.6	-1.5
5	4824.00	42.1 PK	74.0	-31.9	1.27 V	21	39.1	3.0
6	4824.00	28.1 AV	54.0	-25.9	1.27 V	21	25.1	3.0

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " * ": Fundamental frequency.

CHANNEL	TX Channel 6	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 25GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2390.00	65.5 PK	74.0	-8.5	1.00 H	158	67.1	-1.6
2	2390.00	49.1 AV	54.0	-4.9	1.00 H	158	50.7	-1.6
3	*2437.00	113.4 PK			1.00 H	158	114.9	-1.5
4	*2437.00	102.1 AV			1.00 H	158	103.6	-1.5
5	2483.50	63.2 PK	74.0	-10.8	1.00 H	158	64.6	-1.4
6	2483.50	45.2 AV	54.0	-8.8	1.00 H	158	46.6	-1.4
7	4874.00	44.8 PK	74.0	-29.2	1.51 H	166	41.6	3.2
8	4874.00	41.5 AV	54.0	-12.5	1.51 H	166	38.3	3.2
9	7311.00	43.1 PK	74.0	-30.9	1.52 H	178	34.2	8.9
10	7311.00	38.1 AV	54.0	-15.9	1.52 H	178	29.2	8.9

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2390.00	69.7 PK	74.0	-4.3	1.49 V	34	71.3	-1.6
2	2390.00	53.2 AV	54.0	-0.8	1.49 V	34	54.8	-1.6
3	*2437.00	125.4 PK			1.49 V	34	126.9	-1.5
4	*2437.00	114.2 AV			1.49 V	34	115.7	-1.5
5	2483.50	67.8 PK	74.0	-6.2	1.49 V	34	69.2	-1.4
6	2483.50	49.9 AV	54.0	-4.1	1.49 V	34	51.3	-1.4
7	4874.00	57.4 PK	74.0	-16.6	1.38 V	22	54.2	3.2
8	4874.00	44.8 AV	54.0	-9.2	1.38 V	22	41.6	3.2
9	7311.00	53.7 PK	74.0	-20.3	1.48 V	136	44.8	8.9
10	7311.00	41.9 AV	54.0	-12.1	1.48 V	136	33.0	8.9

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " * ": Fundamental frequency.

CHANNEL	TX Channel 11	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 25GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2462.00	108.6 PK			1.04 H	170	110.0	-1.4
2	*2462.00	97.2 AV			1.04 H	170	98.6	-1.4
3	2483.50	63.5 PK	74.0	-10.5	1.04 H	170	64.9	-1.4
4	2483.50	48.6 AV	54.0	-5.4	1.04 H	170	50.0	-1.4
5	4924.00	32.7 PK	74.0	-41.3	1.34 H	133	29.4	3.3
6	4924.00	29.8 AV	54.0	-24.2	1.34 H	133	26.5	3.3
7	7386.00	30.4 PK	74.0	-43.6	1.41 H	155	21.3	9.1
8	7386.00	26.8 AV	54.0	-27.2	1.41 H	155	17.7	9.1

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2462.00	120.5 PK			1.44 V	31	121.9	-1.4
2	*2462.00	109.6 AV			1.44 V	31	111.0	-1.4
3	2483.50	68.5 PK	74.0	-5.5	1.44 V	31	69.9	-1.4
4	2483.50	53.8 AV	54.0	-0.2	1.44 V	31	55.2	-1.4
5	4924.00	45.6 PK	74.0	-28.4	1.22 V	1	42.3	3.3
6	4924.00	33.3 AV	54.0	-20.7	1.22 V	1	30.0	3.3
7	7386.00	42.1 PK	74.0	-31.9	1.10 V	193	33.0	9.1
8	7386.00	30.0 AV	54.0	-24.0	1.10 V	193	20.9	9.1

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " * ": Fundamental frequency.

VHT40

CHANNEL	TX Channel 3	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 25GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2390.00	44.3 PK	74.0	-29.7	1.06 H	178	45.9	-1.6
2	2390.00	39.8 AV	54.0	-14.2	1.06 H	178	41.4	-1.6
3	*2422.00	100.4 PK			1.06 H	178	102.0	-1.6
4	*2422.00	90.8 AV			1.06 H	178	92.4	-1.6
5	4844.00	37.2 PK	74.0	-36.8	1.50 H	165	34.1	3.1
6	4844.00	25.4 AV	54.0	-28.6	1.50 H	165	22.3	3.1
7	7266.00	39.6 PK	74.0	-34.4	1.83 H	214	30.7	8.9
8	7266.00	27.1 AV	54.0	-26.9	1.83 H	214	18.2	8.9

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2390.00	68.2 PK	74.0	-5.8	1.46 V	29	69.8	-1.6
2	2390.00	53.9 AV	54.0	-0.1	1.46 V	29	55.5	-1.6
3	*2422.00	112.5 PK			1.46 V	29	114.1	-1.6
4	*2422.00	102.3 AV			1.46 V	29	103.9	-1.6
5	4844.00	38.9 PK	74.0	-35.1	3.04 V	14	35.8	3.1
6	4844.00	26.2 AV	54.0	-27.8	3.04 V	14	23.1	3.1
7	7266.00	43.8 PK	74.0	-30.2	1.31 V	153	34.9	8.9
8	7266.00	30.6 AV	54.0	-23.4	1.31 V	153	21.7	8.9

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " * ": Fundamental frequency.

CHANNEL	TX Channel 6	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 25GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2390.00	56.1 PK	74.0	-17.9	1.05 H	173	57.7	-1.6
2	2390.00	43.1 AV	54.0	-10.9	1.05 H	173	44.7	-1.6
3	*2437.00	106.1 PK			1.05 H	173	107.6	-1.5
4	*2437.00	96.2 AV			1.05 H	173	97.7	-1.5
5	2483.50	59.5 PK	74.0	-14.5	1.05 H	173	60.9	-1.4
6	2483.50	42.9 AV	54.0	-11.1	1.05 H	173	44.3	-1.4
7	4874.00	41.3 PK	74.0	-32.7	1.45 H	165	38.1	3.2
8	4874.00	29.4 AV	54.0	-24.6	1.45 H	165	26.2	3.2
9	7311.00	44.7 PK	74.0	-29.3	1.81 H	211	35.8	8.9
10	7311.00	32.0 AV	54.0	-22.0	1.81 H	211	23.1	8.9

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2390.00	67.3 PK	74.0	-6.7	1.48 V	34	68.9	-1.6
2	2390.00	52.8 AV	54.0	-1.2	1.48 V	34	54.4	-1.6
3	*2437.00	118.3 PK			1.48 V	34	119.8	-1.5
4	*2437.00	108.2 AV			1.48 V	34	109.7	-1.5
5	2483.50	70.3 PK	74.0	-3.7	1.48 V	34	71.7	-1.4
6	2483.50	53.9 AV	54.0	-0.1	1.48 V	34	55.3	-1.4
7	4874.00	42.5 PK	74.0	-31.5	2.84 V	359	39.3	3.2
8	4874.00	30.0 AV	54.0	-24.0	2.84 V	359	26.8	3.2
9	7311.00	45.4 PK	74.0	-28.6	1.49 V	136	36.5	8.9
10	7311.00	33.2 AV	54.0	-20.8	1.49 V	136	24.3	8.9

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " * ": Fundamental frequency.

CHANNEL	TX Channel 9	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 25GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2452.00	104.5 PK			1.01 H	165	106.0	-1.5
2	*2452.00	94.6 AV			1.01 H	165	96.1	-1.5
3	2483.50	67.1 PK	74.0	-6.9	1.01 H	165	68.5	-1.4
4	2483.50	40.3 AV	54.0	-13.7	1.01 H	165	41.7	-1.4
5	4904.00	39.8 PK	74.0	-34.2	1.43 H	164	36.6	3.2
6	4904.00	27.9 AV	54.0	-26.1	1.43 H	164	24.7	3.2
7	7356.00	42.6 PK	74.0	-31.4	1.82 H	217	33.5	9.1
8	7356.00	30.4 AV	54.0	-23.6	1.82 H	217	21.3	9.1

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2452.00	116.2 PK			1.52 V	31	117.7	-1.5
2	*2452.00	106.5 AV			1.52 V	31	108.0	-1.5
3	2483.50	70.1 PK	74.0	-3.9	1.52 V	31	71.5	-1.4
4	2483.50	53.8 AV	54.0	-0.2	1.52 V	31	55.2	-1.4
5	4904.00	41.9 PK	74.0	-32.1	2.61 V	7	38.7	3.2
6	4904.00	29.3 AV	54.0	-24.7	2.61 V	7	26.1	3.2
7	7356.00	45.8 PK	74.0	-28.2	1.85 V	114	36.7	9.1
8	7356.00	32.9 AV	54.0	-21.1	1.85 V	114	23.8	9.1

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " * ": Fundamental frequency.

Below 1GHz Data:

802.11b

CHANNEL	TX Channel 6	DETECTOR FUNCTION	Quasi-Peak (QP)
FREQUENCY RANGE	9kHz ~ 1GHz		

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	122.90	32.1 QP	43.5	-11.4	3.00 H	257	41.9	-9.8
2	374.98	33.1 QP	46.0	-12.9	2.00 H	59	39.0	-5.9
3	488.47	35.7 QP	46.0	-10.3	1.50 H	180	39.0	-3.3
4	570.90	28.1 QP	46.0	-17.9	1.50 H	159	29.7	-1.6
5	735.21	29.4 QP	46.0	-16.6	2.50 H	281	28.3	1.1
6	937.46	32.0 QP	46.0	-14.0	1.50 H	218	28.5	3.5

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	59.92	27.9 QP	40.0	-12.1	1.50 V	80	36.5	-8.6
2	128.38	29.2 QP	43.5	-14.3	3.00 V	232	38.8	-9.6
3	375.03	33.7 QP	46.0	-12.3	2.00 V	158	39.6	-5.9
4	416.13	36.3 QP	46.0	-9.7	1.00 V	352	41.2	-4.9
5	500.01	36.7 QP	46.0	-9.3	1.50 V	346	39.7	-3.0
6	874.99	32.1 QP	46.0	-13.9	2.50 V	360	29.5	2.6

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value

4.2 Conducted Emission Measurement

4.2.1 Limits of Conducted Emission Measurement

Frequency (MHz)	Conducted Limit (dBuV)	
	Quasi-peak	Average
0.15 - 0.5	66 - 56	56 - 46
0.50 - 5.0	56	46
5.0 - 30.0	60	50

Note: 1. The lower limit shall apply at the transition frequencies.

2. The limit decreases in line with the logarithm of the frequency in the range of 0.15 to 0.50MHz.

4.2.2 Test Instruments

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	CALIBRATED DATE	CALIBRATED UNTIL
Test Receiver R&S	ESCS 30	847124/029	Oct. 24, 2016	Oct. 23, 2017
Line-Impedance Stabilization Network (for EUT) R&S	ESH3-Z5	848773/004	Oct. 26, 2016	Oct. 25, 2017
Line-Impedance Stabilization Network (for Peripheral) R&S	ENV216	100072	June 03, 2017	June 02, 2018
50 ohms Terminator	N/A	EMC-02	Sep. 22, 2017	Sep. 21, 2018
RF Cable	5D-FB	COCCAB-001	Sep. 29, 2017	Sep. 28, 2018
10 dB PAD Mini-Circuits	HAT-10+	CONATT-004	June 18, 2017	June 17, 2018
Software BVADT	BVADT_Cond_ V7.3.7.4	NA	NA	NA

Note:

1. The calibration interval of the above test instruments are 12 months and the calibrations are traceable to NML/ROC and NIST/USA.
2. The test was performed in Shielded Room No. 1.
- 3 Tested Date: Oct. 23, 2017

4.2.3 Test Procedures


- The EUT was placed 0.4 meters from the conducting wall of the shielded room with EUT being connected to the power mains through a line impedance stabilization network (LISN). Other support units were connected to the power mains through another LISN. The two LISNs provide 50 ohm/ 50uH of coupling impedance for the measuring instrument.
- Both lines of the power mains connected to the EUT were checked for maximum conducted interference.
- The frequency range from 150kHz to 30MHz was searched. Emission levels under (Limit - 20dB) was not recorded.

NOTE: The resolution bandwidth and video bandwidth of test receiver is 9kHz for quasi-peak detection (QP) and average detection (AV) at frequency 0.15MHz-30MHz.

4.2.4 Deviation from Test Standard

No deviation.

4.2.5 Test Setup

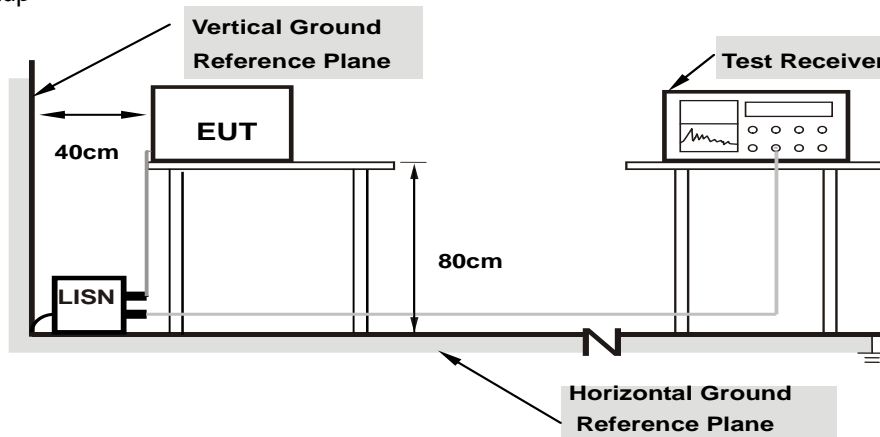

Note: 1.Support units were connected to second LISN.

For the actual test configuration, please refer to the attached file (Test Setup Photo).

4.2.6 EUT Operating Conditions

Same as 4.1.6.


4.2.7 Test Results (Mode 1)

Phase	Line (L)	Detector Function	Quasi-Peak (QP) / Average (AV)
-------	----------	-------------------	--------------------------------

No	Freq. [MHz]	Corr. Factor	Reading Value [dB (uV)]		Emission Level [dB (uV)]		Limit [dB (uV)]		Margin (dB)	
		(dB)	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
	1	0.15000	10.07	37.66	23.79	47.73	33.86	66.00	56.00	-18.27
2	0.18125	10.06	31.30	19.23	41.36	29.29	64.43	54.43	-23.07	-25.14
3	0.44688	10.11	38.72	32.13	48.83	42.24	56.93	46.93	-8.10	-4.69
4	0.50547	10.12	30.10	24.70	40.22	34.82	56.00	46.00	-15.78	-11.18
5	2.67969	10.19	27.78	20.40	37.97	30.59	56.00	46.00	-18.03	-15.41
6	5.96875	10.40	27.88	22.49	38.28	32.89	60.00	50.00	-21.72	-17.11

REMARKS:

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. The emission levels of other frequencies were very low against the limit.
3. Margin value = Emission level - Limit value
4. Correction factor = Insertion loss + Cable loss
5. Emission Level = Correction Factor + Reading Value.

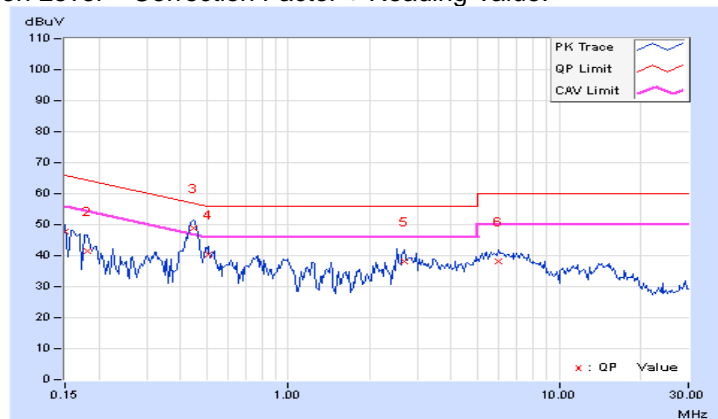


Phase	Neutral (N)	Detector Function	Quasi-Peak (QP) / Average (AV)
-------	-------------	-------------------	--------------------------------

No	Freq. [MHz]	Corr.	Reading Value		Emission Level		Limit		Margin	
		Factor	[dB (uV)]		[dB (uV)]		[dB (uV)]		(dB)	
	(dB)	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	
1	0.15000	10.06	36.89	23.71	46.95	33.77	66.00	56.00	-19.05	-22.23
2	0.44297	10.10	39.02	32.64	49.12	42.74	57.01	47.01	-7.89	-4.27
3	0.76719	10.11	26.33	20.91	36.44	31.02	56.00	46.00	-19.56	-14.98
4	2.68359	10.19	28.18	20.61	38.37	30.80	56.00	46.00	-17.63	-15.20
5	7.08203	10.39	27.25	22.23	37.64	32.62	60.00	50.00	-22.36	-17.38
6	13.46484	10.72	21.02	16.51	31.74	27.23	60.00	50.00	-28.26	-22.77

REMARKS:

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. The emission levels of other frequencies were very low against the limit.
3. Margin value = Emission level - Limit value
4. Correction factor = Insertion loss + Cable loss
5. Emission Level = Correction Factor + Reading Value.

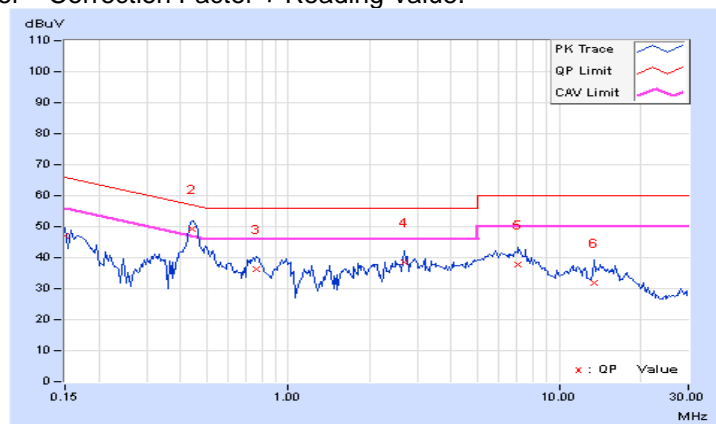


4.2.8 Test Results (Mode 2)

Phase	Line (L)	Detector Function	Quasi-Peak (QP) / Average (AV)
-------	----------	-------------------	--------------------------------

No	Freq. [MHz]	Corr. Factor	Reading Value [dB (uV)]		Emission Level [dB (uV)]		Limit [dB (uV)]		Margin (dB)	
		(dB)	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
	1	0.17344	10.07	33.50	18.78	43.57	28.85	64.79	54.79	-21.22
2	0.22812	10.07	24.84	14.87	34.91	24.94	62.52	52.52	-27.61	-27.58
3	0.30625	10.09	22.13	11.12	32.22	21.21	60.07	50.07	-27.85	-28.86
4	0.39219	10.11	31.41	29.82	41.52	39.93	58.02	48.02	-16.50	-8.09
5	14.97656	10.96	26.83	18.51	37.79	29.47	60.00	50.00	-22.21	-20.53
6	16.45703	11.06	26.26	18.12	37.32	29.18	60.00	50.00	-22.68	-20.82

REMARKS:

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. The emission levels of other frequencies were very low against the limit.
3. Margin value = Emission level - Limit value
4. Correction factor = Insertion loss + Cable loss
5. Emission Level = Correction Factor + Reading Value.

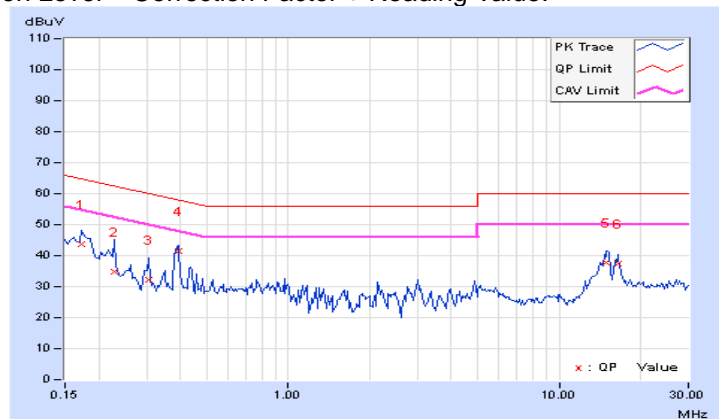


Phase	Neutral (N)	Detector Function	Quasi-Peak (QP) / Average (AV)
-------	-------------	-------------------	--------------------------------

No	Freq. [MHz]	Corr. Factor	Reading Value [dB (uV)]		Emission Level [dB (uV)]		Limit [dB (uV)]		Margin (dB)	
		(dB)	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
	1	0.17881	10.04	34.23	23.55	44.27	33.59	64.54	54.54	-20.27
2	0.20078	10.03	23.52	11.77	33.55	21.80	63.58	53.58	-30.03	-31.78
3	0.28672	10.06	14.46	3.82	24.52	13.88	60.62	50.62	-36.10	-36.74
4	0.39472	10.10	29.74	27.74	39.84	37.84	57.96	47.96	-18.12	-10.12
5	3.31641	10.21	17.95	9.14	28.16	19.35	56.00	46.00	-27.84	-26.65
6	14.91016	10.79	28.48	20.93	39.27	31.72	60.00	50.00	-20.73	-18.28

REMARKS:

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. The emission levels of other frequencies were very low against the limit.
3. Margin value = Emission level - Limit value
4. Correction factor = Insertion loss + Cable loss
5. Emission Level = Correction Factor + Reading Value.

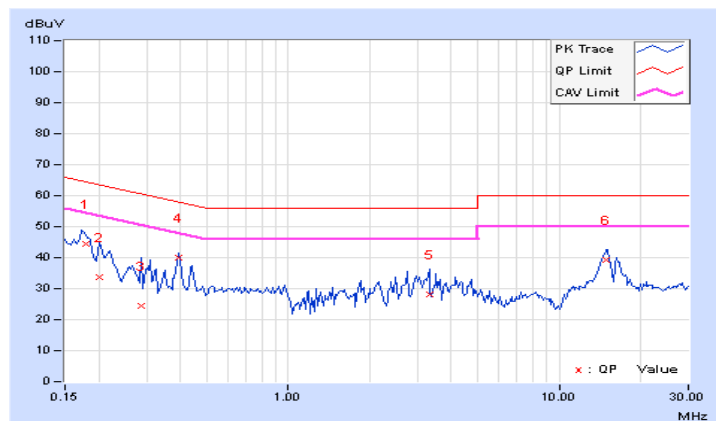


4.2.9 Test Results (Mode 3)

Phase	Line (L)	Detector Function	Quasi-Peak (QP) / Average (AV)
-------	----------	-------------------	--------------------------------

No	Freq. [MHz]	Corr. Factor	Reading Value [dB (uV)]		Emission Level [dB (uV)]		Limit [dB (uV)]		Margin (dB)	
		(dB)	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
	1	0.15391	10.07	27.82	16.38	37.89	26.45	65.79	55.79	-27.90
2	0.26328	10.08	27.27	21.11	37.35	31.19	61.33	51.33	-23.98	-20.14
3	0.34141	10.10	33.79	28.20	43.89	38.30	59.17	49.17	-15.28	-10.87
4	0.37656	10.10	32.84	26.63	42.94	36.73	58.35	48.35	-15.41	-11.62
5	6.71484	10.44	31.55	19.31	41.99	29.75	60.00	50.00	-18.01	-20.25
6	9.60938	10.59	35.62	22.19	46.21	32.78	60.00	50.00	-13.79	-17.22

REMARKS:

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. The emission levels of other frequencies were very low against the limit.
3. Margin value = Emission level - Limit value
4. Correction factor = Insertion loss + Cable loss
5. Emission Level = Correction Factor + Reading Value.

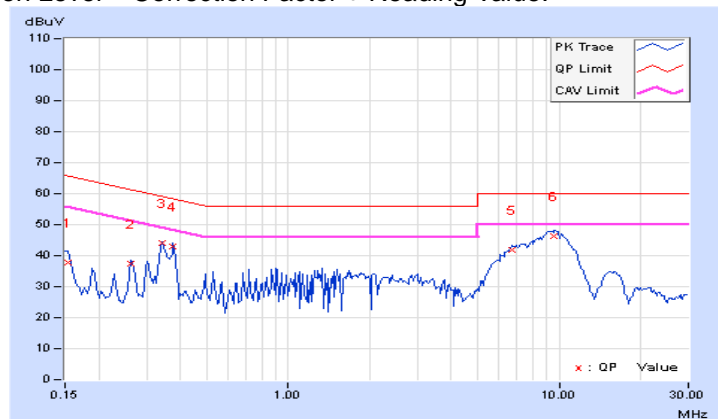


Phase	Neutral (N)	Detector Function	Quasi-Peak (QP) / Average (AV)
-------	-------------	-------------------	--------------------------------

No	Freq. [MHz]	Corr.	Reading Value		Emission Level		Limit		Margin	
		Factor	[dB (uV)]		[dB (uV)]		[dB (uV)]		(dB)	
	(dB)	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	
1	0.15391	10.06	28.18	17.04	38.24	27.10	65.79	55.79	-27.55	-28.69
2	0.26328	10.05	27.82	21.57	37.87	31.62	61.33	51.33	-23.46	-19.71
3	0.34141	10.08	33.85	28.12	43.93	38.20	59.17	49.17	-15.24	-10.97
4	0.37656	10.09	33.06	26.89	43.15	36.98	58.35	48.35	-15.20	-11.37
5	7.13672	10.39	33.22	19.03	43.61	29.42	60.00	50.00	-16.39	-20.58
6	9.33984	10.51	35.94	23.32	46.45	33.83	60.00	50.00	-13.55	-16.17

REMARKS:

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. The emission levels of other frequencies were very low against the limit.
3. Margin value = Emission level - Limit value
4. Correction factor = Insertion loss + Cable loss
5. Emission Level = Correction Factor + Reading Value.

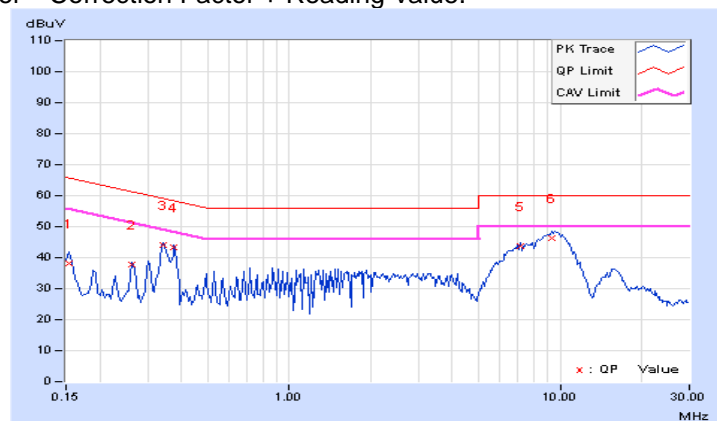


4.3 6dB Bandwidth Measurement

4.3.1 Limits of 6dB Bandwidth Measurement

The minimum of 6dB Bandwidth Measurement is 0.5 MHz.

4.3.2 Test Setup



4.3.3 Test Instruments

Refer to section 4.1.2 to get information of above instrument.

4.3.4 Test Procedure

- a. Set resolution bandwidth (RBW) = 100kHz
- b. Set the video bandwidth (VBW) $\geq 3 \times$ RBW, Detector = Peak.
- c. Trace mode = max hold.
- d. Sweep = auto couple.
- e. Measure the maximum width of the emission that is constrained by the frequencies associated with the two amplitude points (upper and lower) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission

4.3.5 Deviation from Test Standard

No deviation.

4.3.6 EUT Operating Conditions

The software provided by client to enable the EUT under transmission condition continuously at lowest, middle and highest channel frequencies individually.

4.3.7 Test Result

802.11b

Channel	Frequency (MHz)	6dB Bandwidth (MHz)		Minimum Limit (MHz)	Pass / Fail
		Chain 0	Chain 1		
1	2412	8.11	7.63	0.5	PASS
6	2437	8.55	8.55	0.5	PASS
11	2462	8.59	8.56	0.5	PASS

802.11g

Channel	Frequency (MHz)	6dB Bandwidth (MHz)		Minimum Limit (MHz)	Pass / Fail
		Chain 0	Chain 1		
1	2412	16.39	16.40	0.5	PASS
6	2437	16.00	15.81	0.5	PASS
11	2462	16.41	16.40	0.5	PASS

VHT20


Channel	Frequency (MHz)	6dB Bandwidth (MHz)		Minimum Limit (MHz)	Pass / Fail
		Chain 0	Chain 1		
1	2412	17.59	17.00	0.5	Pass
6	2437	17.62	17.03	0.5	Pass
11	2462	17.64	17.61	0.5	Pass

VHT40


Channel	Frequency (MHz)	6dB Bandwidth (MHz)		Minimum Limit (MHz)	Pass / Fail
		Chain 0	Chain 1		
3	2422	35.26	35.52	0.5	Pass
6	2437	35.28	35.17	0.5	Pass
9	2452	35.25	35.26	0.5	Pass

Spectrum Plot of Worst Value


802.11b / Chain 1 : CH1

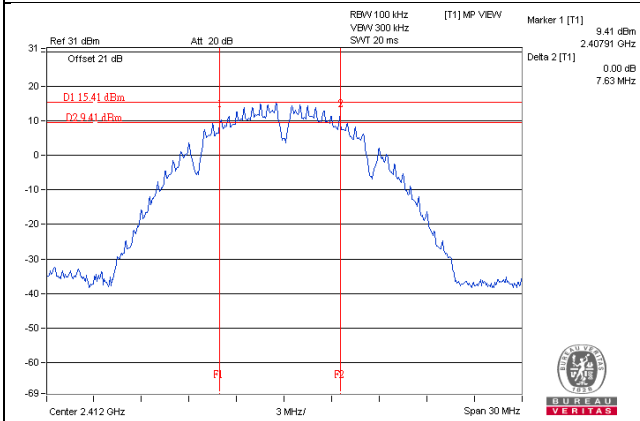


802.11g / Chain 1 : CH6

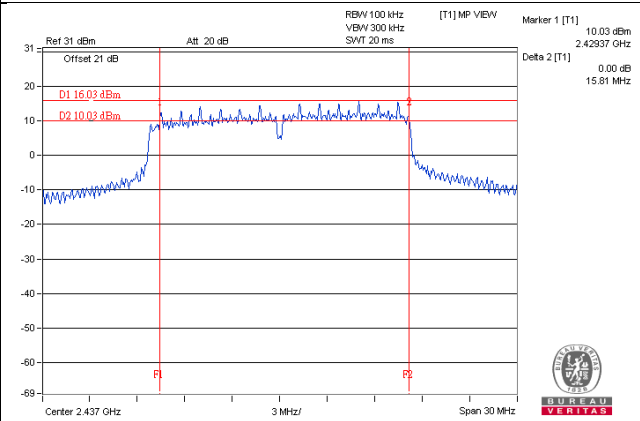

VHT20 / Chain 1 : CH1

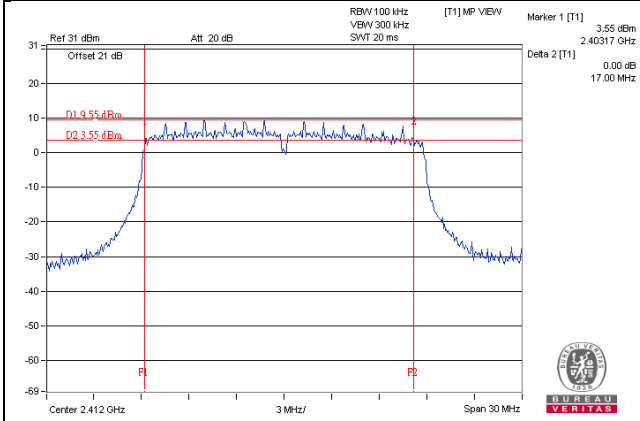

VHT40 / Chain 1 : CH6

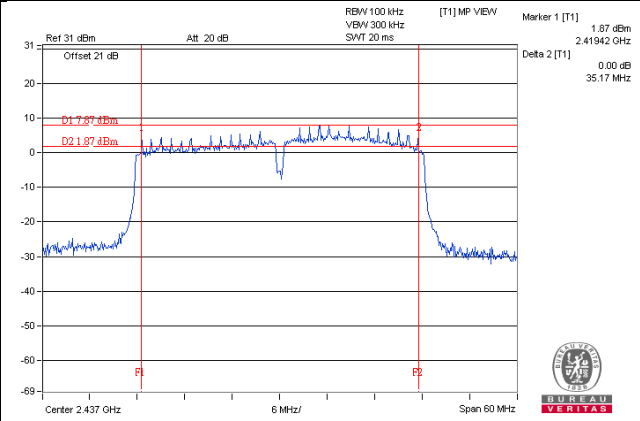

4.4 Conducted Output Power Measurement

4.4.1 Limits of Conducted Output Power Measurement

For systems using digital modulation in the 2400–2483.5 MHz bands: 1 Watt (30dBm)

Per KDB 662911 D01 Multiple Transmitter Output Method of conducted output power measurement on IEEE 802.11 devices,


Array Gain = 0 dB (i.e., no array gain) for $N_{ANT} \leq 4$;

Array Gain = 0 dB (i.e., no array gain) for channel widths ≥ 40 MHz for any N_{ANT} ;

Array Gain = $5 \log(N_{ANT}/N_{SS})$ dB or 3 dB, whichever is less for 20-MHz channel widths with $N_{ANT} \geq 5$.

For power measurements on all other devices: Array Gain = $10 \log(N_{ANT}/N_{SS})$ dB.

4.4.2 Test Setup



4.4.3 Test Instruments

Refer to section 4.1.2 to get information of above instrument.

4.4.4 Test Procedures

A average power sensor was used on the output port of the EUT. A power meter was used to read the response of the average power sensor. Record the power level.

4.4.5 Deviation from Test Standard

No deviation.

4.4.6 EUT Operating Conditions

Same as Item 4.3.6.

4.4.7 Test Results

CDD Mode

802.11b

Chan.	Freq. (MHz)	Average Power (dBm)		Total Power (mW)	Total Power (dBm)	Limit (dBm)	Pass / Fail
		Chain 0	Chain 1				
1	2412	23.25	23.73	447.397	26.51	30.00	Pass
6	2437	24.27	24.71	563.102	27.51	30.00	Pass
11	2462	23.26	23.85	454.497	26.58	30.00	Pass

802.11g

Chan.	Freq. (MHz)	Average Power (dBm)		Total Power (mW)	Total Power (dBm)	Limit (dBm)	Pass / Fail
		Chain 0	Chain 1				
1	2412	19.38	19.67	179.379	22.54	30.00	Pass
6	2437	25.13	25.38	670.981	28.27	30.00	Pass
11	2462	20.25	20.96	230.663	23.63	30.00	Pass

VHT20

Chan.	Freq. (MHz)	Average Power (dBm)		Total Power (mW)	Total Power (dBm)	Limit (dBm)	Pass / Fail
		Chain 0	Chain 1				
1	2412	20.16	20.63	219.364	23.41	30.00	Pass
6	2437	25.01	25.35	659.725	28.19	30.00	Pass
11	2462	19.23	19.93	182.154	22.60	30.00	Pass

VHT40

Chan.	Freq. (MHz)	Average Power (dBm)		Total Power (mW)	Total Power (dBm)	Limit (dBm)	Pass / Fail
		Chain 0	Chain 1				
3	2422	16.06	16.41	84.117	19.25	30.00	Pass
6	2437	20.30	20.81	227.656	23.57	30.00	Pass
9	2452	18.81	19.12	157.691	21.98	30.00	Pass

Beamforming Mode

VHT20

Chan.	Freq. (MHz)	Average Power (dBm)		Total Power (mW)	Total Power (dBm)	Limit (dBm)	Pass / Fail
		Chain 0	Chain 1				
1	2412	20.16	20.63	219.364	23.41	28.79	Pass
6	2437	25.01	25.35	659.725	28.19	28.79	Pass
11	2462	19.23	19.93	182.154	22.60	28.79	Pass

Note: 1. Directional gain = $4.20\text{dBi} + 10\log(2) = 7.21\text{dBi} > 6\text{dBi}$, so the power limit shall be reduced to $30 - (7.21 - 6) = 28.79\text{dBm}$

VHT40

Chan.	Freq. (MHz)	Average Power (dBm)		Total Power (mW)	Total Power (dBm)	Limit (dBm)	Pass / Fail
		Chain 0	Chain 1				
3	2422	16.06	16.41	84.117	19.25	28.79	Pass
6	2437	20.30	20.81	227.656	23.57	28.79	Pass
9	2452	18.81	19.12	157.691	21.98	28.79	Pass


Note: 1. Directional gain = $4.20\text{dBi} + 10\log(2) = 7.21\text{dBi} > 6\text{dBi}$, so the power limit shall be reduced to $30 - (7.21 - 6) = 28.79\text{dBm}$

4.5 Power Spectral Density Measurement

4.5.1 Limits of Power Spectral Density Measurement

The Maximum of Power Spectral Density Measurement is 8dBm in any 3 kHz.

4.5.2 Test Setup



4.5.3 Test Instruments

Refer to section 4.1.2 to get information of above instrument.

4.5.4 Test Procedure

For 802.11b, VHT20

- Set instrument center frequency to DTS channel center frequency.
- Set span to at least 1.5 times the OBW.
- Set RBW to: $3 \text{ kHz} \leq \text{RBW} \leq 100 \text{ kHz}$.
- Set VBW $\geq 3 \times \text{RBW}$.
- Detector = power averaging (RMS) or sample detector (when RMS not available).
- Ensure that the number of measurement points in the sweep $\geq 2 \times \text{span}/\text{RBW}$.
- Sweep time = auto couple.
- Employ trace averaging (RMS) mode over a minimum of 100 traces.
- Use the peak marker function to determine the maximum amplitude level.

For 802.11g, VHT40

- Measure the duty cycle (x).
- Set instrument center frequency to DTS channel center frequency.
- Set span to at least 1.5 times the OBW.
- Set RBW to: $3 \text{ kHz} \leq \text{RBW} \leq 100 \text{ kHz}$.
- Set VBW $\geq 3 \times \text{RBW}$.
- Detector = power averaging (RMS) or sample detector (when RMS not available).
- Ensure that the number of measurement points in the sweep $\geq 2 \times \text{span}/\text{RBW}$.
- Sweep time = auto couple.
- Do not use sweep triggering. Allow sweep to "free run".
- Employ trace averaging (RMS) mode over a minimum of 100 traces.
- Use the peak marker function to determine the maximum amplitude level.
- Add $10 \log (1/x)$, where x is the duty cycle measured in step (a), to the measured PSD to compute the average PSD during the actual transmission time.

4.5.5 Deviation from Test Standard

No deviation.

4.5.6 EUT Operating Condition

Same as Item 4.3.6

4.5.7 Test Results

802.11b

TX chain	Channel	Freq. (MHz)	PSD (dBm/3kHz)	10 log (N=2) dB	Total PSD (dBm/3kHz)	Limit (dBm/3kHz)	Pass /Fail
0	1	2412	-7.14	3.01	-4.13	6.79	Pass
	6	2437	-5.16	3.01	-2.15	6.79	Pass
	11	2462	-7.30	3.01	-4.29	6.79	Pass
1	1	2412	-7.53	3.01	-4.52	6.79	Pass
	6	2437	-6.23	3.01	-3.22	6.79	Pass
	11	2462	-6.62	3.01	-3.61	6.79	Pass

Note: 1. Directional gain = $4.20\text{dBi} + 10\log(2) = 7.21\text{dBi} > 6\text{dBi}$, so the power density limit shall be reduced to $8-(7.21-6) = 6.79\text{dBm}$

802.11g

TX chain	Channel	Freq. (MHz)	PSD W/O Duty Factor (dBm/3kHz)	10 log (N=2) dB	Duty Factor (dB)	TOTAL PSD With Duty Factor (dBm/3kHz)	Limit (dBm/3kHz)	Pass /Fail
0	1	2412	-11.80	3.01	0.18	-8.61	6.79	Pass
	6	2437	-7.18	3.01	0.18	-3.99	6.79	Pass
	11	2462	-12.54	3.01	0.18	-9.35	6.79	Pass
1	1	2412	-9.24	3.01	0.18	-6.05	6.79	Pass
	6	2437	-6.86	3.01	0.18	-3.67	6.79	Pass
	11	2462	-11.64	3.01	0.18	-8.45	6.79	Pass

Note: 1. Directional gain = $4.20\text{dBi} + 10\log(2) = 7.21\text{dBi} > 6\text{dBi}$, so the power density limit shall be reduced to $8-(7.21-6) = 6.79\text{dBm}$

2. Refer to section 3.3 for duty cycle spectrum plot.

VHT20

TX chain	Channel	Freq. (MHz)	PSD (dBm/3kHz)	10 log (N=2) dB	Total PSD (dBm/3kHz)	Limit (dBm/3kHz)	Pass /Fail
0	1	2412	-13.19	3.01	-10.18	6.79	Pass
	6	2437	-7.71	3.01	-4.70	6.79	Pass
	11	2462	-12.15	3.01	-9.14	6.79	Pass
1	1	2412	-10.81	3.01	-7.80	6.79	Pass
	6	2437	-6.70	3.01	-3.69	6.79	Pass
	11	2462	-13.01	3.01	-10.00	6.79	Pass

Note: 1. Directional gain = $4.20\text{dBi} + 10\log(2) = 7.21\text{dBi} > 6\text{dBi}$, so the power density limit shall be reduced to $8-(7.21-6) = 6.79\text{dBm}$

VHT40


TX chain	Channel	Freq. (MHz)	PSD W/O Duty Factor (dBm/3kHz)	10 log (N=2) dB	Duty Factor (dB)	TOTAL PSD With Duty Factor (dBm/3kHz)	Limit (dBm/3kHz)	Pass /Fail
0	1	2412	-18.84	3.01	0.16	-15.67	6.79	Pass
	6	2437	-13.93	3.01	0.16	-10.76	6.79	Pass
	11	2462	-15.85	3.01	0.16	-12.68	6.79	Pass
1	1	2412	-18.11	3.01	0.16	-14.94	6.79	Pass
	6	2437	-13.46	3.01	0.16	-10.29	6.79	Pass
	11	2462	-14.33	3.01	0.16	-11.16	6.79	Pass

Note: 1. Directional gain = $4.20\text{dBi} + 10\log(2) = 7.21\text{dBi} > 6\text{dBi}$, so the power density limit shall be reduced to $8-(7.21-6) = 6.79\text{dBm}$


2. Refer to section 3.3 for duty cycle spectrum plot.

Spectrum Plot of Worst Value


802.11b / Chain 0 : CH6

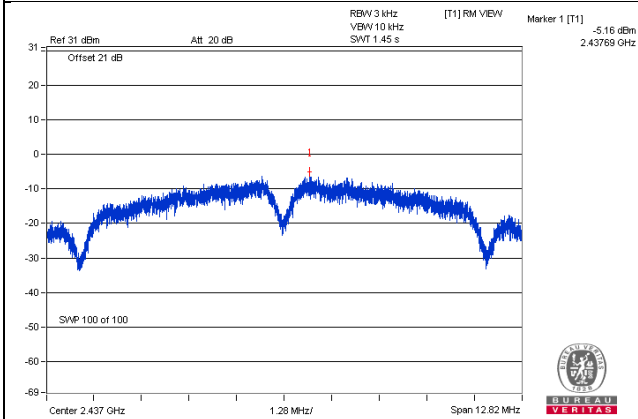


802.11g / Chain 1 : CH6

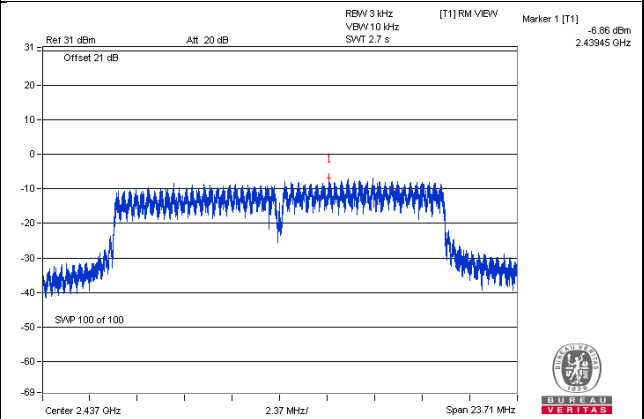

VHT20 / Chain 1 : CH6

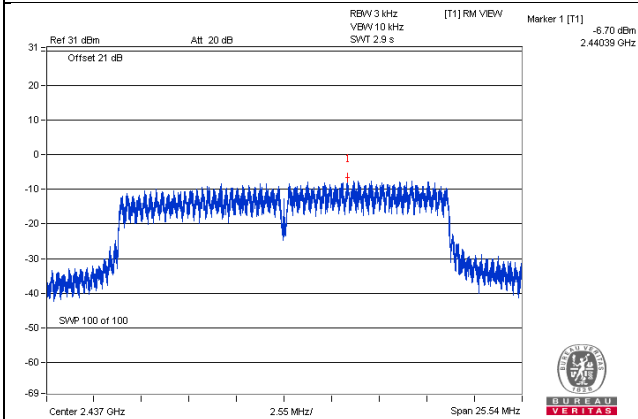

VHT40 / Chain 1 : CH6

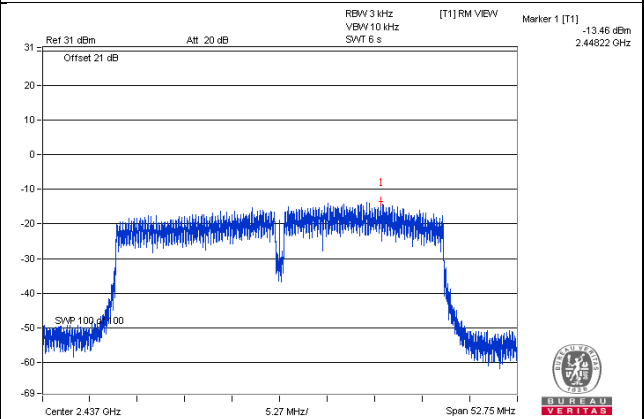


4.6 Conducted Out of Band Emission Measurement

4.6.1 Limits of Conducted Out of Band Emission Measurement

Below 30dB of the highest emission level of operating band (in 100kHz Resolution Bandwidth).

4.6.2 Test Setup



4.6.3 Test Instruments

Refer to section 4.1.2 to get information of above instrument.

4.6.4 Test Procedure

MEASUREMENT PROCEDURE REF

1. Set the RBW = 100 kHz.
2. Set the VBW \geq 300 kHz.
3. Detector = peak.
4. Sweep time = auto couple.
5. Trace mode = max hold.
6. Allow trace to fully stabilize.
7. Use the peak marker function to determine the maximum power level in any 100 kHz band segment within the fundamental EBW.

MEASUREMENT PROCEDURE OOBE

1. Set RBW = 100 kHz.
2. Set VBW \geq 300 kHz.
3. Detector = peak.
4. Sweep = auto couple.
5. Trace Mode = max hold.
6. Allow trace to fully stabilize.
7. Use the peak marker function to determine the maximum amplitude level.

4.6.5 Deviation from Test Standard

No deviation.


4.6.6 EUT Operating Condition

Same as Item 4.3.6


4.6.7 Test Results

The spectrum plots are attached on the following pages. D1 line indicates the highest level, and D2 line indicates the 30dB offset below D1. It shows compliance with the requirement.


802.11b

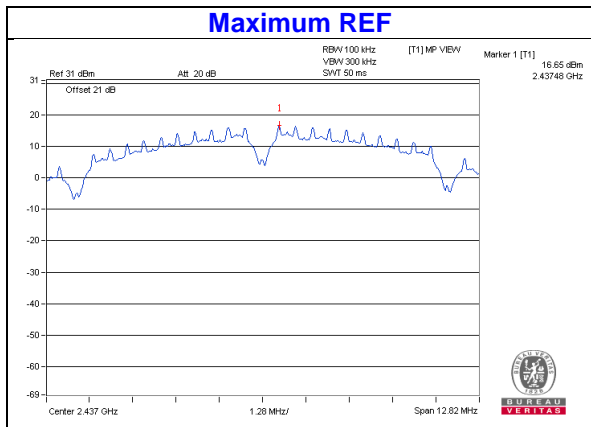


CHAIN 0

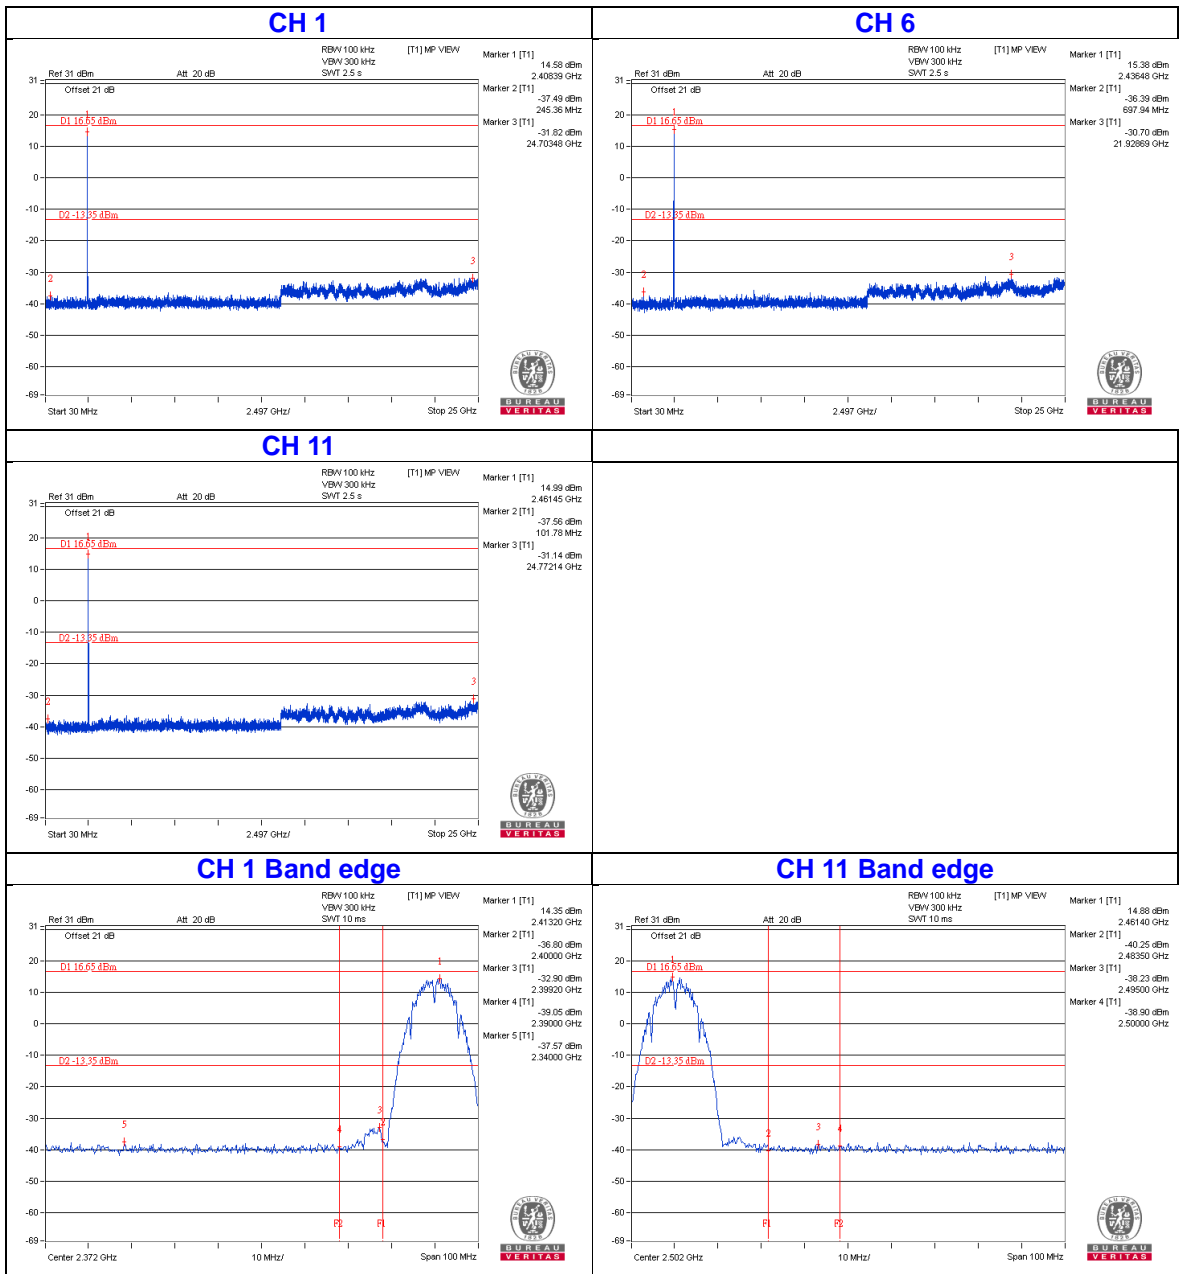




CHAIN 1

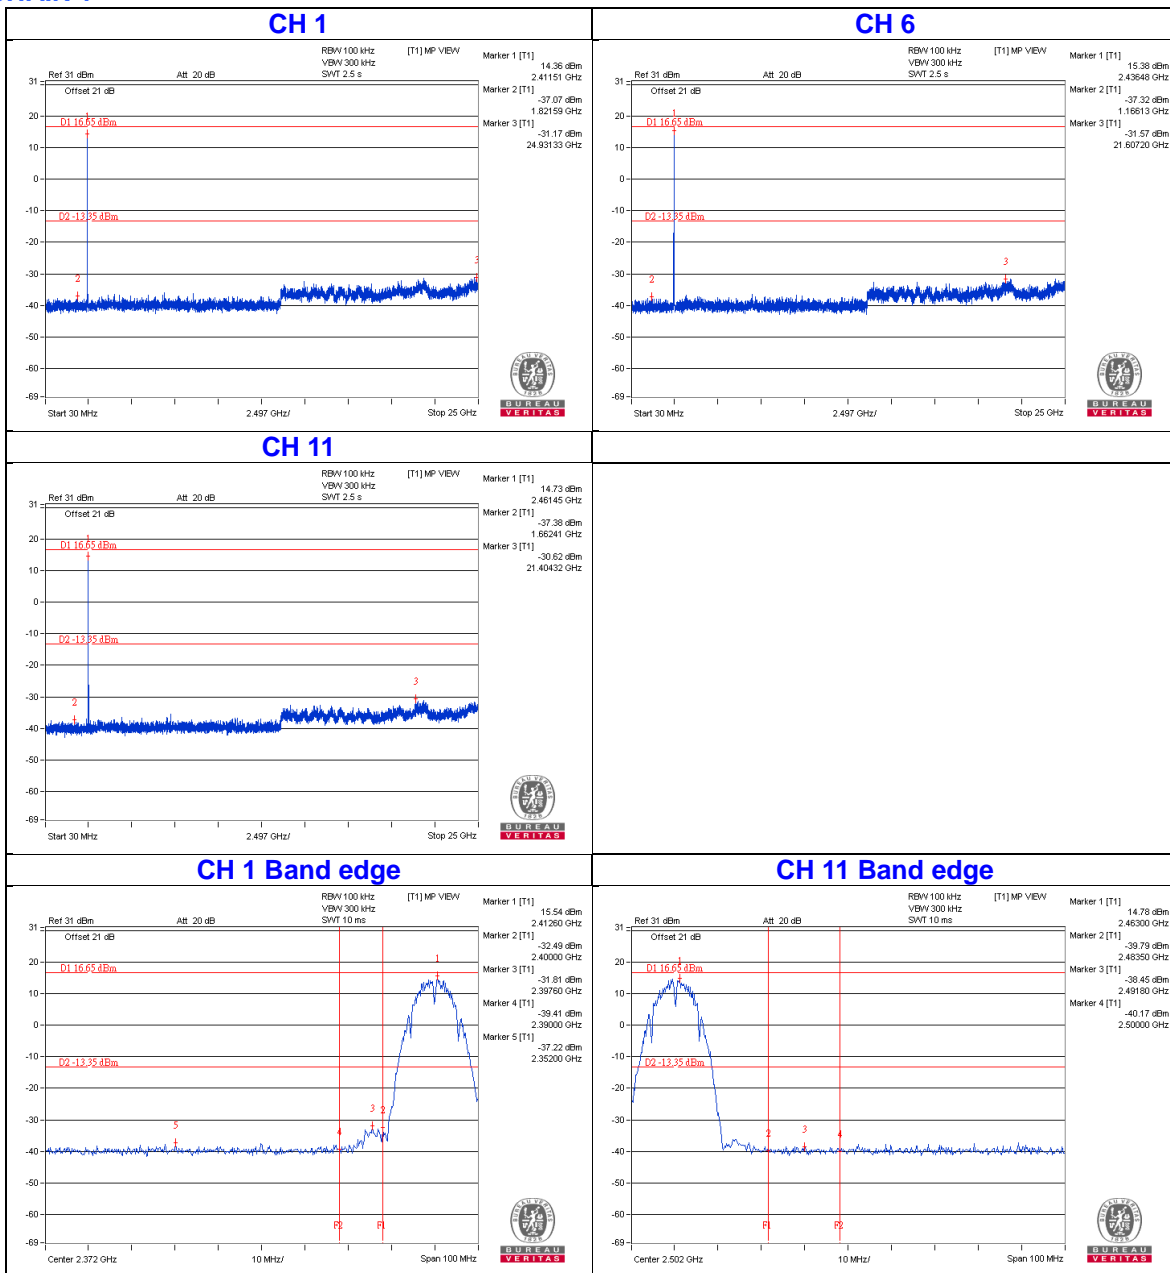






802.11g

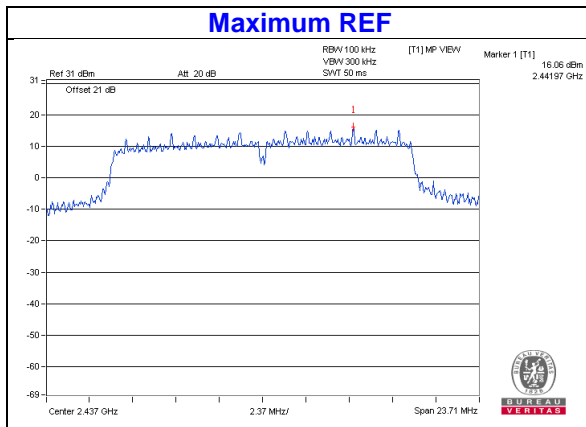


CHAIN 0

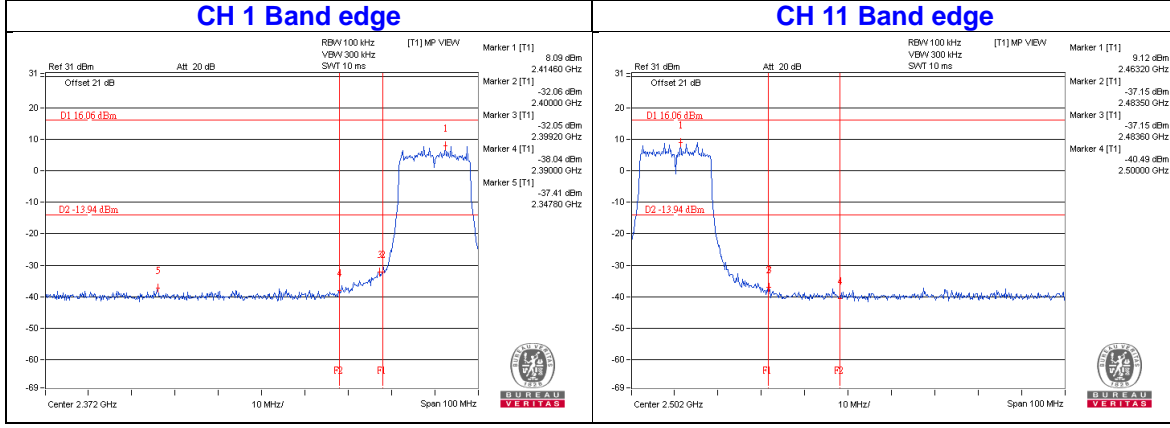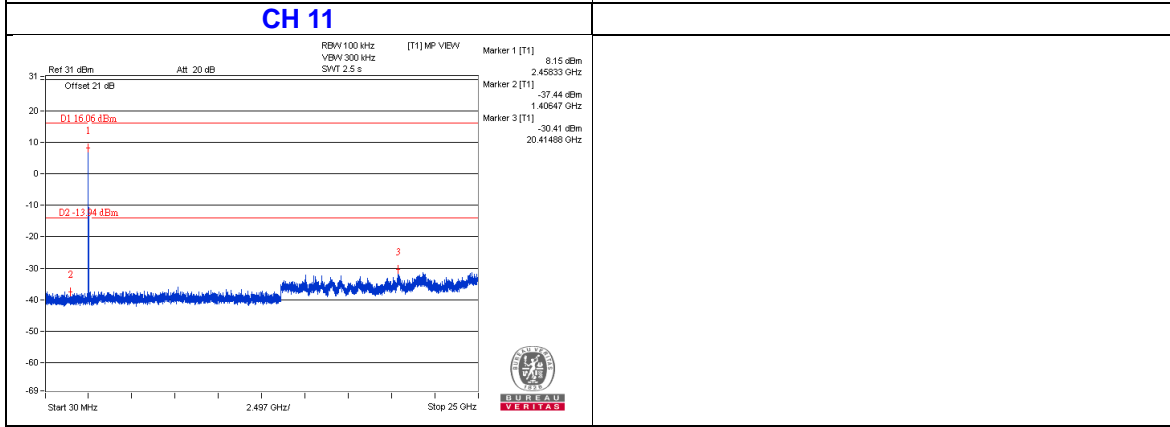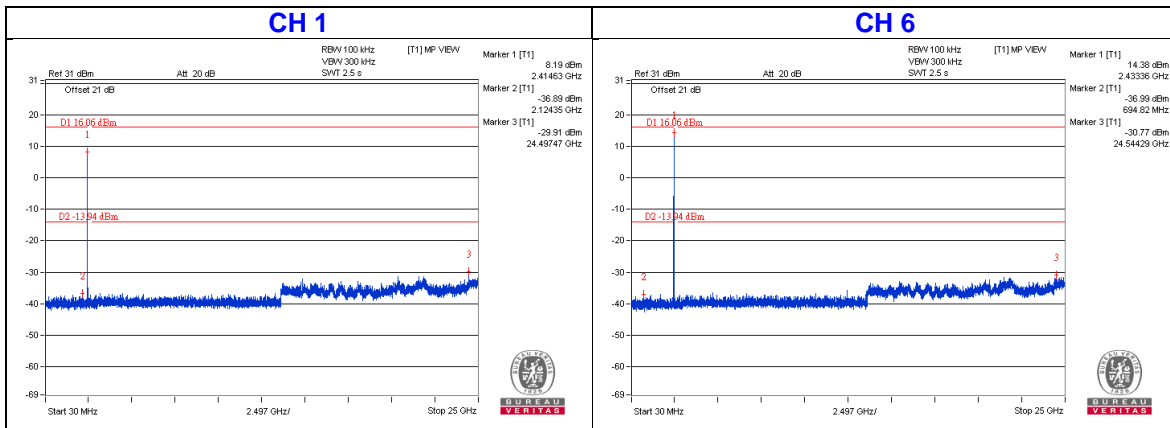


CHAIN 1

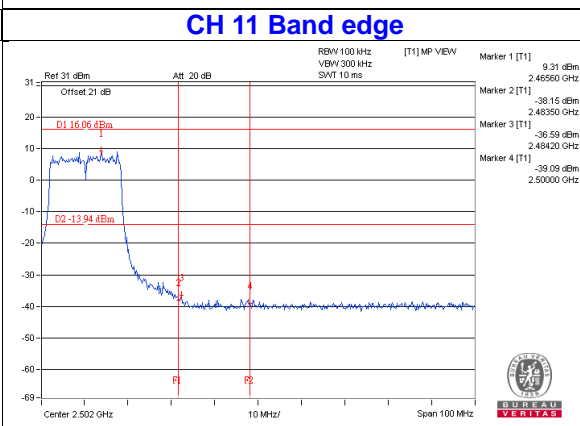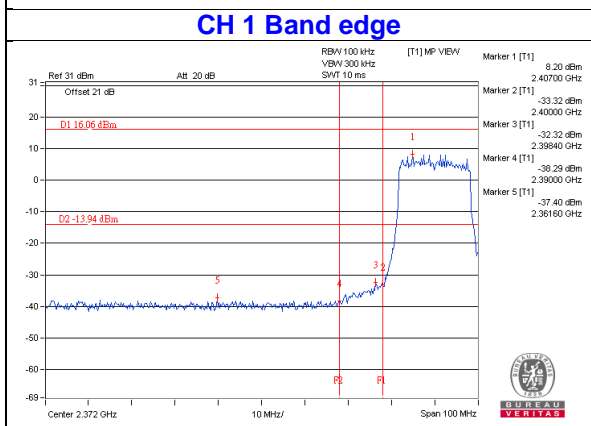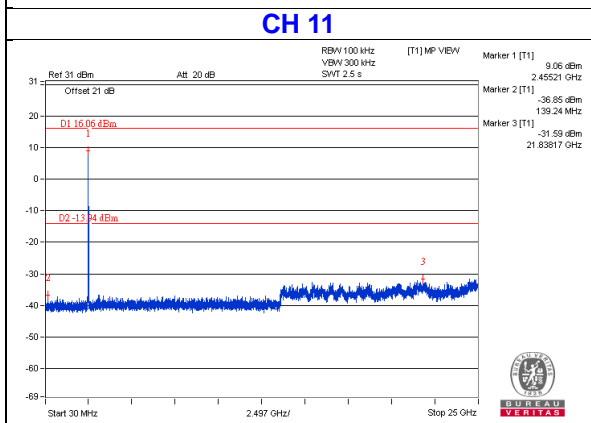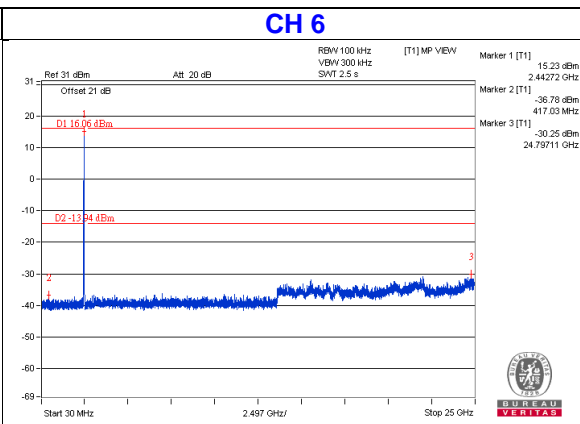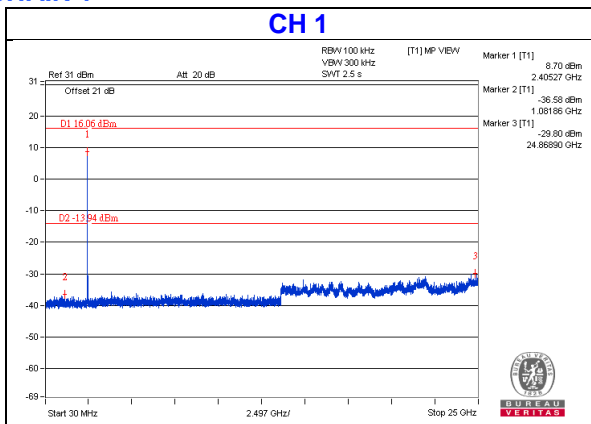


VHT20

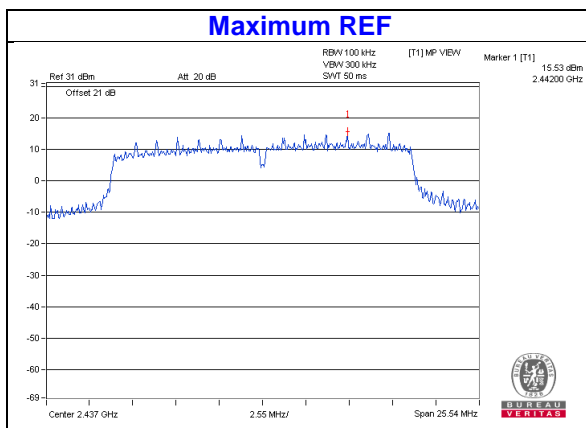


CHAIN 0

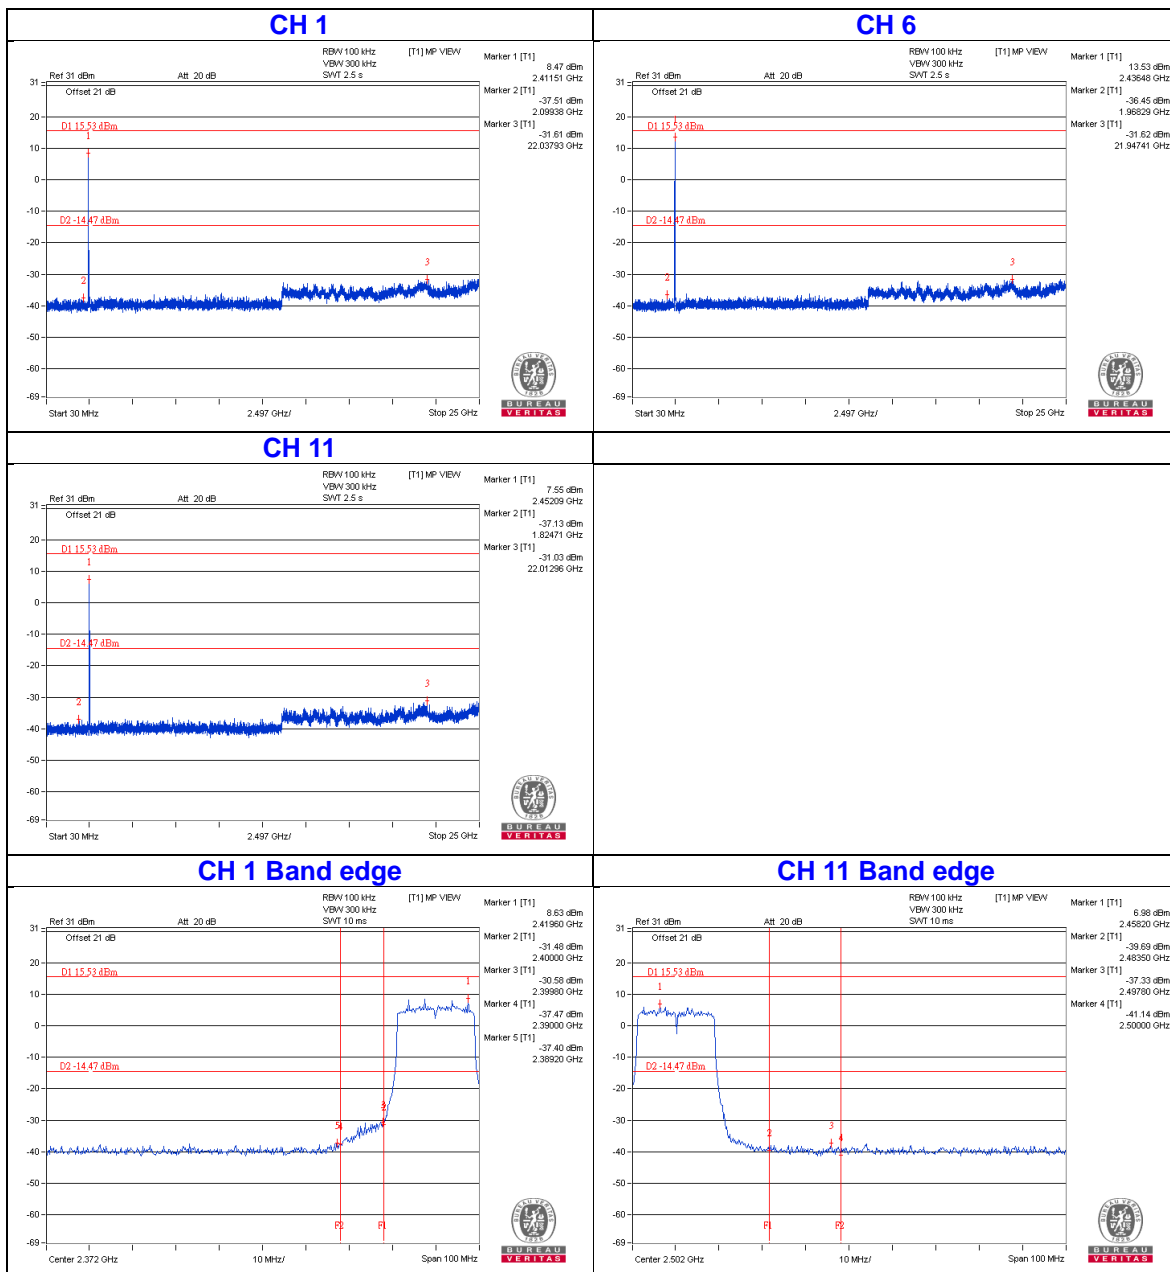


CHAIN 1

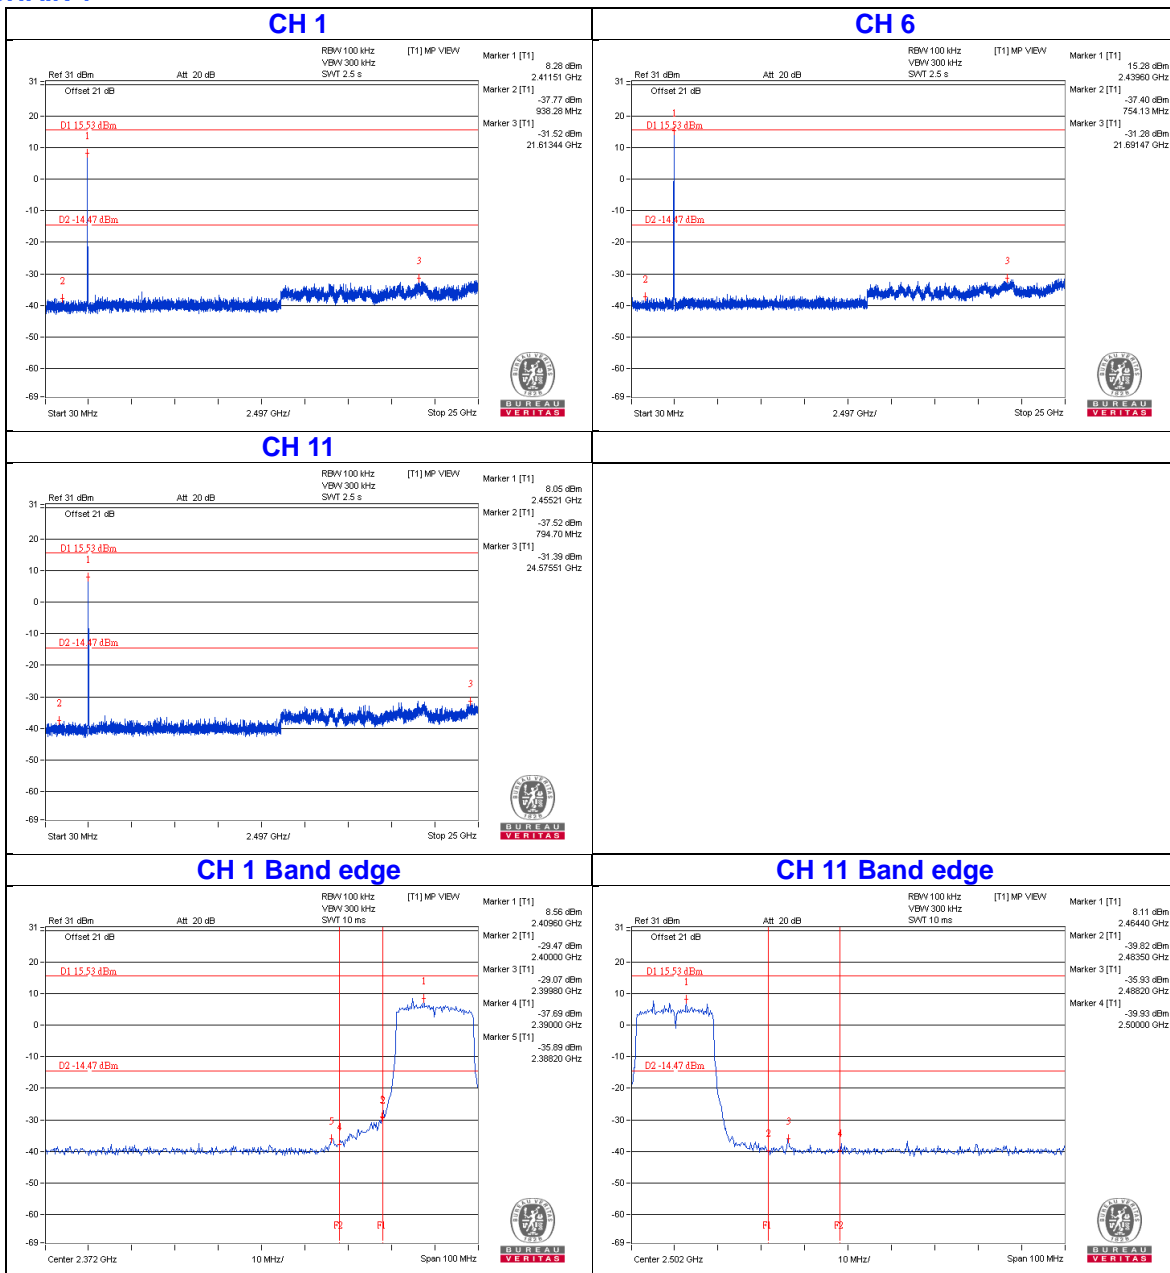


VHT40

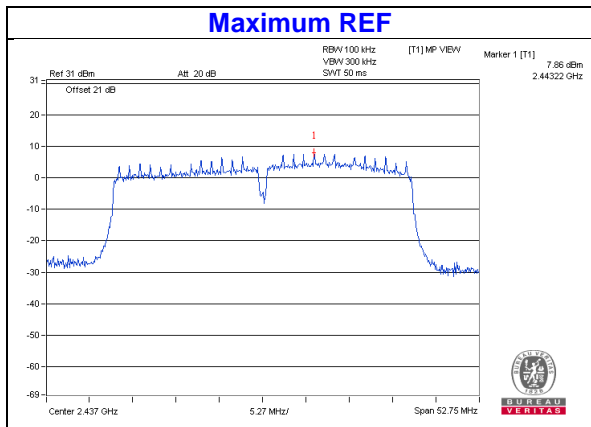

CHAIN 0

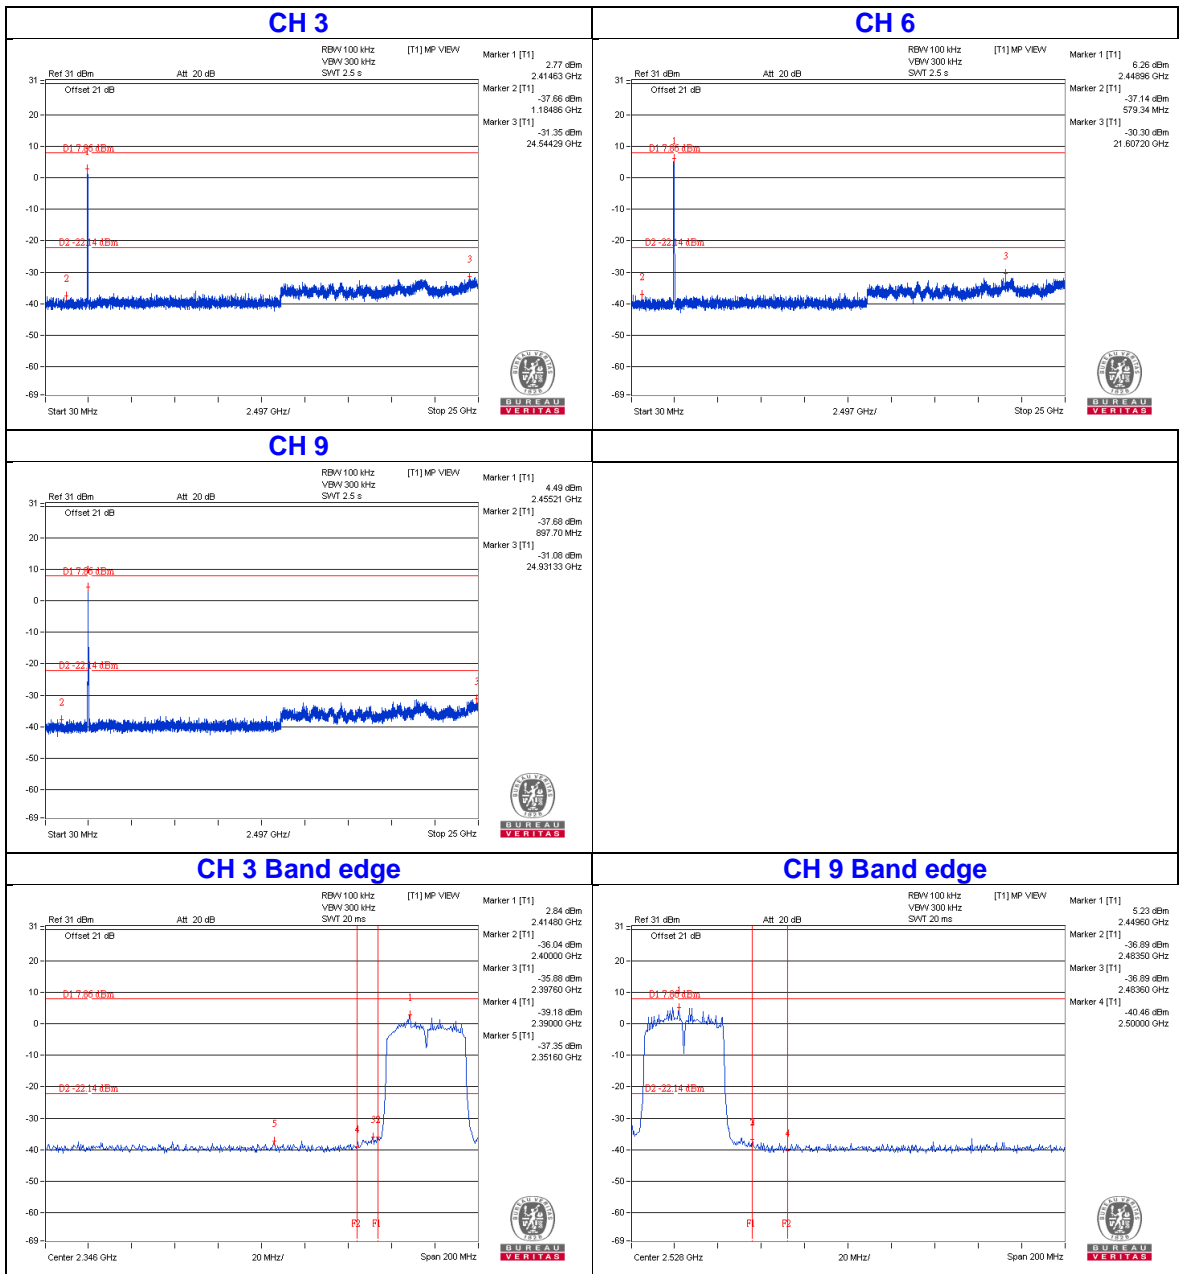

CHAIN 1

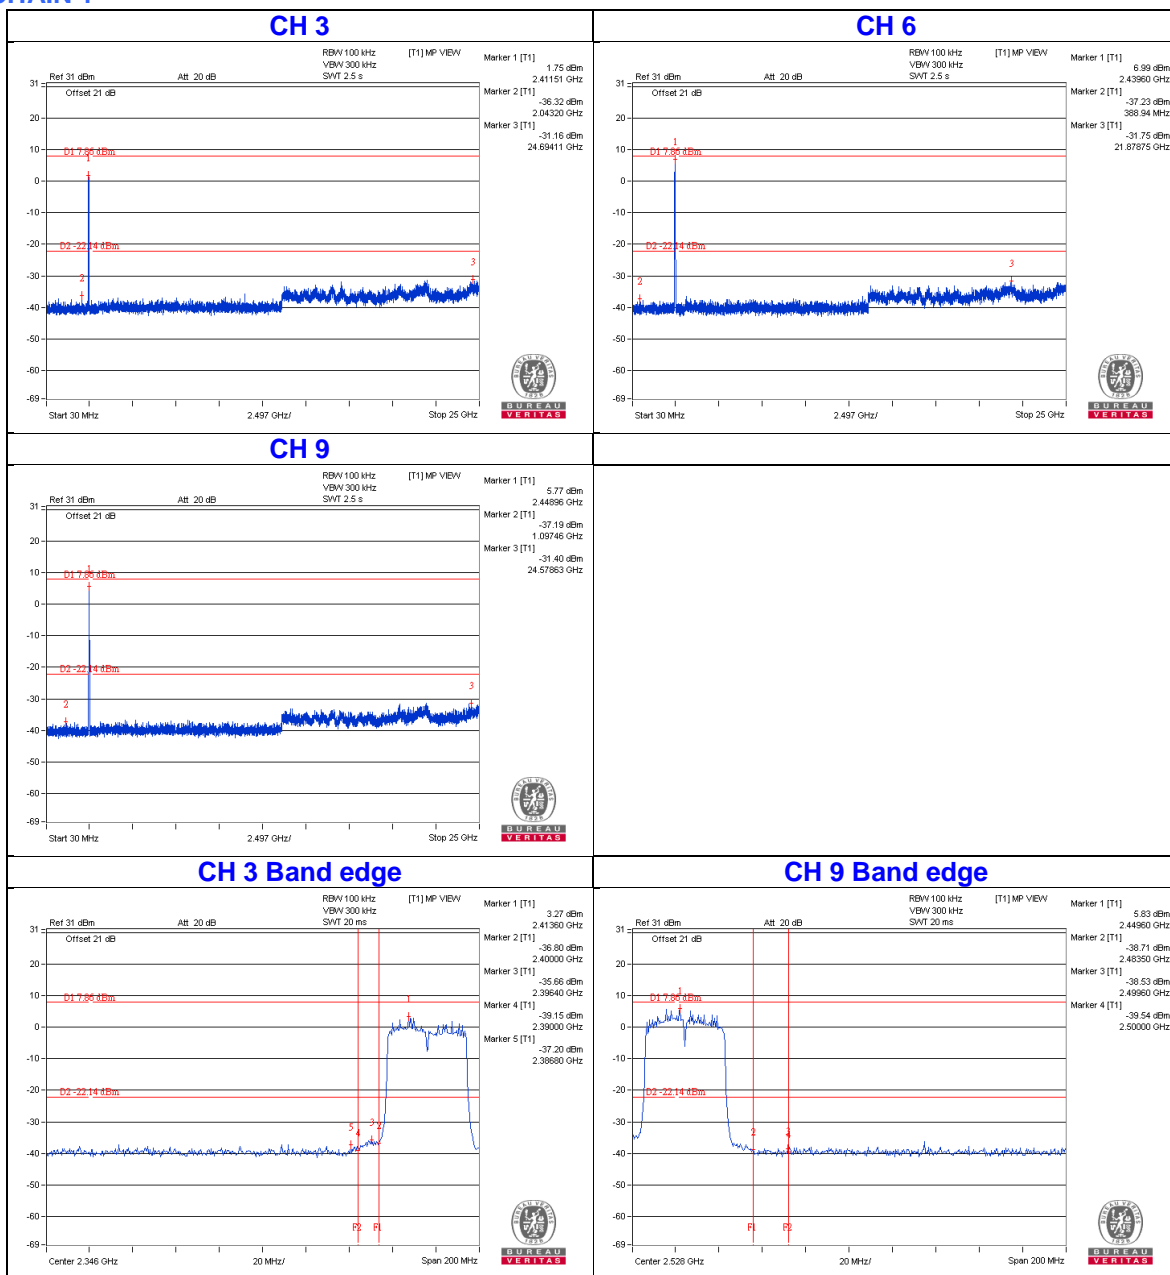

5 Pictures of Test Arrangements

Please refer to the attached file (Test Setup Photo).

Appendix – Information on the Testing Laboratories

We, Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch, were founded in 1988 to provide our best service in EMC, Radio, Telecom and Safety consultation. Our laboratories are FCC recognized accredited test firms and accredited according to ISO/IEC 17025.

If you have any comments, please feel free to contact us at the following:

Linko EMC/RF Lab

Tel: 886-2-26052180

Fax: 886-2-26051924

Hsin Chu EMC/RF/Telecom Lab

Tel: 886-3-6668565

Fax: 886-3-6668323

Hwa Ya EMC/RF/Safety Lab

Tel: 886-3-3183232

Fax: 886-3-3270892

Email: service.adt@tw.bureauveritas.com

Web Site: www.bureauveritas-adt.com

The address and road map of all our labs can be found in our web site also.

--- END ---