



Spot Check Evaluation

FCC ID : UZ7EM45B1
EQUIPMENT : Enterprise Mobile
BRAND NAME : Zebra
MODEL NAME : EM45B1
APPLICANT : Zebra Technologies Corporation
3 Overlook Point, Lincolnshire, IL 60069 USA
MANUFACTURER : Zebra Technologies Corporation
3 Overlook Point, Lincolnshire, IL 60069 USA
STANDARD : 47 CFR Part 22(H), 24(E), 27(L), 27(H), 27(F), 27(M),
27(N), 27(O), 27(Q), 90(S)
47 CFR Part 15 Subpart C §15.247
47 CFR Part 15 Subpart C §15.225
47 CFR Part 15 Subpart E §15.407

We, Sporton International Inc. (Kunshan), would like to declare that the tested sample has been evaluated in accordance with the procedures given in ANSI C63.26-2015 and shown compliance with the applicable technical standards.

The test results in this report apply exclusively to the tested model / sample. Without written approval of Sporton International Inc. (Kunshan), the test report shall not be reproduced except in full.

Jason Jia

Approved by: Jason Jia



Sporton International Inc. (Kunshan)

No. 1098, Pengxi North Road, Kunshan Economic Development Zone Jiangsu Province 215300
People's Republic of China



TABLE OF CONTENTS

REVISION HISTORY.....	3
1 GENERAL DESCRIPTION	4
1.1 Product Feature of Equipment Under Test	4
1.2 Modification of EUT	5
1.3 Testing Site.....	5
1.4 Test Software	5
1.5 Applicable Standards	6
2 RE-USE OF MEASURED DATA	7
2.1 Introduction Section.....	7
2.2 Model Difference Information	7
2.3 Reference detail Section:	8
2.4 Spot Check Verification Data Section	9
3 LIST OF MEASURING EQUIPMENT	21
4 MEASUREMENT UNCERTAINTY	24
APPENDIX A. TEST SETUP PHOTOGRAPHS	
APPENDIX B. REFERENCE REPORT	



REVISION HISTORY

REPORT NO.	VERSION	DESCRIPTION	ISSUED DATE
FG460508-02A	Rev. 01	Initial issue of report	Feb. 13, 2025



1 General Description

1.1 Product Feature of Equipment Under Test

Product Feature	
Equipment	Enterprise Mobile
Brand Name	Zebra
Model Name	EM45B1
FCC ID	UZ7EM45B1
IMEI Code	Conducted: 350332150060484 Conduction: 350332150060096/350332150064049 Radiation: 350332150060260/350332150063959 CBP/DFS: 350332150060575
HW Version	DV
SW Version	14-24-09.00-UG-U00-PRD-ATH-04
MFD	09DEC24
EUT Stage	Identical Prototype

Specification of Accessory				
Battery	Brand Name	Zebra	Model	BT-000501
			Part Number	BT-000501-2000

Supported Unit used in test configuration and system				
AC Adapter 1 (Type C Wall Charger 1)	Brand Name	Zebra	Model	SAWA-102-22520A
			Part Number	PWR-WUA5V45W1US
AC Adapter 2 (Type A Wall Charger 2)	Brand Name	Zebra	Model	SAWA-65-20005A
			Part Number	PWR-WUA5V12W0US
Earphone 1 (Wired headset USB-C)	Brand Name	Zebra	Part Number	HDST-USBC-PTT1-01
Earphone 2 (Rugged Bluetooth Headset)	Brand Name	Zebra	Part Number	HS3100-OTH
Earphone 3 (3.5mm PTT Headset)	Brand Name	Zebra	Part Number	HDST-35MM-PTT1-02
Earphone 4 (Rugged Headset)	Brand Name	Zebra	Part Number	HS2100-OTH
3.5mm to 3.5mm audio connector	Brand Name	Zebra	Part Number	CBL-HS2100-3MS1-01
Type C-Audio Cable (Type C to 3.5mm)	Brand Name	Zebra	Part Number	ADP-USBC-35MM1-01
USB Cable 1 (USB-C to C Cable)	Brand Name	Zebra	Part Number	CBL-EC5X-USBC3A-01
USB Cable 2 (USB-A to C Cable)	Brand Name	Zebra	Part Number	CBL-TC5X-USBC2A-01
EM45 Protective Case	Brand Name	Zebra	Part Number	SG-EM45EXO2-01



1.2 Modification of EUT

No modifications are made to the EUT during all test items.

1.3 Testing Site

Sporton International Inc. (Kunshan) is accredited to ISO/IEC 17025:2017 by American Association for Laboratory Accreditation with Certificate Number 5145.02.

Test Firm	Sporton International Inc. (Kunshan)		
Test Site Location	No. 1098, Pengxi North Road, Kunshan Economic Development Zone Jiangsu Province 215300 People's Republic of China TEL : +86-512-57900158		
Test Site No.	Sporton Site No.	FCC Designation No.	FCC Test Firm Registration No.
	TH01-KS CO01-KS DFS01-KS 03CH02-KS 03CH04-KS 03CH06-KS	CN1257	314309

1.4 Test Software

Item	Site	Manufacturer	Name	Version
1.	TH01-KS	Tonscend	JS1120-3 test system China_210602	3.3.10
2.	03CH02-KS	AUDIX	E3	6.2009-8-24a1
3.	03CH04-KS	AUDIX	E3	210616
4.	03CH06-KS	AUDIX	E3	210616
5.	DFS01-KS	Sporton	Test Tools	1.0
6.	CO01-KS	AUDIX	E3	6.2009-8-24

1.5 Applicable Standards

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

- ♦ FCC KDB 484596 D01 Referencing Test Data v02r03
- ♦ 47 CFR Part 22(H), 24(E), 27(L), 27(H), 27(F), 27(M), 27(N), 27(O), 27(Q), 90(S)
- ♦ ANSI C63.10-2013
- ♦ ANSI C63.26-2015
- ♦ 47 CFR Part 15 Subpart C §15.225
- ♦ 47 CFR Part 15 Subpart C §15.247
- ♦ 47 CFR Part 15 Subpart E §15.407



2 Re-use of Measured Data

2.1 Introduction Section

This application re-uses data collected on a similar device. The subject device of this application (Model: EM45B1, FCC ID: UZ7EM45B1) is electrically identical to the reference device (Model: EM45B2, FCC ID: UZ7EM45B2) for the portions of the circuitry corresponding to the data being re-used, following the FCC KDB 484596 D01 Referencing Test Data v02r03.

ECR Data Referencing Inquiry has been approved by FCC, and the data referencing and spot check test plan includes RF/EMC, the details are presented in section 2.3 of this report, and for SAR Reference detail, please refer to FCC SAR report FA460508-02.

The criteria set in section 3 of KDB 484596 D01 v02r03 is followed to determine whether the data referencing is justified. For SAR, the higher between the referenced value and the spot check value is used to determine compliance in both standalone and simultaneous transmission conditions.

The applicant takes full responsibility that the test data as referenced in this report represent compliance for this FCC ID: UZ7EM45B1.

2.2 Model Difference Information

The **main** difference between FCC ID: UZ7EM45B2 and FCC ID: UZ7EM45B1 is as below:

- Removed RFID function.
- Antenna 1 removed WWAN TX function, keep supported Low bands and Middle bands RX function.

Other differences and all the details of similarity and difference can be found in the confidential documents (UZ7EM45B1 Operational Description of Product Equality Declaration).



2.3 Reference detail Section:

Rule Part	Equipment Class	Frequency Band (MHz)	Reference FCC ID (Parent)	Reference on test	Reference Title	FCC ID Filling (Variant)	Test on the variant	Data Referencing (Y/N)
15C	DSS (BR/EDR)	2400~2483.5	UZ7EM45B2	Full test	FR460508A	UZ7EM45B1	Spot check	Y, All test items
	DTS (BLE)	2400~2483.5	UZ7EM45B2	Full test	FR460508B	UZ7EM45B1	Spot check	Y, All test items
	DTS (WLAN)	2400~2483.5	UZ7EM45B2	Full test	FR460508C	UZ7EM45B1	Spot check	Y, All test items
	DXX (NFC)	13.56	UZ7EM45B2	Full test	FR460508D	UZ7EM45B1	Spot check	Y, All test items
15E	U-NII	5180~5240	UZ7EM45B2	Full test	FR460508E	UZ7EM45B1	Spot check	Y, All test items
		5260~5320	UZ7EM45B2	Full test	FR460508E	UZ7EM45B1	Spot check	Y, All test items
		5500~5720	UZ7EM45B2	Full test	FR460508E	UZ7EM45B1	Spot check	Y, All test items
		5745~5825	UZ7EM45B2	Full test	FR460508E	UZ7EM45B1	Spot check	Y, All test items
		5260~5320 5500~5720	UZ7EM45B2	Full test	FZ460508	UZ7EM45B1	Spot check	Y, All test items
	6CD	5925~7125	UZ7EM45B2	Full test	FR460508G FR460508H	UZ7EM45B1	Spot check	Y, All test items
22, 24, 27, 90	PCE (GSM)	GSM 850/1900	UZ7EM45B2	Full test	FG460508A	UZ7EM45B1	Spot check	Y, All test items
	PCE (WCDMA)	Band II, IV, V	UZ7EM45B2	Full test	FG460508A	UZ7EM45B1	Spot check	Y, All test items
	PCE (LTE)	B2/4/5/7/13/17/26/38/ 41/42/66/71 ULCA 5B/7C/38C 41C/66B/66C	UZ7EM45B2	Full test	FG460508B FG460508C FG460508D FG460508F	UZ7EM45B1	Spot check	Y, All test items
	PCE (LTE)	B26 (90S)	UZ7EM45B2	Full test	FG460508E	UZ7EM45B1	Spot check	Y, All test items
	PCE (NR)	n2/n5/n7/n26/ n38/n41/n66/ n71/n77/n78	UZ7EM45B2	Full test	FG460508G FG460508H FG460508J FG460508K	UZ7EM45B1	Spot check	Y, All test items
	PCE (NR)	n26 (90S)	UZ7EM45B2	Full test	FG460508I	UZ7EM45B1	Spot check	Y, All test items

Y: Pointer to spot-check exhibit; N: Pointer to full test exhibit

2.4 Spot Check Verification Data Section

All test items test against the variant model based on the worst-case condition from the original model was performed in this filing to demonstrate the test data from original model remains representative for the variant model.

All test procedures follow the related section of parent report.

Spot-check measurements, while being always compliant with the applicable rule part(s) for the test under consideration, show a deviation d_{dB} from the reference data no larger than 3 dB:

$$d_{dB} = |V_{dB} - R_{dB}| \leq 3 \text{ dB} \quad (1)$$

V_{dB} , the variant spot-check level

R_{dB} , the corresponding measurement level for the reference model

An alternative to the limit of eq. (1) is available, and is based on considering how far the reference data R_{dB} is from the compliance threshold C_{dB} (also expressed in dB), for the particular test under consideration. In this case, if $M_{dB} = |C_{dB} - R_{dB}|$ is the margin in dB from the compliance limit, a spot check may be considered acceptable when the deviation d_{dB} from the reference data satisfies the following condition:

$$d_{dB} = |V_{dB} - R_{dB}| \leq (3 + M_{dB} / 20) \text{ dB} , \text{ for } 0 \leq M_{dB} \leq 60 \text{ dB} \quad (2)$$

$$d_{dB} = |V_{dB} - R_{dB}| = 6 \text{ dB} , \text{ for } M_{dB} > 60 \text{ dB}$$

where “| |” is the absolute value of the measured quantity.

When using the option in eq. (2), d_{dB} increases linearly from 3 dB to 6 dB.



Summary for spot check for each rule entry and technology is listed as below:

Mode	Test Item	UZ7EM45B2 Parent Worst mode Test Result	UZ7EM45B1 Variant Check Test Result	Deviation (dB)	Deviation Limit (dB)
BT 1Mbps (CH00)	Number of Channels	79	79	0	3
	Hopping Channel Separation	1.135	0.996	0.139	3
	Dwell Time of Each Channel	0.31	0.31	0	3
	20dB Bandwidth	0.94	0.95	0.01	3
	99% Bandwidth	0.851	0.89	0.039	3
	Conducted Band Edges	-41.78	-43.72	1.94	3
	Conducted Spurious Emission	-44.27	-46.4	2.13	3
BT 1Mbps (CH00)	Radiated Band Edges and Radiated Spurious Emission	56.93	55.71	1.22	3
BT	AC Conducted Emission	14.81	13.96	0.85	3
BLE 1Mbps (CH39)	6dB Bandwidth	0.68	0.69	0.01	3
	99% Bandwidth	1.027	1.035	0.008	3
	Power Spectral Density	-5.44	-6.6	1.16	3
	Conducted Band Edges	-57.54	-58.86	1.32	3
	Conducted Spurious Emission	-44.23	-45.77	1.54	3
BLE 2Mbps (CH39)	Radiated Band Edges and Spurious Emission	46.49	48.90	2.41	3
BLE	AC Conducted Emission	14.81	13.96	0.85	3
WIFI 2.4G (802.11b CH11)	6dB Bandwidth	8.56	8.56	0	3
	99% Bandwidth	13.187	13.307	0.12	3
	Power Spectral Density	-1.37	-1.5	0.13	3
	Conducted Band Edges	-47.92	-48.21	0.29	3
	Conducted Spurious Emission	-43.71	-46.01	2.3	3
WIFI 2.4G (802.11g CH01)	Radiated Band Edges and Spurious Emission	51.90	52.85	1.95	3
WIFI 2.4G	AC Conducted Emission	14.81	13.96	0.85	3
WIFI 5G (802.11a CH149)	26dB Bandwidth	19.15	19.29	0.14	3
	99% Bandwidth	16.705	16.705	0	3
	Power Spectral Density	6.94	6.92	0.02	3
	Unwanted Emissions	16.31	16.33	0.02	3
	Radiated Band Edges and Spurious Emission	50.75	52.88	2.13	3
WIFI 5G (11ax HE160 Ch50)	Radiated Band Edges and Spurious Emission	50.75	52.88	2.13	3
WIFI 5G	AC Conducted Emission	11.52	14.22	2.70	3
WIFI 5G (802.11a CH116)	DFS	0.862829	0.935231	0.073	3
WIFI 6G UNII-5 (802.11ax HE160 CH15 6025MHz)-6CD Indoor Client	26dB Emission Bandwidth	165.79	166.17	0.38	3
	99% Occupied Bandwidth	156.8	156.495	0.305	3
	Fundamental Maximum EIRP	17.64	17.39	0.25	3
	Fundamental Power Spectral Density	-2.95	-3.42	0.47	3
	In-Band Emissions	-12.59	-11.73	0.86	3
WIFI 6G UNII-5 (802.11ax HE20 CH1 5955MHz)-6CD Standard Client	26dB Emission Bandwidth	21.15	21.25	0.1	3
	99% Occupied Bandwidth	19.048	19.086	0.038	3
	Fundamental Maximum EIRP	17.68	17.58	0.10	3
	Fundamental Power Spectral Density	5.13	4.38	0.75	3
	In-Band Emissions	-19.18	-18.83	0.35	3
WIFI 6G UNII-5 (802.11ax HE160 CH47 6185MHz)	Contention Based Protocol	-64.77	-66.92	2.15	3



WIFI 6G (802.11ax HE20 Ch233)	Radiated Band Edges and Spurious Emission	66.90	67.00	0.1	3
WIFI 6G	AC Conducted Emission	14.72	16.18	1.46	3
NFC	20dB Spectrum Bandwidth	2.48	2.49	0.01	3
	99% OBW Spectrum Bandwidth	2.11	2.11	0	3
	Frequency Stability	-21.3496	-22.382	1.0324	3
	Field Strength of Fundamental Emissions	60.61	60.41	0.2	3
	Radiated Spurious Emissions	36.17	36.86	0.69	3
	AC Conducted Emission	14.22	16.01	1.79	3

Mode	Test Item	UZ7EM45B2 Parent Worst mode Test Result	UZ7EM45B1 Variant Check Test Result	Deviation (dB)	Deviation Limit (dB)
Part 27F LTE Band 13	Radiated Spurious Emission	-62.22	-61.76	0.46	3
Part27O_N77	Equivalent Isotropic Radiated Power	26.23	25.90	0.33	3
	Peak-to-Average Ratio	5.24	5.04	0.2	3
	Occupied Bandwidth	57.948	57.853	0.095	3
	Conducted Band Edge	-14.04	-15.20	1.16	3
	Conducted Spurious Emission	-33.15	-33.32	0.17	3
	Frequency Stability	0.0039	0.0027	0.0012	3

Conducted power for Unlicensed bands

Test Item	Mode	UZ7EM45B2 Parent Worst mode Test Result	UZ7EM45B1 Variant Check Test Result	Deviation (dB)	Deviation Limit (dB)
Conducted Power(dBm) BT & BLE	BT BR/EDR	9.57	9.11	0.46	3
	BLE 1Mbps	9.57	9.10	0.47	3
	BLE 2Mbps	9.58	9.24	0.34	3
Conducted Power(dBm) WIFI 2.4G	11b, 2.4GHz	25.04	24.97	0.07	3
	11g, 2.4GHz	28.45	28.36	0.09	3
	11n HT20, 2.4GHz	28.38	28.34	0.04	3
	11ac VHT20, 2.4GHz	28.30	28.25	0.05	3
	11ax HE20, 2.4GHz	28.56	28.51	0.05	3
Conducted Power(dBm) WIFI 5G	11a, 5.2GHz	22.53	22.38	0.15	3
	11a, 5.3GHz	22.62	22.15	0.47	3
	11a, 5.5GHz	22.19	21.74	0.45	3
	11a, 5.8GHz	21.69	21.47	0.22	3
	11n HT20, 5.2GHz	21.34	21.26	0.08	3
	11n HT20, 5.3GHz	20.98	20.62	0.36	3
	11n HT20, 5.5GHz	21.32	21.26	0.06	3
	11n HT20, 5.8GHz	21.37	21.33	0.04	3
	11ac VHT20, 5.2GHz	21.41	21.29	0.12	3
	11ac VHT20, 5.3GHz	21.04	20.69	0.35	3
	11ac VHT20, 5.5GHz	21.36	21.33	0.03	3
	11ac VHT20, 5.8GHz	21.41	21.36	0.05	3
	11ax HE20, 5.2GHz	21.47	21.34	0.13	3
	11ax HE20, 5.3GHz	21.09	20.72	0.37	3
	11ax HE20, 5.5GHz	21.39	21.37	0.02	3
	11ax HE20, 5.8GHz	21.45	21.39	0.06	3
	11n HT40, 5.2GHz	20.76	20.71	0.05	3
	11n HT40, 5.3GHz	20.71	20.53	0.18	3
	11n HT40, 5.5GHz	20.62	20.58	0.04	3



	11n HT40, 5.8GHz	20.36	20.28	0.08	3
	11ac VHT40, 5.2GHz	20.82	20.76	0.06	3
	11ac VHT40, 5.3GHz	20.77	20.56	0.21	3
	11ac VHT40, 5.5GHz	20.67	20.62	0.05	3
	11ac VHT40, 5.8GHz	20.42	20.32	0.10	3
	11ax HE40, 5.2GHz	20.86	20.81	0.05	3
	11ax HE40, 5.3GHz	20.83	20.61	0.22	3
	11ax HE40, 5.5GHz	20.73	20.68	0.05	3
	11ax HE40, 5.8GHz	20.48	20.36	0.12	3
	11ac VHT80, 5.2GHz	20.07	19.99	0.08	3
	11ac VHT80, 5.3GHz	20.14	19.91	0.23	3
	11ac VHT80, 5.5GHz	20.32	20.08	0.24	3
	11ac VHT80, 5.8GHz	20.17	20.10	0.07	3
	11ax HE80, 5.2GHz	20.12	20.05	0.07	3
	11ax HE80, 5.3GHz	20.22	19.96	0.26	3
	11ax HE80, 5.5GHz	20.38	20.12	0.26	3
	11ax HE80, 5.8GHz	20.24	20.15	0.09	3
	11ac VHT160, 5.3GHz	19.81	19.66	0.15	3
	11ac VHT160, 5.5GHz	19.79	19.63	0.16	3
	11ax HE160, 5.3GHz	19.92	19.70	0.22	3
	11ax HE160, 5.5GHz	19.88	19.69	0.19	3
Conducted Power(dBm) WIFI 6G Indoor Client	6CD 11a, U-NII-5	7.05	6.75	0.30	3
	6CD 11a, U-NII-6	7.97	7.86	0.11	3
	6CD 11a, U-NII-7	6.64	6.58	0.06	3
	6CD 11a, U-NII-8	5.82	5.78	0.04	3
	6CD 11ax HE20, U-NII-5	10.85	10.84	0.01	3
	6CD 11ax HE20, U-NII-6	11.28	11.21	0.07	3
	6CD 11ax HE20, U-NII-7	10.12	10.07	0.05	3
	6CD 11ax HE20, U-NII-8	9.61	9.57	0.04	3
	6CD 11ax HE40, U-NII-5	13.76	13.74	0.02	3
	6CD 11ax HE40, U-NII-6	13.74	13.59	0.15	3
	6CD 11ax HE40, U-NII-7	13.04	12.79	0.25	3
	6CD 11ax HE40, U-NII-8	12.65	12.60	0.05	3
	6CD 11ax HE80, U-NII-5	16.97	16.93	0.04	3
	6CD 11ax HE80, U-NII-6	16.82	16.77	0.05	3
	6CD 11ax HE80, U-NII-7	16.36	16.30	0.06	3
	6CD 11ax HE80, U-NII-8	15.76	15.71	0.05	3
	6CD 11ax HE160, U-NII-5	17.29	17.04	0.25	3
	6CD 11ax HE160, U-NII-6	17.01	16.95	0.06	3
Conducted Power(dBm) WIFI 6G Standard Client	6CD 11ax HE160, U-NII-7	17.06	17.01	0.05	3
	6CD 11ax HE160, U-NII-8	16.89	16.83	0.06	3
	6CD 11a, U-NII-5	17.29	17.21	0.08	3
	6CD 11a, U-NII-7	17.11	17.07	0.04	3
	6CD 11ax HE20, U-NII-5	17.33	17.23	0.10	3
	6CD 11ax HE20, U-NII-7	17.08	17.04	0.04	3
	6CD 11ax HE40, U-NII-5	17.23	17.16	0.07	3
	6CD 11ax HE40, U-NII-7	16.97	16.93	0.04	3
	6CD 11ax HE80, U-NII-5	17.26	17.14	0.12	3
	6CD 11ax HE80, U-NII-7	16.96	16.92	0.04	3
	6CD 11ax HE160, U-NII-5	17.34	17.10	0.24	3
	6CD 11ax HE160, U-NII-7	17.12	17.07	0.05	3



Conducted power for Licensed bands

Test Item	Mode	UZ7EM45B2 Parent Worst mode Test Result	UZ7EM45B1 Variant Check Test Result	Deviation (dB)	Deviation Limit (dB)
Conducted Power (dBm)	GSM 850	32.32	32.3	0.02	3
	GSM 1900	29.07	28.82	0.25	3
	WCDMA 850	23.02	22.87	0.15	3
	WCDMA1900	22.91	22.64	0.27	3
	WCDMA1700	22.79	22.75	0.04	3
	LTE B2	22.84	22.78	0.06	3
	LTE B4	22.89	22.45	0.44	3
	LTE B5	22.84	22.71	0.13	3
	LTE B5B	22.84	22.77	0.07	3
	LTE B13	22.78	22.63	0.15	3
	LTE B17	22.75	22.56	0.19	3
	LTE B26H	23.04	22.72	0.32	3
	LTE B26L	22.80	22.75	0.05	3
	LTE B66	22.89	22.74	0.15	3
	LTE B71	22.98	22.51	0.47	3
	LTE B7	23.83	23.48	0.35	3
	LTE B7C	23.70	23.59	0.11	3
	LTE B38	22.84	22.7	0.14	3
	LTE B41	22.89	22.66	0.23	3
	LTE B38C	22.84	22.71	0.13	3
	LTE B41C	22.88	22.78	0.1	3
	LTE B42	22.64	22.6	0.04	3
	LTE B66B	22.73	22.54	0.19	3
	LTE B66C	22.72	22.55	0.17	3
	N2	23.69	23.19	0.5	3
	N5	23.19	22.85	0.34	3
	N26H	23.22	22.93	0.29	3
	N26L	22.91	22.73	0.18	3
	N7	24.85	24.37	0.48	3
	N38	23.31	22.85	0.46	3
	N41	23.01	22.67	0.34	3
	N66	23.28	23.12	0.16	3
	N71	23.60	23.22	0.38	3
	N77 27O	26.28	25.95	0.33	3
	N78 27O	26.24	26.02	0.22	3
	N77 27Q	26.29	25.97	0.32	3
	N78 27Q	26.25	25.93	0.32	3
	N77 27O MIMO	24.32	23.89	0.43	3
	N78 27O MIMO	23.94	23.87	0.07	3
	N77 27Q MIMO	24.38	23.92	0.46	3
	N78 27Q MIMO	24.31	23.95	0.36	3



6CD- < indoor client>

<SISO mode>

U-NII-5 SISO																
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	Duty Factor (dB)		Conducted Power with duty factor (dBm)		DG (dBi)		EIRP Power (dBm)		EIRP Power Limit (dBm)	Pass /Fail	Power Setting	
					Ant 8	Ant 10	Ant 8	Ant 10	Ant 8	Ant 10	Ant 8	Ant 10			Ant 8	Ant 10
11a	6Mbps	1	093	6415	0.03	0.04	4.16	3.22	0.35	-0.85	4.51	2.37	24.00	Pass	6	6

U-NII-5 SISO																	
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	RU Config.	Duty Factor (dB)		Conducted Power with duty factor (dBm)		DG (dBi)		EIRP Power (dBm)		EIRP Power Limit (dBm)	Pass /Fail	Power Setting	
						Ant 8	Ant 10	Ant 8	Ant 10	Ant 8	Ant 10	Ant 8	Ant 10			Ant 8	Ant 10
HE20	MCS0	1	093	6415	Full	0.00	0.00	8.03	7.42	0.35	-0.85	8.38	6.57	24.00	Pass	8	8
HE40	MCS0	1	091	6405	Full	0.00	0.00	10.87	10.38	0.35	-0.85	11.22	9.53	24.00	Pass	11	11
HE80	MCS0	1	087	6385	Full	0.00	0.00	14.22	13.48	0.35	-0.85	14.57	12.63	24.00	Pass	14	14
HE160	MCS0	1	015	6025	Full	0.00	0.00	13.83	14.15	0.35	-0.85	14.18	13.30	24.00	Pass	14	14

U-NII-6 SISO															
Mod.	Data Rate	NTX	Freq. (MHz)	Duty Factor (dB)		Conducted Power with duty factor (dBm)		DG (dBi)		EIRP Power (dBm)		EIRP Power Limit (dBm)	Pass /Fail	Power Setting	
				Ant 8	Ant 10	Ant 8	Ant 10	Ant 8	Ant 10	Ant 8	Ant 10			Ant 8	Ant 10
11a	6Mbps	1	6475	0.03	0.04	5.45	4.09	0.75	-2.44	6.20	1.65	24.00	Pass	5	5

U-NII-6 SISO																	
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	RU Config.	Duty Factor (dB)		Conducted Power with duty factor (dBm)		DG (dBi)		EIRP Power (dBm)		EIRP Power Limit (dBm)	Pass /Fail	Power Setting	
						Ant 8	Ant 10	Ant 8	Ant 10	Ant 8	Ant 10	Ant 8	Ant 10			Ant 8	Ant 10
HE20	MCS0	1	105	6475	Full	0.00	0.00	8.42	7.86	0.75	-2.44	9.17	5.42	24.00	Pass	8.5	8.5
HE40	MCS0	1	107	6485	Full	0.00	0.00	11.05	9.97	0.75	-2.44	11.80	7.53	24.00	Pass	11	11
HE80	MCS0	1	103	6465	Full	0.00	0.00	14.09	13.15	0.75	-2.44	14.84	10.71	24.00	Pass	14	14
HE160	MCS0	1	111	6505	Full	0.00	0.00	14.21	13.31	0.75	-2.44	14.96	10.87	24.00	Pass	14	14



U-NII-7 SISO																
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	Duty Factor (dB)		Conducted Power with duty factor (dBm)		DG (dBi)		EIRP Power (dBm)		EIRP Power Limit (dBm)	Pass /Fail	Power Setting	
					Ant 8	Ant 10	Ant 8	Ant 10	Ant 8	Ant 10	Ant 8	Ant 10			Ant 8	Ant 10
11a	6Mbps	1	117	6535	0.03	0.04	4.25	2.69	1.02	0.16	5.27	2.85	24.00	Pass	3.5	3.5

U-NII-7 SISO																	
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	RU Config.	Duty Factor (dB)		Conducted Power with duty factor (dBm)		DG (dBi)		EIRP Power (dBm)		EIRP Power Limit (dBm)	Pass /Fail	Power Setting	
						Ant 8	Ant 10	Ant 8	Ant 10	Ant 8	Ant 10	Ant 8	Ant 10			Ant 8	Ant 10
HE20	MCS0	1	181	6855	Full	0.00	0.00	7.03	6.95	1.02	0.16	8.05	7.11	24.00	Pass	7.5	7.5
HE40	MCS0	1	147	6685	Full	0.00	0.00	10.01	9.45	1.02	0.16	11.03	9.61	24.00	Pass	10	10
HE80	MCS0	1	135	6625	Full	0.00	0.00	13.55	12.93	1.02	0.16	14.57	13.09	24.00	Pass	13.5	13.5
HE160	MCS0	1	143	6665	Full	0.00	0.00	14.25	13.54	1.02	0.16	15.27	13.70	24.00	Pass	14	14

U-NII-8 SISO															
Mod.	Data Rate	NTX	Freq. (MHz)	Duty Factor (dB)		Conducted Power with duty factor (dBm)		DG (dBi)		EIRP Power (dBm)		EIRP Power Limit (dBm)	Pass /Fail	Power Setting	
				Ant 8	Ant 10	Ant 8	Ant 10	Ant 8	Ant 10	Ant 8	Ant 10			Ant 8	Ant 10
11a	6Mbps	1	6895	0.03	0.04	3.27	2.12	0.70	1.66	3.97	3.78	24.00	Pass	3	3

U-NII-8 SISO																	
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	RU Config.	Duty Factor (dB)		Conducted Power with duty factor (dBm)		DG (dBi)		EIRP Power (dBm)		EIRP Power Limit (dBm)	Pass /Fail	Power Setting	
						Ant 8	Ant 10	Ant 8	Ant 10	Ant 8	Ant 10	Ant 8	Ant 10			Ant 8	Ant 10
HE20	MCS0	2	185	6875	Full	0.00	0.00	6.68	6.29	0.70	1.66	7.38	7.95	24.00	Pass	7	7
HE40	MCS0	2	195	6925	Full	0.00	0.00	9.78	9.32	0.70	1.66	10.48	10.98	24.00	Pass	10	10
HE80	MCS0	2	199	6945	Full	0.00	0.00	12.75	12.58	0.70	1.66	13.45	14.24	24.00	Pass	13	13
HE160	MCS0	2	207	6985	Full	0.00	0.00	13.97	13.60	0.70	1.66	14.67	15.26	24.00	Pass	14	14



<CDD mode>

U-NII-5 MIMO																
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	Duty Factor (dB)		Conducted Power with duty factor (dBm)			DG (dBi)		EIRP Power (dBm)	EIRP Power Limit (dBm)	Pass /Fail	Power Setting	
					Ant 8	Ant 10	Ant 8	Ant 10	SUM	Ant 8	Ant 10				SUM	Ant 8
11a	6Mbps	2	093	6415	0.03	0.04	4.18	3.25	6.75	0.35		7.10	24.00	Pass	6	

U-NII-6 MIMO															
Mod.	Data Rate	NTX	Freq. (MHz)	Duty Factor (dB)		Conducted Power with duty factor (dBm)			DG (dBi)		EIRP Power (dBm)	EIRP Power Limit (dBm)	Pass /Fail	Power Setting	
				Ant 8	Ant 10	Ant 8	Ant 10	SUM	Ant 8	Ant 10				Ant 8	Ant 10
11a	6Mbps	2	6475	0.03	0.04	5.49	4.11	7.86	0.75		8.61	24.00	Pass	5	

U-NII-7 MIMO																
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	Duty Factor (dB)		Conducted Power with duty factor (dBm)			DG (dBi)		EIRP Power (dBm)	EIRP Power Limit (dBm)	Pass /Fail	Power Setting	
					Ant 8	Ant 10	Ant 8	Ant 10	SUM	Ant 8	Ant 10				SUM	Ant 8
11a	6Mbps	2	117	6535	0.03	0.04	4.29	2.71	6.58	1.02		7.60	24.00	Pass	3.5	

U-NII-8 MIMO															
Mod.	Data Rate	NTX	Freq. (MHz)	Duty Factor (dB)		Conducted Power with duty factor (dBm)			DG (dBi)		EIRP Power (dBm)	EIRP Power Limit (dBm)	Pass /Fail	Power Setting	
				Ant 8	Ant 10	Ant 8	Ant 10	SUM	Ant 8	Ant 10				Ant 8	Ant 10
11a	6Mbps	2	6895	0.03	0.04	3.30	2.17	5.78	1.66		7.44	24.00	Pass	3	

<SDM mode>

U-NII-5 MIMO																	
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	RU Config.	Duty Factor (dB)		Conducted Power with duty factor (dBm)			DG (dBi)		EIRP Power (dBm)	EIRP Power Limit (dBm)	Pass /Fail	Power Setting	
						Ant 8	Ant 10	Ant 8	Ant 10	SUM	Ant 8	Ant 10				SUM	Ant 8
HE20	MCS0	2	093	6415	Full	0.00	0.00	8.18	7.45	10.84	0.35		11.19	24.00	Pass	8	
HE40	MCS0	2	091	6405	Full	0.00	0.00	11.01	10.43	13.74	0.35		14.09	24.00	Pass	11	
HE80	MCS0	2	087	6385	Full	0.00	0.00	14.29	13.52	16.93	0.35		17.28	24.00	Pass	14	
HE160	MCS0	2	015	6025	Full	0.00	0.00	13.88	14.18	17.04	0.35		17.39	24.00	Pass	14	



U-NII-6 MIMO																	
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	RU Config.	Duty Factor (dB)		Conducted Power with duty factor (dBm)			DG (dBi)		EIRP Power (dBm)	EIRP Power Limit (dBm)	Pass /Fail	Power Setting	
						Ant 8	Ant 10	Ant 8	Ant 10	SUM	Ant 8	Ant 10				SUM	Ant 8
HE20	MCS0	2	105	6475	Full	0.00	0.00	8.47	7.91	11.21	0.75		11.96	24.00	Pass	8.5	
HE40	MCS0	2	107	6485	Full	0.00	0.00	11.09	10.01	13.59	0.75		14.34	24.00	Pass	11	
HE80	MCS0	2	103	6465	Full	0.00	0.00	14.24	13.22	16.77	0.75		17.52	24.00	Pass	14	
HE160	MCS0	2	111	6505	Full	0.00	0.00	14.42	13.39	16.95	0.75		17.70	24.00	Pass	14	

U-NII-7 MIMO																	
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	RU Config.	Duty Factor (dB)		Conducted Power with duty factor (dBm)			DG (dBi)		EIRP Power (dBm)	EIRP Power Limit (dBm)	Pass /Fail	Power Setting	
						Ant 8	Ant 10	Ant 8	Ant 10	SUM	Ant 8	Ant 10				SUM	Ant 8
HE20	MCS0	2	181	6855	Full	0.00	0.00	7.09	7.02	10.07	1.02	11.09	24.00	Pass	7.5		
HE40	MCS0	2	147	6685	Full	0.00	0.00	10.06	9.48	12.79	1.02	13.81	24.00	Pass	10		
HE80	MCS0	2	135	6625	Full	0.00	0.00	13.59	12.97	16.30	1.02	17.32	24.00	Pass	13.5		
HE160	MCS0	2	143	6665	Full	0.00	0.00	14.35	13.61	17.01	1.02	18.03	24.00	Pass	14		

U-NII-8 MIMO																	
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	RU Config.	Duty Factor (dB)		Conducted Power with duty factor (dBm)			DG (dBi)		EIRP Power (dBm)	EIRP Power Limit (dBm)	Pass /Fail	Power Setting	
						Ant 8	Ant 10	Ant 8	Ant 10	SUM	Ant 8	Ant 10	SUM			Ant 8	Ant 10
HE20	MCS0	2	185	6875	Full	0.00	0.00	6.77	6.34	9.57	1.66	11.23	24.00	Pass	7		
HE40	MCS0	2	195	6925	Full	0.00	0.00	9.81	9.35	12.60	1.66	14.26	24.00	Pass	10		
HE80	MCS0	2	199	6945	Full	0.00	0.00	12.78	12.62	15.71	1.66	17.37	24.00	Pass	13		
HE160	MCS0	2	207	6985	Full	0.00	0.00	14.01	13.63	16.83	1.66	18.49	24.00	Pass	14		



<standard client >

<SISO mode>

U-NII-5 SISO																
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	Duty Factor (dB)		Conducted Power with duty factor (dBm)		DG (dBi)		EIRP Power (dBm)		EIRP Power Limit (dBm)	Pass /Fail	Power Setting	
					Ant 8	Ant 10	Ant 8	Ant 10	Ant 8	Ant 10	Ant 8	Ant 10			Ant 8	Ant 10
11a	6Mbps	1	001	5955	0.03	0.04	14.19	14.13	0.35	-0.85	14.54	13.28	30.00	Pass	14	

U-NII-5 SISO																	
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	RU Config.	Duty Factor (dB)		Conducted Power with duty factor (dBm)		DG (dBi)		EIRP Power (dBm)		EIRP Power Limit (dBm)	Pass /Fail	Power Setting	
						Ant 8	Ant 10	Ant 8	Ant 10	Ant 8	Ant 10	Ant 8	Ant 10			Ant 8	Ant 10
HE20	MCS0	1	001	5955	Full	0.00	0.00	14.21	14.22	0.35	-0.85	14.56	13.37	30.00	Pass	14	14
HE40	MCS0	1	003	5965	Full	0.00	0.00	14.17	14.05	0.35	-0.85	14.52	13.20	30.00	Pass	14	14
HE80	MCS0	1	007	5985	Full	0.00	0.00	14.16	14.06	0.35	-0.85	14.51	13.21	30.00	Pass	14	14
HE160	MCS0	1	015	6025	Full	0.00	0.00	13.83	14.15	0.35	-0.85	14.18	13.30	30.00	Pass	14	14

U-NII-7 SISO																
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	Duty Factor (dB)		Conducted Power with duty factor (dBm)		DG (dBi)		EIRP Power (dBm)		EIRP Power Limit (dBm)	Pass /Fail	Power Setting	
					Ant 8	Ant 10	Ant 8	Ant 10	Ant 8	Ant 10	Ant 8	Ant 10			Ant 8	Ant 10
11a	6Mbps	1	149	6695	0.03	0.04	14.27	13.78	1.02	0.16	15.29	13.94	30.00	Pass	14	14

U-NII-7 SISO																	
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	RU Config.	Duty Factor (dB)		Conducted Power with duty factor (dBm)		DG (dBi)		EIRP Power (dBm)		EIRP Power Limit (dBm)	Pass /Fail	Power Setting	
						Ant 8	Ant 10	Ant 8	Ant 10	Ant 8	Ant 10	Ant 8	Ant 10			Ant 8	Ant 10
HE20	MCS0	1	149	6695	Full	0.00	0.00	14.22	13.78	1.02	0.16	15.24	13.94	30.00	Pass	14	14
HE40	MCS0	1	147	6685	Full	0.00	0.00	14.29	13.43	1.02	0.16	15.31	13.59	30.00	Pass	14	14
HE80	MCS0	1	135	6625	Full	0.00	0.00	14.27	13.47	1.02	0.16	15.29	13.63	30.00	Pass	14	14
HE160	MCS0	1	143	6665	Full	0.00	0.00	14.25	13.54	1.02	0.16	15.27	13.70	30.00	Pass	14	14



<CDD mode>

U-NII-5 MIMO																
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	Duty Factor (dB)		Conducted Power with duty factor (dBm)			DG (dBi)		EIRP Power (dBm)	EIRP Power Limit (dBm)	Pass /Fail	Power Setting	
					Ant 8	Ant 10	Ant 8	Ant 10	SUM	Ant 8	Ant 10				SUM	Ant 8
11a	6Mbps	2	001	5955	0.03	0.04	14.22	14.17	17.21	0.35		17.56	30.00	Pass		14

U-NII-5 MIMO																	
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	RU Config.	Duty Factor (dB)		Conducted Power with duty factor (dBm)			DG (dBi)		EIRP Power (dBm)	EIRP Power Limit (dBm)	Pass /Fail	Power Setting	
						Ant 8	Ant 10	Ant 8	Ant 10	SUM	Ant 8	Ant 10	SUM			Ant 8	Ant 10
HE20	MCS0	2	001	5955	Full	0.00	0.00	14.24	14.19	17.23	0.35		17.58	30.00	Pass	14	
HE40	MCS0	2	003	5965	Full	0.00	0.00	14.22	14.07	17.16	0.35		17.51	30.00	Pass	14	
HE80	MCS0	2	007	5985	Full	0.00	0.00	14.17	14.09	17.14	0.35		17.49	30.00	Pass	14	
HE160	MCS0	2	015	6025	Full	0.00	0.00	13.95	14.23	17.10	0.35		17.45	30.00	Pass	14	

U-NII-7 MIMO																
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	Duty Factor (dB)		Conducted Power with duty factor (dBm)			DG (dBi)		EIRP Power (dBm)	EIRP Power Limit (dBm)	Pass /Fail	Power Setting	
					Ant 8	Ant 10	Ant 8	Ant 10	SUM	Ant 8	Ant 10				SUM	Ant 8
11a	6Mbps	2	149	6695	0.03	0.04	14.31	13.80	17.07	1.02		18.09	30.00	Pass	14	

U-NII-7 MIMO																	
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	RU Config.	Duty Factor (dB)		Conducted Power with duty factor (dBm)			DG (dBi)		EIRP Power (dBm)	EIRP Power Limit (dBm)	Pass /Fail	Power Setting	
						Ant 8	Ant 10	Ant 8	Ant 10	SUM	Ant 8	Ant 10				SUM	Ant 8
HE20	MCS0	2	149	6695	Full	0.00	0.00	14.24	13.81	17.04	1.02		18.06	30.00	Pass	14	
HE40	MCS0	2	147	6685	Full	0.00	0.00	14.32	13.48	16.93	1.02		17.95	30.00	Pass	14	
HE80	MCS0	2	135	6625	Full	0.00	0.00	14.29	13.49	16.92	1.02		17.94	30.00	Pass	14	
HE160	MCS0	2	143	6665	Full	0.00	0.00	14.39	13.71	17.07	1.02		18.09	30.00	Pass	14	

**Conclusion:**

All test items test against the variant model based on the worst-case condition from the original model was performed in this filing to demonstrate the test data from original model remains representative for the variant model.

Based on the spot check test result, the test data from the original model is representative for the variant model. All spot check test data are shown within expected level compliant to limit line.

We are using power and ERP/EIRP measurements from the original parent model reports to list on the grant.

The same detection mechanism/software/antenna gain is used in the variant of DFS. Hence, all test cases refer to parent report.

We confirm that the test data referencing policy of FCC KDB 484596 D01 Referencing Test Data v02r03 has been followed and the test data as referenced from the parent model report represents compliance with new FCC ID.



3 List of Measuring Equipment

For BT/WIFI:

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Test Date	Due Date	Remark
EMI Test Receiver	Keysight	N9038A	MY56400023	3Hz~8.5GHz;Max 30dBm	Jan. 02, 2024	Nov. 06, 2024	Jan. 01, 2025	Radiation (03CH06-KS)
EXA Spectrum Analyzer	Keysight	N9010B	MY57471084	10Hz~44GHz	Jul. 04, 2024	Nov. 06, 2024	Jul. 03, 2025	Radiation (03CH06-KS)
Loop Antenna	R&S	HFH2-Z2E	101125	9kHz~30MHz	Sep. 08, 2024	Nov. 06, 2024	Sep. 07, 2025	Radiation (03CH06-KS)
Bilog Antenna	TeseQ	CBL6111D	59913	30MHz~1GHz	Sep. 03, 2024	Nov. 06, 2024	Sep. 02, 2025	Radiation (03CH06-KS)
Double Ridge Horn Antenna	ETS-Lindgren	3117	00218652	1GHz~18GHz	Apr. 11, 2024	Nov. 06, 2024	Apr. 10, 2025	Radiation (03CH06-KS)
SHF-EHF Horn	Com-power	AH-840	101093	18GHz~40GHz	Jan. 06, 2024	Nov. 06, 2024	Jan. 05, 2025	Radiation (03CH06-KS)
Amplifier	SONOMA	310N	372171	9KHz ~1GHZ	Jan. 02, 2024	Nov. 06, 2024	Jan. 01, 2025	Radiation (03CH06-KS)
Amplifier	EM	EM18G40GA	060728	18~40GHz	Jan. 02, 2024	Nov. 06, 2024	Jan. 01, 2025	Radiation (03CH06-KS)
high gain Amplifier	MITEQ	AMF-7D-00101800-30-10P	2082395	1Ghz-18Ghz	Jan. 02, 2024	Nov. 06, 2024	Jan. 01, 2025	Radiation (03CH06-KS)
Amplifier	Keysight	83017A	MY57280119	500MHz~26.5GHz	Oct. 09, 2024	Nov. 06, 2024	Oct. 08, 2025	Radiation (03CH06-KS)
AC Power Source	Chroma	61601	F104090004	N/A	NCR	Nov. 06, 2024	NCR	Radiation (03CH06-KS)
Turn Table	ChamPro	EM 1000-T	060762-T	0~360 degree	NCR	Nov. 06, 2024	NCR	Radiation (03CH06-KS)
Antenna Mast	ChamPro	EM 1000-A	060762-A	1 m~4 m	NCR	Nov. 06, 2024	NCR	Radiation (03CH06-KS)
EMI Receiver	R&S	ESCI7	100768	9kHz~7GHz;	Apr. 18, 2024	Oct. 27, 2024	Apr. 17, 2025	Conduction (CO01-KS)
AC LISN (for auxiliary equipment)	MessTec	AN3016	060103	9kHz~30MHz	Aug. 20, 2024	Oct. 27, 2024	Aug. 19, 2025	Conduction (CO01-KS)
AC LISN	MessTec	AN3016	060105	9kHz~30MHz	Apr. 18, 2024	Oct. 27, 2024	Apr. 17, 2025	Conduction (CO01-KS)
AC Power Source	Chroma	61602	ABP00000811	AC 0V~300V, 45Hz~1000Hz	Oct. 09, 2024	Oct. 27, 2024	Oct. 08, 2025	Conduction (CO01-KS)
Spectrum Analyzer	R&S	FSV40	101040	10Hz~40GHz	Oct. 10, 2024	Nov. 07, 2024~Feb. 11, 2025	Oct. 09, 2025	Conducted (TH01-KS)
Pulse Power Sensor	Anritsu	MA2411B	0917070	300MHz~40GHz	Jan. 02, 2024	Nov. 07, 2024~Feb. 11, 2025	Jan. 01, 2025	Conducted (TH01-KS)
Pulse Power Sensor	Anritsu	MA2411B	0917070	300MHz~40GHz	Jan. 02, 2025	Nov. 07, 2024~Feb. 11, 2025	Jan. 01, 2026	Conducted (TH01-KS)
Power Meter	Anritsu	ML2495A	1005002	50MHz Bandwidth	Jan. 02, 2024	Nov. 07, 2024~Feb. 11, 2025	Jan. 01, 2025	Conducted (TH01-KS)
Power Meter	Anritsu	ML2495A	1005002	50MHz Bandwidth	Jan. 02, 2025	Nov. 07, 2024~Feb. 11, 2025	Jan. 01, 2026	Conducted (TH01-KS)
Spectrum Analyzer	R&S	FSV40	101040	10Hz~40GHz	Oct. 10, 2024	Nov. 05, 2024	Oct. 09, 2025	CBP (DFS01-KS)
MXG-B RF Vector Signal Generator	Keysight	5182B /5182BX07	MY56200417/MY59360210	9kHz~7.2GHz	Apr. 17, 2024	Nov. 05, 2024	Apr. 16, 2025	CBP (DFS01-KS)
Vector Signal Generator	R&S	SMBV100A	258305	9kHz~6GHz	Jan. 02, 2024	Nov. 05, 2024	Jan. 01, 2025	CBP (DFS01-KS)
Combiner	MTJ Cooperation	MTJ7112	N/A	0.4-6GHz	NCR	Nov. 05, 2024	NCR	CBP (DFS01-KS)
Signal Analyzer	R&S	FSV7	101632	10Hz~7GHz	Jan. 02, 2024	Nov. 05, 2024	Jan. 01, 2025	DFS (DFS01-KS)
Vector Signal Generator	R&S	SMJ100A	101908	100kHz~6GHz	Jan. 02, 2024	Nov. 05, 2024	Jan. 01, 2025	DFS (DFS01-KS)
MXG-B RF Vector Signal Generator	Keysight	5182B /5182BX07	MY56200417/MY59360210	9kHz~7.2GHz	Apr. 17, 2024	Nov. 05, 2024	Apr. 16, 2025	DFS (DFS01-KS)



Combiner	MTJ Cooperation	MTJ7114-M	N/A	0.5GHz~18GHz	NCR	Nov. 05, 2024	NCR	DFS (DFS01-KS)
----------	-----------------	-----------	-----	--------------	-----	---------------	-----	----------------

NCR: No Calibration Required

For NFC:

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Test Date	Due Date	Remark
EMI Test Receiver	R&S	ESR7	101403	9kHz~7GHz;Ma x 30dBm	Oct. 11, 2024	Oct. 24, 2024	Oct. 10, 2025	Radiation (03CH02-KS)
Loop Antenna	R&S	HFH2-Z2E	101125	9kHz~30MHz	Sep. 08, 2024	Oct. 24, 2024	Sep. 07, 2025	Radiation (03CH02-KS)
Bilog Antenna	TeseQ	CBL6111D	59915	30MHz-1GHz	Aug. 18, 2024	Oct. 24, 2024	Aug. 17, 2025	Radiation (03CH02-KS)
AC Power Source	Chroma	61601	616010002473	N/A	NCR	Oct. 24, 2024	NCR	Radiation (03CH02-KS)
Turn Table	MF	MF7802	N/A	0~360 degree	NCR	Oct. 24, 2024	NCR	Radiation (03CH02-KS)
Antenna Mast	MF	MF7802	N/A	1 m~4 m	NCR	Oct. 24, 2024	NCR	Radiation (03CH02-KS)
Amplifier	SONOMA	310N	413740	9KHz-1GHz	Jan. 03, 2024	Oct. 24, 2024	Jan. 02, 2025	Radiation (03CH02-KS)
EMI Receiver	R&S	ESCI7	100768	9kHz~7GHz;	Apr. 18, 2024	Oct. 26, 2024	Apr. 17, 2025	Conduction (CO01-KS)
AC LISN (for auxiliary equipment)	MessTec	AN3016	060103	9kHz~30MHz	Aug. 20, 2024	Oct. 26, 2024	Aug. 19, 2025	Conduction (CO01-KS)
AC LISN	MessTec	AN3016	060105	9kHz~30MHz	Apr. 18, 2024	Oct. 26, 2024	Apr. 17, 2025	Conduction (CO01-KS)
AC Power Source	Chroma	61602	ABP000000811	AC 0V~300V, 45Hz~1000Hz	Oct. 09, 2024	Oct. 26, 2024	Oct. 08, 2025	Conduction (CO01-KS)
Spectrum Analyzer	R&S	FSV40	101040	10Hz~40GHz	Oct. 10, 2024	Nov. 07, 2024	Oct. 09, 2025	Conducted (TH01-KS)
Pulse Power Sensor	Anritsu	MA2411B	0917070	300MHz~40GHz	Jan. 02, 2024	Nov. 07, 2024	Jan. 01, 2025	Conducted (TH01-KS)
Power Meter	Anritsu	ML2495A	1005002	50MHz Bandwidth	Jan. 02, 2024	Nov. 07, 2024	Jan. 01, 2025	Conducted (TH01-KS)

NCR: No Calibration Required



For WWAN Bands:

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Test Date	Due Date	Remark
Spectrum Analyzer	R&S	FSV40	101040	10Hz~40GHz	Oct. 10, 2024	Nov. 04, 2024	Oct. 09, 2025	Conducted (TH01-KS)
Power divider	STI	STI08-0055	-	0.5~40GHz	NCR	Nov. 04, 2024	NCR	Conducted (TH01-KS)
Temperature & humidity chamber	Hongzhan	LP-150U	H2014011440	-40~+150°C 20%~95%RH	Jul. 05, 2023	Nov. 04, 2024	Jul. 04, 2024	Conducted (TH01-KS)
EXA Spectrum Analyzer	Keysight	N9010A	MY55370528	10Hz~44G, MAX 30dB	Oct. 11, 2024	Oct. 20, 2024	Oct. 10, 2025	Radiation (03CH04-KS)
Bilog Antenna	TeseQ	CBL6111D	44483	30MHz~1GHz	Dec. 06, 2023	Oct. 20, 2024	Dec. 05, 2024	Radiation (03CH04-KS)
Double Ridge Horn Antenna	ETS-Lindgren	3117	00227860	1GHz~18GHz	Aug. 16, 2024	Oct. 20, 2024	Aug. 15, 2025	Radiation (03CH04-KS)
SHF-EHF Horn	Com-power	AH-840	101070	18GHz~40GHz	Jan. 27, 2024	Oct. 20, 2024	Jan. 26, 2025	Radiation (03CH04-KS)
Amplifier	SONOMA	310N	413740	9KHz~1GHz	Jan. 03, 2024	Oct. 20, 2024	Jan. 02, 2025	Radiation (03CH04-KS)
Amplifier	EM	EM18G40G A	060728	18~40GHz	Jan. 02, 2024	Oct. 20, 2024	Jan. 01, 2025	Radiation (03CH04-KS)
high gain Amplifier	EM	EM01G18G A	060840	1Ghz~18Ghz	Oct. 09, 2024	Oct. 20, 2024	Oct. 08, 2025	Radiation (03CH04-KS)
Amplifier	EM	EM01G18G A	060892	1Ghz~18Ghz	Oct. 09, 2024	Oct. 20, 2024	Oct. 08, 2025	Radiation (03CH04-KS)
AC Power Source	Chroma	61601	F104090004	N/A	NCR	Oct. 20, 2024	NCR	Radiation (03CH04-KS)
Turn Table	ChamPro	EM 1000-T	060762-T	0~360 degree	NCR	Oct. 20, 2024	NCR	Radiation (03CH04-KS)
Antenna Mast	ChamPro	EM 1000-A	060762-A	1 m~4 m	NCR	Oct. 20, 2024	NCR	Radiation (03CH04-KS)
Signal Analyzer	R&S	FSV7	101472	10Hz~7GHz	Jan. 05, 2024	Nov. 12, 2024	Jan. 04, 2025	Conducted (DFS01-KS)
Combiner	MTJ Cooperation	MTJ7112	N/A	0.4-6GHz	NCR	Nov. 12, 2024	NCR	Conducted (DFS01-KS)

NCR: No Calibration Required

4 Measurement Uncertainty

The measurement uncertainties shown below were calculated in accordance with the requirements of ANSI 63.26-2015. All the measurement uncertainty value were shown with a coverage K=2 to indicate 95% level of confidence. The measurement data show herein meets or exceeds the CISPR measurement uncertainty values specified in CISPR 16-4-2 and can be compared directly to specified limit to determine compliance.

Uncertainty of Conducted Measurement (BT/WIFI2.4G/5G)

Test Item	Uncertainty
Conducted Spurious Emission & Bandedge	±2.22 dB
Occupied Channel Bandwidth	±0.1%
Conducted Power	±0.50 dB
Conducted Power Spectral Density	±0.90 dB
Frequency	±0.04 ppm

Uncertainty of Conducted Measurement(WIFI 6G)

Test Item	Uncertainty
Conducted Spurious Emission & Bandedge	±2.22 dB
Occupied Channel Bandwidth	±0.1%
Conducted Power	±0.50 dB
Conducted Power Spectral Density	±0.90 dB
Frequency	0.04ppm
Conducted Generated signal Levels	±0.56 dB
Conducted Time	0.54%

Uncertainty of Conducted Measurement(NFC)

Test Item	Uncertainty
Occupied Channel Bandwidth	±0.1%
Frequency	0.04ppm

Uncertainty of Conducted Measurement (DFS)

Test Item	Uncertainty
Conducted Generated signal Levels	±0.56 dB
Conducted Time	0.38%

Uncertainty of Conducted Measurement (WWAN)

Test Item	Uncertainty
Conducted Spurious Emission & Bandedge	±2.22 dB
Occupied Channel Bandwidth	±0.1%
Conducted Power	±0.50 dB
Peak to Average Ratio	±0.46 dB
Frequency Stability	±0.04 ppm

Uncertainty of AC Conducted Emission Measurement (0.15 MHz ~ 30 MHz)

Measuring Uncertainty for a Level of Confidence of 95% (U = 2Uc(y))	2.84 dB
---	---------

03CH06-KS(BT/WIF):

Uncertainty of Radiated Emission Measurement (9 KHz ~ 30 MHz)

Measuring Uncertainty for a Level of Confidence of 95% (U = 2Uc(y))	3.30dB
---	--------

Uncertainty of Radiated Emission Measurement (30 MHz ~ 1000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% (U = 2Uc(y))	6.08dB
---	--------

Uncertainty of Radiated Emission Measurement (1 GHz ~ 18 GHz)

Measuring Uncertainty for a Level of Confidence of 95% (U = 2Uc(y))	5.18dB
---	--------

Uncertainty of Radiated Emission Measurement (18 GHz ~ 40 GHz)

Measuring Uncertainty for a Level of Confidence of 95% (U = 2Uc(y))	5.22dB
---	--------

03CH02-KS(NFC):

Uncertainty of Radiated Emission Measurement (9 KHz ~ 30 MHz)

Measuring Uncertainty for a Level of Confidence of 95% (U = 2Uc(y))	3.30dB
---	--------

Uncertainty of Radiated Emission Measurement (30 MHz ~ 1000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% (U = 2Uc(y))	6.04dB
---	--------



03CH04-KS(WWAN):

Uncertainty of Radiated Emission Measurement (30 MHz ~ 1000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	2.83 dB
---	---------

Uncertainty of Radiated Emission Measurement (1 GHz ~ 18 GHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	2.83 dB
---	---------

Uncertainty of Radiated Emission Measurement (18 GHz ~ 40 GHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	2.82 dB
---	---------

----- THE END -----



Appendix B. Reference Report



FCC RF Test Report

FCC ID : UZ7EM45B2
EQUIPMENT : Enterprise Mobile
BRAND NAME : Zebra
MODEL NAME : EM45B2
APPLICANT : Zebra Technologies Corporation
3 Overlook Point, Lincolnshire, IL 60069 USA
MANUFACTURER : Zebra Technologies Corporation
3 Overlook Point, Lincolnshire, IL 60069 USA
STANDARD : 47 CFR Part 22(H), 24(E), 27(L)
CLASSIFICATION : PCS Licensed Transmitter Held to Ear (PCE)
TEST DATE(S) : Jul. 07, 2024 ~ Aug. 27, 2024

We, Sporton International Inc. (Kunshan), would like to declare that the tested sample has been evaluated in accordance with the procedures given in ANSI C63.26-2015 and shown compliance with the applicable technical standards.

The test results in this report apply exclusively to the tested model / sample. Without written approval of Sporton International Inc. (Kunshan), the test report shall not be reproduced except in full.

Jason Jia

Approved by: Jason Jia



Sporton International Inc. (Kunshan)

No. 1098, Pengxi North Road, Kunshan Economic Development Zone Jiangsu Province 215300
People's Republic of China



TABLE OF CONTENTS

REVISION HISTORY	3
SUMMARY OF TEST RESULT	4
1 GENERAL DESCRIPTION	5
1.1 Product Feature of Equipment Under Test	5
1.2 Product Specification of Equipment Under Test	6
1.3 Modification of EUT	7
1.4 Maximum ERP/EIRP Power, and Emission Designator	7
1.5 Testing Location	7
1.6 Test Software	8
1.7 Applicable Standards	8
2 TEST CONFIGURATION OF EQUIPMENT UNDER TEST	9
2.1 Test Mode	9
2.2 Connection Diagram of Test System	10
2.3 Support Unit used in test configuration	10
2.4 Measurement Results Explanation Example	10
2.5 Frequency List of Low/Middle/High Channels	11
3 CONDUCTED TEST RESULT	12
3.1 Measuring Instruments	12
3.2 Test Setup	12
3.3 Test Result of Conducted Test	12
3.4 Conducted Output Power and ERP/EIRP	13
3.5 Peak-to-Average Ratio	14
3.6 99% Occupied Bandwidth and 26dB Bandwidth Measurement	15
3.7 Conducted Band Edge	16
3.8 Conducted Spurious Emission	17
3.9 Frequency Stability	18
4 RADIATED TEST ITEMS	19
4.1 Measuring Instruments	19
4.2 Test Setup	19
4.3 Test Result of Radiated Test	20
4.4 Field Strength of Spurious Radiation Measurement	21
5 LIST OF MEASURING EQUIPMENT	22
6 MEASUREMENT UNCERTAINTY	23
APPENDIX A. TEST RESULTS OF CONDUCTED TEST	
APPENDIX B. TEST RESULTS OF RADIATED TEST	
APPENDIX C. TEST SETUP PHOTOGRAPHS	



REVISION HISTORY

REPORT NO.	VERSION	DESCRIPTION	ISSUED DATE
FG460508A	Rev. 01	Initial issue of report	Sep. 11, 2024

SUMMARY OF TEST RESULT

Report Section	FCC Rule	Description	Limit	Result	Remark
3.4	§2.1046	Conducted Output Power	-	Report Only	-
	§22.913(a)(5)	Effective Radiated Power	< 7 Watts	PASS	-
	§24.232(c)	Equivalent Isotropic Radiated Power	< 2 Watts	PASS	-
	§27.50(d)(4)	Equivalent Isotropic Radiated Power	< 1 Watts	PASS	-
3.5	§24.232(d)	Peak-to-Average Ratio	< 13 dB	PASS	-
3.6	§2.1049	Occupied Bandwidth	Reporting Only	PASS	-
3.7	§2.1051 §22.917(a) §24.238(a) §27.53(h)	Band Edge Measurement	< 43+10log10(P[Watts])	PASS	-
3.8	§2.1051 §22.917(a) §24.238(a) §27.53(h)	Conducted Emission	< 43+10log10(P[Watts])	PASS	-
3.9	§2.1055 §22.355	Frequency Stability for Temperature & Voltage	< 2.5 ppm for Part 22	PASS	-
	§2.1055 §24.235 §27.54		Within Authorized Band		
4.4	§2.1053; §22.917(a); §24.238(a); §27.53(h)	Field Strength of Spurious Radiation	< 43+10log10(P[Watts])	PASS	Under limit 33.83 dB at 3420.00 MHz

Conformity Assessment Condition:

- The test results (PASS/FAIL) with all measurement uncertainty excluded are presented against the regulation limits or in accordance with the requirements stipulated by the applicant/manufacturer who shall bear all the risks of non-compliance that may potentially occur if measurement uncertainty is taken into account.
- The measurement uncertainty please refer to each test result in the section "Measurement Uncertainty"

Disclaimer:

The product specifications of the EUT presented in the test report that may affect the test assessments are declared by the manufacturer who shall take full responsibility for the authenticity.



1 General Description

1.1 Product Feature of Equipment Under Test

Product Feature	
Equipment	Enterprise Mobile
Brand Name	Zebra
Model Name	EM45B2
FCC ID	UZ7EM45B2
IMEI Code	Conducted: 350854420028793/350854420029353 Radiation: 350854420030211/350854420030229
HW Version	EV2.5
SW Version	13-32-08.00-TG-U06-STD-ATH-04
MFD	02AUG24
EUT Stage	Identical Prototype

Specification of Accessory				
Battery	Brand Name	Zebra	Model	BT-000501
			Part Number	BT-000501-2000

Supported Unit used in test configuration and system				
AC Adapter 1 (Type C Wall Charger 1)	Brand Name	Zebra	Model	SAWA-102-22520A
			Part Number	PWR-WUA5V45W1US
AC Adapter 2 (Type A Wall Charger 2)	Brand Name	Zebra	Model	SAWA-65-20005A
			Part Number	PWR-WUA5V12W0US
Earphone 1 (Wired headset USB-C)	Brand Name	Zebra	Part Number	HDST-USBC-PTT1-01
Earphone 2 (Rugged Bluetooth Headset)	Brand Name	Zebra	Part Number	HS3100-OTH
Earphone 3 (3.5mm PTT Headset)	Brand Name	Zebra	Part Number	HDST-35MM-PTT1-02
Earphone 4 (Rugged Headset)	Brand Name	Zebra	Part Number	HS2100-OTH
3.5mm to 3.5mm audio connector	Brand Name	Zebra	Part Number	CBL-HS2100-3MS1-01
Type C-Audio Cable (Type C to 3.5mm)	Brand Name	Zebra	Part Number	ADP-USBC-35MM1-01
USB Cable 1 (USB-C to C Cable)	Brand Name	Zebra	Part Number	CBL-EC5X-USBC3A-01
USB Cable 2 (USB-A to C Cable)	Brand Name	Zebra	Part Number	CBL-TC5X-USBC2A-01
EM45 Protective Case	Brand Name	Zebra	Part Number	SG-EM45EXO1-01



1.2 Product Specification of Equipment Under Test

Standards-related Product Specification	
Tx Frequency	GSM/GPRS/EDGE: 850: 824 MHz ~ 849 MHz 1900: 1850MHz ~ 1910MHz WCDMA: Band V: 824 MHz ~ 849 MHz Band II: 1850 MHz ~ 1910 MHz Band IV: 1710 MHz ~ 1755 MHz
Rx Frequency	GSM/GPRS/EDGE: 850: 869 MHz ~ 894 MHz 1900: 1930 MHz ~ 1990 MHz WCDMA: Band V: 869 MHz ~ 894 MHz Band II: 1930 MHz ~ 1990 MHz Band IV: 2110 MHz ~ 2155 MHz
Maximum Output Power to Antenna	<Ant.0> GSM/GPRS/EDGE: 850: 32.32 dBm WCDMA: Band V: 23.02 dBm <Ant.1> GSM/GPRS/EDGE: 850: 30.55 dBm WCDMA: Band V: 22.06 dBm <Ant.2> GSM/GPRS/EDGE: 1900: 29.07 dBm WCDMA: Band II: 22.91 dBm Band IV: 22.79 dBm
Antenna Type	PIFA Antenna
Antenna Gain	<Ant.0> Cellular Band: -3 dBi <Ant.1> Cellular Band: -2.11 dBi <Ant.2> PCS Band: -0.5 dBi AWS Band: -0.5 dBi
Type of Modulation	GSM: GMSK GPRS: GMSK EDGE: GMSK / 8PSK WCDMA : BPSK



	HSPA : QPSK HSPA+ : 16QAM DC-HSDPA : 64QAM
--	--

The maximum ERP/EIRP is calculated from max output power and max antenna gain, only the maximum ERP of Ant.0 for GSM850 / WCDMA Band V and Ant.2 for GSM1900 / WCDMA Band II/IV are shown in the report.

1.3 Modification of EUT

No modifications are made to the EUT during all test items.

1.4 Maximum ERP/EIRP Power, and Emission Designator

FCC Rule	Frequency Band	Frequency Range (MHz)	Type of Modulation	Maximum ERP/EIRP (W)	Emission Designator
Part 22H	GSM850 (GSM)	824.2 ~ 848.8	GMSK	0.5212	242KGXW
Part 22H	GSM850 (EDGE)	824.2 ~ 848.8	8PSK	0.1112	241KG7W
Part 22H	WCDMA Band V	826.4 ~ 846.6	BPSK	0.0612	4M14F9W
Part 24E	GSM1900 (GSM)	1850.2 ~ 1909.8	GMSK	0.7194	244KGXW
Part 24E	GSM1900 (EDGE)	1850.2 ~ 1909.8	8PSK	0.2518	242KG7W
Part 24E	WCDMA Band II	1852.4 ~ 1907.6	BPSK	0.1742	4M15F9W
Part 27L	WCDMA Band IV	1712.4 ~ 1752.6	BPSK	0.1694	4M15F9W

1.5 Testing Location

Sporton International Inc. (Kunshan) is accredited to ISO/IEC 17025:2017 by American Association for Laboratory Accreditation with Certificate Number 5145.02.

Test Firm	Sporton International Inc. (Kunshan)		
Test Site Location	No. 1098, Pengxi North Road, Kunshan Economic Development Zone Jiangsu Province 215300 People's Republic of China TEL : +86-512-57900158		
Test Site No.	Sporton Site No.	FCC Designation No.	FCC Test Firm Registration No.
	TH01-KS 03CH04-KS	CN1257	314309



1.6 Test Software

Item	Site	Manufacture	Name	Version
1.	TH01-KS	SPORTON	FCC LTE_Ver2.0 Auto_china_210503	2.0
2.	03CH04-KS	AUDIX	E3	210616

1.7 Applicable Standards

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

- ♦ 47 CFR Part 22(H), 24(E), 27(L)
- ♦ ANSI C63.26-2015
- ♦ FCC KDB 971168 D01 Power Meas. License Digital Systems v03r01
- ♦ FCC KDB 412172 D01 Determining ERP and EIRP v01r01

Remark:

1. All test items were verified and recorded according to the standards and without any deviation during the test.
2. This EUT has also been tested and complied with the requirements of FCC Part 15, Subpart B, recorded in a separate test report.

2 Test Configuration of Equipment Under Test

2.1 Test Mode

Antenna port conducted and radiated test items were performed according to KDB 971168 D01 Power Meas. License Digital Systems v03r01 with maximum output power.

Radiated measurements were performed with rotating EUT in different three orthogonal test planes to find the maximum emission.(X/Z-Plane)

Radiated emissions were investigated as following frequency range:


1. 30 MHz to 9000 MHz for GSM850 and WCDMA Band V.
2. 30 MHz to 18000 MHz for WCDMA Band IV.
3. 30 MHz to 19100 MHz for GSM1900 and WCDMA Band II.

All modes and data rates and positions were investigated.

Test modes are chosen to be reported as the worst case configuration below:

Test Modes		
Band	Radiated TCs	Conducted TCs
GSM 850	■ GSM Link ■ EDGE 1 Tx slots Link	■ GSM Link ■ EDGE 1 Tx slots Link
GSM 1900	■ GSM Link ■ EDGE 1 Tx slots Link	■ GSM Link ■ EDGE 1 Tx slots Link
WCDMA Band V	■ RMC 12.2Kbps Link	■ RMC 12.2Kbps Link
WCDMA Band II	■ RMC 12.2Kbps Link	■ RMC 12.2Kbps Link
WCDMA Band IV	■ RMC 12.2Kbps Link	■ RMC 12.2Kbps Link

2.2 Connection Diagram of Test System

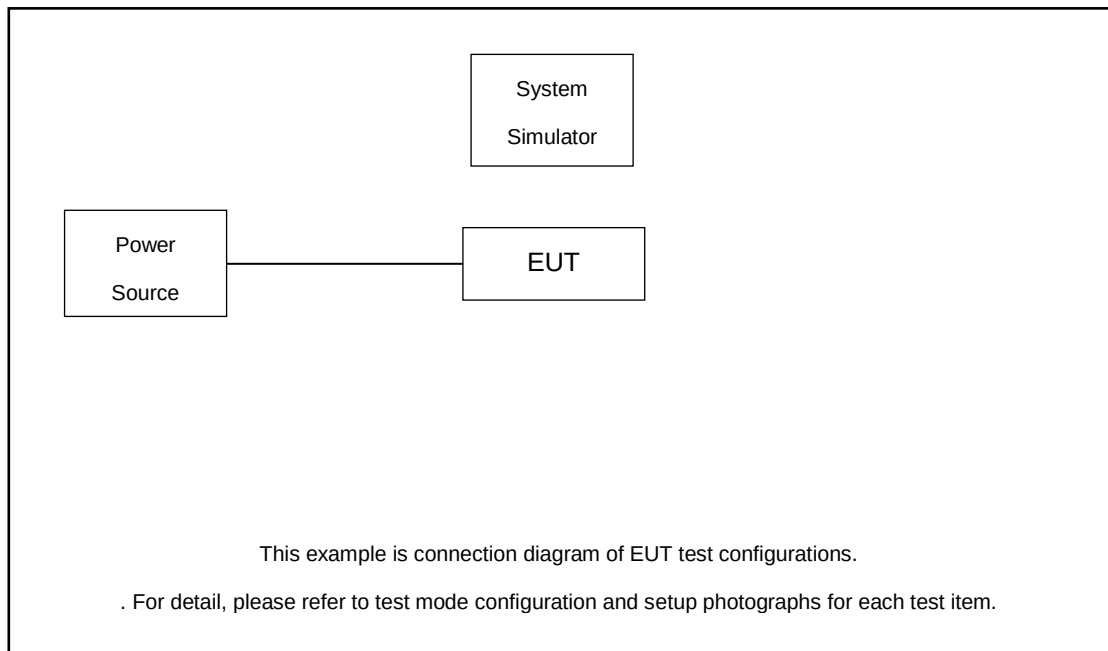

The EUT has been configuration operated in a manner tended to maximize its emission characteristics in a typical application.

2.3 Support Unit used in test configuration

Item	Equipment	Trade Name	Model No.	FCC ID	Data Cable	Power Cord
1.	Base Station	Anritsu	MT8820/8821	N/A	N/A	Unshielded,1.8m

2.4 Measurement Results Explanation Example

For all conducted test items:

The offset level is set in the spectrum analyzer to compensate the RF cable loss and attenuator factor between RF conducted output port and spectrum analyzer. With the offset compensation, the spectrum analyzer reading level will be exactly the RF output level.

The spectrum analyzer offset is derived from RF cable loss and attenuator factor.

Offset = RF cable loss + attenuator factor.

The following shows an offset computation example with RF cable loss 5.2 dB and a 10dB attenuator.

Example :

$$\begin{aligned}
 \text{Offset(dB)} &= \text{RF cable loss(dB)} + \text{attenuator factor(dB)} \\
 &= 5.2 + 10 = 15.2 \text{ (dB)}
 \end{aligned}$$



2.5 Frequency List of Low/Middle/High Channels

Frequency List				
Band	Channel/Frequency(MHz)	Lowest	Middle	Highest
GSM850	Channel	128	189	251
	Frequency	824.2	836.4	848.8
WCDMA Band V	Channel	4132	4182	4233
	Frequency	826.4	836.4	846.6
GSM1900	Channel	512	661	810
	Frequency	1850.2	1880.0	1909.8
WCDMA Band II	Channel	9262	9400	9538
	Frequency	1852.4	1880.0	1907.6
WCDMA Band IV	Channel	1312	1413	1513
	Frequency	1712.4	1732.6	1752.6


3 Conducted Test Result

3.1 Measuring Instruments


See list of measuring instruments of this test report.

3.2 Test Setup


3.2.1 Conducted Output Power

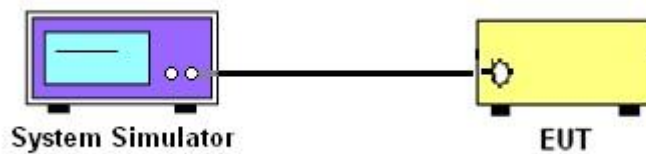

3.2.2 Peak-to-Average Ratio, Occupied Bandwidth, Conducted Band-Edge and Conducted Spurious Emission

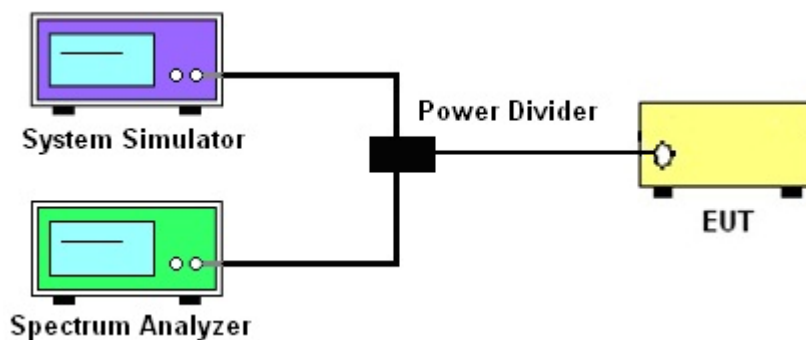

3.2.3 Frequency Stability

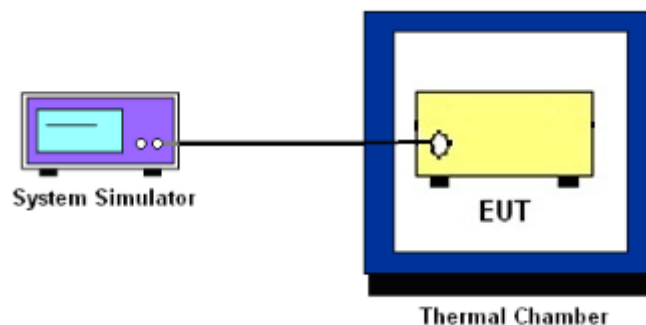

3.3 Test Result of Conducted Test

Please refer to Appendix A.

3.4 Conducted Output Power and ERP/EIRP

3.4.1 Description of the Conducted Output Power and ERP/EIRP

A system simulator was used to establish communication with the EUT. Its parameters were set to enforce EUT transmitting at the maximum power. The measured power in the radio frequency on the transmitter output terminals shall be reported.

The ERP of mobile transmitters must not exceed 7 Watts for GSM850 and WCDMA Band V.

The EIRP of mobile transmitters must not exceed 2 Watts for GSM1900 and WCDMA Band II.

The EIRP of mobile transmitters must not exceed 1 Watts for WCDMA Band IV.

According to KDB 412172 D01 Power Approach,

$EIRP = P_T + G_T - L_C$, $ERP = EIRP - 2.15$, where

P_T = transmitter output power in dBm

G_T = gain of the transmitting antenna in dBi

L_C = signal attenuation in the connecting cable between the transmitter and antenna in dB

3.4.2 Test Procedures

1. The testing follows ANSI C63.26 Section 5.2
2. The transmitter output port was connected to the system simulator.
3. Set EUT at maximum power through the system simulator.
4. Select lowest, middle, and highest channels for each band and different modulation.
5. Measure and record the power level from the system simulator.



3.5 Peak-to-Average Ratio

3.5.1 Description of the PAR Measurement

The peak-to-average ratio (PAR) of the transmission may not exceed 13 dB.

3.5.2 Test Procedures

1. The testing follows ANSI C63.26 Section 5.2.3.4 (CCDF).
2. The EUT was connected to spectrum and system simulator via a power divider.
3. Set the CCDF (Complementary Cumulative Distribution Function) option in spectrum analyzer.
4. The highest RF powers were measured and recorded the maximum PAPR level associated with a probability of 0.1 %.
5. Record the deviation as Peak to Average Ratio.

3.6 99% Occupied Bandwidth and 26dB Bandwidth Measurement

3.6.1 Description of 99% Occupied Bandwidth and 26dB Bandwidth Measurement

The occupied bandwidth is the width of a frequency band such that, below the lower and above the upper frequency limits, the mean powers emitted are each equal to a specified percentage 0.5% of the total mean transmitted power.

The 26 dB emission bandwidth is defined as the frequency range between two points, one above and one below the carrier frequency, at which the spectral density of the emission is attenuated 26 dB below the maximum in-band spectral density of the modulated signal. Spectral density (power per unit bandwidth) is to be measured with a detector of resolution bandwidth equal to approximately 1.0% of the emission bandwidth.

3.6.2 Test Procedures

1. The testing follows ANSI C63.26 Section 5.4
2. The EUT was connected to spectrum analyzer and system simulator via a power divider.
3. The spectrum analyzer center frequency is set to the nominal EUT channel center frequency. The span range for the spectrum analyzer shall be between two and five times the anticipated OBW.
4. The nominal resolution bandwidth (RBW) shall be in the range of 1 to 5 % of the anticipated OBW, and the VBW shall be at least 3 times the RBW.
5. Set the detection mode to peak, and the trace mode to max hold.
6. Determine the reference value: Set the EUT to transmit a modulated signal. Allow the trace to stabilize. Set the spectrum analyzer marker to the highest level of the displayed trace.
(this is the reference value)
7. Determine the “-26 dB down amplitude” as equal to (Reference Value – X).
8. Place two markers, one at the lowest and the other at the highest frequency of the envelope of the spectral display such that each marker is at or slightly below the “-X dB down amplitude” determined in step 6. If a marker is below this “-X dB down amplitude” value it shall be placed as close as possible to this value. The OBW is the positive frequency difference between the two markers.
9. Use the 99 % power bandwidth function of the spectrum analyzer and report the measured bandwidth.



3.7 Conducted Band Edge

3.7.1 Description of Conducted Band Edge Measurement

The power of any emission outside of the authorized operating frequency ranges must be lower than the transmitter power (P) by a factor of at least $43 + 10 \log (P)$ dB.

3.7.2 Test Procedures

1. The testing follows ANSI C63.26 section 5.7
2. The EUT was connected to the spectrum analyzer and system simulator via a power divider.
3. The RF output of EUT was connected to the spectrum analyzer by an RF cable and attenuator.
The path loss was compensated to the results for each measurement.
4. The band edges of low and high channels for the highest RF powers were measured.
5. The RF fundamental frequency should be excluded against the limit line in the operating frequency band.
6. The limit line is derived from $43 + 10\log(P)$ dB below the transmitter power P(Watts)

3.8 Conducted Spurious Emission

3.8.1 Description of Conducted Spurious Emission Measurement

The power of any emission outside of the authorized operating frequency ranges must be lower than the transmitter power (P) by a factor of at least $43 + 10 \log (P)$ dB.

It is measured by means of a calibrated spectrum analyzer and scanned from 30 MHz up to a frequency including its 10th harmonic.

3.8.2 Test Procedures

1. The testing follows ANSI C63.26 section 5.7
2. The EUT was connected to the spectrum analyzer and system simulator via a power divider.
3. The RF output of EUT was connected to the spectrum analyzer by an RF cable and attenuator. The path loss was compensated to the results for each measurement.
4. The middle channel for the highest RF power within the transmitting frequency was measured.
5. The conducted spurious emission for the whole frequency range was taken.
6. The RF fundamental frequency should be excluded against the limit line in the operating frequency band.
7. The limit line is derived from $43 + 10\log(P)$ dB below the transmitter power P(Watts)

3.9 Frequency Stability

3.9.1 Description of Frequency Stability Measurement

The frequency stability shall be measured by variation of ambient temperature and variation of primary supply voltage to ensure that the fundamental emission stays within the authorized frequency block. The frequency stability of the transmitter shall be maintained within $\pm 0.00025\%$ ($\pm 2.5\text{ppm}$) of the center frequency.

3.9.2 Test Procedures for Temperature Variation

1. The testing follows ANSI C63.26 section 5.6.4
2. The EUT was set up in the thermal chamber and connected with the system simulator.
3. With power OFF, the temperature was decreased to -30°C and the EUT was stabilized before testing. Power was applied and the maximum change in frequency was recorded within one minute.
4. With power OFF, the temperature was raised in 10°C step up to 50°C . The EUT was stabilized at each step for at least half an hour. Power was applied and the maximum frequency change was recorded within one minute.

3.9.3 Test Procedures for Voltage Variation

1. The testing follows ANSI C63.26 section 5.6.5
2. The EUT was placed in a temperature chamber at $20\pm 5^{\circ}\text{C}$ and connected with the system simulator.
3. The power supply voltage to the EUT was varied from 85% to 115% of the nominal value for other than hand carried battery equipment.
4. For hand carried, battery powered equipment, reduce the primary ac or dc supply voltage to the battery operating end point, which shall be specified by the manufacturer.
5. The variation in frequency was measured for the worst case.


4 Radiated Test Items

4.1 Measuring Instruments


See list of measuring instruments of this test report.

4.2 Test Setup


4.2.1 For radiated test below 30MHz

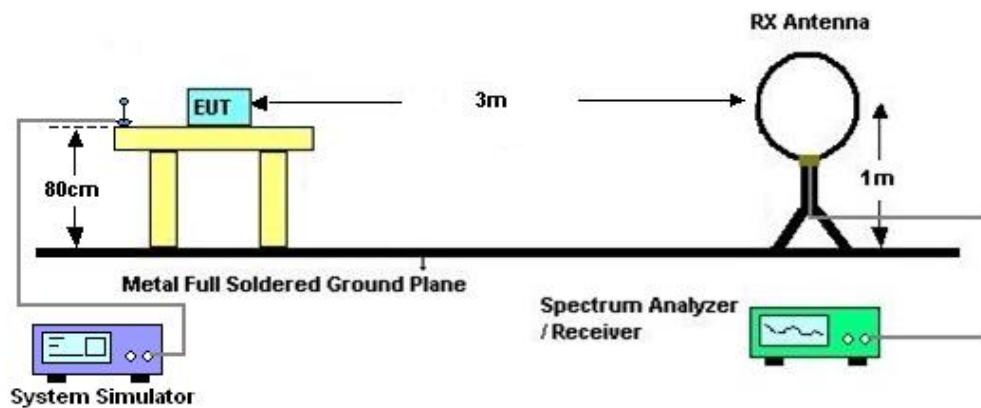

4.2.2 For radiated test from 30MHz to 1GHz

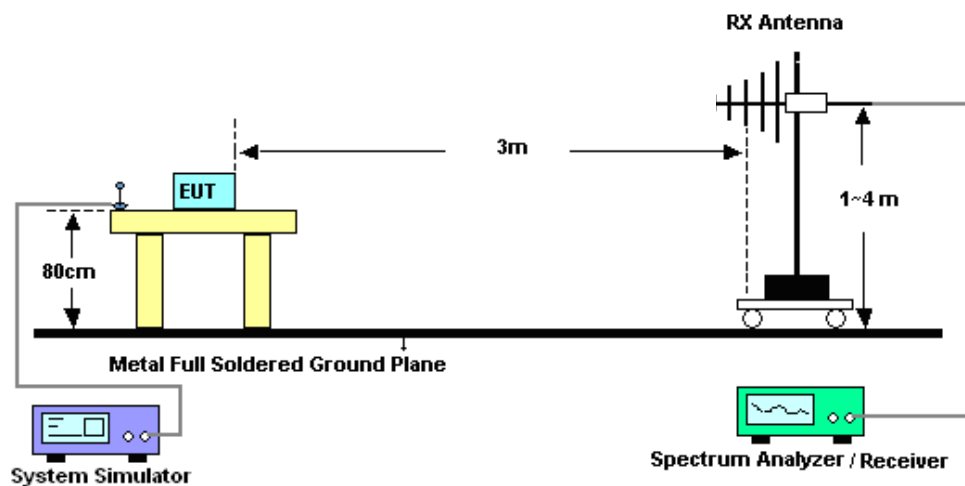

4.2.3 For radiated test above 1GHz

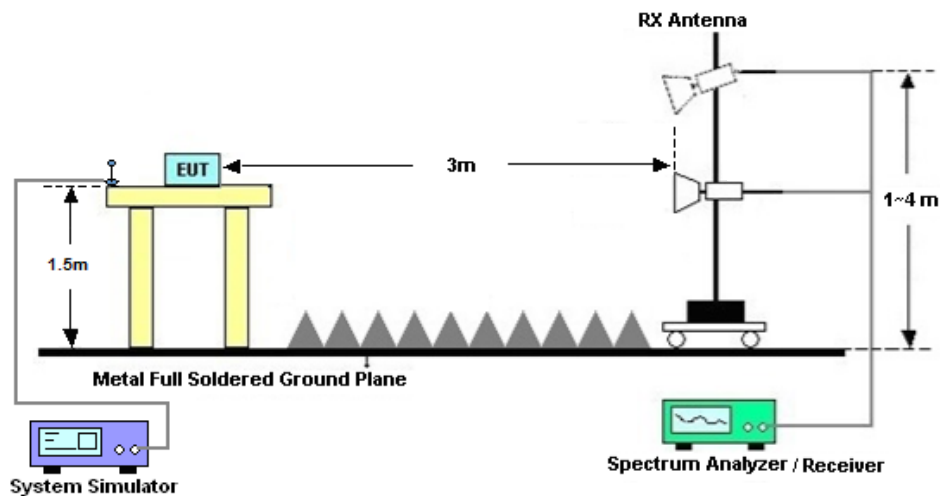

4.3 Test Result of Radiated Test

The low frequency, which started from 9 kHz to 30MHz, was pre-scanned and the result which was 20dB lower than the limit line was not reported.

Please refer to Appendix B.

4.4 Field Strength of Spurious Radiation Measurement

4.4.1 Description of Field Strength of Spurious Radiated Measurement

The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitter power (P) by a factor of at least $43 + 10 \log (P)$ dB. The spectrum is scanned from 30 MHz up to a frequency including its 10th harmonic.

4.4.2 Test Procedures

1. The testing follows ANSI C63.26 Section 5.5
2. The EUT was placed on a rotatable wooden table 0.8 meters for frequency below 1GHz and 1.5 meter for frequency above 1GHz above the ground.
3. The EUT was set 3 meters from the receiving antenna, which was mounted on the antenna tower.
4. The table was rotated 360 degrees to determine the position of the highest spurious emission.
5. The height of the receiving antenna is varied between one meter and four meters to search for the maximum spurious emission for both horizontal and vertical polarizations.
6. Make the measurement with the spectrum analyzer's RBW = 1MHz, VBW = 3MHz, taking record of maximum spurious emission.
7. A horn antenna was substituted in place of the EUT and was driven by a signal generator.
8. Tune the output power of signal generator to the same emission level with EUT maximum spurious emission.
9. Taking the record of output power at antenna port.
10. Repeat step 7 to step 8 for another polarization.
11. $EIRP \text{ (dBm)} = S.G. \text{ Power} - Tx \text{ Cable Loss} + Tx \text{ Antenna Gain}$
12. $ERP \text{ (dBm)} = EIRP - 2.15$
13. The RF fundamental frequency should be excluded against the limit line in the operating frequency band.
14. The limit line is derived from $43 + 10\log(P)$ dB below the transmitter power P(Watts)



5 List of Measuring Equipment

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Test Date	Due Date	Remark
Spectrum Analyzer	R&S	FSV40	101040	10Hz~40GHz	Oct. 11, 2023	Jul. 07, 2024~ Aug. 27, 2024	Oct. 10, 2024	Conducted (TH01-KS)
Power divider	STI	STI08-0055	-	0.5~40GHz	NCR	Jul. 07, 2024~ Aug. 27, 2024	NCR	Conducted (TH01-KS)
Temperature & humidity chamber	Hongzhan	LP-150U	H201401144 0	-40~+150°C 20%~95%RH	Jul. 04, 2024	Jul. 07, 2024~ Aug. 27, 2024	Jul. 03, 2025	Conducted (TH01-KS)
EXA Spectrum Analyzer	Keysight	N9010B	MY5747107 9	10Hz~44G,MAX 30dB	Oct. 11, 2023	Jul. 24, 2024~ Aug. 05, 2024	Oct. 10, 2024	Radiation (03CH04-KS)
EXA Spectrum Analyzer	Keysight	N9010B	MY5747107 9	10Hz~44G,MAX 30dB	Oct. 11, 2023	Jul. 24, 2024~ Aug. 05, 2024	Oct. 10, 2024	Radiation (03CH04-KS)
Loop Antenna	R&S	HFH2-Z2E	101125	9kHz~30MHz	Sep. 11, 2023	Jul. 24, 2024~ Aug. 05, 2024	Sep. 10, 2024	Radiation (03CH04-KS)
Bilog Antenna	TeseQ	CBL6111D	59913	30MHz~1GHz	Aug. 18, 2023	Jul. 24, 2024~ Aug. 05, 2024	Aug. 17, 2025	Radiation (03CH04-KS)
Double Ridge Horn Antenna	ETS-Lindgren	3117	75957	1GHz~18GHz	Oct. 23, 2023	Jul. 24, 2024~ Aug. 05, 2024	Oct. 22, 2024	Radiation (03CH04-KS)
SHF-EHF Horn	Com-power	AH-840	101070	18GHz~40GHz	Jan. 27, 2024	Jul. 24, 2024~ Aug. 05, 2024	Jan. 26, 2025	Radiation (03CH04-KS)
Amplifier	SONOMA	310N	413740	9KHz~1GHz	Jan. 03, 2024	Jul. 24, 2024~ Aug. 05, 2024	Jan. 02, 2025	Radiation (03CH04-KS)
Amplifier	EM	EM18G40G A	060728	18~40GHz	Jan. 02, 2024	Jul. 24, 2024~ Aug. 05, 2024	Jan. 01, 2025	Radiation (03CH04-KS)
high gain Amplifier	EM	EM01G18G A	060840	1Ghz~18Ghz	Oct. 11, 2023	Jul. 24, 2024~ Aug. 05, 2024	Oct. 10, 2024	Radiation (03CH04-KS)
Amplifier	EM	EM01G18G A	060892	1Ghz~18Ghz	Oct. 11, 2023	Jul. 24, 2024~ Aug. 05, 2024	Oct. 10, 2024	Radiation (03CH04-KS)
AC Power Source	Chroma	61601	F104090004	N/A	NCR	Jul. 24, 2024~ Aug. 05, 2024	NCR	Radiation (03CH04-KS)
Turn Table	ChamPro	EM 1000-T	060762-T	0~360 degree	NCR	Jul. 24, 2024~ Aug. 05, 2024	NCR	Radiation (03CH04-KS)
Antenna Mast	ChamPro	EM 1000-A	060762-A	1 m~4 m	NCR	Jul. 24, 2024~ Aug. 05, 2024	NCR	Radiation (03CH04-KS)

NCR: No Calibration Required

6 Measurement Uncertainty

The measurement uncertainties shown below were calculated in accordance with the requirements of ANSI 63.26-2015. All the measurement uncertainty value were shown with a coverage K=2 to indicate 95% level of confidence. The measurement data show herein meets or exceeds the CISPR measurement uncertainty values specified in CISPR 16-4-2 and can be compared directly to specified limit to determine compliance.

Uncertainty of Conducted Measurement

Test Item	Uncertainty
Conducted Spurious Emission & Bandedge	± 2.26 dB
Occupied Channel Bandwidth	$\pm 0.1\%$
Conducted Power	± 0.50 dB
Peak to Average Ratio	± 0.50 dB
Frequency Stability	± 0.04 ppm

Uncertainty of Radiated Emission Measurement (30 MHz ~ 1000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	2.83 dB
---	---------

Uncertainty of Radiated Emission Measurement (1 GHz ~ 18 GHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	2.83 dB
---	---------

Uncertainty of Radiated Emission Measurement (18 GHz ~ 40 GHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	2.82 dB
---	---------

----- THE END -----



Appendix A. Test Results of Conducted Test

Test Engineer :	Simle Wang	Temperature :	22~23°C
		Relative Humidity :	40~42%

Conducted Output Power(Average power and ERP/EIRP)

GSM850_Ant.0

FCC Limit(W): 7						
GSM850	Burst Average Power (dBm)			ERP(W)		
TX Channel	128	189	251			
Frequency (MHz)	824.2	836.4	848.8	L	M	H
GSM 1 Tx slot	32.09	32.32	32.12	0.4943	0.5212	0.4977
GPRS 1 Tx slot	32.10	32.31	32.15	0.4955	0.5200	0.5012
GPRS 2 Tx slots	29.49	29.70	29.55	0.2716	0.2851	0.2754
GPRS 3 Tx slots	27.70	27.81	27.65	0.1799	0.1845	0.1778
GPRS 4 Tx slots	26.02	26.24	26.13	0.1222	0.1285	0.1253
EDGE 1 Tx slot	25.41	25.61	25.42	0.1062	0.1112	0.1064
EDGE 2 Tx slots	23.85	24.02	23.88	0.0741	0.0771	0.0746
EDGE 3 Tx slots	22.55	22.74	22.62	0.0550	0.0574	0.0558
EDGE 4 Tx slots	21.06	21.21	21.05	0.0390	0.0404	0.0389



WCDMA V_Ant.0

FCC Limit(W): 7							
Band		WCDMA V			ERP(W)		
TX Channel		4132	4182	4233			
Rx Channel		4357	4407	4458			
Frequency (MHz)		826.4	836.4	846.6	L	M	H
3GPP Rel 99	AMR 12.2Kbps	22.94	22.98	22.96	0.0601	0.0607	0.0604
3GPP Rel 99	RMC 12.2Kbps	22.88	23.02	22.98	0.0593	0.0612	0.0607
3GPP Rel 6	HSDPA Subtest-1	21.66	21.88	21.86	0.0448	0.0471	0.0469
3GPP Rel 6	HSDPA Subtest-2	21.83	21.80	21.69	0.0466	0.0462	0.0451
3GPP Rel 6	HSDPA Subtest-3	21.24	21.25	21.23	0.0406	0.0407	0.0406
3GPP Rel 6	HSDPA Subtest-4	21.16	21.38	21.15	0.0399	0.0420	0.0398
3GPP Rel 8	DC-HSDPA Subtest-1	21.68	21.80	21.95	0.0450	0.0462	0.0479
3GPP Rel 8	DC-HSDPA Subtest-2	21.94	21.78	21.84	0.0478	0.0460	0.0467
3GPP Rel 8	DC-HSDPA Subtest-3	21.34	21.34	21.22	0.0416	0.0416	0.0405
3GPP Rel 8	DC-HSDPA Subtest-4	21.37	21.34	21.23	0.0419	0.0416	0.0406
3GPP Rel 6	HSUPA Subtest-1	21.76	21.70	21.79	0.0458	0.0452	0.0461
3GPP Rel 6	HSUPA Subtest-2	19.76	19.68	19.81	0.0289	0.0284	0.0292
3GPP Rel 6	HSUPA Subtest-3	20.71	20.81	20.84	0.0360	0.0368	0.0371
3GPP Rel 6	HSUPA Subtest-4	19.56	19.65	19.91	0.0276	0.0282	0.0299
3GPP Rel 6	HSUPA Subtest-5	21.79	21.90	21.83	0.0461	0.0473	0.0466

**GSM1900_Ant.2**

FCC Limit(W): 2						
GSM1900	Burst Average Power (dBm)			EIRP(W)		
TX Channel	512	661	810			
Frequency (MHz)	1850.2	1880	1909.8	L	M	H
GSM 1 Tx slot	28.86	29.07	28.90	0.6855	0.7194	0.6918
GPRS 1 Tx slot	28.74	29.00	28.87	0.6668	0.7079	0.6871
GPRS 2 Tx slots	26.64	26.76	26.55	0.4111	0.4227	0.4027
GPRS 3 Tx slots	24.82	24.91	24.70	0.2704	0.2761	0.2630
GPRS 4 Tx slots	23.28	23.52	23.29	0.1897	0.2004	0.1901
EDGE 1 Tx slot	24.35	24.51	24.40	0.2427	0.2518	0.2455
EDGE 2 Tx slots	22.84	22.97	22.80	0.1714	0.1766	0.1698
EDGE 3 Tx slots	21.25	21.39	21.23	0.1189	0.1227	0.1183
EDGE 4 Tx slots	20.15	20.40	20.28	0.0923	0.0977	0.0951



WCDMA IV_Ant.2

FCC Limit(W): 1							
Band		WCDMA IV			EIRP(W)		
TX Channel		1312	1413	1513			
Rx Channel		1537	1638	1738			
Frequency (MHz)		1712.4	1732.6	1752.6	L	M	H
3GPP Rel 99	AMR 12.2Kbps	22.64	22.65	22.64	0.1637	0.1641	0.1637
3GPP Rel 99	RMC 12.2Kbps	22.61	22.79	22.77	0.1626	0.1694	0.1687
3GPP Rel 6	HSDPA Subtest-1	21.33	21.65	21.64	0.1211	0.1303	0.1300
3GPP Rel 6	HSDPA Subtest-2	21.62	21.55	21.47	0.1294	0.1274	0.1250
3GPP Rel 6	HSDPA Subtest-3	20.94	21.05	20.91	0.1107	0.1135	0.1099
3GPP Rel 6	HSDPA Subtest-4	20.86	21.17	20.84	0.1086	0.1167	0.1081
3GPP Rel 8	DC-HSDPA Subtest-1	21.44	21.53	21.70	0.1242	0.1268	0.1318
3GPP Rel 8	DC-HSDPA Subtest-2	21.60	21.54	21.56	0.1288	0.1271	0.1276
3GPP Rel 8	DC-HSDPA Subtest-3	21.04	21.05	20.97	0.1132	0.1135	0.1114
3GPP Rel 8	DC-HSDPA Subtest-4	21.05	21.01	20.90	0.1135	0.1125	0.1096
3GPP Rel 6	HSUPA Subtest-1	21.51	21.50	21.59	0.1262	0.1259	0.1285
3GPP Rel 6	HSUPA Subtest-2	19.55	19.44	19.54	0.0804	0.0783	0.0802
3GPP Rel 6	HSUPA Subtest-3	20.47	20.55	20.51	0.0993	0.1012	0.1002
3GPP Rel 6	HSUPA Subtest-4	19.24	19.32	19.67	0.0748	0.0762	0.0826
3GPP Rel 6	HSUPA Subtest-5	21.54	21.61	21.60	0.1271	0.1291	0.1288



WCDMA II_Ant.2

FCC Limit(W): 2							
Band		WCDMA II			EIRP(W)		
TX Channel		9262	9400	9538			
Rx Channel		9662	9800	9938			
Frequency (MHz)		1852.4	1880	1907.6	L	M	H
3GPP Rel 99	AMR 12.2Kbps	22.76	22.84	22.75	0.1683	0.1714	0.1679
3GPP Rel 99	RMC 12.2Kbps	22.67	22.91	22.80	0.1648	0.1742	0.1698
3GPP Rel 6	HSDPA Subtest-1	21.54	21.65	21.68	0.1271	0.1303	0.1312
3GPP Rel 6	HSDPA Subtest-2	21.62	21.62	21.52	0.1294	0.1294	0.1265
3GPP Rel 6	HSDPA Subtest-3	21.08	21.01	21.09	0.1143	0.1125	0.1146
3GPP Rel 6	HSDPA Subtest-4	20.99	21.13	20.94	0.1119	0.1156	0.1107
3GPP Rel 8	DC-HSDPA Subtest-1	21.53	21.69	21.72	0.1268	0.1315	0.1324
3GPP Rel 8	DC-HSDPA Subtest-2	21.71	21.61	21.70	0.1321	0.1291	0.1318
3GPP Rel 8	DC-HSDPA Subtest-3	21.13	21.20	21.04	0.1156	0.1175	0.1132
3GPP Rel 8	DC-HSDPA Subtest-4	21.15	21.18	21.10	0.1161	0.1169	0.1148
3GPP Rel 6	HSUPA Subtest-1	21.59	21.59	21.62	0.1285	0.1285	0.1294
3GPP Rel 6	HSUPA Subtest-2	19.57	19.50	19.60	0.0807	0.0794	0.0813
3GPP Rel 6	HSUPA Subtest-3	20.56	20.68	20.73	0.1014	0.1042	0.1054
3GPP Rel 6	HSUPA Subtest-4	19.45	19.50	19.72	0.0785	0.0794	0.0836
3GPP Rel 6	HSUPA Subtest-5	21.54	21.74	21.72	0.1271	0.1330	0.1324



A1. GSM

Peak-to-Average Ratio


Mode	GSM850		Limit: 13dB
Mod.	GSM	EDGE class 8	Result
Lowest CH	0.35	3.45	PASS
Middle CH	0.32	3.42	
Highest CH	0.29	3.48	

Mode	GSM1900		Limit: 13dB
Mod.	GSM	EDGE class 8	Result
Lowest CH	0.32	3.45	PASS
Middle CH	0.32	3.30	
Highest CH	0.32	3.57	



GSM850 (GSM)


Lowest Channel

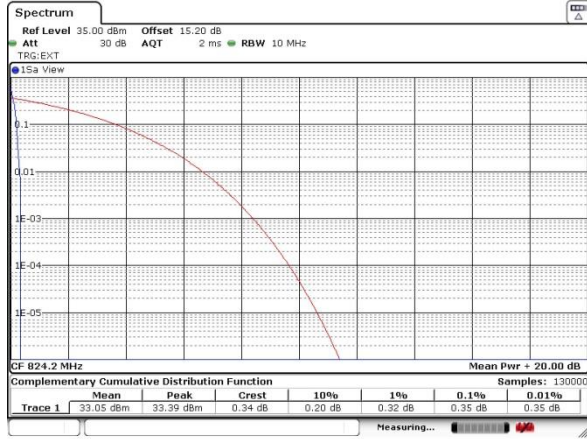

Date: 7.JUL.2024 13:45:08

GSM850 (EDGE class 8)

Lowest Channel

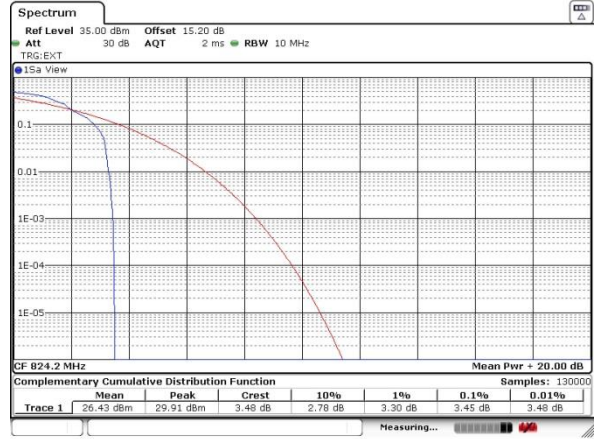


Date: 7.JUL.2024 13:35:35

Middle Channel




Date: 7.JUL.2024 13:45:53

Middle Channel

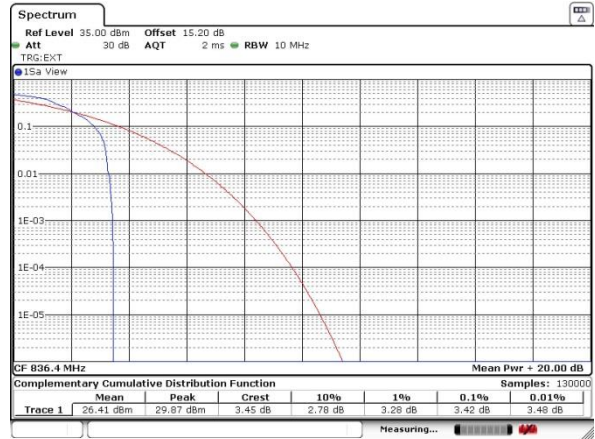


Date: 7.JUL.2024 13:35:41

Highest Channel

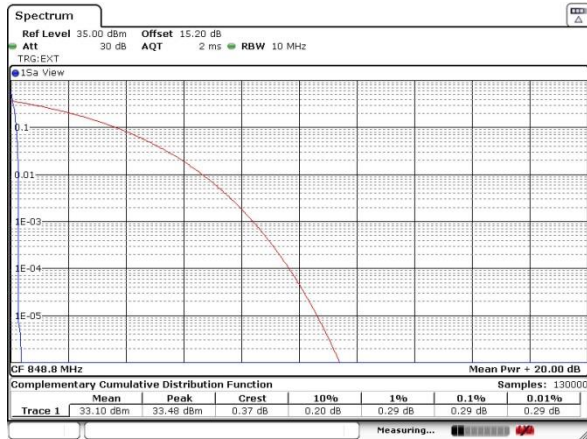

Date: 7.JUL.2024 13:45:25

Highest Channel

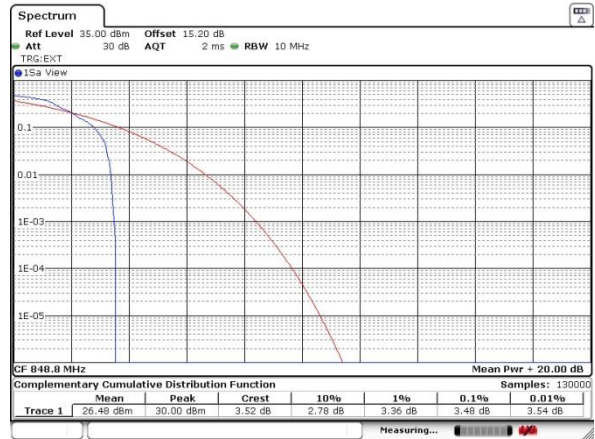


Date: 7.JUL.2024 13:35:48




GSM1900 (GSM)

Lowest Channel

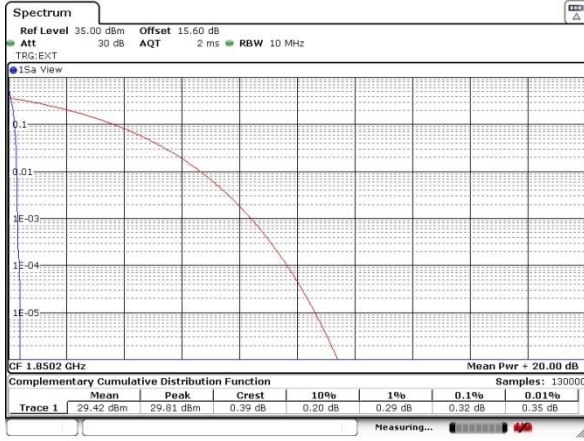

GSM1900 (EDGE class 8)


Lowest Channel

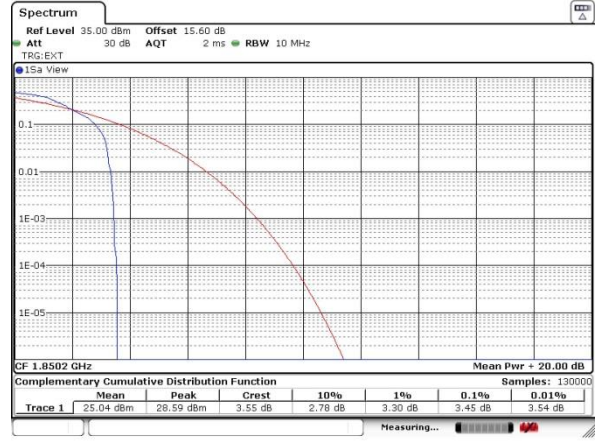


Middle Channel



Middle Channel

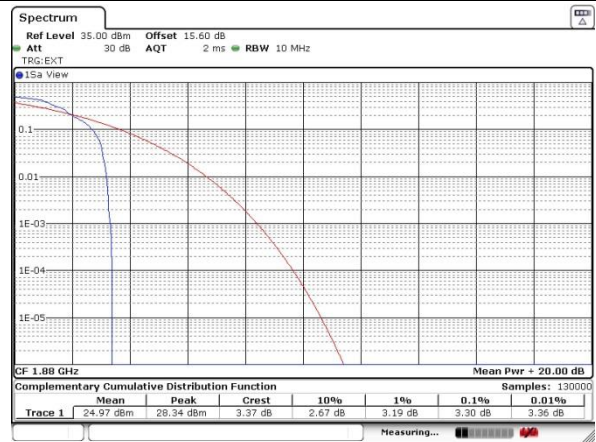

Highest Channel

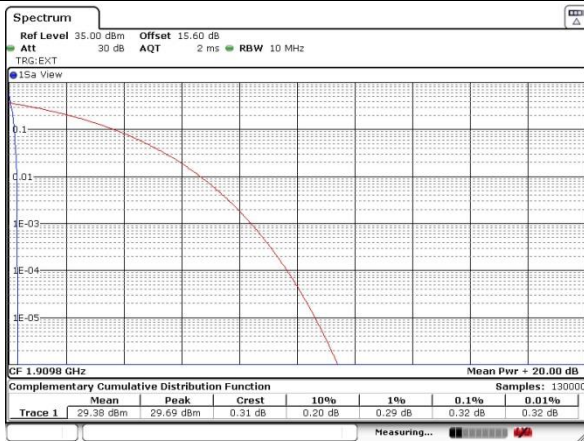

Highest Channel





26dB Bandwidth


Mode	GSM850(MHz)	
Mod.	GSM	EDGE class 8
Lowest CH	0.312	0.314
Middle CH	0.317	0.308
Highest CH	0.315	0.306

Mode	GSM1900(MHz)	
Mod.	GSM	EDGE class 8
Lowest CH	0.316	0.313
Middle CH	0.314	0.309
Highest CH	0.317	0.313




GSM850 (GSM)

Lowest Channel

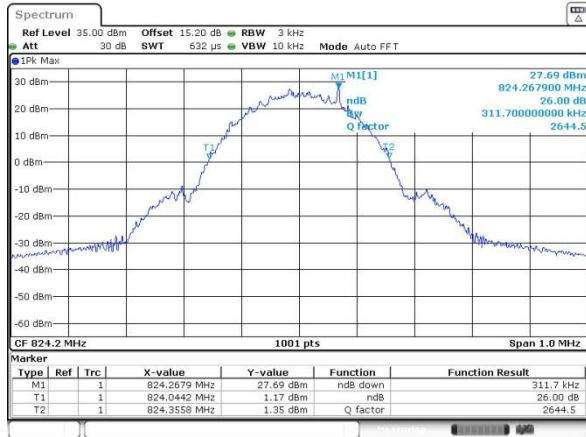


GSM850 (EDGE class 8)


Lowest Channel

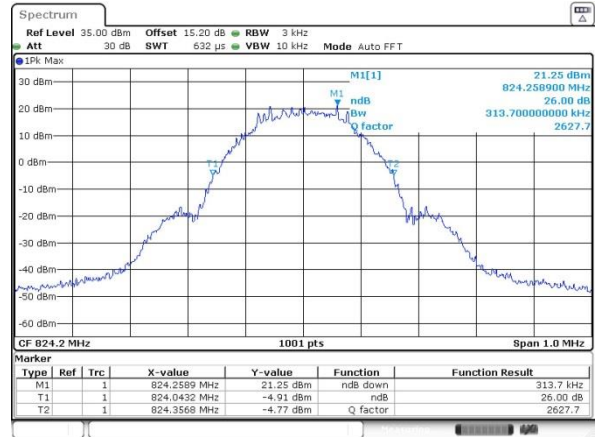


Middle Channel

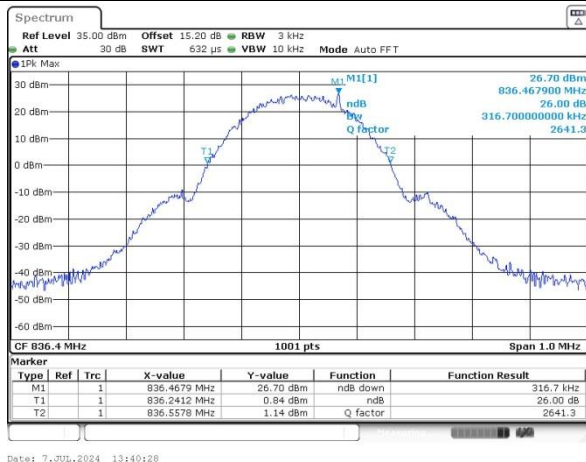


Middle Channel

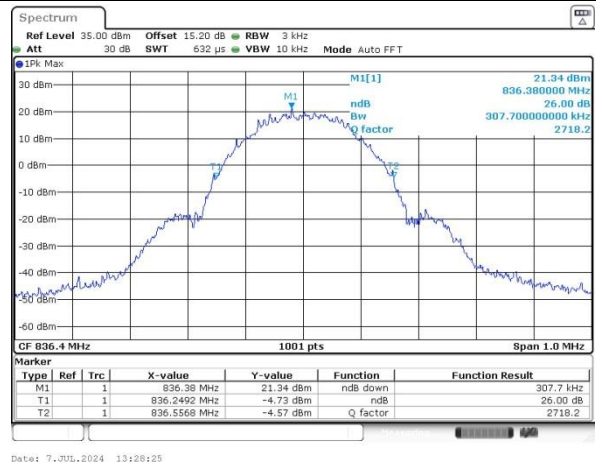

Highest Channel

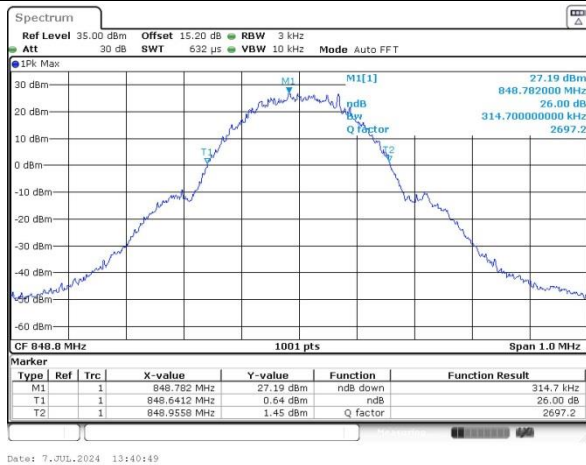


Highest Channel

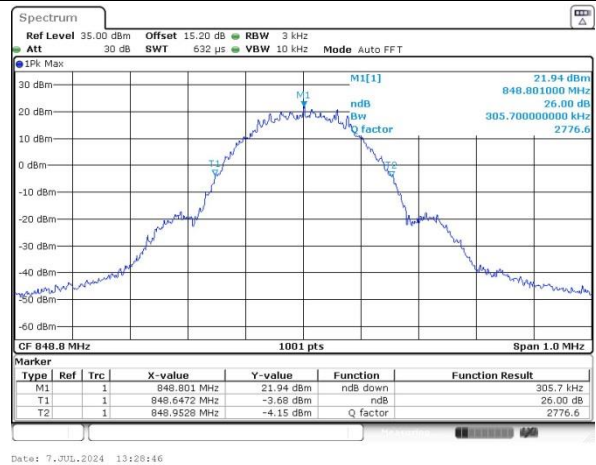



GSM1900 (GSM)


Lowest Channel

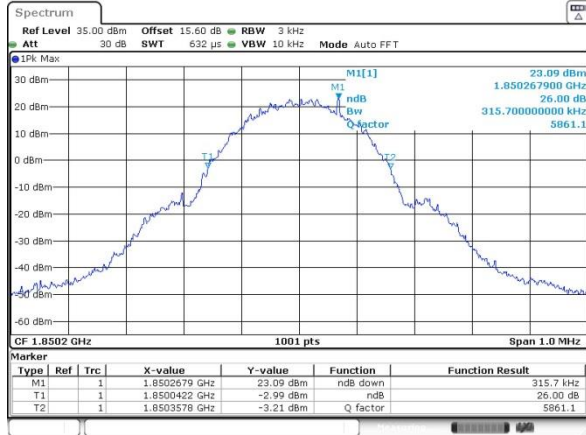

Date: 7.JUL.2024 13:08:07

GSM1900 (EDGE class 8)

Lowest Channel

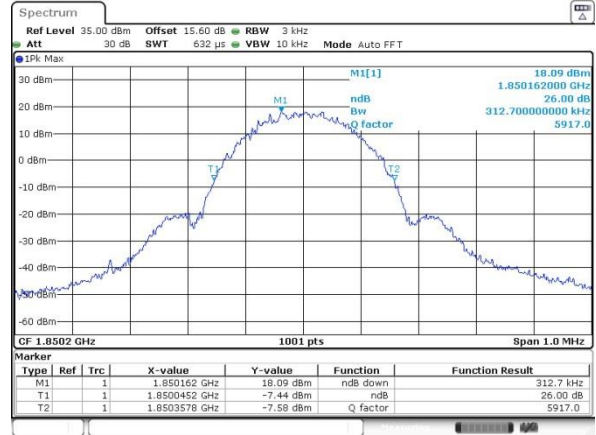


Date: 7.JUL.2024 13:19:08

Middle Channel




Date: 7.JUL.2024 13:08:32

Middle Channel

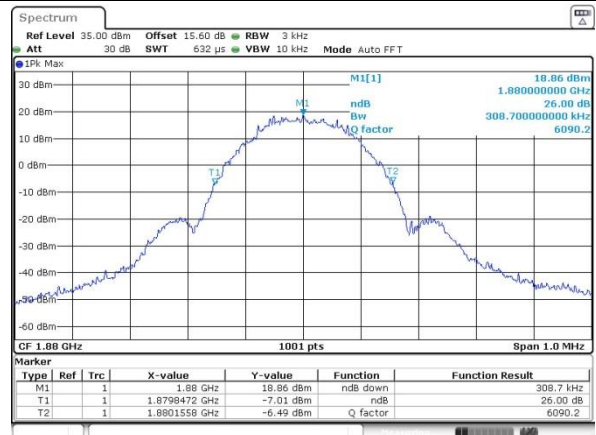


Date: 7.JUL.2024 13:19:42

Highest Channel

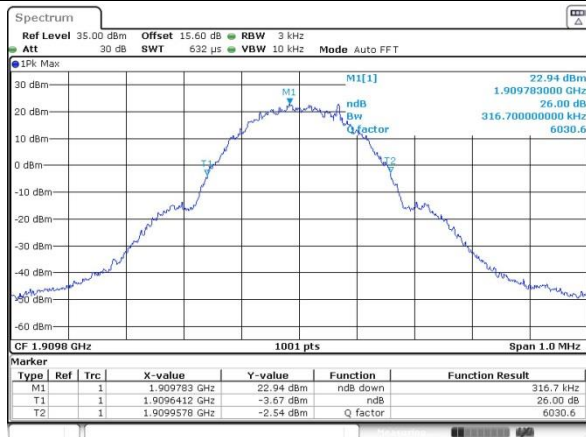

Date: 7.JUL.2024 13:08:55

Highest Channel

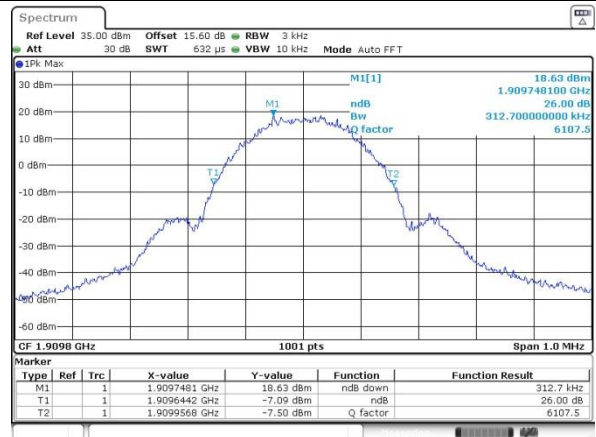

Date: 7.JUL.2024 13:20:13



Occupied Bandwidth


Mode	GSM850(MHz)	
Mod.	GSM	EDGE class 8
Lowest CH	0.241	0.240
Middle CH	0.240	0.241
Highest CH	0.242	0.239

Mode	GSM1900(MHz)	
Mod.	GSM	EDGE class 8
Lowest CH	0.242	0.242
Middle CH	0.244	0.242
Highest CH	0.242	0.241




GSM850 (GSM)

Lowest Channel

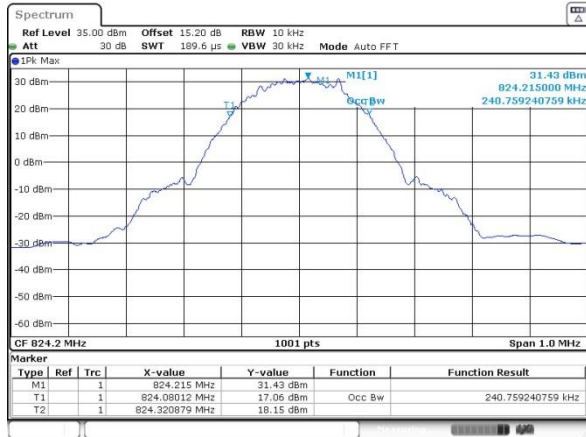


GSM850 (EDGE class 8)

Lowest Channel

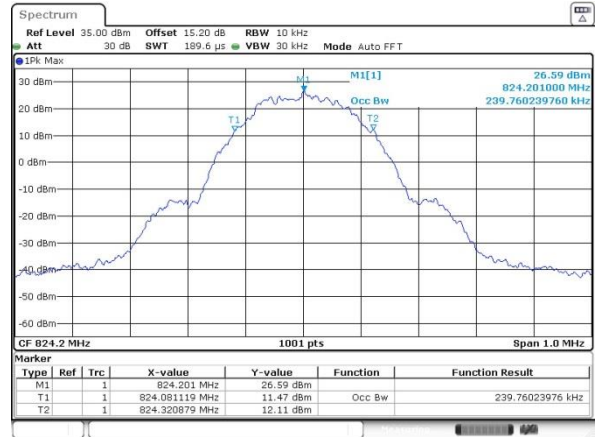

Middle Channel

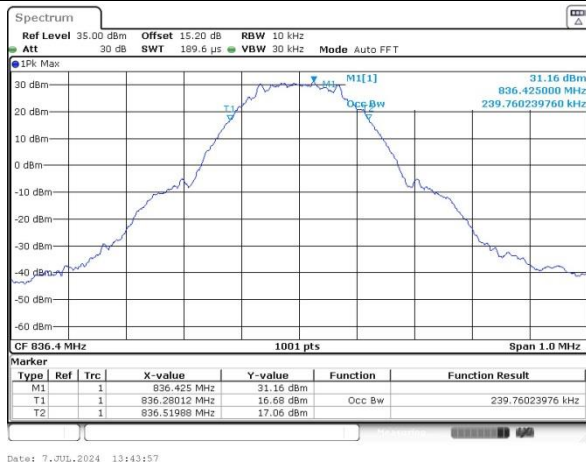

Middle Channel



Highest Channel




Highest Channel





GSM1900 (GSM)

Lowest Channel

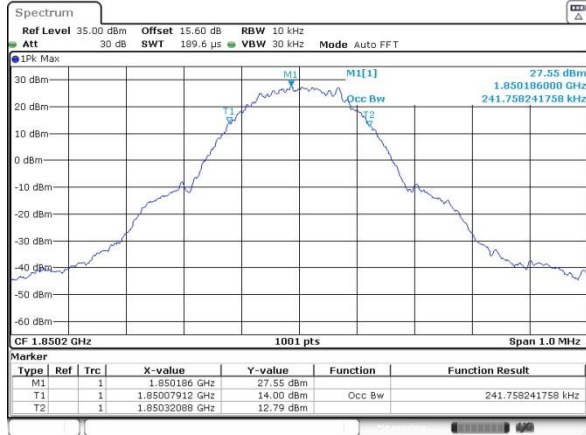

Date: 7.JUL.2024 13:10:33

GSM1900 (EDGE class 8)

Lowest Channel




Date: 7.JUL.2024 13:21:49

Middle Channel



Date: 7.JUL.2024 13:10:50

Middle Channel

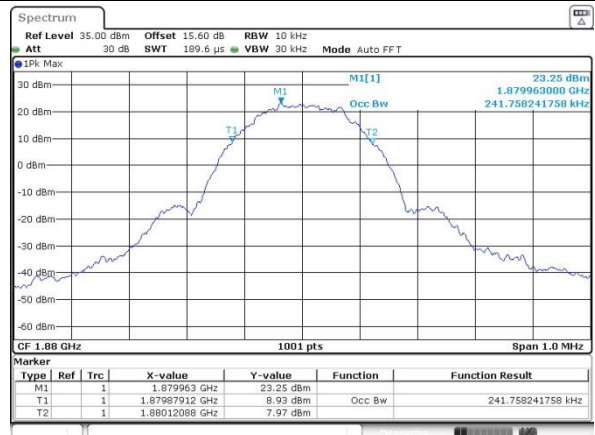


Date: 7.JUL.2024 13:22:06

Highest Channel



Date: 7.JUL.2024 13:11:07

Highest Channel

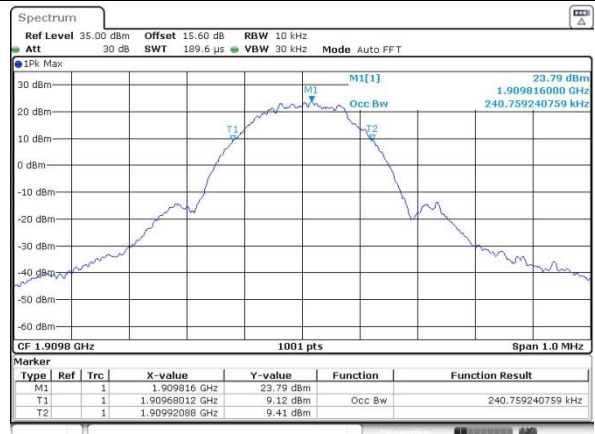


Date: 7.JUL.2024 13:22:23




Conducted Band Edge

GSM850 (GSM)

Lowest Band Edge

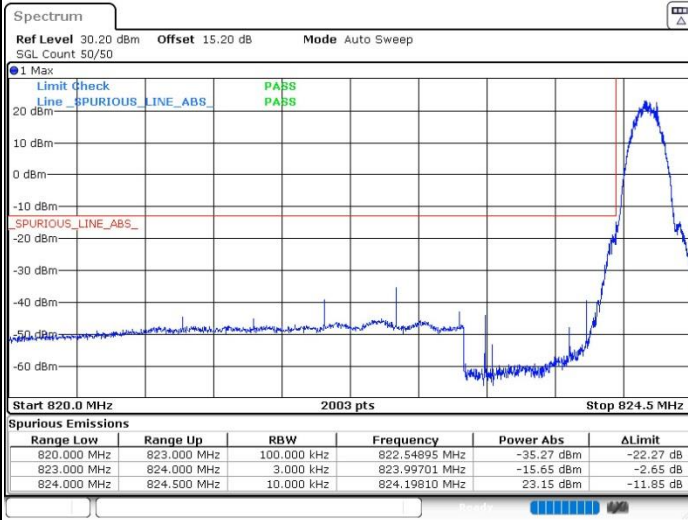


Highest Band Edge

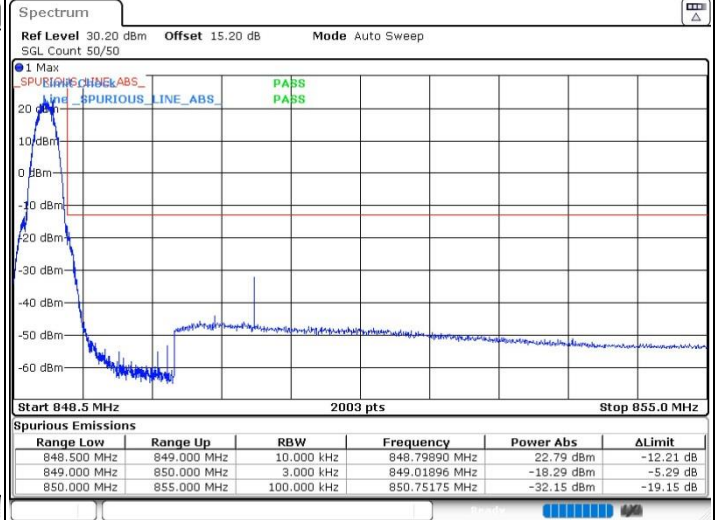


GSM850 (EDGE class 8)

Lowest Band Edge

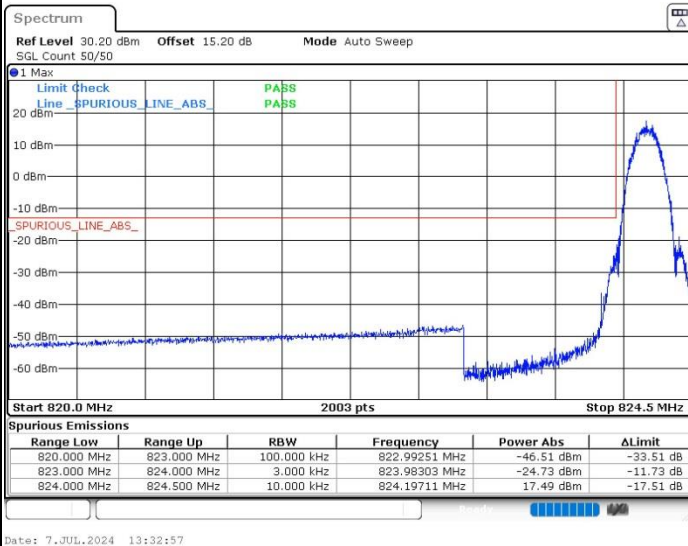


Highest Band Edge

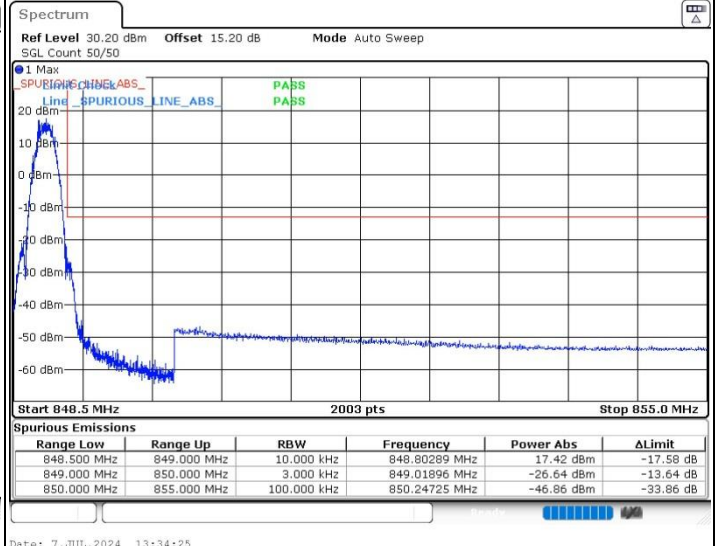




GSM1900 (GSM)

Lowest Band Edge

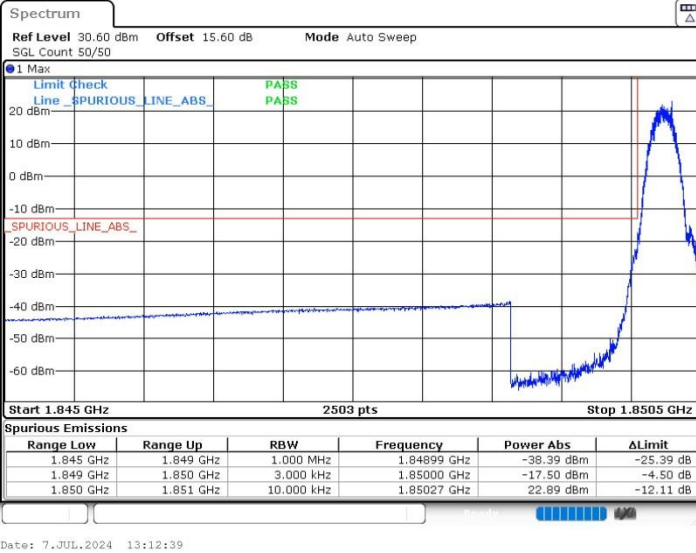


Highest Band Edge

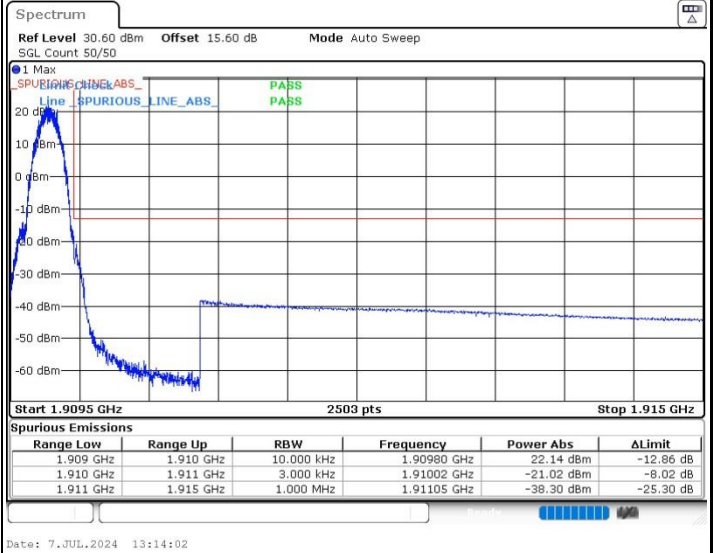


GSM1900 (EDGE class 8)

Lowest Band Edge

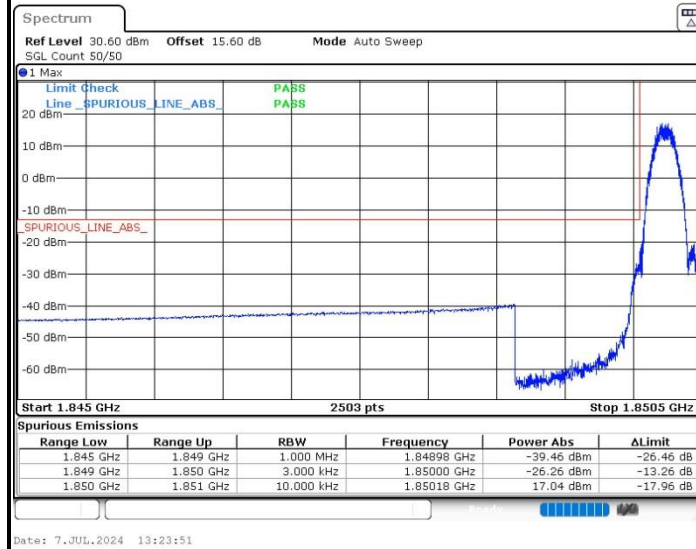

Highest Band Edge

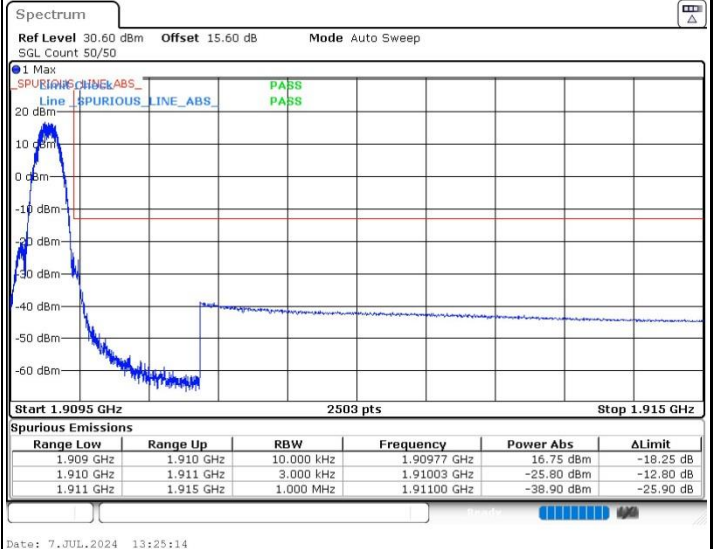




Conducted Spurious Emission

GSM850 (GSM)


Lowest Channel

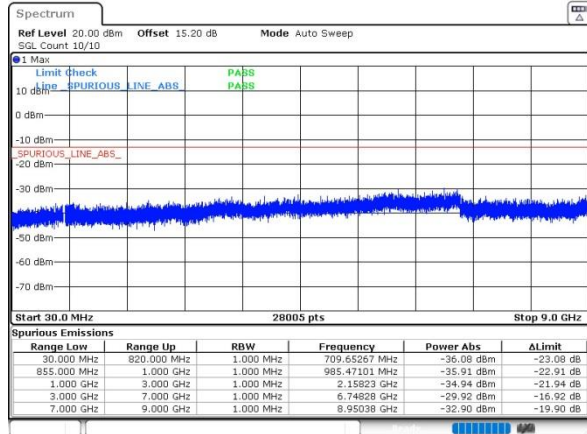

Date: 7.JUL.2024 13:44:40


GSM850 (EDGE class 8)

Lowest Channel

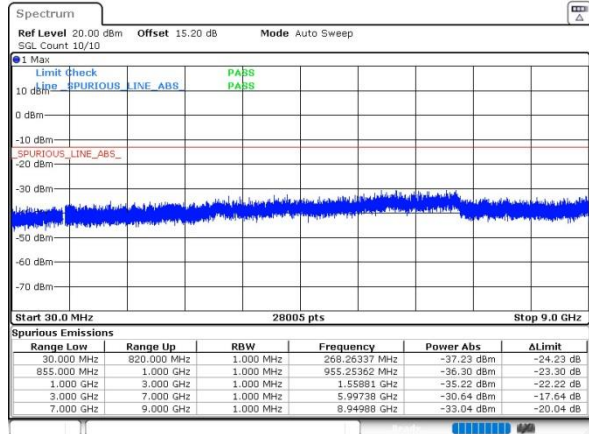


Date: 7.JUL.2024 13:35:03

Middle Channel

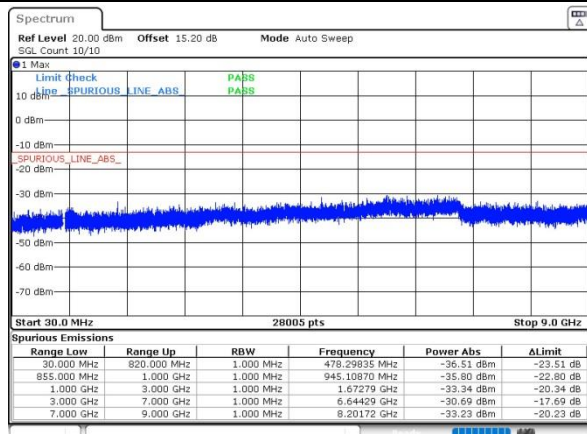


Date: 7.JUL.2024 13:44:49

Middle Channel

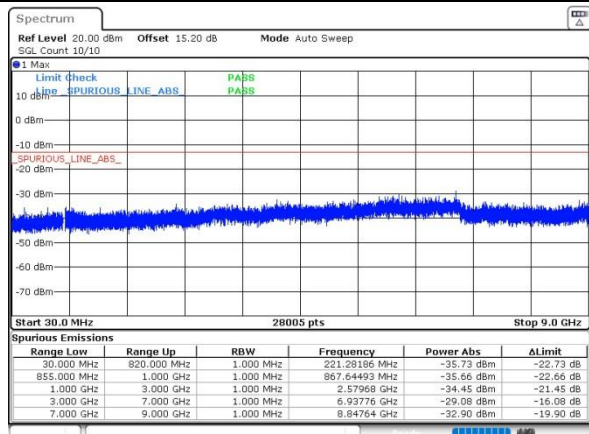


Date: 7.JUL.2024 13:35:12

Highest Channel

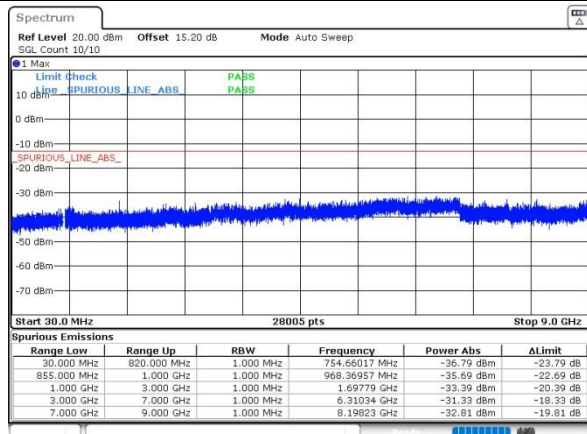

Date: 7.JUL.2024 13:44:58

Highest Channel

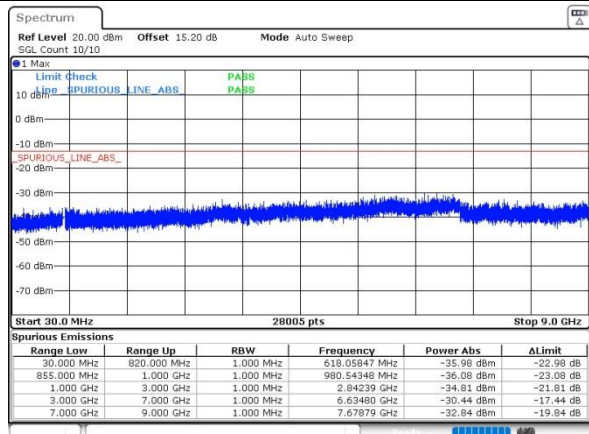


Date: 7.JUL.2024 13:35:20



GSM1900 (GSM)


Lowest Channel

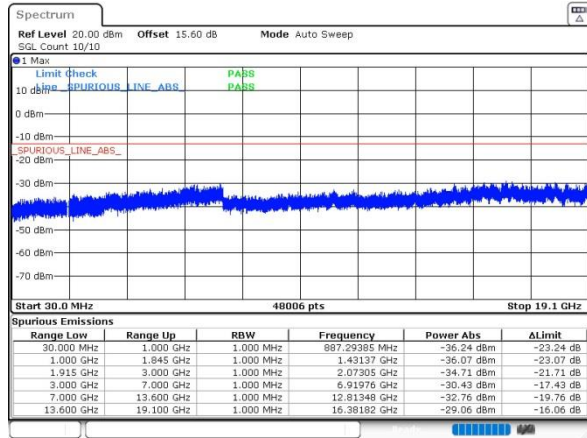

Date: 7.JUL.2024 13:15:03


GSM1900 (EDGE class 8)

Lowest Channel

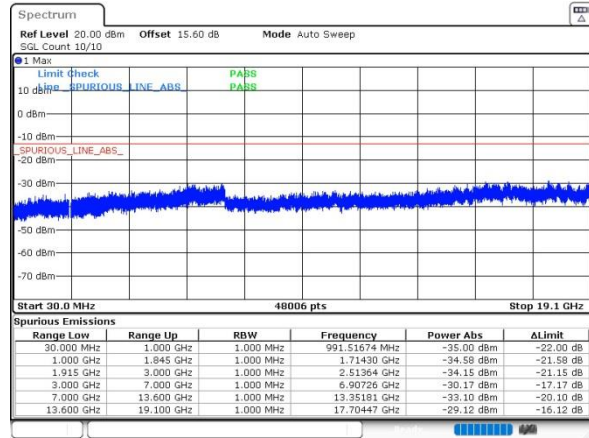


Date: 7.JUL.2024 13:25:31

Middle Channel

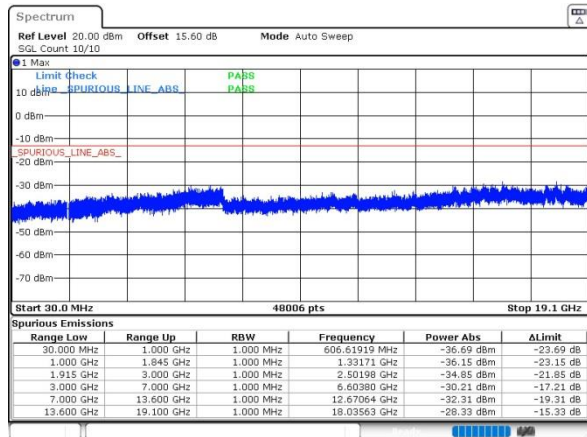


Date: 7.JUL.2024 13:15:12

Middle Channel

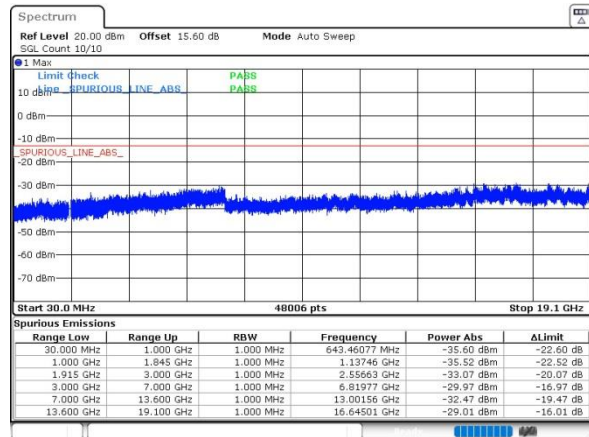


Date: 7.JUL.2024 13:25:40

Highest Channel

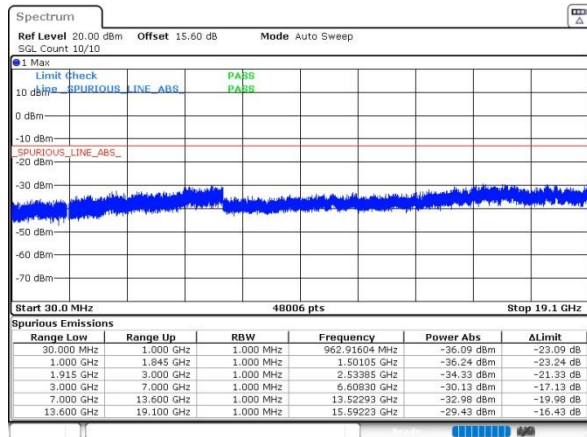

Date: 7.JUL.2024 13:15:22

Highest Channel

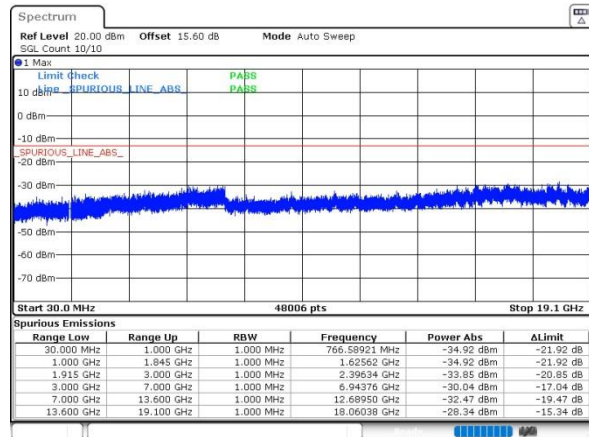

Date: 7.JUL.2024 13:25:49

**Frequency Stability**

Test Conditions	Middle Channel	GSM850 (GSM)	GSM850 (EDGE class 8)	Limit 2.5ppm
Temperature (°C)	Voltage (Volt)	Deviation (ppm)		Result
50	Normal Voltage	0.0042	0.0058	PASS
40	Normal Voltage	0.0517	0.0147	
30	Normal Voltage	0.0099	0.0562	
20(Ref.)	Normal Voltage	0.0000	0.0000	
10	Normal Voltage	0.0563	0.0428	
0	Normal Voltage	0.0182	0.0536	
-10	Normal Voltage	0.0059	0.0447	
-20	Normal Voltage	0.0139	0.0144	
-30	Normal Voltage	0.0174	0.0458	
20	Maximum Voltage	0.0455	0.0556	
20	Normal Voltage	0.0000	0.0000	
20	Battery End Point	0.0328	0.0238	



Test Conditions	Middle Channel	GSM1900 (GSM)	GSM1900 (EDGE class 8)	Limit Note 2.
Temperature (°C)	Voltage (Volt)	Deviation (ppm)		Result
50	Normal Voltage	0.0044	0.0002	PASS
40	Normal Voltage	0.0058	0.0044	
30	Normal Voltage	0.0069	0.0076	
20(Ref.)	Normal Voltage	0.0000	0.0000	
10	Normal Voltage	0.0164	0.0269	
0	Normal Voltage	0.0047	0.0162	
-10	Normal Voltage	0.0128	0.0033	
-20	Normal Voltage	0.0218	0.0039	
-30	Normal Voltage	0.0003	0.0274	
20	Maximum Voltage	0.0047	0.0182	
20	Normal Voltage	0.0000	0.0000	
20	Battery End Point	0.0169	0.0014	

Note:

1. Normal Voltage = 3.85V ; Battery End Point (BEP) =3.5V. ; Maximum Voltage =4.41V
2. The frequency fundamental emissions stay within the authorized frequency block based on the frequency deviation measured is small.



A2. WCDMA

Peak-to-Average Ratio

Mode	WCDMA Band V	WCDMA Band II	WCDMA Band IV	Limit: 13dB
Mod.	RMC 12.2Kbps	RMC 12.2Kbps	RMC 12.2Kbps	Result
Lowest CH	3.16	2.67	3.25	PASS
Middle CH	3.30	2.81	3.10	
Highest CH	3.16	2.87	3.10	