



Spot Check Evaluation

FCC ID : UZ7EM45B1
EQUIPMENT : Enterprise Mobile
BRAND NAME : Zebra
MODEL NAME : EM45B1
APPLICANT : Zebra Technologies Corporation
3 Overlook Point, Lincolnshire, IL 60069 USA
MANUFACTURER : Zebra Technologies Corporation
3 Overlook Point, Lincolnshire, IL 60069 USA
STANDARD : 47 CFR Part 22(H), 24(E), 27(L), 27(H), 27(F), 27(M),
27(N), 27(O), 27(Q), 90(S)
47 CFR Part 15 Subpart C §15.247
47 CFR Part 15 Subpart C §15.225
47 CFR Part 15 Subpart E §15.407

We, Sporton International Inc. (Kunshan), would like to declare that the tested sample has been evaluated in accordance with the procedures given in ANSI C63.26-2015 and shown compliance with the applicable technical standards.

The test results in this report apply exclusively to the tested model / sample. Without written approval of Sporton International Inc. (Kunshan), the test report shall not be reproduced except in full.

Jason Jia

Approved by: Jason Jia



Sporton International Inc. (Kunshan)

**No. 1098, Pengxi North Road, Kunshan Economic Development Zone Jiangsu Province 215300
People's Republic of China**



TABLE OF CONTENTS

REVISION HISTORY.....	3
1 GENERAL DESCRIPTION	4
1.1 Product Feature of Equipment Under Test	4
1.2 Modification of EUT	5
1.3 Testing Site.....	5
1.4 Test Software	5
1.5 Applicable Standards	6
2 RE-USE OF MEASURED DATA	7
2.1 Introduction Section.....	7
2.2 Model Difference Information	7
2.3 Reference detail Section:	8
2.4 Spot Check Verification Data Section	9
3 LIST OF MEASURING EQUIPMENT	21
4 MEASUREMENT UNCERTAINTY	24
APPENDIX A. TEST SETUP PHOTOGRAPHS	
APPENDIX B. REFERENCE REPORT	



REVISION HISTORY

REPORT NO.	VERSION	DESCRIPTION	ISSUED DATE
FG460508-02D	Rev. 01	Initial issue of report	Feb. 13, 2025

1 General Description

1.1 Product Feature of Equipment Under Test

Product Feature	
Equipment	Enterprise Mobile
Brand Name	Zebra
Model Name	EM45B1
FCC ID	UZ7EM45B1
IMEI Code	Conducted: 350332150060484 Conduction: 350332150060096/350332150064049 Radiation: 350332150060260/350332150063959 CBP/DFS: 350332150060575
HW Version	DV
SW Version	14-24-09.00-UG-U00-PRD-ATH-04
MFD	09DEC24
EUT Stage	Identical Prototype

Specification of Accessory				
Battery	Brand Name	Zebra	Model	BT-000501
			Part Number	BT-000501-2000

Supported Unit used in test configuration and system				
AC Adapter 1 (Type C Wall Charger 1)	Brand Name	Zebra	Model	SAWA-102-22520A
			Part Number	PWR-WUA5V45W1US
AC Adapter 2 (Type A Wall Charger 2)	Brand Name	Zebra	Model	SAWA-65-20005A
			Part Number	PWR-WUA5V12W0US
Earphone 1 (Wired headset USB-C)	Brand Name	Zebra	Part Number	HDST-USBC-PTT1-01
Earphone 2 (Rugged Bluetooth Headset)	Brand Name	Zebra	Part Number	HS3100-OTH
Earphone 3 (3.5mm PTT Headset)	Brand Name	Zebra	Part Number	HDST-35MM-PTT1-02
Earphone 4 (Rugged Headset)	Brand Name	Zebra	Part Number	HS2100-OTH
3.5mm to 3.5mm audio connector	Brand Name	Zebra	Part Number	CBL-HS2100-3MS1-01
Type C-Audio Cable (Type C to 3.5mm)	Brand Name	Zebra	Part Number	ADP-USBC-35MM1-01
USB Cable 1 (USB-C to C Cable)	Brand Name	Zebra	Part Number	CBL-EC5X-USBC3A-01
USB Cable 2 (USB-A to C Cable)	Brand Name	Zebra	Part Number	CBL-TC5X-USBC2A-01
EM45 Protective Case	Brand Name	Zebra	Part Number	SG-EM45EXO2-01



1.2 Modification of EUT

No modifications are made to the EUT during all test items.

1.3 Testing Site

Sporton International Inc. (Kunshan) is accredited to ISO/IEC 17025:2017 by American Association for Laboratory Accreditation with Certificate Number 5145.02.

Test Firm	Sporton International Inc. (Kunshan)		
Test Site Location	No. 1098, Pengxi North Road, Kunshan Economic Development Zone Jiangsu Province 215300 People's Republic of China TEL : +86-512-57900158		
Test Site No.	Sporton Site No.	FCC Designation No.	FCC Test Firm Registration No.
	TH01-KS CO01-KS DFS01-KS 03CH02-KS 03CH04-KS 03CH06-KS	CN1257	314309

1.4 Test Software

Item	Site	Manufacturer	Name	Version
1.	TH01-KS	Tonscend	JS1120-3 test system China_210602	3.3.10
2.	03CH02-KS	AUDIX	E3	6.2009-8-24a1
3.	03CH04-KS	AUDIX	E3	210616
4.	03CH06-KS	AUDIX	E3	210616
5.	DFS01-KS	Sporton	Test Tools	1.0
6.	CO01-KS	AUDIX	E3	6.2009-8-24

1.5 Applicable Standards

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

- ♦ FCC KDB 484596 D01 Referencing Test Data v02r03
- ♦ 47 CFR Part 22(H), 24(E), 27(L), 27(H), 27(F), 27(M), 27(N), 27(O), 27(Q), 90(S)
- ♦ ANSI C63.10-2013
- ♦ ANSI C63.26-2015
- ♦ 47 CFR Part 15 Subpart C §15.225
- ♦ 47 CFR Part 15 Subpart C §15.247
- ♦ 47 CFR Part 15 Subpart E §15.407



2 Re-use of Measured Data

2.1 Introduction Section

This application re-uses data collected on a similar device. The subject device of this application (Model: EM45B1, FCC ID: UZ7EM45B1) is electrically identical to the reference device (Model: EM45B2, FCC ID: UZ7EM45B2) for the portions of the circuitry corresponding to the data being re-used, following the FCC KDB 484596 D01 Referencing Test Data v02r03.

ECR Data Referencing Inquiry has been approved by FCC, and the data referencing and spot check test plan includes RF/EMC, the details are presented in section 2.3 of this report, and for SAR Reference detail, please refer to FCC SAR report FA460508-02.

The criteria set in section 3 of KDB 484596 D01 v02r03 is followed to determine whether the data referencing is justified. For SAR, the higher between the referenced value and the spot check value is used to determine compliance in both standalone and simultaneous transmission conditions.

The applicant takes full responsibility that the test data as referenced in this report represent compliance for this FCC ID: UZ7EM45B1.

2.2 Model Difference Information

The **main** difference between FCC ID: UZ7EM45B2 and FCC ID: UZ7EM45B1 is as below:

- Removed RFID function.
- Antenna 1 removed WWAN TX function, keep supported Low bands and Middle bands RX function.

Other differences and all the details of similarity and difference can be found in the confidential documents (UZ7EM45B1 Operational Description of Product Equality Declaration).



2.3 Reference detail Section:

Rule Part	Equipment Class	Frequency Band (MHz)	Reference FCC ID (Parent)	Reference on test	Reference Title	FCC ID Filling (Variant)	Test on the variant	Data Referencing (Y/N)
15C	DSS (BR/EDR)	2400~2483.5	UZ7EM45B2	Full test	FR460508A	UZ7EM45B1	Spot check	Y, All test items
	DTS (BLE)	2400~2483.5	UZ7EM45B2	Full test	FR460508B	UZ7EM45B1	Spot check	Y, All test items
	DTS (WLAN)	2400~2483.5	UZ7EM45B2	Full test	FR460508C	UZ7EM45B1	Spot check	Y, All test items
	DXX (NFC)	13.56	UZ7EM45B2	Full test	FR460508D	UZ7EM45B1	Spot check	Y, All test items
15E	U-NII	5180~5240	UZ7EM45B2	Full test	FR460508E	UZ7EM45B1	Spot check	Y, All test items
		5260~5320	UZ7EM45B2	Full test	FR460508E	UZ7EM45B1	Spot check	Y, All test items
		5500~5720	UZ7EM45B2	Full test	FR460508E	UZ7EM45B1	Spot check	Y, All test items
		5745~5825	UZ7EM45B2	Full test	FR460508E	UZ7EM45B1	Spot check	Y, All test items
		5260~5320 5500~5720	UZ7EM45B2	Full test	FZ460508	UZ7EM45B1	Spot check	Y, All test items
	6CD	5925~7125	UZ7EM45B2	Full test	FR460508G FR460508H	UZ7EM45B1	Spot check	Y, All test items
22, 24, 27, 90	PCE (GSM)	GSM 850/1900	UZ7EM45B2	Full test	FG460508A	UZ7EM45B1	Spot check	Y, All test items
	PCE (WCDMA)	Band II, IV, V	UZ7EM45B2	Full test	FG460508A	UZ7EM45B1	Spot check	Y, All test items
	PCE (LTE)	B2/4/5/7/13/17/26/38/ 41/42/66/71 ULCA 5B/7C/38C 41C/66B/66C	UZ7EM45B2	Full test	FG460508B FG460508C FG460508D FG460508F	UZ7EM45B1	Spot check	Y, All test items
	PCE (LTE)	B26 (90S)	UZ7EM45B2	Full test	FG460508E	UZ7EM45B1	Spot check	Y, All test items
	PCE (NR)	n2/n5/n7/n26/ n38/n41/n66/ n71/n77/n78	UZ7EM45B2	Full test	FG460508G FG460508H FG460508J FG460508K	UZ7EM45B1	Spot check	Y, All test items
	PCE (NR)	n26 (90S)	UZ7EM45B2	Full test	FG460508I	UZ7EM45B1	Spot check	Y, All test items

Y: Pointer to spot-check exhibit; N: Pointer to full test exhibit

2.4 Spot Check Verification Data Section

All test items test against the variant model based on the worst-case condition from the original model was performed in this filing to demonstrate the test data from original model remains representative for the variant model.

All test procedures follow the related section of parent report.

Spot-check measurements, while being always compliant with the applicable rule part(s) for the test under consideration, show a deviation d_{dB} from the reference data no larger than 3 dB:

$$d_{dB} = |V_{dB} - R_{dB}| \leq 3 \text{ dB} \quad (1)$$

V_{dB} , the variant spot-check level

R_{dB} , the corresponding measurement level for the reference model

An alternative to the limit of eq. (1) is available, and is based on considering how far the reference data R_{dB} is from the compliance threshold C_{dB} (also expressed in dB), for the particular test under consideration. In this case, if $M_{dB} = |C_{dB} - R_{dB}|$ is the margin in dB from the compliance limit, a spot check may be considered acceptable when the deviation d_{dB} from the reference data satisfies the following condition:

$$d_{dB} = |V_{dB} - R_{dB}| \leq (3 + M_{dB} / 20) \text{ dB}, \text{ for } 0 \leq M_{dB} \leq 60 \text{ dB} \quad (2)$$

$$d_{dB} = |V_{dB} - R_{dB}| = 6 \text{ dB}, \text{ for } M_{dB} > 60 \text{ dB}$$

where “| |” is the absolute value of the measured quantity.

When using the option in eq. (2), d_{dB} increases linearly from 3 dB to 6 dB.



Summary for spot check for each rule entry and technology is listed as below:

Mode	Test Item	UZ7EM45B2 Parent Worst mode Test Result	UZ7EM45B1 Variant Check Test Result	Deviation (dB)	Deviation Limit (dB)
BT 1Mbps (CH00)	Number of Channels	79	79	0	3
	Hopping Channel Separation	1.135	0.996	0.139	3
	Dwell Time of Each Channel	0.31	0.31	0	3
	20dB Bandwidth	0.94	0.95	0.01	3
	99% Bandwidth	0.851	0.89	0.039	3
	Conducted Band Edges	-41.78	-43.72	1.94	3
	Conducted Spurious Emission	-44.27	-46.4	2.13	3
BT 1Mbps (CH00)	Radiated Band Edges and Radiated Spurious Emission	56.93	55.71	1.22	3
BT	AC Conducted Emission	14.81	13.96	0.85	3
BLE 1Mbps (CH39)	6dB Bandwidth	0.68	0.69	0.01	3
	99% Bandwidth	1.027	1.035	0.008	3
	Power Spectral Density	-5.44	-6.6	1.16	3
	Conducted Band Edges	-57.54	-58.86	1.32	3
	Conducted Spurious Emission	-44.23	-45.77	1.54	3
BLE 2Mbps (CH39)	Radiated Band Edges and Spurious Emission	46.49	48.90	2.41	3
BLE	AC Conducted Emission	14.81	13.96	0.85	3
WIFI 2.4G (802.11b CH11)	6dB Bandwidth	8.56	8.56	0	3
	99% Bandwidth	13.187	13.307	0.12	3
	Power Spectral Density	-1.37	-1.5	0.13	3
	Conducted Band Edges	-47.92	-48.21	0.29	3
	Conducted Spurious Emission	-43.71	-46.01	2.3	3
WIFI 2.4G (802.11g CH01)	Radiated Band Edges and Spurious Emission	51.90	52.85	1.95	3
WIFI 2.4G	AC Conducted Emission	14.81	13.96	0.85	3
WIFI 5G (802.11a CH149)	26dB Bandwidth	19.15	19.29	0.14	3
	99% Bandwidth	16.705	16.705	0	3
	Power Spectral Density	6.94	6.92	0.02	3
	Unwanted Emissions	16.31	16.33	0.02	3
	Radiated Band Edges and Spurious Emission	50.75	52.88	2.13	3
WIFI 5G (11ax HE160 Ch50)	AC Conducted Emission	11.52	14.22	2.70	3
WIFI 5G (802.11a CH116)	DFS	0.862829	0.935231	0.073	3
WIFI 6G UNII-5 (802.11ax HE160 CH15 6025MHz)-6CD Indoor Client	26dB Emission Bandwidth	165.79	166.17	0.38	3
	99% Occupied Bandwidth	156.8	156.495	0.305	3
	Fundamental Maximum EIRP	17.64	17.39	0.25	3
	Fundamental Power Spectral Density	-2.95	-3.42	0.47	3
	In-Band Emissions	-12.59	-11.73	0.86	3
WIFI 6G UNII-5 (802.11ax HE20 CH1 5955MHz)-6CD Standard Client	26dB Emission Bandwidth	21.15	21.25	0.1	3
	99% Occupied Bandwidth	19.048	19.086	0.038	3
	Fundamental Maximum EIRP	17.68	17.58	0.10	3
	Fundamental Power Spectral Density	5.13	4.38	0.75	3
	In-Band Emissions	-19.18	-18.83	0.35	3
WIFI 6G UNII-5 (802.11ax HE160 CH47 6185MHz)	Contention Based Protocol	-64.77	-66.92	2.15	3



WIFI 6G (802.11ax HE20 Ch233)	Radiated Band Edges and Spurious Emission	66.90	67.00	0.1	3
WIFI 6G	AC Conducted Emission	14.72	16.18	1.46	3
NFC	20dB Spectrum Bandwidth	2.48	2.49	0.01	3
	99% OBW Spectrum Bandwidth	2.11	2.11	0	3
	Frequency Stability	-21.3496	-22.382	1.0324	3
	Field Strength of Fundamental Emissions	60.61	60.41	0.2	3
	Radiated Spurious Emissions	36.17	36.86	0.69	3
	AC Conducted Emission	14.22	16.01	1.79	3

Mode	Test Item	UZ7EM45B2 Parent Worst mode Test Result	UZ7EM45B1 Variant Check Test Result	Deviation (dB)	Deviation Limit (dB)
Part 27F LTE Band 13	Radiated Spurious Emission	-62.22	-61.76	0.46	3
Part27O_N77	Equivalent Isotropic Radiated Power	26.23	25.90	0.33	3
	Peak-to-Average Ratio	5.24	5.04	0.2	3
	Occupied Bandwidth	57.948	57.853	0.095	3
	Conducted Band Edge	-14.04	-15.20	1.16	3
	Conducted Spurious Emission	-33.15	-33.32	0.17	3
	Frequency Stability	0.0039	0.0027	0.0012	3

Conducted power for Unlicensed bands

Test Item	Mode	UZ7EM45B2 Parent Worst mode Test Result	UZ7EM45B1 Variant Check Test Result	Deviation (dB)	Deviation Limit (dB)
Conducted Power(dBm) BT & BLE	BT BR/EDR	9.57	9.11	0.46	3
	BLE 1Mbps	9.57	9.10	0.47	3
	BLE 2Mbps	9.58	9.24	0.34	3
Conducted Power(dBm) WIFI 2.4G	11b, 2.4GHz	25.04	24.97	0.07	3
	11g, 2.4GHz	28.45	28.36	0.09	3
	11n HT20, 2.4GHz	28.38	28.34	0.04	3
	11ac VHT20, 2.4GHz	28.30	28.25	0.05	3
	11ax HE20, 2.4GHz	28.56	28.51	0.05	3
Conducted Power(dBm) WIFI 5G	11a, 5.2GHz	22.53	22.38	0.15	3
	11a, 5.3GHz	22.62	22.15	0.47	3
	11a, 5.5GHz	22.19	21.74	0.45	3
	11a, 5.8GHz	21.69	21.47	0.22	3
	11n HT20, 5.2GHz	21.34	21.26	0.08	3
	11n HT20, 5.3GHz	20.98	20.62	0.36	3
	11n HT20, 5.5GHz	21.32	21.26	0.06	3
	11n HT20, 5.8GHz	21.37	21.33	0.04	3
	11ac VHT20, 5.2GHz	21.41	21.29	0.12	3
	11ac VHT20, 5.3GHz	21.04	20.69	0.35	3
	11ac VHT20, 5.5GHz	21.36	21.33	0.03	3
	11ac VHT20, 5.8GHz	21.41	21.36	0.05	3
	11ax HE20, 5.2GHz	21.47	21.34	0.13	3
	11ax HE20, 5.3GHz	21.09	20.72	0.37	3
	11ax HE20, 5.5GHz	21.39	21.37	0.02	3
	11ax HE20, 5.8GHz	21.45	21.39	0.06	3
	11n HT40, 5.2GHz	20.76	20.71	0.05	3
	11n HT40, 5.3GHz	20.71	20.53	0.18	3
	11n HT40, 5.5GHz	20.62	20.58	0.04	3



	11n HT40, 5.8GHz	20.36	20.28	0.08	3
	11ac VHT40, 5.2GHz	20.82	20.76	0.06	3
	11ac VHT40, 5.3GHz	20.77	20.56	0.21	3
	11ac VHT40, 5.5GHz	20.67	20.62	0.05	3
	11ac VHT40, 5.8GHz	20.42	20.32	0.10	3
	11ax HE40, 5.2GHz	20.86	20.81	0.05	3
	11ax HE40, 5.3GHz	20.83	20.61	0.22	3
	11ax HE40, 5.5GHz	20.73	20.68	0.05	3
	11ax HE40, 5.8GHz	20.48	20.36	0.12	3
	11ac VHT80, 5.2GHz	20.07	19.99	0.08	3
	11ac VHT80, 5.3GHz	20.14	19.91	0.23	3
	11ac VHT80, 5.5GHz	20.32	20.08	0.24	3
	11ac VHT80, 5.8GHz	20.17	20.10	0.07	3
	11ax HE80, 5.2GHz	20.12	20.05	0.07	3
	11ax HE80, 5.3GHz	20.22	19.96	0.26	3
	11ax HE80, 5.5GHz	20.38	20.12	0.26	3
	11ax HE80, 5.8GHz	20.24	20.15	0.09	3
	11ac VHT160, 5.3GHz	19.81	19.66	0.15	3
	11ac VHT160, 5.5GHz	19.79	19.63	0.16	3
	11ax HE160, 5.3GHz	19.92	19.70	0.22	3
	11ax HE160, 5.5GHz	19.88	19.69	0.19	3
Conducted Power(dBm) WIFI 6G Indoor Client	6CD 11a, U-NII-5	7.05	6.75	0.30	3
	6CD 11a, U-NII-6	7.97	7.86	0.11	3
	6CD 11a, U-NII-7	6.64	6.58	0.06	3
	6CD 11a, U-NII-8	5.82	5.78	0.04	3
	6CD 11ax HE20, U-NII-5	10.85	10.84	0.01	3
	6CD 11ax HE20, U-NII-6	11.28	11.21	0.07	3
	6CD 11ax HE20, U-NII-7	10.12	10.07	0.05	3
	6CD 11ax HE20, U-NII-8	9.61	9.57	0.04	3
	6CD 11ax HE40, U-NII-5	13.76	13.74	0.02	3
	6CD 11ax HE40, U-NII-6	13.74	13.59	0.15	3
	6CD 11ax HE40, U-NII-7	13.04	12.79	0.25	3
	6CD 11ax HE40, U-NII-8	12.65	12.60	0.05	3
	6CD 11ax HE80, U-NII-5	16.97	16.93	0.04	3
	6CD 11ax HE80, U-NII-6	16.82	16.77	0.05	3
	6CD 11ax HE80, U-NII-7	16.36	16.30	0.06	3
	6CD 11ax HE80, U-NII-8	15.76	15.71	0.05	3
	6CD 11ax HE160, U-NII-5	17.29	17.04	0.25	3
	6CD 11ax HE160, U-NII-6	17.01	16.95	0.06	3
Conducted Power(dBm) WIFI 6G Standard Client	6CD 11ax HE160, U-NII-7	17.06	17.01	0.05	3
	6CD 11ax HE160, U-NII-8	16.89	16.83	0.06	3
	6CD 11a, U-NII-5	17.29	17.21	0.08	3
	6CD 11a, U-NII-7	17.11	17.07	0.04	3
	6CD 11ax HE20, U-NII-5	17.33	17.23	0.10	3
	6CD 11ax HE20, U-NII-7	17.08	17.04	0.04	3
	6CD 11ax HE40, U-NII-5	17.23	17.16	0.07	3
	6CD 11ax HE40, U-NII-7	16.97	16.93	0.04	3
	6CD 11ax HE80, U-NII-5	17.26	17.14	0.12	3
	6CD 11ax HE80, U-NII-7	16.96	16.92	0.04	3
	6CD 11ax HE160, U-NII-5	17.34	17.10	0.24	3
	6CD 11ax HE160, U-NII-7	17.12	17.07	0.05	3



Conducted power for Licensed bands

Test Item	Mode	UZ7EM45B2 Parent Worst mode Test Result	UZ7EM45B1 Variant Check Test Result	Deviation (dB)	Deviation Limit (dB)
Conducted Power (dBm)	GSM 850	32.32	32.3	0.02	3
	GSM 1900	29.07	28.82	0.25	3
	WCDMA 850	23.02	22.87	0.15	3
	WCDMA1900	22.91	22.64	0.27	3
	WCDMA1700	22.79	22.75	0.04	3
	LTE B2	22.84	22.78	0.06	3
	LTE B4	22.89	22.45	0.44	3
	LTE B5	22.84	22.71	0.13	3
	LTE B5B	22.84	22.77	0.07	3
	LTE B13	22.78	22.63	0.15	3
	LTE B17	22.75	22.56	0.19	3
	LTE B26H	23.04	22.72	0.32	3
	LTE B26L	22.80	22.75	0.05	3
	LTE B66	22.89	22.74	0.15	3
	LTE B71	22.98	22.51	0.47	3
	LTE B7	23.83	23.48	0.35	3
	LTE B7C	23.70	23.59	0.11	3
	LTE B38	22.84	22.7	0.14	3
	LTE B41	22.89	22.66	0.23	3
	LTE B38C	22.84	22.71	0.13	3
	LTE B41C	22.88	22.78	0.1	3
	LTE B42	22.64	22.6	0.04	3
	LTE B66B	22.73	22.54	0.19	3
	LTE B66C	22.72	22.55	0.17	3
	N2	23.69	23.19	0.5	3
	N5	23.19	22.85	0.34	3
	N26H	23.22	22.93	0.29	3
	N26L	22.91	22.73	0.18	3
	N7	24.85	24.37	0.48	3
	N38	23.31	22.85	0.46	3
	N41	23.01	22.67	0.34	3
	N66	23.28	23.12	0.16	3
	N71	23.60	23.22	0.38	3
	N77 27O	26.28	25.95	0.33	3
	N78 27O	26.24	26.02	0.22	3
	N77 27Q	26.29	25.97	0.32	3
	N78 27Q	26.25	25.93	0.32	3
	N77 27O MIMO	24.32	23.89	0.43	3
	N78 27O MIMO	23.94	23.87	0.07	3
	N77 27Q MIMO	24.38	23.92	0.46	3
	N78 27Q MIMO	24.31	23.95	0.36	3



6CD- < indoor client>

<SISO mode>

U-NII-5 SISO																
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	Duty Factor (dB)		Conducted Power with duty factor (dBm)		DG (dBi)		EIRP Power (dBm)		EIRP Power Limit (dBm)	Pass /Fail	Power Setting	
					Ant 8	Ant 10	Ant 8	Ant 10	Ant 8	Ant 10	Ant 8	Ant 10			Ant 8	Ant 10
11a	6Mbps	1	093	6415	0.03	0.04	4.16	3.22	0.35	-0.85	4.51	2.37	24.00	Pass	6	6

U-NII-5 SISO																	
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	RU Config.	Duty Factor (dB)		Conducted Power with duty factor (dBm)		DG (dBi)		EIRP Power (dBm)		EIRP Power Limit (dBm)	Pass /Fail	Power Setting	
						Ant 8	Ant 10	Ant 8	Ant 10	Ant 8	Ant 10	Ant 8	Ant 10			Ant 8	Ant 10
HE20	MCS0	1	093	6415	Full	0.00	0.00	8.03	7.42	0.35	-0.85	8.38	6.57	24.00	Pass	8	8
HE40	MCS0	1	091	6405	Full	0.00	0.00	10.87	10.38	0.35	-0.85	11.22	9.53	24.00	Pass	11	11
HE80	MCS0	1	087	6385	Full	0.00	0.00	14.22	13.48	0.35	-0.85	14.57	12.63	24.00	Pass	14	14
HE160	MCS0	1	015	6025	Full	0.00	0.00	13.83	14.15	0.35	-0.85	14.18	13.30	24.00	Pass	14	14

U-NII-6 SISO															
Mod.	Data Rate	NTX	Freq. (MHz)	Duty Factor (dB)		Conducted Power with duty factor (dBm)		DG (dBi)		EIRP Power (dBm)		EIRP Power Limit (dBm)	Pass /Fail	Power Setting	
				Ant 8	Ant 10	Ant 8	Ant 10	Ant 8	Ant 10	Ant 8	Ant 10			Ant 8	Ant 10
11a	6Mbps	1	6475	0.03	0.04	5.45	4.09	0.75	-2.44	6.20	1.65	24.00	Pass	5	5

U-NII-6 SISO																	
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	RU Config.	Duty Factor (dB)		Conducted Power with duty factor (dBm)		DG (dBi)		EIRP Power (dBm)		EIRP Power Limit (dBm)	Pass /Fail	Power Setting	
						Ant 8	Ant 10	Ant 8	Ant 10	Ant 8	Ant 10	Ant 8	Ant 10			Ant 8	Ant 10
HE20	MCS0	1	105	6475	Full	0.00	0.00	8.42	7.86	0.75	-2.44	9.17	5.42	24.00	Pass	8.5	8.5
HE40	MCS0	1	107	6485	Full	0.00	0.00	11.05	9.97	0.75	-2.44	11.80	7.53	24.00	Pass	11	11
HE80	MCS0	1	103	6465	Full	0.00	0.00	14.09	13.15	0.75	-2.44	14.84	10.71	24.00	Pass	14	14
HE160	MCS0	1	111	6505	Full	0.00	0.00	14.21	13.31	0.75	-2.44	14.96	10.87	24.00	Pass	14	14



U-NII-7 SISO																
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	Duty Factor (dB)		Conducted Power with duty factor (dBm)		DG (dBi)		EIRP Power (dBm)		EIRP Power Limit (dBm)	Pass /Fail	Power Setting	
					Ant 8	Ant 10	Ant 8	Ant 10	Ant 8	Ant 10	Ant 8	Ant 10			Ant 8	Ant 10
11a	6Mbps	1	117	6535	0.03	0.04	4.25	2.69	1.02	0.16	5.27	2.85	24.00	Pass	3.5	3.5

U-NII-7 SISO																	
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	RU Config.	Duty Factor (dB)		Conducted Power with duty factor (dBm)		DG (dBi)		EIRP Power (dBm)		EIRP Power Limit (dBm)	Pass /Fail	Power Setting	
						Ant 8	Ant 10	Ant 8	Ant 10	Ant 8	Ant 10	Ant 8	Ant 10			Ant 8	Ant 10
HE20	MCS0	1	181	6855	Full	0.00	0.00	7.03	6.95	1.02	0.16	8.05	7.11	24.00	Pass	7.5	7.5
HE40	MCS0	1	147	6685	Full	0.00	0.00	10.01	9.45	1.02	0.16	11.03	9.61	24.00	Pass	10	10
HE80	MCS0	1	135	6625	Full	0.00	0.00	13.55	12.93	1.02	0.16	14.57	13.09	24.00	Pass	13.5	13.5
HE160	MCS0	1	143	6665	Full	0.00	0.00	14.25	13.54	1.02	0.16	15.27	13.70	24.00	Pass	14	14

U-NII-8 SISO															
Mod.	Data Rate	NTX	Freq. (MHz)	Duty Factor (dB)		Conducted Power with duty factor (dBm)		DG (dBi)		EIRP Power (dBm)		EIRP Power Limit (dBm)	Pass /Fail	Power Setting	
				Ant 8	Ant 10	Ant 8	Ant 10	Ant 8	Ant 10	Ant 8	Ant 10			Ant 8	Ant 10
11a	6Mbps	1	6895	0.03	0.04	3.27	2.12	0.70	1.66	3.97	3.78	24.00	Pass	3	3

U-NII-8 SISO																	
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	RU Config.	Duty Factor (dB)		Conducted Power with duty factor (dBm)		DG (dBi)		EIRP Power (dBm)		EIRP Power Limit (dBm)	Pass /Fail	Power Setting	
						Ant 8	Ant 10	Ant 8	Ant 10	Ant 8	Ant 10	Ant 8	Ant 10			Ant 8	Ant 10
HE20	MCS0	2	185	6875	Full	0.00	0.00	6.68	6.29	0.70	1.66	7.38	7.95	24.00	Pass	7	7
HE40	MCS0	2	195	6925	Full	0.00	0.00	9.78	9.32	0.70	1.66	10.48	10.98	24.00	Pass	10	10
HE80	MCS0	2	199	6945	Full	0.00	0.00	12.75	12.58	0.70	1.66	13.45	14.24	24.00	Pass	13	13
HE160	MCS0	2	207	6985	Full	0.00	0.00	13.97	13.60	0.70	1.66	14.67	15.26	24.00	Pass	14	14



<CDD mode>

U-NII-5 MIMO																
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	Duty Factor (dB)		Conducted Power with duty factor (dBm)			DG (dBi)		EIRP Power (dBm)	EIRP Power Limit (dBm)	Pass /Fail	Power Setting	
					Ant 8	Ant 10	Ant 8	Ant 10	SUM	Ant 8	Ant 10				SUM	Ant 8
11a	6Mbps	2	093	6415	0.03	0.04	4.18	3.25	6.75	0.35		7.10	24.00	Pass	6	

U-NII-6 MIMO															
Mod.	Data Rate	NTX	Freq. (MHz)	Duty Factor (dB)		Conducted Power with duty factor (dBm)			DG (dBi)		EIRP Power (dBm)	EIRP Power Limit (dBm)	Pass /Fail	Power Setting	
				Ant 8	Ant 10	Ant 8	Ant 10	SUM	Ant 8	Ant 10	SUM			Ant 8	Ant 10
11a	6Mbps	2	6475	0.03	0.04	5.49	4.11	7.86	0.75		8.61	24.00	Pass	5	

U-NII-7 MIMO																
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	Duty Factor (dB)		Conducted Power with duty factor (dBm)			DG (dBi)		EIRP Power (dBm)	EIRP Power Limit (dBm)	Pass /Fail	Power Setting	
					Ant 8	Ant 10	Ant 8	Ant 10	SUM	Ant 8	Ant 10				SUM	Ant 8
11a	6Mbps	2	117	6535	0.03	0.04	4.29	2.71	6.58	1.02		7.60	24.00	Pass	3.5	

U-NII-8 MIMO															
Mod.	Data Rate	NTX	Freq. (MHz)	Duty Factor (dB)		Conducted Power with duty factor (dBm)			DG (dBi)		EIRP Power (dBm)	EIRP Power Limit (dBm)	Pass /Fail	Power Setting	
				Ant 8	Ant 10	Ant 8	Ant 10	SUM	Ant 8	Ant 10	SUM			Ant 8	Ant 10
11a	6Mbps	2	6895	0.03	0.04	3.30	2.17	5.78	1.66		7.44	24.00	Pass	3	

<SDM mode>

U-NII-5 MIMO																	
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	RU Config.	Duty Factor (dB)		Conducted Power with duty factor (dBm)			DG (dBi)		EIRP Power (dBm)	EIRP Power Limit (dBm)	Pass /Fail	Power Setting	
						Ant 8	Ant 10	Ant 8	Ant 10	SUM	Ant 8	Ant 10	SUM			Ant 8	Ant 10
HE20	MCS0	2	093	6415	Full	0.00	0.00	8.18	7.45	10.84	0.35		11.19	24.00	Pass	8	
HE40	MCS0	2	091	6405	Full	0.00	0.00	11.01	10.43	13.74	0.35		14.09	24.00	Pass	11	
HE80	MCS0	2	087	6385	Full	0.00	0.00	14.29	13.52	16.93	0.35		17.28	24.00	Pass	14	
HE160	MCS0	2	015	6025	Full	0.00	0.00	13.88	14.18	17.04	0.35		17.39	24.00	Pass	14	



U-NII-6 MIMO																	
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	RU Config.	Duty Factor (dB)		Conducted Power with duty factor (dBm)			DG (dBi)		EIRP Power (dBm)	EIRP Power Limit (dBm)	Pass /Fail	Power Setting	
						Ant 8	Ant 10	Ant 8	Ant 10	SUM	Ant 8	Ant 10				SUM	Ant 8
HE20	MCS0	2	105	6475	Full	0.00	0.00	8.47	7.91	11.21	0.75		11.96	24.00	Pass	8.5	
HE40	MCS0	2	107	6485	Full	0.00	0.00	11.09	10.01	13.59	0.75		14.34	24.00	Pass	11	
HE80	MCS0	2	103	6465	Full	0.00	0.00	14.24	13.22	16.77	0.75		17.52	24.00	Pass	14	
HE160	MCS0	2	111	6505	Full	0.00	0.00	14.42	13.39	16.95	0.75		17.70	24.00	Pass	14	

U-NII-7 MIMO																	
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	RU Config.	Duty Factor (dB)		Conducted Power with duty factor (dBm)			DG (dBi)		EIRP Power (dBm)	EIRP Power Limit (dBm)	Pass /Fail	Power Setting	
						Ant 8	Ant 10	Ant 8	Ant 10	SUM	Ant 8	Ant 10	SUM			Ant 8	Ant 10
HE20	MCS0	2	181	6855	Full	0.00	0.00	7.09	7.02	10.07	1.02	11.09	24.00	Pass	7.5		
HE40	MCS0	2	147	6685	Full	0.00	0.00	10.06	9.48	12.79	1.02	13.81	24.00	Pass	10		
HE80	MCS0	2	135	6625	Full	0.00	0.00	13.59	12.97	16.30	1.02	17.32	24.00	Pass	13.5		
HE160	MCS0	2	143	6665	Full	0.00	0.00	14.35	13.61	17.01	1.02	18.03	24.00	Pass	14		

U-NII-8 MIMO																	
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	RU Config.	Duty Factor (dB)		Conducted Power with duty factor (dBm)			DG (dBi)		EIRP Power (dBm)	EIRP Power Limit (dBm)	Pass /Fail	Power Setting	
						Ant 8	Ant 10	Ant 8	Ant 10	SUM	Ant 8	Ant 10	SUM			Ant 8	Ant 10
HE20	MCS0	2	185	6875	Full	0.00	0.00	6.77	6.34	9.57	1.66	11.23	24.00	Pass	7		
HE40	MCS0	2	195	6925	Full	0.00	0.00	9.81	9.35	12.60	1.66	14.26	24.00	Pass	10		
HE80	MCS0	2	199	6945	Full	0.00	0.00	12.78	12.62	15.71	1.66	17.37	24.00	Pass	13		
HE160	MCS0	2	207	6985	Full	0.00	0.00	14.01	13.63	16.83	1.66	18.49	24.00	Pass	14		



<standard client >

<SISO mode>

U-NII-5 SISO																
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	Duty Factor (dB)		Conducted Power with duty factor (dBm)		DG (dBi)		EIRP Power (dBm)		EIRP Power Limit (dBm)	Pass /Fail	Power Setting	
					Ant 8	Ant 10	Ant 8	Ant 10	Ant 8	Ant 10	Ant 8	Ant 10			Ant 8	Ant 10
11a	6Mbps	1	001	5955	0.03	0.04	14.19	14.13	0.35	-0.85	14.54	13.28	30.00	Pass	14	

U-NII-5 SISO																	
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	RU Config.	Duty Factor (dB)		Conducted Power with duty factor (dBm)		DG (dBi)		EIRP Power (dBm)		EIRP Power Limit (dBm)	Pass /Fail	Power Setting	
						Ant 8	Ant 10	Ant 8	Ant 10	Ant 8	Ant 10	Ant 8	Ant 10			Ant 8	Ant 10
HE20	MCS0	1	001	5955	Full	0.00	0.00	14.21	14.22	0.35	-0.85	14.56	13.37	30.00	Pass	14	14
HE40	MCS0	1	003	5965	Full	0.00	0.00	14.17	14.05	0.35	-0.85	14.52	13.20	30.00	Pass	14	14
HE80	MCS0	1	007	5985	Full	0.00	0.00	14.16	14.06	0.35	-0.85	14.51	13.21	30.00	Pass	14	14
HE160	MCS0	1	015	6025	Full	0.00	0.00	13.83	14.15	0.35	-0.85	14.18	13.30	30.00	Pass	14	14

U-NII-7 SISO																
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	Duty Factor (dB)		Conducted Power with duty factor (dBm)		DG (dBi)		EIRP Power (dBm)		EIRP Power Limit (dBm)	Pass /Fail	Power Setting	
					Ant 8	Ant 10	Ant 8	Ant 10	Ant 8	Ant 10	Ant 8	Ant 10			Ant 8	Ant 10
11a	6Mbps	1	149	6695	0.03	0.04	14.27	13.78	1.02	0.16	15.29	13.94	30.00	Pass	14	14

U-NII-7 SISO																	
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	RU Config.	Duty Factor (dB)		Conducted Power with duty factor (dBm)		DG (dBi)		EIRP Power (dBm)		EIRP Power Limit (dBm)	Pass /Fail	Power Setting	
						Ant 8	Ant 10	Ant 8	Ant 10	Ant 8	Ant 10	Ant 8	Ant 10			Ant 8	Ant 10
HE20	MCS0	1	149	6695	Full	0.00	0.00	14.22	13.78	1.02	0.16	15.24	13.94	30.00	Pass	14	14
HE40	MCS0	1	147	6685	Full	0.00	0.00	14.29	13.43	1.02	0.16	15.31	13.59	30.00	Pass	14	14
HE80	MCS0	1	135	6625	Full	0.00	0.00	14.27	13.47	1.02	0.16	15.29	13.63	30.00	Pass	14	14
HE160	MCS0	1	143	6665	Full	0.00	0.00	14.25	13.54	1.02	0.16	15.27	13.70	30.00	Pass	14	14



<CDD mode>

U-NII-5 MIMO																
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	Duty Factor (dB)		Conducted Power with duty factor (dBm)			DG (dBi)		EIRP Power (dBm)	EIRP Power Limit (dBm)	Pass /Fail	Power Setting	
					Ant 8	Ant 10	Ant 8	Ant 10	SUM	Ant 8	Ant 10				SUM	Ant 8
11a	6Mbps	2	001	5955	0.03	0.04	14.22	14.17	17.21	0.35		17.56	30.00	Pass	14	

U-NII-5 MIMO																	
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	RU Config.	Duty Factor (dB)		Conducted Power with duty factor (dBm)			DG (dBi)		EIRP Power (dBm)	EIRP Power Limit (dBm)	Pass /Fail	Power Setting	
						Ant 8	Ant 10	Ant 8	Ant 10	SUM	Ant 8	Ant 10	SUM			Ant 8	Ant 10
HE20	MCS0	2	001	5955	Full	0.00	0.00	14.24	14.19	17.23	0.35		17.58	30.00	Pass	14	
HE40	MCS0	2	003	5965	Full	0.00	0.00	14.22	14.07	17.16	0.35		17.51	30.00	Pass	14	
HE80	MCS0	2	007	5985	Full	0.00	0.00	14.17	14.09	17.14	0.35		17.49	30.00	Pass	14	
HE160	MCS0	2	015	6025	Full	0.00	0.00	13.95	14.23	17.10	0.35		17.45	30.00	Pass	14	

U-NII-7 MIMO																
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	Duty Factor (dB)		Conducted Power with duty factor (dBm)			DG (dBi)		EIRP Power (dBm)	EIRP Power Limit (dBm)	Pass /Fail	Power Setting	
					Ant 8	Ant 10	Ant 8	Ant 10	SUM	Ant 8	Ant 10				SUM	Ant 8
11a	6Mbps	2	149	6695	0.03	0.04	14.31	13.80	17.07	1.02		18.09	30.00	Pass	14	

U-NII-7 MIMO																	
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	RU Config.	Duty Factor (dB)		Conducted Power with duty factor (dBm)			DG (dBi)		EIRP Power (dBm)	EIRP Power Limit (dBm)	Pass /Fail	Power Setting	
						Ant 8	Ant 10	Ant 8	Ant 10	SUM	Ant 8	Ant 10				SUM	Ant 8
HE20	MCS0	2	149	6695	Full	0.00	0.00	14.24	13.81	17.04	1.02		18.06	30.00	Pass	14	
HE40	MCS0	2	147	6685	Full	0.00	0.00	14.32	13.48	16.93	1.02		17.95	30.00	Pass	14	
HE80	MCS0	2	135	6625	Full	0.00	0.00	14.29	13.49	16.92	1.02		17.94	30.00	Pass	14	
HE160	MCS0	2	143	6665	Full	0.00	0.00	14.39	13.71	17.07	1.02		18.09	30.00	Pass	14	



Conclusion:

All test items test against the variant model based on the worst-case condition from the original model was performed in this filing to demonstrate the test data from original model remains representative for the variant model.

Based on the spot check test result, the test data from the original model is representative for the variant model. All spot check test data are shown within expected level compliant to limit line.

We are using power and ERP/EIRP measurements from the original parent model reports to list on the grant.

The same detection mechanism/software/antenna gain is used in the variant of DFS. Hence, all test cases refer to parent report.

We confirm that the test data referencing policy of FCC KDB 484596 D01 Referencing Test Data v02r03 has been followed and the test data as referenced from the parent model report represents compliance with new FCC ID.



3 List of Measuring Equipment

For BT/WIFI:

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Test Date	Due Date	Remark
EMI Test Receiver	Keysight	N9038A	MY56400023	3Hz~8.5GHz;Max 30dBm	Jan. 02, 2024	Nov. 06, 2024	Jan. 01, 2025	Radiation (03CH06-KS)
EXA Spectrum Analyzer	Keysight	N9010B	MY57471084	10Hz~44GHz	Jul. 04, 2024	Nov. 06, 2024	Jul. 03, 2025	Radiation (03CH06-KS)
Loop Antenna	R&S	HFH2-Z2E	101125	9kHz~30MHz	Sep. 08, 2024	Nov. 06, 2024	Sep. 07, 2025	Radiation (03CH06-KS)
Bilog Antenna	TeseQ	CBL6111D	59913	30MHz~1GHz	Sep. 03, 2024	Nov. 06, 2024	Sep. 02, 2025	Radiation (03CH06-KS)
Double Ridge Horn Antenna	ETS-Lindgren	3117	00218652	1GHz~18GHz	Apr. 11, 2024	Nov. 06, 2024	Apr. 10, 2025	Radiation (03CH06-KS)
SHF-EHF Horn	Com-power	AH-840	101093	18GHz~40GHz	Jan. 06, 2024	Nov. 06, 2024	Jan. 05, 2025	Radiation (03CH06-KS)
Amplifier	SONOMA	310N	372171	9KHz ~1GHZ	Jan. 02, 2024	Nov. 06, 2024	Jan. 01, 2025	Radiation (03CH06-KS)
Amplifier	EM	EM18G40GA	060728	18~40GHz	Jan. 02, 2024	Nov. 06, 2024	Jan. 01, 2025	Radiation (03CH06-KS)
high gain Amplifier	MITEQ	AMF-7D-00101800-30-10P	2082395	1Ghz-18Ghz	Jan. 02, 2024	Nov. 06, 2024	Jan. 01, 2025	Radiation (03CH06-KS)
Amplifier	Keysight	83017A	MY57280119	500MHz~26.5GHz	Oct. 09, 2024	Nov. 06, 2024	Oct. 08, 2025	Radiation (03CH06-KS)
AC Power Source	Chroma	61601	F104090004	N/A	NCR	Nov. 06, 2024	NCR	Radiation (03CH06-KS)
Turn Table	ChamPro	EM 1000-T	060762-T	0~360 degree	NCR	Nov. 06, 2024	NCR	Radiation (03CH06-KS)
Antenna Mast	ChamPro	EM 1000-A	060762-A	1 m~4 m	NCR	Nov. 06, 2024	NCR	Radiation (03CH06-KS)
EMI Receiver	R&S	ESCI7	100768	9kHz~7GHz;	Apr. 18, 2024	Oct. 27, 2024	Apr. 17, 2025	Conduction (CO01-KS)
AC LISN (for auxiliary equipment)	MessTec	AN3016	060103	9kHz~30MHz	Aug. 20, 2024	Oct. 27, 2024	Aug. 19, 2025	Conduction (CO01-KS)
AC LISN	MessTec	AN3016	060105	9kHz~30MHz	Apr. 18, 2024	Oct. 27, 2024	Apr. 17, 2025	Conduction (CO01-KS)
AC Power Source	Chroma	61602	ABP00000811	AC 0V~300V, 45Hz~1000Hz	Oct. 09, 2024	Oct. 27, 2024	Oct. 08, 2025	Conduction (CO01-KS)
Spectrum Analyzer	R&S	FSV40	101040	10Hz~40GHz	Oct. 10, 2024	Nov. 07, 2024~Feb. 11, 2025	Oct. 09, 2025	Conducted (TH01-KS)
Pulse Power Sensor	Anritsu	MA2411B	0917070	300MHz~40GHz	Jan. 02, 2024	Nov. 07, 2024~Feb. 11, 2025	Jan. 01, 2025	Conducted (TH01-KS)
Pulse Power Sensor	Anritsu	MA2411B	0917070	300MHz~40GHz	Jan. 02, 2025	Nov. 07, 2024~Feb. 11, 2025	Jan. 01, 2026	Conducted (TH01-KS)
Power Meter	Anritsu	ML2495A	1005002	50MHz Bandwidth	Jan. 02, 2024	Nov. 07, 2024~Feb. 11, 2025	Jan. 01, 2025	Conducted (TH01-KS)
Power Meter	Anritsu	ML2495A	1005002	50MHz Bandwidth	Jan. 02, 2025	Nov. 07, 2024~Feb. 11, 2025	Jan. 01, 2026	Conducted (TH01-KS)
Spectrum Analyzer	R&S	FSV40	101040	10Hz~40GHz	Oct. 10, 2024	Nov. 05, 2024	Oct. 09, 2025	CBP (DFS01-KS)
MXG-B RF Vector Signal Genertor	Keysight	5182B /5182BX07	MY56200417/MY59360210	9kHz~7.2GHz	Apr. 17, 2024	Nov. 05, 2024	Apr. 16, 2025	CBP (DFS01-KS)
Vector Signal Generator	R&S	SMBV100A	258305	9kHz~6GHz	Jan. 02, 2024	Nov. 05, 2024	Jan. 01, 2025	CBP (DFS01-KS)
Combiner	MTJ Cooperation	MTJ7112	N/A	0.4-6GHz	NCR	Nov. 05, 2024	NCR	CBP (DFS01-KS)
Signal Analyzer	R&S	FSV7	101632	10Hz~7GHz	Jan. 02, 2024	Nov. 05, 2024	Jan. 01, 2025	DFS (DFS01-KS)
Vector Signal Generator	R&S	SMJ100A	101908	100kHz~6GHz	Jan. 02, 2024	Nov. 05, 2024	Jan. 01, 2025	DFS (DFS01-KS)
MXG-B RF Vector Signal Genertor	Keysight	5182B /5182BX07	MY56200417/MY59360210	9kHz~7.2GHz	Apr. 17, 2024	Nov. 05, 2024	Apr. 16, 2025	DFS (DFS01-KS)



Combiner	MTJ Cooperation	MTJ7114-M	N/A	0.5GHz~18GHz	NCR	Nov. 05, 2024	NCR	DFS (DFS01-KS)
----------	-----------------	-----------	-----	--------------	-----	---------------	-----	----------------

NCR: No Calibration Required

For NFC:

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Test Date	Due Date	Remark
EMI Test Receiver	R&S	ESR7	101403	9kHz~7GHz;Ma x 30dBm	Oct. 11, 2024	Oct. 24, 2024	Oct. 10, 2025	Radiation (03CH02-KS)
Loop Antenna	R&S	HFH2-Z2E	101125	9kHz~30MHz	Sep. 08, 2024	Oct. 24, 2024	Sep. 07, 2025	Radiation (03CH02-KS)
Bilog Antenna	TeseQ	CBL6111D	59915	30MHz-1GHz	Aug. 18, 2024	Oct. 24, 2024	Aug. 17, 2025	Radiation (03CH02-KS)
AC Power Source	Chroma	61601	616010002473	N/A	NCR	Oct. 24, 2024	NCR	Radiation (03CH02-KS)
Turn Table	MF	MF7802	N/A	0~360 degree	NCR	Oct. 24, 2024	NCR	Radiation (03CH02-KS)
Antenna Mast	MF	MF7802	N/A	1 m~4 m	NCR	Oct. 24, 2024	NCR	Radiation (03CH02-KS)
Amplifier	SONOMA	310N	413740	9KHz-1GHz	Jan. 03, 2024	Oct. 24, 2024	Jan. 02, 2025	Radiation (03CH02-KS)
EMI Receiver	R&S	ESCI7	100768	9kHz~7GHz;	Apr. 18, 2024	Oct. 26, 2024	Apr. 17, 2025	Conduction (CO01-KS)
AC LISN (for auxiliary equipment)	MessTec	AN3016	060103	9kHz~30MHz	Aug. 20, 2024	Oct. 26, 2024	Aug. 19, 2025	Conduction (CO01-KS)
AC LISN	MessTec	AN3016	060105	9kHz~30MHz	Apr. 18, 2024	Oct. 26, 2024	Apr. 17, 2025	Conduction (CO01-KS)
AC Power Source	Chroma	61602	ABP000000811	AC 0V~300V, 45Hz~1000Hz	Oct. 09, 2024	Oct. 26, 2024	Oct. 08, 2025	Conduction (CO01-KS)
Spectrum Analyzer	R&S	FSV40	101040	10Hz~40GHz	Oct. 10, 2024	Nov. 07, 2024	Oct. 09, 2025	Conducted (TH01-KS)
Pulse Power Sensor	Anritsu	MA2411B	0917070	300MHz~40GHz	Jan. 02, 2024	Nov. 07, 2024	Jan. 01, 2025	Conducted (TH01-KS)
Power Meter	Anritsu	ML2495A	1005002	50MHz Bandwidth	Jan. 02, 2024	Nov. 07, 2024	Jan. 01, 2025	Conducted (TH01-KS)

NCR: No Calibration Required



For WWAN Bands:

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Test Date	Due Date	Remark
Spectrum Analyzer	R&S	FSV40	101040	10Hz~40GHz	Oct. 10, 2024	Nov. 04, 2024	Oct. 09, 2025	Conducted (TH01-KS)
Power divider	STI	STI08-0055	-	0.5~40GHz	NCR	Nov. 04, 2024	NCR	Conducted (TH01-KS)
Temperature & humidity chamber	Hongzhan	LP-150U	H2014011440	-40~+150°C 20%~95%RH	Jul. 05, 2023	Nov. 04, 2024	Jul. 04, 2024	Conducted (TH01-KS)
EXA Spectrum Analyzer	Keysight	N9010A	MY55370528	10Hz~44G, MAX 30dB	Oct. 11, 2024	Oct. 20, 2024	Oct. 10, 2025	Radiation (03CH04-KS)
Bilog Antenna	TeseQ	CBL6111D	44483	30MHz~1GHz	Dec. 06, 2023	Oct. 20, 2024	Dec. 05, 2024	Radiation (03CH04-KS)
Double Ridge Horn Antenna	ETS-Lindgren	3117	00227860	1GHz~18GHz	Aug. 16, 2024	Oct. 20, 2024	Aug. 15, 2025	Radiation (03CH04-KS)
SHF-EHF Horn	Com-power	AH-840	101070	18GHz~40GHz	Jan. 27, 2024	Oct. 20, 2024	Jan. 26, 2025	Radiation (03CH04-KS)
Amplifier	SONOMA	310N	413740	9KHz~1GHz	Jan. 03, 2024	Oct. 20, 2024	Jan. 02, 2025	Radiation (03CH04-KS)
Amplifier	EM	EM18G40G A	060728	18~40GHz	Jan. 02, 2024	Oct. 20, 2024	Jan. 01, 2025	Radiation (03CH04-KS)
high gain Amplifier	EM	EM01G18G A	060840	1Ghz~18Ghz	Oct. 09, 2024	Oct. 20, 2024	Oct. 08, 2025	Radiation (03CH04-KS)
Amplifier	EM	EM01G18G A	060892	1Ghz~18Ghz	Oct. 09, 2024	Oct. 20, 2024	Oct. 08, 2025	Radiation (03CH04-KS)
AC Power Source	Chroma	61601	F104090004	N/A	NCR	Oct. 20, 2024	NCR	Radiation (03CH04-KS)
Turn Table	ChamPro	EM 1000-T	060762-T	0~360 degree	NCR	Oct. 20, 2024	NCR	Radiation (03CH04-KS)
Antenna Mast	ChamPro	EM 1000-A	060762-A	1 m~4 m	NCR	Oct. 20, 2024	NCR	Radiation (03CH04-KS)
Signal Analyzer	R&S	FSV7	101472	10Hz~7GHz	Jan. 05, 2024	Nov. 12, 2024	Jan. 04, 2025	Conducted (DFS01-KS)
Combiner	MTJ Cooperation	MTJ7112	N/A	0.4-6GHz	NCR	Nov. 12, 2024	NCR	Conducted (DFS01-KS)

NCR: No Calibration Required

4 Measurement Uncertainty

The measurement uncertainties shown below were calculated in accordance with the requirements of ANSI 63.26-2015. All the measurement uncertainty value were shown with a coverage K=2 to indicate 95% level of confidence. The measurement data show herein meets or exceeds the CISPR measurement uncertainty values specified in CISPR 16-4-2 and can be compared directly to specified limit to determine compliance.

Uncertainty of Conducted Measurement (BT/WIFI2.4G/5G)

Test Item	Uncertainty
Conducted Spurious Emission & Bandedge	±2.22 dB
Occupied Channel Bandwidth	±0.1%
Conducted Power	±0.50 dB
Conducted Power Spectral Density	±0.90 dB
Frequency	±0.04 ppm

Uncertainty of Conducted Measurement(WIFI 6G)

Test Item	Uncertainty
Conducted Spurious Emission & Bandedge	±2.22 dB
Occupied Channel Bandwidth	±0.1%
Conducted Power	±0.50 dB
Conducted Power Spectral Density	±0.90 dB
Frequency	0.04ppm
Conducted Generated signal Levels	±0.56 dB
Conducted Time	0.54%

Uncertainty of Conducted Measurement(NFC)

Test Item	Uncertainty
Occupied Channel Bandwidth	±0.1%
Frequency	0.04ppm

Uncertainty of Conducted Measurement (DFS)

Test Item	Uncertainty
Conducted Generated signal Levels	±0.56 dB
Conducted Time	0.38%

Uncertainty of Conducted Measurement (WWAN)

Test Item	Uncertainty
Conducted Spurious Emission & Bandedge	±2.22 dB
Occupied Channel Bandwidth	±0.1%
Conducted Power	±0.50 dB
Peak to Average Ratio	±0.46 dB
Frequency Stability	±0.04 ppm

Uncertainty of AC Conducted Emission Measurement (0.15 MHz ~ 30 MHz)

Measuring Uncertainty for a Level of Confidence of 95% (U = 2Uc(y))	2.84 dB
---	---------

03CH06-KS(BT/WIF):

Uncertainty of Radiated Emission Measurement (9 KHz ~ 30 MHz)

Measuring Uncertainty for a Level of Confidence of 95% (U = 2Uc(y))	3.30dB
---	--------

Uncertainty of Radiated Emission Measurement (30 MHz ~ 1000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% (U = 2Uc(y))	6.08dB
---	--------

Uncertainty of Radiated Emission Measurement (1 GHz ~ 18 GHz)

Measuring Uncertainty for a Level of Confidence of 95% (U = 2Uc(y))	5.18dB
---	--------

Uncertainty of Radiated Emission Measurement (18 GHz ~ 40 GHz)

Measuring Uncertainty for a Level of Confidence of 95% (U = 2Uc(y))	5.22dB
---	--------

03CH02-KS(NFC):

Uncertainty of Radiated Emission Measurement (9 KHz ~ 30 MHz)

Measuring Uncertainty for a Level of Confidence of 95% (U = 2Uc(y))	3.30dB
---	--------

Uncertainty of Radiated Emission Measurement (30 MHz ~ 1000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% (U = 2Uc(y))	6.04dB
---	--------



03CH04-KS(WWAN):

Uncertainty of Radiated Emission Measurement (30 MHz ~ 1000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	2.83 dB
---	---------

Uncertainty of Radiated Emission Measurement (1 GHz ~ 18 GHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	2.83 dB
---	---------

Uncertainty of Radiated Emission Measurement (18 GHz ~ 40 GHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	2.82 dB
---	---------

----- THE END -----



Appendix B. Reference Report



FCC RF Test Report

FCC ID : UZ7EM45B2
EQUIPMENT : Enterprise Mobile
BRAND NAME : Zebra
Model Name : EM45B2
APPLICANT : Zebra Technologies Corporation
3 Overlook Point, Lincolnshire, IL 60069 USA
MANUFACTURER : Zebra Technologies Corporation
3 Overlook Point, Lincolnshire, IL 60069 USA
STANDARD : 47 CFR Part 22(H), 27(H), 27(F), 27(N)
CLASSIFICATION : PCS Licensed Transmitter Held to Ear (PCE)
TEST DATE(S) : Jul. 08, 2024 ~ Aug. 26, 2024

We, Sporton International Inc. (Kunshan), would like to declare that the tested sample has been evaluated in accordance with the procedures given in ANSI C63.26-2015 and shown compliance with the applicable technical standards.

The test results in this report apply exclusively to the tested model / sample. Without written approval of Sporton International Inc. (Kunshan), the test report shall not be reproduced except in full.

Jason Jia

Approved by: Jason Jia



Sporton International Inc. (Kunshan)

No. 1098, Pengxi North Road, Kunshan Economic Development Zone Jiangsu Province 215300
People's Republic of China



TABLE OF CONTENTS

REVISION HISTORY	3
SUMMARY OF TEST RESULT	4
1 GENERAL DESCRIPTION	5
1.1 Product Feature of Equipment Under Test.....	5
1.2 Product Specification of Equipment Under Test.....	6
1.3 Modification of EUT	6
1.4 Maximum ERP Power and Emission Designator	7
1.5 Testing Location	8
1.6 Test Software.....	8
1.7 Applicable Standards.....	9
2 TEST CONFIGURATION OF EQUIPMENT UNDER TEST	10
2.1 Test Mode	10
2.2 Connection Diagram of Test System.....	12
2.3 Support Unit used in test configuration and system	12
2.4 Measurement Results Explanation Example.....	12
2.5 Frequency List of Low/Middle/High Channels	13
3 CONDUCTED TEST ITEMS	16
3.1 Measuring Instruments	16
3.2 Test Setup	16
3.3 Test Result of Conducted Test	16
3.4 Conducted Output Power and ERP	17
3.5 Peak-to-Average Ratio	19
3.6 Occupied Bandwidth	20
3.7 Conducted Band Edge	21
3.8 Conducted Spurious Emission	23
3.9 Frequency Stability	24
4 RADIATED TEST ITEMS	25
4.1 Measuring Instruments	25
4.2 Test Setup	25
4.3 Test Result of Radiated Test	26
4.4 Radiated Spurious Emission	27
5 LIST OF MEASURING EQUIPMENT	28
6 MEASUREMENT UNCERTAINTY	29
APPENDIX A. TEST RESULTS OF CONDUCTED TEST	
APPENDIX B. TEST RESULTS OF RADIATED TEST	
APPENDIX C. TEST SETUP PHOTOGRAPHS	



REVISION HISTORY

REPORT NO.	VERSION	DESCRIPTION	ISSUED DATE
FG460508D	Rev. 01	Initial issue of report	Sep. 11, 2024

SUMMARY OF TEST RESULT

Report Section	FCC Rule	Description	Limit	Result	Remark
3.4	§2.1046	Conducted Output Power	-	Report Only	-
	§22.913(a)(5)	Effective Radiated Power (Band 5) (Band 26)	ERP < 7 Watt	PASS	-
	§27.50(b)(10) §27.50(c)(10)	Effective Radiated Power (Band 13) (Band 17) (Band 71)	ERP < 3 Watt		-
3.5	N/A	Peak-to-Average Ratio	<13 dB	PASS	-
3.6	§2.1049	Occupied Bandwidth	-	Report Only	-
3.7	§2.1051 §22.917(a) §27.53(c)(2)(4) §27.53(g)	Conducted Band Edge Measurement (Band 5)(Band 13) (Band 17)(Band 26) (Band 71)	< 43+10log ₁₀ (P[Watts])	PASS	-
3.8	§2.1051 §22.917(a) §27.53(c)(2) §27.53(g)	Conducted Spurious Emission (Band 5)(Band 13) (Band 17)(Band 26) (Band 71)	< 43+10log ₁₀ (P[Watts])	PASS	-
3.9	§2.1055 §22.355	Frequency Stability Temperature & Voltage	< 2.5 ppm for Part 22	PASS	-
	§2.1055 §27.54		Within Authorized Band		
4.4	§2.1053 §22.917(a) §27.53(c)(2) §27.53(f) §27.53(g)	Radiated Spurious Emission (Band 5)(Band 13) (Band 17)(Band 26) (Band 71)	< 43+10log ₁₀ (P[Watts])	PASS	Under limit 20.07 dB at 1560.00 MHz

Conformity Assessment Condition:

- The test results (PASS/FAIL) with all measurement uncertainty excluded are presented against the regulation limits or in accordance with the requirements stipulated by the applicant/manufacture who shall bear all the risks of non-compliance that may potentially occur if measurement uncertainty is taken into account.
- The measurement uncertainty please refer to each test result in the section "Measurement Uncertainty"

Disclaimer:

The product specifications of the EUT presented in the test report that may affect the test assessments are declared by the manufacturer who shall take full responsibility for the authenticity.



1 General Description

1.1 Product Feature of Equipment Under Test

Product Feature	
Equipment	Enterprise Mobile
Brand Name	Zebra
Model Name	EM45B2
FCC ID	UZ7EM45B2
IMEI Code	Conducted: 350854420028793/350854420029353 Radiation: 350854420030211/350854420030229
HW Version	EV2.5
SW Version	13-32-02.00-TG-U06-STD-ATH-04
MFD	02AUG24
EUT Stage	Identical Prototype

Specification of Accessory				
Battery	Brand Name	Zebra	Model	BT-000501
			Part Number	BT-000501-2000

Supported Unit used in test configuration and system				
AC Adapter 1 (Type C Wall Charger 1)	Brand Name	Zebra	Model	SAWA-102-22520A
			Part Number	PWR-WUA5V45W1US
AC Adapter 2 (Type A Wall Charger 2)	Brand Name	Zebra	Model	SAWA-65-20005A
			Part Number	PWR-WUA5V12W0US
Earphone 1 (Wired headset USB-C)	Brand Name	Zebra	Part Number	HDST-USBC-PTT1-01
Earphone 2 (Rugged Bluetooth Headset)	Brand Name	Zebra	Part Number	HS3100-OTH
Earphone 3 (3.5mm PTT Headset)	Brand Name	Zebra	Part Number	HDST-35MM-PTT1-02
Earphone 4 (Rugged Headset)	Brand Name	Zebra	Part Number	HS2100-OTH
3.5mm to 3.5mm audio connector	Brand Name	Zebra	Part Number	CBL-HS2100-3MS1-01
Type C-Audio Cable (Type C to 3.5mm)	Brand Name	Zebra	Part Number	ADP-USBC-35MM1-01
USB Cable 1 (USB-C to C Cable)	Brand Name	Zebra	Part Number	CBL-EC5X-USBC3A-01
USB Cable 2 (USB-A to C Cable)	Brand Name	Zebra	Part Number	CBL-TC5X-USBC2A-01
EM45 Protective Case	Brand Name	Zebra	Part Number	SG-EM45EXO1-01

1.2 Product Specification of Equipment Under Test

Standards-related Product Specification	
Tx Frequency	LTE Band 5 : 824 MHz ~ 849 MHz LTE Band 13 : 777 MHz ~ 787 MHz LTE Band 17 : 704 MHz ~ 716 MHz LTE Band 26 : 824 MHz ~ 849 MHz LTE Band 71: 663 MHz ~ 698 MHz
Rx Frequency	LTE Band 5 : 869 MHz ~ 894 MHz LTE Band 13 : 746 MHz ~ 756 MHz LTE Band 17 : 734 MHz ~ 746 MHz LTE Band 26 : 869 MHz ~ 894 MHz LTE Band 71: 617 MHz ~ 652 MHz
Bandwidth	LTE Band 5 : 1.4MHz / 3MHz / 5MHz / 10MHz LTE Band 13 : 5MHz / 10MHz LTE Band 17 : 5MHz / 10MHz LTE Band 26 : 1.4MHz / 3MHz / 5MHz / 10MHz / 15MHz LTE Band 71 : 5MHz / 10MHz / 15MHz / 20MHz
Maximum Output Power to Antenna	Ant0: LTE Band 5 : 22.84 dBm LTE CA_5B : 22.84 dBm LTE Band 13 : 22.78 dBm LTE Band 17 : 22.75 dBm LTE Band 26 : 23.95 dBm LTE Band 71 : 22.98 dBm Ant1: LTE Band 5 : 21.66 dBm LTE CA_5B : 21.66 dBm LTE Band 13 : 21.77 dBm LTE Band 17 : 21.78 dBm LTE Band 26 : 21.64 dBm LTE Band 71 : 21.87 dBm
Antenna Gain	Ant0: LTE Band 5 : -3 dBi LTE Band 13 : -2 dBi LTE Band 17 : -2.5 dBi LTE Band 26 : -3 dBi LTE Band 71 : -2 dBi Ant1: LTE Band 5 : -2.11 dBi LTE Band 13 : -2.34 dBi LTE Band 17 : -2.04 dBi LTE Band 26 : -2.11 dBi LTE Band 71 : -3.24 dBi
Type of Modulation	QPSK / 16QAM / 64QAM / 256QAM

Note: The maximum ERP is calculated from max output power and max antenna gain, so only the maximum ERP of Antenna 0 for LTE Band5/5B/13/17/26/71 is shown in the report.

1.3 Modification of EUT

No modifications are made to the EUT during all test items.



1.4 Maximum ERP Power and Emission Designator

LTE Band 5		QPSK		16QAM/64QAM/256QAM	
BW (MHz)	Frequency Range (MHz)	Maximum ERP(W)	Emission Designator (99%OBW)	Maximum ERP(W)	Emission Designator (99%OBW)
1.4	824.7 ~ 848.3	0.0557	1M09G7D	0.0444	1M09W7D
3	825.5 ~ 847.5	0.0565	2M71G7D	0.0494	2M73W7D
5	826.5 ~ 846.5	0.0558	4M49G7D	0.0493	4M50W7D
10	829.0 ~ 844.0	0.0587	9M01G7D	0.0511	8M99W7D
LTE Band 13		QPSK		16QAM/64QAM/256QAM	
BW (MHz)	Frequency Range (MHz)	Maximum ERP(W)	Emission Designator (99%OBW)	Maximum ERP(W)	Emission Designator (99%OBW)
5	779.5 ~ 784.5	0.0711	4M48G7D	0.0627	4M48W7D
10	782.0	0.0729	8M99G7D	0.0641	8M99W7D
LTE Band 17		QPSK		16QAM/64QAM/256QAM	
BW (MHz)	Frequency Range (MHz)	Maximum ERP(W)	Emission Designator (99%OBW)	Maximum ERP(W)	Emission Designator (99%OBW)
5	706.5 ~ 713.5	0.0637	4M49G7D	0.0558	4M50W7D
10	709.0 ~ 711.0	0.0646	9M15G7D	0.0568	9M03W7D
LTE Band 26		QPSK		16QAM/64QAM/256QAM	
BW (MHz)	Frequency Range (MHz)	Maximum ERP(W)	Emission Designator (99%OBW)	Maximum ERP(W)	Emission Designator (99%OBW)
1.4	824.7 ~ 848.3	0.0577	1M09G7D	0.0454	1M09W7D
3	825.5 ~ 847.5	0.0585	2M71G7D	0.0500	2M73W7D
5	826.5 ~ 846.5	0.0582	4M49G7D	0.0508	4M50W7D
10	829.0 ~ 844.0	0.0574	9M01G7D	0.0511	8M99W7D
15	831.5 ~ 841.5	0.0759	13M5G7D	0.0532	13M5W7D
CH26790	824.0	0.0612	13M4G7D	0.0508	13M5W7D
LTE Band 71		QPSK		16QAM/64QAM/256QAM	
BW (MHz)	Frequency Range (MHz)	Maximum ERP(W)	Emission Designator (99%OBW)	Maximum ERP(W)	Emission Designator (99%OBW)
5	665.5 ~ 695.5	0.0729	4M51G7D	0.0638	4M47W7D
10	668.0 ~ 693.0	0.0728	8M97G7D	0.0634	9M05W7D
15	670.5 ~ 690.5	0.0724	13M4G7D	0.0637	13M4W7D
20	673.0 ~ 688.0	0.0764	17M8G7D	0.0665	17M7W7D



LTE Band CA_5B	QPSK		16QAM/64QAM/256QAM	
BW (MHz)	Maximum ERP(W)	Emission Designator (99%OBW)	Maximum ERP(W)	Emission Designator (99%OBW)
3MHz+5MHz	0.0586	7M56G7D	0.0507	7M56W7D
5MHz+3MHz	0.0579	7M50G7D	0.0508	7M51W7D
5MHz+10MHz	0.0582	13M8G7D	0.0501	13M8W7D
10MHz+5MHz	0.0583	13M9G7D	0.0486	13M9W7D
10MHz+10MHz	0.0587	18M7G7D	0.0512	18M6W7D

Note:

1. LTE Band 26 overlaps the entire frequency range of LTE Band 5. Therefore, the test results provided in this report covers Band 26 as well as Band 5..
2. All modulations have been tested, and only the worst test results of PSK & QAM are shown in the report.

1.5 Testing Location

Sporton International Inc. (Kunshan) is accredited to ISO/IEC 17025:2017 by American Association for Laboratory Accreditation with Certificate Number 5145.02.

Test Firm	Sporton International Inc. (Kunshan)		
Test Site Location	No. 1098, Pengxi North Road, Kunshan Economic Development Zone Jiangsu Province 215300 People's Republic of China TEL : +86-512-57900158		
Test Site No.	Sporton Site No.	FCC Designation No.	FCC Test Firm Registration No.
	03CH04-KS TH01-KS	CN1257	314309

1.6 Test Software

Item	Site	Manufacture	Name	Version
1.	TH01-KS	SPORTON	FCC LTE_Ver2.0 Auto_china_210503	2.0
2.	03CH04-KS	AUDIX	E3	210616



1.7 Applicable Standards

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

- ♦ 47 CFR Part 22(H), 27(H), 27(F), 27(N)
- ♦ ANSI C63.26-2015
- ♦ FCC KDB 971168 D01 Power Meas License Digital Systems v03r01
- ♦ FCC KDB 412172 D01 Determining ERP and EIRP v01r01

Remark:

1. All test items were verified and recorded according to the standards and without any deviation during the test.
2. This EUT has also been tested and complied with the requirements of FCC Part 15, Subpart B, recorded in a separate test report.



2 Test Configuration of Equipment Under Test

2.1 Test Mode

Antenna port conducted and radiated test items listed below are performed according to KDB 971168 D01 Power Meas License Digital Systems v03r01 with maximum output power.

Radiated measurements are performed by rotating the EUT in three different orthogonal test planes to find the maximum emission. (X/Y-Plane)


Test Items	Band	Bandwidth (MHz)						Modulation				RB #			Test Channel		
		1.4	3	5	10	15	20	QPSK	16QAM	64QAM	256QAM	1	Half	Full	L	M	H
Max. Output Power	5	v	v	v	v	-	-	v	v	v	v	v		v	v	v	v
	13	-	-	v	v	-	-	v	v	v	v	v		v	v	v	v
	17	-	-	v	v	-	-	v	v	v	v	v		v	v	v	v
	26	v	v	v	v	v	-	v	v	v	v	v		v	v	v	v
	71	-	-	v	v	v	v	v	v	v	v	v		v	v	v	v
Peak-to-Average Ratio	13	-	-		v	-	-	v	v	v	v			v		v	
	17	-	-		v	-	-	v	v	v	v			v		v	
	26					v	-	v	v	v	v			v		v	
	71	-	-				v	v	v	v	v			v		v	
26dB and 99% Bandwidth	13	-	-	v	v	-	-	v	v					v		v	
	17	-	-	v	v	-	-	v	v					v		v	
	26	v	v	v	v	v	-	v	v					v		v	
	71	-	-	v	v	v	v	v	v					v		v	
Conducted Band Edge	13	-	-	v	v	-	-	v	v	v	v	v		v	v		v
	17	-	-	v	v	-	-	v	v	v	v	v		v	v		v
	26	v	v	v	v	v	-	v	v	v	v	v		v	v		v
	71	-	-	v	v	v	v	v	v	v	v	v		v	v		v
Conducted Spurious Emission	13	-	-	v	v	-	-	v				v			v	v	v
	17	-	-	v	v	-	-	v				v			v	v	v
	26	v	v	v	v	v	-	v				v			v	v	v
	71	-	-	v	v	v	v	v				v			v	v	v
Frequency Stability	13	-	-		v	-	-	v						v		v	
	17	-	-		v	-	-	v						v		v	
	26				v		-	v						v		v	
	71	-	-		v			v						v		v	
E.R.P	5	v	v	v	v	-	-	v	v	v	v	v			v	v	v
	13	-	-	v	v	-	-	v	v	v	v	v			v	v	v
	17	-	-	v	v	-	-	v	v	v	v	v			v	v	v
	26	v	v	v	v	v	-	v	v	v	v	v			v	v	v
	71	-	-	v	v	v	v	v	v	v	v	v			v	v	v
Radiated Spurious Emission	13	Worst Case													v	v	v
	17	Worst Case													v	v	v
	26	Worst Case													v	v	v
	71	Worst Case													v	v	v



Test Items	Band	Bandwidth (MHz)						Modulation				RB #			Test Channel		
		1.4	3	5	10	15	20	QPSK	16QAM	64QAM	256QAM	1	Half	Full	L	M	H
Note		1. The mark "v" means that this configuration is chosen for testing 2. The mark "-" means that this bandwidth is not supported. 3. The device is investigated from 30MHz to 10 times of fundamental signal for radiated spurious emission test under different RB size/offset and modulations in exploratory test. Subsequently, only the worst case emissions are reported.															

Test Items	Band	Bandwidth (MHz)								Modulation				RB #			Test Channel		
		5+10	10+10	5+15	10+5	5+10	5+5	5+3	3+5	QPSK	16QAM	64QAM	256QAM	1	Half	Full	L	M	H
Max. Output Power	5B_CA	-	v	-	v	v	-	v	v	v	v	v	v	v			v	v	v
26dB and 99% Bandwidth	5B_CA	-	v	-	v	v	-	v	v	v	v					v		v	
Conducted Band Edge	5B_CA	-	v	-	v	v	-	v	v	v	v	v	v	v		v	v		v
Conducted Spurious Emission	5B_CA	-	v	-	v	v	-	v	v	v				v			v	v	v
E.R.P.	5B_CA	-	v	-	v	v	-	v	v	v	v	v	v	v			v	v	v
Radiated Spurious Emission	5B_CA	Worst Case															v	v	v
Note		1. The mark "v" means that this configuration is chosen for testing 2. The mark "-" means that this bandwidth is not supported. 3. The device is investigated from 30MHz to 10 times of fundamental signal for radiated spurious emission test under different RB size/offset and modulations in exploratory test. Subsequently, only the worst case emissions are reported. 4. All test items are based on engineering evaluation. 5. For QAM modulation mode, the whole testing has assessed 16QAM&64QAM mode by referring to the higher conducted power																	

2.2 Connection Diagram of Test System

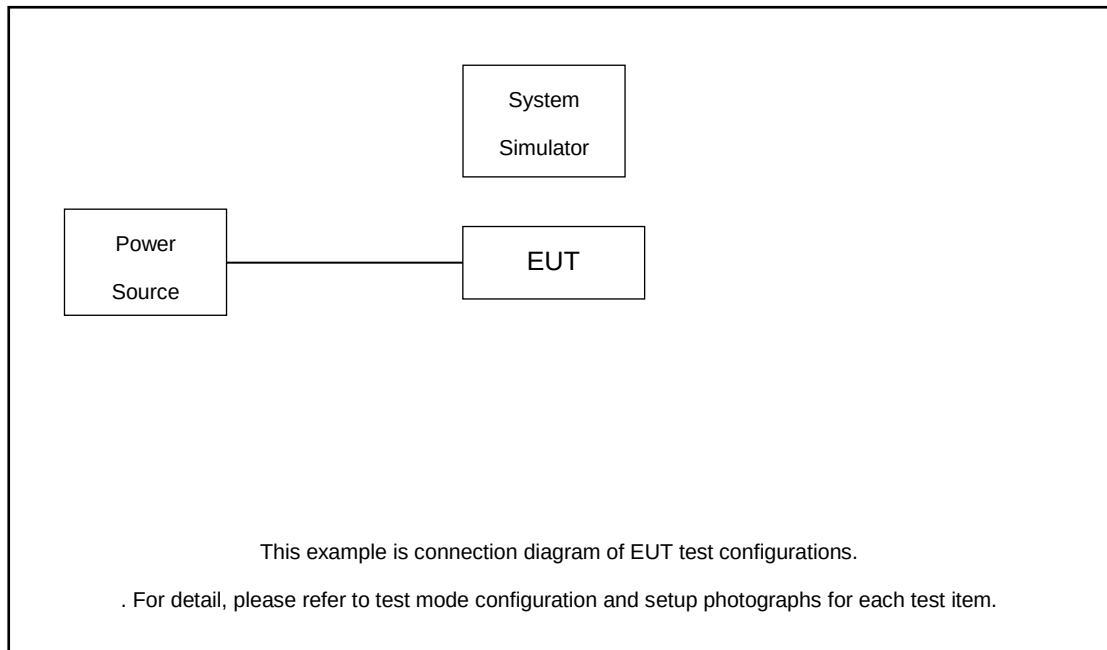

2.3 Support Unit used in test configuration and system

Item	Equipment	Trade Name	Model No.	FCC ID	Data Cable	Power Cord
1.	Power Supply	GWINSTEK	PSS-2002	N/A	N/A	Unshielded, 1.8 m
2.	LTE Base Station	Anritsu	MT8820C	N/A	N/A	Unshielded, 1.8 m

2.4 Measurement Results Explanation Example

For all conducted test items:

The offset level is set in the spectrum analyzer to compensate the RF cable loss between EUT conducted output port and spectrum analyzer. With the offset compensation, the spectrum analyzer reading level is exactly the EUT RF output level.

The spectrum analyzer offset is derived from RF cable loss

Offset = RF cable loss

Following shows an offset computation example with cable loss 4.6 dB

Example :

$$\begin{aligned}
 \text{Offset(dB)} &= \text{RF cable loss(dB)} \\
 &= 4.6 \text{ (dB)}
 \end{aligned}$$

2.5 Frequency List of Low/Middle/High Channels

LTE Band 5 Channel and Frequency List				
BW [MHz]	Channel/Frequency(MHz)	Lowest	Middle	Highest
10	Channel	20450	20525	20600
	Frequency	829	836.5	844
5	Channel	20425	20525	20625
	Frequency	826.5	836.5	846.5
3	Channel	20415	20525	20635
	Frequency	825.5	836.5	847.5
1.4	Channel	20407	20525	20643
	Frequency	824.7	836.5	848.3

LTE Band 13 Channel and Frequency List				
BW [MHz]	Channel/Frequency(MHz)	Lowest	Middle	Highest
10	Channel	-	23230	-
	Frequency	-	782	-
5	Channel	23205	23230	23255
	Frequency	779.5	782	784.5

LTE Band 17 Channel and Frequency List				
BW [MHz]	Channel/Frequency(MHz)	Lowest	Middle	Highest
10	Channel	23780	23790	23800
	Frequency	709	710	711
5	Channel	23755	23790	23825
	Frequency	706.5	710	713.5

LTE Band 26 Channel and Frequency List				
BW [MHz]	Channel/Frequency(MHz)	Lowest	Middle	Highest
15	Channel	26865	26915	26965
	Frequency	831.5	836.5	841.5
10	Channel	26840	26915	26990
	Frequency	829	836.5	844
5	Channel	26815	26915	27015
	Frequency	826.5	836.5	846.5
3	Channel	26805	26915	27025
	Frequency	825.5	836.5	847.5
1.4	Channel	26797	26915	27033
	Frequency	824.7	836.5	848.3

LTE Band 71 Channel and Frequency List				
BW [MHz]	Channel/Frequency(MHz)	Lowest	Middle	Highest
20	Channel	133222	133322	133372
	Frequency	673.0	680.5	688.0
15	Channel	133197	133297	133397
	Frequency	670.5	680.5	690.5
10	Channel	133172	133272	133422
	Frequency	668.0	678.0	693.0
5	Channel	133147	133247	133447
	Frequency	665.5	675.5	695.5



LTE Band 5B_CA Channel and Frequency List					
BW [MHz]	Channel/Frequency(MHz)		Lowest	Middle	Highest
3 + 5	PCC	Channel	20416	20501	20586
		Frequency	825.6	834.1	842.6
	SCC	Channel	20455	20540	20625
		Frequency	829.5	838.0	846.5
5 + 3	PCC	Channel	20425	20510	20595
		Frequency	826.5	835.0	843.5
	SCC	Channel	20464	20549	20634
		Frequency	830.4	838.9	847.4
5 + 10	PCC	Channel	20428	20478	20528
		Frequency	826.8	831.8	836.8
	SCC	Channel	20500	20550	20600
		Frequency	834	839	844
10 + 5	PCC	Channel	20450	20500	20550
		Frequency	829	834	839
	SCC	Channel	20522	20572	20622
		Frequency	836.2	841.2	846.2
10 + 10	PCC	Channel	20450	20476	20501
		Frequency	829	831.6	834.1
	SCC	Channel	20549	20575	20600
		Frequency	838.9	841.5	844


3 Conducted Test Items

3.1 Measuring Instruments


See list of measuring instruments of this test report.

3.2 Test Setup


3.2.1 Conducted Output Power

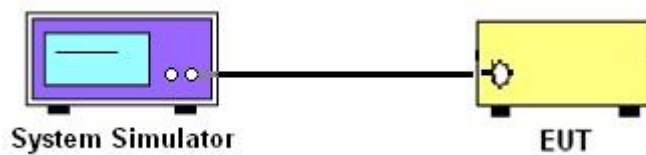

3.2.2 Peak-to-Average Ratio, Occupied Bandwidth ,Conducted Band-Edge and Conducted Spurious Emission

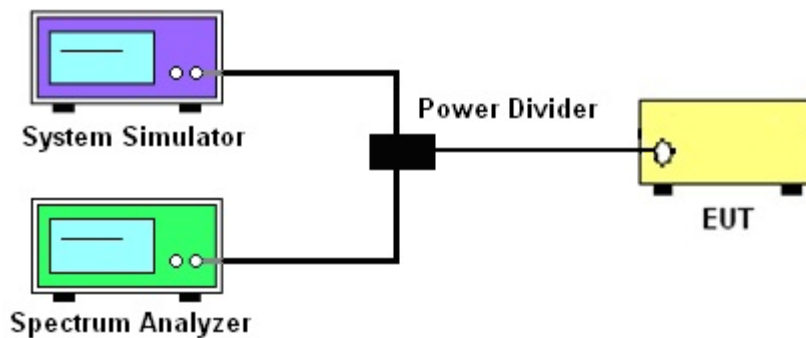

3.2.3 Frequency Stability

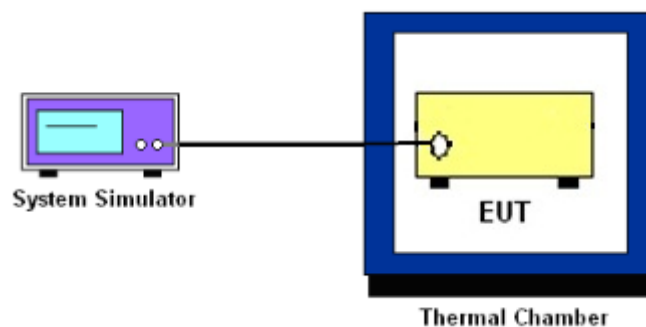

3.3 Test Result of Conducted Test

Please refer to Appendix A.

3.4 Conducted Output Power and ERP

3.4.1 Description of the Conducted Output Power Measurement and ERP Measurement

A system simulator was used to establish communication with the EUT. Its parameters were set to force the EUT transmitting at maximum output power. The measured power in the radio frequency on the transmitter output terminals shall be reported.

The ERP of mobile transmitters must not exceed 7 Watts for LTE Band 5 and Band 26.

The ERP of mobile transmitters must not exceed 3 Watts for LTE Band 13 and Band 17 and Band 71.

According to KDB 412172 D01 Power Approach,

$EIRP = P_T + G_T - L_C$, $ERP = EIRP - 2.15$, where

P_T = transmitter output power in dBm

G_T = gain of the transmitting antenna in dBi

L_C = signal attenuation in the connecting cable between the transmitter and antenna in dB


3.4.2 Test Procedures

1. The testing follows ANSI C63.26 Section 5.2
2. The transmitter output port was connected to the system simulator.
3. Set EUT at maximum power through the system simulator.
4. Select lowest, middle, and highest channels for each band and different modulation.
5. Measure and record the power level from the system simulator.


3.4.3 Test Procedures for LTE ULCA

1. The testing follows ANSI C63.26 Section 5.2
2. The transmitter PCC & SCC output ports were connected to the system simulator.
3. Set EUT at maximum power, set the PCC/SCC CA band, channel, bandwidth and RB config.


PCC config_ (Channel Bandwidth / Channel / Band)

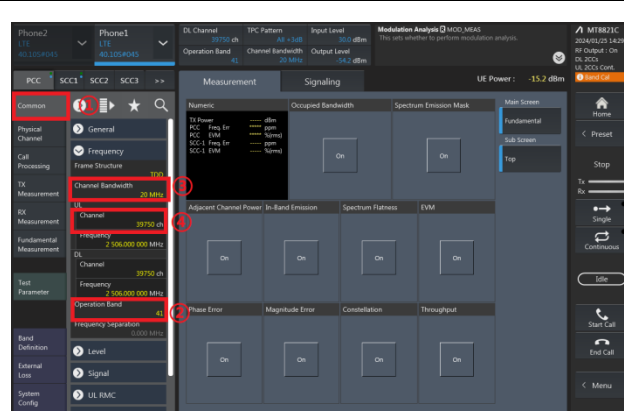


SCC config_ (Channel Bandwidth / Channel / Band)

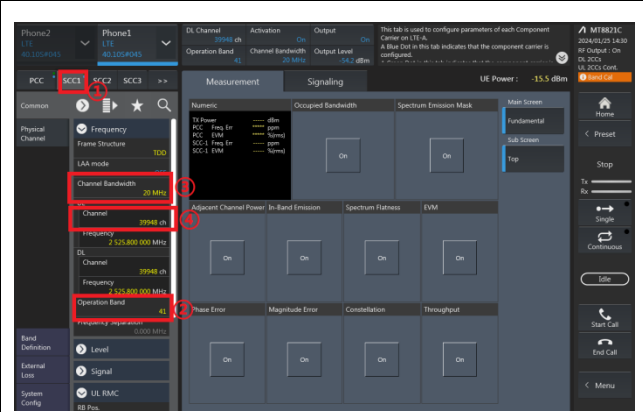

PCC config_ (Number of RB / Starting RB)

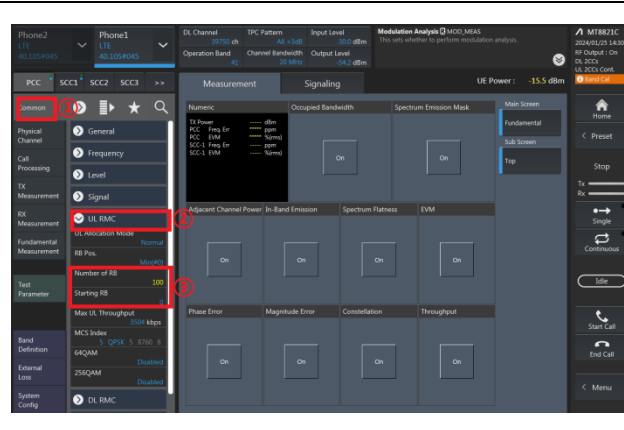


SCC config_ (Number of RB / Starting RB)

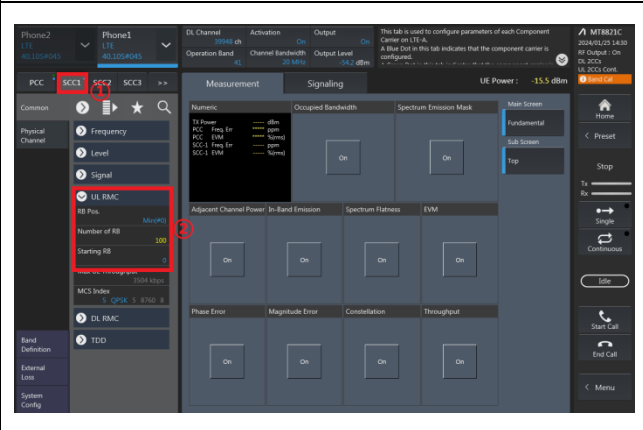


4. Select lowest, middle, and highest channels for each ULCA band and different modulation.
5. Check the ULCA spectrum and record the total power from the system simulator.

Check the ULCA spectrum (eg. 20M+20M)

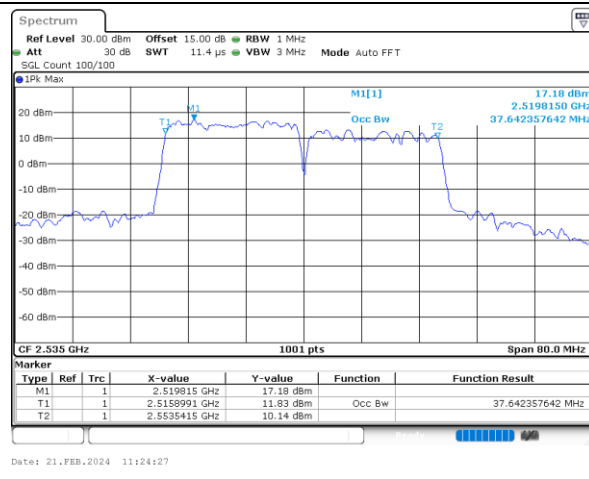

Read the Total UL CA output power (PCC+SCC)

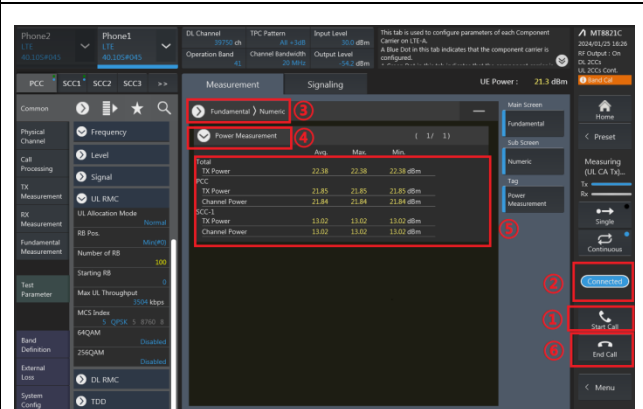

3.5 Peak-to-Average Ratio

3.5.1 Description of the PAR Measurement

Power Complementary Cumulative Distribution Function (CCDF) curves provide a means for characterizing the power peaks of a digitally modulated signal on a statistical basis. A CCDF curve depicts the probability of the peak signal amplitude exceeding the average power level. Most contemporary measurement instrumentation include the capability to produce CCDF curves for an input signal provided that the instrument's resolution bandwidth can be set wide enough to accommodate the entire input signal bandwidth. In measuring transmissions in this band using an average power technique, the peak-to-average ratio (PAR) of the transmission may not exceed 13 dB.

3.5.2 Test Procedures

1. The testing follows ANSI C63.26 Section 5.2.3.4 (CCDF).
2. The EUT was connected to spectrum and system simulator via a power divider.
3. Set the CCDF (Complementary Cumulative Distribution Function) option in spectrum analyzer.
4. The highest RF powers were measured and recorded the maximum PAPR level associated with a probability of 0.1 %.
5. Record the deviation as Peak to Average Ratio.

3.6 Occupied Bandwidth

3.6.1 Description of Occupied Bandwidth Measurement

The occupied bandwidth is the width of a frequency band such that, below the lower and above the upper frequency limits, the mean powers emitted are each equal to a specified percentage 0.5% of the total mean transmitted power.

The 26 dB emission bandwidth is defined as the frequency range between two points, one above and one below the carrier frequency, at which the spectral density of the emission is attenuated 26 dB below the maximum in-band spectral density of the modulated signal. Spectral density (power per unit bandwidth) is to be measured with a detector of resolution bandwidth equal to approximately 1.0% of the emission bandwidth.

3.6.2 Test Procedures

1. The testing follows ANSI C63.26 Section 5.4
2. The EUT was connected to spectrum analyzer and system simulator via a power divider.
3. The spectrum analyzer center frequency is set to the nominal EUT channel center frequency. The span range for the spectrum analyzer shall be between two and five times the anticipated OBW.
4. The nominal resolution bandwidth (RBW) shall be in the range of 1 to 5 % of the anticipated OBW, and the VBW shall be at least 3 times the RBW.
5. Set the detection mode to peak, and the trace mode to max hold.
6. Determine the reference value: Set the EUT to transmit a modulated signal. Allow the trace to stabilize. Set the spectrum analyzer marker to the highest level of the displayed trace.
(this is the reference value)
7. Determine the “-26 dB down amplitude” as equal to (Reference Value – X).
8. Place two markers, one at the lowest and the other at the highest frequency of the envelope of the spectral display such that each marker is at or slightly below the “-X dB down amplitude” determined in step 6. If a marker is below this “-X dB down amplitude” value it shall be placed as close as possible to this value. The OBW is the positive frequency difference between the two markers.
9. Use the 99 % power bandwidth function of the spectrum analyzer and report the measured bandwidth.



3.7 Conducted Band Edge

3.7.1 Description of Conducted Band Edge Measurement

22.917(a)

For operations in the 824 – 849 MHz band, the FCC limit is $43 + 10\log_{10}(P[\text{Watts}])$ dB below the transmitter power $P(\text{Watts})$ in a 100kHz bandwidth. However, in the 1MHz bands immediately outside and adjacent to the licensee's frequency block, a resolution bandwidth of at least one percent of the emission bandwidth of the fundamental emission of the transmitter may be employed.

27.53 (c)

For operations in the 776-788 MHz band, the FCC limit is $43 + 10\log_{10}(P[\text{Watts}])$ dB below the transmitter power $P(\text{Watts})$ in a 100 kHz bandwidth. However, in the 100 kHz bands immediately outside and adjacent to the frequency block, a resolution bandwidth of at least 30 kHz may be employed. In addition, the power of any unwanted emissions in any 6.25 kHz bandwidth for all frequencies between 763-775 MHz and 793-806 MHz shall be attenuated below the transmitter power, P (dBW), by at least $65 + 10 \log_{10} p(\text{watts})$, dB, for mobile and portable equipment.

27.53 (g)

For operations in the 600MHz band and 698 -746 MHz band, the FCC limit is $43 + 10\log_{10}(P[\text{Watts}])$ dB below the transmitter power $P(\text{Watts})$ in a 100 kHz bandwidth. However, in the 100 kilohertz bands immediately outside and adjacent to a licensee's frequency block, a resolution bandwidth of at least 30 kHz may be employed.

3.7.2 Test Procedures

1. The testing follows ANSI C63.26 section 5.7
2. The EUT was connected to spectrum analyzer and system simulator via a power divider.
3. The band edges of low and high channels for the highest RF powers were measured.
4. Set RBW $\geq 1\%$ EBW in the 1MHz band immediately outside and adjacent to the band edge.
5. Beyond the 1 MHz band from the band edge, RBW=1MHz was used
6. Set spectrum analyzer with RMS detector.
7. The RF fundamental frequency should be excluded against the limit line in the operating frequency band.
8. Checked that all the results comply with the emission limit line.

Example:

The limit line is derived from $43 + 10\log(P)\text{dB}$ below the transmitter power P(Watts)

$= P(W) - [43 + 10\log(P)] \text{ (dB)}$

$= [30 + 10\log(P)] \text{ (dBm)} - [43 + 10\log(P)] \text{ (dB)} = -13\text{dBm}.$

9. When using the integration method, the starting frequency of the integration shall be centered at one-half of the RBW away from the band edge.

3.8 Conducted Spurious Emission

3.8.1 Description of Conducted Spurious Emission Measurement

The power of any emission outside of the authorized operating frequency ranges must be lower than the transmitter power (P) by a factor of at least $43 + 10 \log (P)$ dB.

It is measured by means of a calibrated spectrum analyzer and scanned from 30 MHz up to a frequency including its 10th harmonic.

3.8.2 Test Procedures

1. The testing follows ANSI C63.26 section 5.7
2. The EUT was connected to spectrum analyzer and system simulator via a power divider.
3. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator.
The path loss was compensated to the results for each measurement.
4. The middle channel for the highest RF power within the transmitting frequency was measured.
5. The conducted spurious emission for the whole frequency range was taken.
6. Make the measurement with the spectrum analyzer's RBW = 1MHz, VBW = 3MHz.
7. Set spectrum analyzer with RMS detector.
8. Taking the record of maximum spurious emission.
9. The RF fundamental frequency should be excluded against the limit line in the operating frequency band.
10. The limit line is derived from $43 + 10\log(P)$ dB below the transmitter power P(Watts)
 $= P(W) - [43 + 10\log(P)]$ (dB)
 $= [30 + 10\log(P)]$ (dBm) - $[43 + 10\log(P)]$ (dB)
 $= -13$ dBm.

3.9 Frequency Stability

3.9.1 Description of Frequency Stability Measurement

The frequency stability shall be measured by variation of ambient temperature and variation of primary supply voltage to ensure that the fundamental emission stays within the authorized frequency block. The frequency stability of the transmitter shall be maintained within $\pm 0.00025\%$ ($\pm 2.5\text{ppm}$) of the center frequency.

3.9.2 Test Procedures for Temperature Variation

1. The testing follows ANSI C63.26 section 5.6.4
2. The EUT was set up in the thermal chamber and connected with the system simulator.
3. With power OFF, the temperature was decreased to -30°C and the EUT was stabilized before testing. Power was applied and the maximum change in frequency was recorded within one minute.
4. With power OFF, the temperature was raised in 10°C step up to 50°C . The EUT was stabilized at each step for at least half an hour. Power was applied and the maximum frequency change was recorded within one minute.

3.9.3 Test Procedures for Voltage Variation

1. The testing follows ANSI C63.26 section 5.6.5
2. The EUT was placed in a temperature chamber at $20\pm 5^{\circ}\text{C}$ and connected with the system simulator.
3. The power supply voltage to the EUT was varied from 85% to 115% of the nominal value for other than hand carried battery equipment.
4. For hand carried, battery powered equipment, reduce the primary ac or dc supply voltage to the battery operating end point, which shall be specified by the manufacturer.
5. The variation in frequency was measured for the worst case.


4 Radiated Test Items

4.1 Measuring Instruments


See list of measuring instruments of this test report.

4.2 Test Setup


4.2.1 For radiated test below 30MHz

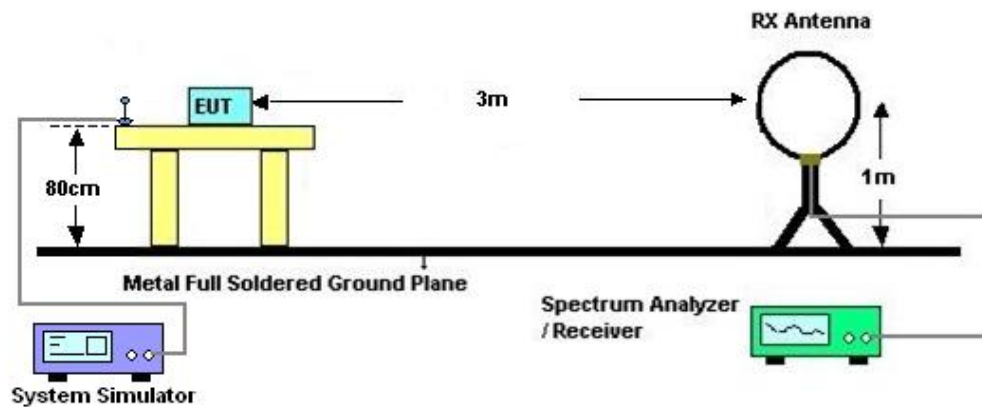

4.2.2 For radiated test from 30MHz to 1GHz

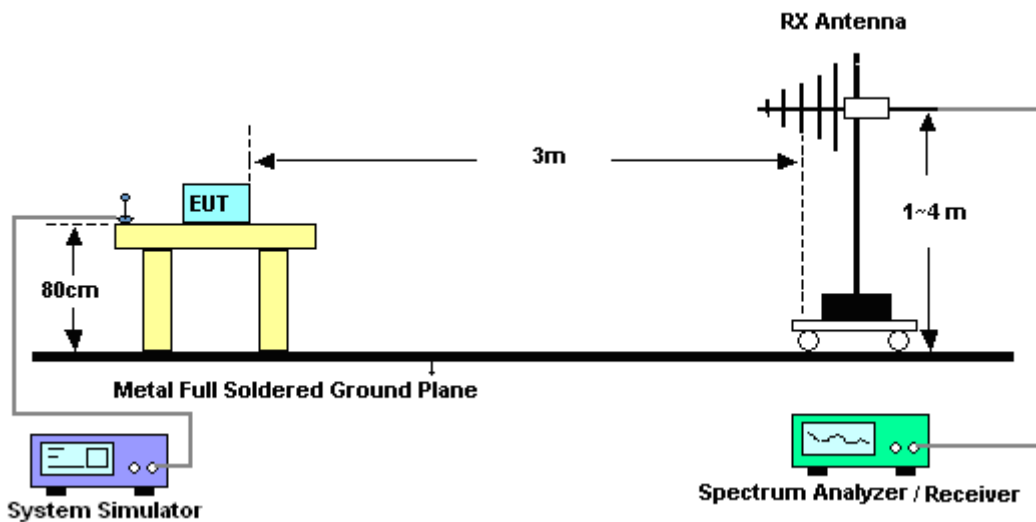

4.2.3 For radiated test above 1GHz

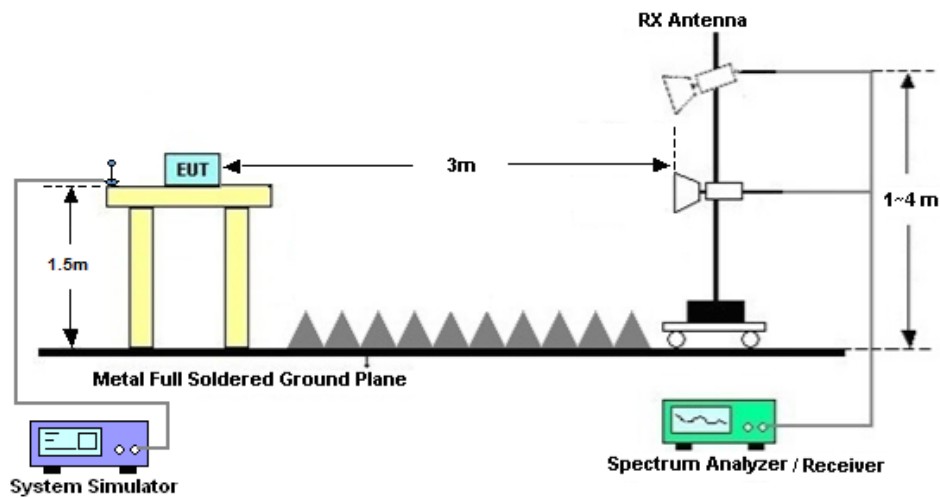

4.3 Test Result of Radiated Test

The low frequency, which started from 9 kHz to 30MHz, was pre-scanned and the result which was 20dB lower than the limit line was not reported.

Please refer to Appendix B.



4.4 Radiated Spurious Emission

4.4.1 Description of Radiated Spurious Emission

The radiated spurious emission was measured by substitution method according to ANSI C63.26. The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitter power (P) by a factor of at least $43 + 10 \log (P)$ dB.

For LTE Band 13

For operations in the 746-758 MHz, 775-788 MHz, and 805-806 MHz bands, emissions in the band 1559-1610 MHz shall be limited to -70 dBW/MHz equivalent isotropically radiated power (EIRP) for wideband signals, and -80 dBW EIRP for discrete emissions of less than 700 Hz bandwidth.

The spectrum is scanned from 30 MHz up to a frequency including its 10th harmonic.

4.4.2 Test Procedures

1. The testing follows ANSI C63.26 Section 5.5
2. The EUT was placed on a turntable with 0.8 meter height for frequency below 1GHz and 1.5 meter height for frequency above 1GHz respectively above ground.
3. The EUT was set 3 meters from the receiving antenna mounted on the antenna tower.
4. The table was rotated 360 degrees to determine the position of the highest spurious emission.
5. The height of the receiving antenna is varied between 1m to 4m to search the maximum spurious emission for both horizontal and vertical polarizations.
6. During the measurement, the system simulator parameters were set to force the EUT transmitting at maximum output power.
7. Make the measurement with the spectrum analyzer's RBW = 1MHz, VBW = 3MHz, taking the record of maximum spurious emission.
8. A horn antenna was substituted in place of the EUT and was driven by a signal generator.
9. Tune the output power of signal generator to the same emission level with EUT maximum spurious emission.
10. $\text{EIRP (dBm)} = \text{S.G. Power} - \text{Tx Cable Loss} + \text{Tx Antenna Gain}$
11. $\text{ERP (dBm)} = \text{EIRP} - 2.15$
12. The RF fundamental frequency should be excluded against the limit line in the operating frequency band.

The limit line is derived from $43 + 10\log(P)$ dB below the transmitter power P(Watts)

$$= P(W) - [43 + 10\log(P)] \text{ (dB)}$$

$$= [30 + 10\log(P)] \text{ (dBm)} - [43 + 10\log(P)] \text{ (dB)}$$

$$= -13\text{dBm}.$$



5 List of Measuring Equipment

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Test Date	Due Date	Remark
Spectrum Analyzer	R&S	FSV40	101040	10Hz~40GHz	Oct. 11, 2023	Jul. 08, 2024~ Jul. 11, 2024	Oct. 10, 2024	Conducted (TH01-KS)
Power divider	STI	STI08-0055	-	0.5~40GHz	NCR	Jul. 08, 2024~ Jul. 11, 2024	NCR	Conducted (TH01-KS)
Temperature & humidity chamber	Hongzhan	LP-150U	H2014011440	-40~+150°C 20%~95%RH	Jul. 04, 2024	Jul. 08, 2024~ Jul. 11, 2024	Jul. 03, 2025	Conducted (TH01-KS)
EXA Spectrum Analyzer	Keysight	N9010B	MY57471079	10Hz~44G,MAX 30dB	Oct. 11, 2023	Aug. 12, 2024~ Aug. 26, 2024	Oct. 10, 2024	Radiation (03CH04-KS)
Loop Antenna	R&S	HFH2-Z2E	101125	9kHz~30MHz	Sep. 11 2023	Aug. 12, 2024~ Aug. 26, 2024	Sep. 10, 2024	Radiation (03CH04-KS)
Bilog Antenna	TeseQ	CBL6111D	59913	30MHz~1GHz	Aug. 18, 2023	Aug. 12, 2024~ Aug. 26, 2024	Aug. 17, 2025	Radiation (03CH04-KS)
Double Ridge Horn Antenna	ETS-Lindgren	3117	75957	1GHz~18GHz	Oct. 23, 2023	Aug. 12, 2024~ Aug. 26, 2024	Oct. 22, 2024	Radiation (03CH04-KS)
SHF-EHF Horn	Com-power	AH-840	101070	18GHz~40GHz	Jan. 27, 2024	Aug. 12, 2024~ Aug. 26, 2024	Jan. 26, 2025	Radiation (03CH04-KS)
Amplifier	SONOMA	310N	413740	9KHz~1GHz	Jan. 03, 2024	Aug. 12, 2024~ Aug. 26, 2024	Jan. 02, 2025	Radiation (03CH04-KS)
Amplifier	EM	EM18G40GA	060728	18~40GHz	Jan. 02, 2024	Aug. 12, 2024~ Aug. 26, 2024	Jan. 01, 2025	Radiation (03CH04-KS)
high gain Amplifier	EM	EM01G18GA	060840	1Ghz~18Ghz	Oct. 11, 2023	Aug. 12, 2024~ Aug. 26, 2024	Oct. 10, 2024	Radiation (03CH04-KS)
Amplifier	EM	EM01G18GA	060892	1Ghz~18Ghz	Oct. 11, 2023	Aug. 12, 2024~ Aug. 26, 2024	Oct. 10, 2024	Radiation (03CH04-KS)
AC Power Source	Chroma	61601	F104090004	N/A	NCR	Aug. 12, 2024~ Aug. 26, 2024	NCR	Radiation (03CH04-KS)
Turn Table	ChamPro	EM 1000-T	060762-T	0~360 degree	NCR	Aug. 12, 2024~ Aug. 26, 2024	NCR	Radiation (03CH04-KS)
Antenna Mast	ChamPro	EM 1000-A	060762-A	1 m~4 m	NCR	Aug. 12, 2024~ Aug. 26, 2024	NCR	Radiation (03CH04-KS)

NCR: No Calibration Required



6 Measurement Uncertainty

The measurement uncertainties shown below were calculated in accordance with the requirements of ANSI 63.26-2015. All the measurement uncertainty value were shown with a coverage K=2 to indicate 95% level of confidence. The measurement data show herein meets or exceeds the CISPR measurement uncertainty values specified in CISPR 16-4-2 and can be compared directly to specified limit to determine compliance.

Uncertainty of Conducted Measurement

Test Item	Uncertainty
Conducted Spurious Emission & Bandedge	± 2.22 dB
Occupied Channel Bandwidth	$\pm 0.1\%$
Conducted Power	± 0.50 dB
Peak to Average Ratio	± 0.50 dB
Frequency Stability	± 0.04 ppm

Uncertainty of Radiated Emission Measurement (30 MHz ~ 1000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	2.83dB
---	--------

Uncertainty of Radiated Emission Measurement (1 GHz ~ 18 GHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	2.83dB
---	--------

Uncertainty of Radiated Emission Measurement (18 GHz ~ 40 GHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	2.82dB
---	--------

----- THE END -----



Appendix A. Test Results of Conducted Test

Test Engineer :	Smile Wang	Temperature :	22~23°C
		Relative Humidity :	40~42%

Conducted Output Power(Average power) and ERP

LTE Band 5:

BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Middle Ch. / Freq.	Power High Ch. / Freq.	ERP(W)		
Channel				20450	20525	20600			
Frequency (MHz)				829	836.5	844	L	M	H
10	QPSK	1	0	22.74	22.84	22.79	0.0574	0.0587	0.0581
10	QPSK	1	49	22.80	22.83	22.74	0.0582	0.0586	0.0574
10	QPSK	50	0	21.85	21.96	21.90	0.0468	0.0480	0.0473
10	16QAM	1	0	22.22	22.21	22.23	0.0509	0.0508	0.0511
10	64QAM	1	0	20.92	20.94	20.87	0.0378	0.0379	0.0373
10	256QAM	1	0	17.83	17.69	17.82	0.0185	0.0179	0.0185
Channel				20425	20525	20625	ERP(W)		
Frequency (MHz)				826.5	836.5	846.5	L	M	H
5	QPSK	1	0	22.54	22.62	22.56	0.0548	0.0558	0.0551
5	16QAM	1	0	22.08	22.05	21.98	0.0493	0.0490	0.0482
Channel				20415	20525	20635	ERP(W)		
Frequency (MHz)				825.5	836.5	847.5	L	M	H
3	QPSK	1	0	22.60	22.67	22.59	0.0556	0.0565	0.0555
3	16QAM	1	0	22.09	22.09	22.00	0.0494	0.0494	0.0484
Channel				20407	20525	20643	ERP(W)		
Frequency (MHz)				824.7	836.5	848.3	L	M	H
1.4	QPSK	1	0	22.47	22.61	22.43	0.0540	0.0557	0.0535
1.4	16QAM	1	0	21.62	21.42	21.46	0.0444	0.0424	0.0428

LTE Band 13:

BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Middle Ch. / Freq.	Power High Ch. / Freq.	ERP(W)		
Channel				23230					
Frequency (MHz)				782				M	
10	QPSK	1	0	22.67	22.78	22.65	0.0711	0.0729	0.0708
10	QPSK	1	49	22.68	22.77	22.65	0.0713	0.0728	0.0708
10	QPSK	50	0	21.79	21.94	21.76	0.0581	0.0601	0.0577
10	16QAM	1	0	22.20	22.14	22.22	0.0638	0.0630	0.0641
10	64QAM	1	0	20.84	20.86	20.87	0.0467	0.0469	0.0470
10	256QAM	1	0	17.70	17.66	17.80	0.0226	0.0224	0.0232
Channel				23205	23230	23255	ERP(W)		
Frequency (MHz)				779.5	782	784.5	L	M	H
5	QPSK	1	0	22.60	22.67	22.60	0.0700	0.0711	0.0700
5	16QAM	1	0	22.11	22.07	22.12	0.0625	0.0619	0.0627



LTE Band 17:

BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Middle Ch. / Freq.	Power High Ch. / Freq.	ERP(W)		
Channel				23780	23790	23800			
Frequency (MHz)				709	710	711	L	M	H
10	QPSK	1	0	22.70	22.75	22.68	0.0638	0.0646	0.0635
10	QPSK	1	49	22.73	22.73	22.61	0.0643	0.0643	0.0625
10	QPSK	50	0	21.80	21.91	21.89	0.0519	0.0532	0.0530
10	16QAM	1	0	22.19	22.16	22.10	0.0568	0.0564	0.0556
10	64QAM	1	0	20.89	20.83	20.80	0.0421	0.0415	0.0412
10	256QAM	1	0	17.76	17.54	17.74	0.0205	0.0195	0.0204
Channel				23755	23790	23825	ERP(W)		
Frequency (MHz)				706.5	710	713.5	L	M	H
5	QPSK	1	0	22.63	22.69	22.66	0.0628	0.0637	0.0632
5	16QAM	1	0	21.97	22.02	22.12	0.0540	0.0546	0.0558

LTE Band 26:

BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Low Ch. / Freq.	Power Middle Ch. / Freq.	Power High Ch. / Freq.	ERP(W)			
Channel				26790	26865	26915	26965				
Frequency (MHz)				824	831.5	836.5	841.5	Straddle Ch	L	M	H
15	QPSK	1	0	23.02	23.04	23.95	22.89	0.0612	0.0615	0.0759	0.0594
15	QPSK	1	74	22.95	22.93	22.87	22.84	0.0603	0.0600	0.0592	0.0587
15	QPSK	75	0	22.09	22.14	21.97	21.99	0.0494	0.0500	0.0481	0.0483
15	16QAM	1	0	22.21	22.34	22.37	22.41	0.0508	0.0524	0.0527	0.0532
15	64QAM	1	0	21.15	21.11	20.97	20.93	0.0398	0.0394	0.0382	0.0378
15	256QAM	1	0	17.84	17.76	17.96	17.98	0.0186	0.0182	0.0191	0.0192
Channel				26790	26840	26915	26990	ERP(W)			
Frequency (MHz)				824	829	836.5	844	Straddle Ch	L	M	H
10	QPSK	1	0	22.75	22.74	22.71	22.73	0.0575	0.0574	0.0570	0.0573
10	16QAM	1	0	22.03	22.06	22.07	22.23	0.0488	0.0491	0.0492	0.0511
Channel				26790	26815	26915	27015	ERP(W)			
Frequency (MHz)				824	826.5	836.5	846.5	Straddle Ch	L	M	H
5	QPSK	1	0	22.75	22.80	22.69	22.65	0.0575	0.0582	0.0568	0.0562
5	16QAM	1	0	22.13	22.21	22.18	22.12	0.0499	0.0508	0.0505	0.0498
Channel				26790	26815	26915	27025	ERP(W)			
Frequency (MHz)				824	825.5	836.5	847.5	Straddle Ch	L	M	H
3	QPSK	1	0	22.85	22.82	22.72	22.70	0.0589	0.0585	0.0571	0.0569
3	16QAM	1	0	22.13	22.10	22.14	22.08	0.0499	0.0495	0.0500	0.0493
Channel				26790	26797	26915	27033	ERP(W)			
Frequency (MHz)				824	824.7	836.5	848.3	Straddle Ch	L	M	H
1.4	QPSK	1	0	22.73	22.76	22.74	22.67	0.0573	0.0577	0.0574	0.0565
1.4	16QAM	1	0	21.67	21.66	21.72	21.69	0.0449	0.0448	0.0454	0.0451



LTE Band 71:

BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Middle Ch. / Freq.	Power High Ch. / Freq.	ERP(W)		
Channel				133222	133322	133372			
Frequency (MHz)				673	683	688	L	M	H
20	QPSK	1	0	22.82	22.98	22.96	0.0736	0.0764	0.0760
20	QPSK	1	99	22.91	22.89	22.90	0.0752	0.0748	0.0750
20	QPSK	100	0	21.92	22.07	21.97	0.0598	0.0619	0.0605
20	16QAM	1	0	22.38	22.36	22.34	0.0665	0.0662	0.0659
20	64QAM	1	0	21.01	21.06	20.95	0.0485	0.0491	0.0479
20	256QAM	1	0	18.02	17.86	18.00	0.0244	0.0235	0.0243
Channel				133197	133297	133397	EIRP(W)		
Frequency (MHz)				670.5	680.5	690.5	L	M	H
15	QPSK	1	0	22.73	22.69	22.75	0.0721	0.0714	0.0724
15	16QAM	1	0	22.16	22.12	22.19	0.0632	0.0627	0.0637
Channel				133172	133272	133422	EIRP(W)		
Frequency (MHz)				668	678	693	L	M	H
10	QPSK	1	0	22.74	22.77	22.73	0.0723	0.0728	0.0721
10	16QAM	1	0	22.08	22.13	22.17	0.0621	0.0628	0.0634
Channel				133147	133247	133447	EIRP(W)		
Frequency (MHz)				665.5	675.5	695.5	L	M	H
5	QPSK	1	0	22.70	22.78	22.75	0.0716	0.0729	0.0724
5	16QAM	1	0	22.20	22.15	22.14	0.0638	0.0631	0.0630

LTE CA_5B:

Combination 10MHz+10MHz (50RB+50RB)							
Channel	Modulation	PCC		SCC		Measured Power	ERP(W)
		RB Size	RB offset	RB Size	RB offset		
L	QPSK	1	Max	1	0	22.84	0.0587
M	QPSK	1	Max	1	0	22.81	0.0583
H	QPSK	1	Max	1	0	22.74	0.0574
L	16QAM	1	Max	1	0	22.22	0.0509
M	16QAM	1	Max	1	0	22.15	0.0501
H	16QAM	1	Max	1	0	22.24	0.0512
L	64QAM	1	Max	1	0	20.94	0.0379
M	64QAM	1	Max	1	0	20.89	0.0375
H	64QAM	1	Max	1	0	20.90	0.0376
L	256QAM	1	Max	1	0	17.82	0.0185
M	256QAM	1	Max	1	0	17.79	0.0184
H	256QAM	1	Max	1	0	17.91	0.0189
Combination 10MHz+5MHz (50RB+25RB)							
Channel	Modulation	PCC		SCC		Measured Power	ERP(W)
		RB Size	RB offset	RB Size	RB offset		
L	QPSK	1	Max	1	0	22.81	0.0583
H	16QAM	1	Max	1	0	22.02	0.0486
Combination 5MHz+10MHz (25RB+50RB)							
Channel	Modulation	PCC		SCC		Measured Power	ERP(W)
		RB Size	RB offset	RB Size	RB offset		




L	QPSK	1	Max	1	0	22.80	0.0582
H	16QAM	1	Max	1	0	22.15	0.0501
Combination 5MHz+3MHz (25RB+15RB)							
Channel	Modulation	PCC		SCC		Measured Power	ERP(W)
		RB Size	RB offset	RB Size	RB offset		
L	QPSK	1	Max	1	0	22.78	0.0579
H	16QAM	1	Max	1	0	22.21	0.0508
Combination 3MHz+5MHz (15RB+25RB)							
Channel	Modulation	PCC		SCC		Measured Power	ERP(W)
		RB Size	RB offset	RB Size	RB offset		
L	QPSK	1	Max	1	0	22.83	0.0586
H	16QAM	1	Max	1	0	22.20	0.0507



LTE Band 13


Peak-to-Average Ratio

Mode	LTE Band 13 / 10MHz				
Mod.	QPSK	16QAM	64QAM	256QAM	Limit: 13dB
RB Size	Full RB	Full RB	Full RB	Full RB	Result
Middle CH	4.96	5.86	6.67	6.49	PASS

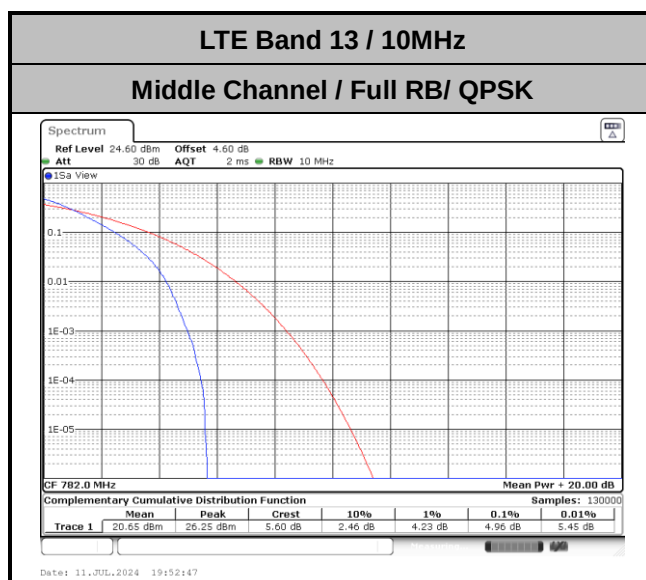





Middle Channel / Full RB/ 16QAM

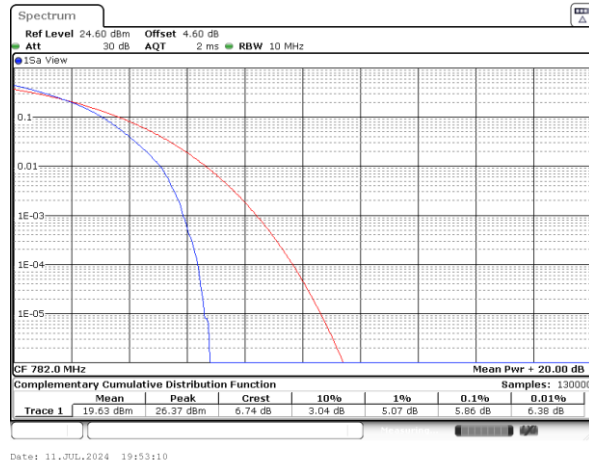

Middle Channel / Full RB/ 64QAM




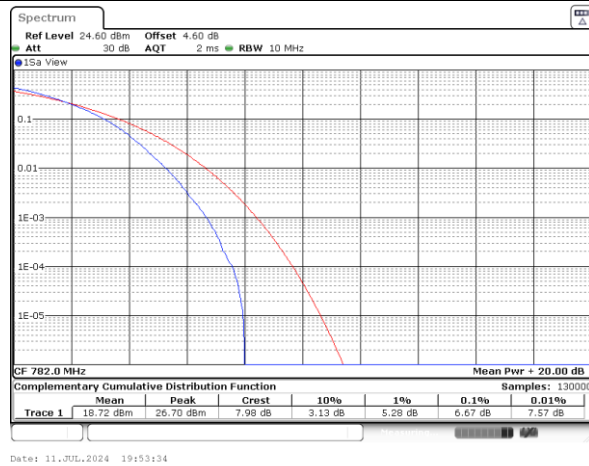


Middle Channel / Full RB/ 256QAM

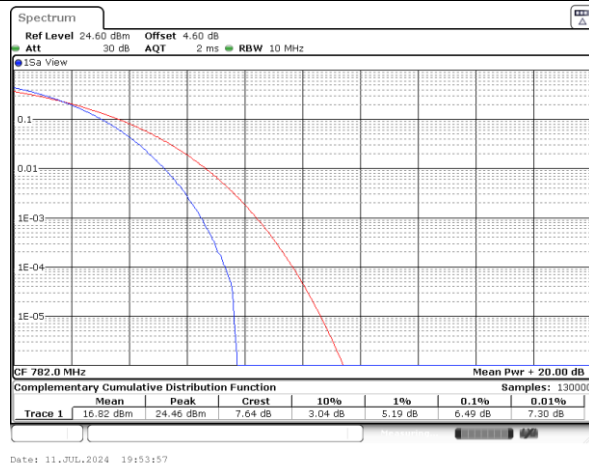


**26dB Bandwidth**

Mode	LTE Band 13 : 26dB BW(MHz)	
BW	5MHz	
Mod.	QPSK	16QAM
Middle CH	4.90	4.79
BW	10MHz	
Mod.	QPSK	16QAM
Middle CH	9.69	9.91

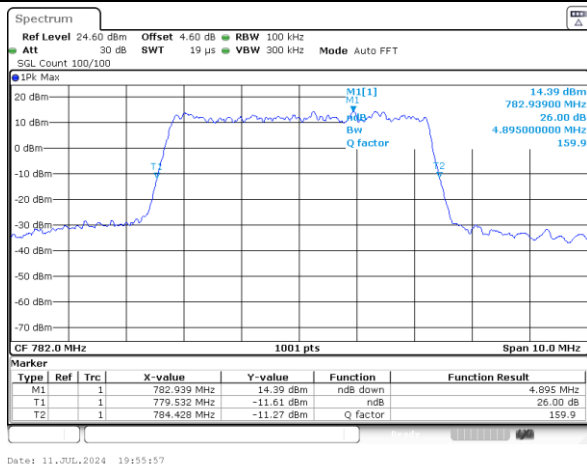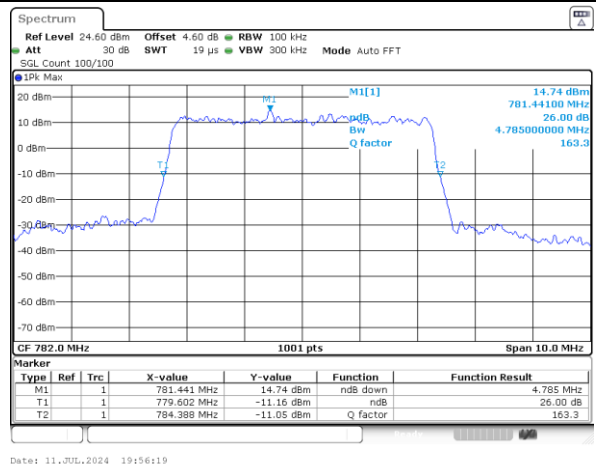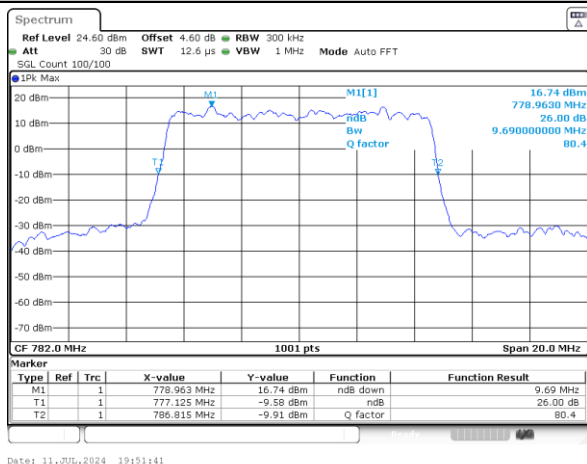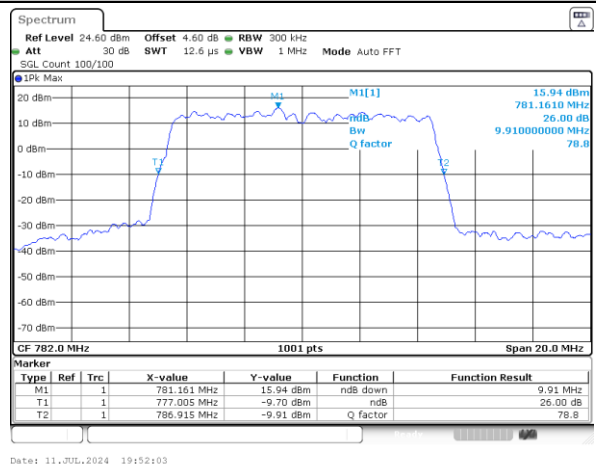LTE Band 13**Middle Channel / 5MHz / QPSK****Middle Channel / 5MHz / 16QAM****LTE Band 13****Middle Channel / 10MHz / QPSK****Middle Channel / 10MHz / 16QAM**

Occupied Bandwidth

Mode	LTE Band 13 : 99%OBW(MHz)	
BW	5MHz	
Mod.	QPSK	16QAM
Middle CH	4.48	4.48
BW	10MHz	
Mod.	QPSK	16QAM
Middle CH	8.99	8.99

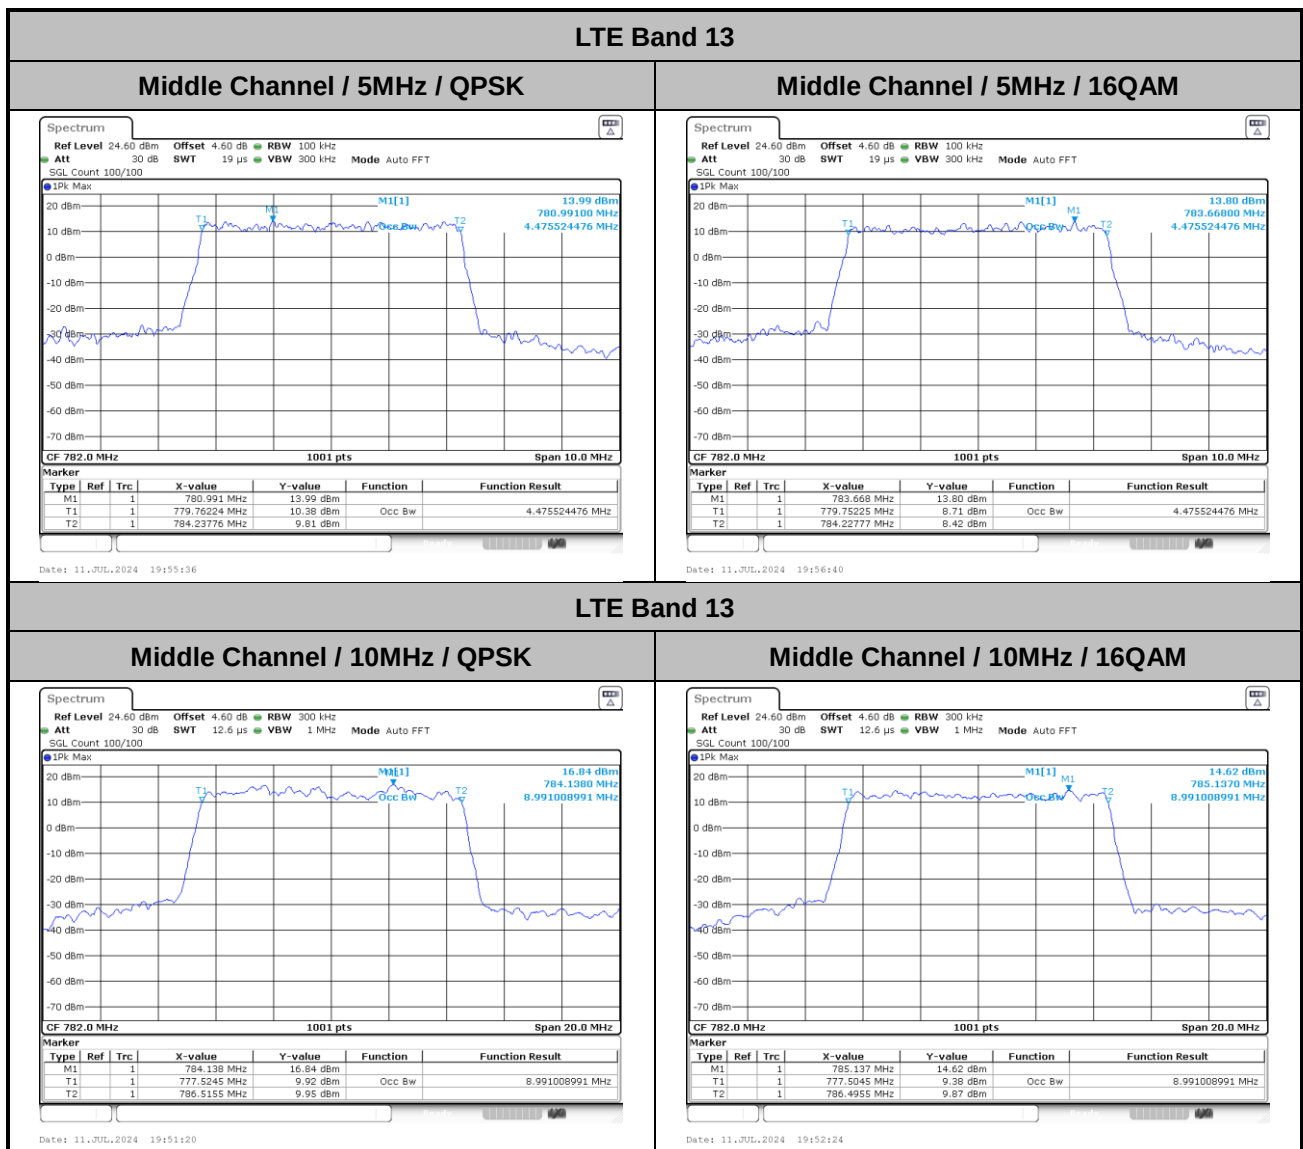





Conducted Band Edge

LTE Band 13 / 5MHz / QPSK


Lowest Band Edge / 1 RB

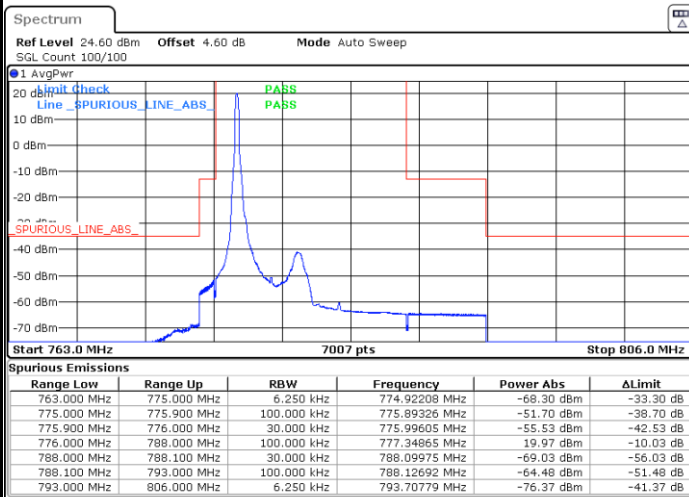


Highest Band Edge / 1 RB

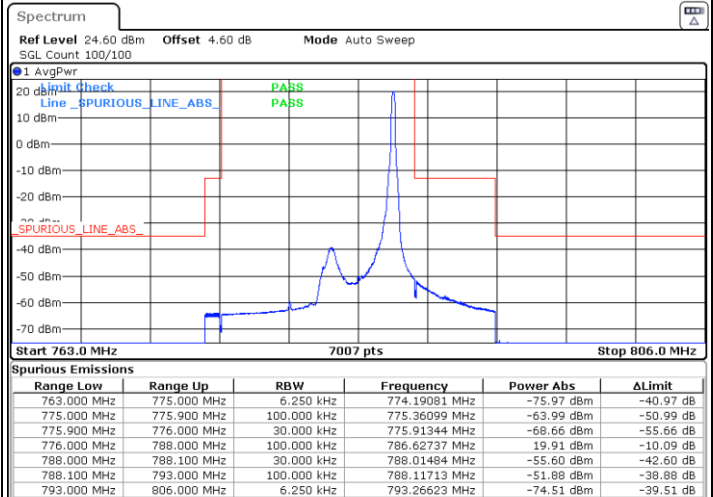

Lowest Band Edge / Full RB

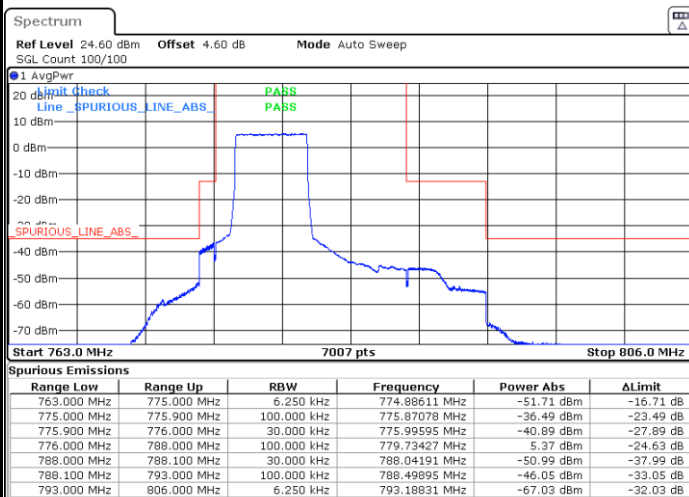


Highest Band Edge / Full RB

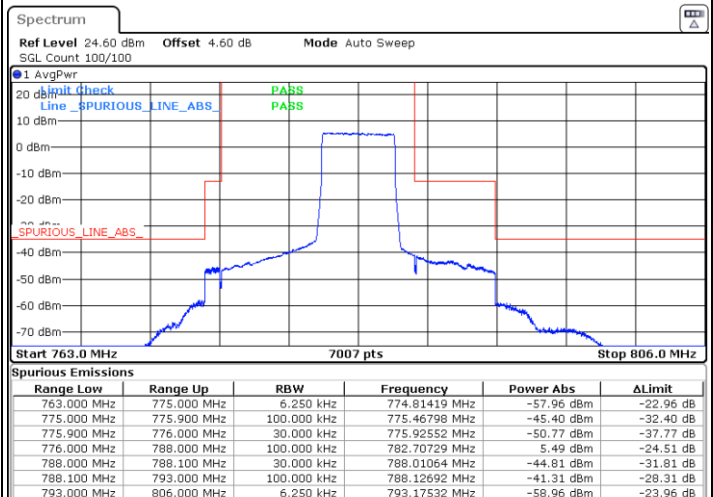




LTE Band 13 / 5MHz / 16QAM

Lowest Band Edge / 1RB

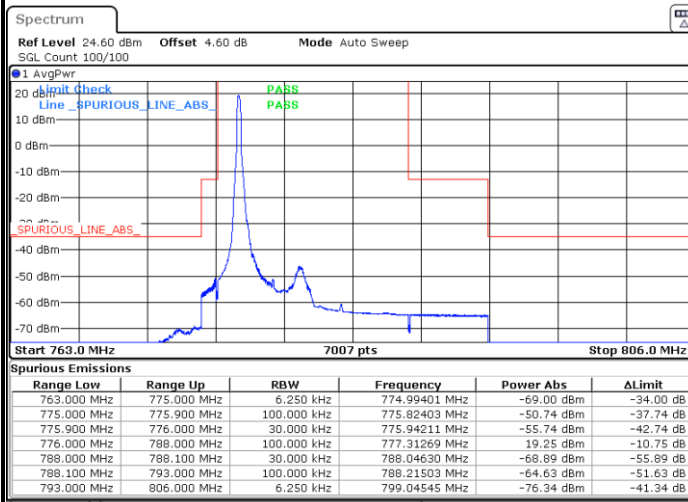


Date: 11.JUL.2024 18:57:25

Highest Band Edge / 1 RB

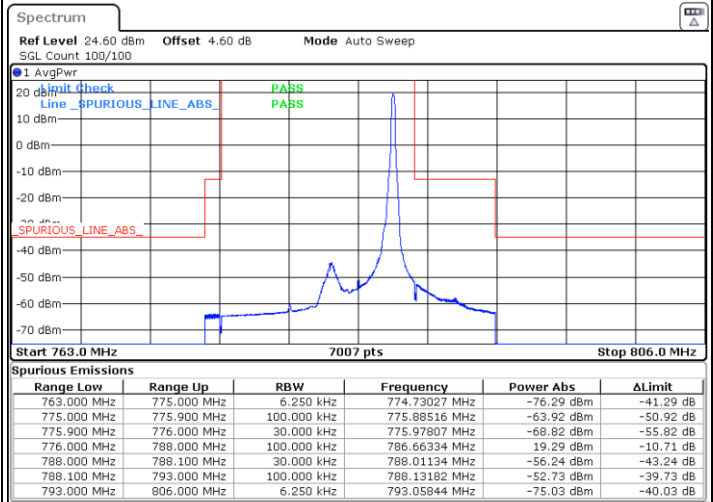


Date: 11.JUL.2024 19:16:18

Lowest Band Edge / Full RB

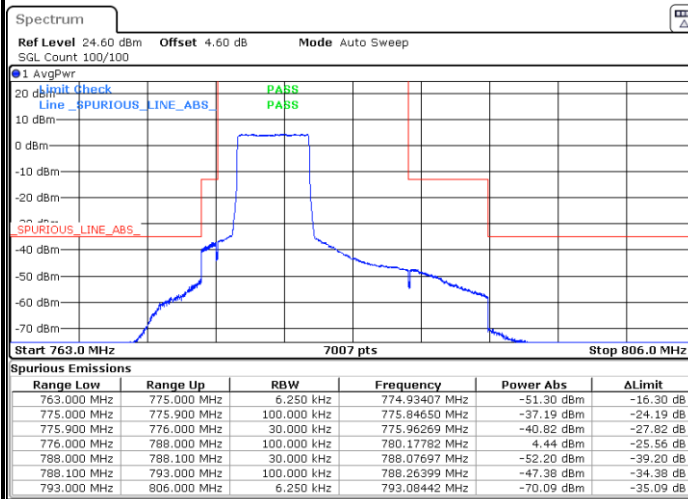

Date: 11.JUL.2024 19:04:52

Highest Band Edge / Full RB

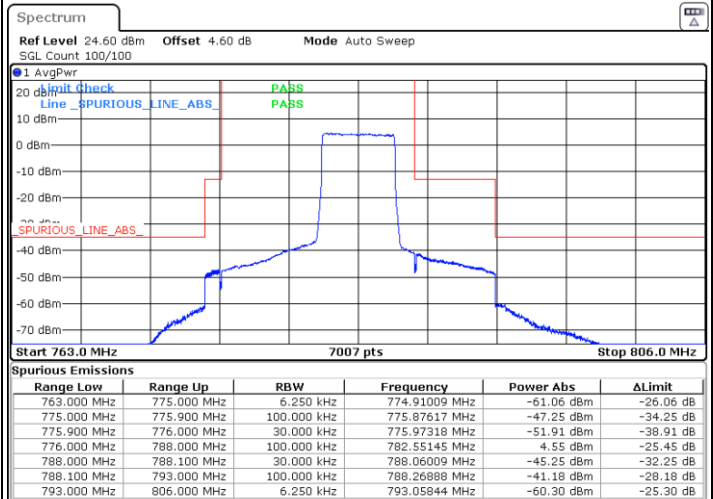


Date: 11.JUL.2024 19:23:45




LTE Band 13 / 5MHz / 64QAM

Lowest Band Edge / 1RB

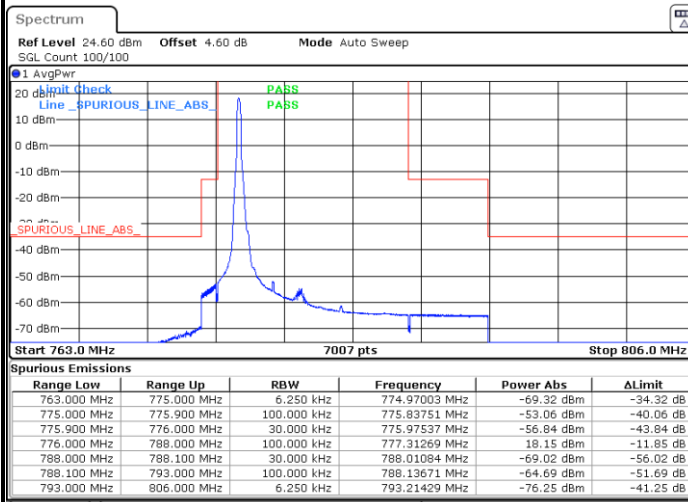


Date: 11.JUL.2024 18:59:16

Highest Band Edge / 1 RB

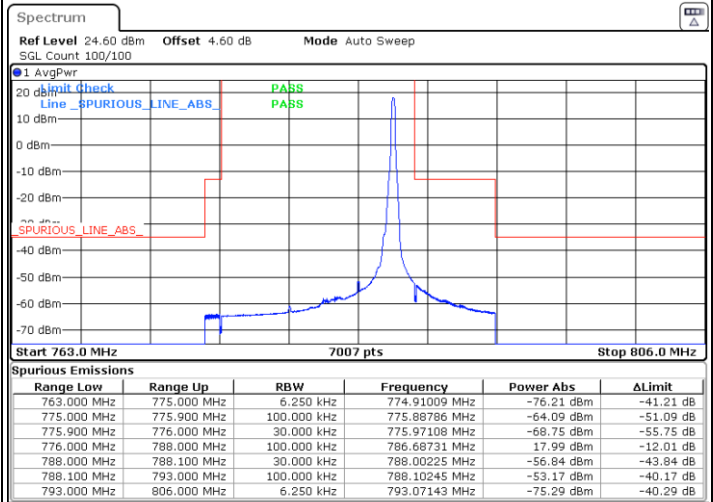


Date: 11.JUL.2024 19:18:09

Lowest Band Edge / Full RB

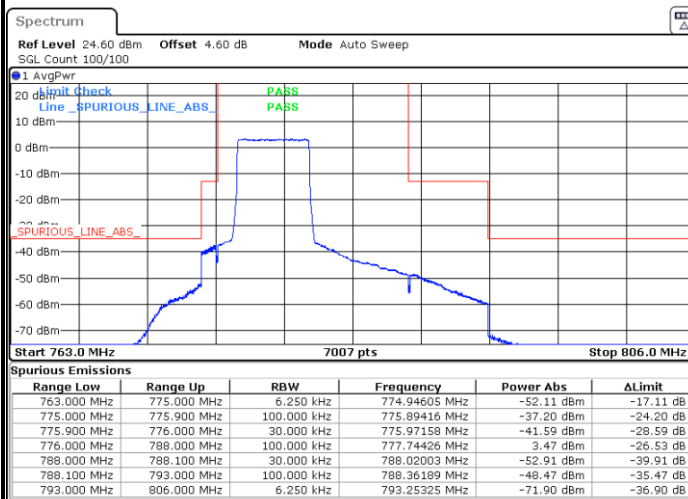

Date: 11.JUL.2024 19:06:43

Highest Band Edge / Full RB

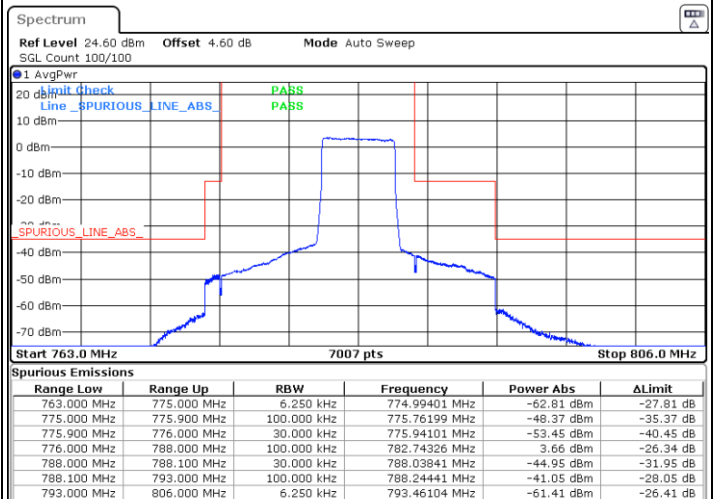


Date: 11.JUL.2024 19:25:36




LTE Band 13 / 5MHz / 256QAM


Lowest Band Edge / 1RB

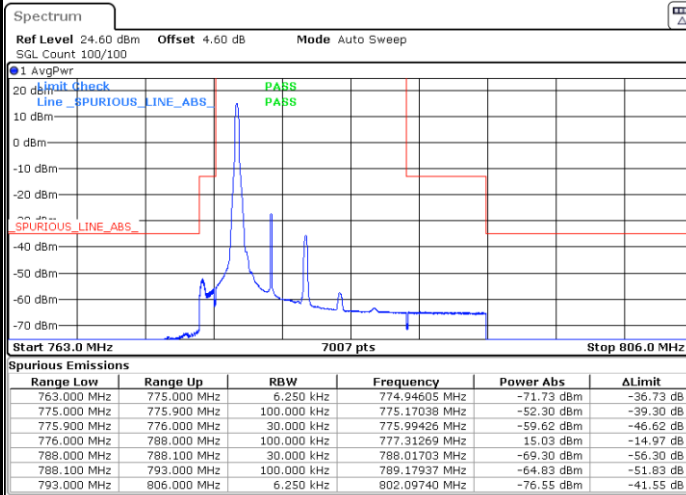


Highest Band Edge / 1 RB

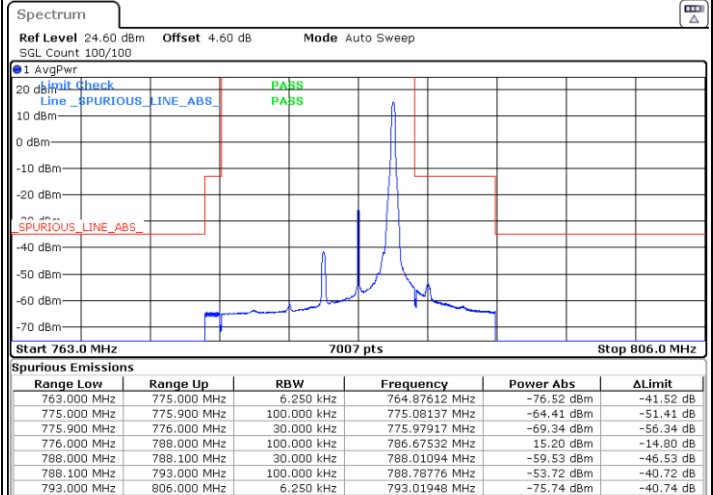

Lowest Band Edge / Full RB

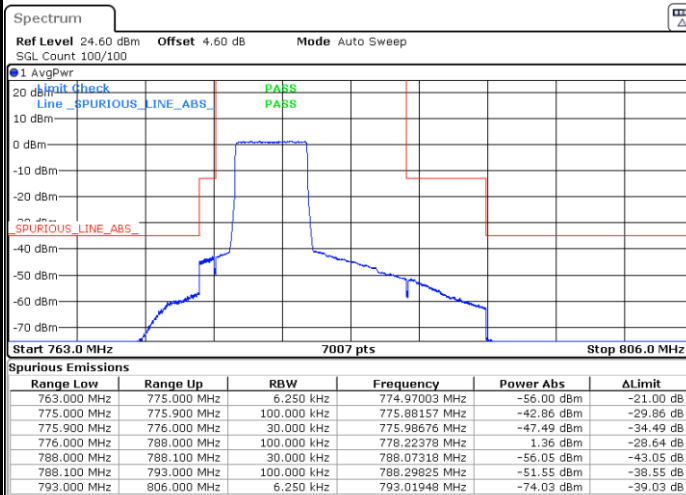


Highest Band Edge / Full RB

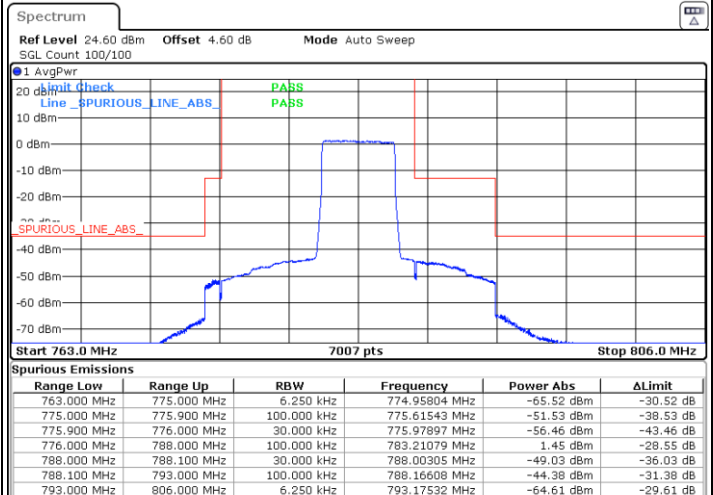




LTE Band 13 / 10MHz / QPSK

middle Band Edge / 1 RB

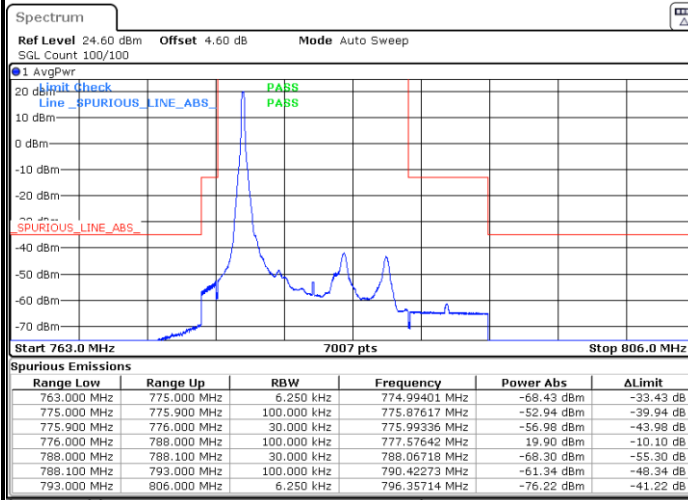


Date: 11.JUL.2024 19:30:43

middle Band Edge / 1 RB

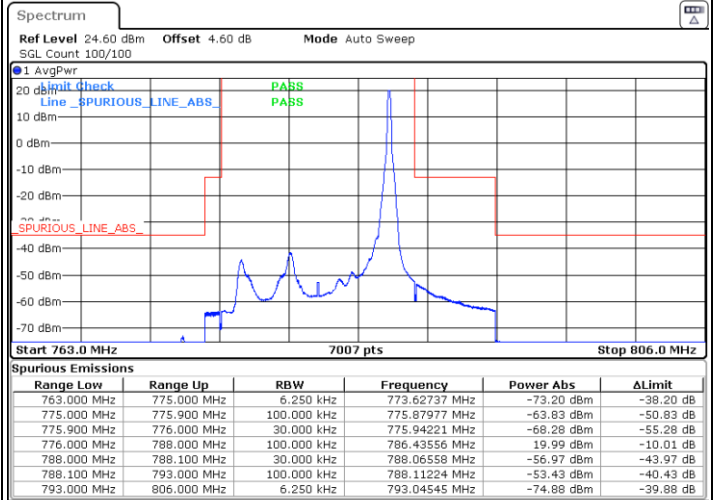

Date: 11.JUL.2024 19:45:26

Middle Band Edge / Full RB

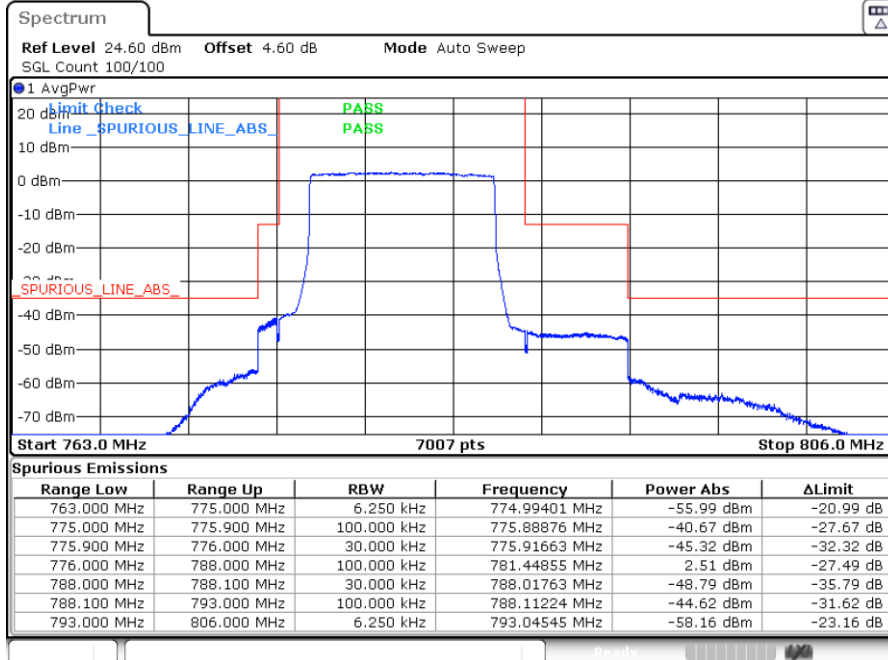


Date: 11.JUL.2024 19:38:04




LTE Band 13 / 10MHz / 16QAM

middle Band Edge / 1 RB

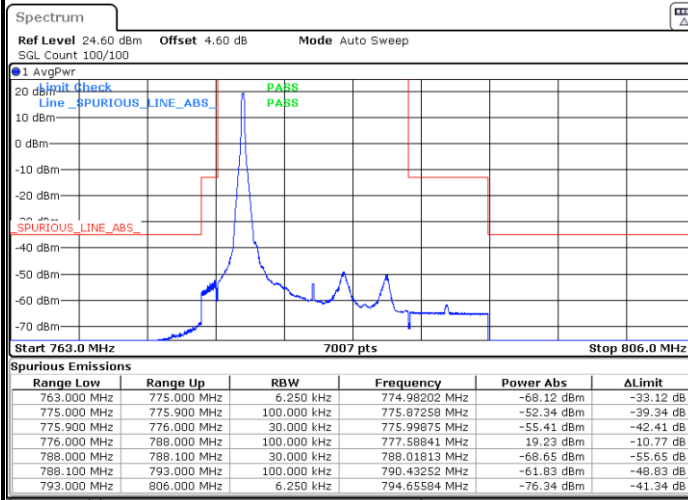


Date: 11.JUL.2024 19:32:33

middle Band Edge / 1 RB

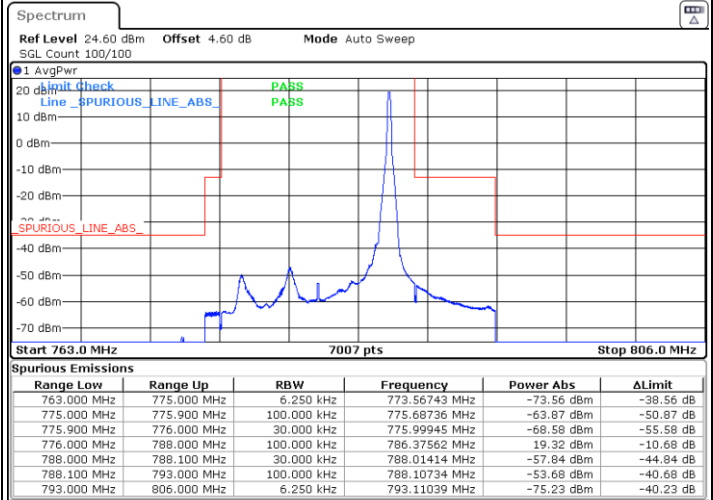

Date: 11.JUL.2024 19:47:16

middle Band Edge / Full RB

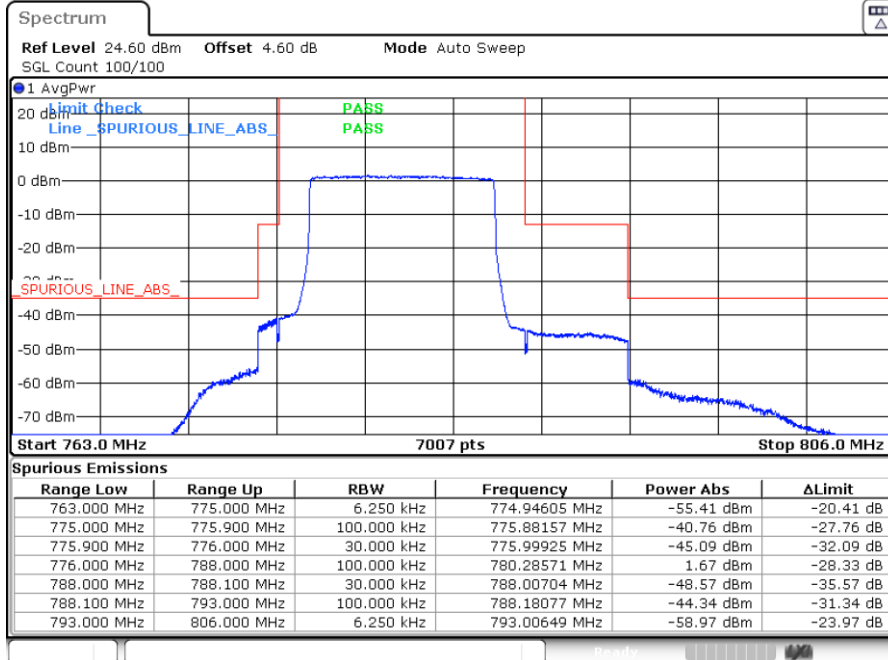


Date: 11.JUL.2024 19:39:54




LTE Band 13 / 10MHz / 64QAM

middle Band Edge / 1 RB

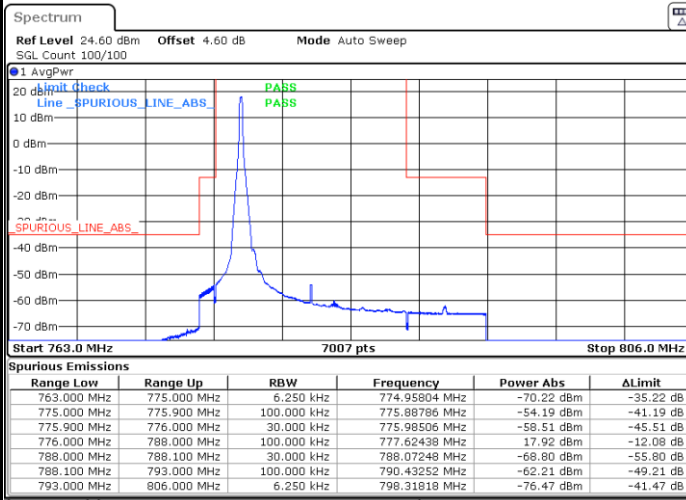


Date: 11.JUL.2024 19:34:24

middle Band Edge / 1 RB

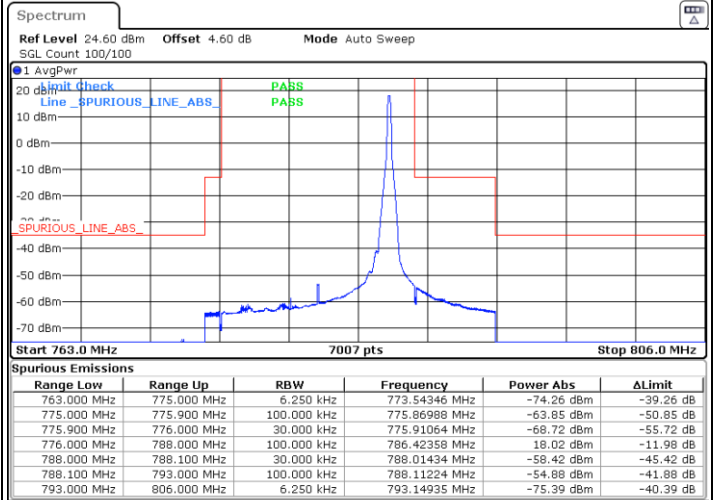

Date: 11.JUL.2024 19:49:06

middle Band Edge / Full RB

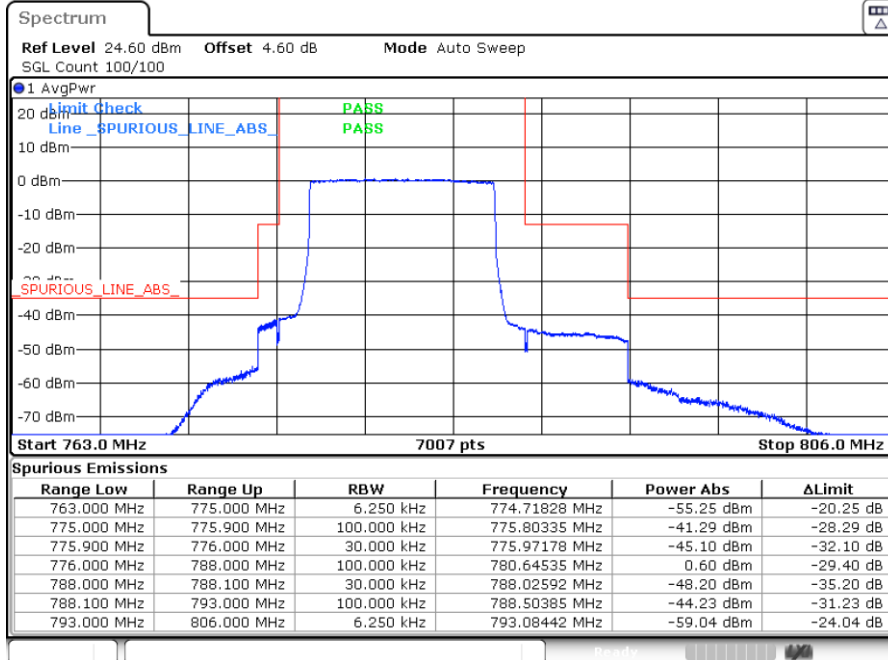


Date: 11.JUL.2024 19:41:44




LTE Band 13 / 10MHz / 256QAM


middle Band Edge / 1 RB

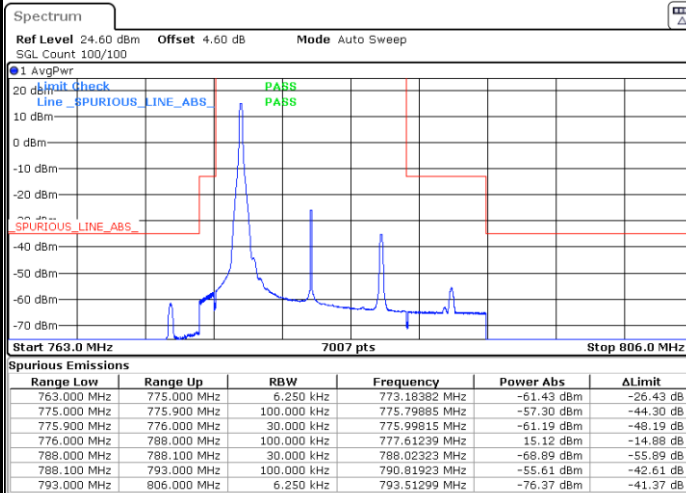

middle Band Edge / 1 RB

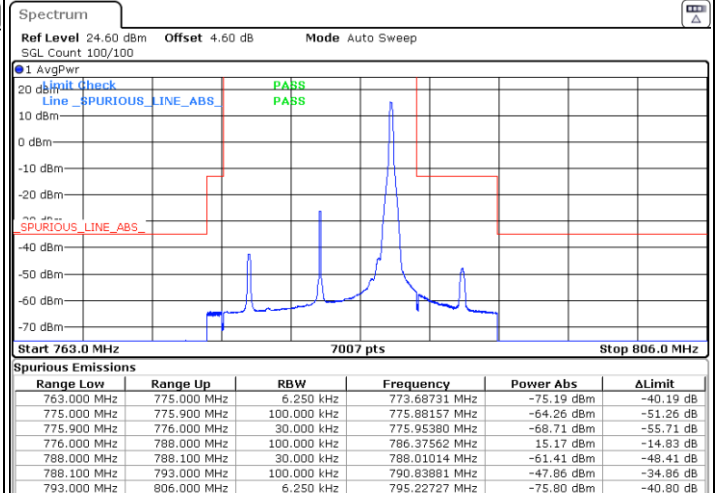

middle Band Edge / Full RB

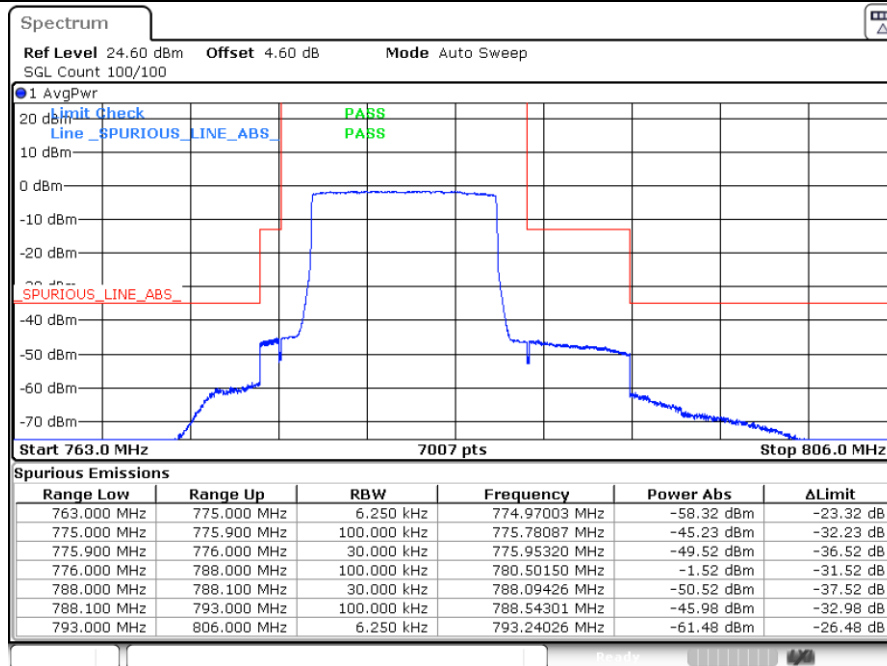




Conducted Spurious Emission


LTE Band 13 / 5MHz

Lowest Channel / QPSK

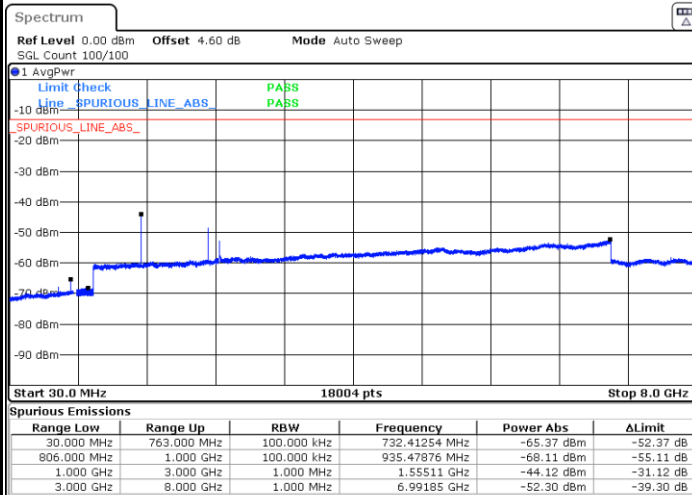


Date: 11.JUL.2024 18:53:43

Middle Channel / QPSK

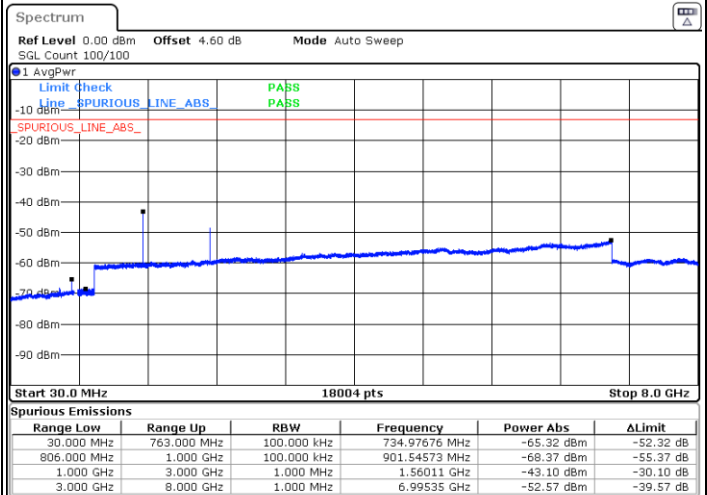

Date: 11.JUL.2024 19:11:12

Highest Channel / QPSK

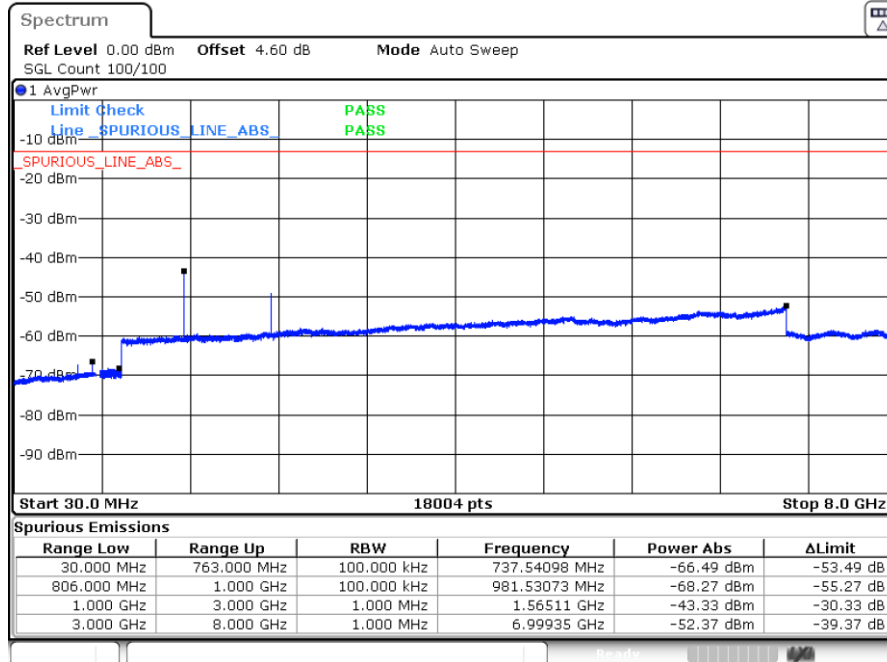


Date: 11.JUL.2024 19:12:35



LTE Band 13 / 10MHz

Middle Channel / QPSK

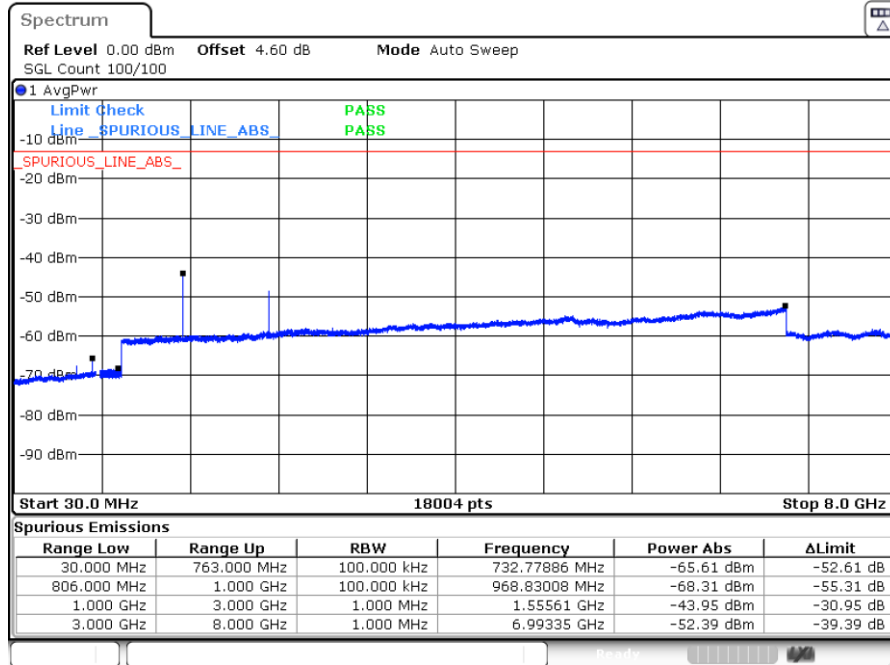

Date: 11.JUL.2024 19:28:52

Frequency Stability

Test Conditions		LTE Band 13 (QPSK) / Middle Channel	Limit
Temperature (°C)	Voltage (Volt)	BW 10MHz	Note 2.
		Deviation (ppm)	Result
50	Normal Voltage	0.0021	PASS
40	Normal Voltage	0.0034	
30	Normal Voltage	0.0022	
20(Ref.)	Normal Voltage	0.0000	
10	Normal Voltage	0.0053	
0	Normal Voltage	0.0008	
-10	Normal Voltage	0.0017	
-20	Normal Voltage	0.0019	
-30	Normal Voltage	0.0063	
20	Maximum Voltage	0.0067	
20	Normal Voltage	0.0000	
20	Battery End Point	0.0046	

Note:


1. Normal Voltage =3.85 V. ; Minimum Voltage =3.5 V. ; Maximum Voltage =4.41 V.
2. Note: The frequency fundamental emissions stay within the authorized frequency block.




LTE Band 17

Peak-to-Average Ratio





Mode	LTE Band 17 / 10MHz				
Mod.	QPSK	16QAM	64QAM	256QAM	Limit: 13dB
RB Size	Full RB	Full RB	Full RB	Full RB	Result
Middle CH	5.10	6.09	6.81	6.87	PASS

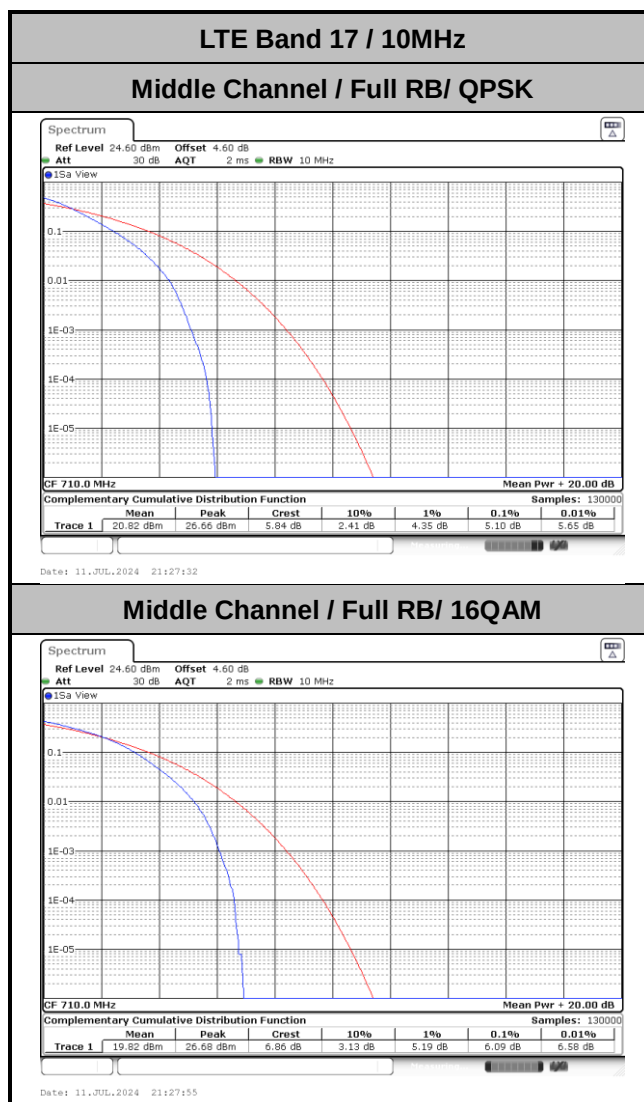

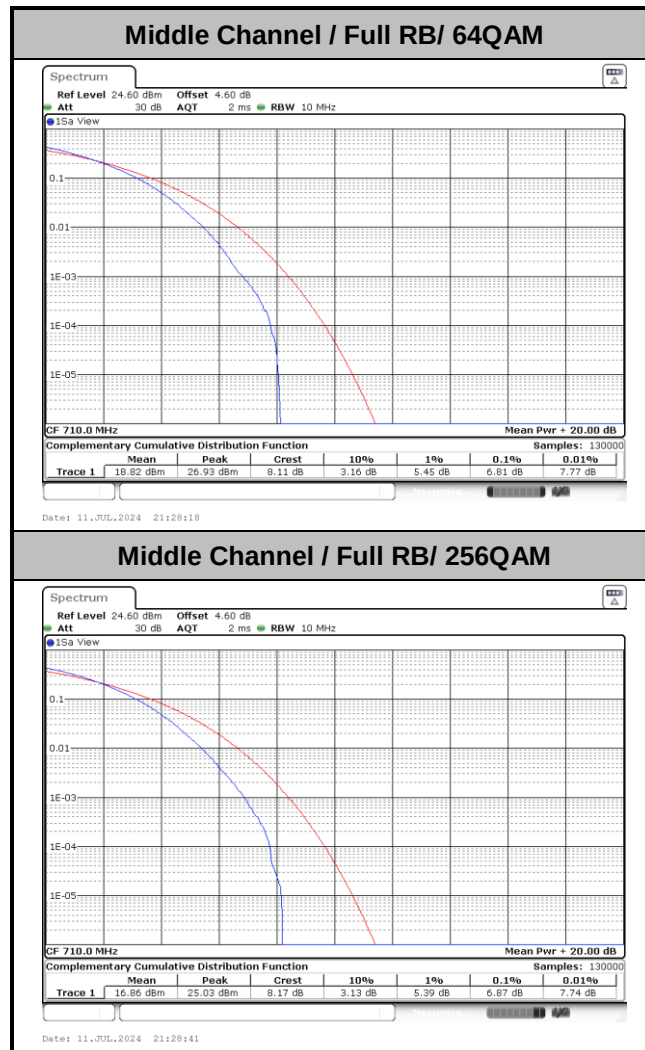

**26dB Bandwidth**


Mode	LTE Band 17 : 26dB BW(MHz)	
BW	5MHz	
Mod.	QPSK	16QAM
Middle CH	4.97	4.89
BW	10MHz	
Mod.	QPSK	16QAM
Middle CH	9.77	9.63

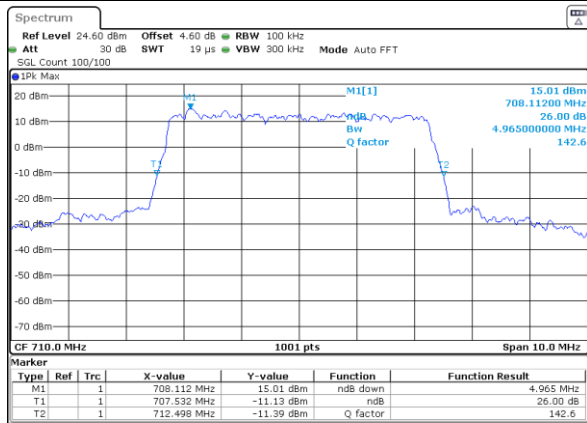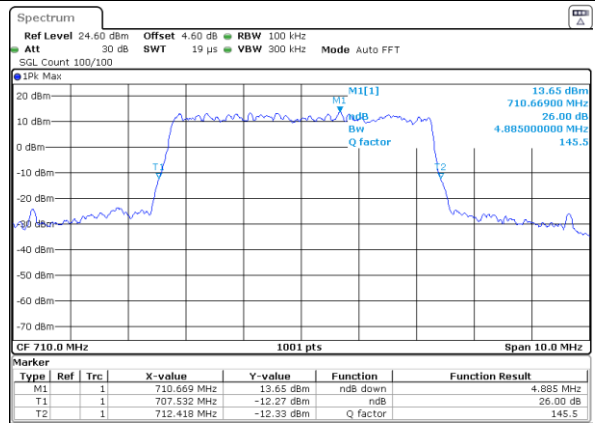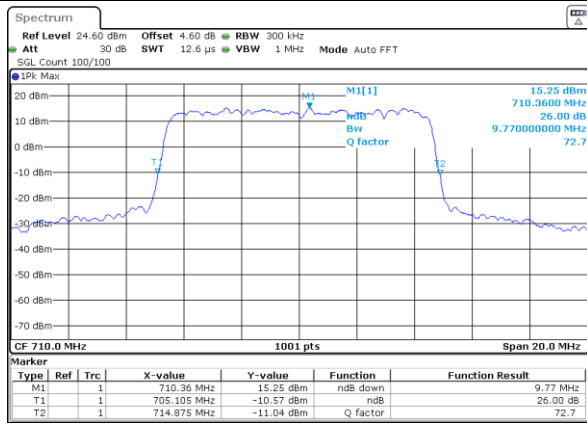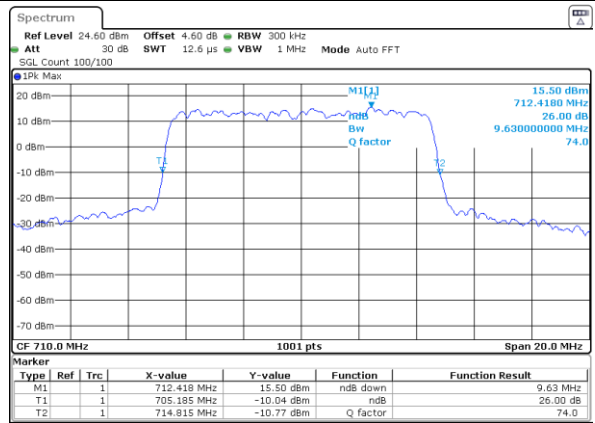LTE Band 17**Middle Channel / 5MHz / QPSK****Middle Channel / 5MHz / 16QAM****LTE Band 17****Middle Channel / 10MHz / QPSK****Middle Channel / 10MHz / 16QAM**



Occupied Bandwidth


Mode	LTE Band 17 : 99%OBW(MHz)	
BW	5MHz	
Mod.	QPSK	16QAM
Middle CH	4.49	4.50
BW	10MHz	
Mod.	QPSK	16QAM
Middle CH	9.15	9.03

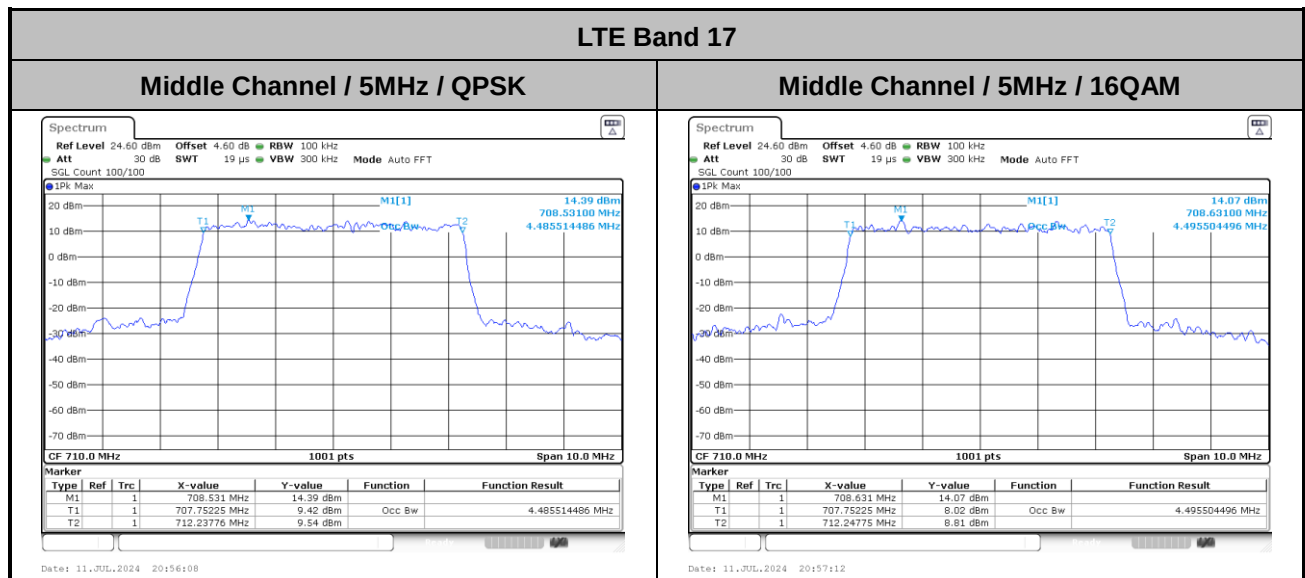




LTE Band 17

Middle Channel / 10MHz / QPSK

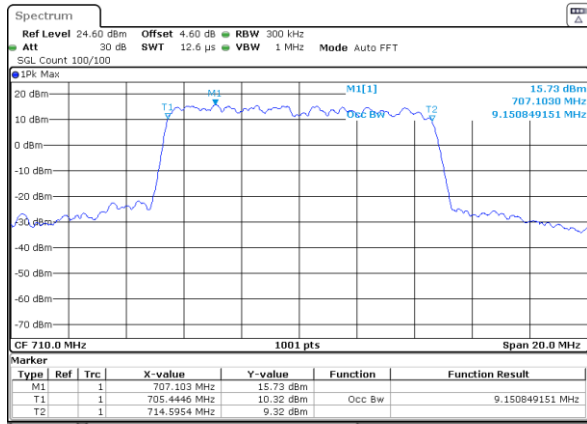

Middle Channel / 10MHz / 16QAM

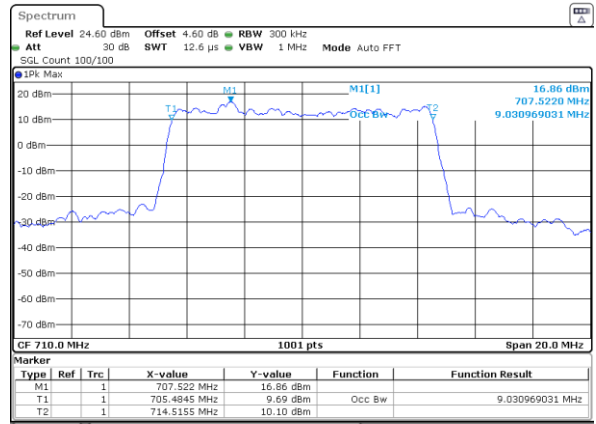





Conducted Band Edge

LTE Band 17 / 5MHz / QPSK


Lowest Band Edge / 1 RB

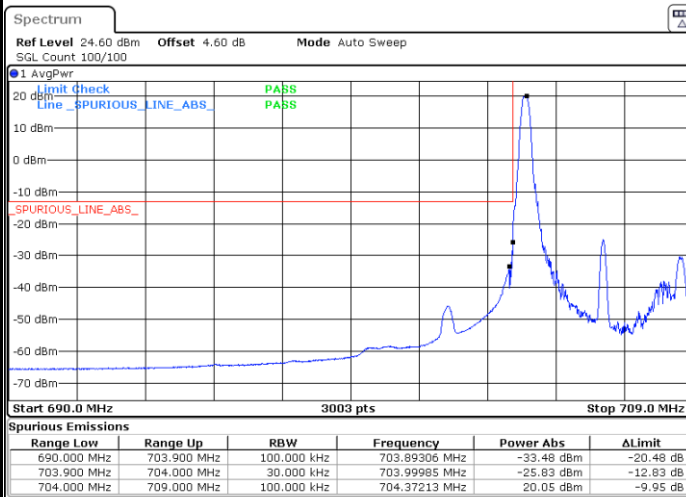

Highest Band Edge / 1 RB

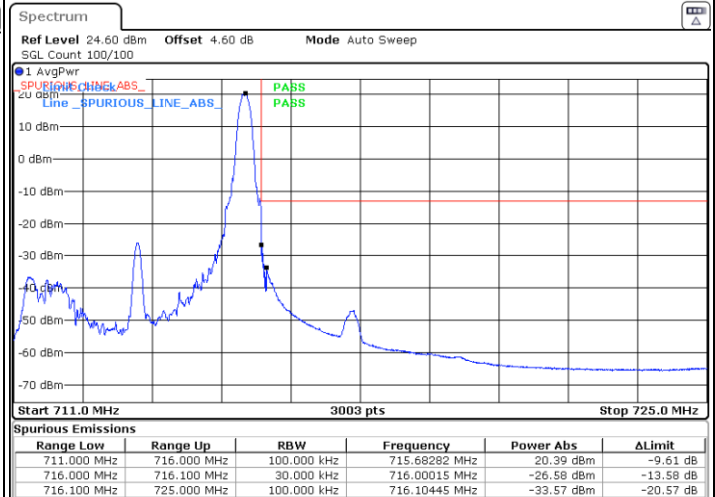

Lowest Band Edge / Full RB

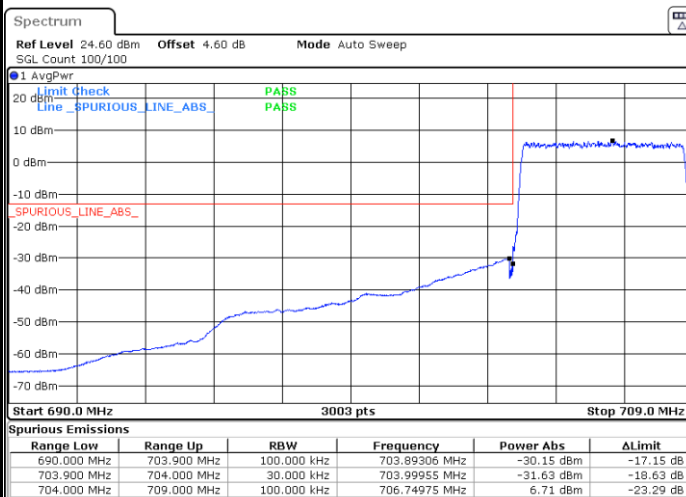

Highest Band Edge / Full RB

