

## #1\_WLAN2.4GHz\_802.11b 1Mbps\_Bottom Face\_0mm\_Ch1;Ant 2

Communication System: 802.11b; Frequency: 2412 MHz; Duty Cycle: 1:1

Medium: HSL\_2450\_190714 Medium parameters used:  $f = 2412$  MHz;  $\sigma = 1.698$  S/m;  $\epsilon_r = 40.212$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature : 23.5 °C ; Liquid Temperature : 22.5 °C

### DASY5 Configuration

- Probe: ES3DV3 - SN3169; ConvF(4.54, 4.54, 4.54) @ 2412 MHz; Calibrated: 2019/5/24
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn914; Calibrated: 2018/12/11
- Phantom: ELI v4.0; Type: QDOVA001BB; Serial: TP:1041
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

**Area Scan (91x51x1):** Interpolated grid: dx=1.200 mm, dy=1.200 mm

Maximum value of SAR (interpolated) = 1.78 W/kg


**Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 22.37 V/m; Power Drift = 0.12 dB

Peak SAR (extrapolated) = 3.13 W/kg

**SAR(1 g) = 1.13 W/kg; SAR(10 g) = 0.393 W/kg**

Maximum value of SAR (measured) = 1.69 W/kg

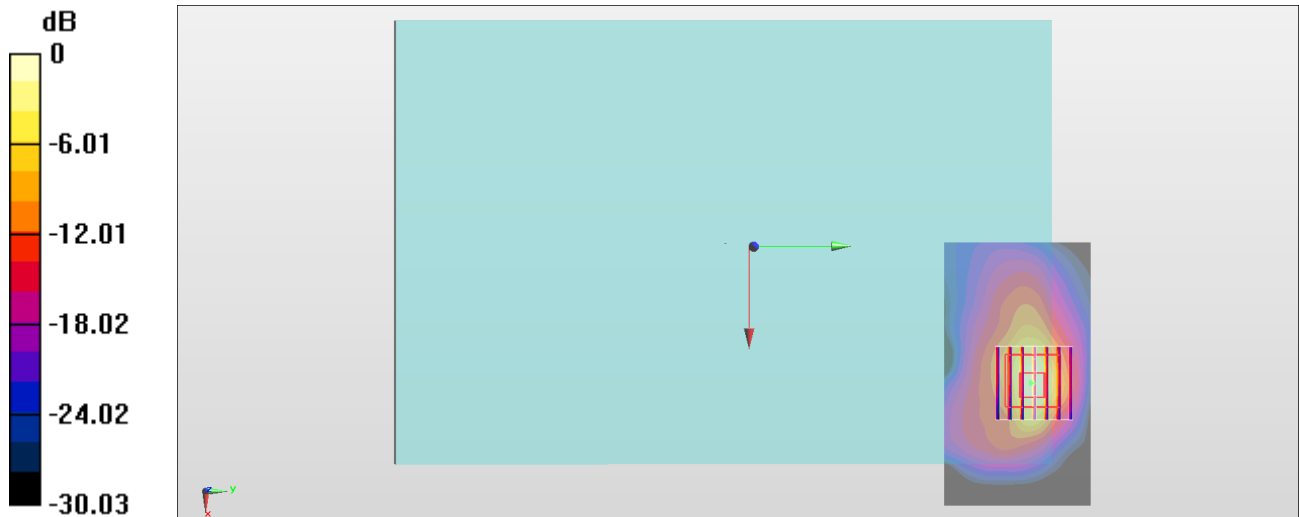

0 dB = 1.69 W/kg = 2.28 dBW/kg

## #2\_WLAN5GHz\_802.11ac-VHT80 MCS0\_Edge 2\_0mm\_Ch42;Ant 1

Communication System: 802.11ac; Frequency: 5210 MHz; Duty Cycle: 1:1.129

Medium: HSL\_5G\_190807 Medium parameters used :  $f = 5210$  MHz;  $\sigma = 4.592$  S/m;  $\epsilon_r = 37.648$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature : 23.3 °C ; Liquid Temperature : 22.3 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3642; ConvF(4.54, 4.54, 4.54) @ 5210 MHz; Calibrated: 2019/4/29
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn360; Calibrated: 2018/10/29
- Phantom: ELI V4.0-Right; Type: QD OVA 001 Bx; Serial: 1041
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7450)

**Area Scan (61x121x1):** Interpolated grid: dx=1.000 mm, dy=1.000 mm

Maximum value of SAR (interpolated) = 0.463 W/kg


**Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=4mm, dy=4mm, dz=1.4mm

Reference Value = 1.428 V/m; Power Drift = -0.17 dB

Peak SAR (extrapolated) = 5.17 W/kg

**SAR(1 g) = 0.997 W/kg; SAR(10 g) = 0.184 W/kg**

Maximum value of SAR (measured) = 3.03 W/kg

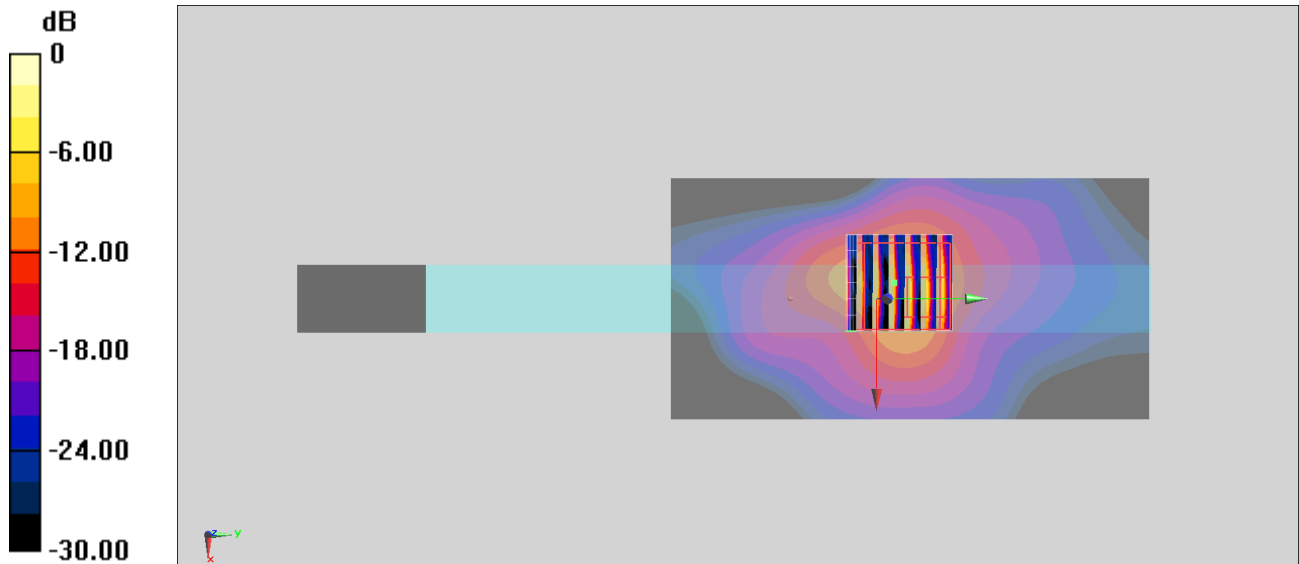

0 dB = 3.03 W/kg = 4.81 dBW/kg

**#3\_WLAN5GHz\_802.11n-HT40 MCS0\_Edge 2\_0mm\_Ch54;Ant 1**

Communication System: 802.11n ; Frequency: 5270 MHz;Duty Cycle: 1:1.068

Medium: HSL\_5G\_190710 Medium parameters used:  $f = 5270$  MHz;  $\sigma = 4.675$  S/m;  $\epsilon_r = 36.703$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature : 23.4 °C ; Liquid Temperature : 22.4 °C

**DASY5 Configuration**

- Probe: EX3DV4 - SN3898;ConvF(5.33, 5.33, 5.33) @ 5270 MHz;Calibrated: 2019/6/27
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn495; Calibrated: 2019/5/21
- Phantom: ELI v4.0; Type: QDOVA001BB; Serial: TP:1041
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

**Area Scan (61x121x1):** Interpolated grid: dx=1.000 mm, dy=1.000 mm

Maximum value of SAR (interpolated) = 0.615 W/kg


**Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=4mm, dy=4mm, dz=1.4mm

Reference Value = 20.20 V/m; Power Drift = -0.13 dB

Peak SAR (extrapolated) = 4.42 W/kg

**SAR(1 g) = 0.999 W/kg; SAR(10 g) = 0.209 W/kg**

Maximum value of SAR (measured) = 2.71 W/kg

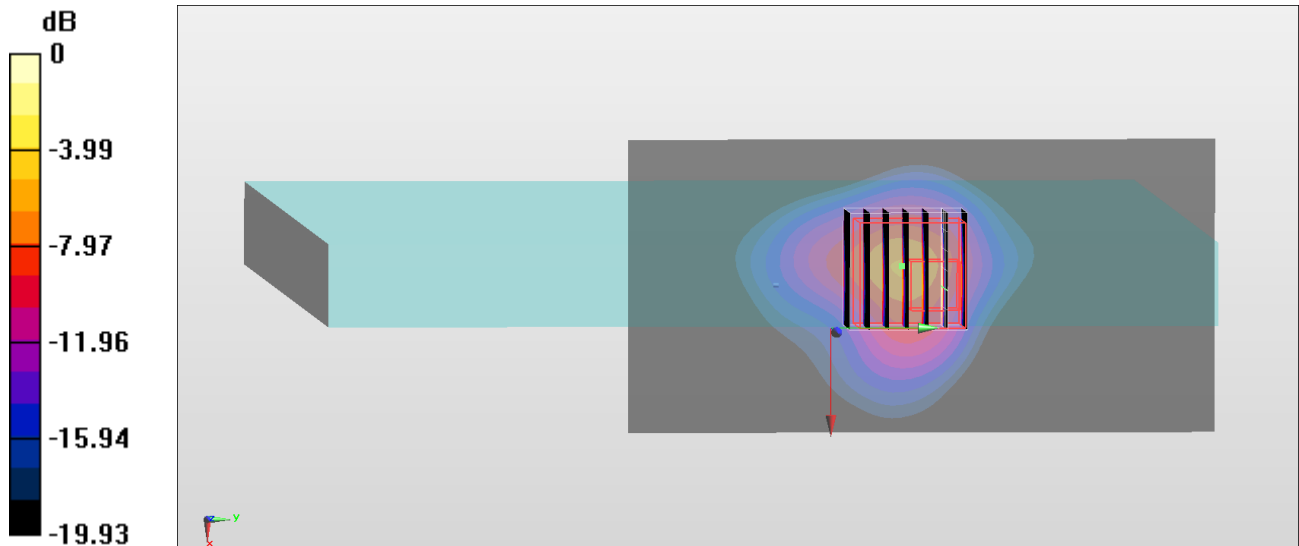

0 dB = 2.71 W/kg = 4.33 dBW/kg

**#4\_WLAN5GHz\_802.11ac-VHT80 MCS0\_Edge 2\_0mm\_Ch106;Ant 2**

Communication System: 802.11ac; Frequency: 5530 MHz; Duty Cycle: 1:1.13

Medium: HSL\_5G\_190710 Medium parameters used:  $f = 5530$  MHz;  $\sigma = 4.934$  S/m;  $\epsilon_r = 36.372$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature : 23.4 °C ; Liquid Temperature : 22.4 °C

**DASY5 Configuration**

- Probe: EX3DV4 - SN3898; ConvF(4.85, 4.85, 4.85) @ 5530 MHz; Calibrated: 2019/6/27
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn495; Calibrated: 2019/5/21
- Phantom: ELI v4.0; Type: QDOVA001BB; Serial: TP:1041
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

**Area Scan (61x121x1):** Interpolated grid: dx=1.000 mm, dy=1.000 mm

Maximum value of SAR (interpolated) = 0.504 W/kg


**Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=4mm, dy=4mm, dz=1.4mm

Reference Value = 18.04 V/m; Power Drift = 0.07 dB

Peak SAR (extrapolated) = 4.71 W/kg

**SAR(1 g) = 0.965 W/kg; SAR(10 g) = 0.222 W/kg**

Maximum value of SAR (measured) = 2.58 W/kg

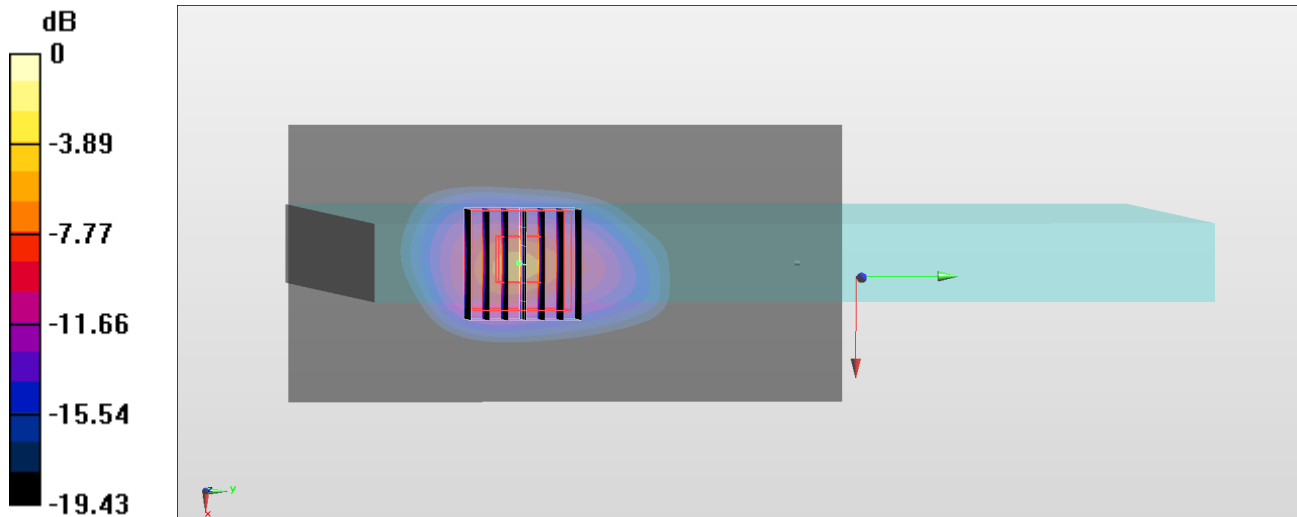

0 dB = 2.58 W/kg = 4.12 dBW/kg

## #5\_WLAN5GHz\_802.11n-HT40 MCS0\_Edge 2\_0mm\_Ch151;Ant 2

Communication System: 802.11n; Frequency: 5755 MHz; Duty Cycle: 1:1.062

Medium: HSL\_5G\_190710 Medium parameters used:  $f = 5755$  MHz;  $\sigma = 5.162$  S/m;  $\epsilon_r = 36.044$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature : 23.4 °C ; Liquid Temperature : 22.4 °C

### DASY5 Configuration

- Probe: EX3DV4 - SN3898; ConvF(4.95, 4.95, 4.95) @ 5755 MHz; Calibrated: 2019/6/27
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn495; Calibrated: 2019/5/21
- Phantom: ELI v4.0; Type: QDOVA001BB; Serial: TP:1041
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

**Area Scan (61x121x1):** Interpolated grid: dx=1.000 mm, dy=1.000 mm

Maximum value of SAR (interpolated) = 0.506 W/kg


**Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=4mm, dy=4mm, dz=1.4mm

Reference Value = 19.44 V/m; Power Drift = 0.06 dB

Peak SAR (extrapolated) = 5.45 W/kg

**SAR(1 g) = 1.08 W/kg; SAR(10 g) = 0.249 W/kg**

Maximum value of SAR (measured) = 3.07 W/kg

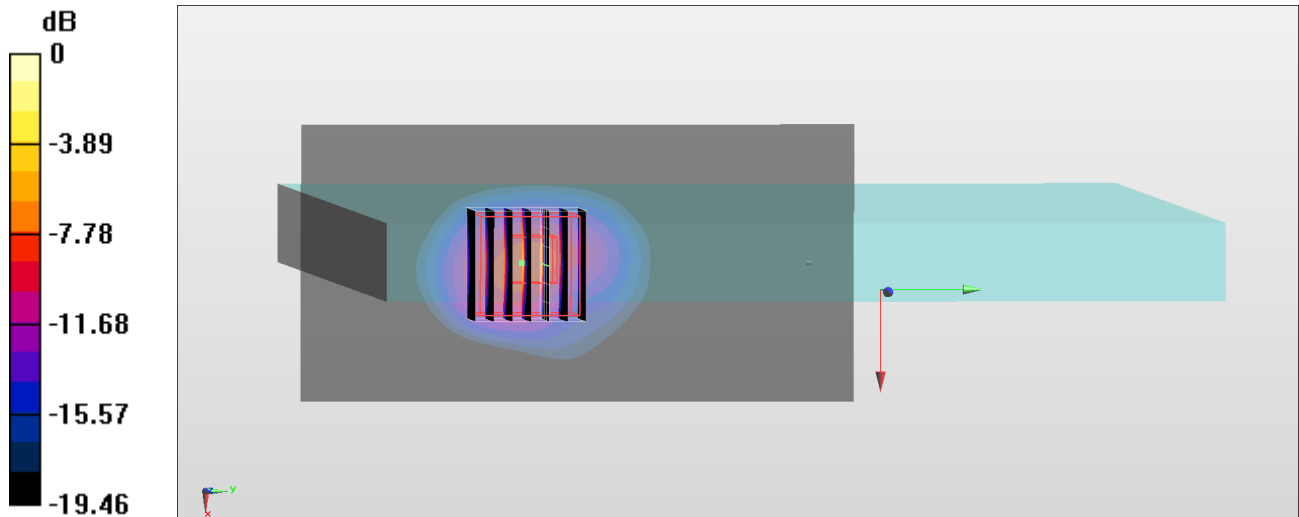

0 dB = 3.07 W/kg = 4.87 dBW/kg