



FCC RADIO TEST REPORT

FCC ID : UZ7FX7500
Equipment : RFID Reader
Brand Name : ZEBRA
Model Name : FX7500
Applicant : Zebra Technologies Corporation
1 Zebra Plaza, Holtsville, NY 11742
Manufacturer : Zebra Technologies Corporation
1 Zebra Plaza, Holtsville, NY 11742
Standard : FCC Part 15 Subpart C §15.247

The product was received on Oct. 12, 2023 and testing was performed from Oct. 12, 2023 to Nov. 15, 2023. We, Sporton International Inc. Wensan Laboratory, would like to declare that the tested sample has been evaluated in accordance with the test procedures and has been in compliance with the applicable technical standards.

The test results in this report apply exclusively to the tested model / sample. Without written approval from Sporton International Inc. Wensan Laboratory, the test report shall not be reproduced except in full.

Approved by: Louis Wu

Sporton International Inc. Wensan Laboratory

No.58, Aly. 75, Ln. 564, Wenhua 3rd, Rd., Guishan Dist., Taoyuan City 333010, Taiwan (R.O.C.)



Table of Contents

History of this test report..... 3

Summary of Test Result..... 4

1 General Description..... 5

 1.1 Product Feature of Equipment Under Test..... 5

 1.2 Product Specification of Equipment Under Test..... 5

 1.3 Modification of EUT 5

 1.4 Testing Location 6

 1.5 Applicable Standards..... 6

2 Test Configuration of Equipment Under Test 7

 2.1 Carrier Frequency Channel 7

 2.2 Test Mode..... 8

 2.3 Connection Diagram of Test System..... 9

 2.4 Support Unit used in test configuration and system 10

 2.5 EUT Operation Test Setup 10

 2.6 Measurement Results Explanation Example..... 10

3 Test Result..... 11

 3.1 Number of Channel Measurement 11

 3.2 Hopping Channel Separation Measurement 13

 3.3 Dwell Time Measurement..... 15

 3.4 20dB and 99% Bandwidth Measurement 17

 3.5 Output Power Measurement..... 20

 3.6 Conducted Band Edges Measurement..... 22

 3.7 Conducted Spurious Emission Measurement 24

 3.8 Radiated Band Edges and Spurious Emission Measurement 26

 3.9 AC Conducted Emission Measurement..... 30

 3.10 Antenna Requirements 32

4 List of Measuring Equipment 33

5 Measurement Uncertainty 35

Appendix A. AC Conducted Emission Test Result

Appendix B. Radiated Spurious Emission

Appendix C. Radiated Spurious Emission Plots

Appendix D. Duty Cycle Plots

Appendix E. Setup Photographs



Summary of Test Result

Report Clause	Ref Std. Clause	Test Items	Result (PASS/FAIL)	Remark
3.1	15.247(a)(1)	Number of Channels	Pass	-
3.2	15.247(a)(1)	Hopping Channel Separation	Pass	-
3.3	15.247(a)(1)	Dwell Time of Each Channel	Pass	-
3.4	15.247(a)(1)	20dB Bandwidth	Pass	-
3.4	2.1049	99% Occupied Bandwidth	Reporting Only	-
3.5	15.247(b)(2)	Output Power	Pass	-
3.6	15.247(d)	Conducted Band Edges	Pass	-
3.7	15.247(d)	Conducted Spurious Emission	Pass	-
3.8	15.247(d)	Radiated Band Edges and Radiated Spurious Emission	Pass	1.35 dB under the limit at 600.30 MHz
3.9	15.207	AC Conducted Emission	Pass	11.14 dB under the limit at 0.44 MHz
3.10	15.203 15.247(b)	Antenna Requirement	Pass	-

Conformity Assessment Condition:

1. The test results (PASS/FAIL) with all measurement uncertainty excluded are presented against the regulation limits or in accordance with the requirements stipulated by the applicant/manufacturer who shall bear all the risks of non-compliance that may potentially occur if measurement uncertainty is taken into account.
2. The measurement uncertainty please refer to each test result in the section "Measurement Uncertainty".

Disclaimer:

The product specifications of the EUT presented in the test report that may affect the test assessments are declared by the manufacturer who shall take full responsibility for the authenticity.

Reviewed by: Wei Chen

Report Producer: Rachel Hsieh



1 General Description

1.1 Product Feature of Equipment Under Test

Product Feature	
Equipment	RFID Reader
Brand Name	ZEBRA
Model Name	FX7500
FCC ID	UZ7FX7500
EUT supports Radios application	UHF RFID
HW Version	DV
SW Version	3.24.52.0
MFD	09SEP23
EUT Stage	Identical Prototype

Remark: The above EUT's information was declared by manufacturer.

Specification of Accessories				
Adapter	Brand Name	Zebra	Part Number	PWR-BGA24V78W0WW
Antenna	Brand Name	Zebra	Part Number	AN480-CL66100WR
Antenna RF Cable	Brand Name	Zebra	Part Number	CBLRD-1B40006801

1.2 Product Specification of Equipment Under Test

Product Specification is subject to this standard	
Tx / Rx Frequency Range	902.75 MHz ~ 927.25 MHz
Number of Channels	50
Maximum Output Power to Antenna	29.96 dBm (0.9908 W)
20dB Bandwidth	0.126 MHz
99% Occupied Bandwidth	0.097 MHz
Antenna Type / Gain	Patch Antenna with 6.0 dBi
Type of Modulation	DSB-ASK, PR-ASK

Remark: The above EUT's information is declared by manufacturer. Please refer to Disclaimer in report summary.

1.3 Modification of EUT

No modifications made to the EUT during the testing.



1.4 Testing Location

Test Site	Sporton International Inc. EMC & Wireless Communications Laboratory
Test Site Location	No.52, Huaya 1st Rd., Guishan Dist., Taoyuan City 333, Taiwan (R.O.C.) TEL: +886-3-327-3456 FAX: +886-3-328-4978
Test Site No.	Sporton Site No. CO05-HY (TAF Code: 1190)
Remark	The AC Conducted Emission test item subcontracted to Sporton International Inc. EMC & Wireless Communications Laboratory.

Note: The test site complies with ANSI C63.4 2014 requirement.

Test Site	Sporton International Inc. Wensan Laboratory
Test Site Location	No.58, Aly. 75, Ln. 564, Wenhua 3rd, Rd., Guishan Dist., Taoyuan City 333010, Taiwan (R.O.C.) TEL: +886-3-327-0868 FAX: +886-3-327-0855
Test Site No.	Sporton Site No. TH05-HY, 03CH11-HY

Note: The test site complies with ANSI C63.4 2014 requirement.

FCC designation No.: TW1190 and TW3786

1.5 Applicable Standards

According to the specifications declared by the manufacturer, the EUT must comply with the requirements of the following standards:

- ♦ FCC Part 15 Subpart C §15.247
- ♦ FCC KDB Publication No. 558074 D01 15.247 Meas Guidance v05r02
- ♦ FCC KDB 414788 D01 Radiated Test Site v01r01
- ♦ ANSI C63.10-2013

Remark:

1. All the test items were validated and recorded in accordance with the standards without any modification during the testing.
2. The TAF code is not including all the FCC KDB listed without accreditation.
3. This EUT has also been tested and complied with the requirements of FCC Part 15, Subpart B, recorded in a separate test report.



2 Test Configuration of Equipment Under Test

2.1 Carrier Frequency Channel

Frequency Band	Channel	Freq. (MHz)	Channel	Freq. (MHz)
902.75-927.25 MHz	1	902.75	28	916.25
	2	903.25	29	916.75
	3	903.75	30	917.25
	4	904.25	31	917.75
	5	904.75	32	918.25
	6	905.25	33	918.75
	7	905.75	34	919.25
	8	906.25	35	919.75
	9	906.75	36	920.25
	10	907.25	37	920.75
	11	907.75	38	921.25
	12	908.25	39	921.75
	13	908.75	40	922.25
	14	909.25	41	922.75
	15	909.75	42	923.25
	16	910.25	43	923.75
	17	910.75	44	924.25
	18	911.25	45	924.75
	19	911.75	46	925.25
	20	912.25	47	925.75
	21	912.75	48	926.25
	22	913.25	49	926.75
	23	913.75	50	927.25
	24	914.25		
	25	914.75		
	26	915.25		
	27	915.75		



2.2 Test Mode


- a. The EUT has been associated with peripherals and configuration operated in a manner tended to maximize its emission characteristics in a typical application. Frequency range investigated: conduction emission (150 kHz to 30 MHz), radiation emission (9 kHz to the 10th harmonic of the highest fundamental frequency or to 40 GHz, whichever is lower). For radiated measurement, the measured emission level of the EUT was maximized by rotating the EUT on a turntable, adjusting the orientation of the EUT and EUT antenna in three orthogonal axis (X: flat, Y: portrait, Z: landscape), and adjusting the measurement antenna orientation, following C63.10 exploratory test procedures and only the worst case emissions were reported in this report.
- b. AC power line Conducted Emission was tested under maximum output power.

The following summary table is showing all test modes to demonstrate in compliance with the standard.


Summary table of Test Cases	
Test Item	Data Rate / Modulation
Conducted Test Cases	Bluetooth – LE / GFSK
	Mode 1: UHF RFID Tx 902.75 MHz
	Mode 2: UHF RFID Tx 914.75 MHz
	Mode 3: UHF RFID Tx 927.25 MHz
Radiated Test Cases	Mode 1: UHF RFID Tx 902.75 MHz
	Mode 2: UHF RFID Tx 914.75 MHz
	Mode 3: UHF RFID Tx 927.25 MHz
AC Conducted Emission	Mode 1: RFID Link + RJ45 Link with Notebook + Adapter + Antenna*2 + USB Load + GPIO Load

2.3 Connection Diagram of Test System

<AC Conducted Emission Mode>

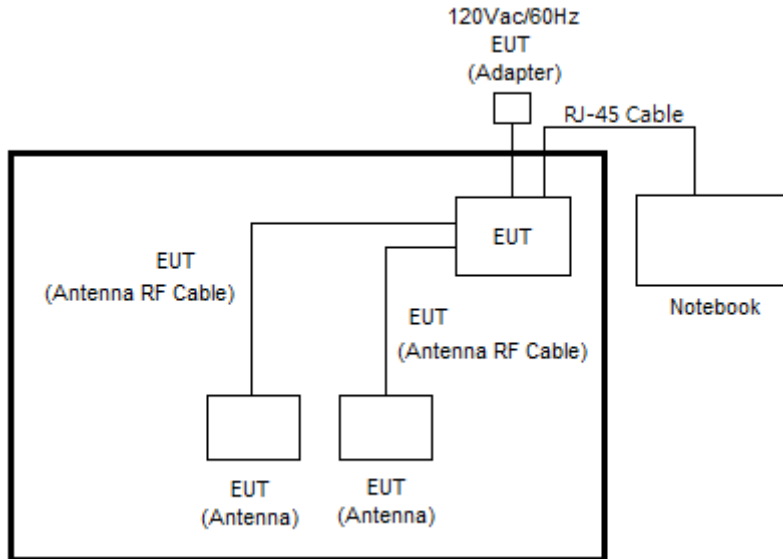

<Radiated Spurious Emission Mode>

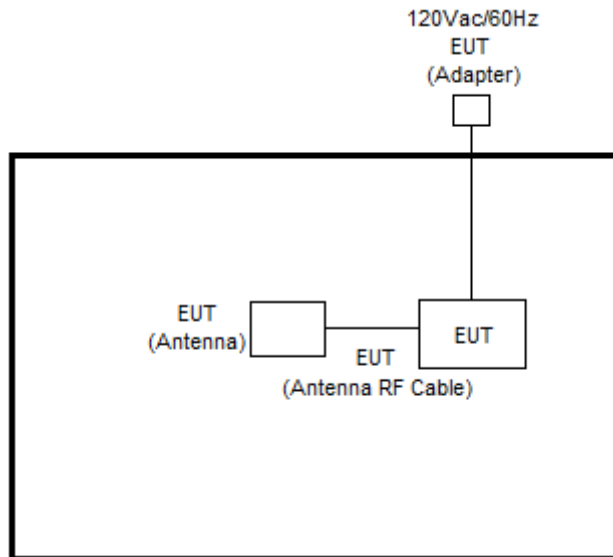



2.4 Support Unit used in test configuration and system

Item	Equipment	Brand Name	Model Name	FCC ID	Data Cable	Power Cord
1.	Notebook	DELL	Latitude 3400	FCC DoC	N/A	AC I/P: Unshielded, 1.2 m DC O/P: Shielded, 1.8 m
2.	Notebook	Lenovo	Ideapad Gaming 3 15IHU6	PD9AX201NG	N/A	AC I/P: Unshielded, 1.2 m DC O/P: Shielded, 1.8 m
3.	RFID Tag	N/A	N/A	N/A	N/A	N/A

2.5 EUT Operation Test Setup

The RF test items, utility “Tera Term Version 4.105” was installed in Notebook which was programmed in order to make the EUT get into the engineering modes to provide channel selection, power level, data rate and the application type and for continuous transmitting signals.

2.6 Measurement Results Explanation Example

For all conducted test items:

The offset level is set in the spectrum analyzer to compensate the RF cable loss and attenuator factor between EUT conducted output port and spectrum analyzer. With the offset compensation, the spectrum analyzer reading level is exactly the EUT RF output level.

Example :

The spectrum analyzer offset is derived from RF cable loss and attenuator factor.

Offset = RF cable loss + attenuator factor.

Following shows an offset computation example with cable loss 4.2 dB and 10 dB attenuator.

$$\begin{aligned} \text{Offset(dB)} &= \text{RF cable loss(dB)} + \text{attenuator factor(dB)}. \\ &= 4.2 + 10 = 14.2 \text{ (dB)} \end{aligned}$$

3 Test Result

3.1 Number of Channel Measurement

3.1.1 Limits of Number of Hopping Frequency

For frequency hopping systems operating in the 902-928 MHz band: if the 20 dB bandwidth of the hopping channel is less than 250 kHz, the system shall use at least 50 hopping frequencies; if the 20 dB bandwidth of the hopping channel is 250 kHz or greater, the system shall use at least 25 hopping frequencies.


3.1.2 Measuring Instruments

Please refer to the measuring equipment list in this test report.

3.1.3 Test Procedure

1. The testing follows ANSI C63.10-2013 clause 7.8.3.
2. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.
3. Set the maximum power setting and enable the EUT to transmit continuously.
4. Enable the EUT hopping function.
5. Use the following spectrum analyzer settings: Span = the frequency band of operation; RBW = 300 kHz; VBW \geq RBW; Sweep = auto; Detector function = peak; Trace = max hold.
6. The number of hopping frequency used is defined as the number of total channel.
7. Record the measurement data derived from spectrum analyzer.

3.1.4 Test Setup

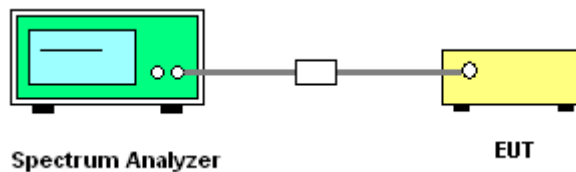



3.1.5 Test Result of Number of Hopping Frequency

Test Mode :	UHF RFID	Temperature :	20~25°C
Test Engineer :	Willy Chang	Relative Humidity :	50~56%

Number of Hopping (Channel)	Limits (Channel)	Pass/Fail
50	> 25	Pass

Number of Hopping Channel Plot on Channel 00 - 49



Date: 15.NOV.2023 22:51:54

3.2 Hopping Channel Separation Measurement

3.2.1 Limit of Hopping Channel Separation

Frequency hopping systems operating in the 902 – 928 MHz band shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater.


3.2.2 Measuring Instruments

Please refer to the measuring equipment list in this test report.

3.2.3 Test Procedures

1. The testing follows ANSI C63.10-2013 clause 7.8.2.
2. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.
3. Set the maximum power setting and enable the EUT to transmit continuously.
4. Enable the EUT hopping function.
5. Use the following spectrum analyzer settings:
Span = wide enough to capture the peaks of two adjacent channels;
RBW = 100 kHz; VBW \geq RBW; Sweep = auto; Detector function = peak; Trace = max hold.
6. Measure and record the results in the test report.

3.2.4 Test Setup

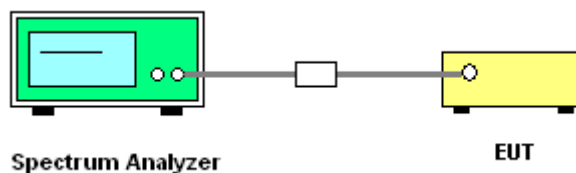




3.2.5 Test Result of Hopping Channel Separation

Test Mode :	UHF RFID	Temperature :	20~25°C
Test Engineer :	Willy Chang	Relative Humidity :	50~56%


Mod.	NTX	Freq. (MHz)	Hopping Channel Separation Measurement (MHz)	Hopping Channel Separation Measurement Limit (MHz)	Pass/Fail
UHF RFID	1	902.75	0.499	0.0942	Pass
UHF RFID	1	914.75	0.498	0.0942	Pass
UHF RFID	1	927.25	0.502	0.1261	Pass

Channel Separation Plot on 902.75 MHz

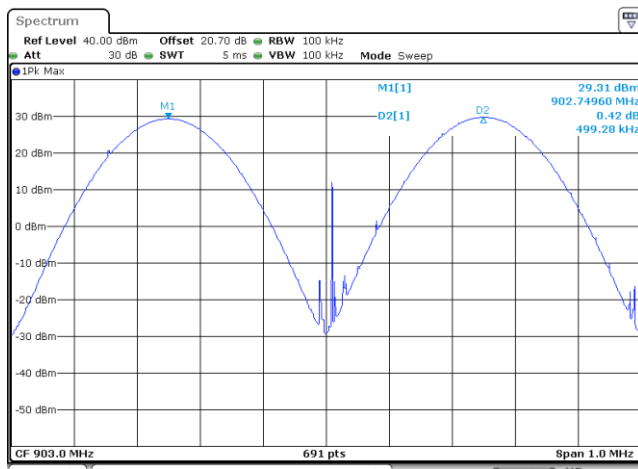


Date: 14.NOV.2023 18:36:09

Channel Separation Plot on 914.75 MHz

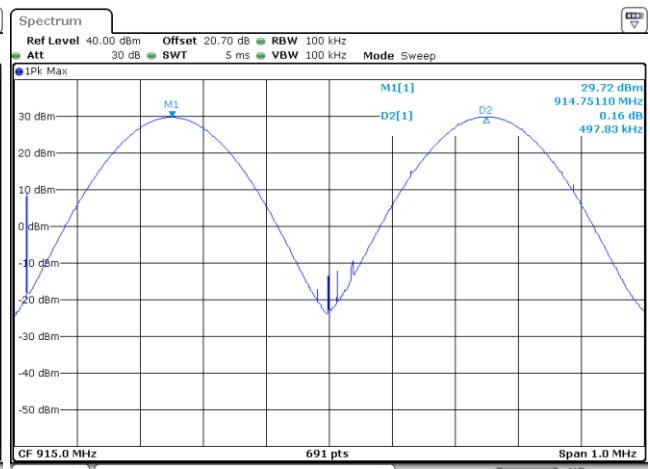

Date: 14.NOV.2023 18:40:26

Channel Separation Plot on 927.25 MHz

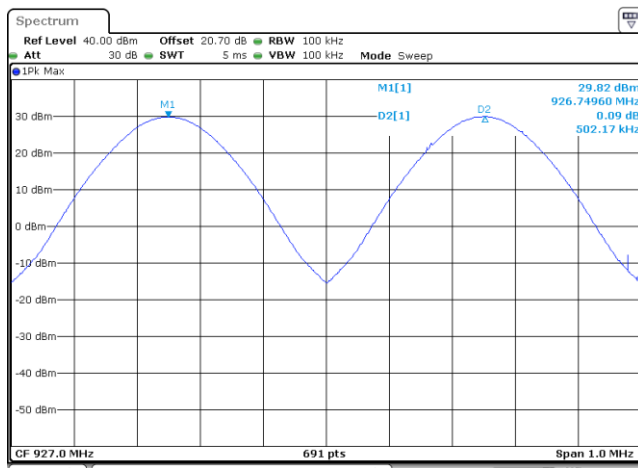

Date: 14.NOV.2023 18:41:59

3.3 Dwell Time Measurement

3.3.1 Limit of Dwell Time

If the 20 dB bandwidth of the hopping channel is less than 250 kHz, the average time of occupancy on any frequency shall not be greater than 0.4 seconds within a 20 second period; if the 20 dB bandwidth of the hopping channel is 250 kHz or greater, the average time of occupancy on any frequency shall not be greater than 0.4 seconds within a 10 second period.


3.3.2 Measuring Instruments

Please refer to the measuring equipment list in this test report.

3.3.3 Test Procedures

1. The testing follows ANSI C63.10-2013 clause 7.8.4.
2. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.
3. Set the maximum power setting and enable the EUT to transmit continuously.
4. Enable the EUT hopping function.
5. Use the following spectrum analyzer settings: Span = zero span, centered on a hopping channel; RBW = 1 MHz; VBW \geq RBW; Sweep = as necessary to capture the entire dwell time per hopping channel; Detector function = peak; Trace = max hold.
6. Measure and record the results in the test report.

3.3.4 Test Setup

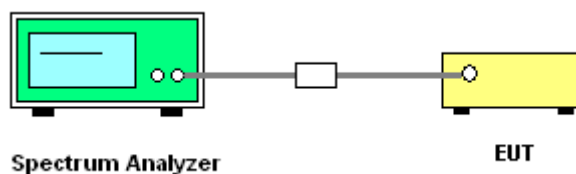




3.3.5 Test Result of Dwell Time

Test Mode :	UHF RFID	Temperature :	20~25°C
Test Engineer :	Willy Chang	Relative Humidity :	50~56%

Mod.	Channel Number Rate	Package Transfer Time (msec)	Hops Over Occupancy Time (hops)	Dwell Time (sec)	Limits (sec)	Pass/Fail
Nomal	50	391.30	1.00	0.391	0.4	Pass

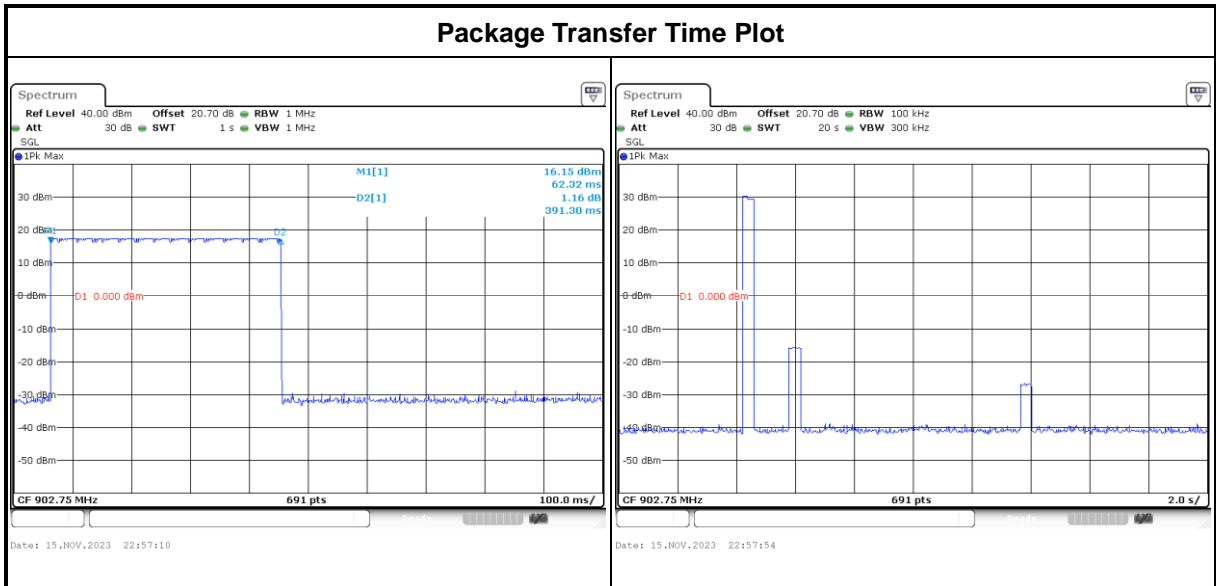

Remark: Dwell Time(s) = Hops Over Occupancy Time (hops) x Package Transfer Time

3.4 20dB and 99% Bandwidth Measurement

3.4.1 Limit of 20dB and 99% Bandwidth

Reporting only


3.4.2 Measuring Instruments

Please refer to the measuring equipment list in this test report.

3.4.3 Test Procedures

1. The testing follows ANSI C63.10-2013 clause 6.9.2 and 6.9.3.
2. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.
3. Set the maximum power setting and enable the EUT to transmit continuously.
4. Use the following spectrum analyzer settings for 20 dB Bandwidth measurement.
Span = approximately 2 to 5 times the 20 dB bandwidth, centered on a hopping channel;
RBW \geq 1% of the 20 dB bandwidth; VBW \geq RBW; Sweep = auto; Detector function = peak;
Trace = max hold.
5. Use the following spectrum analyzer settings for 99 % Bandwidth measurement.
Span = approximately 1.5 to 5 times the 99% bandwidth, centered on a hopping channel;
RBW \geq 1-5% of the 99% bandwidth; VBW \geq 3 * RBW; Sweep = auto; Detector function = peak;
Trace = max hold.
6. Measure and record the results in the test report.

3.4.4 Test Setup

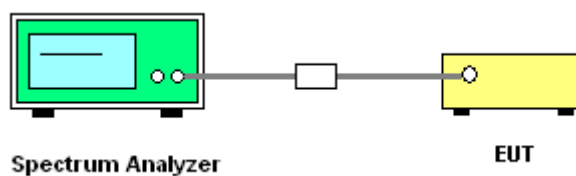




3.4.5 Test Result of 20dB Bandwidth

Test Mode :	UHF RFID	Temperature :	20~25°C
Test Engineer :	Willy Chang	Relative Humidity :	50~56%


Mod.	NTX	Freq.(MHz)	20db BW (MHz)	Pass/Fail
UHF RFID	1	902.75	0.094	Pass
UHF RFID	1	914.75	0.094	Pass
UHF RFID	1	927.25	0.126	Pass

20 dB Bandwidth Plot on 902.75 MHz

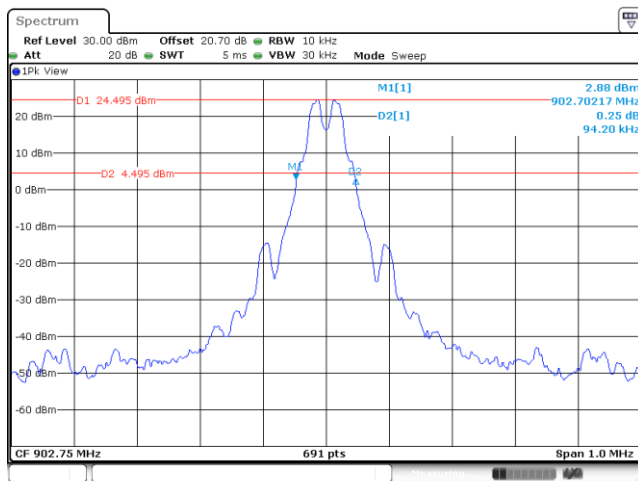


Date: 14.NOV.2023 18:31:01

20 dB Bandwidth Plot on 914.75 MHz

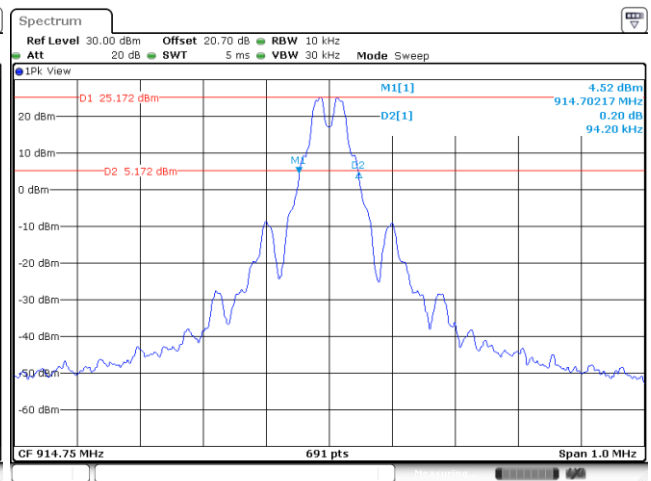

Date: 14.NOV.2023 18:37:46

20 dB Bandwidth Plot on 927.25 MHz

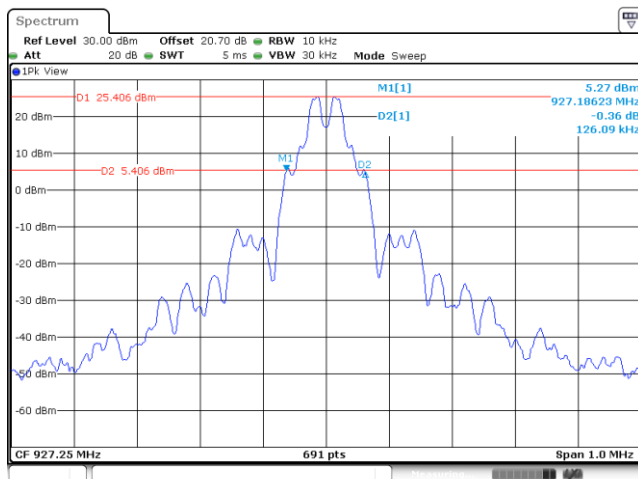

Date: 14.NOV.2023 18:43:02




3.4.6 Test Result of 99% Occupied Bandwidth

Test Mode :	UHF RFID	Temperature :	20~25°C
Test Engineer :	Willy Chang	Relative Humidity :	50~56%


Mod.	NTX	Freq. (MHz)	99% Bandwidth (MHz)	Pass/Fail
UHF RFID	1	902.75	0.077	Reporting Only
UHF RFID	1	914.75	0.081	Reporting Only
UHF RFID	1	927.25	0.097	Reporting Only

99% Occupied Bandwidth Plot on 902.75 MHz

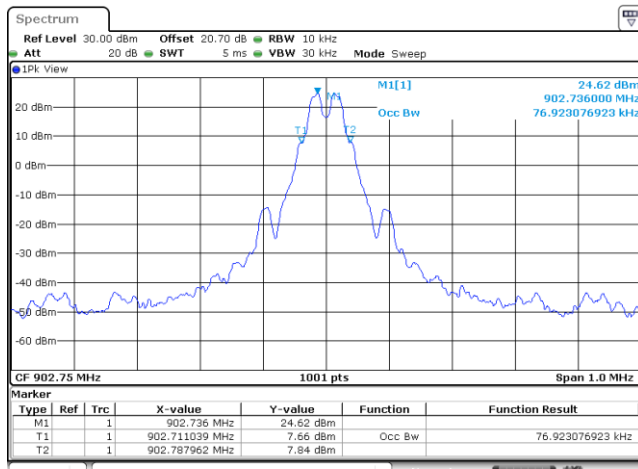


Date: 14.NOV.2023 18:29:34

99% Occupied Bandwidth Plot on 914.75 MHz

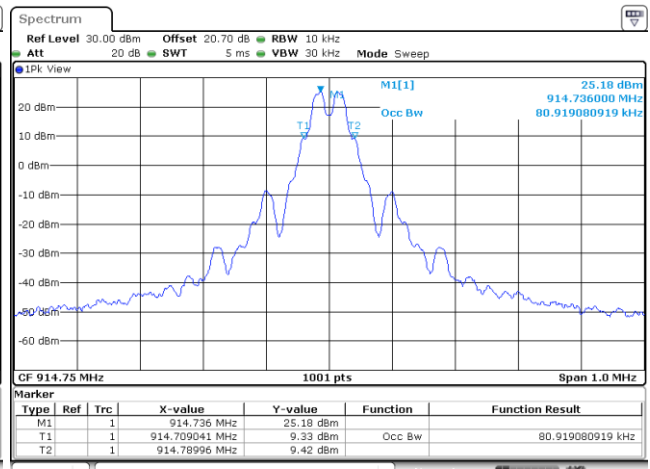

Date: 14.NOV.2023 18:37:17

99% Occupied Bandwidth Plot on 927.25 MHz

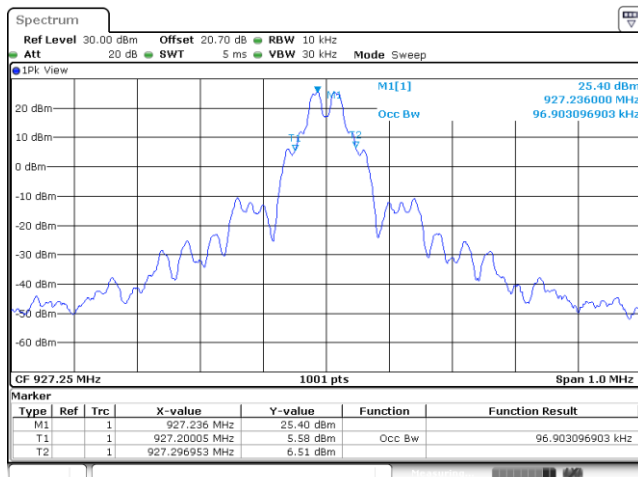

Date: 14.NOV.2023 18:42:20

Note: The occupied channel bandwidth is maintained within the band of operation for all of the modulations.

3.5 Output Power Measurement

3.5.1 Limit of Output Power

Section 15.247 (a) Operation under the provisions of this Section is limited to frequency hopping and digitally modulated intentional radiators that comply with the following provisions: (1)(i) For frequency hopping systems operating in the 902-928 MHz band: if the 20 dB bandwidth of the hopping channel is less than 250 kHz, the system shall use at least 50 hopping frequencies and the average time of occupancy on any frequency shall not be greater than 0.4 seconds within a 20 second period; if the 20 dB bandwidth of the hopping channel is 250 kHz or greater, the system shall use at least 25 hopping frequencies and the average time of occupancy on any frequency shall not be greater than 0.4 seconds within a 10 second period. The maximum allowed 20 dB bandwidth of the hopping channel is 500 kHz.

Section 15.247 (b) The maximum peak conducted output power of the intentional radiator shall not exceed the following: (2) For frequency hopping systems operating in the 902-928 MHz band: 1 watt for systems employing at least 50 hopping channels; and, 0.25 watts for systems employing less than 50 hopping channels, but at least 25 hopping channels, as permitted under paragraph (a)(1)(i) of this section.


3.5.2 Measuring Instruments

Please refer to the measuring equipment list in this test report.

3.5.3 Test Procedures

1. The testing follows ANSI C63.10-2013 clause 7.8.5.
2. The RF output of EUT was connected to the power meter by RF cable and attenuator. The path loss was compensated to the results for each measurement.
3. Set the maximum power setting and enable the EUT to transmit continuously.
4. Measure the conducted output power with cable loss and record the results in the test report.
5. Measure and record the results in the test report.

3.5.4 Test Setup

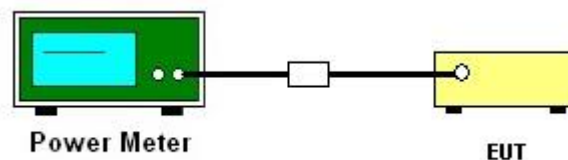



3.5.5 Test Result of Output Power

Test Mode :	UHF RFID	Temperature :	20~25°C
Test Engineer :	Willy Chang	Relative Humidity :	50~56%

Frequency (MHz)	RF Power (dBm)		
	UHF	Max. Limits (dBm)	Pass/Fail
902.75	29.68	30.00	Pass
914.75	29.89	30.00	Pass
927.25	29.96	30.00	Pass

3.6 Conducted Band Edges Measurement

3.6.1 Limit of Band Edges

In any 100 kHz bandwidth outside the intentional radiation frequency band, the radio frequency power shall be at least 20 dB below the highest level of the radiated power. In addition, radiated emissions which fall in the restricted bands must also comply with the radiated emission limits.


3.6.2 Measuring Instruments

Please refer to the measuring equipment list in this test report.

3.6.3 Test Procedures

1. The testing follows ANSI C63.10-2013 clause 7.8.6.
2. Set the maximum power setting and enable the EUT to transmit continuously.
3. Set RBW = 100 kHz, VBW = 300 kHz. Band edge emissions must be at least 20 dB down from the highest emission level within the authorized band as measured with a 100 kHz RBW. The attenuation shall be 30 dB instead of 20 dB when RMS conducted output power procedure is used.
4. Enable hopping function of the EUT and then repeat step 2 and 3.
5. Measure and record the results in the test report.

3.6.4 Test Setup

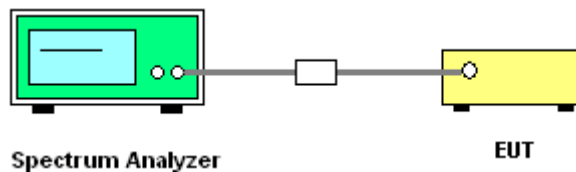





3.6.5 Test Result of Conducted Band Edges

Test Mode :	UHF RFID	Temperature :	20~25°C
Test Engineer :	Willy Chang	Relative Humidity :	50~56%

Low Band Edge Plot on 902.75 MHz

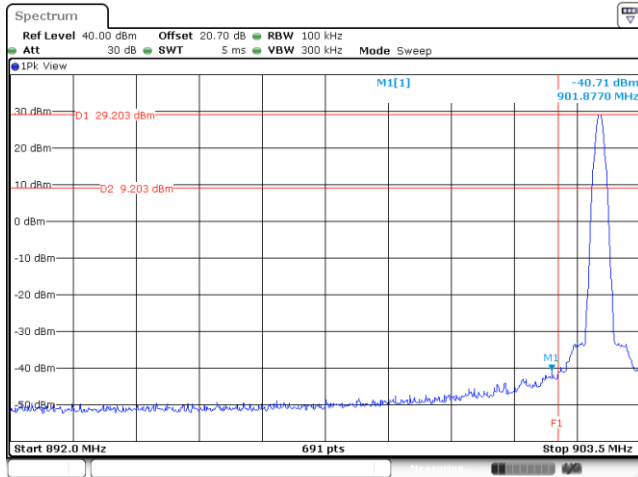


High Band Edge Plot on 927.25 MHz

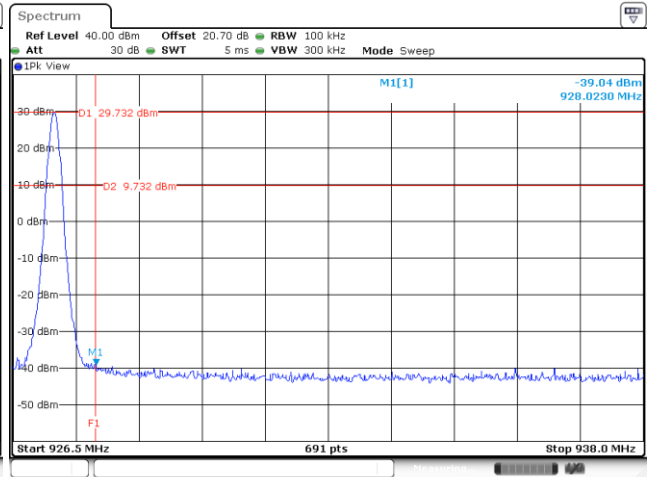


3.6.6 Test Result of Conducted Hopping Mode Band Edges

Test Mode :	UHF RFID	Temperature :	20~25°C
Test Engineer :	Willy Chang	Relative Humidity :	50~56%

Hopping Mode Low Band Edge Plot on 902.75 MHz

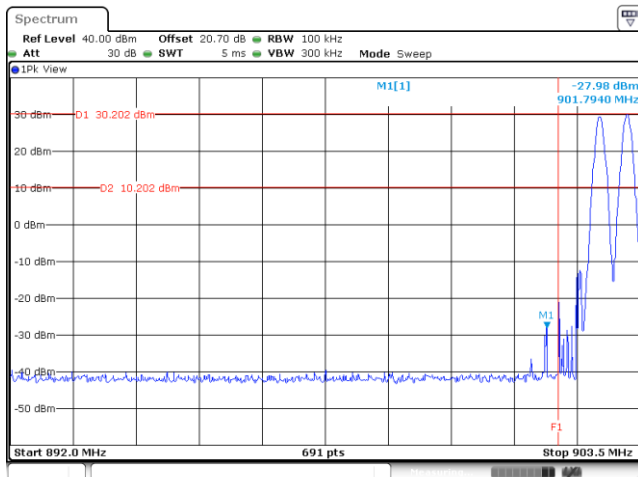

Hopping Mode Low Band Edge Plot on 927.25 MHz

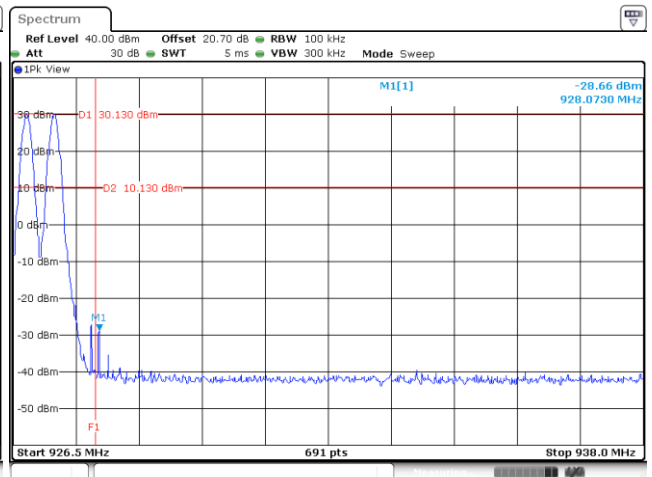

3.7 Conducted Spurious Emission Measurement

3.7.1 Limit of Spurious Emission Measurement

In any 100 kHz bandwidth outside the intentional radiation frequency band, the radio frequency power shall be at least 20 dB below the highest level of the radiated power. In addition, radiated emissions which fall in the restricted bands must also comply with the radiated emission limits.


3.7.2 Measuring Instruments

Please refer to the measuring equipment list in this test report.

3.7.3 Test Procedure

1. The testing follows ANSI C63.10-2013 clause 7.8.8.
2. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.
3. Set the maximum power setting and enable the EUT to transmit continuously.
4. Set RBW = 100 kHz, VBW = 300 kHz, scan up through 10th harmonic. All harmonics / spurs must be at least 20 dB down from the highest emission level within the authorized band as measured with a 100 kHz RBW.
5. Measure and record the results in the test report.
6. The RF fundamental frequency should be excluded against the limit line in the operating frequency band.

3.7.4 Test Setup

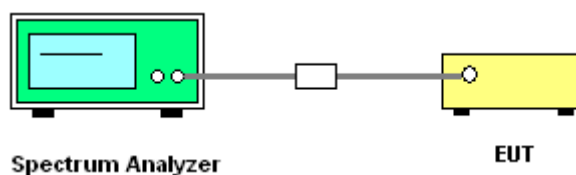




3.7.5 Test Result of Conducted Spurious Emission

Test Mode :	UHF RFID	Temperature :	20~25°C
Test Engineer :	Willy Chang	Relative Humidity :	50~56%


CSE Plot on 902.75 MHz between 30MHz ~ 10 GHz CSE Plot on 914.75 MHz between 30MHz ~ 10 GHz

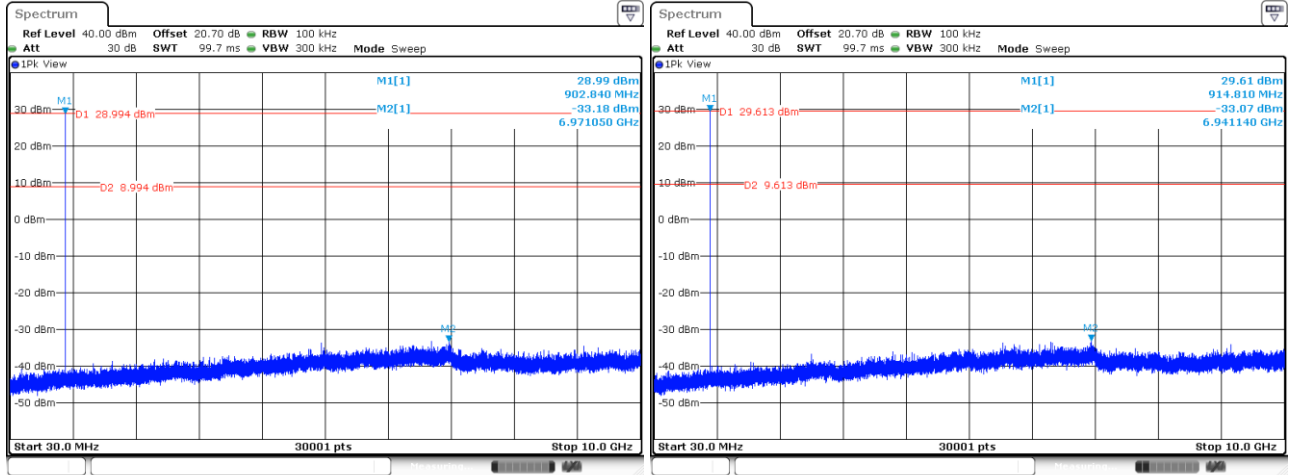

Date: 14.NOV.2023 18:31:46

Date: 14.NOV.2023 18:38:31

CSE Plot on 927.25 MHz between 30MHz ~ 10 GHz

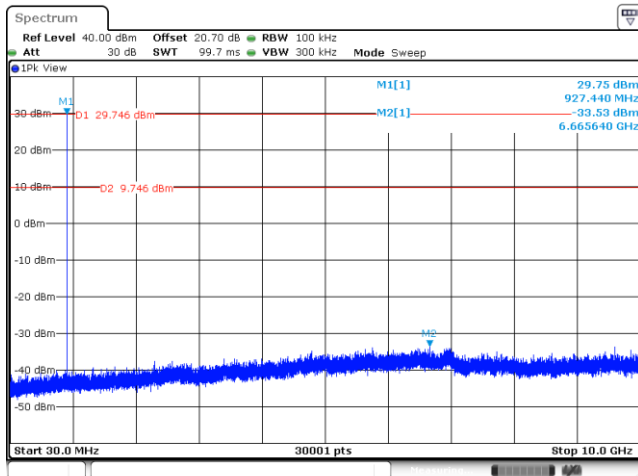

Date: 14.NOV.2023 18:43:41



3.8 Radiated Band Edges and Spurious Emission Measurement

3.8.1 Limit of Radiated Band Edges and Spurious Emission

In any 100 kHz bandwidth outside the intentional radiator frequency band, all harmonics / spurious must be at least 20 dB below the highest emission level within the authorized band. In addition, radiated emissions which fall in the restricted bands must also comply with the limits as below.

Frequency (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009 – 0.490	2400/F(kHz)	300
0.490 – 1.705	24000/F(kHz)	30
1.705 – 30.0	30	30
30 – 88	100	3
88 – 216	150	3
216 - 960	200	3
Above 960	500	3

3.8.2 Measuring Instruments

Please refer to the measuring equipment list in this test report.




3.8.3 Test Procedures


1. The EUT is placed on a turntable with 0.8 meter for frequency below 1 GHz and 1.5 meter for frequency above 1 GHz respectively above ground.
2. The EUT is set 3 meters away from the receiving antenna, which is mounted on the top of a variable height antenna tower.
3. For each suspected emission, the EUT is arranged to its worst case and then tune the Antenna tower (from 1 m to 4 m) and turntable (from 0 degree to 360 degrees) to find the maximum reading. A pre-amp and a high pass filter are used for the test in order to get better signal level to comply with the guidelines.
4. Set the maximum power setting and enable the EUT to transmit continuously.
5. Use the following spectrum analyzer settings:
 - (1) Span shall wide enough to fully capture the emission being measured;
 - (2) Set RBW = 100 kHz for $f < 1$ GHz, RBW = 1 MHz for $f > 1$ GHz ; VBW \geq RBW; Sweep = auto; Detector function = peak; Trace = max hold for peak
 - (3) For average measurement: use duty cycle correction factor method per 15.35(c).
Duty cycle = On time/100 milliseconds
On time = $N_1 * L_1 + N_2 * L_2 + \dots + N_{n-1} * L_{n-1} + N_n * L_n$
Where N_1 is number of type 1 pulses, L_1 is length of type 1 pulses, etc.
Average Emission Level = Peak Emission Level + $20 * \log$ (Duty cycle)
6. Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level
7. Radiated testing below 1 GHz is performed by adjusting the antenna tower from 1 m to 4 m and by rotating the turn table from 0 degree to 360 degrees to find the peak maximum hold reading. When there is no suspected emission found and the emission level is with at least 6 dB margin against QP limit line, the position is marked as “-”.
8. Radiated testing above 1 GHz is performed by adjusting the antenna tower from 1 m to 4 m and by rotating the turn table from 0 degree to 360 degrees to find the peak maximum hold reading for scanning all frequencies. When there is no suspected emission found and the harmonic emission level is with at least 6 dB margin against average limit line, the position is marked as “-”.

3.8.4 Test Setup


For radiated test below 30MHz

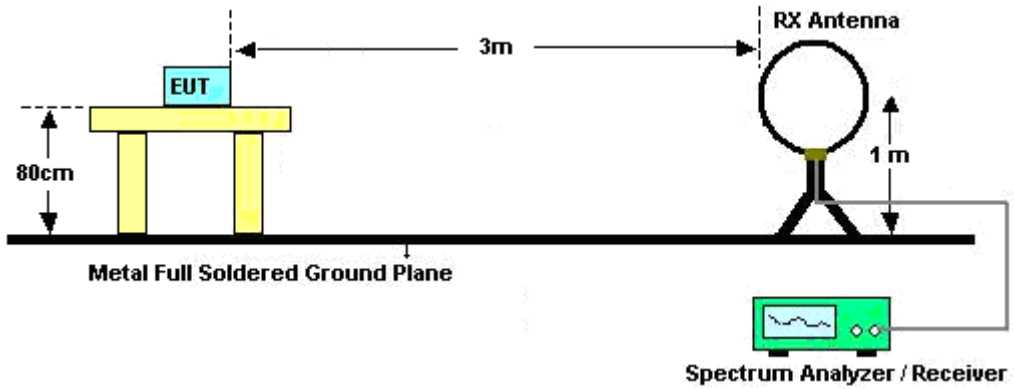

For radiated test from 30MHz to 1GHz

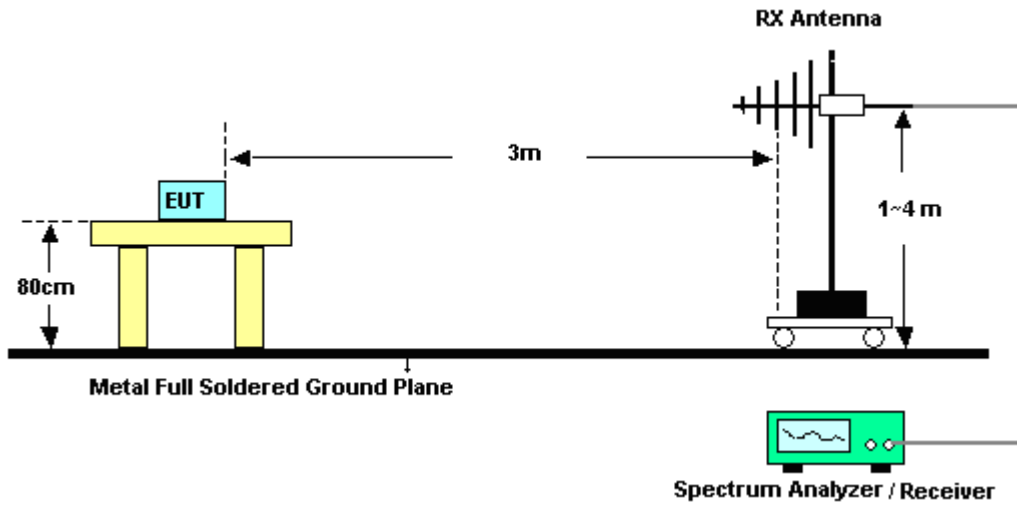

For radiated test above 1GHz

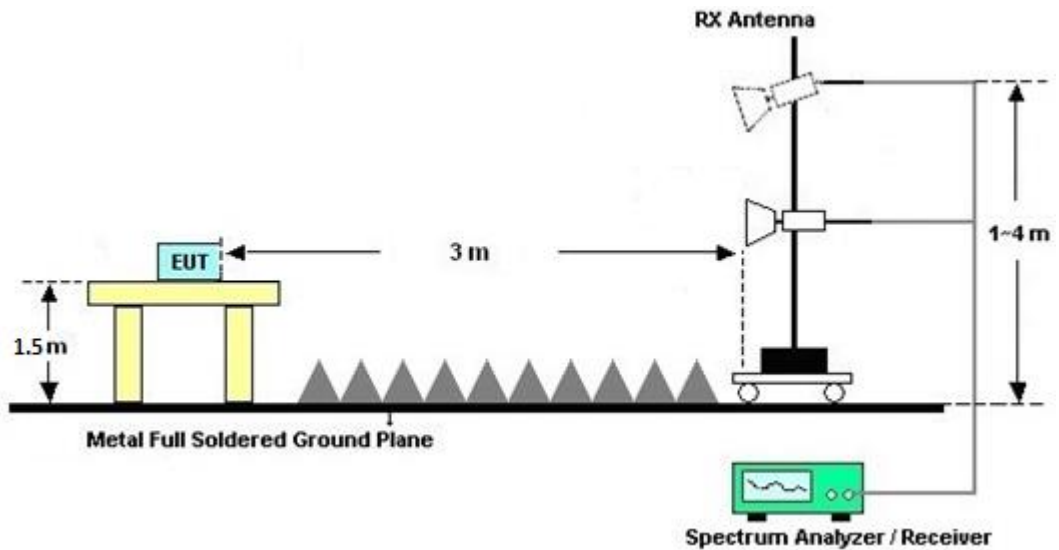



3.8.5 Test Results of Radiated Spurious Emissions (9 kHz ~ 30 MHz)

The low frequency, which starts from 9 kHz to 30 MHz, is pre-scanned and the result which is 20 dB lower than the limit line is not reported.

There is adequate comparison measurement of both open-field test site and alternative test site - semi-Anechoic chamber according to 414788 D01 Radiated Test Site v01r01, and the result comes out very similar.

3.8.6 Test Result of Radiated Spurious at Band Edges

Please refer to Appendix B and C.

3.8.7 Duty Cycle

Please refer to Appendix D.

3.8.8 Test Result of Radiated Spurious Emission

Please refer to Appendix B and C.



3.9 AC Conducted Emission Measurement

3.9.1 Limit of AC Conducted Emission

For equipment that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed the limits in the following table.

Frequency of emission (MHz)	Conducted limit (dB μ V)	
	Quasi-peak	Average
0.15-0.5	66 to 56*	56 to 46*
0.5-5	56	46
5-30	60	50

*Decreases with the logarithm of the frequency.


3.9.2 Measuring Instruments

Please refer to the measuring equipment list in this test report.

3.9.3 Test Procedures

1. The EUT is placed 0.4 meter away from the conducting wall of the shielding room, and is kept at least 80 centimeters from any other grounded conducting surface.
2. Connect EUT to the power mains through a line impedance stabilization network (LISN).
3. All the support units are connecting to the other LISN.
4. The LISN provides 50 ohm coupling impedance for the measuring instrument.
5. The FCC states that a 50 ohm, 50 microhenry LISN shall be used.
6. Both Line and Neutral shall be tested in order to find out the maximum conducted emission.
7. The frequency range from 150 kHz to 30 MHz is scanned.
8. Set the test-receiver system to Peak Detect Function and specified bandwidth (IF Bandwidth = 9 kHz) with Maximum Hold Mode. Then measurement is also conducted by Average Detector and Quasi-Peak Detector Function respectively.

3.9.4 Test Setup

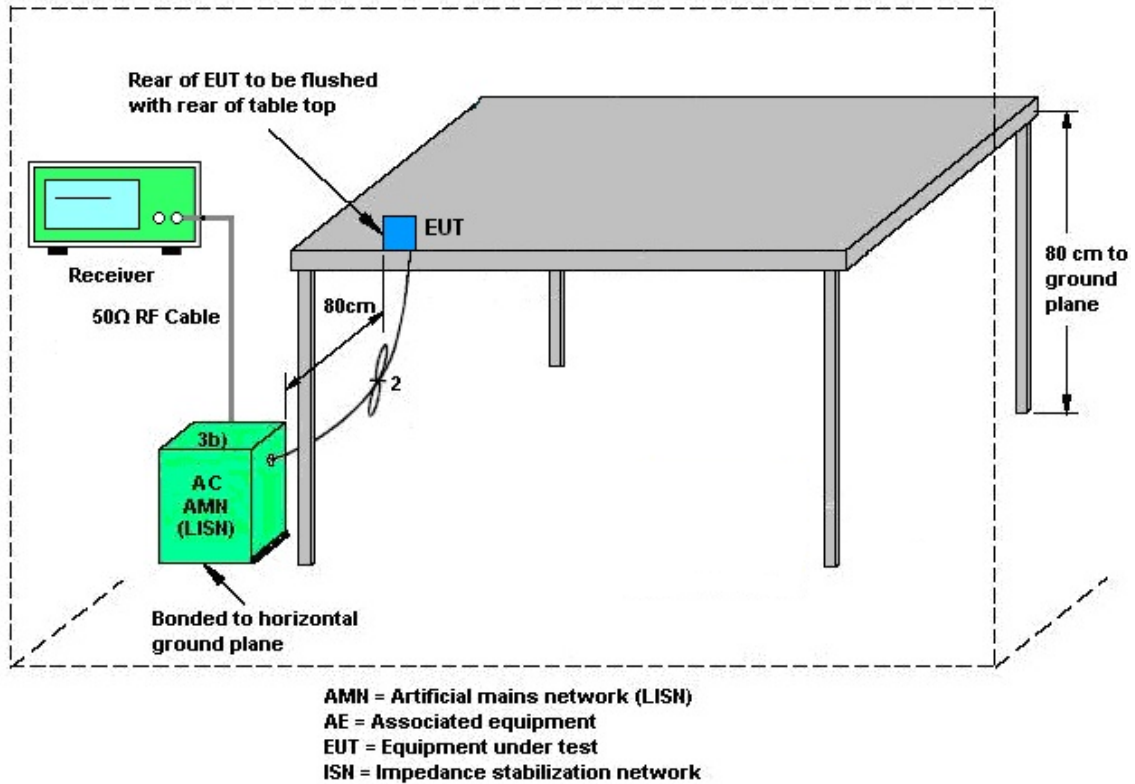

3.9.5 Test Result of AC Conducted Emission

Please refer to Appendix A.



3.10 Antenna Requirements

3.10.1 Standard Applicable

The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the rule.

3.10.2 Antenna Anti-Replacement Construction

An embedded-in antenna design is used.



4 List of Measuring Equipment

Instrument	Brand Name	Model No.	Serial No.	Characteristics	Calibration Date	Test Date	Due Date	Remark
Loop Antenna	Rohde & Schwarz	HFH2-Z2	100488	9 kHz~30 MHz	Sep. 12, 2023	Nov. 10, 2023~ Nov. 13, 2023	Sep. 11, 2024	Radiation (03CH11-HY)
Bilog Antenna	TESEQ	CBL 6111D & N-6-06	35414 & AT-N0602	30MHz~1GHz	Oct. 07, 2023	Nov. 10, 2023~ Nov. 13, 2023	Oct. 06, 2024	Radiation (03CH11-HY)
Horn Antenna	SCHWARZBE CK	BBHA 9120 D	9120D-01620	1GHz~18GHz	Aug. 17, 2023	Nov. 10, 2023~ Nov. 13, 2023	Aug. 16, 2024	Radiation (03CH11-HY)
Amplifier	SONOMA	310N	187312	9kHz~1GHz	Dec. 09, 2022	Nov. 10, 2023~ Nov. 13, 2023	Dec. 08, 2023	Radiation (03CH11-HY)
Preamplifier	Keysight	83017A	MY53270147	1GHz~26.5GHz	Aug. 15, 2023	Nov. 10, 2023~ Nov. 13, 2023	Aug. 14, 2024	Radiation (03CH11-HY)
Preamplifier	Jet-Power	JPA0118-55-303	17100018000 55007	1GHz~18GHz	Jun. 14, 2023	Nov. 10, 2023~ Nov. 13, 2023	Jun. 13, 2024	Radiation (03CH11-HY)
Spectrum Analyzer	Keysight	N9010A	MY54200486	10Hz~44GHz	Oct. 05, 2023	Nov. 10, 2023~ Nov. 13, 2023	Oct. 04, 2024	Radiation (03CH11-HY)
EMI Test Receiver	Keysight	N9038A(MXE)	MY54130085	20MHz~8.4GHz	Oct. 06, 2023	Nov. 10, 2023~ Nov. 13, 2023	Oct. 05, 2024	Radiation (03CH11-HY)
Controller	EMEC	EM 1000	N/A	Control Turn table & Ant Mast	N/A	Nov. 10, 2023~ Nov. 13, 2023	N/A	Radiation (03CH11-HY)
Antenna Mast	EMEC	AM-BS-4500-B	N/A	1~4m	N/A	Nov. 10, 2023~ Nov. 13, 2023	N/A	Radiation (03CH11-HY)
Turn Table	EMEC	TT 2000	N/A	0~360 Degree	N/A	Nov. 10, 2023~ Nov. 13, 2023	N/A	Radiation (03CH11-HY)
Software	Audix	E3 6.2009-8-24	RK-001053	N/A	N/A	Nov. 10, 2023~ Nov. 13, 2023	N/A	Radiation (03CH11-HY)
RF Cable	HUBER + SUHNER	SUCOFLEX 102	MY2859/2	30MHz~40GHz	Mar. 07, 2023	Nov. 10, 2023~ Nov. 13, 2023	Mar. 06, 2024	Radiation (03CH11-HY)
RF Cable	HUBER + SUHNER	SUCOFLEX 102	801595/2	30MHz~40GHz	Mar. 07, 2023	Nov. 10, 2023~ Nov. 13, 2023	Mar. 06, 2024	Radiation (03CH11-HY)
RF Cable	HUBER + SUHNER	SUCOFLEX 102	803951/2	9K~30M	Mar. 07, 2023	Nov. 10, 2023~ Nov. 13, 2023	Mar. 06, 2024	Radiation (03CH11-HY)
RF Cable	HUBER + SUHNER	SUCOFLEX 102	803951/2	30M~40G	Mar. 07, 2023	Nov. 10, 2023~ Nov. 13, 2023	Mar. 06, 2024	Radiation (03CH11-HY)
Hygrometer	TECPEL	DTM-303B	TP140325	N/A	Nov. 02, 2023	Nov. 10, 2023~ Nov. 13, 2023	Nov. 01, 2024	Radiation (03CH11-HY)
Filter	Wainwright	WLK4-1000-153 0-8000-40SS	SN11	1.53G Low Pass	Sep. 11, 2023	Nov. 10, 2023~ Nov. 13, 2023	Sep. 10, 2024	Radiation (03CH11-HY)
Filter	Wainwright	WHKX12-900-10 00-15000-60SS	SN12	1GHz High Pass Filter	Sep. 11, 2023	Nov. 10, 2023~ Nov. 13, 2023	Sep. 10, 2024	Radiation (03CH11-HY)



Instrument	Brand Name	Model No.	Serial No.	Characteristics	Calibration Date	Test Date	Due Date	Remark
AC Power Source	ChainTek	APC-1000W	N/A	N/A	N/A	Oct. 12, 2023	N/A	Conduction (CO05-HY)
EMI Test Receiver	Rohde & Schwarz	ESR3	102388	9kHz~3.6GHz	Dec. 01, 2022	Oct. 12, 2023	Nov. 30, 2023	Conduction (CO05-HY)
Hygrometer	Testo	608-H1	34913912	N/A	Nov. 17, 2022	Oct. 12, 2023	Nov. 16, 2023	Conduction (CO05-HY)
LISN	Rohde & Schwarz	ENV216	100081	9kHz~30MHz	Nov. 17, 2022	Oct. 12, 2023	Nov. 16, 2023	Conduction (CO05-HY)
Software	Rohde & Schwarz	EMC32	N/A	N/A	N/A	Oct. 12, 2023	N/A	Conduction (CO05-HY)
Pulse Limiter	SCHWARZBECK	VTSD 9561-F N	00691	9kHz~200MHz	Jul. 28, 2023	Oct. 12, 2023	Jul. 27, 2024	Conduction (CO05-HY)
LISN Cable	MVE	RG-400	260260	N/A	Dec. 29, 2022	Oct. 12, 2023	Dec. 28, 2023	Conduction (CO05-HY)
Hygrometer	TECPEL	DTM-303A	TP201996	N/A	Nov. 17, 2022	Nov. 13, 2023~ Nov. 15, 2023	Nov. 16, 2023	Conducted (TH05-HY)
Power Sensor	DARE	RPR3006W	15I00041SNO 10 (NO:248)	10MHz~6GHz	Jan. 05, 2023	Nov. 13, 2023~ Nov. 15, 2023	Jan. 04, 2024	Conducted (TH05-HY)
Power Meter	Anritsu	ML2495A	1036004	N/A	Jul. 27, 2023	Nov. 13, 2023~ Nov. 15, 2023	Jul. 26, 2024	Conducted (TH05-HY)
Power Sensor	Anritsu	MA2411B	1027253	300MHz~40GHz	Jul. 27, 2023	Nov. 13, 2023~ Nov. 15, 2023	Jul. 26, 2024	Conducted (TH05-HY)
Signal Analyzer	Rohde & Schwarz	FSV40	101566	10Hz~40GHz	Aug. 23, 2023	Nov. 13, 2023~ Nov. 15, 2023	Aug. 22, 2024	Conducted (TH05-HY)



5 Measurement Uncertainty

Uncertainty of Conducted Emission Measurement (150 kHz ~ 30 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	3.5 dB
---	--------

Uncertainty of Radiated Emission Measurement (30 MHz ~ 1000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	6.1 dB
---	--------

Uncertainty of Radiated Emission Measurement (1000 MHz ~ 18000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	4.3 dB
---	--------

Uncertainty of Radiated Emission Measurement (18000 MHz ~ 40000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	5.3 dB
---	--------




Appendix A. AC Conducted Emission Test Results

Test Engineer :	Calvin Wang	Temperature :	23~26°C
		Relative Humidity :	45~55%

EUT Information

Report NO : 361310
 Test Mode : Mode 1
 Test Voltage : 120Vac/60Hz
 Phase : Line

Full Spectrum

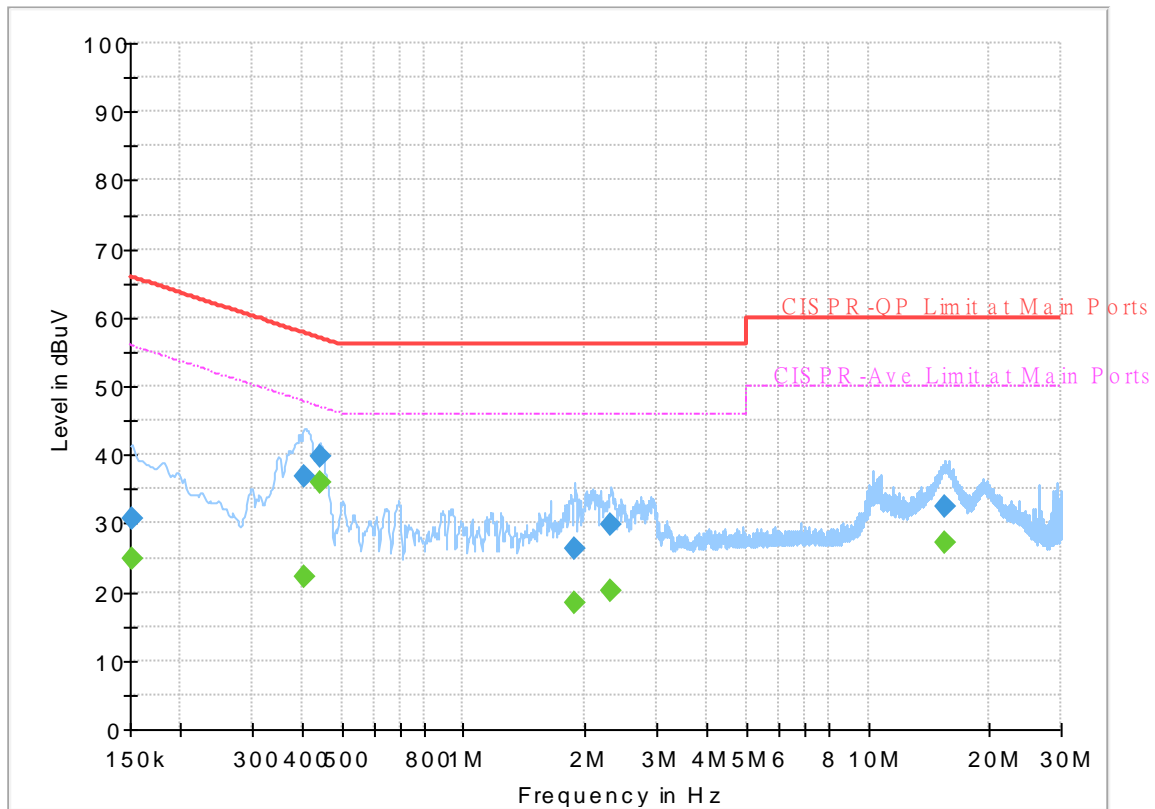


Final Result

Frequency (MHz)	QuasiPeak (dBuV)	CAverage (dBuV)	Limit (dBuV)	Margin (dB)	Line	Filter	Corr. (dB)
0.152250	---	24.73	55.88	31.15	L1	OFF	19.8
0.152250	30.71	---	65.88	35.17	L1	OFF	19.8
0.406500	---	22.26	47.72	25.46	L1	OFF	19.8
0.406500	36.79	---	57.72	20.93	L1	OFF	19.8
0.444750	---	35.83	46.97	11.14	L1	OFF	19.8
0.444750	39.67	---	56.97	17.30	L1	OFF	19.8
1.887000	---	18.51	46.00	27.49	L1	OFF	19.9
1.887000	26.31	---	56.00	29.69	L1	OFF	19.9
2.323500	---	20.12	46.00	25.88	L1	OFF	19.9
2.323500	29.81	---	56.00	26.19	L1	OFF	19.9
15.533250	---	27.29	50.00	22.71	L1	OFF	19.9
15.533250	32.57	---	60.00	27.43	L1	OFF	19.9

EUT Information

Report NO : 361310
 Test Mode : Mode 1
 Test Voltage : 120Vac/60Hz
 Phase : Neutral

Full Spectrum

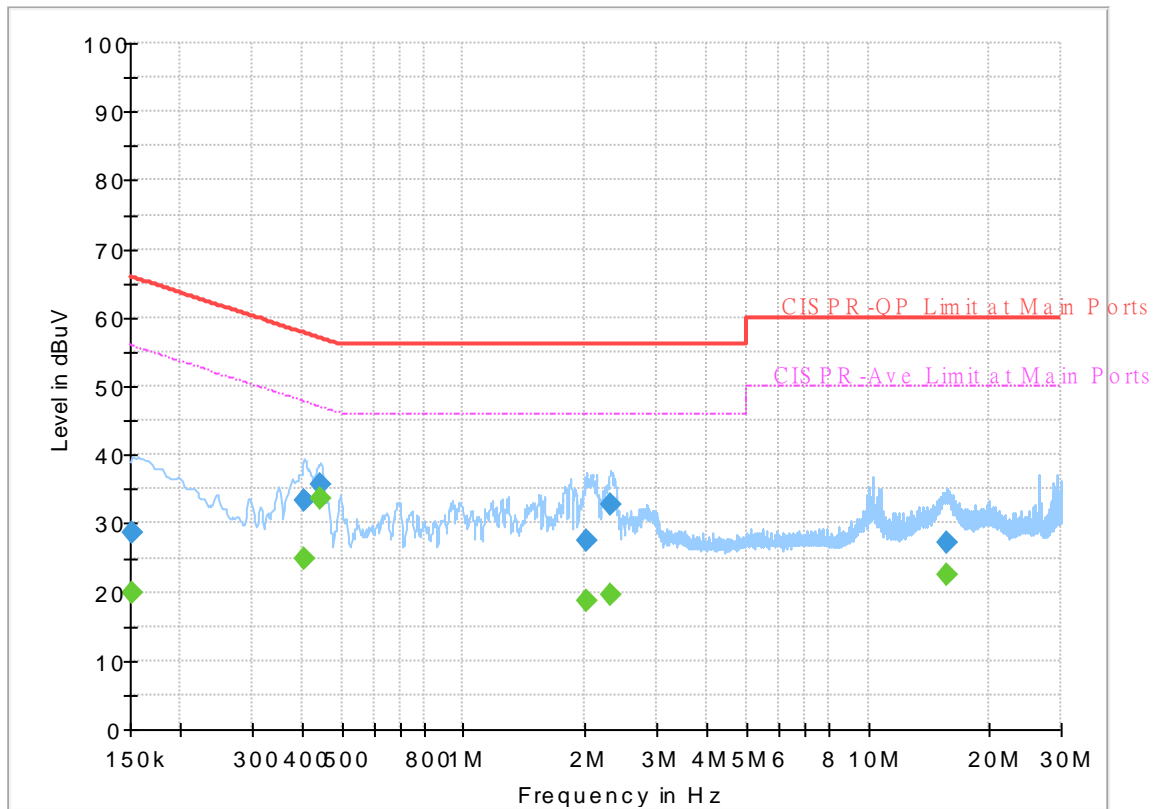

Final_Result

Frequency (MHz)	QuasiPeak (dBuV)	CAverage (dBuV)	Limit (dBuV)	Margin (dB)	Line	Filter	Corr. (dB)
0.152250	---	19.76	55.88	36.12	N	OFF	19.8
0.152250	28.78	---	65.88	37.10	N	OFF	19.8
0.402000	---	24.91	47.81	22.90	N	OFF	19.8
0.402000	33.26	---	57.81	24.55	N	OFF	19.8
0.444750	---	33.73	46.97	13.24	N	OFF	19.8
0.444750	35.81	---	56.97	21.16	N	OFF	19.8
2.022000	---	18.66	46.00	27.34	N	OFF	19.8
2.022000	27.62	---	56.00	28.38	N	OFF	19.8
2.305500	---	19.46	46.00	26.54	N	OFF	19.8
2.305500	32.67	---	56.00	23.33	N	OFF	19.8
15.654750	---	22.52	50.00	27.48	N	OFF	20.0
15.654750	27.07	---	60.00	32.93	N	OFF	20.0



Appendix B. Radiated Spurious Emission

Test Engineer :	Yuan Lee, Troye Hsieh and Sam Chou	Temperature :	20~22.4°C
		Relative Humidity :	57~68.6%

UHF RFID

UHF RFID (LF @ 3m)

UHF RFID	Note	Frequency (MHz)	Level (dBμV/m)	Margin (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Path Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)	
UHF RFID 902.75MHz		30	33.92	-6.08	40	31.21	24	10.86	32.15	-	-	P	H	
		98.31	29.46	-14.04	43.5	34.34	15.69	11.56	32.13	-	-	P	H	
		300	37.5	-8.5	46	37.65	19.08	12.77	32	-	-	P	H	
		600.3	44.65	-1.35	46	37.55	25.51	13.75	32.16	-	-	P	H	
		650	40.85	-5.15	46	32.53	26.34	13.92	31.94	-	-	P	H	
	*	902.75	127.83	81.83	46	115.58	28.95	14.52	31.22	204	180	P	H	
		950.3	48.53	-	-	33.92	30.59	14.82	30.8	303	212	Q	H	
			30.27	38.61	-1.39	40	35.98	23.91	10.87	32.15	-	-	P	V
			43.23	40.97	-	-	44.36	17.77	11.07	32.23	-	-	P	V
			128.28	31.56	-11.94	43.5	34.55	17.4	11.77	32.16	-	-	P	V
			500.2	39.17	-6.83	46	34.2	23.72	13.43	32.18	-	-	P	V
			600.3	41.44	-4.56	46	34.34	25.51	13.75	32.16	-	-	P	V
		*	902.75	127.73	81.73	46	115.48	28.95	14.52	31.22	103	190	P	V
		950.3	48.3	-	-	33.69	30.59	14.82	30.8	100	31	Q	V	
Remark	<ol style="list-style-type: none"> No other spurious found. All results are PASS against Peak and Average limit line. Non restricted band limit is radio frequency level down 20db. The emission position marked as "-" means no suspected emission found and emission level has at least 6dB margin against limit or emission is noise floor only. 													



UHF RFID	Note	Frequency (MHz)	Level (dBµV/m)	Margin (dB)	Limit Line (dBµV/m)	Read Level (dBµV)	Antenna Factor (dB/m)	Path Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)	
UHF RFID 914.75MHz		30	41.09	-	-	38.38	24	10.86	32.15	-	-	P	H	
		43.5	31.76	-8.24	40	35.3	17.62	11.07	32.23	-	-	P	H	
		288.39	31.95	-14.05	46	32.37	18.9	12.69	32.01	-	-	P	H	
		500.2	35.47	-10.53	46	30.5	23.72	13.43	32.18	-	-	P	H	
		600.3	43.14	-2.86	46	36.04	25.51	13.75	32.16	-	-	P	H	
	*	914.75	129.22	83.22	46	116.63	29.1	14.6	31.11	129	182	P	H	
		950.3	50.51			35.9	30.59	14.82	30.8	120	29	Q	H	
			30	40.03	-	-	37.32	24	10.86	32.15	-	-	P	V
			43.5	42.96	-	-	46.5	17.62	11.07	32.23	100	71	Q	V
			122.61	30.06	-13.44	43.5	33.08	17.41	11.73	32.16	-	-	P	V
			499.5	37.22	-8.78	46	32.26	23.71	13.43	32.18	-	-	P	V
			600.3	43.47	-2.53	46	36.37	25.51	13.75	32.16	-	-	P	V
		*	914.75	129.17	83.17	46	116.58	29.1	14.6	31.11	104	184	P	V
		950.3	49.56	-	-	34.95	30.59	14.82	30.8	-	-	P	V	
Remark	<ol style="list-style-type: none"> No other spurious found. All results are PASS against Peak and Average limit line. Non restricted band limit is radio frequency level down 20db The emission position marked as "-" means no suspected emission found and emission level has at least 6dB margin against limit or emission is noise floor only. 													



UHF RFID	Note	Frequency (MHz)	Level (dBµV/m)	Margin (dB)	Limit Line (dBµV/m)	Read Level (dBµV)	Antenna Factor (dB/m)	Path Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)	
UHF RFID 927.25MHz		39.18	35.92	-4.08	40	37.22	19.87	11.04	32.21	-	-	P	H	
		98.31	31.19	-12.31	43.5	36.07	15.69	11.56	32.13	-	-	P	H	
		300	33.28	-12.72	46	33.43	19.08	12.77	32	-	-	P	H	
		339.2	32.58	-13.42	46	31.82	19.94	12.81	31.99	-	-	P	H	
		600.3	40.51	-5.49	46	33.41	25.51	13.75	32.16	-	-	P	H	
	*	927.25	129.85	83.85	46	116.75	29.42	14.68	31	128	178	P	H	
		950.3	49.21	-	-	34.6	30.59	14.82	30.8	120	42	Q	H	
			30.27	37.17	-2.83	40	34.54	23.91	10.87	32.15	-	-	P	V
			39.45	42.38	-	-	43.79	19.75	11.05	32.21	100	61	Q	V
			173.37	34.13	-9.37	43.5	39.02	15.12	12.06	32.07	-	-	P	V
			499.5	37.13	-8.87	46	32.17	23.71	13.43	32.18	-	-	P	V
			600.3	41.52	-4.48	46	34.42	25.51	13.75	32.16	-	-	P	V
	*		927.25	129.76	83.76	46	116.66	29.42	14.68	31	103	184	P	V
			949.6	51.76	-	-	37.19	30.55	14.82	30.8	-	-	P	V
Remark	<ol style="list-style-type: none"> No other spurious found. All results are PASS against Peak and Average limit line. Non restricted band limit is radio frequency level down 20db. The emission position marked as "-" means no suspected emission found and emission level has at least 6dB margin against limit or emission is noise floor only. 													



UHF RFID (Harmonic @ 3m)

UHF RFID	Note	Frequency (MHz)	Level (dBµV/m)	Margin (dB)	Limit Line (dBµV/m)	Read Level (dBµV)	Antenna Factor (dB/m)	Path Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
UHF RFID 902.75MHz		2708.25	42.7	-31.3	74	66	28.38	8.36	60.25	400	77	P	H
		2708.25	35.7	-18.3	54	59	28.38	8.36	60.25	400	77	A	H
		3611	47.11	-26.89	74	65.93	29.78	9.92	58.62	338	65	P	H
		3611	43.44	-10.56	54	62.26	29.78	9.92	58.62	338	65	A	H
		4513.75	49.49	-24.51	74	63.41	31.7	11.93	57.69	393	326	P	H
		4513.75	44.19	-9.81	54	58.11	31.7	11.93	57.69	393	326	A	H
		5416.5	41.87	-32.13	74	54.8	32.93	12.18	58.28	-	-	P	H
		8124.75	45.42	-28.58	74	51.63	36.85	14.95	58.22	-	-	P	H
		9027.5	48.72	-25.28	74	53.1	37.9	15.83	58.25	378	277	P	H
		9027.5	40.52	-13.48	54	44.9	37.9	15.83	58.25	378	277	A	H
		2708.25	45.4	-28.6	74	68.7	28.38	8.36	60.25	299	149	P	V
		2708.25	40.25	-13.75	54	63.55	28.38	8.36	60.25	299	149	A	V
		3611	47.39	-26.61	74	66.21	29.78	9.92	58.62	310	115	P	V
		3611	44.37	-9.63	54	63.19	29.78	9.92	58.62	310	115	A	V
		4513.75	54.09	-19.91	74	68.01	31.7	11.93	57.69	400	11	P	V
		4513.75	50.59	-3.41	54	64.51	31.7	11.93	57.69	400	11	A	V
		5416.5	41.84	-32.16	74	54.77	32.93	12.18	58.28	-	-	P	V
		8124.75	45.14	-28.86	74	51.35	36.85	14.95	58.22	-	-	P	V
	9027.5	50.72	-23.28	74	55.1	37.9	15.83	58.25	336	292	P	V	
	9027.5	44.72	-9.28	54	49.1	37.9	15.83	58.25	336	292	A	V	
Remark	<ol style="list-style-type: none"> No other spurious found. All results are PASS against Peak and Average limit line. Non restricted band limit is radio frequency level down 20db. The emission position marked as "-" means no suspected emission found with sufficient margin against limit line or noise floor only. 												



UHF RFID	Note	Frequency (MHz)	Level (dBμV/m)	Margin (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Path Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
UHF RFID 914.75MHz		2744.25	50.18	-23.82	74	73.7	28.1	8.6	60.22	400	101	P	H
		2744.25	45.7	-8.3	54	69.22	28.1	8.6	60.22	400	101	A	H
		3659	46.58	-27.42	74	65.3	29.68	10.09	58.49	373	60	P	H
		3659	42.58	-11.42	54	61.3	29.68	10.09	58.49	373	60	A	H
		4573.75	48.84	-25.16	74	62.81	31.7	12.04	57.71	400	327	P	H
		4573.75	43.74	-10.26	54	57.71	31.7	12.04	57.71	400	327	A	H
		7318	43.4	-30.6	74	50.77	36.83	14.25	58.45	-	-	P	H
		8232.75	44.24	-29.76	74	50.35	36.9	15.16	58.17	-	-	P	H
		9147.5	50.14	-23.86	74	54.3	37.99	16.21	58.36	389	282	P	H
		9147.5	42.65	-11.35	54	46.81	37.99	16.21	58.36	389	282	A	H
		2744.25	50.78	-23.22	74	74.3	28.1	8.6	60.22	306	218	P	V
		2744.25	46.48	-7.52	54	70	28.1	8.6	60.22	306	218	A	V
		3659	47.98	-26.02	74	66.7	29.68	10.09	58.49	301	64	P	V
		3659	45.1	-8.9	54	63.82	29.68	10.09	58.49	301	64	A	V
		4573.75	53.84	-20.16	74	67.81	31.7	12.04	57.71	339	17	P	V
		4573.75	50.75	-3.25	54	64.72	31.7	12.04	57.71	339	17	A	V
		7318	44.53	-29.47	74	51.9	36.83	14.25	58.45	-	-	P	V
		8232.75	44.58	-29.42	74	50.69	36.9	15.16	58.17	-	-	P	V
		9147.5	51.24	-22.76	74	55.4	37.99	16.21	58.36	306	296	P	V
		9147.5	45.94	-8.06	54	50.1	37.99	16.21	58.36	306	296	A	V
Remark	<ol style="list-style-type: none"> No other spurious found. All results are PASS against Peak and Average limit line. Non restricted band limit is radio frequency level down 20db. The emission position marked as "-" means no suspected emission found with sufficient margin against limit line or noise floor only. 												



UHF RFID	Note	Frequency (MHz)	Level (dBµV/m)	Margin (dB)	Limit Line (dBµV/m)	Read Level (dBµV)	Antenna Factor (dB/m)	Path Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
UHF RFID 927.25MHz		2781.75	46.55	-27.45	74	69.91	28.2	8.63	60.19	388	92	P	H
		2781.75	41.35	-12.65	54	64.71	28.2	8.63	60.19	388	92	A	H
		3709	45.17	-28.83	74	63.71	29.67	10.15	58.36	397	313	P	H
		3709	39.97	-14.03	54	58.51	29.67	10.15	58.36	397	313	A	H
		4636.25	48.06	-25.94	74	61.99	31.84	11.96	57.73	369	80	P	H
		4636.25	43.02	-10.98	54	56.95	31.84	11.96	57.73	369	80	A	H
		7418	43.83	-30.17	74	51.73	36.36	14.15	58.41	-	-	P	H
		8345.25	44.92	-29.08	74	50.89	36.9	15.25	58.12	-	-	P	H
		2781.75	49.55	-24.45	74	72.91	28.2	8.63	60.19	317	148	P	V
		2781.75	45.85	-8.15	54	69.21	28.2	8.63	60.19	317	148	A	V
		3709	47.07	-26.93	74	65.61	29.67	10.15	58.36	318	62	P	V
		3709	43.12	-10.88	54	61.66	29.67	10.15	58.36	318	62	A	V
		4636.25	53.12	-20.88	74	67.05	31.84	11.96	57.73	400	4	P	V
		4636.25	48.95	-5.05	54	62.88	31.84	11.96	57.73	400	4	A	V
		7418	43.7	-30.3	74	51.6	36.36	14.15	58.41	-	-	P	V
		8345.25	46	-28	74	51.97	36.9	15.25	58.12	-	-	P	V
Remark	<ol style="list-style-type: none"> No other spurious found. All results are PASS against Peak and Average limit line. Non restricted band limit is radio frequency level down 20db. The emission position marked as "-" means no suspected emission found with sufficient margin against limit line or noise floor only. 												



Note symbol

*	Fundamental Frequency which can be ignored. However, the level of any unwanted emissions shall not exceed the level of the fundamental frequency.
!	Test result is Margin line.
P/A	Peak or Average
H/V	Horizontal or Vertical



A calculation example for radiated spurious emission is shown as below:

BLE	Note	Frequency (MHz)	Level (dBµV/m)	Margin (dB)	Limit Line (dBµV/m)	Read Level (dBµV)	Antenna Factor (dB/m)	Path Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
BLE CH 00 2402MHz		2390	55.45	-18.55	74	54.51	32.22	4.58	35.86	103	308	P	H
		2390	43.54	-10.46	54	42.6	32.22	4.58	35.86	103	308	A	H

1. Path Loss(dB) = Cable loss(dB) + Filter loss(dB) + Attenuator loss(dB)
2. Level(dBµV/m) =
Antenna Factor(dB/m) + Path Loss(dB) + Read Level(dBµV) - Preamp Factor(dB)
3. Margin(dB) = Level(dBµV/m) – Limit Line(dBµV/m)

For Peak Limit @ 2390MHz:

1. Level(dBµV/m)
= Antenna Factor(dB/m) + Path Loss(dB) + Read Level(dBµV) - Preamp Factor(dB)
= 32.22(dB/m) + 4.58(dB) + 54.51(dBµV) – 35.86 (dB)
= 55.45 (dBµV/m)
2. Margin(dB)
= Level(dBµV/m) – Limit Line(dBµV/m)
= 55.45(dBµV/m) – 74(dBµV/m)
= -18.55(dB)

For Average Limit @ 2390MHz:

1. Level(dBµV/m)
= Antenna Factor(dB/m) + Path Loss(dB) + Read Level(dBµV) - Preamp Factor(dB)
= 32.22(dB/m) + 4.58(dB) + 42.6(dBµV) – 35.86 (dB)
= 43.54 (dBµV/m)
2. Margin(dB)
= Level(dBµV/m) – Limit Line(dBµV/m)
= 43.54(dBµV/m) – 54(dBµV/m)
= -10.46(dB)

Both peak and average measured complies with the limit line, so test result is “PASS”.



Appendix C. Radiated Spurious Emission Plots

Test Engineer :	Yuan Lee, Troye Hsieh and Sam Chou	Temperature :	20~22.4°C
		Relative Humidity :	57~68.6%



UHF RFID (LF @ 3m)

UHF RFID	UHF RFID	
	UHF RFID 902.75MHz	
	Horizontal	Vertical
Peak Avg.	<p>Site : 03CH11-HY Condition : QP 3m 2_BIL06_35414_231007 HORIZONTAL Prestest : 361310 Setting : 310</p>	<p>Site : 03CH11-HY Condition : QP 3m 2_BIL06_35414_231007 VERTICAL Prestest : 361310 Setting : 310</p>



UHF RFID	UHF RFID	
	UHF RFID 914.75MHz	
	Horizontal	Vertical
Peak Avg.	<p>Site : 03CH11-FY Condition : QP 3m_2_BILO6_35414_231007 HORIZONTAL Preheat : 361310 Setting : 300</p>	<p>Site : 03CH11-FY Condition : QP 3m_2_BILO6_35414_231007 VERTICAL Preheat : 361310 Setting : 300</p>

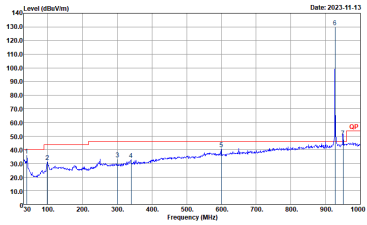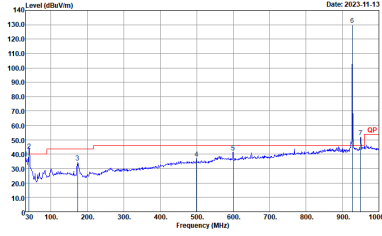

UHF RFID	UHF RFID	
	UHF RFID 927.25MHz	
	Horizontal	Vertical
<p>Peak Avg.</p>	 <p>Site : 03CH11-FY Condition : QP 3m_2_BILO6_35414_231007 HORIZONTAL Preheat : 361310 Setting : 310</p>	 <p>Site : 03CH11-FY Condition : QP 3m_2_BILO6_35414_231007 VERTICAL Preheat : 361310 Setting : 310</p>





UHF RFID (Harmonic @ 3m)

UHF RFID	UHF RFID	
	UHF RFID 902.75MHz	
	Horizontal	Vertical
Peak Avg.	<p>Site : 03CH11-FY Condition : PEAK_74_3m 91200_01620_230817 HORIZONTAL Pretest : 361310 Setting : 310</p>	<p>Site : 03CH11-FY Condition : PEAK_74_3m 91200_01620_230817 VERTICAL Pretest : 361310 Setting : 310</p>



UHF RFID	UHF RFID	
	UHF RFID 914.75MHz	
	Horizontal	Vertical
Peak Avg.	<p>Site : 03CH11-FY Condition : PEAK_74 3m 91200_01620_230817 HORIZONTAL Pretest : 361310 Setting : 300</p>	<p>Site : 03CH11-FY Condition : PEAK_74 3m 91200_01620_230817 VERTICAL Pretest : 361310 Setting : 300</p>

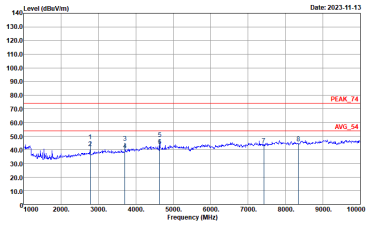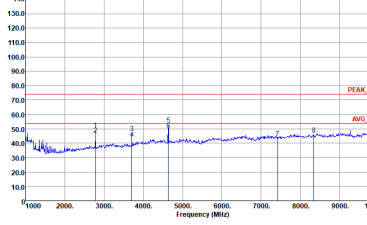

UHF RFID	UHF RFID	
	UHF RFID 927.25MHz	
	Horizontal	Vertical
<p>Peak Avg.</p>	 <p>Site : 03CH11-FY Condition : PEAK_74 3m 91200_01620_230817 HORIZONTAL Pretest : 361310 Setting : 310</p>	 <p>Site : 03CH11-FY Condition : PEAK_74 3m 91200_01620_230817 VERTICAL Pretest : 361310 Setting : 310</p>



Appendix D. Duty Cycle Plots

Band	Duty Cycle(%)	T(us)	1/T(kHz)	VBW Setting
UHF RFID	100.00	-	-	10Hz

