



# FCC SAR TEST REPORT

FCC ID : UZ7MC27BJ  
Equipment : Mobile computer  
Brand Name : Zebra  
Model Name : MC27BJ  
Applicant : Zebra Technologies Corporation  
1 Zebra Plaza, Holtsville, NY 11742  
Manufacturer : Zebra Technologies Corporation  
1 Zebra Plaza, Holtsville, NY 11742  
Standard : FCC 47 CFR Part 2 (2.1093)

The product was received on Jul. 14, 2020 and testing was started from Aug. 17, 2020 and completed on Sep. 07, 2020. We, SPORTON INTERNATIONAL INC., would like to declare that the tested sample provide by manufacturer and the test data has been evaluated in accordance with the test procedures given in 47 CFR Part 2.1093 and FCC KDB and has been pass the FCC requirement.

The test results in this report apply exclusively to the tested model / sample. Without written approval of SPORTON INTERNATIONAL INC. EMC & Wireless Communications Laboratory, the test report shall not be reproduced except in full.



Approved by: Cona Huang / Deputy Manager

**SPORTON INTERNATIONAL INC. EMC & Wireless Communications Laboratory**  
No. 52, Huaya 1st Rd., Guishan Dist., Taoyuan City, Taiwan (R.O.C.)



**Table of Contents**

**1. Statement of Compliance ..... 4**

**2. Guidance Applied..... 5**

**3. Equipment Under Test (EUT) Information ..... 6**

    3.1 General Information ..... 6

    3.2 General LTE SAR Test and Reporting Considerations ..... 7

**4. RF Exposure Limits..... 9**

    4.1 Uncontrolled Environment..... 9

    4.2 Controlled Environment..... 9

**5. Specific Absorption Rate (SAR).....10**

    5.1 Introduction .....10

    5.2 SAR Definition.....10

**6. System Description and Setup .....11**

    6.1 Test Site Location.....11

    6.2 E-Field Probe .....12

    6.3 Data Acquisition Electronics (DAE) .....12

    6.4 Phantom.....13

    6.5 Device Holder.....14

**7. Measurement Procedures .....15**

    7.1 Spatial Peak SAR Evaluation.....15

    7.2 Power Reference Measurement.....16

    7.3 Area Scan .....16

    7.4 Zoom Scan.....17

    7.5 Volume Scan Procedures.....17

    7.6 Power Drift Monitoring.....17

**8. Test Equipment List .....18**

**9. System Verification .....19**

    9.1 Tissue Simulating Liquids.....19

    9.2 Tissue Verification .....20

    9.3 System Performance Check Results.....21

**10. RF Exposure Positions .....22**

    10.1 Hand Exposure .....22

    10.2 Wireless Router.....22

**11. GSM/UMTS/LTE Output Power (Unit: dBm) .....23**

**12. WiFi/Bluetooth Output Power (Unit: dBm).....52**

**13. Antenna Location.....57**

**14. SAR Test Results .....58**

    14.1 Hotspot SAR .....60

    14.2 Body Worn Accessory SAR.....63

    14.3 Hand SAR .....66

    14.4 Repeated SAR Measurement .....68

**15. Simultaneous Transmission Analysis.....69**

    15.1 Hotspot Exposure Conditions.....70

    15.2 Body-Worn Accessory Exposure Conditions .....71

    15.3 Hand Exposure Conditions .....72

**16. Uncertainty Assessment .....73**

**17. References.....73**

**Appendix A. Plots of System Performance Check**

**Appendix B. Plots of High SAR Measurement**

**Appendix C. DASy Calibration Certificate**

**Appendix D. Test Setup Photos**





1. Statement of Compliance

The maximum results of Specific Absorption Rate (SAR) found during testing for Zebra Technologies Corporation, Mobile computer, MC27BJ, are as follows.

Table with columns: Equipment Class, Frequency Band, Highest SAR Summary (Hotspot, Body-worn, Hand), Highest Simultaneous Transmission (1g SAR, 10g SAR). Rows include Licensed (GSM850, GSM1900, WCDMA II, WCDMA IV, WCDMA V, LTE Band 2, LTE Band 4, LTE Band 5, LTE Band 7, LTE Band 38 / 41), DTS (2.4GHz WLAN), NII (5GHz WLAN), and DSS (Bluetooth). Summary values: 1.31 and 1.51.

Sporton Lab is accredited to ISO 17025 by Taiwan Accreditation Foundation (TAF code: 1190) and the FCC designation No. TW1190 under the FCC 2.948(e) by Mutual Recognition Agreement (MRA) in FCC test. This device is in compliance with Specific Absorption Rate (SAR) for general population/uncontrolled exposure limits (1g 1.6 W/kg for partial-body, 10g 4.0W/kg for hand) specified in FCC 47 CFR part 2 (2.1093) and ANSI/IEEE C95.1-1992, and had been tested in accordance with the measurement methods and procedures specified in IEEE 1528-2013 and FCC KDB publications.

Reviewed by: Jason Wang
Report Producer: Daisy Peng



## **2. Guidance Applied**

The Specific Absorption Rate (SAR) testing specification, method, and procedure for this device is in accordance with the following standards, if the KDB standards were not list within TAF approval, because it is include in the FCC KDB 447498.

- FCC 47 CFR Part 2 (2.1093)
- ANSI/IEEE C95.1-1992
- IEEE 1528-2013
- FCC KDB 865664 D01 SAR Measurement 100 MHz to 6 GHz v01r04
- FCC KDB 865664 D02 SAR Reporting v01r02
- FCC KDB 447498 D01 General RF Exposure Guidance v06
- FCC KDB 248227 D01 802.11 Wi-Fi SAR v02r02
- FCC KDB 941225 D01 3G SAR Procedures v03r01
- FCC KDB 941225 D05 SAR for LTE Devices v02r05
- FCC KDB 941225 D06 Hotspot Mode SAR v02r01



### 3. Equipment Under Test (EUT) Information

#### 3.1 General Information

Product Feature & Specification	
Equipment Name	Mobile computer
Brand Name	Zebra
Model Name	MC27BJ
FCC ID	UZ7MC27BJ
IMEI Code	355726110003259
Wireless Technology and Frequency Range	GSM850: 824.2 MHz ~ 848.8 MHz GSM1900: 1850.2 MHz ~ 1909.8 MHz WCDMA Band II: 1850 MHz ~ 1910 MHz WCDMA Band IV: 1710 MHz ~ 1755 MHz WCDMA Band V: 824 MHz ~ 849 MHz LTE Band 2: 1850 MHz ~ 1910 MHz LTE Band 4: 1710 MHz ~ 1755 MHz LTE Band 5: 824 MHz ~ 849 MHz LTE Band 7: 2500 MHz ~ 2570 MHz LTE Band 38: 2570 MHz ~ 2620 MHz LTE Band 41: 2496 MHz ~ 2690 MHz WLAN 2.4GHz Band: 2400 MHz ~ 2483.5 MHz WLAN 5.2GHz Band: 5150 MHz ~ 5250 MHz WLAN 5.3GHz Band: 5250 MHz ~ 5350 MHz WLAN 5.6GHz Band: 5470 MHz ~ 5725 MHz WLAN 5.8GHz Band: 5725 MHz ~ 5825 MHz Bluetooth: 2400 MHz ~ 2483.5 MHz
Mode	GSM/GPRS/EGPRS/DTM RMC 12.2Kbps HSDPA HSUPA DC-HSDPA LTE: QPSK, 16QAM, 64QAM WLAN: 802.11a/b/g/n/ac HT20/HT40/VHT20/VHT40/VHT80 Bluetooth BR/EDR/LE
HW Version	EV
SW Version	10-11-31.00-QG-U00-PRD-HEL-04
OS Version	Android 10
MFD	02JUN20
EUT Stage	Engineering sample

Specification of Accessories				
AC Adapter	Brand Name	Zebra	Part Number	PWR-WUA5V12W0US
Battery	Brand Name	Zebra	Part Number	BT-000418-10
USB Cable (TypeA plug to TypeC plug)	Brand Name	Zebra	Part Number	CBL-TC2X-USBC-01
Trigger Handle	Brand Name	Zebra	Part Number	TRG-MC2X-SNP1-01
Holster	Brand Name	Zebra	Part Number	11-69293-01R
Holster	Brand Name	Zebra	Part Number	SG-MC3021212-01R



**3.2 General LTE SAR Test and Reporting Considerations**

Summarized necessary items addressed in KDB 941225 D05 v02r05																																																															
FCC ID	UZ7MC27BJ																																																														
Equipment Name	Mobile computer																																																														
Operating Frequency Range of each LTE transmission band	LTE Band 2: 1850 MHz ~ 1910 MHz LTE Band 4: 1710 MHz ~ 1755 MHz LTE Band 5: 824 MHz ~ 849 MHz LTE Band 7: 2500 MHz ~ 2570 MHz LTE Band 38: 2570 MHz ~ 2620 MHz LTE Band 41: 2496 MHz ~ 2690 MHz																																																														
Channel Bandwidth	LTE Band 02: 1.4MHz, 3MHz, 5MHz, 10MHz, 15MHz, 20MHz LTE Band 04: 1.4MHz, 3MHz, 5MHz, 10MHz, 15MHz, 20MHz LTE Band 05: 1.4MHz, 3MHz, 5MHz, 10MHz LTE Band 07: 5MHz, 10MHz, 15MHz, 20MHz LTE Band 38: 5MHz, 10MHz, 15MHz, 20MHz LTE Band 41: 5MHz, 10MHz, 15MHz, 20MHz																																																														
uplink modulations used	QPSK / 16QAM / 64QAM																																																														
LTE Voice / Data requirements	Data only																																																														
LTE MPR permanently built-in by design	<p><b>Table 6.2.3-1: Maximum Power Reduction (MPR) for Power Class 1, 2 and 3</b></p> <table border="1"> <thead> <tr> <th rowspan="2">Modulation</th> <th colspan="6">Channel bandwidth / Transmission bandwidth (N<sub>RB</sub>)</th> <th rowspan="2">MPR (dB)</th> </tr> <tr> <th>1.4 MHz</th> <th>3.0 MHz</th> <th>5 MHz</th> <th>10 MHz</th> <th>15 MHz</th> <th>20 MHz</th> </tr> </thead> <tbody> <tr> <td>QPSK</td> <td>&gt; 5</td> <td>&gt; 4</td> <td>&gt; 8</td> <td>&gt; 12</td> <td>&gt; 16</td> <td>&gt; 18</td> <td>≤ 1</td> </tr> <tr> <td>16 QAM</td> <td>≤ 5</td> <td>≤ 4</td> <td>≤ 8</td> <td>≤ 12</td> <td>≤ 16</td> <td>≤ 18</td> <td>≤ 1</td> </tr> <tr> <td>16 QAM</td> <td>&gt; 5</td> <td>&gt; 4</td> <td>&gt; 8</td> <td>&gt; 12</td> <td>&gt; 16</td> <td>&gt; 18</td> <td>≤ 2</td> </tr> <tr> <td>64 QAM</td> <td>≤ 5</td> <td>≤ 4</td> <td>≤ 8</td> <td>≤ 12</td> <td>≤ 16</td> <td>≤ 18</td> <td>≤ 2</td> </tr> <tr> <td>64 QAM</td> <td>&gt; 5</td> <td>&gt; 4</td> <td>&gt; 8</td> <td>&gt; 12</td> <td>&gt; 16</td> <td>&gt; 18</td> <td>≤ 3</td> </tr> <tr> <td>256 QAM</td> <td colspan="6">≥ 1</td> <td>≤ 5</td> </tr> </tbody> </table>	Modulation	Channel bandwidth / Transmission bandwidth (N <sub>RB</sub> )						MPR (dB)	1.4 MHz	3.0 MHz	5 MHz	10 MHz	15 MHz	20 MHz	QPSK	> 5	> 4	> 8	> 12	> 16	> 18	≤ 1	16 QAM	≤ 5	≤ 4	≤ 8	≤ 12	≤ 16	≤ 18	≤ 1	16 QAM	> 5	> 4	> 8	> 12	> 16	> 18	≤ 2	64 QAM	≤ 5	≤ 4	≤ 8	≤ 12	≤ 16	≤ 18	≤ 2	64 QAM	> 5	> 4	> 8	> 12	> 16	> 18	≤ 3	256 QAM	≥ 1						≤ 5
Modulation	Channel bandwidth / Transmission bandwidth (N <sub>RB</sub> )						MPR (dB)																																																								
	1.4 MHz	3.0 MHz	5 MHz	10 MHz	15 MHz	20 MHz																																																									
QPSK	> 5	> 4	> 8	> 12	> 16	> 18	≤ 1																																																								
16 QAM	≤ 5	≤ 4	≤ 8	≤ 12	≤ 16	≤ 18	≤ 1																																																								
16 QAM	> 5	> 4	> 8	> 12	> 16	> 18	≤ 2																																																								
64 QAM	≤ 5	≤ 4	≤ 8	≤ 12	≤ 16	≤ 18	≤ 2																																																								
64 QAM	> 5	> 4	> 8	> 12	> 16	> 18	≤ 3																																																								
256 QAM	≥ 1						≤ 5																																																								
LTE A-MPR	In the base station simulator configuration, Network Setting value is set to NS_01 to disable A-MPR during SAR testing and the LTE SAR tests was transmitting on all TTI frames (Maximum TTI)																																																														
Spectrum plots for RB configuration	A properly configured base station simulator was used for the SAR and power measurement; therefore, spectrum plots for each RB allocation and offset configuration are not included in the SAR report.																																																														
Power reduction applied to satisfy SAR compliance	Yes, when operating in hotspot mode that LTE B2 / B4 power reduction applied to satisfy SAR compliance.																																																														



Transmission (H, M, L) channel numbers and frequencies in each LTE band												
LTE Band 2												
	Bandwidth 1.4 MHz		Bandwidth 3 MHz		Bandwidth 5 MHz		Bandwidth 10 MHz		Bandwidth 15 MHz		Bandwidth 20 MHz	
	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)
L	18607	1850.7	18615	1851.5	18625	1852.5	18650	1855	18675	1857.5	18700	1860
M	18900	1880	18900	1880	18900	1880	18900	1880	18900	1880	18900	1880
H	19193	1909.3	19185	1908.5	19175	1907.5	19150	1905	19125	1902.5	19100	1900
LTE Band 4												
	Bandwidth 1.4 MHz		Bandwidth 3 MHz		Bandwidth 5 MHz		Bandwidth 10 MHz		Bandwidth 15 MHz		Bandwidth 20 MHz	
	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)
L	19957	1710.7	19965	1711.5	19975	1712.5	20000	1715	20025	1717.5	20050	1720
M	20175	1732.5	20175	1732.5	20175	1732.5	20175	1732.5	20175	1732.5	20175	1732.5
H	20393	1754.3	20385	1753.5	20375	1752.5	20350	1750	20325	1747.5	20300	1745
LTE Band 5												
	Bandwidth 1.4 MHz		Bandwidth 3 MHz		Bandwidth 5 MHz		Bandwidth 10 MHz		Bandwidth 15 MHz		Bandwidth 20 MHz	
	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)
L	20407	824.7	20415	825.5	20425	826.5	20450	829	20450	829	20450	829
M	20525	836.5	20525	836.5	20525	836.5	20525	836.5	20525	836.5	20525	836.5
H	20643	848.3	20635	847.5	20625	846.5	20600	844	20600	844	20600	844
LTE Band 7												
	Bandwidth 5 MHz		Bandwidth 10 MHz		Bandwidth 15 MHz		Bandwidth 20 MHz		Bandwidth 15 MHz		Bandwidth 20 MHz	
	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)
L	20775	2502.5	20800	2505	20825	2507.5	20850	2510	20850	2510	20850	2510
M	21100	2535	21100	2535	21100	2535	21100	2535	21100	2535	21100	2535
H	21425	2567.5	21400	2565	21375	2562.5	21350	2560	21350	2560	21350	2560
LTE Band 38												
	Bandwidth 5 MHz		Bandwidth 10 MHz		Bandwidth 15 MHz		Bandwidth 20 MHz		Bandwidth 15 MHz		Bandwidth 20 MHz	
	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)
L	37775	2572.5	37800	2575	37825	2577.5	37850	2580	37850	2580	37850	2580
M	38000	2595	38000	2595	38000	2595	38000	2595	38000	2595	38000	2595
H	38225	2617.5	38200	2615	38175	2612.5	38150	2610	38150	2610	38150	2610
LTE Band 41												
	Bandwidth 5 MHz		Bandwidth 10 MHz		Bandwidth 15 MHz		Bandwidth 20 MHz		Bandwidth 15 MHz		Bandwidth 20 MHz	
	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)
L	39675	2498.5	39700	2501	39725	2503.5	39750	2506	39750	2506	39750	2506
L	40148	2545.8	40160	2547	40173	2548.3	40185	2549.5	40185	2549.5	40185	2549.5
M	40620	2593	40620	2593	40620	2593	40620	2593	40620	2593	40620	2593
H	41093	2640.3	41080	2639	41068	2637.8	41055	2636.5	41055	2636.5	41055	2636.5
H	41565	2687.5	41540	2685	41515	2682.5	41490	2680	41490	2680	41490	2680





4. RF Exposure Limits

4.1 Uncontrolled Environment

Uncontrolled Environments are defined as locations where there is the exposure of individuals who have no knowledge or control of their exposure. The general population/uncontrolled exposure limits are applicable to situations in which the general public may be exposed or in which persons who are exposed as a consequence of their employment may not be made fully aware of the potential for exposure or cannot exercise control over their exposure. Members of the general public would come under this category when exposure is not employment-related; for example, in the case of a wireless transmitter that exposes persons in its vicinity.

4.2 Controlled Environment

Controlled Environments are defined as locations where there is exposure that may be incurred by persons who are aware of the potential for exposure, (i.e. as a result of employment or occupation). In general, occupational/controlled exposure limits are applicable to situations in which persons are exposed as a consequence of their employment, who have been made fully aware of the potential for exposure and can exercise control over their exposure. The exposure category is also applicable when the exposure is of a transient nature due to incidental passage through a location where the exposure levels may be higher than the general population/uncontrolled limits, but the exposed person is fully aware of the potential for exposure and can exercise control over his or her exposure by leaving the area or by some other appropriate means.

Limits for Occupational/Controlled Exposure (W/kg)

Whole-Body	Partial-Body	Hands, Wrists, Feet and Ankles
0.4	8.0	20.0

Limits for General Population/Uncontrolled Exposure (W/kg)

Whole-Body	Partial-Body	Hands, Wrists, Feet and Ankles
0.08	1.6	4.0

1. Whole-Body SAR is averaged over the entire body, partial-body SAR is averaged over any 1gram of tissue defined as a tissue volume in the shape of a cube. SAR for hands, wrists, feet and ankles is averaged over any 10 grams of tissue defined as a tissue volume in the shape of a cube.

## **5. Specific Absorption Rate (SAR)**

### **5.1 Introduction**

SAR is related to the rate at which energy is absorbed per unit mass in an object exposed to a radio field. The SAR distribution in a biological body is complicated and is usually carried out by experimental techniques or numerical modeling. The standard recommends limits for two tiers of groups, occupational/controlled and general population/uncontrolled, based on a person's awareness and ability to exercise control over his or her exposure. In general, occupational/controlled exposure limits are higher than the limits for general population/uncontrolled.

### **5.2 SAR Definition**

The SAR definition is the time derivative (rate) of the incremental energy (dW) absorbed by (dissipated in) an incremental mass (dm) contained in a volume element (dv) of a given density ( $\rho$ ). The equation description is as below:

$$SAR = \frac{d}{dt} \left( \frac{dW}{dm} \right) = \frac{d}{dt} \left( \frac{dW}{\rho dv} \right)$$


SAR is expressed in units of Watts per kilogram (W/kg)

$$SAR = \frac{\sigma |E|^2}{\rho}$$

Where:  $\sigma$  is the conductivity of the tissue,  $\rho$  is the mass density of the tissue and E is the RMS electrical field strength.

## 6. System Description and Setup

The DASYS system used for performing compliance tests consists of the following items:

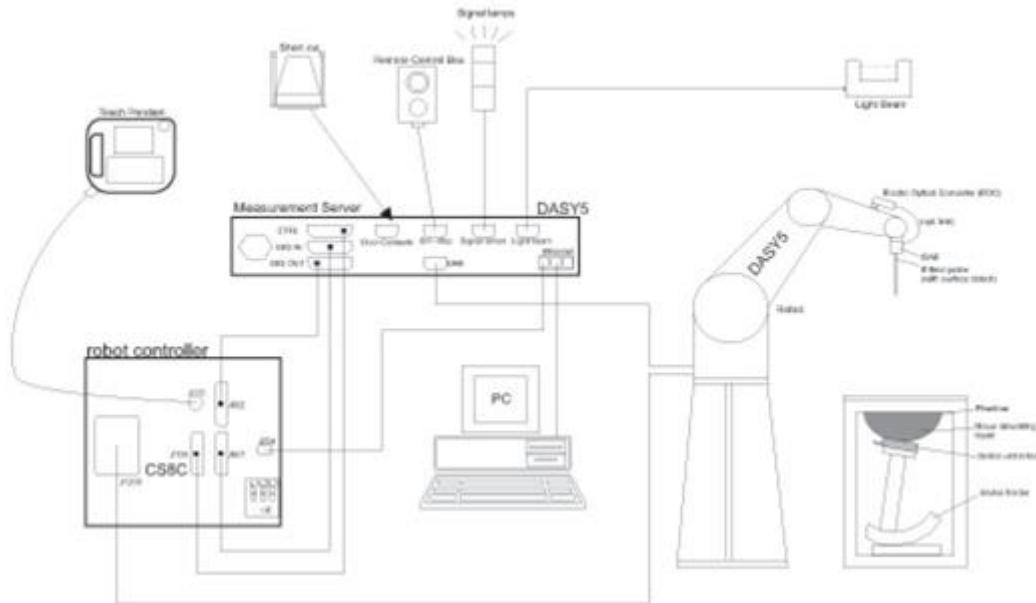

- A standard high precision 6-axis robot with controller, teach pendant and software. An arm extension for accommodating the data acquisition electronics (DAE).
- An isotropic Field probe optimized and calibrated for the targeted measurement.
- A data acquisition electronics (DAE) which performs the signal amplification, signal multiplexing, AD-conversion, offset measurements, mechanical surface detection, collision detection, etc. The unit is battery powered with standard or rechargeable batteries. The signal is optically transmitted to the EOC.
- The Electro-optical converter (EOC) performs the conversion from optical to electrical signals for the digital communication to the DAE. To use optical surface detection, a special version of the EOC is required. The EOC signal is transmitted to the measurement server.
- The function of the measurement server is to perform the time critical tasks such as signal filtering, control of the robot operation and fast movement interrupts.
- The Light Beam used is for probe alignment. This improves the (absolute) accuracy of the probe positioning.
- A computer running WinXP or Win7 and the DASYS5 software.
- Remote control and teach pendant as well as additional circuitry for robot safety such as warning lamps, etc.
- The phantom, the device holder and other accessories according to the targeted measurement.

### 6.1 Test Site Location


Sporton Lab and below test site location are accredited to ISO 17025 by Taiwan Accreditation Foundation (TAF code: 1190 and 0007) and the FCC designation No. TW1190 and TW0007 under the FCC 2.948(e) by Mutual Recognition Agreement (MRA) in FCC test.

Test Site	SPORTON INTERNATIONAL INC. EMC & Wireless Communications Laboratory			
Test Site Location	TW1190 No. 52, Huaya 1st Rd., Guishan Dist., Taoyuan City 333, CHINESE TAIPEI		TW0007 No. 58, Aly. 75, Ln. 564, Wehnuia 3rd, Rd., Guishan Dist., Taoyuan City, CHINESE TAIPEI	
	SAR01-HY	SAR03-HY	SAR08-HY	SAR09-HY
Test Site No.	SAR04-HY	SAR05-HY	SAR11-HY	SAR12-HY
	SAR06-HY	SAR10-HY		


**6.2 E-Field Probe**

The SAR measurement is conducted with the dosimetric probe (manufactured by SPEAG). The probe is specially designed and calibrated for use in liquid with high permittivity. The dosimetric probe has special calibration in liquid at different frequency. This probe has a built in optical surface detection system to prevent from collision with phantom.

**<ES3DV3 Probe>**

<b>Construction</b>	Symmetric design with triangular core Interleaved sensors Built-in shielding against static charges PEEK enclosure material (resistant to organic solvents, e.g., DGBE)	
<b>Frequency</b>	10 MHz – 4 GHz; Linearity: $\pm 0.2$ dB (30 MHz – 4 GHz)	
<b>Directivity</b>	$\pm 0.2$ dB in TSL (rotation around probe axis) $\pm 0.3$ dB in TSL (rotation normal to probe axis)	
<b>Dynamic Range</b>	5 $\mu$ W/g – >100 mW/g; Linearity: $\pm 0.2$ dB	
<b>Dimensions</b>	Overall length: 337 mm (tip: 20 mm) Tip diameter: 3.9 mm (body: 12 mm) Distance from probe tip to dipole centers: 3.0 mm	


**<EX3DV4 Probe>**

<b>Construction</b>	Symmetric design with triangular core Built-in shielding against static charges PEEK enclosure material (resistant to organic solvents, e.g., DGBE)	
<b>Frequency</b>	10 MHz – >6 GHz Linearity: $\pm 0.2$ dB (30 MHz – 6 GHz)	
<b>Directivity</b>	$\pm 0.3$ dB in TSL (rotation around probe axis) $\pm 0.5$ dB in TSL (rotation normal to probe axis)	
<b>Dynamic Range</b>	10 $\mu$ W/g – >100 mW/g Linearity: $\pm 0.2$ dB (noise: typically <1 $\mu$ W/g)	
<b>Dimensions</b>	Overall length: 337 mm (tip: 20 mm) Tip diameter: 2.5 mm (body: 12 mm) Typical distance from probe tip to dipole centers: 1 mm	

**6.3 Data Acquisition Electronics (DAE)**

The data acquisition electronics (DAE) consists of a highly sensitive electrometer-grade preamplifier with auto-zeroing, a channel and gain-switching multiplexer, a fast 16 bit AD-converter and a command decoder and control logic unit. Transmission to the measurement server is accomplished through an optical downlink for data and status information as well as an optical uplink for commands and the clock.


The input impedance of the DAE is 200 MOhm; the inputs are symmetrical and floating. Common mode rejection is above 80 dB.

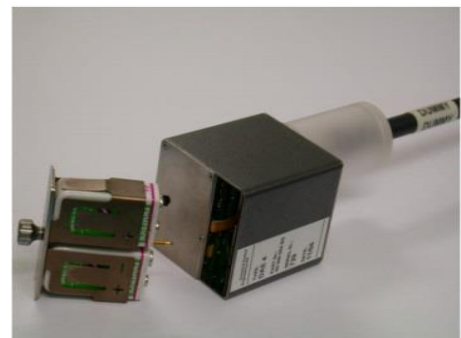

**Fig 5.1 Photo of DAE**


**6.4 Phantom**

**<SAM Twin Phantom>**

<b>Shell Thickness</b>	2 ± 0.2 mm; Center ear point: 6 ± 0.2 mm	
<b>Filling Volume</b>	Approx. 25 liters	
<b>Dimensions</b>	Length: 1000 mm; Width: 500 mm; Height: adjustable feet	
<b>Measurement Areas</b>	Left Hand, Right Hand, Flat Phantom	

The bottom plate contains three pair of bolts for locking the device holder. The device holder positions are adjusted to the standard measurement positions in the three sections. A white cover is provided to tap the phantom during off-periods to prevent water evaporation and changes in the liquid parameters. On the phantom top, three reference markers are provided to identify the phantom position with respect to the robot.

**<ELI Phantom>**
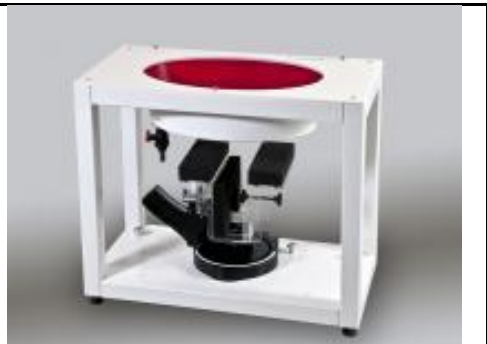
<b>Shell Thickness</b>	2 ± 0.2 mm (sagging: <1%)	
<b>Filling Volume</b>	Approx. 30 liters	
<b>Dimensions</b>	Major ellipse axis: 600 mm Minor axis: 400 mm	

The ELI phantom is intended for compliance testing of handheld and body-mounted wireless devices in the frequency range of 30 MHz to 6 GHz. ELI4 is fully compatible with standard and all known tissue simulating liquids.

## **6.5 Device Holder**

### **<Mounting Device for Hand-Held Transmitter>**

In combination with the Twin SAM V5.0/V5.0c or ELI phantoms, the Mounting Device for Hand-Held Transmitters enables rotation of the mounted transmitter device to specified spherical coordinates. At the heads, the rotation axis is at the ear opening. Transmitter devices can be easily and accurately positioned according to IEC 62209-1, IEEE 1528, FCC, or other specifications. The device holder can be locked for positioning at different phantom sections (left head, right head, flat). And upgrade kit to Mounting Device to enable easy mounting of wider devices like big smart-phones, e-books, small tablets, etc. It holds devices with width up to 140 mm.



Mounting Device for Hand-Held Transmitters



Mounting Device Adaptor for Wide-Phones

### **<Mounting Device for Laptops and other Body-Worn Transmitters>**

The extension is lightweight and made of POM, acrylic glass and foam. It fits easily on the upper part of the mounting device in place of the phone positioned. The extension is fully compatible with the SAM Twin and ELI phantoms.



Mounting Device for Laptops

## **7. Measurement Procedures**

The measurement procedures are as follows:

### <Conducted power measurement>

- (a) For WWAN power measurement, use base station simulator to configure EUT WWAN transmission in conducted connection with RF cable, at maximum power in each supported wireless interface and frequency band.
- (b) Read the WWAN RF power level from the base station simulator.
- (c) For WLAN/BT power measurement, use engineering software to configure EUT WLAN/BT continuously transmission, at maximum RF power in each supported wireless interface and frequency band
- (d) Connect EUT RF port through RF cable to the power meter, and measure WLAN/BT output power

### <SAR measurement>

- (a) Use base station simulator to configure EUT WWAN transmission in radiated connection, and engineering software to configure EUT WLAN/BT continuously transmission, at maximum RF power, in the highest power channel.
- (b) Place the EUT in the positions as Appendix D demonstrates.
- (c) Set scan area, grid size and other setting on the DASY software.
- (d) Measure SAR results for the highest power channel on each testing position.
- (e) Find out the largest SAR result on these testing positions of each band
- (f) Measure SAR results for other channels in worst SAR testing position if the reported SAR of highest power channel is larger than 0.8 W/kg

According to the test standard, the recommended procedure for assessing the peak spatial-average SAR value consists of the following steps:

- (a) Power reference measurement
- (b) Area scan
- (c) Zoom scan
- (d) Power drift measurement

### **7.1 Spatial Peak SAR Evaluation**

The procedure for spatial peak SAR evaluation has been implemented according to the test standard. It can be conducted for 1g and 10g, as well as for user-specific masses. The DASY software includes all numerical procedures necessary to evaluate the spatial peak SAR value.

The base for the evaluation is a "cube" measurement. The measured volume must include the 1g and 10g cubes with the highest averaged SAR values. For that purpose, the center of the measured volume is aligned to the interpolated peak SAR value of a previously performed area scan.

The entire evaluation of the spatial peak values is performed within the post-processing engine (SEMCAD). The system always gives the maximum values for the 1g and 10g cubes. The algorithm to find the cube with highest averaged SAR is divided into the following stages:

- (a) Extraction of the measured data (grid and values) from the Zoom Scan
- (b) Calculation of the SAR value at every measurement point based on all stored data (A/D values and measurement parameters)
- (c) Generation of a high-resolution mesh within the measured volume
- (d) Interpolation of all measured values from the measurement grid to the high-resolution grid
- (e) Extrapolation of the entire 3-D field distribution to the phantom surface over the distance from sensor to surface
- (f) Calculation of the averaged SAR within masses of 1g and 10g

**7.2 Power Reference Measurement**

The Power Reference Measurement and Power Drift Measurements are for monitoring the power drift of the device under test in the batch process. The minimum distance of probe sensors to surface determines the closest measurement point to phantom surface. This distance cannot be smaller than the distance of sensor calibration points to probe tip as defined in the probe properties.

**7.3 Area Scan**

The area scan is used as a fast scan in two dimensions to find the area of high field values, before doing a fine measurement around the hot spot. The sophisticated interpolation routines implemented in DASY software can find the maximum found in the scanned area, within a range of the global maximum. The range (in dB) is specified in the standards for compliance testing. For example, a 2 dB range is required in IEEE standard 1528 and IEC 62209 standards, whereby 3 dB is a requirement when compliance is assessed in accordance with the ARIB standard (Japan), if only one zoom scan follows the area scan, then only the absolute maximum will be taken as reference. For cases where multiple maximums are detected, the number of zoom scans has to be increased accordingly.

Area scan parameters extracted from FCC KDB 865664 D01v01r04 SAR measurement 100 MHz to 6 GHz.

	≤ 3 GHz	> 3 GHz
Maximum distance from closest measurement point (geometric center of probe sensors) to phantom surface	5 ± 1 mm	$\frac{1}{2} \cdot \delta \cdot \ln(2) \pm 0.5$ mm
Maximum probe angle from probe axis to phantom surface normal at the measurement location	30° ± 1°	20° ± 1°
Maximum area scan spatial resolution: $\Delta x_{Area}, \Delta y_{Area}$	≤ 2 GHz: ≤ 15 mm 2 – 3 GHz: ≤ 12 mm	3 – 4 GHz: ≤ 12 mm 4 – 6 GHz: ≤ 10 mm
	When the x or y dimension of the test device, in the measurement plane orientation, is smaller than the above, the measurement resolution must be ≤ the corresponding x or y dimension of the test device with at least one measurement point on the test device.	



**7.4 Zoom Scan**

Zoom scans are used assess the peak spatial SAR values within a cubic averaging volume containing 1 gram and 10 gram of simulated tissue. The zoom scan measures points (refer to table below) within a cube shoes base faces are centered on the maxima found in a preceding area scan job within the same procedure. When the measurement is done, the zoom scan evaluates the averaged SAR for 1 gram and 10 gram and displays these values next to the job's label.

Zoom scan parameters extracted from FCC KDB 865664 D01v01r04 SAR measurement 100 MHz to 6 GHz.

		$\leq 3$ GHz	$> 3$ GHz	
Maximum zoom scan spatial resolution: $\Delta x_{Zoom}, \Delta y_{Zoom}$		$\leq 2$ GHz: $\leq 8$ mm 2 – 3 GHz: $\leq 5$ mm*	3 – 4 GHz: $\leq 5$ mm* 4 – 6 GHz: $\leq 4$ mm*	
Maximum zoom scan spatial resolution, normal to phantom surface	uniform grid: $\Delta z_{Zoom}(n)$	$\leq 5$ mm	3 – 4 GHz: $\leq 4$ mm 4 – 5 GHz: $\leq 3$ mm 5 – 6 GHz: $\leq 2$ mm	
	graded grid	$\Delta z_{Zoom}(1)$ : between 1 <sup>st</sup> two points closest to phantom surface	$\leq 4$ mm	3 – 4 GHz: $\leq 3$ mm 4 – 5 GHz: $\leq 2.5$ mm 5 – 6 GHz: $\leq 2$ mm
		$\Delta z_{Zoom}(n>1)$ : between subsequent points	$\leq 1.5 \cdot \Delta z_{Zoom}(n-1)$	
Minimum zoom scan volume	x, y, z	$\geq 30$ mm	3 – 4 GHz: $\geq 28$ mm 4 – 5 GHz: $\geq 25$ mm 5 – 6 GHz: $\geq 22$ mm	
<p>Note: <math>\delta</math> is the penetration depth of a plane-wave at normal incidence to the tissue medium; see draft standard IEEE P1528-2011 for details.</p> <p>* When zoom scan is required and the <i>reported</i> SAR from the <i>area scan based 1-g SAR estimation</i> procedures of KDB 447498 is <math>\leq 1.4</math> W/kg, <math>\leq 8</math> mm, <math>\leq 7</math> mm and <math>\leq 5</math> mm zoom scan resolution may be applied, respectively, for 2 GHz to 3 GHz, 3 GHz to 4 GHz and 4 GHz to 6 GHz.</p>				

**7.5 Volume Scan Procedures**

The volume scan is used for assess overlapping SAR distributions for antennas transmitting in different frequency bands. It is equivalent to an oversized zoom scan used in standalone measurements. The measurement volume will be used to enclose all the simultaneous transmitting antennas. For antennas transmitting simultaneously in different frequency bands, the volume scan is measured separately in each frequency band. In order to sum correctly to compute the 1g aggregate SAR, the EUT remain in the same test position for all measurements and all volume scan use the same spatial resolution and grid spacing. When all volume scan were completed, the software, SEMCAD postprocessor can combine and subsequently superpose these measurement data to calculating the multiband SAR.

**7.6 Power Drift Monitoring**

All SAR testing is under the EUT install full charged battery and transmit maximum output power. In DASy measurement software, the power reference measurement and power drift measurement procedures are used for monitoring the power drift of EUT during SAR test. Both these procedures measure the field at a specified reference position before and after the SAR testing. The software will calculate the field difference in dB. If the power drifts more than 5%, the SAR will be retested.



### 8. Test Equipment List

Manufacturer	Name of Equipment	Type/Model	Serial Number	Calibration	
				Last Cal.	Due Date
SPEAG	750MHz System Validation Kit <sup>(2)</sup>	D750V3	1107	Mar. 08, 2019	Mar. 06, 2021
SPEAG	835MHz System Validation Kit	D835V2	4d167	Nov. 25, 2019	Nov. 24, 2020
SPEAG	1750MHz System Validation Kit <sup>(2)</sup>	D1750V2	1112	Mar. 07, 2019	Mar. 05, 2021
SPEAG	1900MHz System Validation Kit <sup>(2)</sup>	D1900V2	5d041	Sep. 11, 2018	Sep. 09, 2020
SPEAG	2450MHz System Validation Kit	D2450V2	929	Nov. 21, 2019	Nov. 20, 2020
SPEAG	2600MHz System Validation Kit <sup>(2)</sup>	D2600V2	1078	Mar. 06, 2019	Mar. 04, 2021
SPEAG	5GHz System Validation Kit <sup>(2)</sup>	D5GHzV2	1006	Sep. 27, 2018	Sep. 25, 2020
SPEAG	Data Acquisition Electronics	DAE4	316	Dec. 20, 2019	Dec. 19, 2020
SPEAG	Data Acquisition Electronics	DAE3	495	Jul. 21, 2020	Jul. 20, 2021
SPEAG	Data Acquisition Electronics	DAE4	1424	Jan. 24, 2020	Jan. 23, 2021
SPEAG	Dosimetric E-Field Probe	ES3DV3	3124	Dec. 18, 2019	Dec. 17, 2020
SPEAG	Dosimetric E-Field Probe	EX3DV4	7306	Jul. 24, 2020	Jul. 23, 2021
RCPTWN	Thermometer	HTC-1	TM685-1	Nov. 12, 2019	Nov. 11, 2020
RCPTWN	Thermometer	HTC-1	TM560-2	Nov. 12, 2019	Nov. 11, 2020
Anritsu	Radio Communication Analyzer	MT8821C	6201341950	Oct. 31, 2019	Oct. 30, 2020
Agilent	Wireless Communication Test Set	E5515C	MY50267236	Mar. 18, 2020	Mar. 17, 2021
R&S	BT Base Station	CBT	100815	Feb. 15, 2020	Feb. 14, 2021
SPEAG	Device Holder	N/A	N/A	N/A	N/A
Anritsu	Signal Generator	MG3710A	6201502524	Nov. 20, 2019	Nov. 19, 2020
Agilent	ENA Network Analyzer	E5071C	MY46101588	Jun. 10, 2020	Jun. 09, 2021
SPEAG	Dielectric Probe Kit	DAK-3.5	1146	Jul. 22, 2020	Jul. 21, 2021
LINE SEIKI	Digital Thermometer	DTM3000-spezial	2942	Nov. 18, 2019	Nov. 17, 2020
Anritsu	Power Meter	ML2495A	0932001	Oct. 03, 2019	Oct. 02, 2020
Anritsu	Power Sensor	MA2411B	0846202	Oct. 03, 2019	Oct. 02, 2020
Anritsu	Power Meter	ML2495A	1218006	Oct. 14, 2019	Oct. 13, 2020
Anritsu	Power Sensor	MA2411B	1207363	Oct. 14, 2019	Oct. 13, 2020
Anritsu	Spectrum Analyzer	MS2830A	6201396378	Jun. 30, 2020	Jun. 29, 2021
Anritsu	Spectrum Analyzer	N9010A	MY53470118	Mar. 12, 2020	Mar. 11, 2021
Mini-Circuits	Power Amplifier	ZVE-8G+	6418	Oct. 16, 2019	Oct. 15, 2020
Mini-Circuits	Power Amplifier	ZHL-42W+	321501827	Aug. 06, 2020	Aug. 05, 2021
ATM	Dual Directional Coupler	C122H-10	P610410z-02	Note 1	
Woken	Attenuator 1	WK0602-XX	N/A	Note 1	
PE	Attenuator 2	PE7005-10	N/A	Note 1	
PE	Attenuator 3	PE7005- 3	N/A	Note 1	


**General Note:**

1. Prior to system verification and validation, the path loss from the signal generator to the system check source and the power meter, which includes the amplifier, cable, attenuator and directional coupler, was measured by the network analyzer. The reading of the power meter was offset by the path loss difference between the path to the power meter and the path to the system check source to monitor the actual power level fed to the system check source.
2. The dipole calibration interval can be extended to 3 years with justification according to KDB 865664 D01. The dipoles are also not physically damaged, or repaired during the interval. The justification data in appendix C can be found which the return loss is < -20dB, within 20% of prior calibration, the impedance is within 5 ohm of prior calibration for each dipole.


## **9. System Verification**

### **9.1 Tissue Simulating Liquids**

For the measurement of the field distribution inside the SAM phantom with DASY, the phantom must be filled with around 25 liters of homogeneous body tissue simulating liquid. For head SAR testing, the liquid height from the ear reference point (ERP) of the phantom to the liquid top surface is larger than 15 cm, which is shown in Fig. 10.1. For body SAR testing, the liquid height from the center of the flat phantom to the liquid top surface is larger than 15 cm, which is shown in Fig. 10.2.

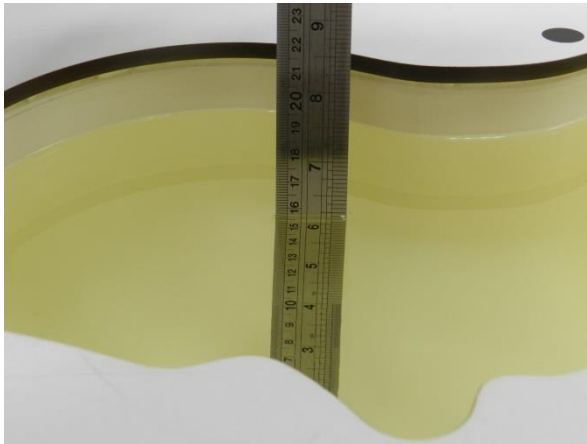

**Fig 10.1** Photo of Liquid Height for Head SAR

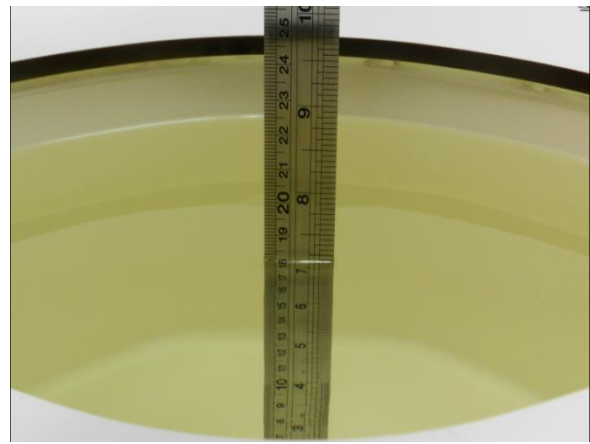

**Fig 10.2** Photo of Liquid Height for Body SAR

### 9.2 Tissue Verification

The following tissue formulations are provided for reference only as some of the parameters have not been thoroughly verified. The composition of ingredients may be modified accordingly to achieve the desired target tissue parameters required for routine SAR evaluation.

Frequency (MHz)	Water (%)	Sugar (%)	Cellulose (%)	Salt (%)	Preventol (%)	DGBE (%)	Conductivity ( $\sigma$ )	Permittivity ( $\epsilon_r$ )
750	41.1	57.0	0.2	1.4	0.2	0	0.89	41.9
835	40.3	57.9	0.2	1.4	0.2	0	0.90	41.5
900	40.3	57.9	0.2	1.4	0.2	0	0.97	41.5
1800, 1900, 2000	55.2	0	0	0.3	0	44.5	1.40	40.0
2450	55.0	0	0	0	0	45.0	1.80	39.2
2600	54.8	0	0	0.1	0	45.1	1.96	39.0

#### Simulating Liquid for 5GHz, Manufactured by SPEAG

Ingredients	(% by weight)
Water	64~78%
Mineral oil	11~18%
Emulsifiers	9~15%
Additives and Salt	2~3%

#### <Tissue Dielectric Parameter Check Results>


Frequency (MHz)	Liquid Temp. (°C)	Conductivity ( $\sigma$ )	Permittivity ( $\epsilon_r$ )	Conductivity Target ( $\sigma$ )	Permittivity Target ( $\epsilon_r$ )	Delta ( $\sigma$ ) (%)	Delta ( $\epsilon_r$ ) (%)	Limit (%)	Date
750	22.4	0.897	42.698	0.89	41.90	0.79	1.90	±5	2020/9/2
835	22.4	0.871	41.809	0.90	41.50	-3.22	0.74	±5	2020/8/17
835	22.4	0.877	41.946	0.90	41.50	-2.56	1.07	±5	2020/9/3
1750	22.4	1.360	40.072	1.37	40.10	-0.73	-0.07	±5	2020/9/1
1900	22.4	1.453	39.427	1.40	40.00	3.79	-1.43	±5	2020/9/1
2450	22.7	1.819	38.702	1.80	39.20	1.06	-1.27	±5	2020/9/5
2600	22.5	1.958	39.151	1.96	39.00	-0.10	0.39	±5	2020/8/18
2600	22.4	2.003	39.158	1.96	39.00	2.19	0.41	±5	2020/9/4
5250	22.7	4.592	36.821	4.71	35.95	-2.51	2.42	±5	2020/9/7
5600	22.7	4.952	36.271	5.07	35.50	-2.33	2.17	±5	2020/9/7
5750	22.7	5.117	36.144	5.22	35.35	-1.97	2.25	±5	2020/9/7

**9.3 System Performance Check Results**

Comparing to the original SAR value provided by SPEAG, the verification data should be within its specification of 10 %. Below table shows the target SAR and measured SAR after normalized to 1W input power. The table below indicates the system performance check can meet the variation criterion and the plots can be referred to Appendix A of this report.

Date	Frequency (MHz)	Input Power (mW)	Dipole S/N	Probe S/N	DAE S/N	Measured 1g SAR (W/kg)	Targeted 1g SAR (W/kg)	Normalized 1g SAR (W/kg)	Deviation (%)
2020/9/2	750	250	D750V3-1107	ES3DV3 - SN3124	DAE4 Sn316	2.05	8.32	8.2	-1.44
2020/8/17	835	250	D835V2-4d167	EX3DV4 - SN7306	DAE4 Sn1424	2.47	9.55	9.88	3.46
2020/9/3	835	250	D835V2-4d167	ES3DV3 - SN3124	DAE4 Sn316	2.27	9.55	9.08	-4.92
2020/9/1	1750	250	D1750V2-1112	ES3DV3 - SN3124	DAE4 Sn316	8.89	36.70	35.56	-3.11
2020/9/1	1900	250	D1900V2-5d041	ES3DV3 - SN3124	DAE4 Sn316	9.87	40.20	39.48	-1.79
2020/9/5	2450	250	D2450V2-929	ES3DV3 - SN3124	DAE4 Sn316	12.80	53.10	51.2	-3.58
2020/8/18	2600	250	D2600V2-1078	EX3DV4 - SN7306	DAE4 Sn1424	14.70	57.60	58.8	2.08
2020/9/4	2600	250	D2600V2-1078	ES3DV3 - SN3124	DAE4 Sn316	13.60	57.60	54.4	-5.56
2020/9/7	5250	100	D5GHzV2-1006-5250	EX3DV4 - SN7306	DAE3 Sn495	8.54	80.70	85.4	5.82
2020/9/7	5600	100	D5GHzV2-1006-5600	EX3DV4 - SN7306	DAE3 Sn495	8.87	83.30	88.7	6.48
2020/9/7	5750	100	D5GHzV2-1006-5750	EX3DV4 - SN7306	DAE3 Sn495	8.13	80.40	81.3	1.12

Date	Frequency (MHz)	Input Power (mW)	Dipole S/N	Probe S/N	DAE S/N	Measured 10g SAR (W/kg)	Targeted 10g SAR (W/kg)	Normalized 10g SAR (W/kg)	Deviation (%)
2020/9/2	750	250	D750V3-1107	ES3DV3 - SN3124	DAE4 Sn316	1.38	5.61	5.52	-1.60
2020/8/17	835	250	D835V2-4d167	EX3DV4 - SN7306	DAE4 Sn1424	1.63	6.21	6.52	4.99
2020/9/3	835	250	D835V2-4d167	ES3DV3 - SN3124	DAE4 Sn316	1.50	6.21	6	-3.38
2020/9/1	1750	250	D1750V2-1112	ES3DV3 - SN3124	DAE4 Sn316	4.79	19.40	19.16	-1.24
2020/9/1	1900	250	D1900V2-5d041	ES3DV3 - SN3124	DAE4 Sn316	5.11	21.20	20.44	-3.58
2020/9/5	2450	250	D2450V2-929	ES3DV3 - SN3124	DAE4 Sn316	5.84	24.70	23.36	-5.43
2020/8/18	2600	250	D2600V2-1078	EX3DV4 - SN7306	DAE4 Sn1424	6.41	25.50	25.64	0.55
2020/9/4	2600	250	D2600V2-1078	ES3DV3 - SN3124	DAE4 Sn316	6.36	25.50	25.44	-0.24
2020/9/7	5250	100	D5GHzV2-1006-5250	EX3DV4 - SN7306	DAE3 Sn495	2.46	23.20	24.6	6.03
2020/9/7	5600	100	D5GHzV2-1006-5600	EX3DV4 - SN7306	DAE3 Sn495	2.49	23.80	24.9	4.62
2020/9/7	5750	100	D5GHzV2-1006-5750	EX3DV4 - SN7306	DAE3 Sn495	2.29	22.90	22.9	0.00

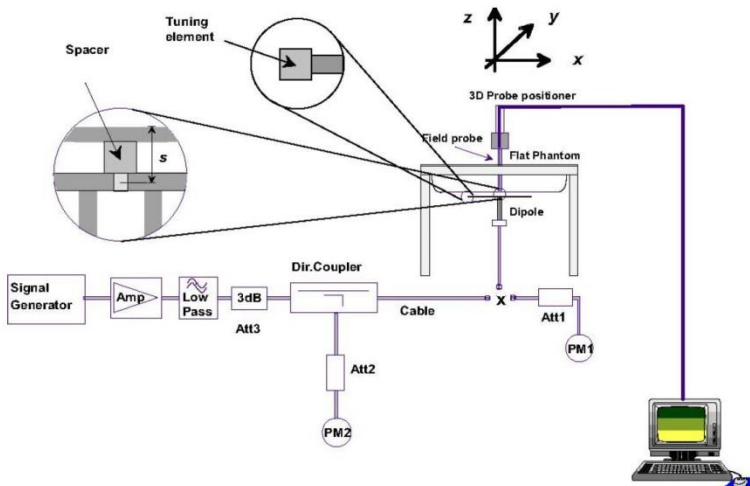

**Fig 8.3.1 System Performance Check Setup**



**Fig 8.3.2 Setup Photo**



## **10. RF Exposure Positions**

### **10.1 Hand Exposure**

For smart phones with a display diagonal dimension > 15.0 cm or an overall diagonal dimension > 16.0 cm that provide similar mobile web access and multimedia support found in mini-tablets or UMPC mini-tablets that support voice calls next to the ear, According to KDB648474 D04v01r03, the following phablet procedures should be applied to evaluate SAR compliance for each applicable wireless modes and frequency band. Devices marketed as phablets, regardless of form factors and operating characteristics must be tested as a phablet to determine SAR compliance

1. The normally required head and body-worn accessory SAR test procedures for handsets, including hotspot mode, must be applied.
2. The UMPC mini-tablet procedures must also be applied to test the SAR of all surfaces and edges with an antenna located at  $\leq 25$  mm from that surface or edge, in direct contact with a flat phantom, for 10-g extremity SAR according to the body-equivalent tissue dielectric parameters in KDB 865664 to address interactive hand use exposure conditions.6 The UMPC mini-tablet 1-g SAR at 5 mm is not required. When hotspot mode applies, 10-g extremity SAR is required only for the surfaces and edges with hotspot mode 1-g reported SAR > 1.2 W/kg.

### **10.2 Wireless Router**

Some battery-operated handsets have the capability to transmit and receive user through simultaneous transmission of WIFI simultaneously with a separate licensed transmitter. The FCC has provided guidance in FCC KDB Publication 941225 D06 v02r01 where SAR test considerations for handsets (L x W  $\geq 9$  cm x 5 cm) are based on a composite test separation distance of 10mm from the front, back and edges of the device containing transmitting antennas within 2.5cm of their edges, determined from general mixed use conditions for this type of devices. Since the hotspot SAR results may overlap with the body-worn accessory SAR requirements, the more conservative configurations can be considered, thus excluding some body-worn accessory SAR tests.

When the user enables the personal wireless router functions for the handset, actual operations include simultaneous transmission of both the WIFI transmitter and another licensed transmitter. Both transmitters often do not transmit at the same transmitting frequency and thus cannot be evaluated for SAR under actual use conditions due to the limitations of the SAR assessment probes. Therefore, SAR must be evaluated for each frequency transmission and mode separately and spatially summed with the WIFI transmitter according to FCC KDB Publication 447498 D01v06 publication procedures. The "Portable Hotspot" feature on the handset was NOT activated during SAR assessments, to ensure the SAR measurements were evaluated for a single transmission frequency RF signal at a time.



**11. GSM/UMTS/LTE Output Power (Unit: dBm)**

**<GSM Conducted Power>**

**General Note:**

1. Per KDB 447498 D01v06, the maximum output power channel is used for SAR testing and for further SAR test reduction.
2. Per KDB 941225 D01v03r01, for SAR test reduction for GPRS / EDGE / DTM modes is determined by the source-based time-averaged output power including tune-up tolerance. The mode with highest specified time-averaged output power should be tested for SAR compliance in the applicable exposure conditions. For modes with the same specified maximum output power and tolerance, the higher number time-slot configuration should be tested. Therefore, the GPRS (4Tx slots) for GSM850/GSM1900 is considered as the primary mode.
3. Other configurations of GPRS / EDGE / DTM are considered as secondary modes. The 3G SAR test reduction procedure is applied, when the maximum output power and tune-up tolerance specified for production units in a secondary mode is  $\leq \frac{1}{4}$  dB higher than the primary mode, SAR measurement is not required for the secondary mode

GSM850		Burst Average Power (dBm)			Tune-up Limit (dBm)	Frame-Average Power (dBm)			Tune-up Limit (dBm)
TX Channel		128	189	251		128	189	251	
Frequency (MHz)		824.2	836.4	848.8		824.2	836.4	848.8	
GPRS 1 Tx slot		33.57	33.75	33.70	34.00	24.57	24.75	24.70	25.00
GPRS 2 Tx slots		30.75	30.89	30.85	31.00	24.75	24.89	24.85	25.00
GPRS 3 Tx slots		28.87	28.98	28.94	29.00	24.61	24.72	24.68	24.74
GPRS 4 Tx slots		27.87	27.97	27.97	28.00	24.87	24.97	24.97	25.00
EDGE 1 Tx slot		27.61	27.81	27.77	28.00	18.61	18.81	18.77	19.00
EDGE 2 Tx slots		24.35	24.55	24.55	25.00	18.35	18.55	18.55	19.00
EDGE 3 Tx slots		22.52	22.69	22.64	23.00	18.26	18.43	18.38	18.74
EDGE 4 Tx slots		21.36	21.55	21.53	22.00	18.36	18.55	18.53	19.00
DTM Multi-slot class 5	GSM 1 Tx slot	30.71	30.83	30.80	31.00	24.70	24.82	24.79	24.98
	GPRS 1 Tx slot	30.73	30.86	30.82	31.00				
DTM Multi-slot class 9	GSM 1 Tx slot	30.70	30.88	30.83	31.00	24.66	24.85	24.80	24.98
	GPRS 1 Tx slot	30.66	30.87	30.81	31.00				
DTM Multi-slot class 11	GSM 1 Tx slot	28.83	28.98	28.91	29.00	24.56	24.67	24.66	24.74
	GPRS 2 Tx slots	28.81	28.90	28.92	29.00				
DTM Multi-slot class 5	GSM 1 Tx slot	30.67	30.81	30.76	31.00	22.54	22.69	22.65	22.94
	EDGE 1 Tx slot	24.31	24.50	24.50	25.00				
DTM Multi-slot class 9	GSM 1 Tx slot	30.67	30.85	30.82	31.00	22.54	22.71	22.70	22.94
	EDGE 1 Tx slot	24.30	24.45	24.49	25.00				
DTM Multi-slot class 11	GSM 1 Tx slot	28.77	28.96	28.91	29.00	21.42	21.58	21.55	21.74
	EDGE 2 Tx slots	22.52	22.61	22.62	23.00				



GSM1900		Burst Average Power (dBm)			Tune-up Limit (dBm)	Frame-Average Power (dBm)			Tune-up Limit (dBm)
TX Channel		512	661	810		512	661	810	
Frequency (MHz)		1850.2	1880	1909.8		1850.2	1880	1909.8	
GPRS 1 Tx slot		31.11	31.20	31.30	31.50	22.11	22.20	22.30	22.50
GPRS 2 Tx slots		28.39	28.41	28.37	28.50	22.39	22.41	22.37	22.50
GPRS 3 Tx slots		26.26	26.32	26.33	26.50	22.00	22.06	22.07	22.24
GPRS 4 Tx slots		25.19	25.22	25.19	25.50	22.19	22.22	22.19	22.50
EDGE 1 Tx slot		27.04	27.10	27.10	27.50	18.04	18.10	18.10	18.50
EDGE 2 Tx slots		24.20	24.22	24.20	24.50	18.20	18.22	18.20	18.50
EDGE 3 Tx slots		21.96	21.96	21.94	22.50	17.70	17.70	17.68	18.24
EDGE 4 Tx slots		21.22	21.22	21.22	21.50	18.22	18.22	18.22	18.50
DTM Multi-slot class 5	GSM 1 Tx slot	28.30	28.34	28.34	28.50	22.29	22.32	22.29	22.48
	GPRS 1 Tx slot	28.33	28.34	28.29	28.50				
DTM Multi-slot class 9	GSM 1 Tx slot	28.34	28.31	28.33	28.50	22.33	22.31	22.31	22.48
	GPRS 1 Tx slot	28.37	28.36	28.33	28.50				
DTM Multi-slot class 11	GSM 1 Tx slot	26.19	26.27	26.25	26.50	21.96	22.03	22.00	22.24
	GPRS 2 Tx slots	26.24	26.30	26.26	26.50				
DTM Multi-slot class 5	GSM 1 Tx slot	28.29	28.38	28.36	28.50	20.67	20.75	20.74	20.92
	EDGE 1 Tx slot	24.14	24.20	24.20	24.50				
DTM Multi-slot class 9	GSM 1 Tx slot	28.32	28.35	28.29	28.50	20.69	20.74	20.69	20.92
	EDGE 1 Tx slot	24.13	24.21	24.20	24.50				
DTM Multi-slot class 11	GSM 1 Tx slot	26.19	26.30	26.23	26.50	19.59	19.65	19.57	20.01
	EDGE 2 Tx slots	21.94	21.92	21.84	22.50				



**<WCDMA Conducted Power>**

1. The following tests were conducted according to the test requirements outlines in 3GPP TS 34.121 specification.
2. The procedures in KDB 941225 D01v03r01 are applied for 3GPP Rel. 6 HSPA to configure the device in the required sub-test mode(s) to determine SAR test exclusion.
3. For DC-HSDPA, the device was configured according to the H-Set 12, Fixed Reference Channel (FRC) configuration in Table C.8.1.12 of 3GPP TS 34.121-1, with the primary and the secondary serving HS-DSCH Cell enabled during the power measurement.

A summary of these settings are illustrated below:

**HSDPA Setup Configuration:**

- a. The EUT was connected to Base Station Agilent E5515C referred to the Setup Configuration.
- b. The RF path losses were compensated into the measurements.
- c. A call was established between EUT and Base Station with following setting:
  - i. Set Gain Factors ( $\beta_c$  and  $\beta_d$ ) and parameters were set according to each
  - ii. Specific sub-test in the following table, C10.1.4, quoted from the TS 34.121
  - iii. Set RMC 12.2Kbps + HSDPA mode.
  - iv. Set Cell Power = -86 dBm
  - v. Set HS-DSCH Configuration Type to FRC (H-set 1, QPSK)
  - vi. Select HSDPA Uplink Parameters
  - vii. Set Delta ACK, Delta NACK and Delta CQI = 8
  - viii. Set Ack-Nack Repetition Factor to 3
  - ix. Set CQI Feedback Cycle (k) to 4 ms
  - x. Set CQI Repetition Factor to 2
  - xi. Power Ctrl Mode = All Up bits
- d. The transmitted maximum output power was recorded.

**Table C.10.1.4:  $\beta$  values for transmitter characteristics tests with HS-DPCCH**

Sub-test	$\beta_c$	$\beta_d$	$\beta_d$ (SF)	$\beta_c/\beta_d$	$\beta_{HS}$ (Note 1, Note 2)	CM (dB) (Note 3)	MPR (dB) (Note 3)
1	2/15	15/15	64	2/15	4/15	0.0	0.0
2	12/15 (Note 4)	15/15 (Note 4)	64	12/15 (Note 4)	24/15	1.0	0.0
3	15/15	8/15	64	15/8	30/15	1.5	0.5
4	15/15	4/15	64	15/4	30/15	1.5	0.5

Note 1:  $\Delta_{ACK}, \Delta_{NACK}$  and  $\Delta_{CQI} = 30/15$  with  $\beta_{HS} = 30/15 * \beta_c$ .

Note 2: For the HS-DPCCH power mask requirement test in clause 5.2C, 5.7A, and the Error Vector Magnitude (EVM) with HS-DPCCH test in clause 5.13.1A, and HSDPA EVM with phase discontinuity in clause 5.13.1AA,  $\Delta_{ACK}$  and  $\Delta_{NACK} = 30/15$  with  $\beta_{HS} = 30/15 * \beta_c$ , and  $\Delta_{CQI} = 24/15$  with  $\beta_{HS} = 24/15 * \beta_c$ .

Note 3: CM = 1 for  $\beta_c/\beta_d = 12/15, \beta_{HS}/\beta_c = 24/15$ . For all other combinations of DPCCH, DPDCCH and HS-DPCCH the MPR is based on the relative CM difference. This is applicable for only UEs that support HSDPA in release 6 and later releases.

Note 4: For subtest 2 the  $\beta_c/\beta_d$  ratio of 12/15 for the TFC during the measurement period (TF1, TF0) is achieved by setting the signalled gain factors for the reference TFC (TF1, TF1) to  $\beta_c = 11/15$  and  $\beta_d = 15/15$ .

**Setup Configuration**

**HSUPA Setup Configuration:**

- a. The EUT was connected to Base Station Agilent E5515C referred to the Setup Configuration.
- b. The RF path losses were compensated into the measurements.
- c. A call was established between EUT and Base Station with following setting \* :
  - i. Call Configs = 5.2B, 5.9B, 5.10B, and 5.13.2B with QPSK
  - ii. Set the Gain Factors ( $\beta_c$  and  $\beta_d$ ) and parameters (AG Index) were set according to each specific sub-test in the following table, C11.1.3, quoted from the TS 34.121
  - iii. Set Cell Power = -86 dBm
  - iv. Set Channel Type = 12.2k + HSPA
  - v. Set UE Target Power
  - vi. Power Ctrl Mode= Alternating bits
  - vii. Set and observe the E-TFCl
  - viii. Confirm that E-TFCl is equal to the target E-TFCl of 75 for sub-test 1, and other subtest's E-TFCl
- d. The transmitted maximum output power was recorded.

**Table C.11.1.3:  $\beta$  values for transmitter characteristics tests with HS-DPCCH and E-DCH**

Sub-test	$\beta_c$	$\beta_d$	$\beta_d$ (SF)	$\beta_c/\beta_d$	$\beta_{HS}$ (Note1)	$\beta_{ec}$	$\beta_{ed}$ (Note 4) (Note 5)	$\beta_{ed}$ (SF)	$\beta_{ed}$ (Codes)	CM (dB) (Note 2)	MPR (dB) (Note 2) (Note 6)	AG Index (Note 5)	E-TFCl
1	11/15 (Note 3)	15/15 (Note 3)	64	11/15 (Note 3)	22/15	209/25	1309/225	4	1	1.0	0.0	20	75
2	6/15	15/15	64	6/15	12/15	12/15	94/75	4	1	3.0	2.0	12	67
3	15/15	9/15	64	15/9	30/15	30/15	$\beta_{ed1}: 47/15$ $\beta_{ed2}: 47/15$	4 4	2	2.0	1.0	15	92
4	2/15	15/15	64	2/15	4/15	2/15	56/75	4	1	3.0	2.0	17	71
5	15/15	0	-	-	5/15	5/15	47/15	4	1	1.0	0.0	12	67

Note 1: For sub-test 1 to 4,  $\Delta_{ACK}$ ,  $\Delta_{NACK}$  and  $\Delta_{CQI} = 30/15$  with  $\beta_{hs} = 30/15 * \beta_c$ . For sub-test 5,  $\Delta_{ACK}$ ,  $\Delta_{NACK}$  and  $\Delta_{CQI} = 5/15$  with  $\beta_{hs} = 5/15 * \beta_c$ .

Note 2: CM = 1 for  $\beta_c/\beta_d = 12/15$ ,  $\beta_{hs}/\beta_c = 24/15$ . For all other combinations of DPDCH, DPCCH, HS-DPCCH, E-DPDCH and E-DPCCH the MPR is based on the relative CM difference.

Note 3: For subtest 1 the  $\beta_c/\beta_d$  ratio of 11/15 for the TFC during the measurement period (TF1, TF0) is achieved by setting the signalled gain factors for the reference TFC (TF1, TF1) to  $\beta_c = 10/15$  and  $\beta_d = 15/15$ .

Note 4: In case of testing by UE using E-DPDCH Physical Layer category 1, Sub-test 3 is omitted according to TS25.306 Table 5.1g.

Note 5:  $\beta_{ed}$  can not be set directly; it is set by Absolute Grant Value.

Note 6: For subtests 2, 3 and 4, UE may perform E-DPDCH power scaling at max power which could results in slightly smaller MPR values.

**Setup Configuration**

**DC-HSDPA 3GPP release 8 Setup Configuration:**


- a. The EUT was connected to Base Station Agilent E5515C referred to the Setup Configuration below
- b. The RF path losses were compensated into the measurements.
- c. A call was established between EUT and Base Station with following setting:
  - i. Set RMC 12.2Kbps + HSDPA mode.
  - ii. Set Cell Power = -25 dBm
  - iii. Set HS-DSCH Configuration Type to FRC (H-set 12, QPSK)
  - iv. Select HSDPA Uplink Parameters
  - v. Set Gain Factors ( $\beta_c$  and  $\beta_d$ ) and parameters were set according to each Specific sub-test in the following table, C10.1.4, quoted from the TS 34.121
    - a). Subtest 1:  $\beta_c/\beta_d=2/15$
    - b). Subtest 2:  $\beta_c/\beta_d=12/15$
    - c). Subtest 3:  $\beta_c/\beta_d=15/8$
    - d). Subtest 4:  $\beta_c/\beta_d=15/4$
  - vi. Set Delta ACK, Delta NACK and Delta CQI = 8
  - vii. Set Ack-Nack Repetition Factor to 3
  - viii. Set CQI Feedback Cycle (k) to 4 ms
  - ix. Set CQI Repetition Factor to 2
  - x. Power Ctrl Mode = All Up bits
- d. The transmitted maximum output power was recorded.

The following tests were conducted according to the test requirements outlines in 3GPP TS 34.121 specification. A summary of these settings are illustrated below:

**C.8.1.12 Fixed Reference Channel Definition H-Set 12**

**Table C.8.1.12: Fixed Reference Channel H-Set 12**

Parameter	Unit	Value
Nominal Avg. Inf. Bit Rate	kbps	60
Inter-TTI Distance	TTI's	1
Number of HARQ Processes	Processes	6
Information Bit Payload ( $N_{INF}$ )	Bits	120
Number Code Blocks	Blocks	1
Binary Channel Bits Per TTI	Bits	960
Total Available SML's in UE	SML's	19200
Number of SML's per HARQ Proc.	SML's	3200
Coding Rate		0.15
Number of Physical Channel Codes	Codes	1
Modulation		QPSK
Note 1: The RMC is intended to be used for DC-HSDPA mode and both cells shall transmit with identical parameters as listed in the table. Note 2: Maximum number of transmission is limited to 1, i.e., retransmission is not allowed. The redundancy and constellation version 0 shall be used.		

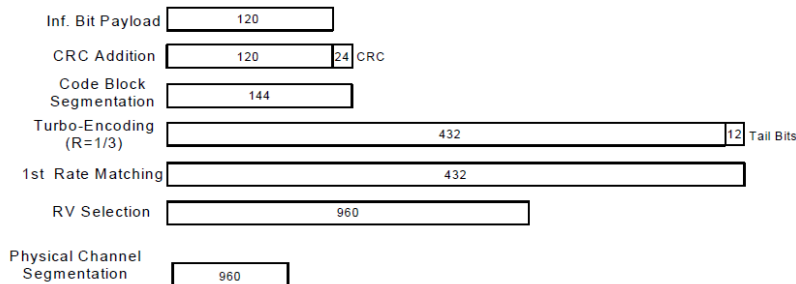

**Figure C.8.19: Coding rate for Fixed reference Channel H-Set 12 (QPSK)**

**Setup Configuration**



**<WCDMA Conducted Power>**

**General Note:**

- Per KDB 941225 D01v03r01, for SAR testing is measured using a 12.2 kbps RMC with TPC bits configured to all "1's".
- Per KDB 941225 D01v03r01, RMC 12.2kbps setting is used to evaluate SAR. The maximum output power and tune-up tolerance specified for production units in HSDPA / HSUPA / DC-HSDPA is ≤ ¼ dB higher than RMC 12.2Kbps or when the highest reported SAR of the RMC12.2Kbps is scaled by the ratio of specified maximum output power and tune-up tolerance of HSDPA / HSUPA / DC-HSDPA to RMC12.2Kbps and the adjusted SAR is ≤ 1.2 W/kg, SAR measurement is not required for HSDPA / HSUPA / DC-HSDPA, and according to the following RF output power, the output power results of the secondary modes (HSUPA, HSDPA, DC-HSDPA) are less than ¼ dB higher than the primary modes; therefore, SAR measurement is not required for HSDPA / HSUPA / DC-HSDPA.

**Default Power Mode**

Band		WCDMA II			Tune-up Limit (dBm)	WCDMA IV			Tune-up Limit (dBm)	WCDMA V			Tune-up Limit (dBm)
TX Channel		9262	9400	9538		1312	1413	1513		4132	4182	4233	
Rx Channel		9662	9800	9938	1537	1638	1738	4357	4407	4458			
Frequency (MHz)		1852.4	1880	1907.6	1712.4	1732.6	1752.6	826.4	836.4	846.6			
3GPP Rel 99	RMC 12.2Kbps	24.75	25.15	25.18	25.50	24.65	24.76	24.89	25.50	25.39	25.42	25.24	25.50
3GPP Rel 6	HSDPA Subtest-1	23.84	24.18	24.19	24.50	23.73	23.78	23.95	24.50	23.64	23.49	23.50	24.50
3GPP Rel 6	HSDPA Subtest-2	23.95	24.21	24.28	24.50	23.74	23.83	23.96	24.50	23.66	23.53	23.57	24.50
3GPP Rel 6	HSDPA Subtest-3	23.42	23.66	23.66	24.00	23.27	23.30	23.47	24.00	23.09	23.09	23.09	24.00
3GPP Rel 6	HSDPA Subtest-4	23.35	23.71	23.62	24.00	23.27	23.36	23.42	24.00	23.19	23.00	23.05	24.00
3GPP Rel 8	DC-HSDPA Subtest-1	23.84	24.13	24.12	24.50	23.69	23.84	23.93	24.50	23.63	23.44	23.38	24.50
3GPP Rel 8	DC-HSDPA Subtest-2	23.85	24.22	24.20	24.50	23.68	23.80	23.76	24.50	23.62	23.51	23.39	24.50
3GPP Rel 8	DC-HSDPA Subtest-3	23.33	23.64	23.63	24.00	23.16	23.31	23.44	24.00	23.08	23.06	22.92	24.00
3GPP Rel 8	DC-HSDPA Subtest-4	23.27	23.67	23.56	24.00	23.25	23.25	23.42	24.00	23.11	23.06	22.93	24.00
3GPP Rel 6	HSUPA Subtest-1	23.84	24.18	24.27	24.50	23.69	23.77	23.87	24.50	23.64	23.48	23.52	24.50
3GPP Rel 6	HSUPA Subtest-2	21.77	22.17	22.21	22.50	21.73	21.74	21.86	22.50	21.58	21.51	21.54	22.50
3GPP Rel 6	HSUPA Subtest-3	22.87	23.19	23.22	23.50	22.73	22.86	22.98	23.50	22.66	22.57	22.55	23.50
3GPP Rel 6	HSUPA Subtest-4	21.86	22.18	22.22	22.50	21.72	21.80	21.93	22.50	21.61	21.56	21.51	22.50
3GPP Rel 6	HSUPA Subtest-5	23.89	24.11	24.12	24.50	23.70	23.81	23.88	24.50	23.68	23.54	23.45	24.50


**Reduced Power Mode**

Band		WCDMA II			Tune-up Limit (dBm)	WCDMA IV			Tune-up Limit (dBm)
TX Channel		9262	9400	9538		1312	1413	1513	
Rx Channel		9662	9800	9938	1537	1638	1738		
Frequency (MHz)		1852.4	1880	1907.6	1712.4	1732.6	1752.6		
3GPP Rel 99	RMC 12.2Kbps	23.43	23.66	23.60	24.50	23.69	23.81	23.72	24.50
3GPP Rel 6	HSDPA Subtest-1	22.34	22.74	22.62	23.50	22.82	22.85	23.01	23.50
3GPP Rel 6	HSDPA Subtest-2	22.51	22.74	22.55	23.50	22.84	22.76	22.86	23.50
3GPP Rel 6	HSDPA Subtest-3	21.91	22.18	22.09	23.00	22.18	22.27	22.45	23.00
3GPP Rel 6	HSDPA Subtest-4	21.85	22.34	22.11	23.00	22.20	22.35	22.32	23.00
3GPP Rel 8	DC-HSDPA Subtest-1	22.25	22.76	22.54	23.50	22.70	22.76	22.88	23.50
3GPP Rel 8	DC-HSDPA Subtest-2	22.29	22.51	22.65	23.50	22.60	22.72	22.82	23.50
3GPP Rel 8	DC-HSDPA Subtest-3	21.90	22.20	21.90	23.00	22.17	22.24	22.47	23.00
3GPP Rel 8	DC-HSDPA Subtest-4	22.03	22.23	22.07	23.00	22.16	22.27	22.41	23.00
3GPP Rel 6	HSUPA Subtest-1	22.35	22.73	22.63	23.50	22.76	22.86	22.81	23.50
3GPP Rel 6	HSUPA Subtest-2	20.29	20.70	20.58	21.50	20.80	20.75	20.76	21.50
3GPP Rel 6	HSUPA Subtest-3	21.25	21.71	21.52	22.50	21.83	21.96	21.91	22.50
3GPP Rel 6	HSUPA Subtest-4	20.30	20.69	20.53	21.50	20.73	20.87	20.85	21.50
3GPP Rel 6	HSUPA Subtest-5	22.40	22.72	22.62	23.50	22.79	22.90	22.98	23.50


**<LTE Conducted Power>**

**General Note:**

1. Anritsu MT8820C base station simulator was used to setup the connection with EUT; the frequency band, channel bandwidth, RB allocation configuration, modulation type are set in the base station simulator to configure EUT transmitting at maximum power and at different configurations which are requested to be reported to FCC, for conducted power measurement and SAR testing.
2. Per KDB 941225 D05v02r05, when a properly configured base station simulator is used for the SAR and power measurements, spectrum plots for each RB allocation and offset configuration is not required.
3. Per KDB 941225 D05v02r05, start with the largest channel bandwidth and measure SAR for QPSK with 1 RB allocation, using the RB offset and required test channel combination with the highest maximum output power for RB offsets at the upper edge, middle and lower edge of each required test channel.
4. Per KDB 941225 D05v02r05, 50% RB allocation for QPSK SAR testing follows 1RB QPSK allocation procedure.
5. Per KDB 941225 D05v02r05, For QPSK with 100% RB allocation, SAR is not required when the highest maximum output power for 100 % RB allocation is less than the highest maximum output power in 50% and 1 RB allocations and the highest reported SAR for 1 RB and 50% RB allocation are  $\leq 0.8$  W/kg. Otherwise, SAR is measured for the highest output power channel; and if the reported SAR is  $> 1.45$  W/kg, the remaining required test channels must also be tested.
6. Per KDB 941225 D05v02r05, 16QAM output power for each RB allocation configuration is  $>$  not  $\frac{1}{2}$  dB higher than the same configuration in QPSK and the reported SAR for the QPSK configuration is  $\leq 1.45$  W/kg; Per KDB 941225 D05v02r05, 16QAM SAR testing is not required.
7. Per KDB 941225 D05v02r05, Smaller bandwidth output power for each RB allocation configuration is  $>$  not  $\frac{1}{2}$  dB higher than the same configuration in the largest supported bandwidth, and the reported SAR for the largest supported bandwidth is  $\leq 1.45$  W/kg; Per KDB 941225 D05v02r05, smaller bandwidth SAR testing is not required.
8. For LTE B4/B5/B38 the maximum bandwidth does not support three non-overlapping channels, per KDB 941225 D05v02r05, when a device supports overlapping channel assignment in a channel bandwidth configuration, the middle channel of the group of overlapping channels should be selected for testing.
9. LTE band 38 SAR test was covered by Band 41; according to April 2015 TCB workshop, SAR test for overlapping LTE bands can be reduced if
  - a. the maximum output power, including tolerance, for the smaller band is  $\leq$  the larger band to qualify for the SAR test exclusion
  - b. the channel bandwidth and other operating parameters for the smaller band are fully supported by the larger band
10. According to 2017 TCB workshop, for 64 QAM and 16 QAM should be verified by checking the signal constellation with a call box to avoid incorrect maximum power levels due to MPR and other requirements associated with signal modulation, and the following figure is taken from the "Fundamental Measurement >> Modulation Analysis >> constellation" mode of the device connect to the MT8821C base station, therefore, the device 64QAM and 16QAM signal modulation are correct.

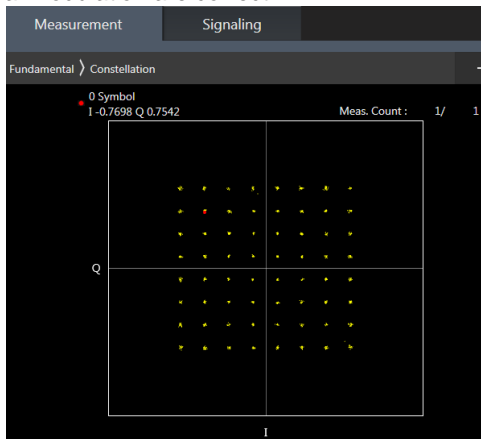

**64QAM**

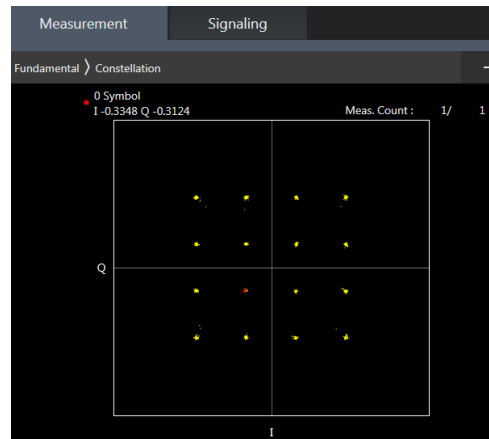

**16QAM**



**Default Power Mode**

**<LTE Band 2>**

BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Middle Ch. / Freq.	Power High Ch. / Freq.	Tune-up limit (dBm)	MPR (dB)
Channel				18700	18900	19100		
Frequency (MHz)				1860	1880	1900		
20	QPSK	1	0	23.99	24.13	24.12	25	0
20	QPSK	1	49	23.92	24.00	23.92		
20	QPSK	1	99	23.81	23.87	23.83		
20	QPSK	50	0	23.08	23.09	22.99	24	1
20	QPSK	50	24	22.99	23.02	22.98		
20	QPSK	50	50	22.93	23.04	22.96		
20	QPSK	100	0	23.04	23.05	22.90	24	1
20	16QAM	1	0	23.39	23.37	23.17		
20	16QAM	1	49	23.20	23.23	23.14		
20	16QAM	1	99	23.06	23.18	23.02	23	2
20	16QAM	50	0	22.16	22.15	21.96		
20	16QAM	50	24	22.20	22.14	22.14		
20	16QAM	50	50	22.08	22.08	22.07	23	2
20	16QAM	100	0	22.10	22.14	21.96		
20	64QAM	1	0	22.31	22.32	22.08		
20	64QAM	1	49	22.22	22.25	22.22	23	2
20	64QAM	1	99	22.08	22.21	22.00		
20	64QAM	50	0	21.14	21.17	21.03		
20	64QAM	50	24	21.20	21.17	21.08	22	3
20	64QAM	50	50	21.10	21.08	21.06		
20	64QAM	100	0	21.12	21.14	21.04		
Channel				18675	18900	19125		
Frequency (MHz)				1857.5	1880	1902.5		
15	QPSK	1	0	23.94	24.01	24.06	25	0
15	QPSK	1	37	23.79	23.96	23.80		
15	QPSK	1	74	23.69	23.75	23.80		
15	QPSK	36	0	22.95	22.99	22.82	24	1
15	QPSK	36	20	22.94	22.99	22.85		
15	QPSK	36	39	22.84	22.91	22.90		
15	QPSK	75	0	22.97	22.91	22.79	24	1
15	16QAM	1	0	23.35	23.27	23.07		
15	16QAM	1	37	23.14	23.17	23.09		
15	16QAM	1	74	23.00	23.06	22.90	23	2
15	16QAM	36	0	22.11	22.08	21.87		
15	16QAM	36	20	22.10	22.02	22.05		
15	16QAM	36	39	21.99	22.05	21.95	23	2
15	16QAM	75	0	22.03	22.05	21.84		
15	64QAM	1	0	22.20	22.23	22.04		
15	64QAM	1	37	22.14	22.13	22.18	23	2
15	64QAM	1	74	21.98	22.10	21.87		
15	64QAM	36	0	21.05	21.06	20.99		
15	64QAM	36	20	21.08	21.07	20.99	22	3
15	64QAM	36	39	21.00	20.98	20.96		
15	64QAM	75	0	21.02	21.11	20.92		



**FCC SAR TEST REPORT**

**Report No. : FA052913-03**

Channel				18650	18900	19150	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				1855	1880	1905		
10	QPSK	1	0	23.89	23.90	23.93	25	0
10	QPSK	1	25	23.76	23.92	23.77		
10	QPSK	1	49	23.64	23.64	23.68		
10	QPSK	25	0	22.91	22.95	22.75	24	1
10	QPSK	25	12	22.88	22.89	22.72		
10	QPSK	25	25	22.71	22.83	22.80		
10	QPSK	50	0	22.92	22.87	22.69		
10	16QAM	1	0	23.25	23.15	22.94	24	1
10	16QAM	1	25	23.05	23.05	22.98		
10	16QAM	1	49	22.91	23.02	22.82		
10	16QAM	25	0	22.05	21.96	21.74	23	2
10	16QAM	25	12	22.03	21.90	21.93		
10	16QAM	25	25	21.96	21.93	21.90		
10	16QAM	50	0	21.98	22.01	21.81		
10	64QAM	1	0	22.17	22.12	21.94	23	2
10	64QAM	1	25	22.04	22.09	22.06		
10	64QAM	1	49	21.95	22.04	21.84		
10	64QAM	25	0	21.01	21.01	20.95	22	3
10	64QAM	25	12	21.02	20.99	20.91		
10	64QAM	25	25	20.91	20.94	20.84		
10	64QAM	50	0	20.96	20.99	20.83		
Channel				18625	18900	19175	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				1852.5	1880	1907.5		
5	QPSK	1	0	23.81	23.85	23.86	25	0
5	QPSK	1	12	23.63	23.85	23.71		
5	QPSK	1	24	23.56	23.61	23.58		
5	QPSK	12	0	22.88	22.83	22.67	24	1
5	QPSK	12	7	22.77	22.86	22.65		
5	QPSK	12	13	22.62	22.71	22.74		
5	QPSK	25	0	22.86	22.84	22.63		
5	16QAM	1	0	23.14	23.06	22.82	24	1
5	16QAM	1	12	22.95	22.95	22.86		
5	16QAM	1	24	22.84	22.96	22.76		
5	16QAM	12	0	22.01	21.91	21.67	23	2
5	16QAM	12	7	21.90	21.86	21.80		
5	16QAM	12	13	21.93	21.89	21.84		
5	16QAM	25	0	21.89	21.91	21.75		
5	64QAM	1	0	22.14	22.07	21.82	23	2
5	64QAM	1	12	21.91	22.02	21.98		
5	64QAM	1	24	21.88	21.97	21.81		
5	64QAM	12	0	20.96	20.96	20.91	22	3
5	64QAM	12	7	20.98	20.92	20.87		
5	64QAM	12	13	20.87	20.84	20.71		
5	64QAM	25	0	20.85	20.92	20.76		
Channel				18615	18900	19185	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				1851.5	1880	1908.5		
3	QPSK	1	0	23.76	23.78	23.77	25	0
3	QPSK	1	8	23.54	23.74	23.59		



**FCC SAR TEST REPORT**

**Report No. : FA052913-03**

3	QPSK	1	14	23.51	23.58	23.51		
3	QPSK	8	0	22.82	22.76	22.58	24	1
3	QPSK	8	4	22.64	22.82	22.53		
3	QPSK	8	7	22.53	22.58	22.64		
3	QPSK	15	0	22.76	22.81	22.55		
3	16QAM	1	0	23.02	22.95	22.72	24	1
3	16QAM	1	8	22.90	22.83	22.83		
3	16QAM	1	14	22.75	22.89	22.69		
3	16QAM	8	0	21.96	21.86	21.59	23	2
3	16QAM	8	4	21.77	21.82	21.72		
3	16QAM	8	7	21.90	21.85	21.72		
3	16QAM	15	0	21.76	21.86	21.72		
3	64QAM	1	0	22.09	22.04	21.73	23	2
3	64QAM	1	8	21.83	21.90	21.91		
3	64QAM	1	14	21.80	21.91	21.74		
3	64QAM	8	0	20.89	20.92	20.79	22	3
3	64QAM	8	4	20.85	20.88	20.83		
3	64QAM	8	7	20.79	20.71	20.60		
3	64QAM	15	0	20.81	20.80	20.72		
Channel				18607	18900	19193	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				1850.7	1880	1909.3		
1.4	QPSK	1	0	23.70	23.71	23.64	25	0
1.4	QPSK	1	3	23.72	23.79	23.69		
1.4	QPSK	1	5	23.64	23.67	23.62		
1.4	QPSK	3	0	23.77	23.76	23.73		
1.4	QPSK	3	1	23.75	23.79	23.73		
1.4	QPSK	3	3	23.76	23.81	23.67		
1.4	QPSK	6	0	22.72	22.79	22.69	24	1
1.4	16QAM	1	0	22.96	22.99	22.80	24	1
1.4	16QAM	1	3	23.08	23.09	22.87		
1.4	16QAM	1	5	22.95	23.02	22.77		
1.4	16QAM	3	0	22.78	22.85	22.65		
1.4	16QAM	3	1	22.81	22.94	22.69		
1.4	16QAM	3	3	22.83	22.80	22.61		
1.4	16QAM	6	0	21.96	22.00	21.82	23	2
1.4	64QAM	1	0	21.97	22.03	21.81	23	2
1.4	64QAM	1	3	22.04	22.04	21.85		
1.4	64QAM	1	5	21.99	21.93	21.79		
1.4	64QAM	3	0	21.92	22.06	21.89		
1.4	64QAM	3	1	21.95	22.02	21.80		
1.4	64QAM	3	3	21.91	22.08	21.83		
1.4	64QAM	6	0	20.84	20.89	20.69	22	3





<LTE Band 4>

BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Middle Ch. / Freq.	Power High Ch. / Freq.	Tune-up limit (dBm)	MPR (dB)
Channel				20050	20175	20300		
Frequency (MHz)				1720	1732.5	1745		
20	QPSK	1	0	23.72	23.87	23.86	25	0
20	QPSK	1	49	23.61	23.62	23.59		
20	QPSK	1	99	23.59	23.58	23.57		
20	QPSK	50	0	22.65	22.66	22.57	24	1
20	QPSK	50	24	22.53	22.53	22.52		
20	QPSK	50	50	22.51	22.55	22.56		
20	QPSK	100	0	22.62	22.63	22.62	24	1
20	16QAM	1	0	22.94	22.96	22.70		
20	16QAM	1	49	22.78	22.83	22.74		
20	16QAM	1	99	22.60	22.72	22.53	23	2
20	16QAM	50	0	21.70	21.73	21.51		
20	16QAM	50	24	21.74	21.67	21.64		
20	16QAM	50	50	21.60	21.64	21.66	23	2
20	16QAM	100	0	21.63	21.67	21.60		
20	64QAM	1	0	21.84	21.89	21.66		
20	64QAM	1	49	21.75	21.84	21.75	23	2
20	64QAM	1	99	21.68	21.78	21.60		
20	64QAM	50	0	20.69	20.69	20.56		
20	64QAM	50	24	20.78	20.77	20.62	22	3
20	64QAM	50	50	20.60	20.64	20.61		
20	64QAM	100	0	20.69	20.73	20.58		
Channel				20025	20175	20325	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				1717.5	1732.5	1747.5		
15	QPSK	1	0	23.71	23.73	23.81	25	0
15	QPSK	1	37	23.57	23.64	23.60		
15	QPSK	1	74	23.60	23.56	23.60		
15	QPSK	36	0	22.65	22.55	22.50	24	1
15	QPSK	36	20	22.53	22.50	22.50		
15	QPSK	36	39	22.50	22.54	22.57		
15	QPSK	75	0	22.63	22.55	22.66	24	1
15	16QAM	1	0	22.89	22.91	22.69		
15	16QAM	1	37	22.80	22.80	22.74		
15	16QAM	1	74	22.65	22.77	22.53	23	2
15	16QAM	36	0	21.72	21.73	21.54		
15	16QAM	36	20	21.77	21.64	21.66		
15	16QAM	36	39	21.62	21.62	21.64	23	2
15	16QAM	75	0	21.68	21.71	21.56		
15	64QAM	1	0	21.80	21.87	21.66		
15	64QAM	1	37	21.79	21.80	21.80	23	2
15	64QAM	1	74	21.65	21.75	21.64		
15	64QAM	36	0	20.67	20.66	20.61		
15	64QAM	36	20	20.81	20.80	20.64	22	3
15	64QAM	36	39	20.63	20.64	20.61		
15	64QAM	75	0	20.70	20.70	20.57		



**FCC SAR TEST REPORT**

**Report No. : FA052913-03**

Channel				20000	20175	20350	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				1715	1732.5	1750		
10	QPSK	1	0	23.70	23.73	23.82	25	0
10	QPSK	1	25	23.58	23.66	23.54		
10	QPSK	1	49	23.63	23.63	23.53		
10	QPSK	25	0	22.69	22.53	22.50	24	1
10	QPSK	25	12	22.50	22.57	22.50		
10	QPSK	25	25	22.50	22.60	22.58		
10	QPSK	50	0	22.57	22.50	22.61		
10	16QAM	1	0	22.96	22.96	22.71	24	1
10	16QAM	1	25	22.81	22.82	22.76		
10	16QAM	1	49	22.64	22.74	22.50		
10	16QAM	25	0	21.73	21.72	21.55	23	2
10	16QAM	25	12	21.73	21.68	21.64		
10	16QAM	25	25	21.65	21.63	21.67		
10	16QAM	50	0	21.68	21.72	21.56	22	3
10	64QAM	1	0	21.83	21.88	21.65		
10	64QAM	1	25	21.75	21.79	21.75		
10	64QAM	1	49	21.66	21.79	21.61		
10	64QAM	25	0	20.66	20.65	20.55	22	3
10	64QAM	25	12	20.81	20.77	20.61		
10	64QAM	25	25	20.59	20.66	20.59		
10	64QAM	50	0	20.69	20.77	20.57		
Channel				19975	20175	20375	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				1712.5	1732.5	1752.5		
5	QPSK	1	0	23.74	23.71	23.85	25	0
5	QPSK	1	12	23.61	23.64	23.58		
5	QPSK	1	24	23.63	23.61	23.54		
5	QPSK	12	0	22.69	22.54	22.55	24	1
5	QPSK	12	7	22.56	22.55	22.50		
5	QPSK	12	13	22.53	22.58	22.53		
5	QPSK	25	0	22.60	22.51	22.62		
5	16QAM	1	0	22.94	22.98	22.72	24	1
5	16QAM	1	12	22.74	22.83	22.72		
5	16QAM	1	24	22.58	22.69	22.50		
5	16QAM	12	0	21.67	21.77	21.50	23	2
5	16QAM	12	7	21.78	21.65	21.59		
5	16QAM	12	13	21.55	21.61	21.69		
5	16QAM	25	0	21.63	21.71	21.60		
5	64QAM	1	0	21.86	21.91	21.61	23	2
5	64QAM	1	12	21.73	21.84	21.74		
5	64QAM	1	24	21.70	21.75	21.61		
5	64QAM	12	0	20.74	20.72	20.52	22	3
5	64QAM	12	7	20.78	20.81	20.57		
5	64QAM	12	13	20.62	20.62	20.63		
5	64QAM	25	0	20.64	20.74	20.59		
Channel				19965	20175	20385	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				1711.5	1732.5	1753.5		
3	QPSK	1	0	23.72	23.78	23.84	25	0
3	QPSK	1	8	23.58	23.66	23.59		



3	QPSK	1	14	23.54	23.53	23.57		
3	QPSK	8	0	22.70	22.63	22.54	24	1
3	QPSK	8	4	22.52	22.52	22.50		
3	QPSK	8	7	22.51	22.57	22.58		
3	QPSK	15	0	22.60	22.50	22.67		
3	16QAM	1	0	22.90	22.91	22.73	24	1
3	16QAM	1	8	22.79	22.81	22.71		
3	16QAM	1	14	22.62	22.70	22.56		
3	16QAM	8	0	21.68	21.72	21.54	23	2
3	16QAM	8	4	21.75	21.66	21.61		
3	16QAM	8	7	21.55	21.62	21.61		
3	16QAM	15	0	21.60	21.69	21.60		
3	64QAM	1	0	21.89	21.93	21.64	23	2
3	64QAM	1	8	21.79	21.89	21.75		
3	64QAM	1	14	21.69	21.77	21.58		
3	64QAM	8	0	20.66	20.66	20.54	22	3
3	64QAM	8	4	20.79	20.72	20.58		
3	64QAM	8	7	20.61	20.63	20.62		
3	64QAM	15	0	20.66	20.71	20.54		
Channel				19957	20175	20393	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				1710.7	1732.5	1754.3		
1.4	QPSK	1	0	23.63	23.79	23.85	25	0
1.4	QPSK	1	3	23.58	23.55	23.50		
1.4	QPSK	1	5	23.54	23.56	23.57		
1.4	QPSK	3	0	23.62	23.81	23.85		
1.4	QPSK	3	1	23.61	23.59	23.57		
1.4	QPSK	3	3	23.53	23.53	23.57		
1.4	QPSK	6	0	22.59	22.55	22.56	24	1
1.4	16QAM	1	0	22.89	22.92	22.65	24	1
1.4	16QAM	1	3	22.74	22.83	22.71		
1.4	16QAM	1	5	22.59	22.72	22.50		
1.4	16QAM	3	0	22.85	22.90	22.63		
1.4	16QAM	3	1	22.72	22.83	22.71		
1.4	16QAM	3	3	22.53	22.69	22.50		
1.4	16QAM	6	0	21.58	21.64	21.54	23	2
1.4	64QAM	1	0	21.79	21.89	21.63	23	2
1.4	64QAM	1	3	21.73	21.75	21.75		
1.4	64QAM	1	5	21.60	21.73	21.58		
1.4	64QAM	3	0	21.77	21.80	21.61		
1.4	64QAM	3	1	21.74	21.83	21.74		
1.4	64QAM	3	3	21.67	21.76	21.57		
1.4	64QAM	6	0	20.63	20.66	20.50	22	3



<LTE Band 5>

BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Middle Ch. / Freq.	Power High Ch. / Freq.	Tune-up limit (dBm)	MPR (dB)
Channel				20450	20525	20600		
Frequency (MHz)				829	836.5	844		
10	QPSK	1	0	23.97	24.13	23.95	24.5	0
10	QPSK	1	25	23.87	23.91	23.93		
10	QPSK	1	49	23.79	23.84	23.75		
10	QPSK	25	0	22.93	22.97	22.93	23.5	1
10	QPSK	25	12	22.91	22.96	22.92		
10	QPSK	25	25	22.88	22.92	22.82		
10	QPSK	50	0	22.91	22.92	22.77	23.5	1
10	16QAM	1	0	23.16	23.23	23.10		
10	16QAM	1	25	23.06	23.16	23.14		
10	16QAM	1	49	23.02	23.03	23.14	22.5	2
10	16QAM	25	0	21.97	21.99	21.90		
10	16QAM	25	12	21.98	22.06	22.10		
10	16QAM	25	25	21.94	22.00	21.93	22.5	2
10	16QAM	50	0	22.00	22.04	21.94		
10	64QAM	1	0	22.13	22.15	21.98		
10	64QAM	1	25	22.03	22.14	22.11	22.5	2
10	64QAM	1	49	21.90	22.08	22.07		
10	64QAM	25	0	20.99	21.01	20.99		
10	64QAM	25	12	20.96	21.09	21.06	21.5	3
10	64QAM	25	25	20.98	21.00	20.98		
10	64QAM	50	0	21.05	21.12	20.98		
Channel				20425	20525	20625		
Frequency (MHz)				826.5	836.5	846.5		
5	QPSK	1	0	23.85	23.88	23.77	24.5	0
5	QPSK	1	12	23.89	23.85	23.93		
5	QPSK	1	24	23.73	23.83	23.75		
5	QPSK	12	0	22.84	23.03	22.81	23.5	1
5	QPSK	12	7	22.93	23.03	22.91		
5	QPSK	12	13	22.84	22.93	22.87		
5	QPSK	25	0	22.89	22.94	22.78	23.5	1
5	16QAM	1	0	23.13	23.15	23.06		
5	16QAM	1	12	23.09	23.23	23.19		
5	16QAM	1	24	23.05	23.10	23.08	22.5	2
5	16QAM	12	0	22.02	22.02	21.95		
5	16QAM	12	7	21.91	22.12	22.09		
5	16QAM	12	13	21.90	22.03	21.93	22.5	2
5	16QAM	25	0	21.98	21.99	21.90		
5	64QAM	1	0	22.08	22.11	22.04		
5	64QAM	1	12	22.07	22.20	22.10	22.5	2
5	64QAM	1	24	21.90	22.05	22.00		
5	64QAM	12	0	20.95	21.09	20.98		
5	64QAM	12	7	21.03	21.03	21.10	21.5	3
5	64QAM	12	13	20.91	20.99	21.05		
5	64QAM	25	0	21.05	21.06	20.96		



Channel				20415	20525	20635	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				825.5	836.5	847.5		
3	QPSK	1	0	23.82	23.92	23.81	24.5	0
3	QPSK	1	8	23.82	23.95	23.93		
3	QPSK	1	14	23.82	23.85	23.76		
3	QPSK	8	0	22.84	23.02	22.85	23.5	1
3	QPSK	8	4	22.90	22.98	22.93		
3	QPSK	8	7	22.84	22.93	22.88		
3	QPSK	15	0	22.87	22.93	22.75		
3	16QAM	1	0	23.15	23.20	23.04	23.5	1
3	16QAM	1	8	23.15	23.21	23.18		
3	16QAM	1	14	22.98	23.04	23.10		
3	16QAM	8	0	21.97	22.00	21.99	22.5	2
3	16QAM	8	4	21.94	22.03	22.05		
3	16QAM	8	7	21.91	21.97	21.94		
3	16QAM	15	0	22.01	22.03	21.87		
3	64QAM	1	0	22.06	22.12	22.01	22.5	2
3	64QAM	1	8	22.04	22.18	22.16		
3	64QAM	1	14	22.00	22.13	22.09		
3	64QAM	8	0	20.94	21.02	20.99	21.5	3
3	64QAM	8	4	21.01	21.02	21.07		
3	64QAM	8	7	21.00	21.02	21.00		
3	64QAM	15	0	20.95	21.03	20.97		
Channel				20407	20525	20643	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				824.7	836.5	848.3		
1.4	QPSK	1	0	23.96	24.09	23.88	24.5	0
1.4	QPSK	1	3	23.86	23.84	23.86		
1.4	QPSK	1	5	23.75	23.75	23.67		
1.4	QPSK	3	0	23.96	24.12	23.87		
1.4	QPSK	3	1	23.86	23.90	23.93		
1.4	QPSK	3	3	23.70	23.80	23.74		
1.4	QPSK	6	0	22.91	22.92	22.73	23.5	1
1.4	16QAM	1	0	23.07	23.14	23.09	23.5	1
1.4	16QAM	1	3	22.96	23.08	23.07		
1.4	16QAM	1	5	22.92	22.94	23.04		
1.4	16QAM	3	0	23.10	23.14	23.10		
1.4	16QAM	3	1	22.96	23.14	23.12		
1.4	16QAM	3	3	23.00	22.96	23.14		
1.4	16QAM	6	0	22.00	21.97	21.92	22.5	2
1.4	64QAM	1	0	22.08	22.11	21.88	22.5	2
1.4	64QAM	1	3	21.93	22.10	22.08		
1.4	64QAM	1	5	21.84	22.02	22.00		
1.4	64QAM	3	0	22.12	22.08	21.92		
1.4	64QAM	3	1	21.99	22.11	22.10		
1.4	64QAM	3	3	21.86	22.04	22.02		
1.4	64QAM	6	0	21.01	21.12	20.89	21.5	3



<LTE Band 7>

BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Middle Ch. / Freq.	Power High Ch. / Freq.	Tune-up limit (dBm)	MPR (dB)
Channel				20850	21100	21350		
Frequency (MHz)				2510	2535	2560		
20	QPSK	1	0	23.46	23.58	23.27	24.5	0
20	QPSK	1	49	23.40	23.49	23.11		
20	QPSK	1	99	23.35	23.38	23.17		
20	QPSK	50	0	22.42	22.62	22.29	23.5	1
20	QPSK	50	24	22.61	22.54	22.33		
20	QPSK	50	50	22.53	22.49	22.20		
20	QPSK	100	0	22.57	22.58	22.28	23.5	1
20	16QAM	1	0	22.70	22.82	22.61		
20	16QAM	1	49	22.81	22.77	22.43		
20	16QAM	1	99	22.89	22.81	22.54	22.5	2
20	16QAM	50	0	21.60	21.58	21.38		
20	16QAM	50	24	21.55	21.63	21.37		
20	16QAM	50	50	21.73	21.64	21.30	22.5	2
20	16QAM	100	0	21.69	21.63	21.39		
20	64QAM	1	0	21.66	21.70	21.54		
20	64QAM	1	49	21.74	21.76	21.45	22.5	2
20	64QAM	1	99	21.78	21.72	21.40		
20	64QAM	50	0	20.57	20.61	20.39		
20	64QAM	50	24	20.62	20.63	20.39	21.5	3
20	64QAM	50	50	20.69	20.59	20.34		
20	64QAM	100	0	20.65	20.59	20.43		
Channel				20825	21100	21375		
Frequency (MHz)				2507.5	2535	2562.5		
15	QPSK	1	0	23.42	23.43	23.20	24.5	0
15	QPSK	1	37	23.40	23.50	23.11		
15	QPSK	1	74	23.38	23.39	23.09		
15	QPSK	36	0	22.46	22.52	22.23	23.5	1
15	QPSK	36	20	22.52	22.48	22.25		
15	QPSK	36	39	22.62	22.51	22.22		
15	QPSK	75	0	22.56	22.45	22.31	23.5	1
15	16QAM	1	0	22.72	22.88	22.60		
15	16QAM	1	37	22.76	22.78	22.51		
15	16QAM	1	74	22.90	22.71	22.50	22.5	2
15	16QAM	36	0	21.56	21.56	21.39		
15	16QAM	36	20	21.58	21.67	21.37		
15	16QAM	36	39	21.64	21.66	21.30	22.5	2
15	16QAM	75	0	21.64	21.56	21.33		
15	64QAM	1	0	21.65	21.78	21.53		
15	64QAM	1	37	21.74	21.71	21.47	22.5	2
15	64QAM	1	74	21.83	21.72	21.39		
15	64QAM	36	0	20.54	20.59	20.44		
15	64QAM	36	20	20.57	20.60	20.37	21.5	3
15	64QAM	36	39	20.74	20.58	20.34		
15	64QAM	75	0	20.72	20.66	20.45		



Channel				20800	21100	21400	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				2505	2535	2565		
10	QPSK	1	0	23.45	23.48	23.18	24.5	0
10	QPSK	1	25	23.35	23.48	23.08		
10	QPSK	1	49	23.31	23.38	23.12		
10	QPSK	25	0	22.46	22.51	22.26	23.5	1
10	QPSK	25	12	22.45	22.53	22.26		
10	QPSK	25	25	22.62	22.49	22.22		
10	QPSK	50	0	22.64	22.45	22.24		
10	16QAM	1	0	22.73	22.81	22.64	23.5	1
10	16QAM	1	25	22.77	22.83	22.41		
10	16QAM	1	49	22.90	22.73	22.47		
10	16QAM	25	0	21.58	21.64	21.39	22.5	2
10	16QAM	25	12	21.55	21.65	21.37		
10	16QAM	25	25	21.67	21.61	21.25		
10	16QAM	50	0	21.68	21.62	21.39		
10	64QAM	1	0	21.74	21.80	21.53	22.5	2
10	64QAM	1	25	21.73	21.72	21.38		
10	64QAM	1	49	21.84	21.62	21.40		
10	64QAM	25	0	20.54	20.59	20.35	21.5	3
10	64QAM	25	12	20.57	20.62	20.41		
10	64QAM	25	25	20.74	20.57	20.35		
10	64QAM	50	0	20.68	20.68	20.42		
Channel				20775	21100	21425	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				2502.5	2535	2567.5		
5	QPSK	1	0	23.37	23.48	23.25	24.5	0
5	QPSK	1	12	23.35	23.47	23.11		
5	QPSK	1	24	23.32	23.40	23.17		
5	QPSK	12	0	22.46	22.45	22.26	23.5	1
5	QPSK	12	7	22.44	22.52	22.33		
5	QPSK	12	13	22.56	22.49	22.24		
5	QPSK	25	0	22.59	22.51	22.32		
5	16QAM	1	0	22.77	22.87	22.64	23.5	1
5	16QAM	1	12	22.79	22.85	22.44		
5	16QAM	1	24	22.87	22.81	22.46		
5	16QAM	12	0	21.51	21.56	21.34	22.5	2
5	16QAM	12	7	21.56	21.62	21.39		
5	16QAM	12	13	21.64	21.57	21.28		
5	16QAM	25	0	21.62	21.58	21.40		
5	64QAM	1	0	21.71	21.78	21.50	22.5	2
5	64QAM	1	12	21.73	21.71	21.41		
5	64QAM	1	24	21.86	21.62	21.37		
5	64QAM	12	0	20.56	20.61	20.36	21.5	3
5	64QAM	12	7	20.58	20.68	20.43		
5	64QAM	12	13	20.66	20.67	20.34		
5	64QAM	25	0	20.65	20.61	20.43		



**Reduced Power Mode**

**<LTE Band 2>**

BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Middle Ch. / Freq.	Power High Ch. / Freq.	Tune-up limit (dBm)	MPR (dB)
Channel				18700	18900	19100		
Frequency (MHz)				1860	1880	1900		
20	QPSK	1	0	23.18	23.33	23.32	24.0	0
20	QPSK	1	49	23.14	23.11	23.26		
20	QPSK	1	99	23.09	23.15	23.25		
20	QPSK	50	0	22.27	22.36	22.26	23.0	1
20	QPSK	50	24	22.22	22.20	22.34		
20	QPSK	50	50	22.18	22.14	22.28		
20	QPSK	100	0	22.22	22.17	22.31	23.0	1
20	16QAM	1	0	22.37	22.26	22.45		
20	16QAM	1	49	22.46	22.31	22.42		
20	16QAM	1	99	22.44	22.35	22.41	22.0	2
20	16QAM	50	0	21.20	21.25	21.41		
20	16QAM	50	24	21.25	21.26	21.39		
20	16QAM	50	50	21.27	21.18	21.37	22.0	2
20	16QAM	100	0	21.14	21.25	21.39		
20	64QAM	1	0	21.28	21.30	21.44		
20	64QAM	1	49	21.35	21.27	21.47	22.0	2
20	64QAM	1	99	21.36	21.32	21.42		
20	64QAM	50	0	20.23	20.29	20.46		
20	64QAM	50	24	20.28	20.31	20.44	21.0	3
20	64QAM	50	50	20.25	20.25	20.38		
20	64QAM	100	0	20.18	20.23	20.38		
Channel				18675	18900	19125		
Frequency (MHz)				1857.5	1880	1902.5		
15	QPSK	1	0	23.09	23.31	23.22	24.0	0
15	QPSK	1	37	23.09	23.04	23.18		
15	QPSK	1	74	23.06	23.10	23.25		
15	QPSK	36	0	22.22	22.19	22.35	23.0	1
15	QPSK	36	20	22.19	22.16	22.27		
15	QPSK	36	39	22.14	22.13	22.21		
15	QPSK	75	0	22.20	22.07	22.31	23.0	1
15	16QAM	1	0	22.29	22.21	22.42		
15	16QAM	1	37	22.46	22.31	22.43		
15	16QAM	1	74	22.40	22.33	22.40	22.0	2
15	16QAM	36	0	21.18	21.17	21.34		
15	16QAM	36	20	21.21	21.26	21.30		
15	16QAM	36	39	21.18	21.13	21.34	22.0	2
15	16QAM	75	0	21.14	21.23	21.29		
15	64QAM	1	0	21.26	21.21	21.37		
15	64QAM	1	37	21.27	21.22	21.43	22.0	2
15	64QAM	1	74	21.35	21.32	21.34		
15	64QAM	36	0	20.14	20.20	20.46		
15	64QAM	36	20	20.25	20.22	20.41	21.0	3
15	64QAM	36	39	20.19	20.16	20.31		
15	64QAM	75	0	20.09	20.23	20.31		





**FCC SAR TEST REPORT**

**Report No. : FA052913-03**

Channel				18650	18900	19150	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				1855	1880	1905		
10	QPSK	1	0	23.12	23.32	23.29	24.0	0
10	QPSK	1	25	23.13	23.05	23.21		
10	QPSK	1	49	22.99	23.14	23.21		
10	QPSK	25	0	22.17	22.11	22.36	23.0	1
10	QPSK	25	12	22.22	22.13	22.30		
10	QPSK	25	25	22.16	22.08	22.18		
10	QPSK	50	0	22.17	22.12	22.22		
10	16QAM	1	0	22.35	22.19	22.41	23.0	1
10	16QAM	1	25	22.40	22.31	22.42		
10	16QAM	1	49	22.39	22.29	22.36		
10	16QAM	25	0	21.19	21.22	21.36	22.0	2
10	16QAM	25	12	21.17	21.18	21.36		
10	16QAM	25	25	21.20	21.12	21.27		
10	16QAM	50	0	21.10	21.23	21.29		
10	64QAM	1	0	21.28	21.21	21.40	22.0	2
10	64QAM	1	25	21.28	21.21	21.44		
10	64QAM	1	49	21.29	21.22	21.42		
10	64QAM	25	0	20.19	20.27	20.46	21.0	3
10	64QAM	25	12	20.22	20.28	20.37		
10	64QAM	25	25	20.17	20.18	20.33		
10	64QAM	50	0	20.14	20.23	20.29		
Channel				18625	18900	19175	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				1852.5	1880	1907.5		
5	QPSK	1	0	23.08	23.29	23.26	24.0	0
5	QPSK	1	12	23.09	23.10	23.23		
5	QPSK	1	24	23.00	23.14	23.20		
5	QPSK	12	0	22.23	22.15	22.36	23.0	1
5	QPSK	12	7	22.15	22.10	22.28		
5	QPSK	12	13	22.16	22.10	22.21		
5	QPSK	25	0	22.16	22.10	22.25		
5	16QAM	1	0	22.31	22.19	22.41	23.0	1
5	16QAM	1	12	22.39	22.28	22.40		
5	16QAM	1	24	22.39	22.25	22.36		
5	16QAM	12	0	21.19	21.24	21.41	22.0	2
5	16QAM	12	7	21.19	21.26	21.37		
5	16QAM	12	13	21.24	21.14	21.30		
5	16QAM	25	0	21.10	21.18	21.33		
5	64QAM	1	0	21.19	21.23	21.35	22.0	2
5	64QAM	1	12	21.30	21.18	21.37		
5	64QAM	1	24	21.27	21.25	21.35		
5	64QAM	12	0	20.23	20.26	20.46	21.0	3
5	64QAM	12	7	20.21	20.28	20.44		
5	64QAM	12	13	20.23	20.21	20.34		
5	64QAM	25	0	20.14	20.21	20.29		
Channel				18615	18900	19185	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				1851.5	1880	1908.5		
3	QPSK	1	0	23.09	23.23	23.25	24.0	0
3	QPSK	1	8	23.12	23.06	23.25		



3	QPSK	1	14	23.05	23.07	23.17		
3	QPSK	8	0	22.21	22.11	22.28	23.0	1
3	QPSK	8	4	22.17	22.15	22.24		
3	QPSK	8	7	22.09	22.07	22.23		
3	QPSK	15	0	22.16	22.15	22.29		
3	16QAM	1	0	22.30	22.17	22.41	23.0	1
3	16QAM	1	8	22.45	22.28	22.45		
3	16QAM	1	14	22.43	22.30	22.32		
3	16QAM	8	0	21.15	21.18	21.33	22.0	2
3	16QAM	8	4	21.23	21.25	21.34		
3	16QAM	8	7	21.19	21.09	21.34		
3	16QAM	15	0	21.12	21.22	21.38		
3	64QAM	1	0	21.26	21.30	21.35	22.0	2
3	64QAM	1	8	21.29	21.18	21.43		
3	64QAM	1	14	21.32	21.32	21.34		
3	64QAM	8	0	20.19	20.29	20.37	21.0	3
3	64QAM	8	4	20.25	20.27	20.34		
3	64QAM	8	7	20.17	20.16	20.33		
3	64QAM	15	0	20.08	20.18	20.33		
Channel				18607	18900	19193	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				1850.7	1880	1909.3		
1.4	QPSK	1	0	23.13	23.28	23.32	24.0	0
1.4	QPSK	1	3	23.05	23.09	23.22		
1.4	QPSK	1	5	23.01	23.13	23.23		
1.4	QPSK	3	0	23.10	23.32	23.26		
1.4	QPSK	3	1	23.04	23.03	23.18		
1.4	QPSK	3	3	23.08	23.05	23.24		
1.4	QPSK	6	0	22.19	22.10	22.25	23.0	1
1.4	16QAM	1	0	22.28	22.18	22.43	23.0	1
1.4	16QAM	1	3	22.43	22.28	22.44		
1.4	16QAM	1	5	22.34	22.30	22.35		
1.4	16QAM	3	0	22.29	22.23	22.47		
1.4	16QAM	3	1	22.44	22.31	22.44		
1.4	16QAM	3	3	22.36	22.35	22.33		
1.4	16QAM	6	0	21.08	21.20	21.36	22.0	2
1.4	64QAM	1	0	21.21	21.28	21.35	22.0	2
1.4	64QAM	1	3	21.34	21.26	21.47		
1.4	64QAM	1	5	21.26	21.31	21.32		
1.4	64QAM	3	0	21.27	21.22	21.36		
1.4	64QAM	3	1	21.26	21.27	21.40		
1.4	64QAM	3	3	21.33	21.23	21.35		
1.4	64QAM	6	0	20.13	20.16	20.33	21.0	3



<LTE Band 4>

BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Middle Ch. / Freq.	Power High Ch. / Freq.	Tune-up limit (dBm)	MPR (dB)
Channel				20050	20175	20300		
Frequency (MHz)				1720	1732.5	1745		
20	QPSK	1	0	23.22	23.30	23.25	24.0	0
20	QPSK	1	49	23.11	23.13	23.12		
20	QPSK	1	99	23.17	23.03	22.98		
20	QPSK	50	0	22.17	22.34	22.20	23.0	1
20	QPSK	50	24	22.26	22.24	22.18		
20	QPSK	50	50	22.25	22.26	22.21		
20	QPSK	100	0	22.25	22.20	22.11	23.0	1
20	16QAM	1	0	22.32	22.41	22.41		
20	16QAM	1	49	22.46	22.39	22.29		
20	16QAM	1	99	22.33	22.38	22.36	22.0	2
20	16QAM	50	0	21.27	21.28	21.25		
20	16QAM	50	24	21.37	21.30	21.27		
20	16QAM	50	50	21.41	21.22	21.18	22.0	2
20	16QAM	100	0	21.31	21.25	21.19		
20	64QAM	1	0	21.27	21.32	21.40		
20	64QAM	1	49	21.40	21.39	21.39	22.0	2
20	64QAM	1	99	21.45	21.26	21.27		
20	64QAM	50	0	20.29	20.28	20.26		
20	64QAM	50	24	20.41	20.30	20.27	21.0	3
20	64QAM	50	50	20.40	20.22	20.18		
20	64QAM	100	0	20.30	20.25	20.24		
Channel				20025	20175	20325	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				1717.5	1732.5	1747.5		
15	QPSK	1	0	22.96	23.07	23.15	24.0	0
15	QPSK	1	37	23.05	23.13	23.02		
15	QPSK	1	74	23.10	22.94	22.90		
15	QPSK	36	0	22.10	22.23	22.18	23.0	1
15	QPSK	36	20	22.18	22.22	22.09		
15	QPSK	36	39	22.29	22.21	22.18		
15	QPSK	75	0	22.23	22.18	22.11	23.0	1
15	16QAM	1	0	22.31	22.39	22.27		
15	16QAM	1	37	22.38	22.42	22.38		
15	16QAM	1	74	22.46	22.38	22.33	22.0	2
15	16QAM	36	0	21.23	21.18	21.25		
15	16QAM	36	20	21.29	21.24	21.24		
15	16QAM	36	39	21.40	21.13	21.13	22.0	2
15	16QAM	75	0	21.30	21.23	21.16		
15	64QAM	1	0	21.21	21.26	21.31		
15	64QAM	1	37	21.38	21.39	21.36	22.0	2
15	64QAM	1	74	21.36	21.19	21.22		
15	64QAM	36	0	20.27	20.22	20.20		
15	64QAM	36	20	20.37	20.21	20.26	21.0	3
15	64QAM	36	39	20.36	20.13	20.08		
15	64QAM	75	0	20.27	20.16	20.18		



**FCC SAR TEST REPORT**

**Report No. : FA052913-03**

Channel				20000	20175	20350	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				1715	1732.5	1750		
10	QPSK	1	0	22.95	23.05	23.05	24.0	0
10	QPSK	1	25	23.11	23.13	23.03		
10	QPSK	1	49	23.17	22.96	22.95		
10	QPSK	25	0	22.15	22.22	22.14	23.0	1
10	QPSK	25	12	22.16	22.20	22.09		
10	QPSK	25	25	22.26	22.21	22.11		
10	QPSK	50	0	22.18	22.11	22.01		
10	16QAM	1	0	22.25	22.40	22.34	23.0	1
10	16QAM	1	25	22.36	22.39	22.44		
10	16QAM	1	49	22.34	22.32	22.35		
10	16QAM	25	0	21.23	21.22	21.25	22.0	2
10	16QAM	25	12	21.31	21.20	21.21		
10	16QAM	25	25	21.38	21.21	21.10		
10	16QAM	50	0	21.26	21.16	21.11		
10	64QAM	1	0	21.22	21.28	21.31	22.0	2
10	64QAM	1	25	21.39	21.32	21.30		
10	64QAM	1	49	21.43	21.26	21.17		
10	64QAM	25	0	20.21	20.24	20.25	21.0	3
10	64QAM	25	12	20.41	20.21	20.20		
10	64QAM	25	25	20.40	20.22	20.17		
10	64QAM	50	0	20.25	20.21	20.14		
Channel				19975	20175	20375	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				1712.5	1732.5	1752.5		
5	QPSK	1	0	22.98	23.11	23.07	24.0	0
5	QPSK	1	12	23.06	23.07	23.08		
5	QPSK	1	24	23.16	22.97	22.91		
5	QPSK	12	0	22.13	22.15	22.12	23.0	1
5	QPSK	12	7	22.17	22.18	22.15		
5	QPSK	12	13	22.31	22.25	22.17		
5	QPSK	25	0	22.22	22.10	22.10	23.0	1
5	16QAM	1	0	22.27	22.32	22.46		
5	16QAM	1	12	22.42	22.38	22.35		
5	16QAM	1	24	22.41	22.30	22.26	22.0	2
5	16QAM	12	0	21.22	21.23	21.20		
5	16QAM	12	7	21.28	21.26	21.18		
5	16QAM	12	13	21.33	21.16	21.13		
5	16QAM	25	0	21.23	21.23	21.12	21.0	3
5	64QAM	1	0	21.23	21.23	21.36		
5	64QAM	1	12	21.31	21.32	21.37		
5	64QAM	1	24	21.44	21.20	21.21		
5	64QAM	12	0	20.20	20.27	20.17	21.0	3
5	64QAM	12	7	20.34	20.28	20.26		
5	64QAM	12	13	20.36	20.16	20.11		
5	64QAM	25	0	20.25	20.15	20.17		
Channel				19965	20175	20385	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				1711.5	1732.5	1753.5		
3	QPSK	1	0	22.96	23.09	23.13	24.0	0
3	QPSK	1	8	23.10	23.06	23.03		




3	QPSK	1	14	23.09	22.98	22.95		
3	QPSK	8	0	22.07	22.22	22.18	23.0	1
3	QPSK	8	4	22.26	22.18	22.11		
3	QPSK	8	7	22.30	22.25	22.17		
3	QPSK	15	0	22.23	22.10	22.09		
3	16QAM	1	0	22.30	22.32	22.43	23.0	1
3	16QAM	1	8	22.43	22.44	22.37		
3	16QAM	1	14	22.44	22.36	22.32		
3	16QAM	8	0	21.24	21.19	21.25	22.0	2
3	16QAM	8	4	21.36	21.29	21.22		
3	16QAM	8	7	21.37	21.19	21.18		
3	16QAM	15	0	21.30	21.25	21.14		
3	64QAM	1	0	21.22	21.23	21.31	22.0	2
3	64QAM	1	8	21.33	21.35	21.39		
3	64QAM	1	14	21.39	21.18	21.19		
3	64QAM	8	0	20.27	20.24	20.19	21.0	3
3	64QAM	8	4	20.41	20.23	20.23		
3	64QAM	8	7	20.33	20.17	20.18		
3	64QAM	15	0	20.30	20.20	20.17		
Channel				19957	20175	20393	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				1710.7	1732.5	1754.3		
1.4	QPSK	1	0	22.96	23.13	23.09	24.0	0
1.4	QPSK	1	3	23.11	23.06	23.09		
1.4	QPSK	1	5	23.11	23.01	22.91		
1.4	QPSK	3	0	22.97	23.14	23.14		
1.4	QPSK	3	1	23.10	23.05	23.06		
1.4	QPSK	3	3	23.14	22.95	22.90	23.0	1
1.4	QPSK	6	0	22.19	22.18	22.04		
1.4	16QAM	1	0	22.25	22.34	22.39	23.0	1
1.4	16QAM	1	3	22.42	22.39	22.42		
1.4	16QAM	1	5	22.43	22.35	22.31		
1.4	16QAM	3	0	22.31	22.37	22.39		
1.4	16QAM	3	1	22.41	22.41	22.43		
1.4	16QAM	3	3	22.44	22.29	22.33	22.0	2
1.4	16QAM	6	0	21.27	21.17	21.18		
1.4	64QAM	1	0	21.17	21.22	21.38	22.0	2
1.4	64QAM	1	3	21.38	21.31	21.32		
1.4	64QAM	1	5	21.41	21.19	21.20		
1.4	64QAM	3	0	21.19	21.27	21.33		
1.4	64QAM	3	1	21.36	21.39	21.37		
1.4	64QAM	3	3	21.39	21.20	21.19		
1.4	64QAM	6	0	20.25	20.20	20.15	21.0	3

**<TDD LTE SAR Measurement>**

TDD LTE configuration setup for SAR measurement

SAR was tested with a fixed periodic duty factor according to the highest transmission duty factor implemented for the device and supported by 3GPP.

- a. 3GPP TS 36.211 section 4.2 for Type 2 Frame Structure and Table 4.2-2 for uplink-downlink configurations
- b. "special subframe S" contains both uplink and downlink transmissions, it has been taken into consideration to determine the transmission duty factor according to the worst case uplink and downlink cyclic prefix requirements for UpPTS
- c. Establishing connections with base station simulators ensure a consistent means for testing SAR and recommended for evaluating SAR. The Anritsu MT8820C (firmware: #22.52#004) was used for LTE output power measurements and SAR testing.

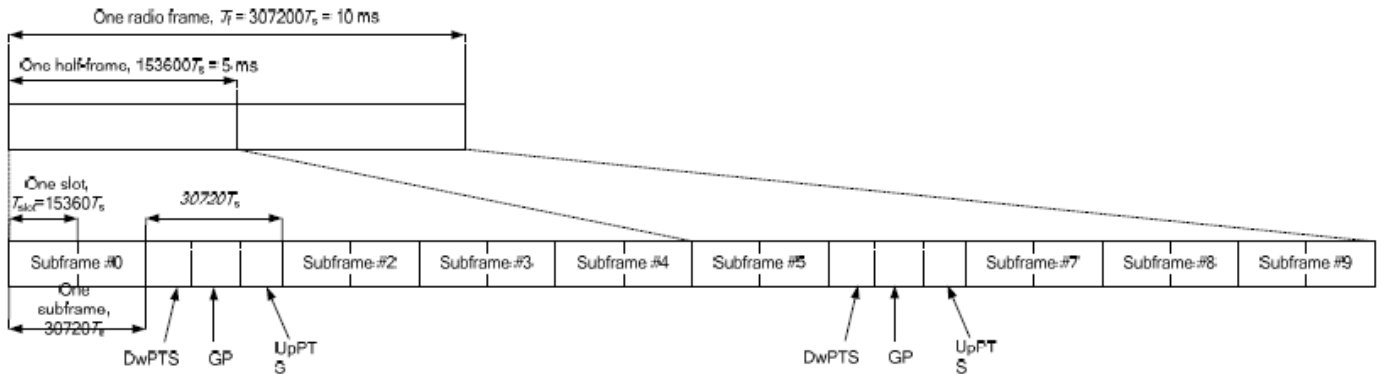

**Figure 4.2-1: Frame structure type 2 (for 5 ms switch-point periodicity).**

**Table 4.2-2: Uplink-downlink configurations.**

Uplink-downlink configuration	Downlink-to-Uplink Switch-point periodicity	Subframe number									
		0	1	2	3	4	5	6	7	8	9
0	5 ms	D	S	U	U	U	D	S	U	U	U
1	5 ms	D	S	U	U	D	D	S	U	U	D
2	5 ms	D	S	U	D	D	D	S	U	D	D
3	10 ms	D	S	U	U	U	D	D	D	D	D
4	10 ms	D	S	U	U	D	D	D	D	D	D
5	10 ms	D	S	U	D	D	D	D	D	D	D
6	5 ms	D	S	U	U	U	D	S	U	U	D

**Table 4.2-1: Configuration of special subframe (lengths of DwPTS/GP/UpPTS).**

Special subframe configuration	Normal cyclic prefix in downlink				Extended cyclic prefix in downlink			
	DwPTS	UpPTS		DwPTS	UpPTS			
		Normal cyclic prefix in uplink	Extended cyclic prefix in uplink		Normal cyclic prefix in uplink	Extended cyclic prefix in uplink		
0	6592 · Ts	2192 · Ts	2560 · Ts	7680 · Ts	2192 · Ts	2560 · Ts		
1	19760 · Ts			20480 · Ts				
2	21952 · Ts			23040 · Ts				
3	24144 · Ts			25600 · Ts				
4	26336 · Ts	7680 · Ts	4384 · Ts	5120 · Ts				
5	6592 · Ts	20480 · Ts						
6	19760 · Ts	23040 · Ts						
7	21952 · Ts	4384 · Ts	5120 · Ts	12800 · Ts	4384 · Ts	5120 · Ts		
8	24144 · Ts			-				-
9	13168 · Ts			-			-	

<b>Special subframe (30720·T<sub>s</sub>): Normal cyclic prefix in downlink (UpPTS)</b>			
	<b>Special subframe configuration</b>	<b>Normal cyclic prefix in uplink</b>	<b>Extended cyclic prefix in uplink</b>
<b>Uplink duty factor in one special subframe</b>	<b>0~4</b>	7.13%	8.33%
	<b>5~9</b>	14.3%	16.7%

<b>Special subframe(30720·T<sub>s</sub>): Extended cyclic prefix in downlink (UpPTS)</b>			
	<b>Special subframe configuration</b>	<b>Normal cyclic prefix in uplink</b>	<b>Extended cyclic prefix in uplink</b>
<b>Uplink duty factor in one special subframe</b>	<b>0~3</b>	7.13%	8.33%
	<b>4~7</b>	14.3%	16.7%

The highest duty factor is resulted from:

- i. Uplink-downlink configuration: 0. In a half-frame consisted of 5 subframes, uplink operation is in 3 uplink subframes and 1 special subframe.
- ii. special subframe configuration: 5-9 for normal cyclic prefix in downlink, 4-7 for extended cyclic prefix in downlink
- iii. for special subframe with extended cyclic prefix in uplink, the total uplink duty factor in one half-frame is:  $(3+0.167)/5 = 63.3\%$
- iv. for special subframe with normal cyclic prefix in uplink, the total uplink duty factor in one half-frame is:  $(3+0.143)/5 = 62.9\%$
- v. For TDD LTE SAR measurement, the duty cycle 1:1.59 (62.9 %) was used perform testing and considering the theoretical duty cycle of 63.3% for extended cyclic prefix in the uplink, and the theoretical duty cycle of 62.9% for normal cyclic prefix in uplink, a scaling factor of extended cyclic prefix  $63.3\%/62.9\% = 1.006$  is applied to scale-up the measured SAR result. The scaled TDD LTE SAR = measured SAR (W/kg)\* Tune-up Scaling Factor\* scaling factor for extended cyclic prefix.



**<LTE Band 38>**

BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Middle Ch. / Freq.	Power High Ch. / Freq.	Tune-up limit (dBm)	MPR (dB)
Channel				37850	38000	38150		
Frequency (MHz)				2580	2595	2610		
20	QPSK	1	0	23.76	23.77	23.62	24.5	0
20	QPSK	1	49	23.60	23.41	23.47		
20	QPSK	1	99	23.49	23.44	23.51		
20	QPSK	50	0	22.69	22.75	22.62	23.5	1
20	QPSK	50	24	22.68	22.62	22.61		
20	QPSK	50	50	22.65	22.52	22.47		
20	QPSK	100	0	22.69	22.70	22.58		
20	16QAM	1	0	22.79	22.67	22.72	23.5	1
20	16QAM	1	49	22.79	22.63	22.61		
20	16QAM	1	99	22.60	22.59	22.55		
20	16QAM	50	0	21.89	21.76	21.69	22.5	2
20	16QAM	50	24	21.77	21.70	21.72		
20	16QAM	50	50	21.68	21.65	21.68		
20	16QAM	100	0	21.81	21.59	21.67		
20	64QAM	1	0	21.42	21.36	21.30	22.5	2
20	64QAM	1	49	21.43	21.23	21.18		
20	64QAM	1	99	21.30	21.25	21.17		
20	64QAM	50	0	20.88	20.69	20.71	21.5	3
20	64QAM	50	24	20.76	20.69	20.62		
20	64QAM	50	50	20.69	20.58	20.63		
20	64QAM	100	0	20.72	20.62	20.60		
Channel				37825	38000	38175	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				2577.5	2595	2612.5		
15	QPSK	1	0	23.69	23.53	23.58	24.5	0
15	QPSK	1	37	23.67	23.49	23.48		
15	QPSK	1	74	23.47	23.43	23.47		
15	QPSK	36	0	22.73	22.60	22.56	23.5	1
15	QPSK	36	20	22.65	22.64	22.58		
15	QPSK	36	39	22.63	22.51	22.53		
15	QPSK	75	0	22.65	22.53	22.55	23.5	1
15	16QAM	1	0	22.82	22.74	22.73		
15	16QAM	1	37	22.80	22.53	22.62		
15	16QAM	1	74	22.66	22.64	22.62		
15	16QAM	36	0	21.89	21.77	21.63	22.5	2
15	16QAM	36	20	21.82	21.63	21.69		
15	16QAM	36	39	21.73	21.63	21.65		
15	16QAM	75	0	21.76	21.67	21.66	22.5	2
15	64QAM	1	0	21.46	21.34	21.33		
15	64QAM	1	37	21.43	21.22	21.19		
15	64QAM	1	74	21.25	21.21	21.25		
15	64QAM	36	0	20.83	20.74	20.72	21.5	3
15	64QAM	36	20	20.80	20.61	20.64		
15	64QAM	36	39	20.70	20.67	20.64		
15	64QAM	75	0	20.75	20.61	20.64		





**FCC SAR TEST REPORT**

**Report No. : FA052913-03**

Channel				37800	38000	38200	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				2575	2595	2615		
10	QPSK	1	0	23.66	23.61	23.58	24.5	0
10	QPSK	1	25	23.59	23.41	23.48		
10	QPSK	1	49	23.50	23.47	23.48		
10	QPSK	25	0	22.68	22.59	22.53	23.5	1
10	QPSK	25	12	22.73	22.56	22.55		
10	QPSK	25	25	22.63	22.51	22.49		
10	QPSK	50	0	22.61	22.51	22.55		
10	16QAM	1	0	22.79	22.74	22.70	23.5	1
10	16QAM	1	25	22.75	22.60	22.61		
10	16QAM	1	49	22.65	22.59	22.54		
10	16QAM	25	0	21.82	21.74	21.69	22.5	2
10	16QAM	25	12	21.85	21.62	21.66		
10	16QAM	25	25	21.74	21.65	21.64		
10	16QAM	50	0	21.80	21.61	21.61		
10	64QAM	1	0	21.47	21.36	21.26	22.5	2
10	64QAM	1	25	21.39	21.21	21.24		
10	64QAM	1	49	21.27	21.21	21.22		
10	64QAM	25	0	20.86	20.73	20.67	21.5	3
10	64QAM	25	12	20.86	20.61	20.68		
10	64QAM	25	25	20.73	20.60	20.64		
10	64QAM	50	0	20.75	20.64	20.59		
Channel				37775	38000	38225	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				2572.5	2595	2617.5		
5	QPSK	1	0	23.73	23.54	23.52	24.5	0
5	QPSK	1	12	23.60	23.50	23.48		
5	QPSK	1	24	23.52	23.45	23.46		
5	QPSK	12	0	22.78	22.58	22.57	23.5	1
5	QPSK	12	7	22.68	22.63	22.59		
5	QPSK	12	13	22.61	22.55	22.51		
5	QPSK	25	0	22.66	22.59	22.54		
5	16QAM	1	0	22.86	22.70	22.74	23.5	1
5	16QAM	1	12	22.76	22.60	22.61		
5	16QAM	1	24	22.67	22.58	22.61		
5	16QAM	12	0	21.87	21.78	21.69	22.5	2
5	16QAM	12	7	21.81	21.68	21.63		
5	16QAM	12	13	21.68	21.65	21.66		
5	16QAM	25	0	21.74	21.61	21.69		
5	64QAM	1	0	21.48	21.31	21.25	22.5	2
5	64QAM	1	12	21.42	21.20	21.22		
5	64QAM	1	24	21.28	21.19	21.18		
5	64QAM	12	0	20.87	20.73	20.66	21.5	3
5	64QAM	12	7	20.86	20.63	20.64		
5	64QAM	12	13	20.70	20.60	20.62		
5	64QAM	25	0	20.72	20.62	20.64		



<LTE Band 41>

BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Low Middle Ch. / Freq.	Power Middle Ch. / Freq.	Power High Middle Ch. / Freq.	Power High Ch. / Freq.	Tune-up limit (dBm)	MPR (dB)
Channel				39750	40185	40620	41055	41490		
Frequency (MHz)				2506	2549.5	2593	2636.5	2680		
20	QPSK	1	0	23.60	23.77	23.70	23.75	24.01	24.5	0
20	QPSK	1	49	23.39	23.61	23.52	23.75	23.73		
20	QPSK	1	99	23.55	23.70	23.44	23.72	23.57		
20	QPSK	50	0	22.53	22.75	22.66	22.70	22.83	23.5	1
20	QPSK	50	24	22.55	22.80	22.67	22.81	22.82		
20	QPSK	50	50	22.54	22.79	22.58	22.79	22.71		
20	QPSK	100	0	22.51	22.80	22.57	22.80	22.81	23.5	1
20	16QAM	1	0	22.58	22.75	22.71	22.83	22.70		
20	16QAM	1	49	22.58	22.77	22.59	22.90	22.85		
20	16QAM	1	99	22.70	22.82	22.54	22.88	22.78	22.5	2
20	16QAM	50	0	21.63	21.81	21.76	21.78	21.79		
20	16QAM	50	24	21.61	21.84	21.68	21.91	21.84		
20	16QAM	50	50	21.66	21.84	21.68	21.89	21.83	21.5	3
20	16QAM	100	0	21.57	21.77	21.74	21.84	21.82		
20	64QAM	1	0	21.18	21.41	21.36	21.40	21.18		
20	64QAM	1	49	21.12	21.38	21.30	21.47	21.45	22.5	2
20	64QAM	1	99	21.25	21.41	21.19	21.44	21.08		
20	64QAM	50	0	20.63	20.81	20.75	20.83	20.77		
20	64QAM	50	24	20.57	20.88	20.68	20.88	20.88	21.5	3
20	64QAM	50	50	20.61	20.84	20.64	20.92	20.75		
20	64QAM	100	0	20.57	20.77	20.71	20.76	20.67		
Channel				39725	40173	40620	41068	41515	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				2503.5	2548.3	2593	2637.8	2682.5		
15	QPSK	1	0	23.42	23.64	23.60	23.87	23.63	24.5	0
15	QPSK	1	37	23.43	23.63	23.47	23.78	23.70		
15	QPSK	1	74	23.57	23.69	23.44	23.68	23.60		
15	QPSK	36	0	22.48	22.66	22.71	22.70	22.69	23.5	1
15	QPSK	36	20	22.52	22.72	22.65	22.76	22.67		
15	QPSK	36	39	22.57	22.77	22.52	22.74	22.68		
15	QPSK	75	0	22.47	22.74	22.58	22.83	22.61	23.5	1
15	16QAM	1	0	22.50	22.73	22.77	22.79	22.77		
15	16QAM	1	37	22.50	22.72	22.59	22.91	22.81		
15	16QAM	1	74	22.67	22.85	22.61	22.80	22.85	22.5	2
15	16QAM	36	0	21.65	21.85	21.77	21.87	21.78		
15	16QAM	36	20	21.64	21.88	21.77	21.98	21.89		
15	16QAM	36	39	21.69	21.89	21.61	21.92	21.87	22.5	2
15	16QAM	75	0	21.63	21.77	21.70	21.87	21.82		
15	64QAM	1	0	21.15	21.42	21.39	21.44	21.11		
15	64QAM	1	37	21.12	21.39	21.31	21.48	21.42	22.5	2
15	64QAM	1	74	21.23	21.45	21.23	21.44	21.13		
15	64QAM	36	0	20.55	20.81	20.78	20.79	20.78		
15	64QAM	36	20	20.56	20.85	20.73	20.88	20.82	21.5	3
15	64QAM	36	39	20.62	20.90	20.70	20.92	20.70		
15	64QAM	75	0	20.58	20.79	20.69	20.78	20.69		



**FCC SAR TEST REPORT**

**Report No. : FA052913-03**

Channel				39700	40160	40620	41080	41540	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				2501	2547	2593	2639	2685		
10	QPSK	1	0	23.41	23.65	23.59	23.87	23.73	24.5	0
10	QPSK	1	25	23.45	23.57	23.45	23.74	23.76		
10	QPSK	1	49	23.54	23.64	23.49	23.75	23.64		
10	QPSK	25	0	22.45	22.67	22.64	22.67	22.69	23.5	1
10	QPSK	25	12	22.46	22.74	22.58	22.82	22.69		
10	QPSK	25	25	22.55	22.77	22.54	22.80	22.66		
10	QPSK	50	0	22.46	22.74	22.60	22.79	22.63		
10	16QAM	1	0	22.52	22.75	22.76	22.79	22.80	23.5	1
10	16QAM	1	25	22.57	22.72	22.67	22.91	22.90		
10	16QAM	1	49	22.64	22.82	22.61	22.83	22.81		
10	16QAM	25	0	21.59	21.83	21.80	21.80	21.79	22.5	2
10	16QAM	25	12	21.64	21.82	21.69	21.91	21.88		
10	16QAM	25	25	21.59	21.89	21.64	21.89	21.92		
10	16QAM	50	0	21.57	21.86	21.76	21.82	21.84		
10	64QAM	1	0	21.15	21.32	21.35	21.39	21.15	22.5	2
10	64QAM	1	25	21.15	21.33	21.26	21.49	21.45		
10	64QAM	1	49	21.22	21.41	21.25	21.46	21.10		
10	64QAM	25	0	20.64	20.77	20.72	20.75	20.71	21.5	3
10	64QAM	25	12	20.57	20.85	20.69	20.90	20.82		
10	64QAM	25	25	20.59	20.90	20.68	20.93	20.68		
10	64QAM	50	0	20.63	20.77	20.76	20.74	20.60		
Channel				39675	40148	40620	41093	41565	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				2498.5	2545.8	2593	2640.30	2687.5		
5	QPSK	1	0	23.36	23.61	23.60	23.85	23.65	24.5	0
5	QPSK	1	12	23.45	23.67	23.45	23.80	23.71		
5	QPSK	1	24	23.51	23.63	23.47	23.66	23.62		
5	QPSK	12	0	22.52	22.72	22.64	22.75	22.69	23.5	1
5	QPSK	12	7	22.56	22.79	22.64	22.84	22.69		
5	QPSK	12	13	22.58	22.73	22.57	22.78	22.69		
5	QPSK	25	0	22.47	22.77	22.59	22.74	22.69		
5	16QAM	1	0	22.53	22.78	22.74	22.78	22.75	23.5	1
5	16QAM	1	12	22.56	22.78	22.63	22.85	22.85		
5	16QAM	1	24	22.67	22.79	22.54	22.84	22.81		
5	16QAM	12	0	21.65	21.86	21.80	21.82	21.82	22.5	2
5	16QAM	12	7	21.60	21.84	21.67	21.88	21.88		
5	16QAM	12	13	21.63	21.90	21.65	21.86	21.91		
5	16QAM	25	0	21.62	21.79	21.76	21.87	21.84		
5	64QAM	1	0	21.20	21.36	21.34	21.37	21.17	22.5	2
5	64QAM	1	12	21.11	21.36	21.33	21.50	21.52		
5	64QAM	1	24	21.27	21.47	21.18	21.45	21.08		
5	64QAM	12	0	20.61	20.76	20.72	20.82	20.70	21.5	3
5	64QAM	12	7	20.61	20.87	20.76	20.95	20.79		
5	64QAM	12	13	20.66	20.87	20.63	20.90	20.65		
5	64QAM	25	0	20.58	20.78	20.73	20.76	20.63		



## **12. WiFi/Bluetooth Output Power (Unit: dBm)**

### **General Note:**

1. Per KDB 248227 D01v02r02, SAR test reduction is determined according to 802.11 transmission mode configurations and certain exposure conditions with multiple test positions. In the 2.4 GHz band, separate SAR procedures are applied to DSSS and OFDM configurations to simplify DSSS test requirements. For OFDM, in both 2.4 and 5 GHz bands, an initial test configuration must be determined for each standalone and aggregated frequency band, according to the transmission mode configuration with the highest maximum output power specified for production units to perform SAR measurements. If the same highest maximum output power applies to different combinations of channel bandwidths, modulations and data rates, additional procedures are applied to determine which test configurations require SAR measurement. When applicable, an initial test position may be applied to reduce the number of SAR measurements required for next to the ear, UMPC mini-tablet or hotspot mode configurations with multiple test positions.
2. For 2.4 GHz 802.11b DSSS, either the initial test position procedure for multiple exposure test positions or the DSSS procedure for fixed exposure position is applied; these are mutually exclusive. For 2.4 GHz and 5 GHz OFDM configurations, the initial test configuration is applied to measure SAR using either the initial test position procedure for multiple exposure test position configurations or the initial test configuration procedures for fixed exposure test conditions. Based on the reported SAR of the measured configurations and maximum output power of the transmission mode configurations that are not included in the initial test configuration, the subsequent test configuration and initial test position procedures are applied to determine if SAR measurements are required for the remaining OFDM transmission configurations. In general, the number of test channels that require SAR measurement is minimized based on maximum output power measured for the test sample(s).
3. For OFDM transmission configurations in the 2.4 GHz and 5 GHz bands, When the same maximum power is specified for multiple transmission modes in a frequency band, the largest channel bandwidth, lowest order modulation, lowest data rate and lowest order 802.11a/g/n/ac mode is used for SAR measurement, on the highest measured output power channel for each frequency band.
4. DSSS and OFDM configurations are considered separately according to the required SAR procedures. SAR is measured in the initial test position using the 802.11 transmission mode configuration required by the DSSS procedure or initial test configuration and subsequent test configuration(s) according to the OFDM procedures.18 The initial test position procedure is described in the following:
  - a. When the reported SAR of the initial test position is  $\leq 0.4$  W/kg, further SAR measurement is not required for the other test positions in that exposure configuration and 802.11 transmission mode combinations within the frequency band or aggregated band.
  - b. When the reported SAR of the test position is  $> 0.4$  W/kg, SAR is repeated for the 802.11 transmission mode configuration tested in the initial test position to measure the subsequent next closet/smallest test separation distance and maximum coupling test position on the highest maximum output power channel, until the report SAR is  $\leq 0.8$  W/kg or all required test position are tested.
  - c. For all positions/configurations, when the reported SAR is  $> 0.8$  W/kg, SAR is measured for these test positions/configurations on the subsequent next highest measured output power channel(s) until the reported SAR is  $\leq 1.2$  W/kg or all required channels are tested.



<2.4GHz WLAN>

	Mode	Channel	Frequency (MHz)	Average power (dBm)	Tune-Up Limit	Duty Cycle %
2.4GHz WLAN	802.11b 1Mbps	1	2412	21.20	21.50	99.28
		6	2437	21.10	21.50	
		11	2462	21.10	21.50	
	802.11g 6Mbps	1	2412	18.30	19.00	98.33
		6	2437	20.30	21.50	
		11	2462	17.80	19.00	
	802.11n-HT20 MCS0	1	2412	17.10	18.00	98.21
		6	2437	20.60	21.50	
		11	2462	17.20	18.00	
	802.11n-HT40 MCS0	3	2422	14.10	15.00	94.50
		6	2437	16.70	17.00	
		9	2452	16.10	17.00	



<5GHz WLAN >

	Mode	Channel	Frequency (MHz)	Average power (dBm)	Tune-Up Limit	Duty Cycle %
5.2GHz WLAN	802.11a 6Mbps	36	5180	18.60	19.50	98.57
		40	5200	18.60	19.50	
		44	5220	18.30	19.50	
		48	5240	18.80	19.50	
	802.11n-HT20 MCS0	36	5180	18.60	19.50	97.96
		40	5200	18.60	19.50	
		44	5220	18.50	19.50	
		48	5240	18.50	19.50	
	802.11n-HT40 MCS0	38	5190	17.90	18.00	96.43
		46	5230	19.00	19.50	
	802.11ac-VHT20 MCS0	36	5180	18.50	19.50	97.98
		40	5200	18.50	19.50	
		44	5220	18.40	19.50	
		48	5240	18.40	19.50	
	802.11ac-VHT40 MCS0	38	5190	17.80	18.00	96.96
		46	5230	18.90	19.50	
802.11ac-VHT80 MCS0	42	5210	17.60	18.00	92.22	

	Mode	Channel	Frequency (MHz)	Average power (dBm)	Tune-Up Limit	Duty Cycle %
5.3GHz WLAN	802.11a 6Mbps	52	5260	19.10	20.00	98.57
		56	5280	19.10	20.00	
		60	5300	19.10	20.00	
		64	5320	18.90	20.00	
	802.11n-HT20 MCS0	52	5260	18.70	20.00	97.96
		56	5280	18.70	20.00	
		60	5300	18.70	20.00	
		64	5320	19.00	20.00	
	802.11n-HT40 MCS0	54	5270	19.50	20.00	96.43
		62	5310	15.70	16.00	
	802.11ac-VHT20 MCS0	52	5260	18.60	20.00	97.98
		56	5280	18.60	20.00	
		60	5300	18.60	20.00	
		64	5320	18.90	20.00	
	802.11ac-VHT40 MCS0	54	5270	19.40	20.00	96.96
		62	5310	15.70	16.00	
802.11ac-VHT80 MCS0	58	5290	15.60	16.00	98.22	



	Mode	Channel	Frequency (MHz)	Average power (dBm)	Tune-Up Limit	Duty Cycle %
5.5GHz WLAN	802.11a 6Mbps	100	5500	19.60	20.50	98.57
		116	5580	19.50	20.50	
		124	5620	19.50	20.50	
		132	5660	19.40	20.50	
		144	5720	20.20	20.50	
	802.11n-HT20 MCS0	100	5500	19.40	20.50	97.96
		116	5580	19.80	20.50	
		124	5620	19.80	20.50	
		132	5660	19.70	20.50	
		144	5720	19.40	20.50	
	802.11n-HT40 MCS0	102	5510	19.00	20.50	96.43
		110	5550	19.70	20.50	
		126	5630	19.70	20.50	
		134	5670	19.60	20.50	
		142	5710	19.50	20.50	
	802.11ac-VHT20 MCS0	100	5500	19.40	20.50	97.98
		116	5580	19.70	20.50	
		124	5620	19.70	20.50	
		132	5660	19.60	20.50	
		144	5720	19.30	20.50	
802.11ac-VHT40 MCS0	102	5510	18.90	20.50	96.96	
	110	5550	19.60	20.50		
	126	5630	19.60	20.50		
	134	5670	19.50	20.50		
	142	5710	19.40	20.50		
802.11ac-VHT80 MCS0	106	5530	17.40	18.00	92.22	
	122	5610	19.60	20.50		
	138	5690	19.90	20.50		

	Mode	Channel	Frequency (MHz)	Average power (dBm)	Tune-Up Limit	Duty Cycle %
5.8GHz WLAN	802.11a 6Mbps	149	5745	17.50	18.00	98.57
		157	5785	17.60	18.00	
		165	5825	17.40	18.00	
	802.11n-HT20 MCS0	149	5745	17.40	18.00	97.96
		157	5785	17.50	18.00	
		165	5825	17.40	18.00	
	802.11n-HT40 MCS0	151	5755	17.60	18.00	96.43
		159	5795	17.70	18.00	
	802.11ac-VHT20 MCS0	149	5745	17.30	18.00	97.98
		157	5785	17.40	18.00	
		165	5825	17.30	18.00	
	802.11ac-VHT40 MCS0	151	5755	17.50	18.00	96.96
		159	5795	17.60	18.00	
	802.11ac-VHT80 MCS0	155	5775	17.50	18.00	92.22




<2.4GHz Bluetooth>

Mode	Channel	Frequency (MHz)	Average power (dBm)		
			1Mbps	2Mbps	3Mbps
BR / EDR	CH 00	2402	3.81	3.40	3.41
	CH 39	2441	4.19	3.84	3.84
	CH 78	2480	4.60	4.24	4.27
Tune-up Limit			5.00	4.50	4.50

Mode	Channel	Frequency (MHz)	Average power (dBm)	
			1Mbps	2Mbps
LE	CH 00	2402	6.60	6.60
	CH 19	2440	7.10	7.10
	CH 39	2480	7.50	7.50
Tune-up Limit			8.00	8.00


General Note:

- For 2.4GHz Bluetooth SAR testing was selected 1Mbps due to its highest average power and duty cycle is 62.3% considered in SAR testing, and the duty cycle would be scaled to theoretical 83.3% in reported SAR calculation.

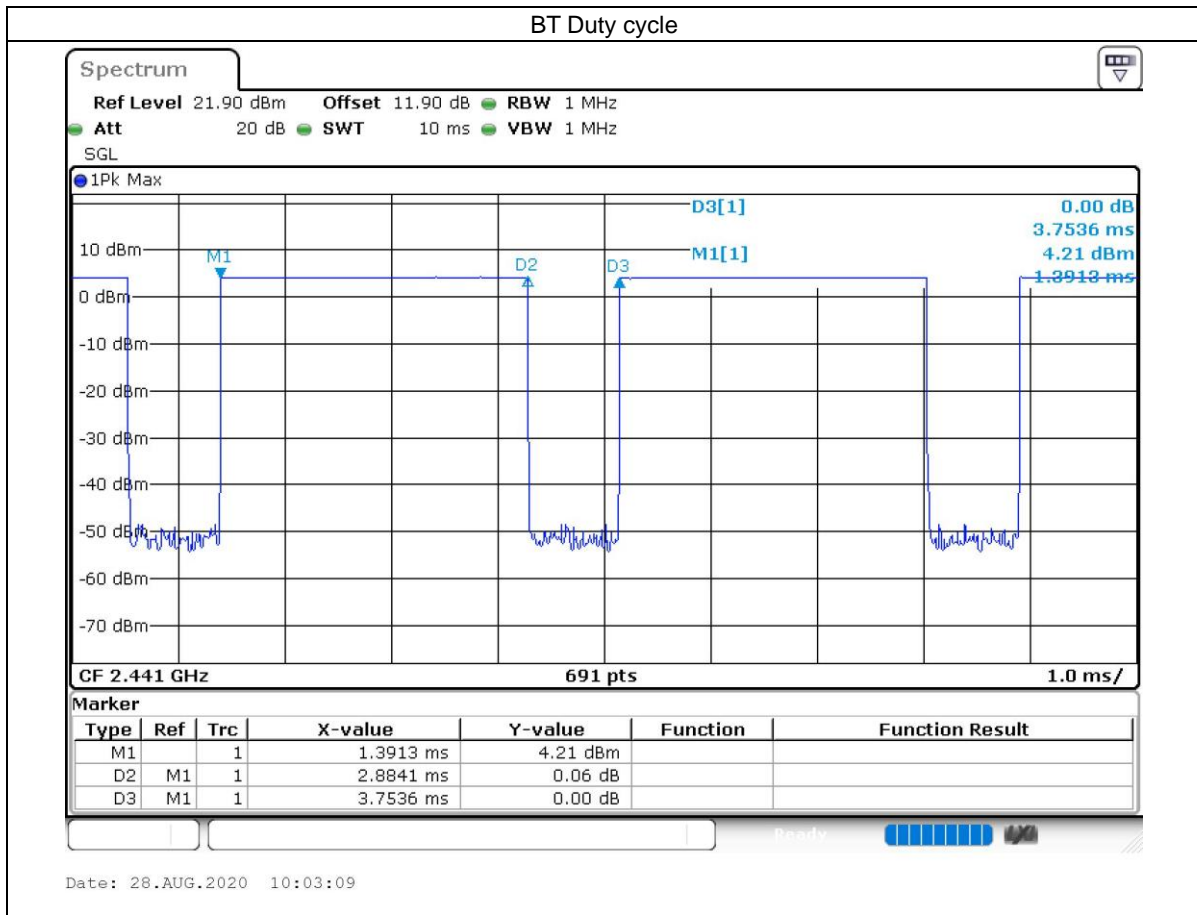



### 13. Antenna Location

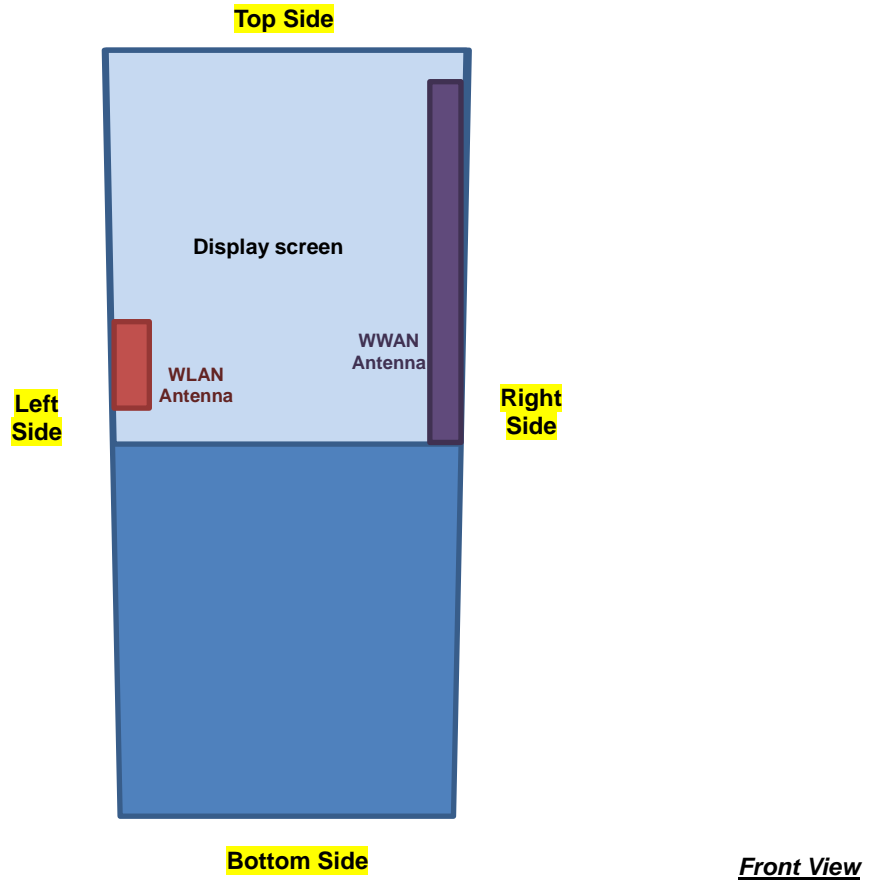

Distance of the Antenna to the EUT surface/edge						
Antennas	Back	Front	Top Side	Bottom Side	Right Side	Left Side
WWAN Main	≤ 25mm	≤ 25mm	≤ 25mm	>25mm	≤ 25mm	>25mm
BT&WLAN	≤ 25mm	≤ 25mm	>25mm	>25mm	>25mm	≤ 25mm

Positions for SAR tests; Hotspot mode						
Antennas	Back	Front	Top Side	Bottom Side	Right Side	Left Side
WWAN Main	Yes	Yes	Yes	No	Yes	No
BT&WLAN	Yes	Yes	No	No	No	Yes

**General Note:**

- Referring to KDB 941225 D06 v02r01, when the overall device length and width are ≥ 9cm\*5cm, the test distance is 10 mm. SAR must be measured for all sides and surfaces with a transmitting antenna located within 25mm from that surface or edge



## **14. SAR Test Results**

### **General Note:**

1. Per KDB 447498 D01v06, the reported SAR is the measured SAR value adjusted for maximum tune-up tolerance.
  - a. Tune-up scaling Factor = tune-up limit power (mW) / EUT RF power (mW), where tune-up limit is the maximum rated power among all production units.
  - b. For SAR testing of WLAN signal with non-100% duty cycle, the measured SAR is scaled-up by the duty cycle scaling factor which is equal to "1/(duty cycle)"
  - c. For WWAN: Reported SAR(W/kg)= Measured SAR(W/kg)\*Tune-up Scaling Factor
  - d. For WLAN/Bluetooth: Reported SAR(W/kg)= Measured SAR(W/kg)\* Duty Cycle scaling factor \* Tune-up scaling factor
  - e. For TDD LTE SAR measurement, the duty cycle 1:1.59 (62.9 %) was used perform testing and considering the theoretical duty cycle of 63.3% for extended cyclic prefix in the uplink, and the theoretical duty cycle of 62.9% for normal cyclic prefix in uplink, a scaling factor of extended cyclic prefix 63.3%/62.9% = 1.006 is applied to scale-up the measured SAR result.  
The Reported TDD LTE SAR = measured SAR (W/kg)\* Tune-up Scaling Factor\* scaling factor for extended cyclic prefix.
2. Per KDB 447498 D01v06, for each exposure position, testing of other required channels within the operating mode of a frequency band is not required when the *reported* 1-g or 10-g SAR for the mid-band or highest output power channel is:
  - $\leq 0.8$  W/kg or 2.0 W/kg, for 1-g or 10-g respectively, when the transmission band is  $\leq 100$  MHz
  - $\leq 0.6$  W/kg or 1.5 W/kg, for 1-g or 10-g respectively, when the transmission band is between 100 MHz and 200 MHz
  - $\leq 0.4$  W/kg or 1.0 W/kg, for 1-g or 10-g respectively, when the transmission band is  $\geq 200$  MHz
3. Per KDB 865664 D01v01r04, for each frequency band, repeated SAR measurement is required only when the measured SAR is  $\geq 0.8$ W/kg.
4. The power reduction is active for hotspot SAR compliance of UMTS B2/B4 and LTE B2/B4.

### **GSM Note:**

1. Per KDB 941225 D01v03r01, for SAR test reduction for GPRS / EDGE / DTM modes is determined by the source-based time-averaged output power including tune-up tolerance. The mode with highest specified time-averaged output power should be tested for SAR compliance in the applicable exposure conditions. For modes with the same specified maximum output power and tolerance, the higher number time-slot configuration should be tested. Therefore, the GPRS (4Tx slots) for GSM850/GSM1900 is considered as the primary mode.
2. Other configurations of GPRS / EDGE / DTM are considered as secondary modes. The 3G SAR test reduction procedure is applied, when the maximum output power and tune-up tolerance specified for production units in a secondary mode is  $\leq \frac{1}{4}$  dB higher than the primary mode, SAR measurement is not required for the secondary mode.

### **UMTS Note:**

1. Per KDB 941225 D01v03r01, for SAR testing is measured using a 12.2 kbps RMC with TPC bits configured to all "1's".
2. Per KDB 941225 D01v03r01, RMC 12.2kbps setting is used to evaluate SAR. The maximum output power and tune-up tolerance specified for production units in HSDPA / HSUPA / DC-HSDPA is  $\leq \frac{1}{4}$  dB higher than RMC 12.2Kbps or when the highest reported SAR of the RMC12.2Kbps is scaled by the ratio of specified maximum output power and tune-up tolerance of HSDPA / HSUPA / DC-HSDPA to RMC12.2Kbps and the adjusted SAR is  $\leq 1.2$  W/kg, SAR measurement is not required for HSDPA / HSUPA / DC-HSDPA, and according to the following RF output power, the output power results of the secondary modes (HSUPA, HSDPA, DC-HSDPA) are less than  $\frac{1}{4}$  dB higher than the primary modes; therefore, SAR measurement is not required for HSDPA / HSUPA / DC-HSDPA.

**LTE Note:**

1. Per KDB 941225 D05v02r05, start with the largest channel bandwidth and measure SAR for QPSK with 1 RB allocation, using the RB offset and required test channel combination with the highest maximum output power for RB offsets at the upper edge, middle and lower edge of each required test channel.
2. Per KDB 941225 D05v02r05, 50% RB allocation for QPSK SAR testing follows 1RB QPSK allocation procedure.
3. Per KDB 941225 D05v02r05, For QPSK with 100% RB allocation, SAR is not required when the highest maximum output power for 100 % RB allocation is less than the highest maximum output power in 50% and 1 RB allocations and the highest reported SAR for 1 RB and 50% RB allocation are  $\leq 0.8$  W/kg. Otherwise, SAR is measured for the highest output power channel; and if the reported SAR is  $> 1.45$  W/kg, the remaining required test channels must also be tested.
4. Per KDB 941225 D05v02r05, 16QAM output power for each RB allocation configuration is  $>$  not  $\frac{1}{2}$  dB higher than the same configuration in QPSK and the reported SAR for the QPSK configuration is  $\leq 1.45$  W/kg; Per KDB 941225 D05v02r05, 16QAM SAR testing is not required.
5. Per KDB 941225 D05v02r05, Smaller bandwidth output power for each RB allocation configuration is  $>$  not  $\frac{1}{2}$  dB higher than the same configuration in the largest supported bandwidth, and the reported SAR for the largest supported bandwidth is  $\leq 1.45$  W/kg; Per KDB 941225 D05v02r05, smaller bandwidth SAR testing is not required.
6. For LTE B4/B5/B38 the maximum bandwidth does not support three non-overlapping channels, per KDB 941225 D05v02r05, when a device supports overlapping channel assignment in a channel bandwidth configuration, the middle channel of the group of overlapping channels should be selected for testing.
7. LTE band 38 SAR test was covered by Band 41; according to TCB workshop, SAR test for overlapping LTE bands can be reduced if
  - a. The maximum output power, including tolerance, for the smaller band is  $\leq$  the larger band to qualify for the SAR test exclusion.
  - b. The channel bandwidth and other operating parameters for the smaller band are fully supported by the larger band.

**WLAN Note:**

1. Per KDB 248227 D01v02r02, for 2.4GHz 802.11g/n SAR testing is not required when the highest reported SAR for DSSS is adjusted by the ratio of OFDM to DSSS specified maximum output power and the adjusted SAR is  $\leq 1.2$  W/kg.
2. Per KDB 248227 D01v02r02, U-NII-1 SAR testing is not required when the U-NII-2A band highest reported SAR for a test configuration is  $\leq 1.2$  W/kg, SAR is not required for U-NII-1 band.
3. When the reported SAR of the test position is  $> 0.4$  W/kg, SAR is repeated for the 802.11 transmission mode configuration tested in the initial test position to measure the subsequent next closet/smallest test separation distance and maximum coupling test position on the highest maximum output power channel, until the report SAR is  $\leq 0.8$  W/kg or all required test position are tested.
4. For all positions / configurations, when the reported SAR is  $> 0.8$  W/kg, SAR is measured for these test positions / configurations on the subsequent next highest measured output power channel(s) until the reported SAR is  $\leq 1.2$  W/kg or all required channels are tested.
5. During SAR testing the WLAN transmission was verified using a spectrum analyzer.



14.1 Hotspot SAR

<GSM SAR>

Plot No.	Band	Mode	Test Position	Gap (mm)	Power Reduction	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
	GSM850	GPRS (4 Tx slots)	Front	10mm	OFF	189	836.4	27.97	28.00	1.007	0.05	0.312	0.314
	GSM850	GPRS (4 Tx slots)	Back	10mm	OFF	189	836.4	27.97	28.00	1.007	-0.16	0.446	0.449
	GSM850	GPRS (4 Tx slots)	Right Side	10mm	OFF	189	836.4	27.97	28.00	1.007	-0.18	0.590	0.594
	GSM850	GPRS (4 Tx slots)	Right Side	10mm	OFF	128	824.2	27.87	28.00	1.030	0.01	0.443	0.456
01	GSM850	GPRS (4 Tx slots)	Right Side	10mm	OFF	251	848.8	27.97	28.00	1.007	0.04	0.677	0.682
	GSM850	GPRS (4 Tx slots)	Top Side	10mm	OFF	189	836.4	27.97	28.00	1.007	0.01	0.144	0.145
	GSM1900	GPRS (4 Tx slots)	Front	10mm	OFF	661	1880	25.22	25.50	1.067	0.02	0.171	0.182
	GSM1900	GPRS (4 Tx slots)	Back	10mm	OFF	661	1880	25.22	25.50	1.067	0.05	0.345	0.368
	GSM1900	GPRS (4 Tx slots)	Right Side	10mm	OFF	661	1880	25.22	25.50	1.067	-0.06	0.532	0.567
02	GSM1900	GPRS (4 Tx slots)	Right Side	10mm	OFF	512	1850.2	25.19	25.50	1.074	0.04	0.714	0.767
	GSM1900	GPRS (4 Tx slots)	Right Side	10mm	OFF	810	1909.8	25.19	25.50	1.074	-0.17	0.382	0.410
	GSM1900	GPRS (4 Tx slots)	Top Side	10mm	OFF	661	1880	25.22	25.50	1.067	0.03	0.101	0.108

<WCDMA SAR>

Plot No.	Band	Mode	Test Position	Gap (mm)	Power Reduction	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
	WCDMA II	RMC 12.2Kbps	Front	10mm	ON	9400	1880	23.66	24.50	1.213	0.01	0.244	0.296
	WCDMA II	RMC 12.2Kbps	Back	10mm	ON	9400	1880	23.66	24.50	1.213	-0.01	0.526	0.638
03	WCDMA II	RMC 12.2Kbps	Right Side	10mm	ON	9400	1880	23.66	24.50	1.213	0.04	0.866	1.051
	WCDMA II	RMC 12.2Kbps	Right Side	10mm	ON	9262	1852.4	23.43	24.50	1.279	-0.18	0.807	1.032
	WCDMA II	RMC 12.2Kbps	Right Side	10mm	ON	9538	1907.6	23.60	24.50	1.230	0.16	0.792	0.974
	WCDMA II	RMC 12.2Kbps	Top Side	10mm	ON	9400	1880	23.66	24.50	1.213	0.05	0.151	0.183
	WCDMA IV	RMC 12.2Kbps	Front	10mm	ON	1413	1732.6	23.81	24.50	1.172	-0.11	0.352	0.413
	WCDMA IV	RMC 12.2Kbps	Back	10mm	ON	1413	1732.6	23.81	24.50	1.172	0.16	0.314	0.368
04	WCDMA IV	RMC 12.2Kbps	Right Side	10mm	ON	1413	1732.6	23.81	24.50	1.172	0.08	0.902	1.057
	WCDMA IV	RMC 12.2Kbps	Right Side	10mm	ON	1312	1712.4	23.69	24.50	1.205	-0.13	0.766	0.923
	WCDMA IV	RMC 12.2Kbps	Right Side	10mm	ON	1513	1752.6	23.72	24.50	1.197	-0.05	0.834	0.998
	WCDMA IV	RMC 12.2Kbps	Top Side	10mm	ON	1413	1732.6	23.81	24.50	1.172	0.08	0.286	0.335
	WCDMA V	RMC 12.2Kbps	Front	10mm	OFF	4182	836.4	25.42	25.50	1.019	-0.05	0.350	0.357
	WCDMA V	RMC 12.2Kbps	Back	10mm	OFF	4182	836.4	25.42	25.50	1.019	-0.12	0.533	0.543
	WCDMA V	RMC 12.2Kbps	Right Side	10mm	OFF	4182	836.4	25.42	25.50	1.019	0.16	0.785	0.800
	WCDMA V	RMC 12.2Kbps	Right Side	10mm	OFF	4132	826.4	25.39	25.50	1.026	0.17	0.808	0.829
05	WCDMA V	RMC 12.2Kbps	Right Side	10mm	OFF	4233	846.6	25.24	25.50	1.062	-0.09	0.822	0.873
	WCDMA V	RMC 12.2Kbps	Top Side	10mm	OFF	4182	836.4	25.42	25.50	1.019	0.03	0.132	0.134



<FDD LTE SAR>

Plot No.	Band	BW (MHz)	Modulation	RB Size	RB offset	Test Position	Gap (mm)	Power Reduction	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
	LTE Band 2	20M	QPSK	1	0	Front	10mm	ON	18900	1880	23.33	24.00	1.167	0.05	0.237	0.277
	LTE Band 2	20M	QPSK	50	0	Front	10mm	ON	18900	1880	22.36	23.00	1.159	-0.13	0.195	0.226
	LTE Band 2	20M	QPSK	1	0	Back	10mm	ON	18900	1880	23.33	24.00	1.167	-0.02	0.532	0.621
	LTE Band 2	20M	QPSK	50	0	Back	10mm	ON	18900	1880	22.36	23.00	1.159	0.16	0.491	0.569
06	LTE Band 2	20M	QPSK	1	0	Right Side	10mm	ON	18900	1880	23.33	24.00	1.167	-0.07	0.887	1.035
	LTE Band 2	20M	QPSK	1	0	Right Side	10mm	ON	18700	1860	23.18	24.00	1.208	-0.01	0.846	1.022
	LTE Band 2	20M	QPSK	1	0	Right Side	10mm	ON	19100	1900	23.32	24.00	1.169	0.18	0.842	0.985
	LTE Band 2	20M	QPSK	50	0	Right Side	10mm	ON	18900	1880	22.36	23.00	1.159	-0.02	0.728	0.844
	LTE Band 2	20M	QPSK	100	0	Right Side	10mm	ON	18900	1880	22.17	23.00	1.211	-0.02	0.710	0.860
	LTE Band 2	20M	QPSK	1	0	Top Side	10mm	ON	18900	1880	23.33	24.00	1.167	0.1	0.114	0.133
	LTE Band 2	20M	QPSK	50	0	Top Side	10mm	ON	18900	1880	22.36	23.00	1.159	0.01	0.107	0.124
	LTE Band 4	20M	QPSK	1	0	Front	10mm	ON	20175	1732.5	23.30	24.00	1.175	0.01	0.373	0.438
	LTE Band 4	20M	QPSK	50	0	Front	10mm	ON	20175	1732.5	22.34	23.00	1.164	0.02	0.337	0.392
	LTE Band 4	20M	QPSK	1	0	Back	10mm	ON	20175	1732.5	23.30	24.00	1.175	0.1	0.313	0.368
	LTE Band 4	20M	QPSK	50	0	Back	10mm	ON	20175	1732.5	22.34	23.00	1.164	0.05	0.288	0.335
07	LTE Band 4	20M	QPSK	1	0	Right Side	10mm	ON	20175	1732.5	23.30	24.00	1.175	-0.11	0.661	0.777
	LTE Band 4	20M	QPSK	50	0	Right Side	10mm	ON	20175	1732.5	22.34	23.00	1.164	-0.02	0.613	0.714
	LTE Band 4	20M	QPSK	1	0	Top Side	10mm	ON	20175	1732.5	23.30	24.00	1.175	0.01	0.321	0.377
	LTE Band 4	20M	QPSK	50	0	Top Side	10mm	ON	20175	1732.5	22.34	23.00	1.164	0.02	0.311	0.362
	LTE Band 5	10M	QPSK	1	0	Front	10mm	OFF	20525	836.5	24.13	24.50	1.089	0.12	0.246	0.268
	LTE Band 5	10M	QPSK	25	0	Front	10mm	OFF	20525	836.5	22.97	23.50	1.130	-0.01	0.195	0.220
	LTE Band 5	10M	QPSK	1	0	Back	10mm	OFF	20525	836.5	24.13	24.50	1.089	-0.09	0.373	0.406
	LTE Band 5	10M	QPSK	25	0	Back	10mm	OFF	20525	836.5	22.97	23.50	1.130	-0.15	0.306	0.346
08	LTE Band 5	10M	QPSK	1	0	Right Side	10mm	OFF	20525	836.5	24.13	24.50	1.194	0.05	0.578	0.690
	LTE Band 5	10M	QPSK	25	0	Right Side	10mm	OFF	20525	836.5	22.97	23.50	1.130	0.03	0.428	0.484
	LTE Band 5	10M	QPSK	1	0	Top Side	10mm	OFF	20525	836.5	24.13	24.50	1.089	0.01	0.108	0.118
	LTE Band 5	10M	QPSK	25	0	Top Side	10mm	OFF	20525	836.5	22.97	23.50	1.130	-0.01	0.085	0.096
	LTE Band 7	20M	QPSK	1	0	Front	10mm	OFF	21100	2535	23.58	24.50	1.236	0.17	0.135	0.167
	LTE Band 7	20M	QPSK	50	0	Front	10mm	OFF	21100	2535	22.62	23.50	1.225	-0.02	0.102	0.125
	LTE Band 7	20M	QPSK	1	0	Back	10mm	OFF	21100	2535	23.58	24.50	1.236	-0.08	0.161	0.199
	LTE Band 7	20M	QPSK	50	0	Back	10mm	OFF	21100	2535	22.62	23.50	1.225	-0.13	0.130	0.159
	LTE Band 7	20M	QPSK	1	0	Right Side	10mm	OFF	21100	2535	23.58	24.50	1.236	0.15	0.504	0.623
	LTE Band 7	20M	QPSK	1	0	Right Side	10mm	OFF	20850	2510	23.46	24.50	1.271	0.1	0.492	0.625
09	LTE Band 7	20M	QPSK	1	0	Right Side	10mm	OFF	21350	2560	23.27	24.50	1.227	-0.18	0.573	0.703
	LTE Band 7	20M	QPSK	50	0	Right Side	10mm	OFF	21100	2535	22.62	23.50	1.225	0.11	0.331	0.405
	LTE Band 7	20M	QPSK	1	0	Top Side	10mm	OFF	21100	2535	23.58	24.50	1.236	0.11	0.115	0.142
	LTE Band 7	20M	QPSK	50	0	Top Side	10mm	OFF	21100	2535	22.62	23.50	1.225	-0.02	0.094	0.115



<TDD LTE SAR>

Plot No.	Band	BW (MHz)	Modulation	RB Size	RB offset	Test Position	Gap (mm)	Power Reduction	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Duty Cycle %	Duty Cycle Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
	LTE Band 41	20M	QPSK	1	0	Front	10mm	OFF	41490	2680	24.01	24.50	1.119	62.9	1.006	0.12	0.100	0.113
	LTE Band 41	20M	QPSK	50	0	Front	10mm	OFF	41490	2680	22.83	23.50	1.167	62.9	1.006	0.01	0.061	0.072
	LTE Band 41	20M	QPSK	1	0	Back	10mm	OFF	41490	2680	24.01	24.50	1.119	62.9	1.006	-0.05	0.174	0.196
	LTE Band 41	20M	QPSK	50	0	Back	10mm	OFF	41490	2680	22.83	23.50	1.167	62.9	1.006	-0.13	0.103	0.121
10	LTE Band 41	20M	QPSK	1	0	Right Side	10mm	OFF	41490	2680	24.01	24.50	1.119	62.9	1.006	0.02	0.598	0.669
	LTE Band 41	20M	QPSK	1	0	Right Side	10mm	OFF	39750	2506	23.60	24.50	1.230	62.9	1.006	0.01	0.435	0.538
	LTE Band 41	20M	QPSK	1	0	Right Side	10mm	OFF	40185	2549.5	23.77	24.50	1.183	62.9	1.006	0.04	0.453	0.539
	LTE Band 41	20M	QPSK	1	0	Right Side	10mm	OFF	40620	2593	23.70	24.50	1.202	62.9	1.006	-0.13	0.430	0.520
	LTE Band 41	20M	QPSK	1	0	Right Side	10mm	OFF	41055	2636.5	23.75	24.50	1.189	62.9	1.006	0.13	0.456	0.545
	LTE Band 41	20M	QPSK	50	0	Right Side	10mm	OFF	41490	2680	22.83	23.50	1.167	62.9	1.006	-0.19	0.395	0.464
	LTE Band 41	20M	QPSK	1	0	Top Side	10mm	OFF	41490	2680	24.01	24.50	1.119	62.9	1.006	0.01	0.130	0.146
	LTE Band 41	20M	QPSK	50	0	Top Side	10mm	OFF	41490	2680	22.83	23.50	1.167	62.9	1.006	0.01	0.082	0.096

<WLAN SAR>

Plot No.	Band	Mode	Test Position	Gap (mm)	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Duty Cycle %	Duty Cycle Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
	WLAN2.4GHz	802.11b 1Mbps	Front	10mm	1	2412	21.20	21.50	1.072	99.28	1.007	0.01	0.246	0.265
	WLAN2.4GHz	802.11b 1Mbps	Back	10mm	1	2412	21.20	21.50	1.072	99.28	1.007	0.1	0.295	0.318
	WLAN2.4GHz	802.11b 1Mbps	Left Side	10mm	1	2412	21.20	21.50	1.072	99.28	1.007	-0.04	0.401	0.433
11	WLAN2.4GHz	802.11b 1Mbps	Left Side	10mm	11	2462	21.10	21.50	1.096	99.28	1.007	-0.07	0.415	0.458
	WLAN2.4GHz	802.11b 1Mbps	Left Side	10mm	6	2437	21.10	21.50	1.096	99.28	1.007	0.05	0.395	0.436
	WLAN5GHz	802.11n-HT40 MCS0	Front	10mm	46	5230	19.00	19.50	1.122	96.43	1.037	-0.04	0.223	0.259
	WLAN5GHz	802.11n-HT40 MCS0	Back	10mm	46	5230	19.00	19.50	1.122	96.43	1.037	-0.06	0.285	0.332
12	WLAN5GHz	802.11n-HT40 MCS0	Left Side	10mm	46	5230	19.00	19.50	1.122	96.43	1.037	-0.15	1.080	1.257
	WLAN5GHz	802.11a 6Mbps	Left Side	10mm	48	5240	18.80	19.50	1.175	98.57	1.015	-0.15	1.050	1.252
	WLAN5GHz	802.11a 6Mbps	Left Side	10mm	36	5180	18.60	19.50	1.230	98.57	1.015	0.09	0.997	1.245
	WLAN5GHz	802.11a 6Mbps	Left Side	10mm	40	5200	18.60	19.50	1.230	98.57	1.015	0.06	0.956	1.194
	WLAN5GHz	802.11ac-VHT80 MCS0	Front	10mm	155	5775	17.50	18.00	1.122	92.22	1.084	0.1	0.157	0.191
	WLAN5GHz	802.11ac-VHT80 MCS0	Back	10mm	155	5775	17.50	18.00	1.122	92.22	1.084	0.09	0.396	0.482
13	WLAN5GHz	802.11ac-VHT80 MCS0	Left Side	10mm	155	5775	17.50	18.00	1.122	92.22	1.084	-0.13	1.030	1.253
	WLAN5GHz	802.11n-HT40 MCS0	Left Side	10mm	159	5795	17.70	18.00	1.072	96.43	1.037	-0.16	1.040	1.156

<Bluetooth SAR>

Plot No.	Band	Mode	Test Position	Gap (mm)	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Duty Cycle %	Duty Cycle Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
	Bluetooth	LE-1Mbps	Front	10mm	39	2480	7.50	8.00	1.122	62.3	1.337	0.11	0.004	0.006
	Bluetooth	LE-1Mbps	Back	10mm	39	2480	7.50	8.00	1.122	62.3	1.337	-0.14	0.003	0.005
14	Bluetooth	LE-1Mbps	Left Side	10mm	39	2480	7.50	8.00	1.122	62.3	1.337	0.03	0.009	0.014
	Bluetooth	LE-1Mbps	Left Side	10mm	00	2402	6.60	8.00	1.380	62.3	1.337	0.01	0.006	0.011
	Bluetooth	LE-1Mbps	Left Side	10mm	19	2440	7.10	8.00	1.230	62.3	1.337	-0.07	0.006	0.010



**14.2 Body Worn Accessory SAR**

**<GSM SAR>**

Plot No.	Band	Mode	Test Position	Gap (mm)	Accessories	Holster	Power Reduction	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
	GSM850	GPRS (4 Tx slots)	Front	0mm	-	Holster 1	OFF	189	836.4	27.97	28.00	1.007	0.02	0.021	0.021
	GSM850	GPRS (4 Tx slots)	Back	0mm	-	Holster 1	OFF	189	836.4	27.97	28.00	1.007	-0.08	0.035	0.035
	GSM850	GPRS (4 Tx slots)	Right Side	0mm	Trigger handle	Holster 2	OFF	189	836.4	27.97	28.00	1.007	0.03	0.470	0.473
	GSM850	GPRS (4 Tx slots)	Right Side	0mm	Trigger handle	Holster 2	OFF	128	824.2	27.87	28.00	1.030	-0.13	0.446	0.460
15	GSM850	GPRS (4 Tx slots)	Right Side	0mm	Trigger handle	Holster 2	OFF	251	848.8	27.97	28.00	1.007	-0.1	0.481	0.484
	GSM1900	GPRS (4 Tx slots)	Front	0mm	-	Holster 1	OFF	661	1880	25.22	25.50	1.067	0.01	0.022	0.023
	GSM1900	GPRS (4 Tx slots)	Back	0mm	-	Holster 1	OFF	661	1880	25.22	25.50	1.067	0.07	0.085	0.091
	GSM1900	GPRS (4 Tx slots)	Right Side	0mm	Trigger handle	Holster 2	OFF	661	1880	25.22	25.50	1.067	0.05	0.311	0.332
16	GSM1900	GPRS (4 Tx slots)	Right Side	0mm	Trigger handle	Holster 2	OFF	512	1850.2	25.19	25.50	1.074	-0.16	0.360	0.387
	GSM1900	GPRS (4 Tx slots)	Right Side	0mm	Trigger handle	Holster 2	OFF	810	1909.8	25.19	25.50	1.074	-0.04	0.244	0.262

**<WCDMA SAR>**

Plot No.	Band	Mode	Test Position	Gap (mm)	Accessories	Holster	Power Reduction	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
	WCDMA II	RMC 12.2Kbps	Front	0mm	-	Holster 1	OFF	9538	1907.6	25.18	25.50	1.076	0.15	0.102	0.110
	WCDMA II	RMC 12.2Kbps	Back	0mm	-	Holster 1	OFF	9538	1907.6	25.18	25.50	1.076	-0.16	0.354	0.382
17	WCDMA II	RMC 12.2Kbps	Right Side	0mm	Trigger handle	Holster 2	OFF	9538	1907.6	25.18	25.50	1.076	0.02	0.718	0.773
	WCDMA II	RMC 12.2Kbps	Right Side	0mm	Trigger handle	Holster 2	OFF	9262	1852.4	24.75	25.50	1.189	-0.01	0.704	0.837
	WCDMA II	RMC 12.2Kbps	Right Side	0mm	Trigger handle	Holster 2	OFF	9400	1880	25.15	25.50	1.084	0.13	0.715	0.775
	WCDMA IV	RMC 12.2Kbps	Front	0mm	-	Holster 1	OFF	1513	1752.6	24.89	25.50	1.151	0.01	0.221	0.254
	WCDMA IV	RMC 12.2Kbps	Back	0mm	-	Holster 1	OFF	1513	1752.6	24.89	25.50	1.151	-0.16	0.284	0.327
	WCDMA IV	RMC 12.2Kbps	Right Side	0mm	Trigger handle	Holster 2	OFF	1513	1752.6	24.89	25.50	1.151	0.01	0.602	0.692
	WCDMA IV	RMC 12.2Kbps	Right Side	0mm	Trigger handle	Holster 2	OFF	1312	1712.4	24.65	25.50	1.216	0.14	0.553	0.672
18	WCDMA IV	RMC 12.2Kbps	Right Side	0mm	Trigger handle	Holster 2	OFF	1413	1732.6	24.76	25.50	1.186	-0.02	0.806	0.956
	WCDMA V	RMC 12.2Kbps	Front	0mm	-	Holster 1	OFF	4182	836.4	25.42	25.50	1.019	0.13	0.107	0.109
	WCDMA V	RMC 12.2Kbps	Back	0mm	-	Holster 1	OFF	4182	836.4	25.42	25.50	1.019	0.05	0.175	0.178
	WCDMA V	RMC 12.2Kbps	Right Side	0mm	Trigger handle	Holster 2	OFF	4182	836.4	25.42	25.50	1.019	-0.02	0.336	0.342
19	WCDMA V	RMC 12.2Kbps	Right Side	0mm	Trigger handle	Holster 2	OFF	4132	826.4	25.39	25.50	1.026	-0.08	0.358	0.367
	WCDMA V	RMC 12.2Kbps	Right Side	0mm	Trigger handle	Holster 2	OFF	4233	846.6	25.24	25.50	1.062	0.08	0.344	0.365



<FDD LTE SAR>

Plot No.	Band	BW (MHz)	Modulation	RB Size	RB offset	Test Position	Gap (mm)	Accessories	Holster	Power Reduction	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
	LTE Band 2	20M	QPSK	1	0	Front	0mm	-	Holster 1	OFF	18900	1880	24.13	25.00	1.222	0.01	0.129	0.158
	LTE Band 2	20M	QPSK	50	0	Front	0mm	-	Holster 1	OFF	18900	1880	23.09	24.00	1.233	-0.02	0.092	0.113
	LTE Band 2	20M	QPSK	1	0	Back	0mm	-	Holster 1	OFF	18900	1880	24.13	25.00	1.222	0.13	0.526	0.643
	LTE Band 2	20M	QPSK	50	0	Back	0mm	-	Holster 1	OFF	18900	1880	23.09	24.00	1.233	-0.18	0.383	0.472
20	LTE Band 2	20M	QPSK	1	0	Right Side	0mm	Trigger handle	Holster 2	OFF	18900	1880	24.13	25.00	1.222	-0.03	0.634	0.775
	LTE Band 2	20M	QPSK	1	0	Right Side	0mm	Trigger handle	Holster 2	OFF	18700	1860	23.99	25.00	1.262	0.06	0.588	0.742
	LTE Band 2	20M	QPSK	1	0	Right Side	0mm	Trigger handle	Holster 2	OFF	19100	1900	24.12	25.00	1.225	0.13	0.612	0.749
	LTE Band 2	20M	QPSK	50	0	Right Side	0mm	Trigger handle	Holster 2	OFF	18900	1880	23.09	24.00	1.233	0.11	0.573	0.707
	LTE Band 4	20M	QPSK	1	0	Front	0mm	-	Holster 1	OFF	20175	1732.5	23.87	25.00	1.297	0.02	0.049	0.064
	LTE Band 4	20M	QPSK	50	0	Front	0mm	-	Holster 1	OFF	20175	1732.5	22.66	24.00	1.361	0.02	0.042	0.057
	LTE Band 4	20M	QPSK	1	0	Back	0mm	-	Holster 1	OFF	20175	1732.5	23.87	25.00	1.297	-0.04	0.051	0.066
	LTE Band 4	20M	QPSK	50	0	Back	0mm	-	Holster 1	OFF	20175	1732.5	22.66	24.00	1.361	0.05	0.046	0.063
21	LTE Band 4	20M	QPSK	1	0	Right Side	0mm	Trigger handle	Holster 2	OFF	20175	1732.5	23.87	25.00	1.297	0.05	0.748	0.970
	LTE Band 4	20M	QPSK	50	0	Right Side	0mm	Trigger handle	Holster 2	OFF	20175	1732.5	22.66	24.00	1.361	0.01	0.611	0.832
	LTE Band 4	20M	QPSK	100	0	Right Side	0mm	Trigger handle	Holster 2	OFF	20175	1732.5	22.63	24.00	1.371	0.04	0.601	0.824
	LTE Band 5	10M	QPSK	1	0	Front	0mm	-	Holster 1	OFF	20525	836.5	24.13	24.50	1.089	0.05	0.105	0.114
	LTE Band 5	10M	QPSK	25	0	Front	0mm	-	Holster 1	OFF	20525	836.5	22.97	23.50	1.130	-0.1	0.072	0.081
	LTE Band 5	10M	QPSK	1	0	Back	0mm	-	Holster 1	OFF	20525	836.5	24.13	24.50	1.089	0.04	0.160	0.174
	LTE Band 5	10M	QPSK	25	0	Back	0mm	-	Holster 1	OFF	20525	836.5	22.97	23.50	1.130	0.03	0.134	0.151
22	LTE Band 5	10M	QPSK	1	0	Right Side	0mm	Trigger handle	Holster 2	OFF	20525	836.5	24.13	24.50	1.089	-0.01	0.333	0.363
	LTE Band 5	10M	QPSK	25	0	Right Side	0mm	Trigger handle	Holster 2	OFF	20525	836.5	22.97	23.50	1.130	-0.13	0.301	0.340
	LTE Band 7	20M	QPSK	1	0	Front	0mm	-	Holster 1	OFF	21100	2535	23.58	24.50	1.236	0.11	0.104	0.129
	LTE Band 7	20M	QPSK	50	0	Front	0mm	-	Holster 1	OFF	21100	2535	22.62	23.50	1.225	-0.02	0.086	0.105
	LTE Band 7	20M	QPSK	1	0	Back	0mm	-	Holster 1	OFF	21100	2535	23.58	24.50	1.236	-0.1	0.212	0.262
	LTE Band 7	20M	QPSK	50	0	Back	0mm	-	Holster 1	OFF	21100	2535	22.62	23.50	1.225	-0.15	0.170	0.208
	LTE Band 7	20M	QPSK	1	0	Right Side	0mm	Trigger handle	Holster 2	OFF	21100	2535	23.58	24.50	1.236	0.07	0.484	0.598
	LTE Band 7	20M	QPSK	1	0	Right Side	0mm	Trigger handle	Holster 2	OFF	20850	2510	23.46	24.50	1.271	-0.01	0.402	0.511
23	LTE Band 7	20M	QPSK	1	0	Right Side	0mm	Trigger handle	Holster 2	OFF	21350	2560	23.27	24.50	1.327	-0.1	0.463	0.615
	LTE Band 7	20M	QPSK	50	0	Right Side	0mm	Trigger handle	Holster 2	OFF	21100	2535	22.62	23.50	1.225	0.08	0.452	0.554





<TDD LTE SAR>

Plot No.	Band	BW (MHz)	Modulation	RB Size	RB offset	Test Position	Gap (mm)	Accessories	Holster	Power Reduction	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Duty Cycle %	Duty Cycle Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
	LTE Band 41	20M	QPSK	1	0	Front	0mm	-	Holster 1	OFF	41490	2680	24.01	24.50	1.119	62.9	1.006	0.14	0.062	0.070
	LTE Band 41	20M	QPSK	50	0	Front	0mm	-	Holster 1	OFF	41490	2680	22.83	23.50	1.167	62.9	1.006	0.01	0.001	0.001
	LTE Band 41	20M	QPSK	1	0	Back	0mm	-	Holster 1	OFF	41490	2680	24.01	24.50	1.119	62.9	1.006	0.07	0.195	0.220
	LTE Band 41	20M	QPSK	50	0	Back	0mm	-	Holster 1	OFF	41490	2680	22.83	23.50	1.167	62.9	1.006	-0.08	0.114	0.134
24	LTE Band 41	20M	QPSK	1	0	Right Side	0mm	Trigger handle	Holster 2	OFF	41490	2680	24.01	24.50	1.119	62.9	1.006	-0.02	0.478	0.538
	LTE Band 41	20M	QPSK	1	0	Right Side	0mm	Trigger handle	Holster 2	OFF	39750	2506	23.60	24.50	1.230	62.9	1.006	-0.03	0.413	0.511
	LTE Band 41	20M	QPSK	1	0	Right Side	0mm	Trigger handle	Holster 2	OFF	40185	2549.5	23.77	24.50	1.183	62.9	1.006	-0.02	0.403	0.480
	LTE Band 41	20M	QPSK	1	0	Right Side	0mm	Trigger handle	Holster 2	OFF	40620	2593	23.70	24.50	1.202	62.9	1.006	0.01	0.436	0.527
	LTE Band 41	20M	QPSK	1	0	Right Side	0mm	Trigger handle	Holster 2	OFF	41055	2636.5	23.75	24.50	1.189	62.9	1.006	0.06	0.400	0.478
	LTE Band 41	20M	QPSK	50	0	Right Side	0mm	Trigger handle	Holster 2	OFF	41490	2680	22.83	23.50	1.167	62.9	1.006	0.05	0.413	0.485

<WLAN SAR>

Plot No.	Band	Mode	Test Position	Gap (mm)	Accessories	Holster	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Duty Cycle %	Duty Cycle Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
	WLAN2.4GHz	802.11b 1Mbps	Front	0mm	-	Holster 1	1	2412	21.20	21.50	1.072	99.28	1.007	0.02	0.072	0.078
	WLAN2.4GHz	802.11b 1Mbps	Back	0mm	-	Holster 1	1	2412	21.20	21.50	1.072	99.28	1.007	-0.03	0.237	0.256
25	WLAN2.4GHz	802.11b 1Mbps	Left Side	0mm	Trigger handle	Holster 2	1	2412	21.20	21.50	1.072	99.28	1.007	0.01	0.264	0.285
	WLAN5GHz	802.11n-HT40 MCS0	Front	0mm	-	Holster 1	54	5270	19.50	20.00	1.122	96.43	1.037	0.06	0.092	0.107
	WLAN5GHz	802.11n-HT40 MCS0	Back	0mm	-	Holster 1	54	5270	19.50	20.00	1.122	96.43	1.037	0.04	0.146	0.170
26	WLAN5GHz	802.11n-HT40 MCS0	Left Side	0mm	Trigger handle	Holster 2	54	5270	19.50	20.00	1.122	96.43	1.037	-0.11	0.815	0.948
	WLAN5GHz	802.11a 6Mbps	Left Side	0mm	Trigger handle	Holster 2	60	5300	19.10	20.00	1.230	98.57	1.015	-0.04	0.734	0.917
	WLAN5GHz	802.11ac-VHT80 MCS0	Front	0mm	-	Holster 1	138	5690	19.90	20.50	1.148	92.22	1.084	-0.05	0.094	0.117
	WLAN5GHz	802.11ac-VHT80 MCS0	Back	0mm	-	Holster 1	138	5690	19.90	20.50	1.148	92.22	1.084	-0.1	0.239	0.297
27	WLAN5GHz	802.11ac-VHT80 MCS0	Left Side	0mm	Trigger handle	Holster 2	138	5690	19.90	20.50	1.148	92.22	1.084	-0.05	1.050	1.307
	WLAN5GHz	802.11ac-VHT80 MCS0	Left Side	0mm	Trigger handle	Holster 2	122	5610	19.60	20.50	1.230	92.22	1.084	-0.02	0.926	1.235
	WLAN5GHz	802.11n-HT40 MCS0	Left Side	0mm	Trigger handle	Holster 2	126	5630	19.70	20.50	1.202	96.43	1.037	0.04	0.954	1.189
	WLAN5GHz	802.11ac-VHT80 MCS0	Front	0mm	-	Holster 1	155	5775	17.50	18.00	1.122	92.22	1.084	0.09	0.062	0.075
	WLAN5GHz	802.11ac-VHT80 MCS0	Back	0mm	-	Holster 1	155	5775	17.50	18.00	1.122	92.22	1.084	0.05	0.129	0.157
28	WLAN5GHz	802.11ac-VHT80 MCS0	Left Side	0mm	Trigger handle	Holster 2	155	5775	17.50	18.00	1.122	92.22	1.084	0.05	0.655	0.797

<Bluetooth SAR>

Plot No.	Band	Mode	Test Position	Gap (mm)	Accessories	Holster	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Duty Cycle %	Duty Cycle Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
	Bluetooth	LE-1Mbps	Front	0mm	-	Holster 1	39	2480	7.50	8.00	1.122	62.3	1.337	-0.01	0.002	0.003
	Bluetooth	LE-1Mbps	Back	0mm	-	Holster 1	39	2480	7.50	8.00	1.122	62.3	1.337	0.03	0.001	0.002
29	Bluetooth	LE-1Mbps	Left Side	0mm	Trigger handle	Holster 2	39	2480	7.50	8.00	1.122	62.3	1.337	0.01	0.008	0.011



14.3 Hand SAR

<GSM SAR>

Plot No.	Band	Mode	Test Position	Gap (mm)	Power Reduction	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Power Drift (dB)	Measured 10g SAR (W/kg)	Reported 10g SAR (W/kg)
	GSM850	GPRS (4 Tx slots)	Back	0mm	OFF	189	836.4	27.97	28.00	1.007	0.01	0.720	0.725
	GSM850	GPRS (4 Tx slots)	Back	0mm	OFF	128	824.2	27.87	28.00	1.030	0.02	0.565	0.582
30	GSM850	GPRS (4 Tx slots)	Back	0mm	OFF	251	848.8	27.97	28.00	1.007	-0.11	0.872	0.878
	GSM1900	GPRS (4 Tx slots)	Back	0mm	OFF	661	1880	25.22	25.50	1.067	-0.1	0.462	0.493
	GSM1900	GPRS (4 Tx slots)	Back	0mm	OFF	512	1850.2	25.19	25.50	1.074	0.1	0.518	0.556
31	GSM1900	GPRS (4 Tx slots)	Back	0mm	OFF	810	1909.8	25.19	25.50	1.074	0.03	0.367	0.394

<WCDMA SAR>

Plot No.	Band	Mode	Test Position	Gap (mm)	Power Reduction	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Power Drift (dB)	Measured 10g SAR (W/kg)	Reported 10g SAR (W/kg)
	WCDMA II	RMC 12.2Kbps	Back	0mm	OFF	9538	1907.6	25.18	25.50	1.076	0.01	1.040	1.120
	WCDMA II	RMC 12.2Kbps	Back	0mm	OFF	9262	1852.4	24.75	25.50	1.189	0.03	0.972	1.155
32	WCDMA II	RMC 12.2Kbps	Back	0mm	OFF	9400	1880	25.15	25.50	1.084	-0.02	1.070	1.160
	WCDMA IV	RMC 12.2Kbps	Back	0mm	OFF	1513	1752.6	24.89	25.50	1.151	0.11	0.744	0.856
	WCDMA IV	RMC 12.2Kbps	Back	0mm	OFF	1312	1712.4	24.65	25.50	1.216	0.02	0.743	0.904
33	WCDMA IV	RMC 12.2Kbps	Back	0mm	OFF	1413	1732.6	24.76	25.50	1.186	0.03	0.768	0.911
	WCDMA V	RMC 12.2Kbps	Back	0mm	OFF	4182	836.4	25.42	25.50	1.019	-0.1	0.849	0.865
34	WCDMA V	RMC 12.2Kbps	Back	0mm	OFF	4132	826.4	25.39	25.50	1.026	-0.01	0.938	0.962
	WCDMA V	RMC 12.2Kbps	Back	0mm	OFF	4233	846.6	25.24	25.50	1.062	0.02	0.786	0.834

<FDD LTE SAR>

Plot No.	Band	BW (MHz)	Modulation	RB Size	RB offset	Test Position	Gap (mm)	Power Reduction	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Power Drift (dB)	Measured 10g SAR (W/kg)	Reported 10g SAR (W/kg)
35	LTE Band 2	20M	QPSK	1	0	Back	0mm	OFF	18900	1880	24.13	25.00	1.222	-0.1	0.844	1.031
	LTE Band 2	20M	QPSK	1	0	Back	0mm	OFF	18700	1860	23.99	25.00	1.262	0.01	0.720	0.909
	LTE Band 2	20M	QPSK	1	0	Back	0mm	OFF	19100	1900	24.12	25.00	1.225	0.04	0.775	0.949
	LTE Band 2	20M	QPSK	50	0	Back	0mm	OFF	18900	1880	23.09	24.00	1.233	0.02	0.696	0.858
36	LTE Band 4	20M	QPSK	1	0	Back	0mm	OFF	20175	1732.5	23.87	25.00	1.297	0.08	0.580	0.752
	LTE Band 4	20M	QPSK	50	0	Back	0mm	OFF	20175	1732.5	22.66	24.00	1.361	0.01	0.489	0.666
37	LTE Band 5	10M	QPSK	1	0	Back	0mm	OFF	20525	836.5	24.13	24.50	1.089	-0.01	0.686	0.747
	LTE Band 5	10M	QPSK	25	0	Back	0mm	OFF	20525	836.5	22.97	23.50	1.130	0.03	0.642	0.725
	LTE Band 7	20M	QPSK	1	0	Back	0mm	OFF	21100	2535	23.58	24.50	1.236	0.01	0.208	0.257
	LTE Band 7	20M	QPSK	1	0	Back	0mm	OFF	20850	2510	23.46	24.50	1.271	0.1	0.190	0.241
38	LTE Band 7	20M	QPSK	1	0	Back	0mm	OFF	21350	2560	23.27	24.50	1.327	0.11	0.219	0.291
	LTE Band 7	20M	QPSK	50	0	Back	0mm	OFF	21100	2535	22.62	23.50	1.225	0.02	0.143	0.175



<TDD LTE SAR>

Plot No.	Band	BW (MHz)	Modulation	RB Size	RB offset	Test Position	Gap (mm)	Power Reduction	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Duty Cycle %	Duty Cycle Scaling Factor	Power Drift (dB)	Measured 10g SAR (W/kg)	Reported 10g SAR (W/kg)
39	LTE Band 41	20M	QPSK	1	0	Back	0mm	OFF	41490	2680	24.01	24.50	1.119	62.9	1.006	0.03	0.354	0.399
	LTE Band 41	20M	QPSK	1	0	Back	0mm	OFF	39750	2506	23.60	24.50	1.230	62.9	1.006	-0.02	0.249	0.308
	LTE Band 41	20M	QPSK	1	0	Back	0mm	OFF	40185	2549.5	23.77	24.50	1.183	62.9	1.006	0.01	0.248	0.295
	LTE Band 41	20M	QPSK	1	0	Back	0mm	OFF	40620	2593	23.70	24.50	1.202	62.9	1.006	0.06	0.285	0.345
	LTE Band 41	20M	QPSK	1	0	Back	0mm	OFF	41055	2636.5	23.75	24.50	1.189	62.9	1.006	0.01	0.269	0.322
	LTE Band 41	20M	QPSK	50	0	Back	0mm	OFF	41490	2680	22.83	23.50	1.167	62.9	1.006	-0.07	0.207	0.243

<WLAN SAR>

Plot No.	Band	Mode	Test Position	Gap (mm)	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Duty Cycle %	Duty Cycle Scaling Factor	Power Drift (dB)	Measured 10g SAR (W/kg)	Reported 10g SAR (W/kg)
40	WLAN2.4GHz	802.11b 1Mbps	Back	0mm	1	2412	21.20	21.50	1.072	99.28	1.007	-0.13	0.323	0.349
41	WLAN5GHz	802.11n-HT40 MCS0	Back	0mm	54	5270	19.50	20.00	1.122	96.43	1.037	-0.06	0.189	0.220
42	WLAN5GHz	802.11ac-VHT80 MCS0	Back	0mm	138	5690	19.90	20.50	1.148	92.22	1.084	-0.05	0.228	0.284
43	WLAN5GHz	802.11ac-VHT80 MCS0	Back	0mm	155	5775	17.50	18.00	1.122	92.22	1.084	0.12	0.154	0.187

<Bluetooth SAR>

Plot No.	Band	Mode	Test Position	Gap (mm)	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Duty Cycle %	Duty Cycle Scaling Factor	Power Drift (dB)	Measured 10g SAR (W/kg)	Reported 10g SAR (W/kg)
44	Bluetooth	LE-1Mbps	Back	0mm	39	2480	7.50	8.00	1.122	62.3	1.337	0.04	0.001	0.002

**14.4 Repeated SAR Measurement**

No.	Band	Mode	Test Position	Gap (mm)	Accessories	Holster	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Duty Cycle %	Duty Cycle Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Ratio	Reported 1g SAR (W/kg)
1st	WCDMA IV	RMC 12.2Kbps	Right Side	10mm	-	-	1413	1732.6	23.81	24.50	1.172	-	-	0.08	0.902	-	1.057
2nd	WCDMA IV	RMC 12.2Kbps	Right Side	10mm	-	-	1413	1732.6	23.81	24.50	1.172	-	-	-0.06	0.889	1.01	1.042
1st	WCDMA V	RMC 12.2Kbps	Right Side	10mm	-	-	4233	846.6	25.24	25.50	1.062	-	-	-0.09	0.822	-	0.873
2nd	WCDMA V	RMC 12.2Kbps	Right Side	10mm	-	-	4233	846.6	25.24	25.50	1.062	-	-	-0.01	0.821	1.00	0.872
1st	LTE Band 2	20M_QPSK_1_0	Right Side	10mm	-	-	18900	1880	23.33	23.50	1.040	-	-	-0.07	0.887	-	0.922
2nd	LTE Band 2	20M_QPSK_1_0	Right Side	10mm	-	-	18900	1880	23.33	23.50	1.040	-	-	-0.06	0.838	1.06	0.871
1st	WLAN5GHz	802.11n-HT40 MCS0	Left Side	10mm	-	-	46	5230	19.00	19.50	1.122	96.43	1.037	-0.15	1.080	-	1.257
2nd	WLAN5GHz	802.11n-HT40 MCS0	Left Side	10mm	-	-	46	5230	19.00	19.50	1.122	96.43	1.037	-0.14	1.030	1.05	1.198
1st	WLAN5GHz	802.11n-HT40 MCS0	Left Side	10mm	-	-	159	5795	17.70	18.00	1.072	96.43	1.037	-0.16	1.040	-	1.156
2nd	WLAN5GHz	802.11n-HT40 MCS0	Left Side	10mm	-	-	159	5795	17.70	18.00	1.072	96.43	1.037	-0.04	0.980	1.06	1.089
1st	WLAN5GHz	802.11n-HT40 MCS0	Left Side	0mm	Trigger handle	Holster 2	54	5270	19.50	20.00	1.122	96.43	1.037	-0.11	0.815	-	0.948
2nd	WLAN5GHz	802.11n-HT40 MCS0	Left Side	0mm	Trigger handle	Holster 2	54	5270	19.50	20.00	1.122	96.43	1.037	0.06	0.801	1.02	0.932
1st	WLAN5GHz	802.11ac-VHT80 MCS0	Left Side	0mm	Trigger handle	Holster 2	138	5690	19.90	20.50	1.148	92.22	1.084	-0.05	1.050	-	1.307
2nd	WLAN5GHz	802.11ac-VHT80 MCS0	Left Side	0mm	Trigger handle	Holster 2	138	5690	19.90	20.50	1.148	92.22	1.084	0.05	1.030	1.02	1.282

**General Note:**

1. Per KDB 865664 D01v01r04, for each frequency band, repeated SAR measurement is required only when the measured SAR is  $\geq 0.8W/kg$ .
2. Per KDB 865664 D01v01r04, if the ratio among the repeated measurement is  $\leq 1.2$  and the measured SAR  $< 1.45W/kg$ , only one repeated measurement is required.
3. The ratio is the difference in percentage between original and repeated *measured SAR*.
4. All measurement SAR result is scaled-up to account for tune-up tolerance and is compliant.



**15. Simultaneous Transmission Analysis**

NO.	Simultaneous Transmission Configurations	Body-worn	Hotspot	Hand
1.	WWAN + WLAN2.4GHz	Yes	Yes	Yes
2.	WWAN + WLAN5GHz	Yes	Yes	Yes
3.	WWAN + Bluetooth	Yes	Yes	Yes

**General Note:**

1. WLAN and Bluetooth share the same antenna, and cannot transmit simultaneously.
2. All licensed modes share the same antenna part and cannot transmit simultaneously
3. EUT will choose either WLAN 2.4GHz or WLAN 5GHz according to the network signal condition; therefore, 2.4GHz WLAN and 5GHz WLAN will not operate simultaneously at any moment.
4. The Scaled SAR summation is calculated based on the same configuration and test position.
5. Per KDB 447498 D01v06, simultaneous transmission SAR is compliant if,
  - i) Scalar SAR summation < 1.6W/kg.
  - ii)  $SPLSR = (SAR1 + SAR2)^{1.5} / (\text{min. separation distance, mm})$ , and the peak separation distance is determined from the square root of  $[(x1-x2)^2 + (y1-y2)^2 + (z1-z2)^2]$ , where (x1, y1, z1) and (x2, y2, z2) are the coordinates of the extrapolated peak SAR locations in the zoom scan.
  - iii) If  $SPLSR \leq 0.04$ , simultaneously transmission SAR measurement is not necessary.
  - iv) Simultaneously transmission SAR measurement, and the reported multi-band SAR < 1.6W/kg.

**15.1 Hotspot Exposure Conditions**

WWAN Band	Exposure Position	1	2	3	4	1+2 Summed 1g SAR (W/kg)	1+3 Summed 1g SAR (W/kg)	1+4 Summed 1g SAR (W/kg)
		WWAN 1g SAR (W/kg)	2.4GHz WLAN 1g SAR (W/kg)	5GHz WLAN 1g SAR (W/kg)	Bluetooth 1g SAR (W/kg)			
GSM850	Front at 10mm	0.314	0.265	0.259	0.006	0.579	0.573	0.320
	Back at 10mm	0.449	0.318	0.482	0.005	0.767	0.931	0.454
	Left side at 10mm		0.458	1.257	0.014	0.458	1.257	0.014
	Right side at 10mm	0.682				0.682	0.682	0.682
	Top side at 10mm	0.145				0.145	0.145	0.145
GSM1900	Front at 10mm	0.182	0.265	0.259	0.006	0.447	0.441	0.188
	Back at 10mm	0.368	0.318	0.482	0.005	0.686	0.850	0.373
	Left side at 10mm		0.458	1.257	0.014	0.458	1.257	0.014
	Right side at 10mm	0.767				0.767	0.767	0.767
	Top side at 10mm	0.108				0.108	0.108	0.108
WCDMA II	Front at 10mm	0.296	0.265	0.259	0.006	0.561	0.555	0.302
	Back at 10mm	0.638	0.318	0.482	0.005	0.956	1.120	0.643
	Left side at 10mm		0.458	1.257	0.014	0.458	1.257	0.014
	Right side at 10mm	1.051				1.051	1.051	1.051
	Top side at 10mm	0.183				0.183	0.183	0.183
WCDMA IV	Front at 10mm	0.413	0.265	0.259	0.006	0.678	0.672	0.419
	Back at 10mm	0.368	0.318	0.482	0.005	0.686	0.850	0.373
	Left side at 10mm		0.458	1.257	0.014	0.458	1.257	0.014
	Right side at 10mm	1.057				1.057	1.057	1.057
	Top side at 10mm	0.335				0.335	0.335	0.335
WCDMA V	Front at 10mm	0.357	0.265	0.259	0.006	0.622	0.616	0.363
	Back at 10mm	0.543	0.318	0.482	0.005	0.861	1.025	0.548
	Left side at 10mm		0.458	1.257	0.014	0.458	1.257	0.014
	Right side at 10mm	0.873				0.873	0.873	0.873
	Top side at 10mm	0.134				0.134	0.134	0.134
LTE Band 2	Front at 10mm	0.277	0.265	0.259	0.006	0.542	0.536	0.283
	Back at 10mm	0.621	0.318	0.482	0.005	0.939	1.103	0.626
	Left side at 10mm		0.458	1.257	0.014	0.458	1.257	0.014
	Right side at 10mm	1.035				1.035	1.035	1.035
	Top side at 10mm	0.133				0.133	0.133	0.133
LTE Band 4	Front at 10mm	0.438	0.265	0.259	0.006	0.703	0.697	0.444
	Back at 10mm	0.368	0.318	0.482	0.005	0.686	0.850	0.373
	Left side at 10mm		0.458	1.257	0.014	0.458	1.257	0.014
	Right side at 10mm	0.777				0.777	0.777	0.777
	Top side at 10mm	0.377				0.377	0.377	0.377
LTE Band 5	Front at 10mm	0.268	0.265	0.259	0.006	0.533	0.527	0.274
	Back at 10mm	0.406	0.318	0.482	0.005	0.724	0.888	0.411
	Left side at 10mm		0.458	1.257	0.014	0.458	1.257	0.014
	Right side at 10mm	0.690				0.690	0.690	0.690
	Top side at 10mm	0.118				0.118	0.118	0.118
LTE Band 7	Front at 10mm	0.167	0.265	0.259	0.006	0.432	0.426	0.173
	Back at 10mm	0.199	0.318	0.482	0.005	0.517	0.681	0.204
	Left side at 10mm		0.458	1.257	0.014	0.458	1.257	0.014
	Right side at 10mm	0.703				0.703	0.703	0.703
	Top side at 10mm	0.142				0.142	0.142	0.142
LTE Band 41	Front at 10mm	0.113	0.265	0.259	0.006	0.378	0.372	0.119
	Back at 10mm	0.196	0.318	0.482	0.005	0.514	0.678	0.201
	Left side at 10mm		0.458	1.257	0.014	0.458	1.257	0.014
	Right side at 10mm	0.669				0.669	0.669	0.669
	Top side at 10mm	0.146				0.146	0.146	0.146

**15.2 Body-Worn Accessory Exposure Conditions**

WWAN Band	Exposure Position	1	2	3	4	1+2 Summed 1g SAR (W/kg)	1+3 Summed 1g SAR (W/kg)	1+4 Summed 1g SAR (W/kg)
		WWAN 1g SAR (W/kg)	2.4GHz WLAN 1g SAR (W/kg)	5GHz WLAN 1g SAR (W/kg)	Bluetooth 1g SAR (W/kg)			
GSM850	Front at 0mm	0.021	0.078	0.117	0.003	0.099	0.138	0.024
	Back at 0mm	0.035	0.256	0.297	0.002	0.291	0.332	0.037
	Right side at 0mm	0.484				0.484	0.484	0.484
	Left side at 0mm		0.285	1.307	0.011	0.285	1.307	0.011
GSM1900	Front at 0mm	0.023	0.078	0.117	0.003	0.101	0.140	0.026
	Back at 0mm	0.091	0.256	0.297	0.002	0.347	0.388	0.093
	Right side at 0mm	0.387				0.387	0.387	0.387
	Left side at 0mm		0.285	1.307	0.011	0.285	1.307	0.011
WCDMA II	Front at 0mm	0.110	0.078	0.117	0.003	0.188	0.227	0.113
	Back at 0mm	0.382	0.256	0.297	0.002	0.638	0.679	0.384
	Right side at 0mm	0.837				0.837	0.837	0.837
	Left side at 0mm		0.285	1.307	0.011	0.285	1.307	0.011
WCDMA IV	Front at 0mm	0.254	0.078	0.117	0.003	0.332	0.371	0.257
	Back at 0mm	0.327	0.256	0.297	0.002	0.583	0.624	0.329
	Right side at 0mm	0.956				0.956	0.956	0.956
	Left side at 0mm		0.285	1.307	0.011	0.285	1.307	0.011
WCDMA V	Front at 0mm	0.109	0.078	0.117	0.003	0.187	0.226	0.112
	Back at 0mm	0.178	0.256	0.297	0.002	0.434	0.475	0.180
	Right side at 0mm	0.367				0.367	0.367	0.367
	Left side at 0mm		0.285	1.307	0.011	0.285	1.307	0.011
LTE Band 2	Front at 0mm	0.158	0.078	0.117	0.003	0.236	0.275	0.161
	Back at 0mm	0.643	0.256	0.297	0.002	0.899	0.940	0.645
	Right side at 0mm	0.775				0.775	0.775	0.775
	Left side at 0mm		0.285	1.307	0.011	0.285	1.307	0.011
LTE Band 4	Front at 0mm	0.064	0.078	0.117	0.003	0.142	0.181	0.067
	Back at 0mm	0.066	0.256	0.297	0.002	0.322	0.363	0.068
	Right side at 0mm	0.970				0.970	0.970	0.970
	Left side at 0mm		0.285	1.307	0.011	0.285	1.307	0.011
LTE Band 5	Front at 0mm	0.114	0.078	0.117	0.003	0.192	0.231	0.117
	Back at 0mm	0.174	0.256	0.297	0.002	0.430	0.471	0.176
	Right side at 0mm	0.363				0.363	0.363	0.363
	Left side at 0mm		0.285	1.307	0.011	0.285	1.307	0.011
LTE Band 7	Front at 0mm	0.129	0.078	0.117	0.003	0.207	0.246	0.132
	Back at 0mm	0.262	0.256	0.297	0.002	0.518	0.559	0.264
	Right side at 0mm	0.615				0.615	0.615	0.615
	Left side at 0mm		0.285	1.307	0.011	0.285	1.307	0.011
LTE Band 41	Front at 0mm	0.070	0.078	0.117	0.003	0.148	0.187	0.073
	Back at 0mm	0.220	0.256	0.297	0.002	0.476	0.517	0.222
	Right side at 0mm	0.538				0.538	0.538	0.538
	Left side at 0mm		0.285	1.307	0.011	0.285	1.307	0.011



**15.3 Hand Exposure Conditions**

WWAN Band	Exposure Position	1	2	3	4	1+2 Summed 10g SAR (W/kg)	1+3 Summed 10g SAR (W/kg)	1+4 Summed 10g SAR (W/kg)
		WWAN	2.4GHz WLAN	5GHz WLAN	Bluetooth			
		10g SAR (W/kg)	10g SAR (W/kg)	10g SAR (W/kg)	10g SAR (W/kg)			
GSM850	Back at 0mm	0.878	0.349	0.284	0.002	1.227	1.162	0.880
GSM1900	Back at 0mm	0.556	0.349	0.284	0.002	0.905	0.840	0.558
WCDMA II	Back at 0mm	1.160	0.349	0.284	0.002	1.509	1.444	1.162
WCDMA IV	Back at 0mm	0.911	0.349	0.284	0.002	1.260	1.195	0.913
WCDMA V	Back at 0mm	0.962	0.349	0.284	0.002	1.311	1.246	0.964
LTE Band 2	Back at 0mm	1.031	0.349	0.284	0.002	1.380	1.315	1.033
LTE Band 4	Back at 0mm	0.752	0.349	0.284	0.002	1.101	1.036	0.754
LTE Band 5	Back at 0mm	0.747	0.349	0.284	0.002	1.096	1.031	0.749
LTE Band 7	Back at 0mm	0.291	0.349	0.284	0.002	0.640	0.575	0.293
LTE Band 41	Back at 0mm	0.399	0.349	0.284	0.002	0.748	0.683	0.401

**Test Engineer :** Jimmy Lu, Bevis Chang, Thomas Wang and Sing Lim





## **16. Uncertainty Assessment**

Per KDB 865664 D01 SAR measurement 100MHz to 6GHz, when the highest measured 1-g SAR within a frequency band is  $< 1.5$  W/kg and the measured 10-g SAR within a frequency band is  $< 3.75$  W/kg. The expanded SAR measurement uncertainty must be  $\leq 30\%$ , for a confidence interval of  $k = 2$ . If these conditions are met, extensive SAR measurement uncertainty analysis described in IEEE Std 1528-2013 is not required in SAR reports submitted for equipment approval. For this device, the highest measured 1-g SAR is less 1.5W/kg and highest measured 10-g SAR is less 3.75W/kg . Therefore, the measurement uncertainty table is not required in this report.

Declaration of Conformity:

The test results with all measurement uncertainty excluded is presented in accordance with the regulation limits or requirements declared by manufacturers.

Comments and Explanations:

The declared of product specification for EUT presented in the report are provided by the manufacturer, and the manufacturer takes all the responsibilities for the accuracy of product specification.

## **17. References**

- [1] FCC 47 CFR Part 2 "Frequency Allocations and Radio Treaty Matters; General Rules and Regulations"
- [2] ANSI/IEEE Std. C95.1-1992, "IEEE Standard for Safety Levels with Respect to Human Exposure to Radio Frequency Electromagnetic Fields, 3 kHz to 300 GHz", September 1992
- [3] IEEE Std. 1528-2013, "IEEE Recommended Practice for Determining the Peak Spatial-Average Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques", Sep 2013
- [4] SPEAG DASY System Handbook
- [5] FCC KDB 248227 D01 v02r02, "SAR Guidance for IEEE 802.11 (WiFi) Transmitters", Oct 2015.
- [6] FCC KDB 447498 D01 v06, "Mobile and Portable Device RF Exposure Procedures and Equipment Authorization Policies", Oct 2015
- [7] FCC KDB 941225 D01 v03r01, "3G SAR MEAUREMENT PROCEDURES", Oct 2015
- [8] FCC KDB 941225 D05 v02r05, "SAR Evaluation Considerations for LTE Devices", Dec 2015
- [9] FCC KDB 941225 D06 v02r01, "SAR Evaluation Procedures for Portable Devices with Wireless Router Capabilities", Oct 2015.
- [10] FCC KDB 865664 D01 v01r04, "SAR Measurement Requirements for 100 MHz to 6 GHz", Aug 2015.
- [11] FCC KDB 865664 D02 v01r02, "RF Exposure Compliance Reporting and Documentation Considerations" Oct 2015.