



FCC RADIO TEST REPORT

FCC ID : UZ7MPACTINDR3
Equipment : MPACT Tag
Brand Name : ZEBRA
Model Name : MPACT-INDR3
Applicant : Zebra Technologies Corporation
1 Zebra Plaza, Holtsville, NY 11742 USA
Manufacturer : Wistron NeWeb Corporation
20 Park Avenue II, Hsinchu Science
Park, Hsinchu 308, Taiwan, R.O.C.
Standard : FCC Part 15 Subpart C §15.247

The product was received on Nov. 02, 2020 and testing was started from Nov. 06, 2020 and completed on Dec. 19, 2020. We, SPORTON INTERNATIONAL INC., EMC & Wireless Communications Laboratory, would like to declare that the tested sample has been evaluated in accordance with the test procedures and has been in compliance with the applicable technical standards.

The test results in this report apply exclusively to the tested model / sample. Without written approval of SPORTON INTERNATIONAL INC. EMC & Wireless Communications Laboratory, the test report shall not be reproduced except in full.

Louis Wu

Approved by: Louis Wu

SPORTON INTERNATIONAL INC. EMC & Wireless Communications Laboratory

No. 52, Huaya 1st Rd., Guishan Dist., Taoyuan City, Taiwan (R.O.C.)



Table of Contents

History of this test report.....	3
Summary of Test Result.....	4
1 General Description.....	5
1.1 Product Feature of Equipment Under Test.....	5
1.2 Product Specification of Equipment Under Test.....	5
1.3 Modification of EUT	5
1.4 Testing Location	6
1.5 Applicable Standards.....	6
2 Test Configuration of Equipment Under Test.....	7
2.1 Carrier Frequency Channel	7
2.2 Test Mode.....	8
2.3 Connection Diagram of Test System.....	9
2.4 EUT Operation Test Setup	9
2.5 Measurement Results Explanation Example.....	9
3 Test Result.....	10
3.1 6dB and 99% Bandwidth Measurement	10
3.2 Output Power Measurement.....	15
3.3 Power Spectral Density Measurement	17
3.4 Conducted Band Edges and Spurious Emission Measurement	22
3.5 Radiated Band Edges and Spurious Emission Measurement	27
3.6 Antenna Requirements.....	31
4 List of Measuring Equipment	32
5 Uncertainty of Evaluation.....	33
Appendix A. Radiated Spurious Emission	
Appendix B. Radiated Spurious Emission Plots	
Appendix C. Duty Cycle Plots	
Appendix D. Setup Photographs	



History of this test report

Report No.	Version	Description	Issued Date
FR001315	01	Initial issue of report	Jan. 08, 2021



Summary of Test Result

Report Clause	Ref Std. Clause	Test Items	Result (PASS/FAIL)	Remark
3.1	15.247(a)(2)	6dB Bandwidth	Pass	-
3.1	2.1049	99% Occupied Bandwidth	Reporting only	-
3.2	15.247(b)(3)	Output Power	Pass	-
3.3	15.247(e)	Power Spectral Density	Pass	-
3.4	15.247(d)	Conducted Band Edges and Spurious Emission	Pass	-
3.5	15.247(d)	Radiated Band Edges and Spurious Emission	Pass	Under limit 2.88 dB at 7320.000 MHz
-	15.207	AC Conducted Emission	Not Required	-
3.6	15.203 & 15.247(b)	Antenna Requirement	Pass	-

Note: Not required means after assessing, test items are not necessary to carry out.

Declaration of Conformity:

The test results with all measurement uncertainty excluded are presented in accordance with the regulation limits or requirements declared by manufacturers.

Comments and Explanations:

The declared of product specification for EUT presented in the report are provided by the manufacturer, and the manufacturer takes all the responsibilities for the accuracy of product specification.

Reviewed by: Wii Chang

Report Producer: Cindy Liu



1 General Description

1.1 Product Feature of Equipment Under Test

Product Feature	
Equipment	MPACT Tag
Brand Name	ZEBRA
Model Name	MPACT-INDR3
FCC ID	UZ7MPACTINDR3
EUT supports Radios application	Bluetooth–LE NFC Tag
HW Version	Rev A
SW Version	MPACT-SB1100-01-WR_MFG-1.0.0.32-001R
MFD	21SEP20
EUT Stage	Production Unit

Remark: The above EUT's information was declared by manufacturer.

Specification of Accessories				
Battery	Brand Name	Panasonic	Model Name	CR2032

1.2 Product Specification of Equipment Under Test

Standards-related Product Specification	
Tx/Rx Frequency Range	2402 MHz ~ 2480 MHz
Number of Channels	40
Carrier Frequency of Each Channel	40 Channel(37 hopping + 3 advertising channel)
Maximum Output Power to Antenna	1.80 dBm (0.0015 W)
99% Occupied Bandwidth	1.057 MHz for 1Mbps
Antenna Type / Gain	PCB Antenna with gain 1.67 dBi
Type of Modulation	Bluetooth LE : GFSK

Remark: The above EUT's information was declared by manufacturer. Please refer to Comments and Explanations in report summary.

1.3 Modification of EUT

No modifications are made to the EUT during all test items.



1.4 Testing Location

Test Site	SPORTON INTERNATIONAL INC. EMC & Wireless Communications Laboratory
Test Site Location	No.52, Huaya 1st Rd., Guishan Dist., Taoyuan City, Taiwan (R.O.C.) TEL: +886-3-327-3456 FAX: +886-3-328-4978
Test Site No.	Sporton Site No. TH05-HY

Test Site	SPORTON INTERNATIONAL INC. EMC & Wireless Communications Laboratory
Test Site Location	No.58, Aly. 75, Ln. 564, Wenhua 3rd, Rd., Guishan Dist., Taoyuan City, Taiwan (R.O.C.) TEL: +886-3-327-0868 FAX: +886-3-327-0855
Test Site No.	Sporton Site No. 03CH11-HY

Note: The test site complies with ANSI C63.4 2014 requirement.

FCC designation No.: TW1190 and TW0007

1.5 Applicable Standards

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

- ♦ FCC Part 15 Subpart C §15.247
- ♦ FCC KDB Publication No. 558074 D01 DTS Meas. Guidance v05r02
- ♦ FCC KDB 414788 D01 Radiated Test Site v01r01
- ♦ ANSI C63.10-2013

Remark:

1. All test items were verified and recorded according to the standards and without any deviation during the test.
2. The TAF code is not including all the FCC KDB listed without accreditation.
3. This EUT has also been tested and complied with the requirements of FCC Part 15, Subpart B, recorded in a separate test report.



2 Test Configuration of Equipment Under Test

2.1 Carrier Frequency Channel

Frequency Band	Channel	Freq. (MHz)	Channel	Freq. (MHz)
2400-2483.5 MHz	0	2402	21	2444
	1	2404	22	2446
	2	2406	23	2448
	3	2408	24	2450
	4	2410	25	2452
	5	2412	26	2454
	6	2414	27	2456
	7	2416	28	2458
	8	2418	29	2460
	9	2420	30	2462
	10	2422	31	2464
	11	2424	32	2466
	12	2426	33	2468
	13	2428	34	2470
	14	2430	35	2472
	15	2432	36	2474
	16	2434	37	2476
	17	2436	38	2478
	18	2438	39	2480
	19	2440	-	-
20	2442	-	-	



2.2 Test Mode

Channel	Frequency	Bluetooth – LE RF Average Output Power
		Data Rate / Modulation
		GFSK
		1Mbps
Ch00	2402MHz	1.70 dBm
Ch19	2440MHz	1.80 dBm
Ch39	2480MHz	1.60 dBm


The EUT has been associated with peripherals and configuration operated in a manner tended to maximize its emission characteristics in a typical application. Frequency range investigated: radiation emission (9 kHz to the 10th harmonic of the highest fundamental frequency or to 40 GHz, whichever is lower). For radiated measurement, pre-scanned in two antenna polarization (Horizontal and Vertical). The worst cases (Ant. Vertical) were recorded in this report.

The following summary table is showing all test modes to demonstrate in compliance with the standard.

Summary table of Test Cases	
Test Item	Data Rate / Modulation
Conducted Test Cases	Bluetooth – LE / GFSK
	Mode 1: Bluetooth Tx CH00_2402 MHz_1Mbps
	Mode 2: Bluetooth Tx CH19_2440 MHz_1Mbps
	Mode 3: Bluetooth Tx CH39_2480 MHz_1Mbps
Radiated Test Cases	Mode 1: Bluetooth Tx CH00_2402 MHz_1Mbps
	Mode 2: Bluetooth Tx CH19_2440 MHz_1Mbps
	Mode 3: Bluetooth Tx CH39_2480 MHz_1Mbps

2.3 Connection Diagram of Test System

<Bluetooth – LE Tx Mode>

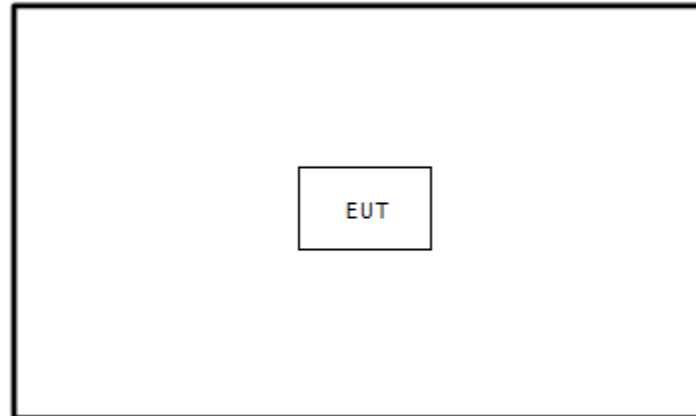

2.4 EUT Operation Test Setup

The RF test items, utility “SmartRF Studio v7 Ver.2.19.0” was installed in Notebook which was programmed in order to make the EUT get into the engineering modes to provide channel selection, power level, data rate and the application type and for continuous transmitting signals.

2.5 Measurement Results Explanation Example

For all conducted test items:

The offset level is set in the spectrum analyzer to compensate the RF cable loss and attenuator factor between EUT conducted output port and spectrum analyzer. With the offset compensation, the spectrum analyzer reading level is exactly the EUT RF output level.

Example :

The spectrum analyzer offset is derived from RF cable loss and attenuator factor.

Offset = RF cable loss + attenuator factor.

Following shows an offset computation example with cable loss 4.2 dB and 10dB attenuator.

$$\begin{aligned} \text{Offset(dB)} &= \text{RF cable loss(dB)} + \text{attenuator factor(dB)}. \\ &= 4.2 + 10 = 14.2 \text{ (dB)} \end{aligned}$$

3 Test Result

3.1 6dB and 99% Bandwidth Measurement

3.1.1 Limit of 6dB and 99% Bandwidth

The minimum 6 dB bandwidth shall be at least 500 kHz.

3.1.2 Measuring Instruments

See list of measuring equipment of this test report.

3.1.3 Test Procedures

1. The testing follows the ANSI C63.10 Section 6.9.3 (OBW) and 11.8.1 (6dB BW).
2. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.
3. Set to the maximum power setting and enable the EUT transmit continuously.
4. Make the measurement with the spectrum analyzer's resolution bandwidth (RBW) = 100 kHz. Set the Video bandwidth (VBW) = 300 kHz. In order to make an accurate measurement. The 6 dB bandwidth must be greater than 500 kHz.
5. For 99% Bandwidth Measurement, the spectrum analyzer's resolution bandwidth (RBW) is set 1-5% of the emission bandwidth and set the Video bandwidth (VBW) $\geq 3 * RBW$.
6. Measure and record the results in the test report.

3.1.4 Test Setup






3.1.5 Test Result of 6dB Bandwidth

Test Engineer :	Willy Lin and Tommy Lee	Temperature :	22.8~23.9°C
		Relative Humidity :	53.6~54.7%

Mod.	Data Rate	NTX	CH.	Freq. (MHz)	6dB BW (MHz)	6dB BW Limit (MHz)	Pass/Fail
BLE	1Mbps	1	0	2402	0.732	0.50	Pass
BLE	1Mbps	1	19	2440	0.724	0.50	Pass
BLE	1Mbps	1	39	2480	0.744	0.50	Pass


6 dB Bandwidth Plot on Channel 00

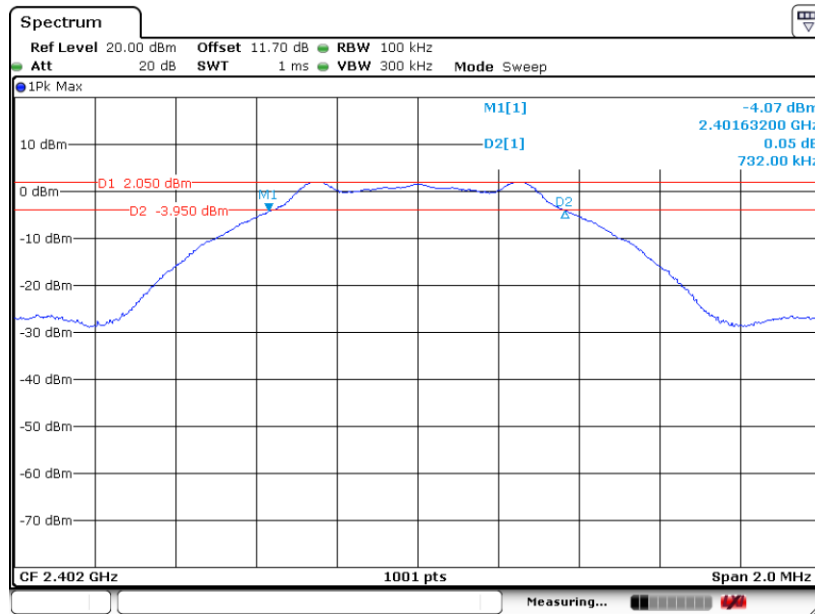

Date: 19.NOV.2020 07:53:32




6 dB Bandwidth Plot on Channel 19

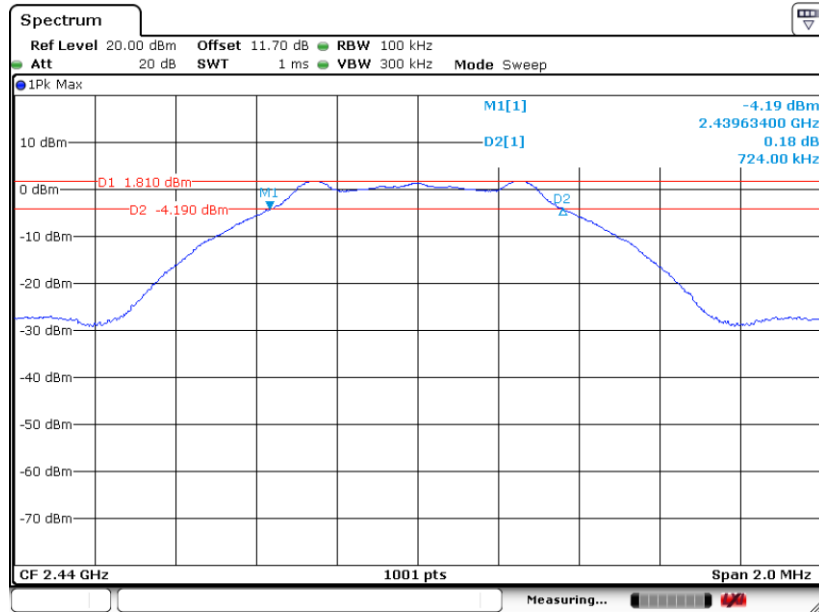

Date: 19.NOV.2020 10:20:41

6 dB Bandwidth Plot on Channel 39

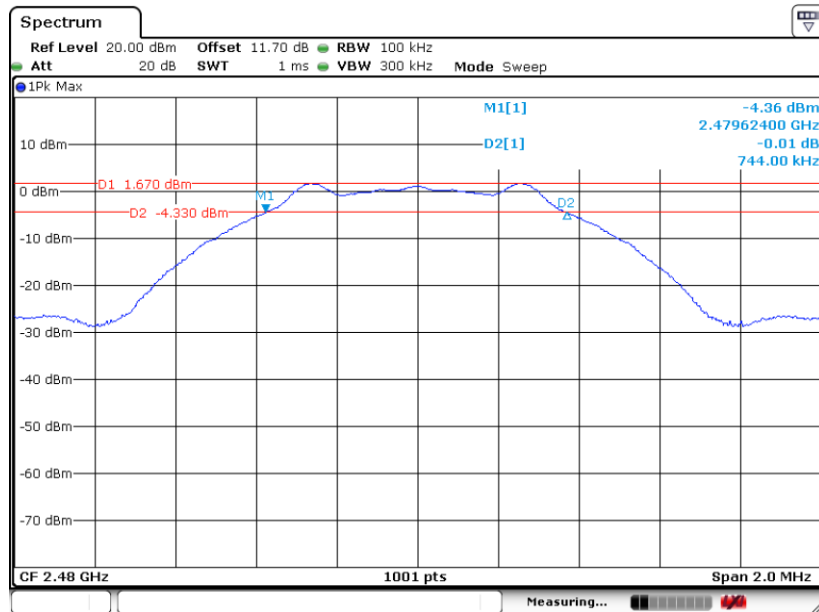

Date: 19.NOV.2020 10:30:21




3.1.6 Test Result of 99% Occupied Bandwidth

Test Engineer :	Willy Lin and Tommy Lee	Temperature :	22.8~23.9°C
		Relative Humidity :	53.6~54.7%

Mod.	Data Rate	NTX	CH.	Freq. (MHz)	99% Occupied BW (MHz)	Pass/Fail
BLE	1Mbps	1	0	2402	1.051	Pass
BLE	1Mbps	1	19	2440	1.047	Pass
BLE	1Mbps	1	39	2480	1.057	Pass


99% Bandwidth Plot on Channel 00

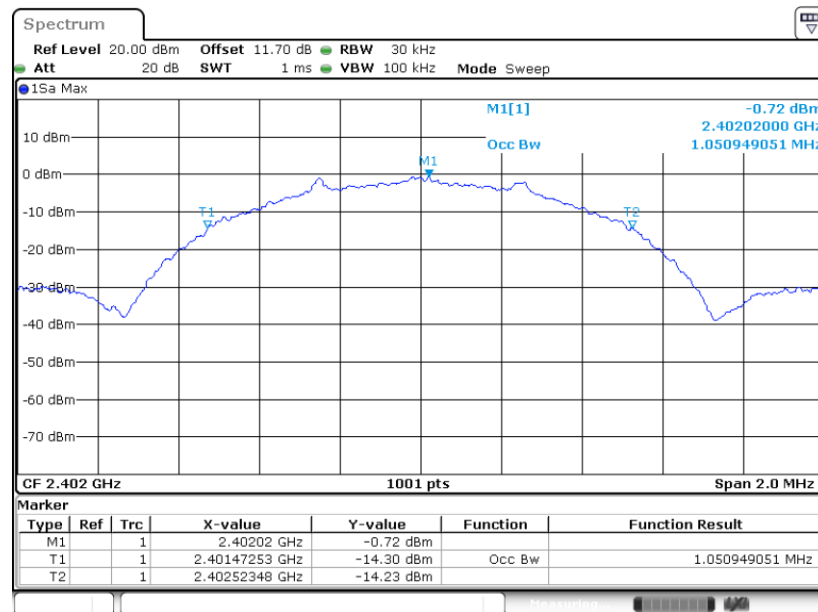

Date: 19.NOV.2020 09:49:06




99% Occupied Bandwidth Plot on Channel 19

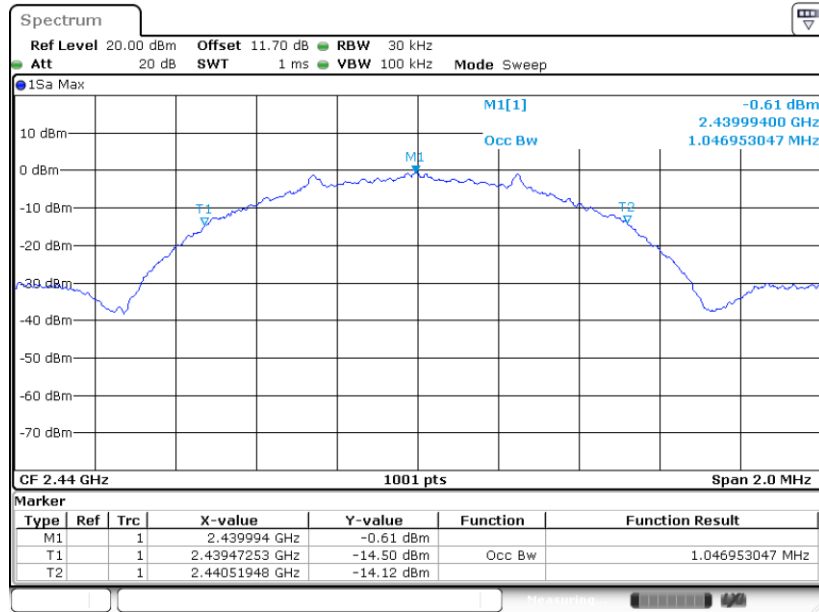

Date: 19.NOV.2020 10:26:50

99% Occupied Bandwidth Plot on Channel 39

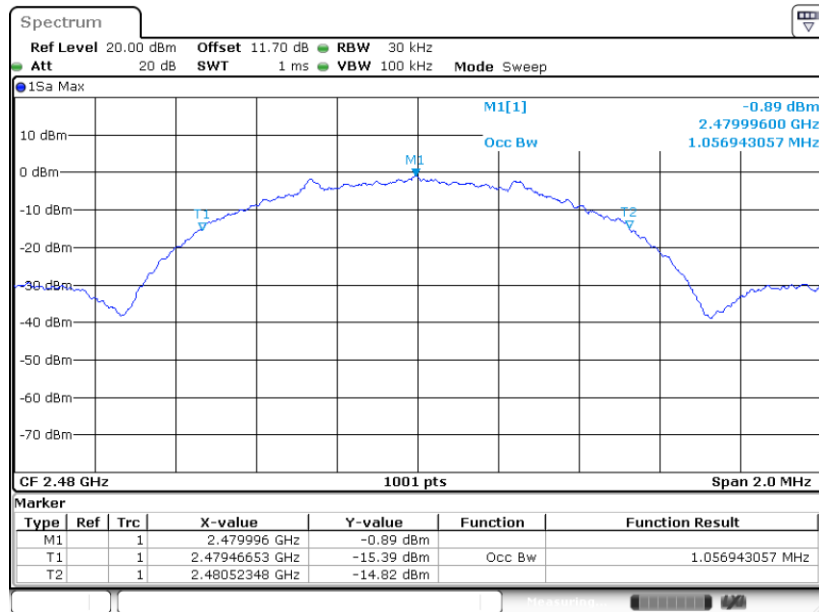

Date: 19.NOV.2020 10:38:19

Note: The occupied channel bandwidth is maintained within the band of operation for all of the modulations.

3.2 Output Power Measurement

3.2.1 Limit of Output Power

For systems using digital modulation in the 2400-2483.5MHz, the limit for output power is 30dBm. If transmitting antenna of directional gain greater than 6dBi is used, the peak output power from the intentional radiator shall be reduced below the above stated value by the amount in dB that the directional gain of the antenna exceeds 6 dBi. In case of point-to-point operation, the limit has to be reduced by 1dB for every 3dB that the directional gain of the antenna exceeds 6dBi.


3.2.2 Measuring Instruments

See list of measuring equipment of this test report.

3.2.3 Test Procedures

1. For Average Power, the testing follows ANSI C63.10 Section 11.9.2.3.2 Method AVGPM-G
2. The RF output of EUT was connected to the power meter by RF cable and attenuator.
3. The path loss was compensated to the results for each measurement.
4. Set to the maximum power setting and enable the EUT transmit continuously.
5. Measure the conducted output power and record the results in the test report.

3.2.4 Test Setup

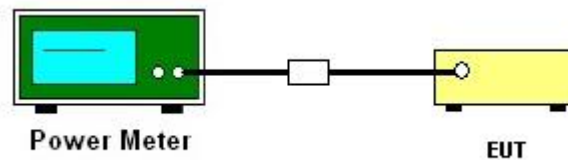



3.2.5 Test Result of Average Output Power

Test Engineer :	Willy Lin and Tommy Lee	Temperature :	22.8~23.9°C
		Relative Humidity :	53.6~54.7%

Mod.	Data Rate	NTX	CH.	Freq. (MHz)	Average Conducted Power (dBm)	Conducted Power Limit (dBm)	DG (dBi)	EIRP Power (dBm)	EIRP Power Limit (dBm)	Pass /Fail
BLE	1Mbps	1	0	2402	1.70	30.00	1.67	3.37	36.00	Pass
BLE	1Mbps	1	19	2440	1.80	30.00	1.67	3.47	36.00	Pass
BLE	1Mbps	1	39	2480	1.60	30.00	1.67	3.27	36.00	Pass

3.3 Power Spectral Density Measurement

3.3.1 Limit of Power Spectral Density

The peak power spectral density shall not be greater than 8dBm in any 3kHz band at any time interval of continuous transmission.


3.3.2 Measuring Instruments

See list of measuring equipment of this test report.

3.3.3 Test Procedures

1. The testing follows the ANSI C63.10 Section 11.10.2 Method PKPSD.
2. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.
3. Set to the maximum power setting and enable the EUT transmit continuously.
4. Make the measurement with the spectrum analyzer's resolution bandwidth (RBW) = 3 kHz. Video bandwidth VBW = 10 kHz In order to make an accurate measurement, set the span to 1.5 times DTS Channel Bandwidth. (6dB BW)
5. Detector = peak, Sweep time = auto couple, Trace mode = max hold, Allow trace to fully stabilize. Use the peak marker function to determine the maximum power level.
6. Measure and record the results in the test report.
7. The Measured power density (dBm)/ 100kHz is a reference level and used as 20dBc down limit line for Conducted Band Edges and Conducted Spurious Emission.

3.3.4 Test Setup

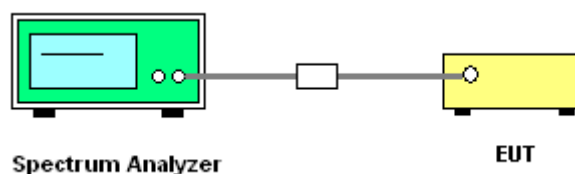



3.3.5 Test Result of Power Spectral Density


Test Engineer :	Willy Lin and Tommy Lee	Temperature :	22.8~23.9°C
		Relative Humidity :	53.6~54.7%

Mod.	Data Rate	NTX	CH.	Freq. (MHz)	Peak PSD (dBm /100kHz)	Peak PSD (dBm /3kHz)	DG (dBi)	Peak PSD Limit (dBm /3kHz)	Pass/Fail
BLE	1Mbps	1	0	2402	2.02	-6.87	1.67	8.00	Pass
BLE	1Mbps	1	19	2440	1.81	-7.14	1.67	8.00	Pass
BLE	1Mbps	1	39	2480	1.65	-7.09	1.67	8.00	Pass

3.3.6 Test Result of Power Spectral Density Plots (100kHz)

Test Engineer :	Willy Lin and Tommy Lee	Temperature :	22.8~23.9°C
		Relative Humidity :	53.6~54.7%


PSD 100kHz Plot on Channel 00

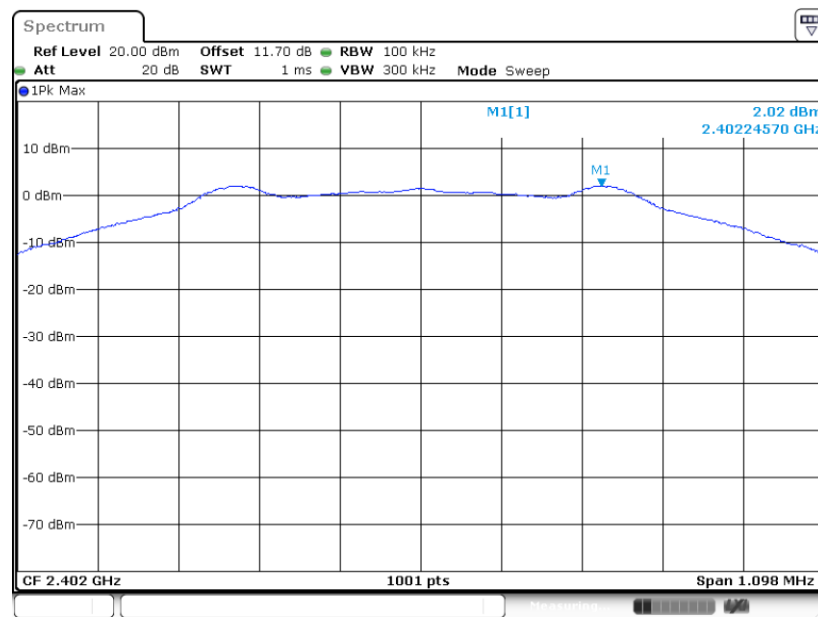

Date: 19.NOV.2020 07:54:49




PSD 100kHz Plot on Channel 19

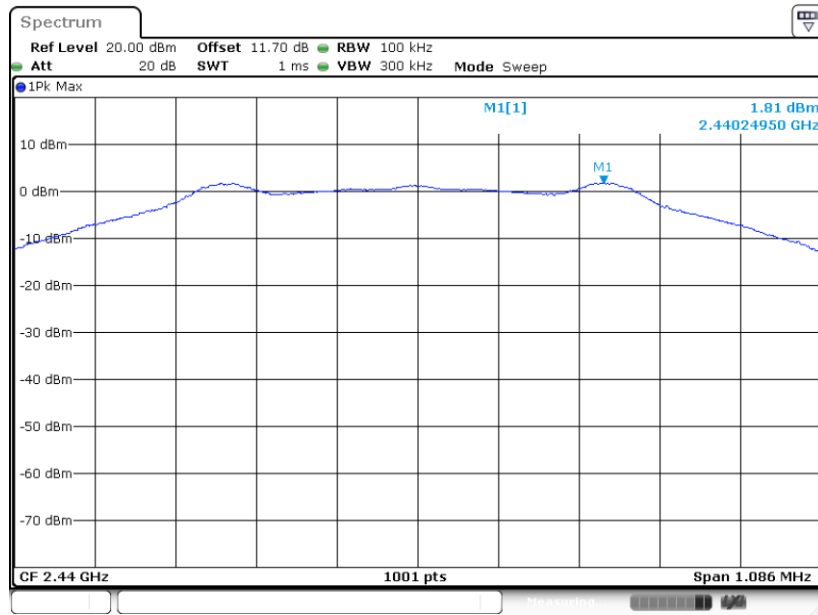

Date: 19.NOV.2020 10:22:21

PSD 100kHz Plot on Channel 39

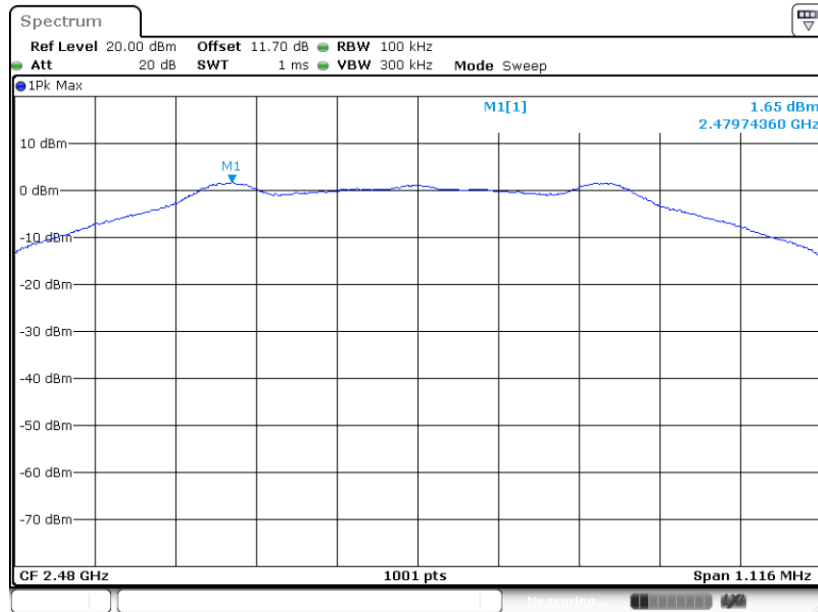


Date: 19.NOV.2020 10:34:11



3.3.7 Test Result of Power Spectral Density Plots (3kHz)


Test Engineer :	Willy Lin and Tommy Lee	Temperature :	22.8~23.9°C
		Relative Humidity :	53.6~54.7%

PSD 3kHz Plot on Channel 00

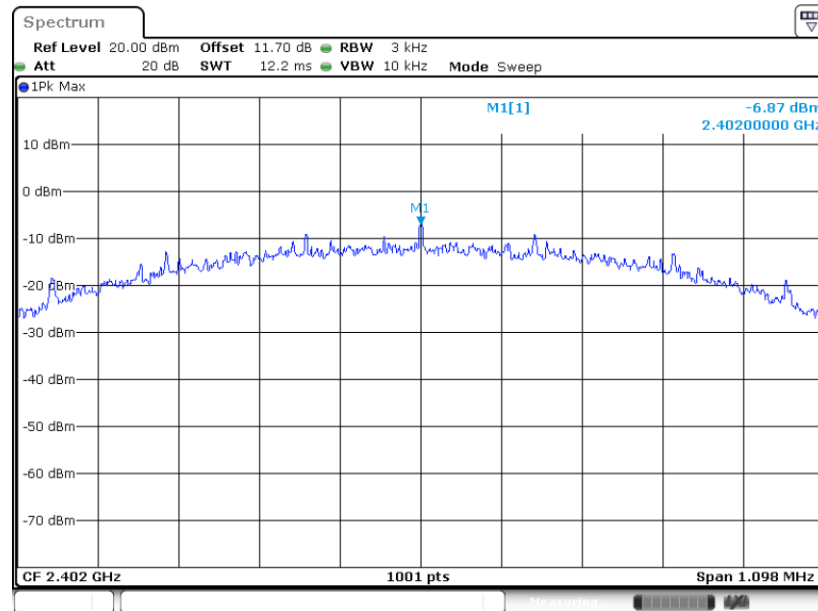

Date: 19.NOV.2020 07:54:26


PSD 3kHz Plot on Channel 19

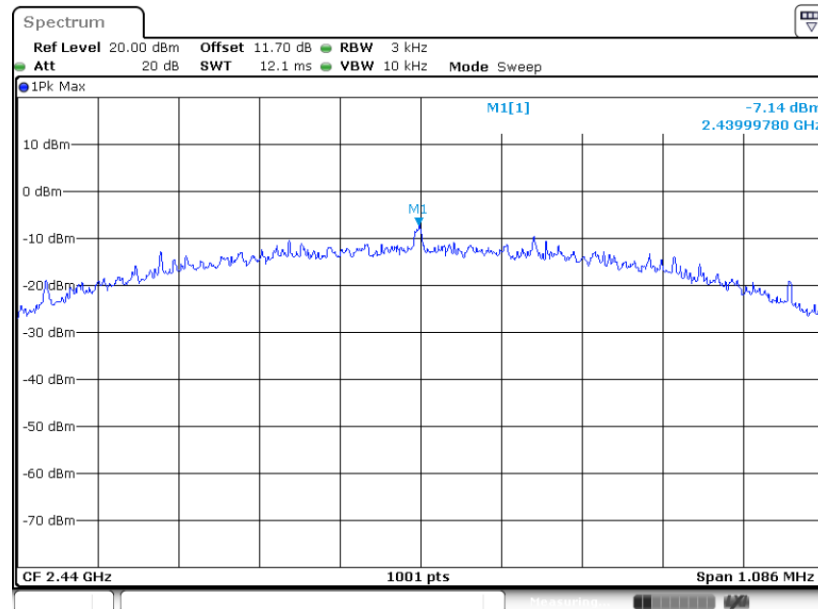

Date: 19.NOV.2020 10:21:43



PSD 3kHz Plot on Channel 39

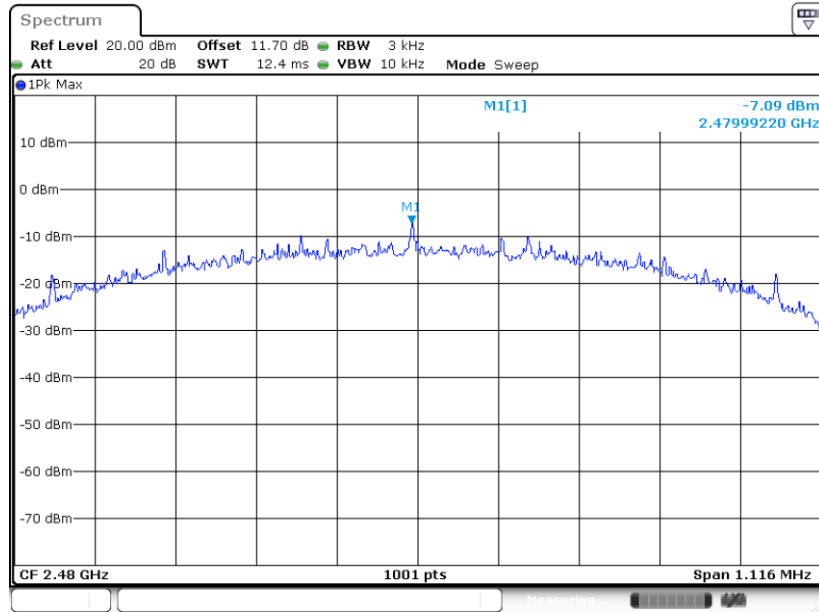

Date: 19.NOV.2020 10:33:29

3.4 Conducted Band Edges and Spurious Emission Measurement

3.4.1 Limit of Conducted Band Edges and Spurious Emission

All harmonics/spurious must be at least 20 dB down from the highest emission level within the authorized band.


3.4.2 Measuring Instruments

See list of measuring equipment of this test report.

3.4.3 Test Procedure

1. The testing follows the ANSI C63.10 Section 11.11.3 Emission level measurement.
2. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.
3. Set to the maximum power setting and enable the EUT transmit continuously.
4. Set RBW = 100 kHz, VBW=300 kHz, Peak Detector. Unwanted Emissions measured in any 100 kHz bandwidth outside of the authorized frequency band shall be attenuated by at least 20 dB relative to the maximum in-band peak PSD level in 100 kHz when maximum peak conducted output power procedure is used. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, the attenuation required under this paragraph shall be 30 dB instead of 20 dB.
5. Measure and record the results in the test report.
6. The RF fundamental frequency should be excluded against the limit line in the operating frequency band.

3.4.4 Test Setup

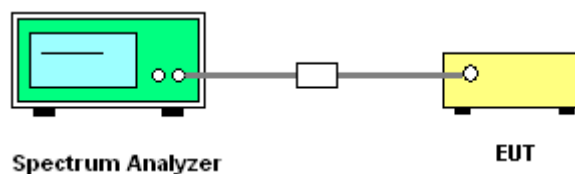




3.4.5 Test Result of Conducted Band Edges Plots


Test Engineer :	Willy Lin and Tommy Lee	Temperature :	22.8~23.9°C
		Relative Humidity :	53.6~54.7%

Low Band Edge Plot on Channel 00

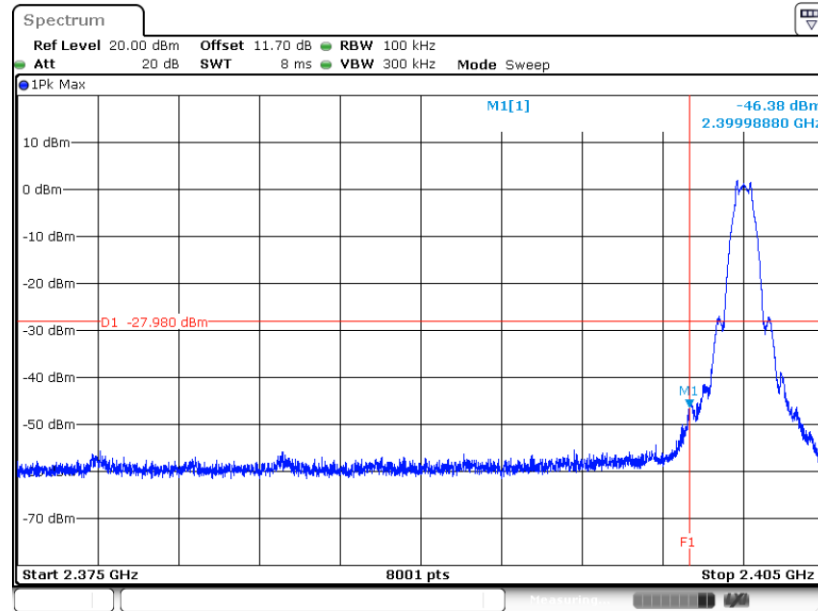

Date: 19.NOV.2020 07:55:24

High Band Edge Plot on Channel 39

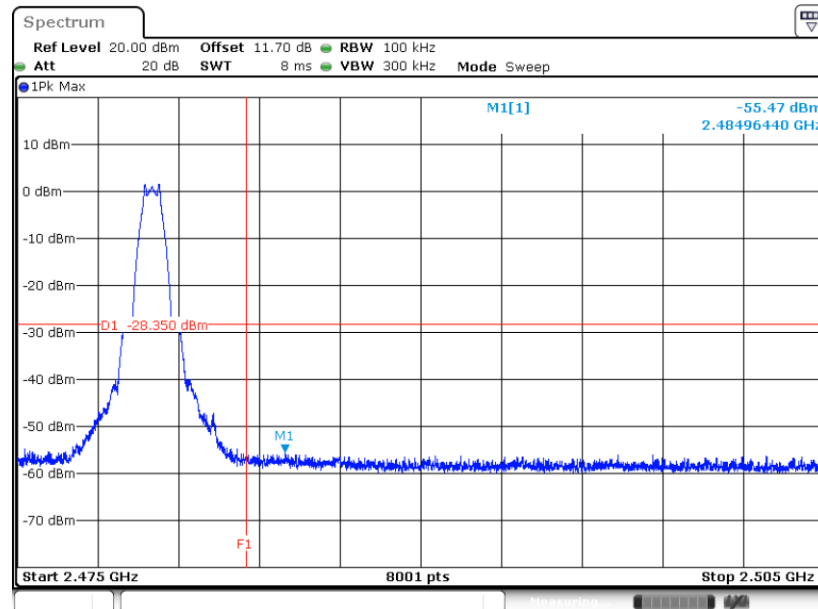


Date: 19.NOV.2020 10:36:55



3.4.6 Test Result of Conducted Spurious Emission Plots


Test Engineer :	Willy Lin and Tommy Lee	Temperature :	22.8~23.9°C
		Relative Humidity :	53.6~54.7%

Conducted Spurious Emission Plot on Bluetooth LE 1Mbps GFSK Channel 00

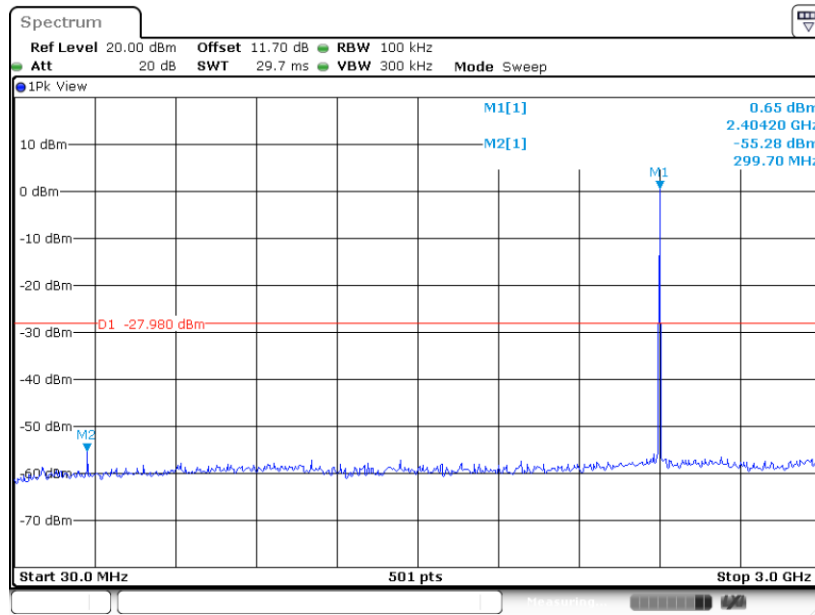

Date: 19.NOV.2020 09:45:29


Conducted Spurious Emission Plot on Bluetooth LE 1Mbps GFSK Channel 00

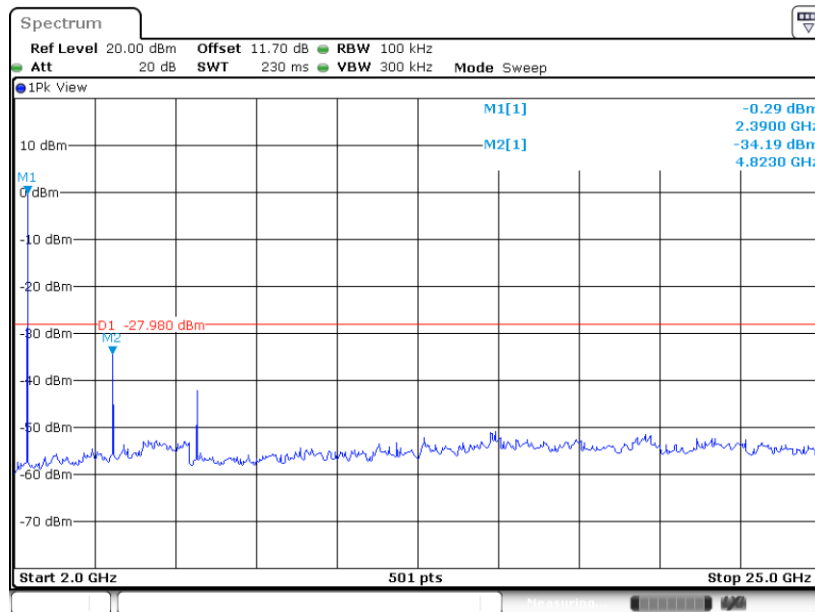

Date: 19.NOV.2020 09:45:49




Conducted Spurious Emission Plot on Bluetooth LE 1Mbps GFSK Channel 19

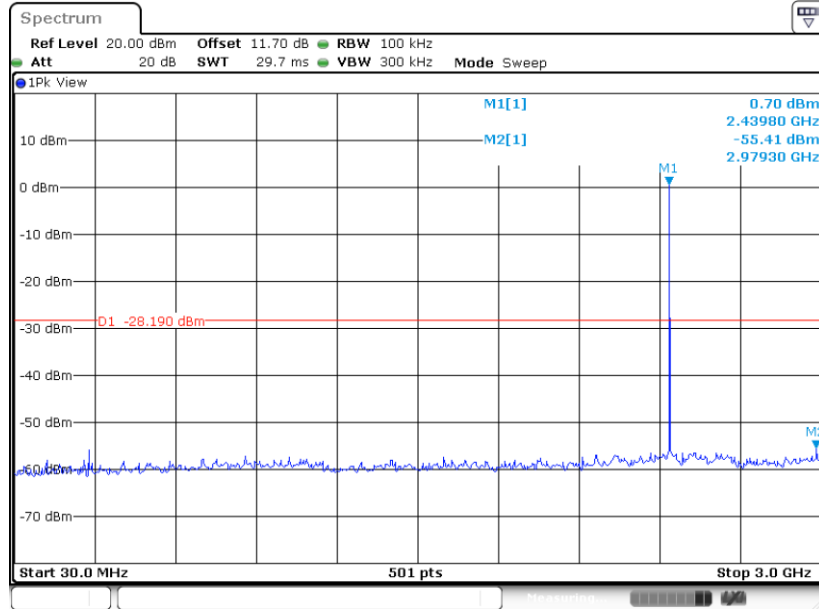

Date: 19.NOV.2020 10:25:24


Conducted Spurious Emission Plot on Bluetooth LE 1Mbps GFSK Channel 19

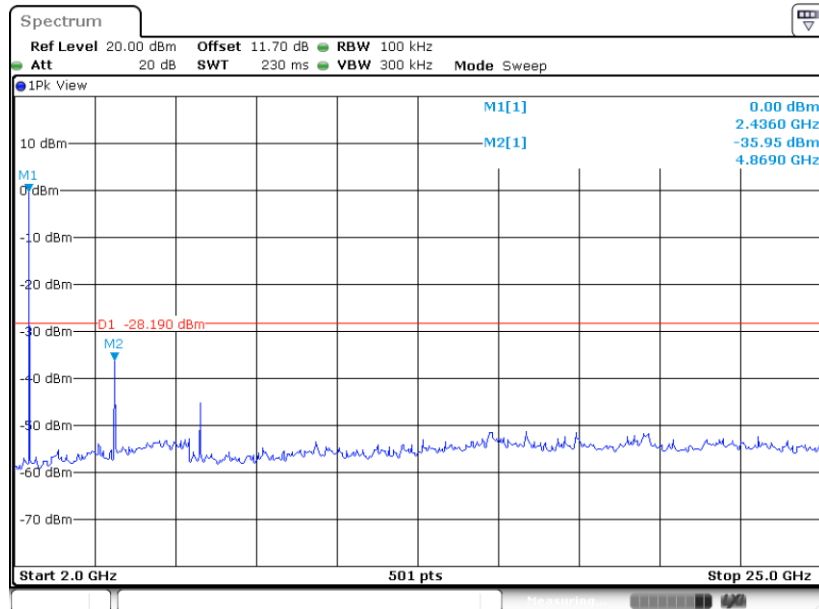

Date: 19.NOV.2020 10:25:41




Conducted Spurious Emission Plot on Bluetooth LE 1Mbps GFSK Channel 39

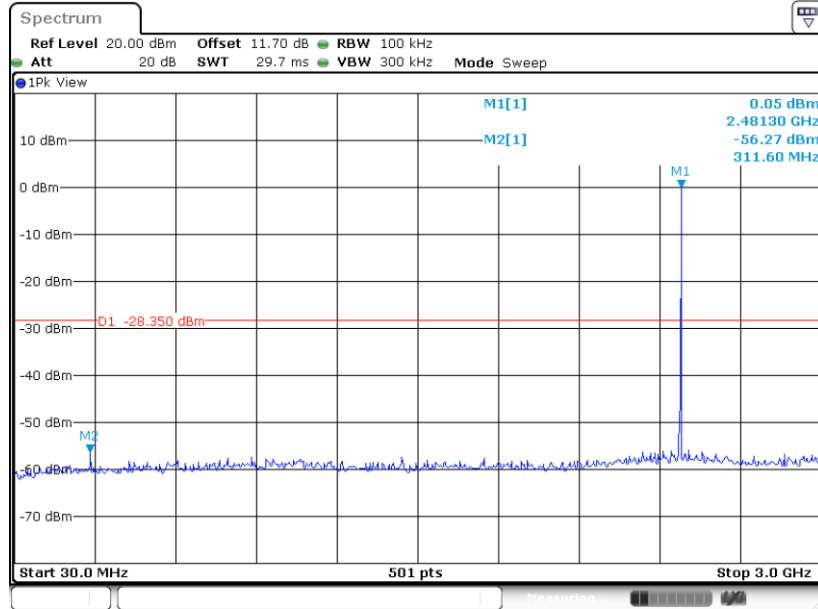

Date: 19.NOV.2020 10:37:32

Conducted Spurious Emission Plot on Bluetooth LE 1Mbps GFSK Channel 39

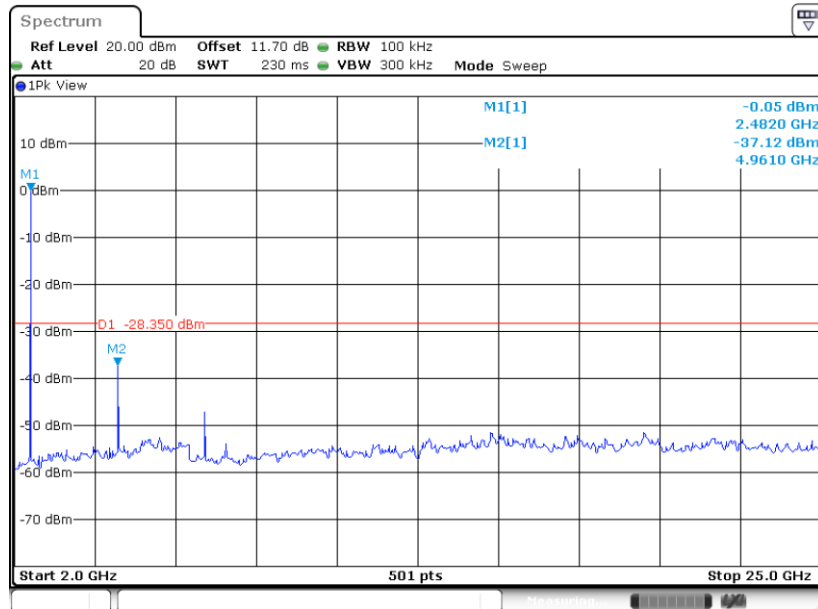

Date: 19.NOV.2020 10:37:55



3.5 Radiated Band Edges and Spurious Emission Measurement

3.5.1 Limit of Radiated Band Edges and Spurious Emission

In any 100 kHz bandwidth outside the intentional radiator frequency band, all harmonics/spurious must be at least 20 dB below the highest emission level within the authorized band. If the output power of this device was measured by spectrum analyzer, the attenuation under this paragraph shall be 30 dB instead of 20 dB. In addition, radiated emissions which fall in the restricted bands must also comply with the limits as below.

Frequency (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009 – 0.490	2400/F(kHz)	300
0.490 – 1.705	24000/F(kHz)	30
1.705 – 30.0	30	30
30 – 88	100	3
88 – 216	150	3
216 - 960	200	3
Above 960	500	3

3.5.2 Measuring Instruments

See list of measuring equipment of this test report.




3.5.3 Test Procedures


1. The testing follows the ANSI C63.10 Section 11.12.1 Radiated emission measurements.
2. The EUT was arranged to its worst case and then tune the antenna tower (from 1 m to 4 m) and turntable (from 0 degree to 360 degrees) to find the maximum reading. A pre-amp and a high pass filter are used for the test in order to get better signal level.
3. The EUT was placed on a turntable with 0.8 meter for frequency below 1GHz and 1.5 meter for frequency above 1GHz respectively above ground.
4. The EUT was set 3 meters from the interference receiving antenna, which was mounted on the top of a variable height antenna tower.
5. Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level
6. For testing below 1GHz, if the emission level of the EUT in peak mode was 3 dB lower than the limit specified, then peak values of EUT will be reported, otherwise, the emissions will be repeated one by one using the CISPR quasi-peak method and reported.
7. For testing above 1GHz, the emission level of the EUT in peak mode was 20dB lower than average limit (that means the emission level in average mode also complies with the limit in average mode), then peak values of EUT will be reported, otherwise, the emissions will be measured in average mode again and reported.
8. Use the following spectrum analyzer settings:
 - (1) Span shall wide enough to fully capture the emission being measured;
 - (2) Set RBW=100 kHz for $f < 1$ GHz; $VBW \geq RBW$; Sweep = auto; Detector function = peak; Trace = max hold;
 - (3) Set RBW = 1 MHz, VBW= 3MHz for $f \geq 1$ GHz for peak measurement.
For average measurement:
 - $VBW = 10$ Hz, when duty cycle is no less than 98 percent.
 - $VBW \geq 1/T$, when duty cycle is less than 98 percent where T is the minimum transmission duration over which the transmitter is on and is transmitting at its maximum power control level for the tested mode of operation.

3.5.4 Test Setup


For radiated test below 30MHz

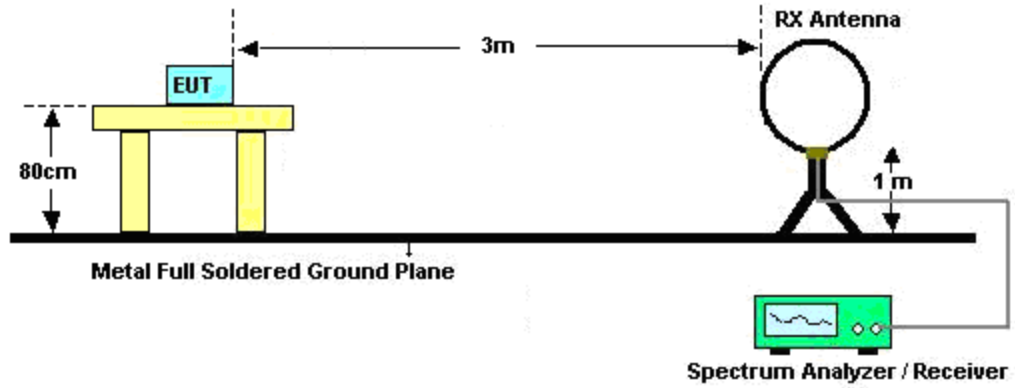

For radiated test from 30MHz to 1GHz

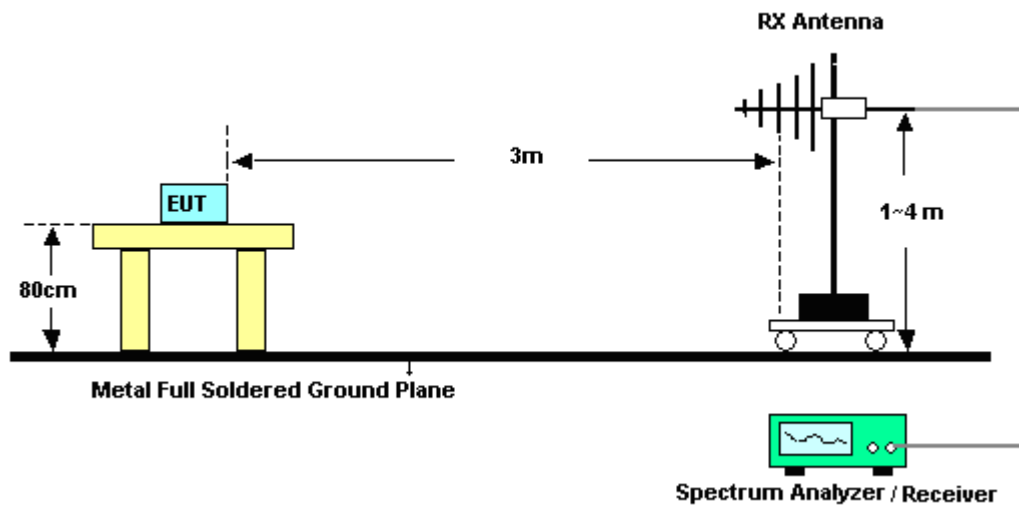

For radiated test above 1GHz

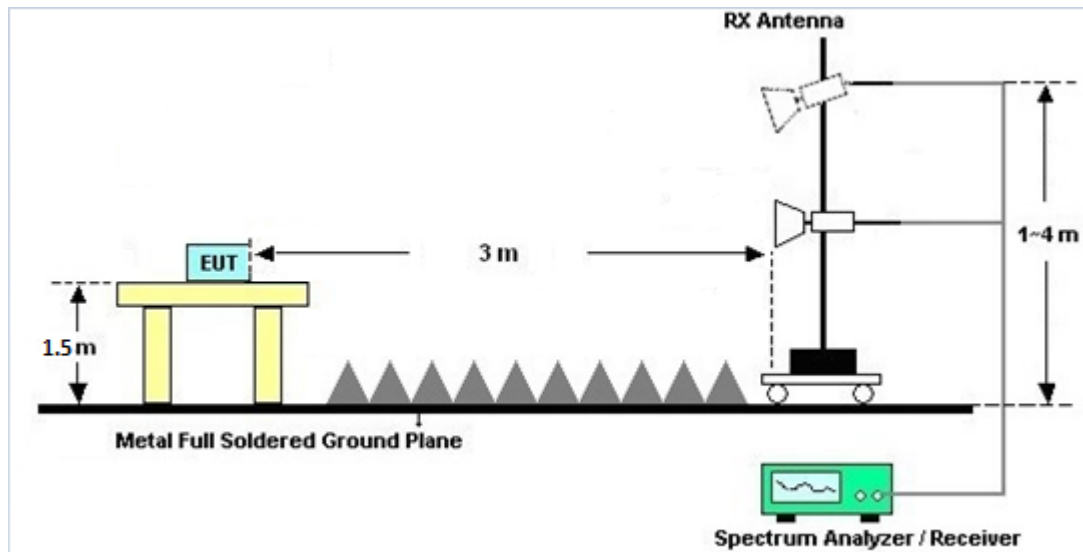

3.5.5 Test Results of Radiated Spurious Emissions (9 kHz ~ 30 MHz)

The low frequency, which started from 9 kHz to 30MHz, was pre-scanned and the result which was 20dB lower than the limit line was not reported.

There is a comparison data of both open-field test site and alternative test site - semi-Anechoic chamber according to 414788 D01 Radiated Test Site v01r01, and the result came out very similar.

3.5.6 Test Result of Radiated Spurious at Band Edges

Please refer to Appendix A and B.

3.5.7 Duty Cycle

Please refer to Appendix C.

3.5.8 Test Result of Radiated Spurious Emission (30MHz ~ 10th Harmonic)

Please refer to Appendix A and B.



3.6 Antenna Requirements

3.6.1 Standard Applicable

If directional gain of transmitting antennas is greater than 6dBi, the power shall be reduced by the same level in dB comparing to gain minus 6dBi. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the rule.

3.6.2 Antenna Anti-Replacement Construction

An embedded-in antenna design is used.

3.6.3 Antenna Gain

The antenna peak gain of EUT is less than 6 dBi. Therefore, it is not necessary to reduce maximum peak output power limit.



4 List of Measuring Equipment

Instrument	Brand Name	Model No.	Serial No.	Characteristics	Calibration Date	Test Date	Due Date	Remark
Hygrometer	Testo	608-H1	34893241	N/A	Mar. 02, 2020	Nov. 06, 2020~ Nov. 27, 2020	Mar. 01, 2021	Conducted (TH05-HY)
Power Sensor	DARE	RPR3006W	16I00054SNO1 0	10MHz~6GHz	Dec. 23, 2019	Nov. 06, 2020~ Nov. 27, 2020	Dec. 22, 2020	Conducted (TH05-HY)
Signal Analyzer	Rohde & Schwarz	FSV40	101566	10Hz ~ 40GHz	Jul. 22, 2020	Nov. 06, 2020~ Nov. 27, 2020	Jul. 21, 2021	Conducted (TH05-HY)
Switch Box & RF Cable	EM Electronics	EMSW18SE	SW200302	N/A	Mar. 17, 2020	Nov. 06, 2020~ Nov. 27, 2020	Mar. 16, 2021	Conducted (TH05-HY)
Horn Antenna	SCHWARZB ECK	BBHA 9120 D	9120D-1326	1GHz ~ 18GHz	Nov. 03, 2020	Nov. 30, 2020~ Dec. 19, 2020	Nov. 02, 2021	Radiation (03CH11-HY)
SHF-EHF Horn Antenna	SCHWARZB ECK	BBHA 9170	BBHA9170576	18GHz~40GHz	May 22, 2020	Nov. 30, 2020~ Dec. 01, 2020	May 21, 2021	Radiation (03CH11-HY)
Bilog Antenna	TESEQ	CBL 6111D & N-6-06	35414 & AT-N0602	30MHz~1GHz	Oct. 11, 2020	Nov. 30, 2020~ Dec. 01, 2020	Oct. 10, 2021	Radiation (03CH11-HY)
Preamplifier	Keysight	83017A	MY53270080	1GHz~26.5GHz	Nov. 12, 2020	Nov. 30, 2020~ Dec. 19, 2020	Nov. 11, 2021	Radiation (03CH11-HY)
Preamplifier	Jet-Power	JPA0118-55-3 03K	171000180005 4002	1GHz~18GHz	Feb. 07, 2020	Nov. 30, 2020~ Dec. 19, 2020	Feb. 06, 2021	Radiation (03CH11-HY)
Preamplifier	EMEC	EM18G40G	060715	18GHz~40GHz	Dec. 13, 2019	Nov. 30, 2020~ Dec. 01, 2020	Dec. 12, 2020	Radiation (03CH11-HY)
Amplifier	SONOMA	310N	187312	9kHz~1GHz	Dec. 03, 2019	Nov. 30, 2020~ Dec. 01, 2020	Dec. 02, 2020	Radiation (03CH11-HY)
Spectrum Analyzer	Keysight	N9010A	MY54200486	10Hz~44GHz	Oct. 23, 2020	Nov. 30, 2020~ Dec. 19, 2020	Oct. 22, 2021	Radiation (03CH11-HY)
EMI Test Receiver	Keysight	N9038A(MXE)	MY55420170	20MHz~8.4GHz	May 21, 2020	Nov. 30, 2020~ Dec. 19, 2020	May 20, 2021	Radiation (03CH11-HY)
Controller	EMEC	EM 1000	N/A	Control Turn table & Ant Mast	N/A	Nov. 30, 2020~ Dec. 19, 2020	N/A	Radiation (03CH11-HY)
Antenna Mast	EMEC	AM-BS-4500- B	N/A	1~4m	N/A	Nov. 30, 2020~ Dec. 19, 2020	N/A	Radiation (03CH11-HY)
Turn Table	EMEC	TT 2000	N/A	0~360 Degree	N/A	Nov. 30, 2020~ Dec. 19, 2020	N/A	Radiation (03CH11-HY)
Software	Audix	E3 6.2009-8-24	RK-001053	N/A	N/A	Nov. 30, 2020~ Dec.19, 2020	N/A	Radiation (03CH11-HY)
RF Cable	HUBER + SUHNER	SUCOFLEX 104	MY9837/4PE	9kHz-30MHz	Mar. 12, 2020	Nov. 30, 2020~ Dec. 19, 2020	Mar. 11, 2021	Radiation (03CH11-HY)
RF Cable	HUBER + SUHNER	SUCOFLEX 102	MY2859/2	30MHz-40GHz	Mar. 12, 2020	Nov. 30, 2020~ Dec. 19, 2020	Mar. 11, 2021	Radiation (03CH11-HY)
RF Cable	HUBER + SUHNER	SUCOFLEX 104	MY9837/4PE	30M-18G	Mar. 12, 2020	Nov. 30, 2020~ Dec.19, 2020	Mar. 11, 2021	Radiation (03CH11-HY)
RF Cable	HUBER + SUHNER	SUCOFLEX 102	MY4274/2	30MHz-40GHz	Mar. 12, 2020	Nov. 30, 2020~ Dec. 19, 2020	Mar. 11, 2021	Radiation (03CH11-HY)
Filter	Wainwright	WLK4-1000-1 530-8000-40S S	SN11	1.53G Low Pass	Sep. 14, 2020	Nov. 30, 2020~ Dec. 01, 2020	Sep. 13, 2021	Radiation (03CH11-HY)
Filter	Wainwright	WHKX12-270 0-3000-18000 -60SS	SN3	3GHz High Pass Filter	Sep. 14, 2020	Nov. 30, 2020~ Dec. 19, 2020	Sep. 13, 2021	Radiation (03CH11-HY)
Hygrometer	TECPEL	DTN-303B	TP140325	N/A	Nov. 18, 2020	Nov. 30, 2020~ Dec. 19, 2020	Nov. 17, 2021	Radiation (03CH11-HY)
Hygrometer	TECPEL	DTM-303B	TP200880	QA-3-031	Oct. 22, 2020	Nov. 30, 2020~ Dec. 19, 2020	Oct. 21, 2021	Radiation (03CH11-HY)



5 Uncertainty of Evaluation

Uncertainty of Radiated Emission Measurement (30 MHz ~ 1000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	4.4
---	-----

Uncertainty of Radiated Emission Measurement (1000 MHz ~ 18000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	5.2
---	-----

Uncertainty of Radiated Emission Measurement (18000 MHz ~ 40000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	5.1
---	-----



Appendix A. Radiated Spurious Emission

Test Engineer :	Fu Chen	Temperature :	18.9~24.7°C
		Relative Humidity :	56.8~69.9%

2.4GHz 2400~2483.5MHz

BLE (Band Edge @ 3m)

BLE	Note	Frequency	Level	Over	Limit	Read	Antenna	Path	Preamp	Ant	Table	Peak	Pol.	
		(MHz)	(dBμV/m)	(dB)	Limit Line	(dBμV)	(dB/m)	(dB)	(dB)	(cm)	(deg)	(P/A)	(H/V)	
BLE CH 00 2402MHz		2313.15	52.86	-21.14	74	42.14	27.67	16.54	33.49	364	360	P	H	
		2382.345	41.35	-12.65	54	30.66	27.54	16.61	33.46	364	360	A	H	
	*	2402	83.4	-	-	72.72	27.5	16.63	33.45	364	360	P	H	
	*	2402	82.71	-	-	72.03	27.5	16.63	33.45	364	360	A	H	
													H	
														H
			2353.47	52.42	-21.58	74	41.72	27.59	16.58	33.47	128	0	P	V
			2388.33	41.44	-12.56	54	30.76	27.52	16.62	33.46	128	0	A	V
	*		2402	97.33	-	-	86.65	27.5	16.63	33.45	128	0	P	V
	*		2402	96.75	-	-	86.07	27.5	16.63	33.45	128	0	A	V
													V	
													V	
BLE CH 19 2440MHz		2332.56	53	-21	74	42.29	27.63	16.56	33.48	352	3	P	H	
		2348.08	41.35	-12.65	54	30.65	27.6	16.58	33.48	352	3	A	H	
	*	2440	84.84	-	-	74.1	27.5	16.67	33.43	352	3	P	H	
	*	2440	84.15	-	-	73.41	27.5	16.67	33.43	352	3	A	H	
		2498.8	52.4	-21.6	74	41.66	27.4	16.74	33.4	352	3	P	H	
		2483.6	41.44	-12.56	54	30.7	27.43	16.72	33.41	352	3	A	H	
		2362.64	52.61	-21.39	74	41.92	27.57	16.59	33.47	104	115	P	V	
		2381.84	41.23	-12.77	54	30.54	27.54	16.61	33.46	104	115	A	V	
	*	2440	96.38	-	-	85.64	27.5	16.67	33.43	104	115	P	V	
	*	2440	95.8	-	-	85.06	27.5	16.67	33.43	104	115	A	V	
		2486.56	53.22	-20.78	74	42.47	27.43	16.73	33.41	104	115	P	V	
	2485.76	41.32	-12.68	54	30.58	27.43	16.72	33.41	104	115	A	V		



BLE CH 39 2480MHz	*	2480	85.7	-	-	74.95	27.44	16.72	33.41	381	0	P	H
	*	2480	85.05	-	-	74.3	27.44	16.72	33.41	381	0	A	H
		2500	52.76	-21.24	74	42.02	27.4	16.74	33.4	381	0	P	H
		2485.6	41.41	-12.59	54	30.67	27.43	16.72	33.41	381	0	A	H
													H
													H
	*	2480	98.22	-	-	87.47	27.44	16.72	33.41	103	114	P	V
	*	2480	97.62	-	-	86.87	27.44	16.72	33.41	103	114	A	V
		2484.4	53.12	-20.88	74	42.38	27.43	16.72	33.41	103	114	P	V
		2483.52	41.96	-12.04	54	31.22	27.43	16.72	33.41	103	114	A	V
													V
													V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



2.4GHz 2400~2483.5MHz
BLE (Harmonic @ 3m)

BLE	Note	Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Path Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)	
BLE CH 00 2402MHz		4804	47.43	-26.57	74	65.92	31	10.97	60.46	100	0	P	H	
													H	
													H	
													H	
		4804	48.38	-25.62	74	66.87	31	10.97	60.46	100	0	P	V	
														V
														V
BLE CH 19 2440MHz		4880	47.87	-26.13	74	65.72	31.54	11.01	60.4	100	0	P	H	
		7320	56.62	-17.38	74	65.95	36.4	13.38	59.11	100	120	P	H	
		7320	51.12	-2.88	54	60.45	36.4	13.38	59.11	100	120	A	H	
													H	
		4875	48.5	-25.5	74	66.44	31.45	11.01	60.4	100	0	P	V	
		7320	49.16	-24.84	74	58.49	36.4	13.38	59.11	100	0	P	V	
														V
BLE CH 39 2480MHz		4960	45.11	-28.89	74	63.33	31.06	11.05	60.33	100	0	P	H	
		7440	55.63	-18.37	74	64.85	36.56	13.26	59.04	106	119	P	H	
		7440	50.4	-3.6	54	59.62	36.56	13.26	59.04	106	119	A	H	
													H	
		4960	47.71	-26.29	74	65.93	31.06	11.05	60.33	100	0	P	V	
		7440	48.54	-25.46	74	57.76	36.56	13.26	59.04	100	0	P	V	
		4960	47.71	-26.29	74	65.93	31.06	11.05	60.33	100	0	P	V	
													V	
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.													



Emission below 1GHz

2.4GHz BLE (LF)

BLE	Note	Frequency	Level	Over	Limit	Read	Antenna	Path	Preamp	Ant	Table	Peak	Pol.	
		(MHz)	(dBμV/m)	(dB)	(dBμV/m)	(dBμV)	(dB/m)	(dB)	(dB)	(cm)	(deg)	(P/A)	(H/V)	
2.4GHz BLE LF		30.97	20.56	-19.44	40	28.41	23.79	0.78	32.42	-	-	P	H	
		97.9	19.51	-23.99	43.5	34.78	15.67	1.45	32.39	-	-	P	H	
		161.92	17.7	-25.8	43.5	32.07	16.24	1.9	32.51	-	-	P	H	
		861.29	29.96	-16.04	46	28.36	29.29	4.21	31.9	-	-	P	H	
		921.43	30.14	-15.86	46	27.83	29.38	4.38	31.45	-	-	P	H	
		952.47	31.16	-14.84	46	26.96	30.79	4.45	31.04	100	0	P	H	
														H
														H
														H
														H
														H
														H
			37.76	22.34	-17.66	40	33.49	20.42	0.89	32.46	-	-	P	V
			59.1	23.78	-16.22	40	43.51	11.65	1.13	32.51	-	-	P	V
			62.98	26.64	-13.36	40	46.19	11.78	1.17	32.5	100	0	P	V
			883.6	29.83	-16.17	46	28.18	29.18	4.27	31.8	-	-	P	V
			947.62	30.47	-15.53	46	26.57	30.56	4.44	31.1	-	-	P	V
			959.26	30.14	-15.86	46	25.52	31.11	4.46	30.95	-	-	P	V
														V
														V
													V	
													V	
													V	
													V	
Remark	1. No other spurious found. 2. All results are PASS against limit line.													



Note symbol

*	Fundamental Frequency which can be ignored. However, the level of any unwanted emissions shall not exceed the level of the fundamental frequency.
!	Test result is over limit line.
P/A	Peak or Average
H/V	Horizontal or Vertical



A calculation example for radiated spurious emission is shown as below:

BLE	Note	Frequency	Level	Over	Limit	Read	Antenna	Path	Preamp	Ant	Table	Peak	Pol.
		(MHz)	(dBμV/m)	(dB)	(dBμV/m)	(dBμV)	(dB/m)	(dB)	(dB)	(cm)	(deg)	(P/A)	(H/V)
BLE CH 00 2402MHz		2390	55.45	-18.55	74	54.51	32.22	4.58	35.86	103	308	P	H
		2390	43.54	-10.46	54	42.6	32.22	4.58	35.86	103	308	A	H

1. Path Loss(dB) = Cable loss(dB) + Filter loss(dB) + Attenuator loss(dB)
2. Level(dBμV/m) =
Antenna Factor(dB/m) + Path Loss(dB) + Read Level(dBμV) - Preamp Factor(dB)
3. Over Limit(dB) = Level(dBμV/m) – Limit Line(dBμV/m)

For Peak Limit @ 2390MHz:

1. Level(dBμV/m)
= Antenna Factor(dB/m) + Path Loss(dB) + Read Level(dBμV) - Preamp Factor(dB)
= 32.22(dB/m) + 4.58(dB) + 54.51(dBμV) – 35.86 (dB)
= 55.45 (dBμV/m)
2. Over Limit(dB)
= Level(dBμV/m) – Limit Line(dBμV/m)
= 55.45(dBμV/m) – 74(dBμV/m)
= -18.55(dB)

For Average Limit @ 2390MHz:

1. Level(dBμV/m)
= Antenna Factor(dB/m) + Path Loss(dB) + Read Level(dBμV) - Preamp Factor(dB)
= 32.22(dB/m) + 4.58(dB) + 42.6(dBμV) – 35.86 (dB)
= 43.54 (dBμV/m)
2. Over Limit(dB)
= Level(dBμV/m) – Limit Line(dBμV/m)
= 43.54(dBμV/m) – 54(dBμV/m)
= -10.46(dB)

Both peak and average measured complies with the limit line, so test result is “PASS”.



Appendix B. Radiated Spurious Emission Plots

Test Engineer :	Fu Chen	Temperature :	18.9~24.7°C
		Relative Humidity :	56.8~69.9%

Note symbol

-L	Low channel location
-R	High channel location



2.4GHz 2400~2483.5MHz





BLE (Band Edge @ 3m)

BLE	2.4GHz 2400~2483.5MHz Band Edge @ 3m	
	BLE CH00 2402MHz	
	Horizontal	Fundamental
Peak	<p>Site : 03CH11-HY Condition : PEAK_BE_74 3m HORN 91200-HF_1326 HORIZONTAL : RBW:1000.000KHz VBW:3000.000KHz SWT:Auto</p>	<p>Site : 03CH11-HY Condition : PEAK_74 3m HORN 91200-HF_1326 HORIZONTAL : RBW:1000.000KHz VBW:3000.000KHz SWT:Auto</p>
Avg.	<p>Site : 03CH11-HY Condition : AVG_BE_54 3m HORN 91200-HF_1326 HORIZONTAL : RBW:1000.000KHz VBW:0.010KHz SWT:Auto</p>	<p>Site : 03CH11-HY Condition : AVG_54 3m HORN 91200-HF_1326 HORIZONTAL : RBW:1000.000KHz VBW:0.010KHz SWT:Auto</p>





BLE	2.4GHz 2400~2483.5MHz Band Edge @ 3m	
	BLE CH00 2402MHz	
	Vertical	Fundamental
Peak	<p>Site : 03CH11-HY Condition : PEAK_BE_74 3m HORN 91200-HF_1326 VERTICAL : RBW:1000.000KHz VBW:3000.000KHz SWT:Auto</p>	<p>Site : 03CH11-HY Condition : PEAK_74 3m HORN 91200-HF_1326 VERTICAL : RBW:1000.000KHz VBW:3000.000KHz SWT:Auto</p>
Avg	<p>Site : 03CH11-HY Condition : AV6_BE_54 3m HORN 91200-HF_1326 VERTICAL : RBW:1000.000KHz VBW:0.010KHz SWT:Auto</p>	<p>Site : 03CH11-HY Condition : AV6_54 3m HORN 91200-HF_1326 VERTICAL : RBW:1000.000KHz VBW:0.010KHz SWT:Auto</p>

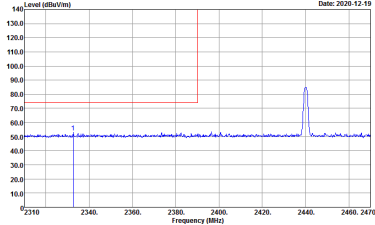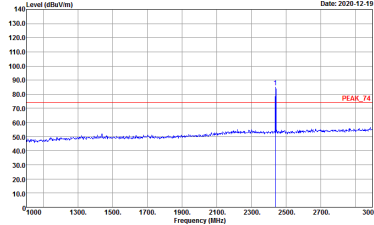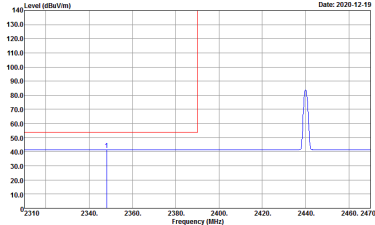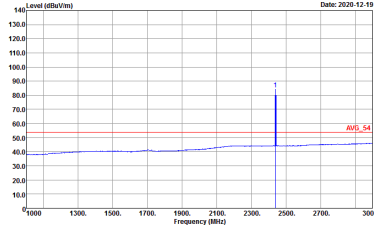

BLE	2.4GHz 2400~2483.5MHz Band Edge @ 3m	
BLE CH19 2440MHz - L		
	Horizontal	Fundamental
Peak	 <p>Date: 2020-12-19</p> <p>Site : 03CH11-HY Condition : PEAK_BE_T4 3m HORN 91200-HF_1326 HORIZONTAL : RBW:1000.000KHz VBW:3000.000KHz SWT:Auto</p>	 <p>Date: 2020-12-19</p> <p>Site : 03CH11-HY Condition : PEAK_T4 3m HORN 91200-HF_1326 HORIZONTAL : RBW:1000.000KHz VBW:3000.000KHz SWT:Auto</p>
Avg.	 <p>Date: 2020-12-19</p> <p>Site : 03CH11-HY Condition : AVG_BE_54 3m HORN 91200-HF_1326 HORIZONTAL : RBW:1000.000KHz VBW:0.010KHz SWT:Auto</p>	 <p>Date: 2020-12-19</p> <p>Site : 03CH11-HY Condition : AVG_54 3m HORN 91200-HF_1326 HORIZONTAL : RBW:1000.000KHz VBW:0.010KHz SWT:Auto</p>

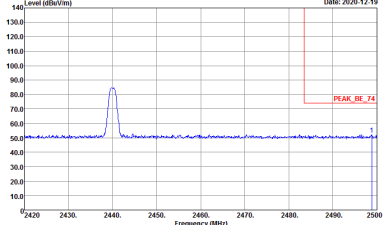
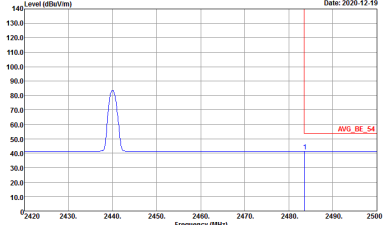


BLE	2.4GHz 2400~2483.5MHz Band Edge @ 3m	
BLE CH19 2440MHz - R		
	Horizontal	Fundamental
Peak	 <p>Site : 03CH11-HY Condition : PEAK_BE_74 3m HORN 91200-HF_1326 HORIZONTAL : RBW:1000.000KHz VBW:3000.000KHz SWT:Auto</p>	Left blank
Avg.	 <p>Site : 03CH11-HY Condition : AVG_BE_54 3m HORN 91200-HF_1326 HORIZONTAL : RBW:1000.000KHz VBW:0.010KHz SWT:Auto</p>	Left blank







BLE	2.4GHz 2400~2483.5MHz Band Edge @ 3m	
	BLE CH19 2440MHz - L	
	Vertical	Fundamental
Peak	<p>Date: 2020-12-19</p> <p>Site : 03CH11-HY Condition : PEAK_BE_74 3m HORN 91200-HF_1326 VERTICAL : RBW:1000.000KHz VBW:3000.000KHz SWT:Auto</p>	<p>Date: 2020-12-19</p> <p>Site : 03CH11-HY Condition : PEAK_74 3m HORN 91200-HF_1326 VERTICAL : RBW:1000.000KHz VBW:3000.000KHz SWT:Auto</p>
Avg.	<p>Date: 2020-12-19</p> <p>Site : 03CH11-HY Condition : AVG_BE_54 3m HORN 91200-HF_1326 VERTICAL : RBW:1000.000KHz VBW:0.010KHz SWT:Auto</p>	<p>Date: 2020-12-19</p> <p>Site : 03CH11-HY Condition : AVG_54 3m HORN 91200-HF_1326 VERTICAL : RBW:1000.000KHz VBW:0.010KHz SWT:Auto</p>



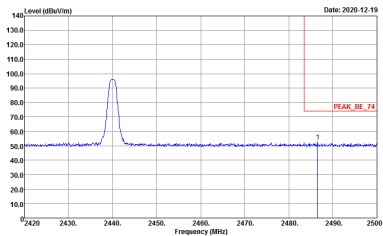
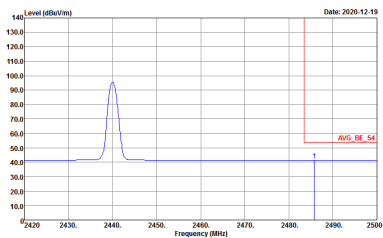


BLE	2.4GHz 2400~2483.5MHz Band Edge @ 3m	
	BLE CH19 2440MHz - R	
	Vertical	Fundamental
Peak	 <p>Site : 03CH11-HY Condition : PEAK_BE_74 3m HORN 91200-HF_1326 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto</p>	Left blank
Avg.	 <p>Site : 03CH11-HY Condition : AVG_BE_54 3m HORN 91200-HF_1326 VERTICAL : RBW:1000.000kHz VBW:0.010kHz SWT:Auto</p>	Left blank

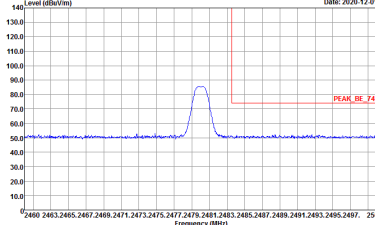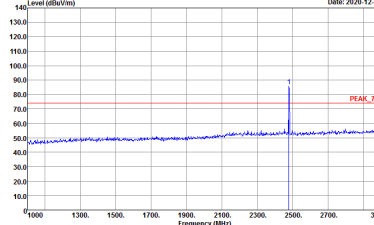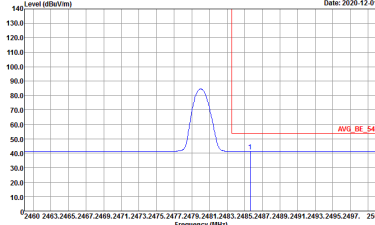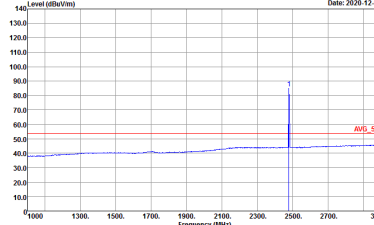

BLE	2.4GHz 2400~2483.5MHz Band Edge @ 3m	
	BLE CH39 2480MHz	
	Horizontal	Fundamental
Peak	 <p>Level (dBuV/m) vs Frequency (MHz) plot showing a peak at 2480 MHz. The peak level is approximately 85 dBuV/m. The plot includes a red horizontal line labeled 'PEAK_BE_74' at the peak level.</p> <p>Site : 03CH11-HY Condition : PEAK_BE_74 3m HORN 91200-HF_1326 HORIZONTAL : RBW:1000.000KHz VBW:3000.000KHz SWT:Auto</p>	 <p>Level (dBuV/m) vs Frequency (MHz) plot showing a sharp peak at 2480 MHz. The peak level is approximately 85 dBuV/m. The plot includes a red horizontal line labeled 'PEAK_74' at the peak level.</p> <p>Site : 03CH11-HY Condition : PEAK_74 3m HORN 91200-HF_1326 HORIZONTAL : RBW:1000.000KHz VBW:3000.000KHz SWT:Auto</p>
Avg.	 <p>Level (dBuV/m) vs Frequency (MHz) plot showing the average level across the band. A red horizontal line labeled 'AVG_BE_54' is drawn at approximately 54 dBuV/m.</p> <p>Site : 03CH11-HY Condition : AVG_BE_54 3m HORN 91200-HF_1326 HORIZONTAL : RBW:1000.000KHz VBW:0.010KHz SWT:Auto</p>	 <p>Level (dBuV/m) vs Frequency (MHz) plot showing the average level across the band. A red horizontal line labeled 'AVG_54' is drawn at approximately 54 dBuV/m.</p> <p>Site : 03CH11-HY Condition : AVG_54 3m HORN 91200-HF_1326 HORIZONTAL : RBW:1000.000KHz VBW:0.010KHz SWT:Auto</p>

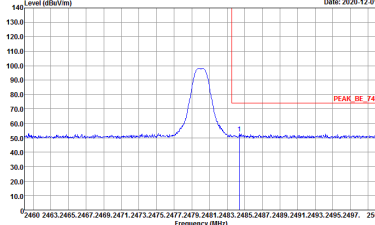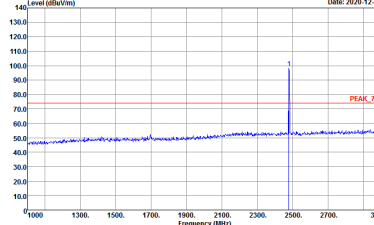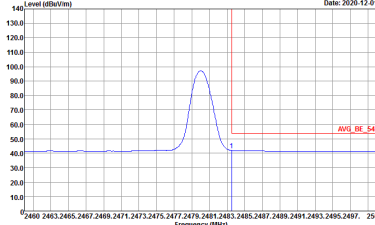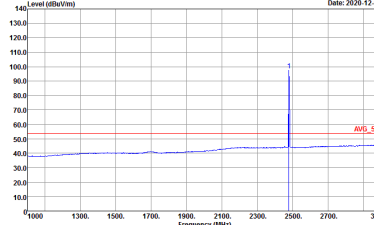

BLE	2.4GHz 2400~2483.5MHz Band Edge @ 3m	
BLE CH39 2480MHz		
Vertical		Fundamental
Peak	 <p>Level (dBuV/m) vs Frequency (MHz) plot showing a peak at 2480 MHz. The peak level is approximately 100 dBuV/m. A red horizontal line indicates the peak level at 100 dBuV/m, labeled 'PEAK_BE_74'. The x-axis ranges from 2400 to 2500 MHz, and the y-axis ranges from 10.0 to 140.0 dBuV/m.</p> <p>Site : 03CH11-HY Condition : PEAK_BE_74 3m HORN 91200-HF_1326 VERTICAL : RBW:1000.000KHz VBW:3000.000KHz SWT:Auto</p>	 <p>Level (dBuV/m) vs Frequency (MHz) plot showing a sharp peak at 2480 MHz. The peak level is approximately 100 dBuV/m. A red horizontal line indicates the peak level at 100 dBuV/m, labeled 'PEAK_74'. The x-axis ranges from 1000 to 3000 MHz, and the y-axis ranges from 10.0 to 140.0 dBuV/m.</p> <p>Site : 03CH11-HY Condition : PEAK_74 3m HORN 91200-HF_1326 VERTICAL : RBW:1000.000KHz VBW:3000.000KHz SWT:Auto</p>
Avg.	 <p>Level (dBuV/m) vs Frequency (MHz) plot showing the average level of the signal. The average level is approximately 50 dBuV/m. A red horizontal line indicates the average level at 50 dBuV/m, labeled 'AVG_BE_54'. The x-axis ranges from 2400 to 2500 MHz, and the y-axis ranges from 10.0 to 140.0 dBuV/m.</p> <p>Site : 03CH11-HY Condition : AVG_BE_54 3m HORN 91200-HF_1326 VERTICAL : RBW:1000.000KHz VBW:0.010KHz SWT:Auto</p>	 <p>Level (dBuV/m) vs Frequency (MHz) plot showing the average level of the signal. The average level is approximately 50 dBuV/m. A red horizontal line indicates the average level at 50 dBuV/m, labeled 'AVG_54'. The x-axis ranges from 1000 to 3000 MHz, and the y-axis ranges from 10.0 to 140.0 dBuV/m.</p> <p>Site : 03CH11-HY Condition : AVG_54 3m HORN 91200-HF_1326 VERTICAL : RBW:1000.000KHz VBW:0.010KHz SWT:Auto</p>



2.4GHz 2400~2483.5MHz

BLE (Harmonic @ 3m)

BLE	2.4GHz 2400~2483.5MHz Harmonic @ 3m	
	BLE CH00 2402MHz	
	Horizontal	Vertical
Peak Avg.		



BLE	2.4GHz 2400~2483.5MHz Harmonic @ 3m	
	BLE CH19 2440MHz	
	Horizontal	Vertical
Peak Avg.	<p>Site : 03CH11-HY Condition : PEAK_74 3m HORN 91200-HF_1326 HORIZONTAL</p>	<p>Site : 03CH11-HY Condition : PEAK_74 3m HORN 91200-HF_1326 VERTICAL</p>





BLE	2.4GHz 2400~2483.5MHz Harmonic @ 3m	
	BLE CH39 2480MHz	
	Horizontal	Vertical
Peak	<p>Site : 03CH11-HY Condition : PEAK_74 3m HORN 91200-HF_1326 HORIZONTAL</p>	<p>Site : 03CH11-HY Condition : PEAK_74 3m HORN 91200-HF_1326 VERTICAL</p>



Emission below 1GHz

2.4GHz BLE (LF)

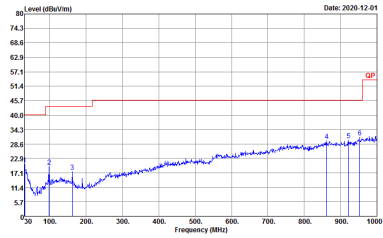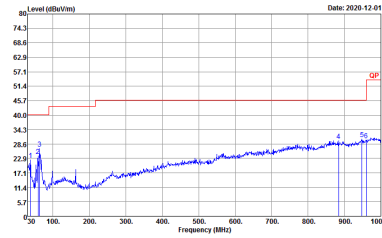BLE	2.4GHz 2400~2483.5MHz	
	BLE LF	
	Horizontal	Vertical
<p>QP / Peak</p>	 <p>Site : 03CH11-HY Condition : QP 3m BE-LO6 6111D-LF_ETC HORIZONTAL</p>	 <p>Site : 03CH11-HY Condition : QP 3m BE-LO6 6111D-LF_ETC VERTICAL</p>



Appendix C. Duty Cycle Plots

Band	Duty Cycle(%)	T(us)	1/T(kHz)	VBW Setting	Duty Factor(dB)
Bluetooth -LE	100	-	-	10Hz	0.00

