



# FCC RADIO TEST REPORT

**FCC ID** : UZ7RTL10B1  
**Equipment** : Tablet  
**Brand Name** : Zebra  
**Model Name** : RTL10B1  
**Applicant** : Zebra Technologies Corporation  
1 Zebra Plaza, Holtsville, NY 11742  
**Manufacturer** : Zebra Technologies Corporation  
1 Zebra Plaza, Holtsville, NY 11742  
**Standard** : FCC 47 CFR Part 2, 90(R)

The product was received on Feb. 22, 2019 and testing was started from Apr. 09, 2019 and completed on May 03, 2019. We, SPORTON INTERNATIONAL INC. EMC & Wireless Communications Laboratory, would like to declare that the tested sample has been evaluated in accordance with the test procedures given in ANSI / TIA-603-E and has been in compliance with the applicable technical standards.

The report must not be used by the client to claim product certification, approval, or endorsement by TAF or any agency of government.

The test results in this report apply exclusively to the tested model / sample. Without written approval of SPORTON INTERNATIONAL INC. EMC & Wireless Communications Laboratory, the test report shall not be reproduced except in full.

Approved by: Jones Tsai

**SPORTON INTERNATIONAL INC. EMC & Wireless Communications Laboratory**

No. 52, Huaya 1st Rd., Guishan Dist., Taoyuan City, Taiwan (R.O.C.)



## Table of Contents

**History of this test report.....3**

**Summary of Test Result.....4**

**1 General Description .....5**

    1.1 Product Feature of Equipment Under Test.....5

    1.2 Product Specification of Equipment Under Test.....7

    1.3 Modification of EUT .....7

    1.4 Emission Designator.....7

    1.5 Testing Site.....8

    1.6 Applied Standards .....8

**2 Test Configuration of Equipment Under Test .....9**

    2.1 Test Mode.....9

    2.2 Connection Diagram of Test System.....10

    2.3 Support Unit used in test configuration and system .....10

    2.4 Measurement Results Explanation Example.....10

    2.5 Frequency List of Low/Middle/High Channels .....11

**3 Conducted Test Items.....12**

    3.1 Measuring Instruments .....12

    3.2 Conducted Output Power Measurement and ERP.....13

    3.3 Peak-to-Average Ratio .....14

    3.4 Occupied Bandwidth.....15

    3.5 Conducted Band Edge .....16

    3.6 Emission Mask.....17

    3.7 Conducted Spurious Emission .....18

    3.8 Frequency Stability .....19

**4 Radiated Test Items .....20**

    4.1 Measuring Instruments .....20

    4.2 Radiated Spurious Emission .....21

**5 List of Measuring Equipment.....22**

**6 Uncertainty of Evaluation.....23**

**Appendix A. Test Results of Conducted Test**

**Appendix B. Test Results of ERP and Radiated Test**

**Appendix C. Test Setup Photographs**



## History of this test report

Report No.	Version	Description	Issued Date
FG922214D	01	Initial issue of report	May 14, 2019



### Summary of Test Result

Report Clause	Ref Std. Clause	Test Items	Result (PASS/FAIL)	Remark
3.2	§2.1046	Conducted Output Power	Reporting only	-
	§90.542 (a)(7)	Effective Radiated Power	Pass	-
3.3	-	Peak-to-Average Ratio	Reporting only	-
3.4	§2.1049	Occupied Bandwidth	Reporting only	-
3.5	§2.1053 §90.543 (e)(2)	Conducted Band Edge Measurement	Pass	-
3.6	§2.1051 §90.210 (n)	Emission Mask	Pass	-
3.7	§2.1053 §90.543 (e)(3)	Conducted Spurious Emission	Pass	-
3.8	§2.1055 §90.539 (e)	Frequency Stability Temperature & Voltage	Pass	-
4.2	§2.1053 §90.543 (e)(3) §90.543 (f)	Radiated Spurious Emission	Pass	Under limit 3.56 dB at 1576.000 MHz

**Declaration of Conformity:**

The test results with all measurement uncertainty excluded are presented in accordance with the regulation limits or requirements declared by manufacturers.

**Comments and Explanations:**

The declared of product specification for EUT presented in the report are provided by the manufacturer, and the manufacturer takes all the responsibilities for the accuracy of product specification.

**Reviewed by: Wii Chang**

**Report Producer: Natasha Hsieh**



# 1 General Description

## 1.1 Product Feature of Equipment Under Test

Product Feature	
Equipment	Tablet
Brand Name	Zebra
Model Name	RTL10B1
FCC ID	UZ7RTL10B1
Sample 1	EUT with SKU 1 + Keyboard
Sample 2	EUT with SKU 1
Sample 3	EUT with SKU 2
Sample 4	EUT with SKU 3
Sample 5	EUT with SKU 4
EUT supports Radios application	WCDMA/HSPA/LTE/NFC/GNSS WLAN 11a/b/g/n HT20/HT40 WLAN 11ac VHT20/VHT40/VHT80 Bluetooth BR/EDR/LE
HW Version	DV0
SW Version	Android version 8.1.0
FW Version - Xpad	01-17-09.00-OG-U00-PLT
FW Version - Xslate	01-17-05.00-OG-U00-PRD
FW Version - Xbook	01-17-05.00-OG-U00-PRD
MFD - Xpad	19MAR01
MFD - Xslate	19MAR01
MFD - Xbook	19MAR01
EUT Stage	Identical Prototype

Remark: The above EUT's information was declared by manufacturer.

Specification of Accessories				
AC Adapter	Brand Name	Delta	Model Name	ADP-65JH HB
Spare Standard Battery 36Whr	Brand Name	XPLORE	Model Name	XLBM1
Keyboard dock	Brand Name	XPLORE	Model Name	LX-KB
Touch Pen	Brand Name	WACOM	Model Name	CP-903-05B-2
Touch Pen	Brand Name	EMPIA	Model Name	EPNB-8C1000-0000 40820A01
Touch Pen	Brand Name	HAO SHUAN	Model Name	440007



<Sample Information>

	Sample 1	Sample 2	Sample 3	Sample 4	Sample 5
<b>DVO</b>	SKU 1+ Keyboard	L10A - SKU1	L10A - SKU2	L10A - SKU3	L10A - SKU4
<b>ID</b>	Xbook	XSLATE	XPAD	XPAD	XPAD
<b>OS</b>	Refer Xslate	Android O	Android O	Android O	Android O
<b>CPU</b>		Qualcomm SDM660	Qualcomm SDM660	Qualcomm SDM660	Qualcomm SDM660
<b>Display with touch</b>		Panasonic EP101R1912N500 TG 10.1" LCD (500nits)	Panasonic EP101R1912N500 TG 10.1" LCD (500nits)	Panasonic EP101R1912N500 TG 10.1" LCD (1000nits)	Panasonic EP101R1912N500 TG 10.1" LCD (1000nits) with digitizer
<b>Memory</b>		Samsung LPDDR4 4GB Hynix LPDD4 4 GB	Samsung LPDDR4 4GB Hynix LPDD4 4 GB	Samsung LPDDR4 4GB Micron LPDD4 4 GB	Samsung LPDDR4 4GB Micron LPDD4 4 GB
<b>eMMC</b>		TOSHIBA 64GB	TOSHIBA 64GB	TOSHIBA 64GB	TOSHIBA 64GB
<b>GPS</b>		Qualcomm	Qualcomm	Qualcomm	Qualcomm
<b>WWAN</b>		Qualcomm	Qualcomm	Qualcomm	Qualcomm
<b>WLAN</b>		Qualcomm WCN3990	Qualcomm WCN3990	Qualcomm WCN3990	Qualcomm WCN3990
<b>Antenna</b>		WLAN*2/NFC /GPS/WWAN*2	WLAN*2/NFC /GPS/WWAN*2	WLAN*2/NFC /GPS/WWAN*2	WLAN*2/NFC /GPS/WWAN*2
<b>Barcode Reader</b>		No	Yes	Yes	Yes
<b>HDMI</b>		No	No	Yes	No
<b>Serial Port</b>		No	Yes	No	No



## 1.2 Product Specification of Equipment Under Test

Product Feature	
Tx Frequency	LTE Band 14 :790.5 MHz ~ 795.5 MHz
Rx Frequency	LTE Band 14 :760.5 MHz ~ 765.5 MHz
Bandwidth	5MHz / 10MHz
Maximum Output Power to Antenna	23.86dBm
Antenna Type	PCB Antenna
Antenna Gain	2.58 dBi
Type of Modulation	QPSK / 16QAM / 64QAM

## 1.3 Modification of EUT

No modifications are made to the EUT during all test items.

## 1.4 Emission Designator

LTE Band 14		QPSK			16QAM			64QAM		
BW (MHz)	Frequency Range (MHz)	Emission Designator (99%OBW)	Frequency Tolerance (ppm)	Maximum ERP(W)	Emission Designator (99%OBW)	Frequency Tolerance (ppm)	Maximum ERP(W)	Emission Designator (99%OBW)	Frequency Tolerance (ppm)	Maximum ERP(W)
5	790.5 ~ 795.5	4M51G7D	-	0.2679	4M50W7D	-	0.2244	4M50W7D	-	0.1762
10	793	9M01G7D	0.0084	0.2685	9M05W7D	-	0.2296	8M99W7D	-	0.1791



## 1.5 Testing Site

<b>Test Site</b>	SPORTON INTERNATIONAL INC.
<b>Test Site Location</b>	No.52, Huaya 1st Rd., Guishan Dist., Taoyuan City, Taiwan (R.O.C.) TEL: +886-3-327-3456 FAX: +886-3-328-4978
<b>Test Site No.</b>	<b>Sporton Site No.</b>
	TH05-HY
<b>Test Engineer</b>	Jack Wang
<b>Temperature</b>	22~24°C
<b>Relative Humidity</b>	54~58%

**Note:** The test site complies with ANSI C63.4 2014 requirement.

<b>Test Site</b>	SPORTON INTERNATIONAL INC.
<b>Test Site Location</b>	No.58, Aly. 75, Ln. 564, Wenhua 3rd, Rd., Guishan Dist., Taoyuan City, Taiwan (R.O.C.) TEL: +886-3-327-0868 FAX: +886-3-327-0855
<b>Test Site No.</b>	<b>Sporton Site No.</b>
	03CH15-HY
<b>Test Engineer</b>	Watt Tseng, Karl Hou, and BigShow Wang
<b>Temperature</b>	23~24°C
<b>Relative Humidity</b>	55~56%

**Note:** The test site complies with ANSI C63.4 2014 requirement.

FCC Designation No.: TW1190 and TW0007

## 1.6 Applied Standards

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

- ♦ ANSI C63.26-2015
- ♦ 47 CFR Part 2, Part 90(R)
- ♦ ANSI / TIA-603-E
- ♦ FCC KDB 971168 D01 Power Meas. License Digital Systems v03r01
- ♦ FCC KDB 412172 D01 Determining ERP and EIRP v01r01

**Remark:**

1. All test items were verified and recorded according to the standards and without any deviation during the test.
2. This EUT has also been tested and complied with the requirements of FCC Part 15, Subpart B, recorded in a separate test report.





## 2 Test Configuration of Equipment Under Test


### 2.1 Test Mode

Antenna port conducted and radiated test items listed below are performed according to KDB 971168 D01 Power Meas. License Digital Systems v03r01 with maximum output power.

For radiated measurement, pre-scanned in three orthogonal panels, X, Y, Z. The worst cases (X plane for sample 5 and Y plane for sample 2) were recorded in this report.

Conducted Test Cases	Band	Bandwidth (MHz)						Modulation			RB #			Test Channel		
		1.4	3	5	10	15	20	QPSK	16QAM	64QAM	1	Half	Full	L	M	H
Max. Output Power	14	-	-	v	v	-	-	v	v	v	v	v	v	v	v	v
Peak-to-Average Ratio	14	-	-		v	-	-	v	v	v	v		v	v	v	v
26dB and 99% Bandwidth	14	-	-	v	v	-	-	v	v	v			v	v	v	v
Conducted Band Edge	14	-	-	v	v	-	-	v	v	v	v		v	v		v
Emission Mask	14	-	-	v	v	-	-	v	v	v	v		v	v	v	v
Conducted Spurious Emission	14	-	-	v	v	-	-	v	v	v	v			v	v	v
Frequency Stability	14	-	-		v	-	-	v	v	v			v		v	
E.R.P	14	-	-	v	v	-	-	v	v	v	v			v	v	v
Radiated Spurious Emission	14	Worst Case											v	v	v	
Remark	<ol style="list-style-type: none"> <li>The mark "v" means that this configuration is chosen for testing</li> <li>The mark "-" means that this bandwidth is not supported.</li> <li>The device is investigated from 30MHz to 10 times of fundamental signal for radiated spurious emission test under different RB size/offset and modulations in exploratory test. Subsequently, only the worst case emissions are reported.</li> <li>All the radiated test cases were performed with Sample 2 and Sample 5.</li> </ol>															

## 2.2 Connection Diagram of Test System

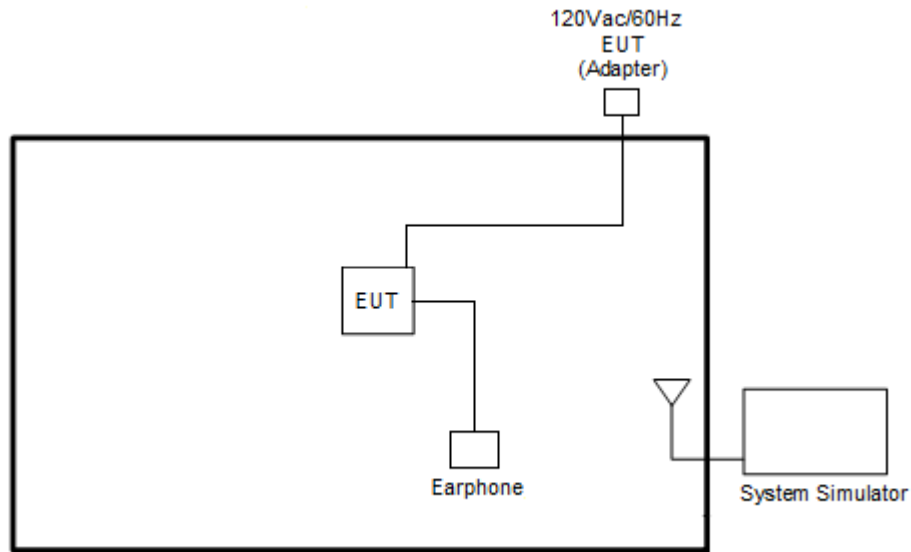

## 2.3 Support Unit used in test configuration and system

Item	Equipment	Trade Name	Model No.	FCC ID	Data Cable	Power Cord
1.	LTE Base Station	Anritsu	MT8820C	N/A	N/A	Unshielded, 1.8 m
2.	iPod Earphone	Apple	A1387	Verification	Unshielded, 1.0 m	N/A

## 2.4 Measurement Results Explanation Example

### For all conducted test items:

The offset level is set in the spectrum analyzer to compensate the RF cable loss and attenuator factor between EUT conducted output port and spectrum analyzer. With the offset compensation, the spectrum analyzer reading level is exactly the EUT RF output level.

The spectrum analyzer offset is derived from RF cable loss and attenuator factor.

Offset = RF cable loss + attenuator factor.

Following shows an offset computation example with cable loss 4.5 dB and 10dB attenuator.

Example :

$$\begin{aligned} \text{Offset(dB)} &= \text{RF cable loss(dB)} + \text{attenuator factor(dB)}. \\ &= 4.5 + 10 = 14.5 \text{ (dB)} \end{aligned}$$



## 2.5 Frequency List of Low/Middle/High Channels

LTE Band 14 Channel and Frequency List				
BW [MHz]	Channel/Frequency(MHz)	Lowest	Middle	Highest
10	Channel	-	23330	-
	Frequency	-	793	-
5	Channel	23305	23330	23355
	Frequency	790.5	793	795.5


### 3 Conducted Test Items

#### 3.1 Measuring Instruments


See list of measuring instruments of this test report.

##### 3.1.1 Test Setup


##### 3.1.2 Conducted Output Power

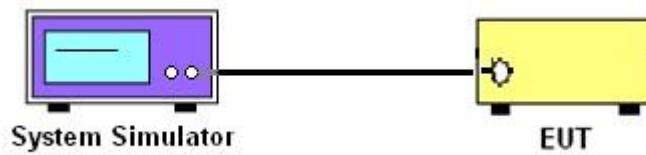

##### 3.1.3 Peak-to-Average Ratio, Occupied Bandwidth, Conducted Band-Edge, Emission Mask, and Conducted Spurious Emission

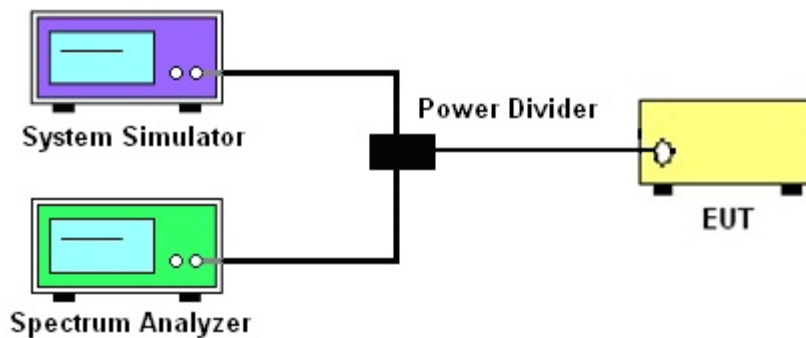

##### 3.1.4 Frequency Stability

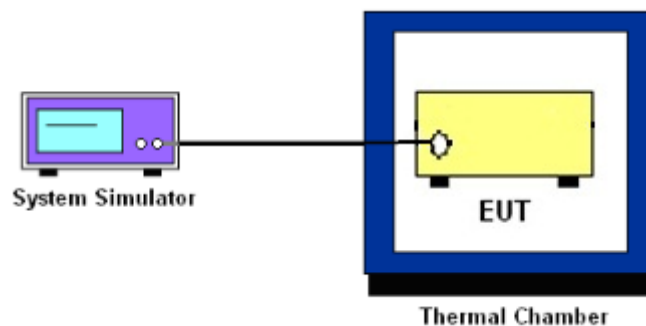

##### 3.1.5 Test Result of Conducted Test

Please refer to Appendix A.



## 3.2 Conducted Output Power Measurement and ERP

### 3.2.1 Description of the Conducted Output Power Measurement and ERP Measurement

A base station simulator was used to establish communication with the EUT. Its parameters were set to transmit the maximum power on the EUT. The measured power in the radio frequency on the transmitter output terminals shall be reported.

The ERP of mobile transmitters must not exceed 3 Watts for LTE Band 14.

According to KDB 412172 D01 Power Approach,

$EIRP = P_T + G_T - L_C$ ,  $ERP = EIRP - 2.15$ , where

$P_T$  = transmitter output power in dBm

$G_T$  = gain of the transmitting antenna in dBi

$L_C$  = signal attenuation in the connecting cable between the transmitter and antenna in dB

### 3.2.2 Test Procedures

1. The transmitter output port was connected to base station.
2. Set EUT at maximum power through base station.
3. Select lowest, middle, and highest channels for each band and different modulation.
4. Measure and record the power level from the system simulator.



## 3.3 Peak-to-Average Ratio

### 3.3.1 Description of the PAR Measurement

Power Complementary Cumulative Distribution Function (CCDF) curves provide a means for characterizing the power peaks of a digitally modulated signal on a statistical basis. A CCDF curve depicts the probability of the peak signal amplitude exceeding the average power level. Most contemporary measurement instrumentation include the capability to produce CCDF curves for an input signal provided that the instrument's resolution bandwidth can be set wide enough to accommodate the entire input signal bandwidth. In measuring transmissions in this band using an average power technique, the peak-to-average ratio (PAR) of the transmission may not exceed 13 dB.

### 3.3.2 Test Procedures

The testing follows ANSI C63.26-2015 Section 5.2.6

1. The EUT was connected to spectrum and system simulator via a power divider.
2. Set the CCDF (Complementary Cumulative Distribution Function) option in spectrum analyzer.
3. The highest RF powers were measured and recorded the maximum PAPR level associated with a probability of 0.1 %.
4. Record the deviation as Peak to Average Ratio.



## 3.4 Occupied Bandwidth

### 3.4.1 Description of Occupied Bandwidth Measurement

The occupied bandwidth is the width of a frequency band such that, below the lower and above the upper frequency limits, the mean powers emitted are each equal to a specified percentage 0.5% of the total mean transmitted power.

The 26 dB emission bandwidth is defined as the frequency range between two points, one above and one below the carrier frequency, at which the spectral density of the emission is attenuated 26 dB below the maximum in-band spectral density of the modulated signal. Spectral density (power per unit bandwidth) is to be measured with a detector of resolution bandwidth equal to approximately 1.0% of the emission bandwidth.

### 3.4.2 Test Procedures

The testing follows ANSI C63.26-2015 Section 5.4.3 (26dB) and Section 5.4.4 (99OB)

1. The EUT was connected to spectrum analyzer and system simulator via a power divider.
2. The spectrum analyzer center frequency is set to the nominal EUT channel center frequency. The span range for the spectrum analyzer shall be between two and five times the anticipated OBW.
3. The nominal resolution bandwidth (RBW) shall be in the range of 1 to 5 % of the anticipated OBW, and the VBW shall be at least 3 times the RBW.
4. Set the detection mode to peak, and the trace mode to max hold.
5. Determine the reference value: Set the EUT to transmit a modulated signal. Allow the trace to stabilize. Set the spectrum analyzer marker to the highest level of the displayed trace.  
(this is the reference value)
6. Determine the “-26 dB down amplitude” as equal to (Reference Value – X).
7. Place two markers, one at the lowest and the other at the highest frequency of the envelope of the spectral display such that each marker is at or slightly below the “-X dB down amplitude” determined in step 6. If a marker is below this “-X dB down amplitude” value it shall be placed as close as possible to this value. The OBW is the positive frequency difference between the two markers.
8. Use the 99 % power bandwidth function of the spectrum analyzer and report the measured bandwidth.



## **3.5 Conducted Band Edge**

### **3.5.1 Description of Conducted Band Edge Measurement**

90.543(e)

- (1) On all frequencies between 769-775 MHz and 799-805 MHz, by a factor not less than  $76 + 10 \log (P)$  dB in a 6.25 kHz band segment, for base and fixed stations.
- (2) On all frequencies between 769-775 MHz and 799-805 MHz, by a factor not less than  $65 + 10 \log (P)$  dB in a 6.25 kHz band segment, for mobile and portable stations.
- (3) On any frequency between 775-788 MHz, above 805 MHz, and below 758 MHz, by at least  $43 + 10 \log (P)$  dB.

### **3.5.2 Test Procedures**

The testing follows ANSI C63.26-2015 Section 5.7.

1. The EUT was connected to spectrum analyzer and system simulator via a power divider.
2. The band edges of low and high channels for the highest RF powers were measured.
3. Set RBW  $\geq 1\%$  EBW in the 1MHz band immediately outside and adjacent to the band edge.
4. Beyond the 1 MHz band from the band edge, RBW=1MHz was used.
5. Set spectrum analyzer with RMS detector.
6. The RF fundamental frequency should be excluded against the limit line in the operating frequency band.
7. Checked that all the results comply with the emission limit line.

The limit line is derived from  $43 + 10\log(P)$ dB below the transmitter power P(Watts)





## 3.6 Emission Mask

### 3.6.1 Description of Emissions Mask Measurement

Transmitters designed must meet the emission mask comply with the emission mask provisions of FCC Part 90.210(n).

### 3.6.2 Test Procedures

The testing follows FCC KDB 971168 D01 v03r01 Section 6.0.

1. The EUT was connected to spectrum analyzer and system simulator via a power divider.
2. The power of the modulated signal was measured on a spectrum analyzer using an RMS and 10 second sweep time in order to maximize the level.
3. The RF fundamental frequency should be excluded against the limit line in the operating frequency band.



## **3.7 Conducted Spurious Emission**

### **3.7.1 Description of Conducted Spurious Emission Measurement**

The power of any emission outside of the authorized operating frequency ranges must be lower than the transmitter power (P) by a factor of at least  $43 + 10 \log (P)$  dB.

It is measured by means of a calibrated spectrum analyzer and scanned from 30MHz up to a frequency including its 10<sup>th</sup> harmonic.

### **3.7.2 Test Procedures**

The testing follows ANSI C63.26-2015 Section 5.7.

1. The EUT was connected to spectrum analyzer and base station via power divider.
2. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.
3. The middle channel for the highest RF power within the transmitting frequency was measured.
4. The conducted spurious emission for the whole frequency range was taken.
5. Make the measurement with the spectrum analyzer's RBW = 1MHz, VBW = 3MHz.
6. Set spectrum analyzer with RMS detector.
7. Taking the record of maximum spurious emission.
8. The RF fundamental frequency should be excluded against the limit line in the operating frequency band.
9. The limit line is derived from  $43 + 10\log(P)$ dB below the transmitter power P(Watts)



## 3.8 Frequency Stability

### 3.8.1 Description of Frequency Stability Measurement

The frequency stability shall be sufficient to ensure that the fundamental emission stays within the authorized frequency block.

### 3.8.2 Test Procedures for Temperature Variation

The testing follows FCC KDB 971168 D01 v03r01 Section 9.0.

1. The EUT was set up in the thermal chamber and connected with the base station.
2. With power OFF, the temperature was decreased to  $-30^{\circ}\text{C}$  and the EUT was stabilized before testing. Power was applied and the maximum change in frequency was recorded within one minute.
3. With power OFF, the temperature was raised in  $10^{\circ}\text{C}$  step up to  $50^{\circ}\text{C}$ . The EUT was stabilized at each step for at least half an hour. Power was applied and the maximum frequency change was recorded within one minute.

### 3.8.3 Test Procedures for Voltage Variation

The testing follows FCC KDB 971168 D01 v03r01 Section 9.0.

1. The EUT was placed in a temperature chamber at  $20\pm 5^{\circ}\text{C}$  and connected with the base station.
2. The power supply voltage to the EUT was varied from 85% to 115% of the nominal value measured at the input to the EUT.
3. The variation in frequency was measured for the worst case.


## 4 Radiated Test Items

### 4.1 Measuring Instruments


See list of measuring instruments of this test report.

#### 4.1.1 Test Setup

For radiated test from 30MHz to 1GHz

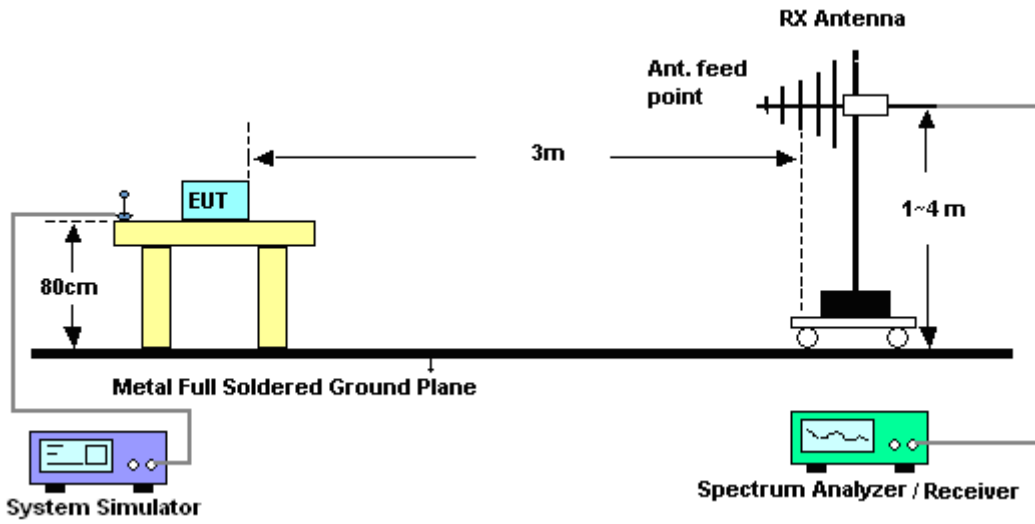

For radiated test above 1GHz

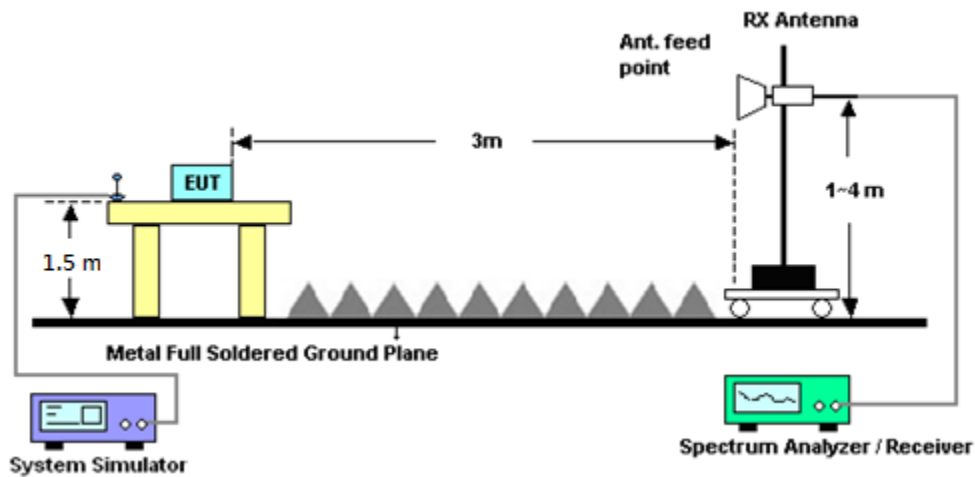

#### 4.1.2 Test Result of Radiated Test

Please refer to Appendix B.



## 4.2 Radiated Spurious Emission

### 4.2.1 Description of Radiated Spurious Emission

The radiated spurious emission was measured by substitution method according to ANSI / TIA-603-E. The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitter power (P) by a factor of at least  $43 + 10 \log (P)$  dB.

For operations in the 758-775 MHz and 788-805 MHz bands, all emissions including harmonics in the band 1559–1610 MHz shall be limited to -70 dBW/MHz equivalent isotropically radiated power (EIRP) for wideband signals, and -80 dBW EIRP for discrete emissions of less than 700 Hz bandwidth. For the purpose of equipment authorization, a transmitter shall be tested with an antenna that is representative of the type that will be used with the equipment in normal operation.

The spectrum is scanned from 30 MHz up to a frequency including its 10th harmonic.

### 4.2.2 Test Procedures

The testing follows FCC KDB 971168 D01 v03r01 Section 5.8 and ANSI / TIA-603-E Section 2.2.12.

1. The EUT was placed on a turntable with 0.8 meter for frequency below 1GHz and 1.5 meter for frequency above 1GHz respectively above ground.
2. The EUT was set 3 meters from the receiving antenna, which was mounted on the antenna tower.
3. The table was rotated 360 degrees to determine the position of the highest spurious emission.
4. The height of the receiving antenna is varied between one meter and four meters to search the maximum spurious emission for both horizontal and vertical polarizations.
5. Make the measurement with the spectrum analyzer's RBW = 1MHz, VBW = 3MHz, Sweep = 500ms, Taking the record of maximum spurious emission.
6. A horn antenna was substituted in place of the EUT and was driven by a signal generator.
7. Tune the output power of signal generator to the same emission level with EUT maximum spurious emission.
8. Taking the record of output power at antenna port.
9. Repeat step 7 to step 8 for another polarization.
10. The RF fundamental frequency should be excluded against the limit line in the operating frequency band.
11. The limit line is derived from  $43 + 10\log(P)$ dB below the transmitter power P(Watts)



## 5 List of Measuring Equipment

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Test Date	Due Date	Remark
LTE Base Station	Anritsu	MT8820C	6201107509	-	Mar. 02, 2018	May 03, 2019	Mar. 01, 2020	Conducted (TH03-HY)
Spectrum Analyzer	Rohde & Schwarz	FSP30	101329	9kHz~30GHz	Jun. 29, 2018	May 03, 2019	Jun. 28, 2019	Conducted (TH03-HY)
Temperature Chamber	ESPEC	SU-641	92013721	-30°C ~70°C	Dec. 06, 2017	May 03, 2019	Dec. 05, 2019	Conducted (TH03-HY)
Programmable Power Supply	GW Instek	PSS-2005	EL883644	Voltage:0~20V; Current:0~5A	Dec. 06, 2017	May 03, 2019	Dec. 05, 2019	Conducted (TH03-HY)
Base Station (Measure)	Rohde & Schwarz	CMU200	117995	GSM / GPRS / WCDMA / CDMA	Aug. 10, 2018	May 03, 2019	Aug. 09, 2019	Conducted (TH03-HY)
Preamplifier	EMEC	EM18G40G	060715	18GHz ~ 40GHz	Dec. 06, 2018	Apr. 09, 2019~ Apr. 12, 2019	Dec. 05, 2019	Radiation (03CH15-HY)
Loop Antenna	Rohde & Schwarz	HFH2-Z2	100488	9 kHz~30 MHz	Jan. 07, 2019	Apr. 09, 2019~ Apr. 12, 2019	Jan. 06, 2020	Radiation (03CH15-HY)
SHF-EHF Horn Antenna	SCHWARZBECK	BBHA 9170	BBHA9170576	18GHz ~ 40GHz	May 08, 2018	Apr. 09, 2019~ Apr. 12, 2019	May 07, 2019	Radiation (03CH15-HY)
Amplifier	SONOMA	310N	363440	9kHz~1GHz	Dec. 28, 2018	Apr. 09, 2019~ Apr. 12, 2019	Dec. 27, 2019	Radiation (03CH15-HY)
Bilog Antenna	TESEQ	CBL6111D&00800N1D01N-06	41912&05	30MHz to 1GHz	Feb. 12, 2019	Apr. 09, 2019~ Apr. 12, 2019	Feb. 11, 2020	Radiation (03CH15-HY)
Horn Antenna	SCHWARZBECK	BBHA 9120D	9120D-1620	1G~18GHz	Oct. 17, 2018	Apr. 09, 2019~ Apr. 12, 2019	Oct. 16, 2019	Radiation (03CH15-HY)
Preamplifier	Keysight	83017A	MY53270195	1GHz~26.5GHz	Aug. 23, 2018	Apr. 09, 2019~ Apr. 12, 2019	Aug. 22, 2019	Radiation (03CH15-HY)
Spectrum Analyzer	Agilent	E4446A	MY50180136	3Hz~44GHz	Apr. 25, 2018	Apr. 09, 2019~ Apr. 12, 2019	Apr. 24, 2019	Radiation (03CH15-HY)
Antenna Mast	ChainTek	MBS-520-1	N/A	1m~4m	N/A	Apr. 09, 2019~ Apr. 12, 2019	N/A	Radiation (03CH15-HY)
Turn Table	ChainTek	T-200-S-1	N/A	0~360 Degree	N/A	Apr. 09, 2019~ Apr. 12, 2019	N/A	Radiation (03CH15-HY)
SHF-EHF Horn Antenna	SCHWARZBECK	BBHA 9170	BBHA9170251	18GHz- 40GHz	Nov. 20, 2018	Apr. 09, 2019~ Apr. 12, 2019	Nov. 19, 2019	Radiation (03CH15-HY)
Signal Generator	Rohde & Schwarz	SMF100A	101107	100kHz~40GHz	May 22, 2018	Apr. 09, 2019~ Apr. 12, 2019	May 21, 2019	Radiation (03CH15-HY)
Horn Antenna	SCHWARZBECK	BBHA 9120 D	9120D-1522	1G~18GHz	Sep. 07, 2018	Apr. 09, 2019~ Apr. 12, 2019	Sep. 06, 2019	Radiation (03CH15-HY)
Software	Audix	E3 6.2009-8-24	RK-000451	N/A	N/A	Apr. 09, 2019~ Apr. 12, 2019	N/A	Radiation (03CH15-HY)



## 6 Uncertainty of Evaluation

### Uncertainty of Radiated Emission Measurement (30 MHz ~ 1000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ( $U = 2Uc(y)$ )	3.37
---	------

### Uncertainty of Radiated Emission Measurement (1 GHz ~ 18 GHz)

Measuring Uncertainty for a Level of Confidence of 95% ( $U = 2Uc(y)$ )	3.67
---	------

### Uncertainty of Radiated Emission Measurement (18 GHz ~ 40 GHz)

Measuring Uncertainty for a Level of Confidence of 95% ( $U = 2Uc(y)$ )	4.03
---	------



### Appendix A. Test Results of Conducted Test

LTE Band 14 Maximum Average Power [dBm]						
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest
10	1	0	QPSK		<b>23.86</b>	
10	1	25			23.80	
10	1	49			23.70	
10	25	0			22.89	
10	25	12			22.87	
10	25	25			22.81	
10	50	0			22.84	
10	1	0	16-QAM	-	23.18	-
10	1	25			23.12	
10	1	49			22.94	
10	25	0			21.97	
10	25	12			21.95	
10	25	25			21.90	
10	50	0			21.91	
10	1	0	64-QAM		22.10	
10	1	25			22.05	
10	1	49			21.93	
10	25	0			20.96	
10	25	12			20.95	
10	25	25			20.91	
10	50	0			20.94	
5	1	0	QPSK	23.68	23.85	23.61
5	1	12		23.57	23.74	23.48
5	1	24		23.44	23.64	23.36
5	12	0		22.67	22.85	22.58
5	12	7		22.68	22.80	22.60
5	12	13		22.63	22.80	22.62
5	25	0		22.62	22.76	22.56
5	1	0	16-QAM	22.92	23.08	22.84
5	1	12		22.89	23.02	22.85
5	1	24		22.71	22.84	22.70
5	12	0		21.84	21.95	21.84
5	12	7		21.80	21.94	21.75
5	12	13		21.70	21.85	21.60
5	25	0		21.68	21.83	21.64
5	1	0	64-QAM	21.88	22.02	21.79
5	1	12		21.93	22.03	21.91
5	1	24		21.75	21.93	21.75
5	12	0		20.80	20.91	20.70
5	12	7		20.69	20.86	20.60
5	12	13		20.72	20.91	20.70
5	25	0		20.67	20.87	20.58





## LTE Band 14


### Peak-to-Average Ratio

Mode	LTE Band 14 / 10MHz				
Mod.	QPSK		16QAM		Limit: 13dB
RB Size	1RB	Full RB	1RB	Full RB	Result
Lowest CH	-	-	-	-	PASS
Middle CH	3.51	4.38	4.96	5.57	
Highest CH	-	-	-	-	
Mode	LTE Band 14 / 10MHz				
Mod.	64QAM				Limit: 13dB
RB Size	1RB	Full RB			Result
Lowest CH	-	-	-	-	PASS
Middle CH	5.91	6.29	-	-	
Highest CH	-	-	-	-	




LTE Band 14 / 10MHz / QPSK

Middle Channel/ 1RB

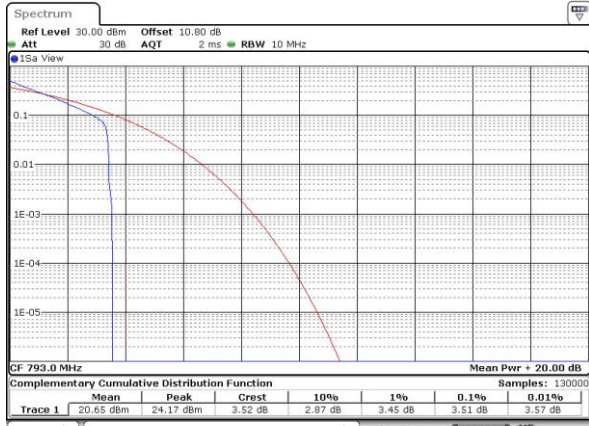

Date: 11 APR 2019 01:02:41


Middle Channel / Full RB

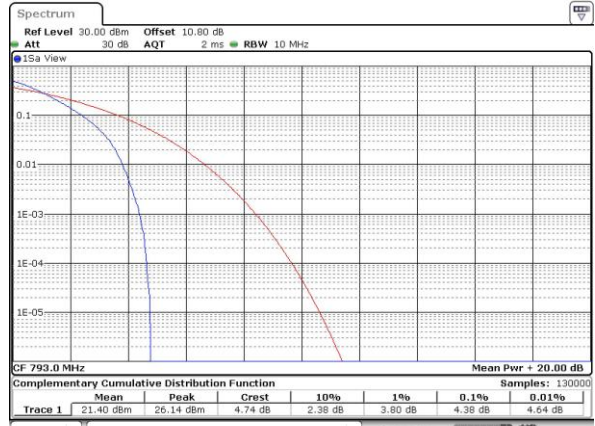

Date: 11 APR 2019 01:02:52


LTE Band 14 / 10MHz / 16QAM

Middle Channel/ 1RB

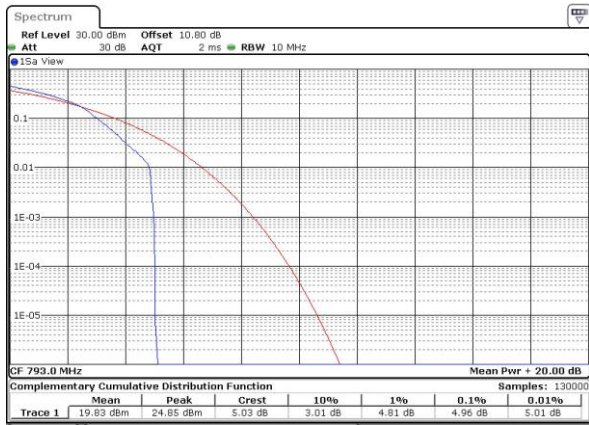

Date: 11 APR 2019 01:02:21

Middle Channel / Full RB

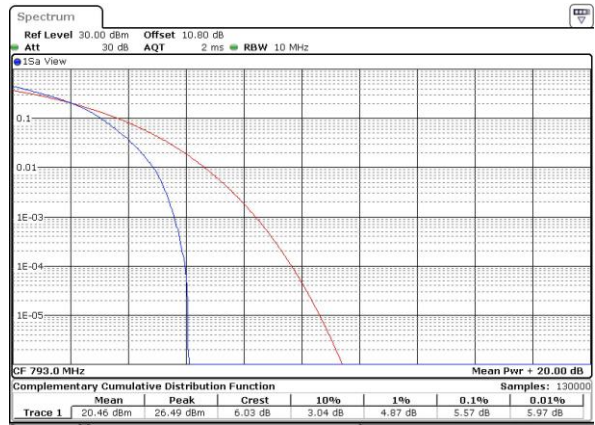

Date: 11 APR 2019 01:02:31

LTE Band 14 / 10MHz / 64QAM

Middle Channel/ 1RB



Date: 11 APR 2019 01:01:54

Middle Channel / Full RB



Date: 11 APR 2019 01:02:04




**26dB Bandwidth**

Mode	LTE Band 14 : 26dB BW(MHz)											
BW	1.4MHz		3MHz		5MHz		10MHz		15MHz		20MHz	
Mod.	QPSK	16QAM	QPSK	16QAM	QPSK	16QAM	QPSK	16QAM	QPSK	16QAM	QPSK	16QAM
Lowest CH	-	-	-	-	4.93	4.91	-	-	-	-	-	-
Middle CH	-	-	-	-	4.94	4.87	9.71	9.69	-	-	-	-
Highest CH	-	-	-	-	4.89	4.87	-	-	-	-	-	-
Mode	LTE Band 14 : 26dB BW(MHz)											
BW	1.4MHz		3MHz		5MHz		10MHz		15MHz		20MHz	
Mod.	64QAM		64QAM		64QAM		64QAM		64QAM		64QAM	
Lowest CH	-	-	-	-	4.96	-	-	-	-	-	-	-
Middle CH	-	-	-	-	4.92	-	9.77	-	-	-	-	-
Highest CH	-	-	-	-	4.88	-	-	-	-	-	-	-




LTE Band 14

Lowest Channel / 5MHz / QPSK

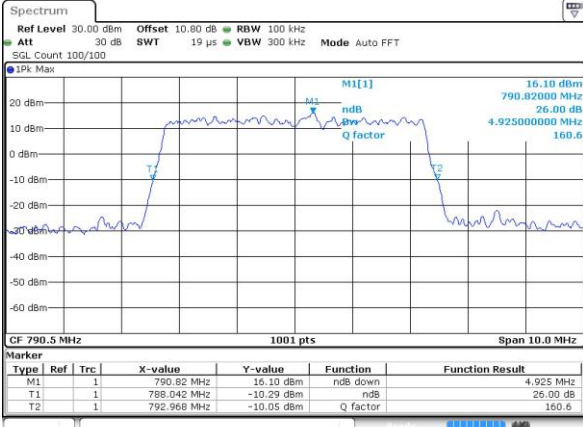


Date: 11 APR 2019 00:12:30

Lowest Channel / 5MHz / 16QAM

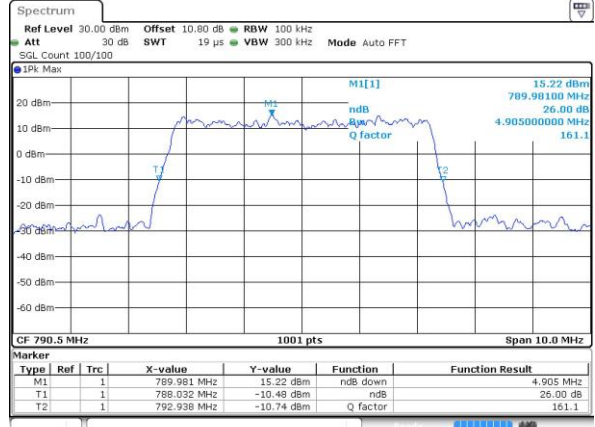


Date: 11 APR 2019 00:12:17

Middle Channel / 5MHz / QPSK

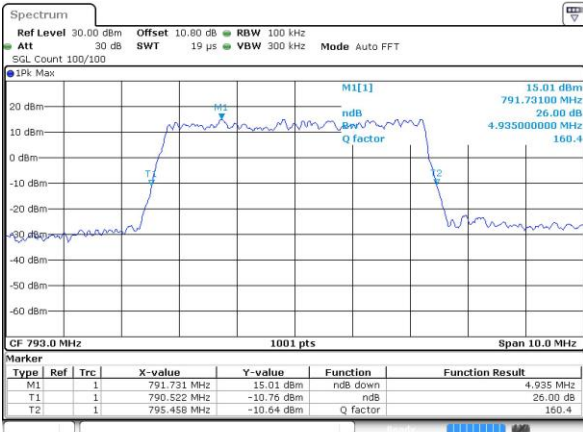


Date: 11 APR 2019 00:22:08

Middle Channel / 5MHz / 16QAM

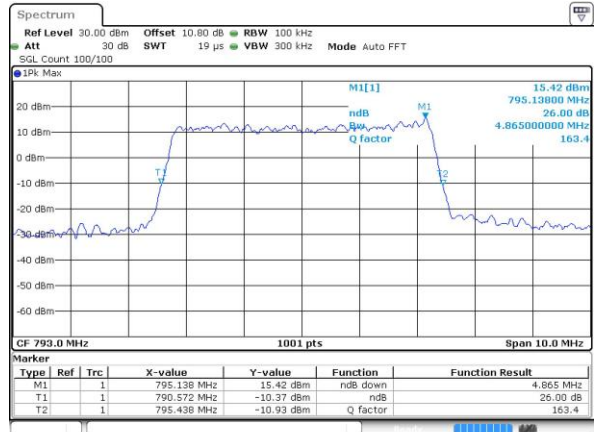


Date: 11 APR 2019 00:22:20

Highest Channel / 5MHz / QPSK

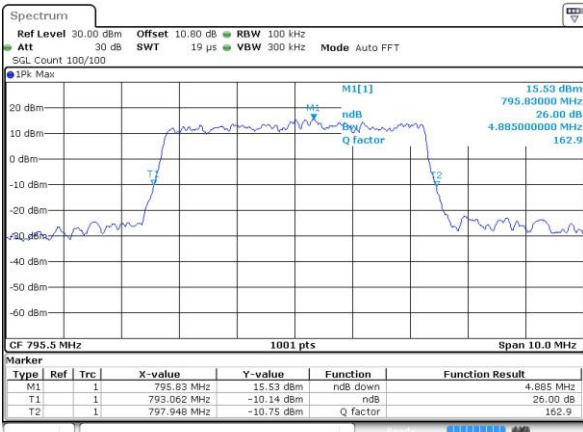

Date: 11 APR 2019 00:23:32

Highest Channel / 5MHz / 16QAM

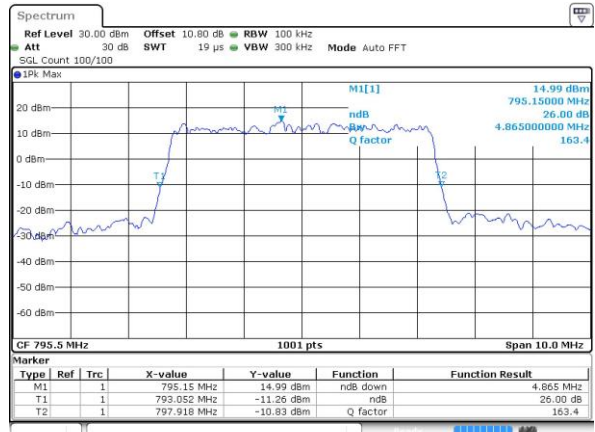


Date: 11 APR 2019 00:23:20




LTE Band 14

Middle Channel / 10MHz / QPSK

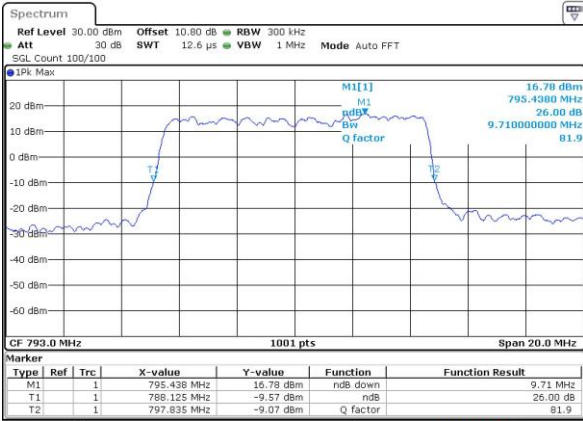

Date: 11 APR 2019 00:42:45

Middle Channel / 10MHz / 16QAM

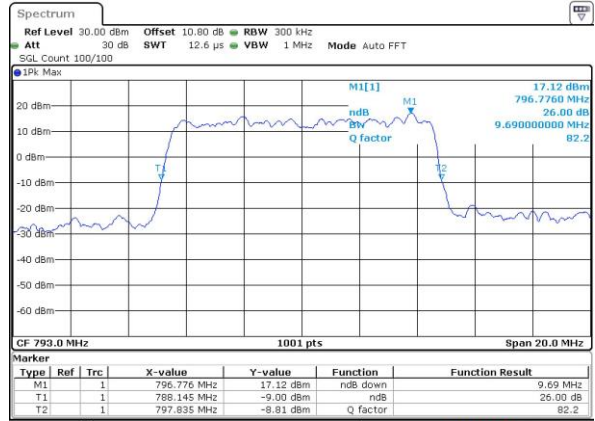


Date: 11 APR 2019 00:42:34




LTE Band 14

Lowest Channel / 5MHz / 64QAM

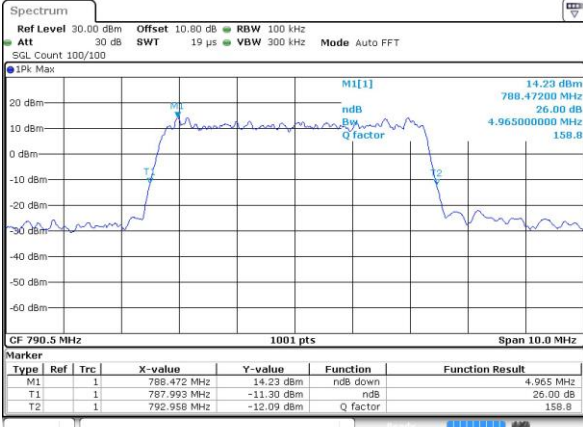


Date: 11 APR 2019 00:32:03

Middle Channel / 5MHz / 64QAM

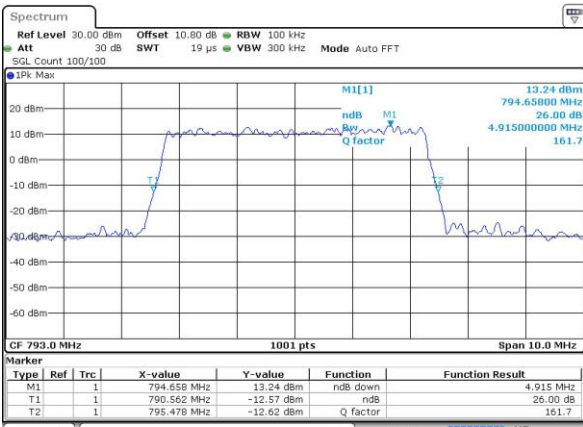


Date: 11 APR 2019 00:36:58

Middle Channel / 10MHz / 64QAM

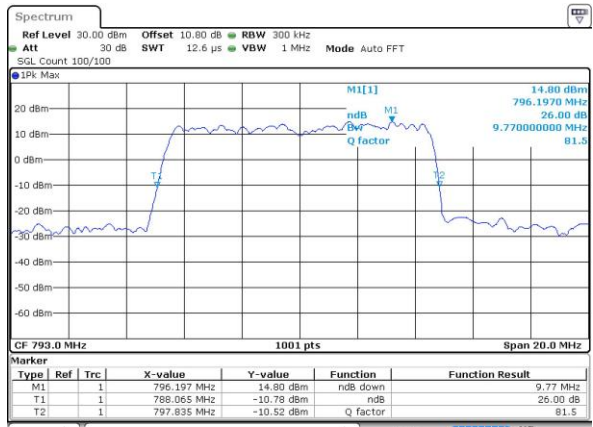

Date: 11 APR 2019 00:54:32

Highest Channel / 5MHz / 64QAM

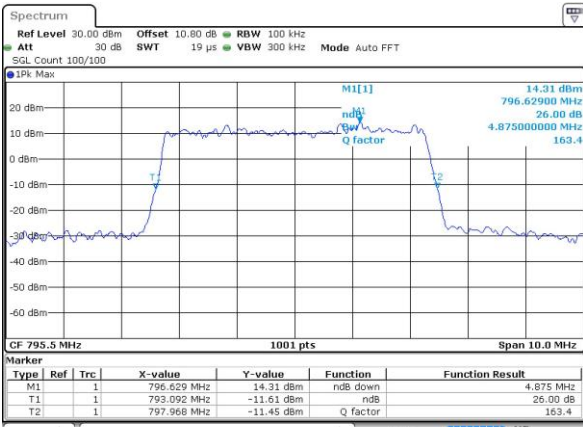

Date: 11 APR 2019 00:37:34



**Occupied Bandwidth**


Mode	LTE Band 14 : 99%OBW(MHz)											
BW	1.4MHz		3MHz		5MHz		10MHz		15MHz		20MHz	
Mod.	QPSK	16QAM	QPSK	16QAM	QPSK	16QAM	QPSK	16QAM	QPSK	16QAM	QPSK	16QAM
Lowest CH	-	-	-	-	4.50	4.50	-	-	-	-	-	-
Middle CH	-	-	-	-	4.51	4.49	9.01	9.05	-	-	-	-
Highest CH	-	-	-	-	4.49	4.49	-	-	-	-	-	-
Mode	LTE Band 14 : 99%OBW(MHz)											
BW	1.4MHz		3MHz		5MHz		10MHz		15MHz		20MHz	
Mod.	64QAM		64QAM		64QAM		64QAM		64QAM		64QAM	
Lowest CH	-	-	-	-	4.50	-	-	-	-	-	-	-
Middle CH	-	-	-	-	4.49	-	8.99	-	-	-	-	-
Highest CH	-	-	-	-	4.50	-	-	-	-	-	-	-






LTE Band 14

Lowest Channel / 5MHz / QPSK

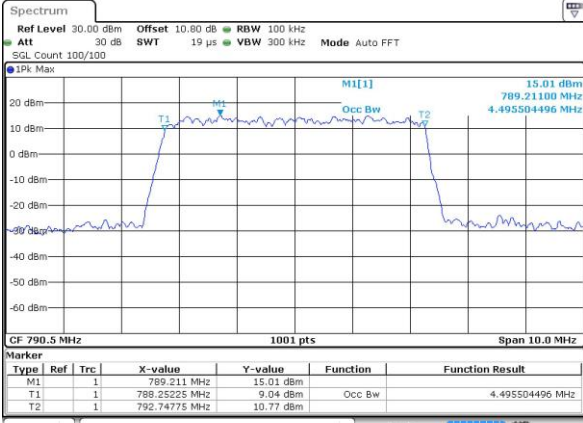


Date: 11 APR 2019 00:11:53

Lowest Channel / 5MHz / 16QAM

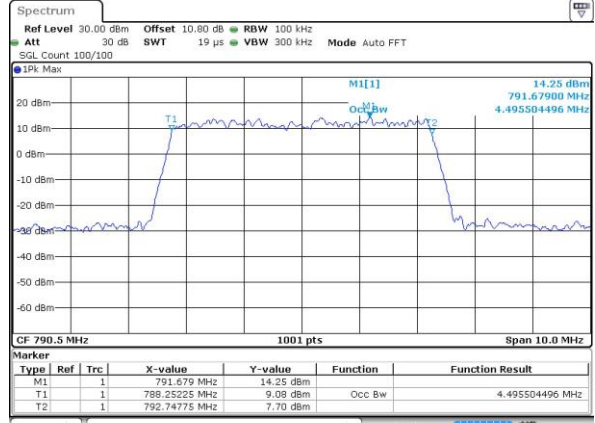


Date: 11 APR 2019 00:12:05

Middle Channel / 5MHz / QPSK

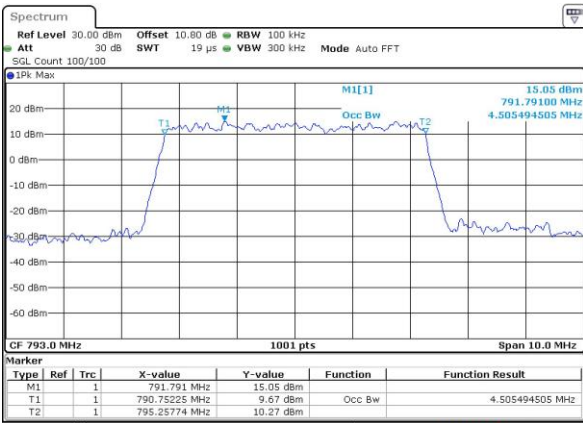


Date: 11 APR 2019 00:22:43

Middle Channel / 5MHz / 16QAM

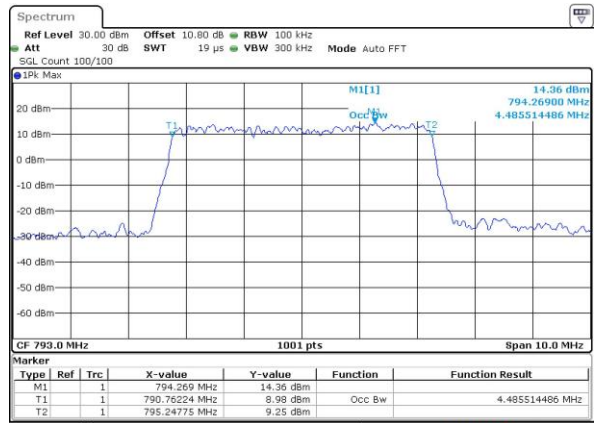


Date: 11 APR 2019 00:22:32

Highest Channel / 5MHz / QPSK

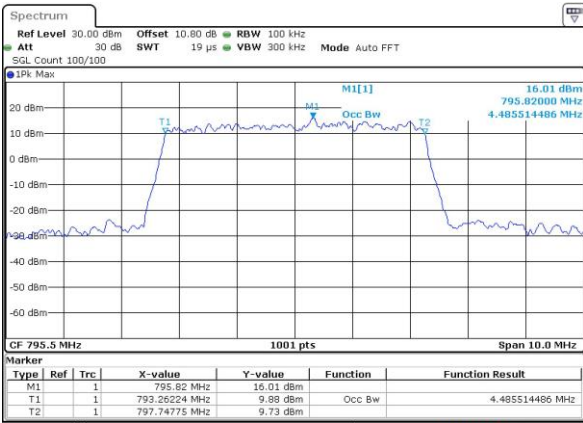

Date: 11 APR 2019 00:22:55

Highest Channel / 5MHz / 16QAM

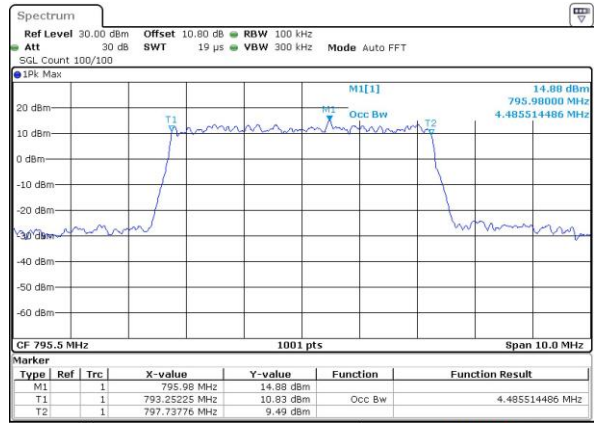


Date: 11 APR 2019 00:23:08






LTE Band 14

Middle Channel / 10MHz / QPSK

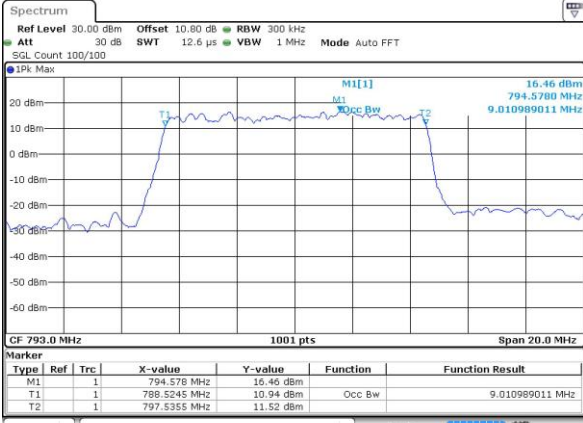

Date: 11 APR 2019 00:42:10

Middle Channel / 10MHz / 16QAM

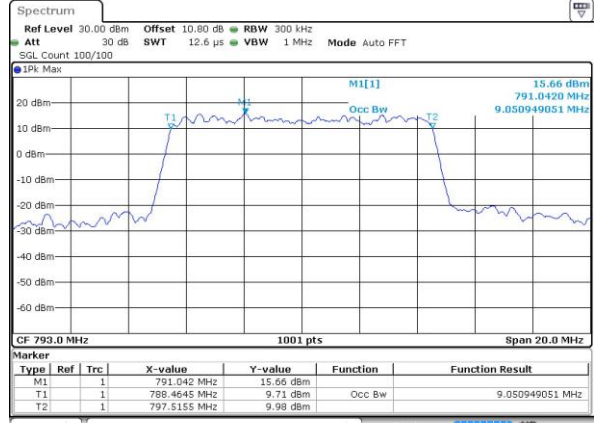


Date: 11 APR 2019 00:42:22




LTE Band 14

Lowest Channel / 5MHz / 64QAM

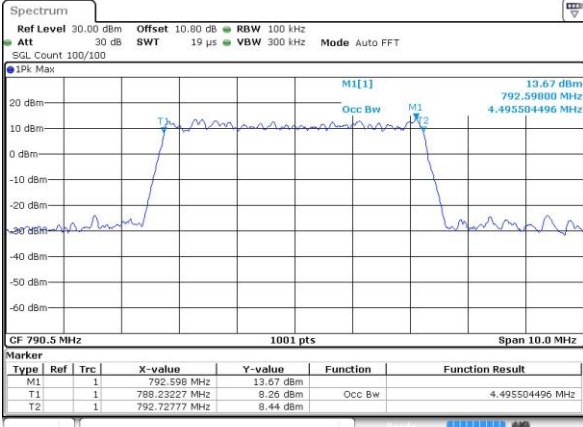


Date: 11 APR 2019 00:31:51

Middle Channel / 5MHz / 64QAM

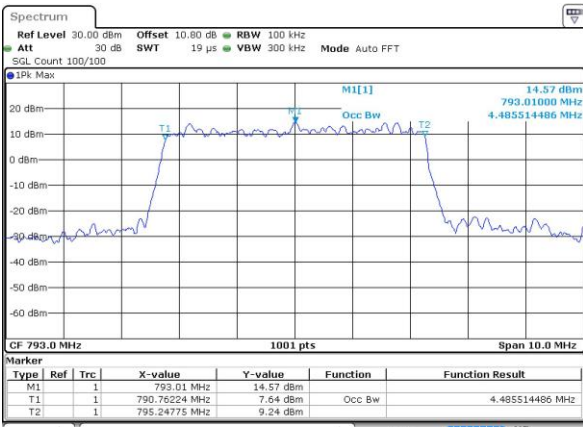


Date: 11 APR 2019 00:37:10

Middle Channel / 10MHz / 64QAM

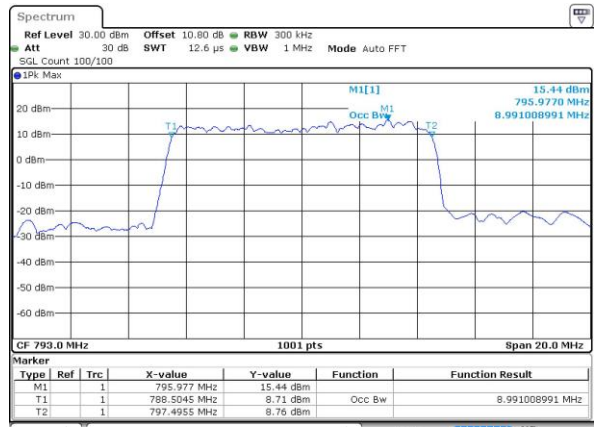

Date: 11 APR 2019 00:54:20

Highest Channel / 5MHz / 64QAM

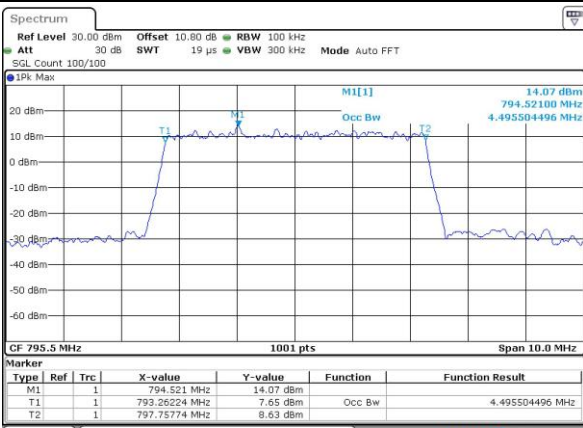

Date: 11 APR 2019 00:37:22




Conducted Band Edge


LTE Band 14 / 5MHz / QPSK

Lowest Band Edge / 1 RB

Highest Band Edge / 1 RB

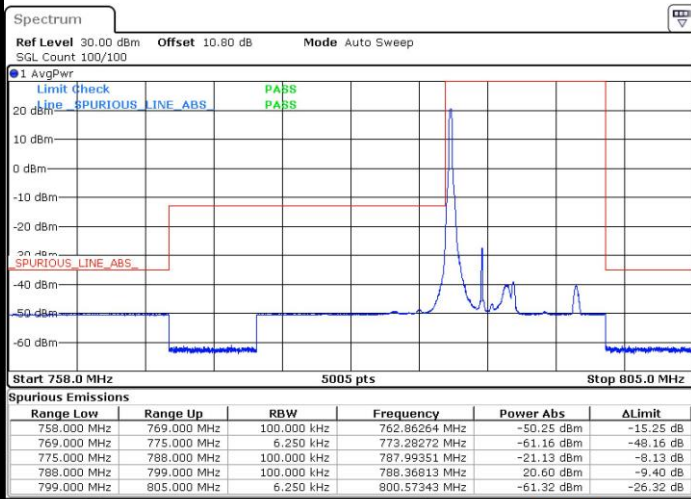


Date: 11.APR.2019 00:19:14

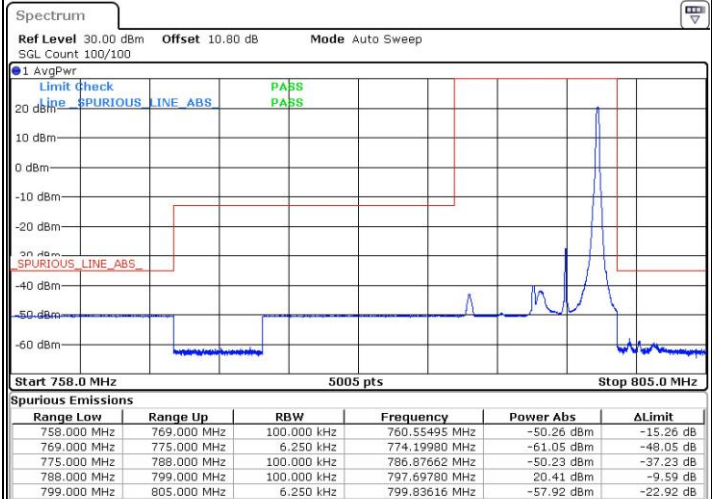


Date: 11.APR.2019 00:30:16

Lowest Band Edge / Full RB

Highest Band Edge / Full RB

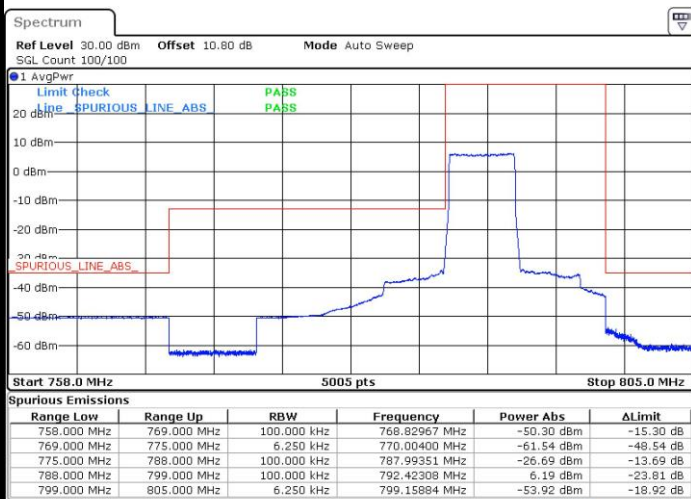

Date: 11.APR.2019 00:14:11

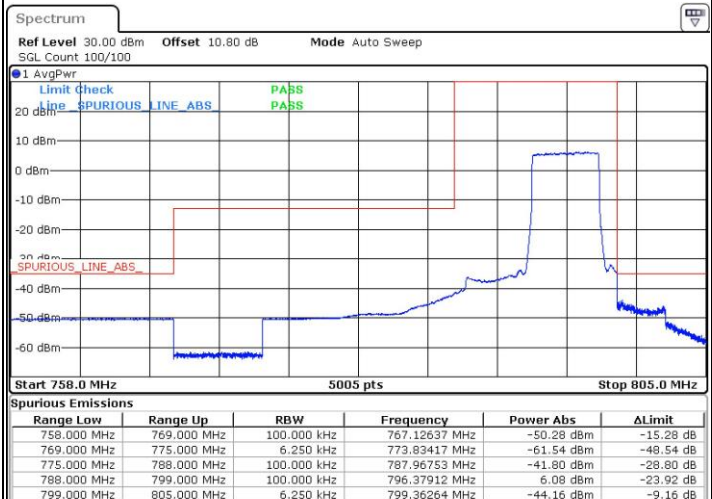


Date: 11.APR.2019 00:25:13




LTE Band 14 / 5MHz / 16QAM

Lowest Band Edge / 1 RB

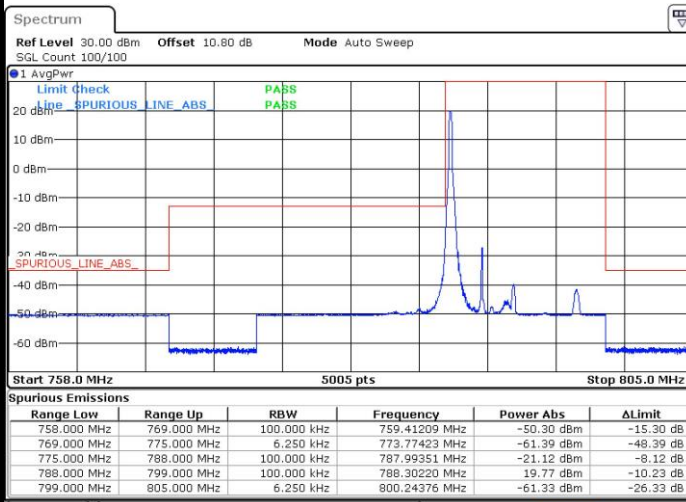


Date: 11.APR.2019 00:17:33

Highest Band Edge / 1 RB

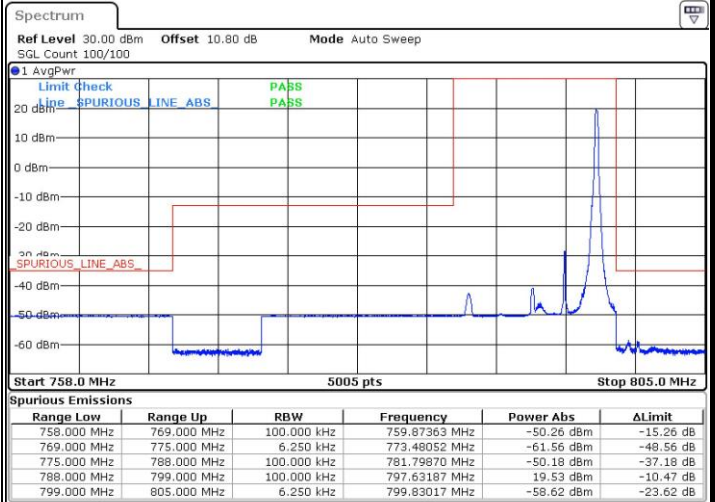


Date: 11.APR.2019 00:28:35

Lowest Band Edge / Full RB

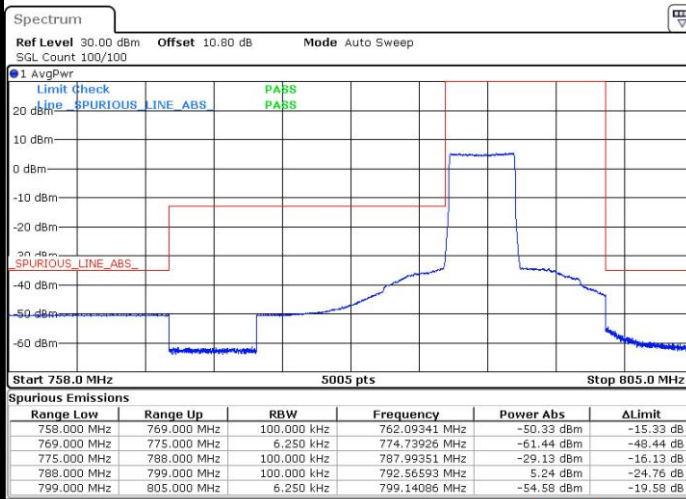

Date: 11.APR.2019 00:15:52

Highest Band Edge / Full RB

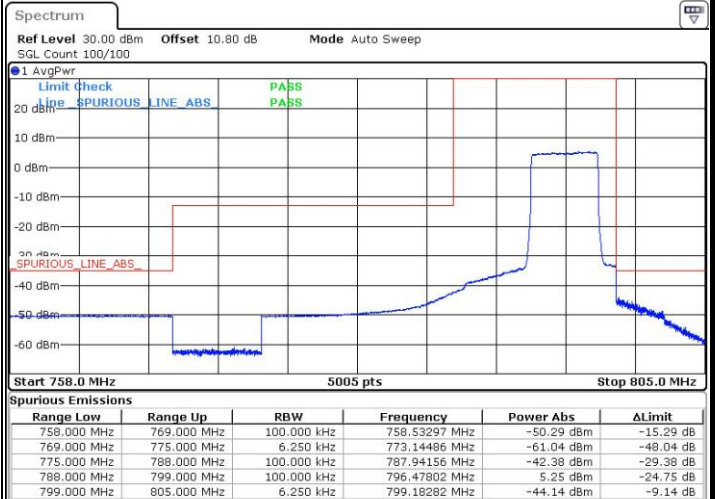


Date: 11.APR.2019 00:26:54




LTE Band 14 / 5MHz / 64QAM

Lowest Band Edge / 1 RB

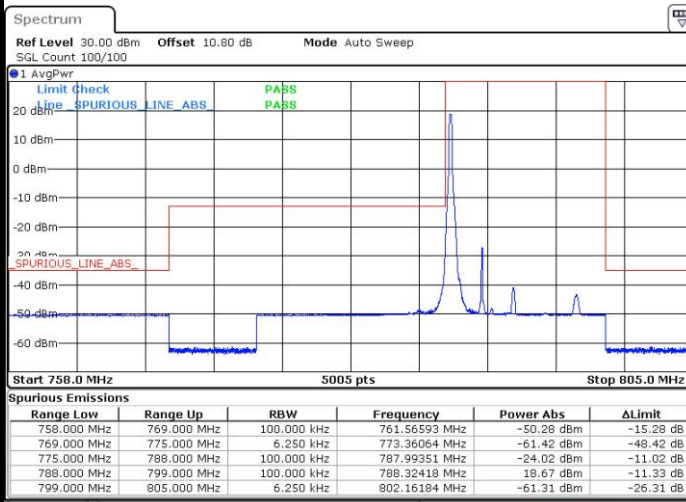


Date: 11.APR.2019 00:35:25

Highest Band Edge / 1 RB

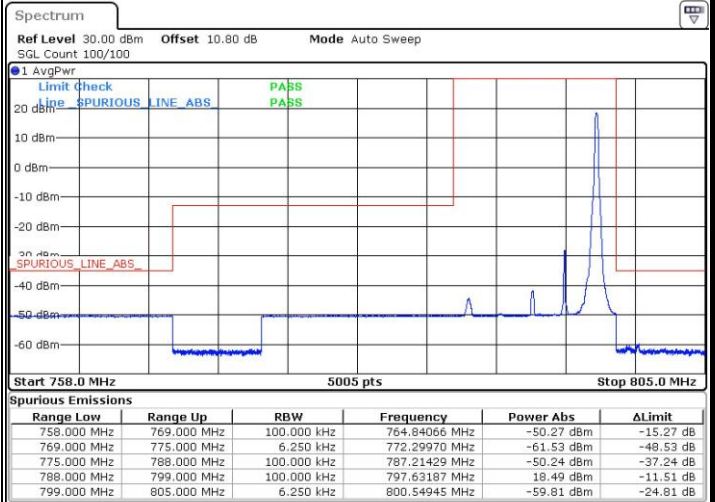


Date: 11.APR.2019 00:40:56

Lowest Band Edge / Full RB

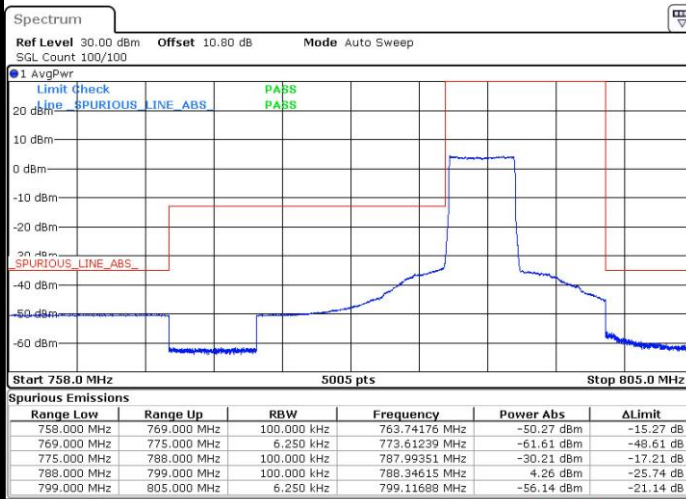

Date: 11.APR.2019 00:33:44

Highest Band Edge / Full RB

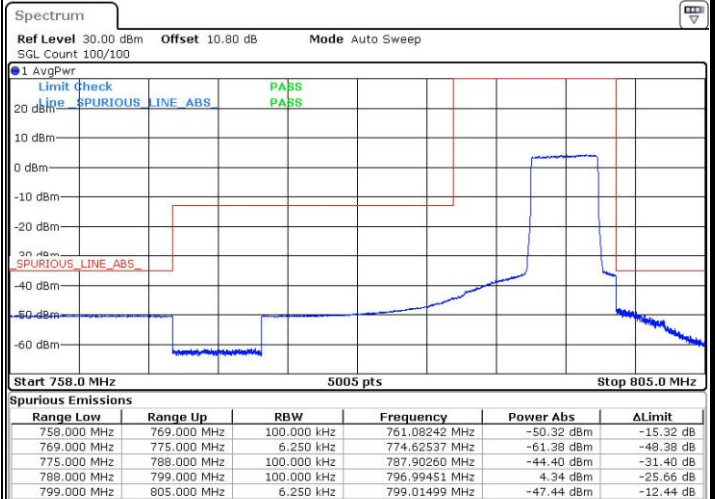


Date: 11.APR.2019 00:39:15






LTE Band 14 / 10MHz / QPSK

Lowest Band Edge / 1 RB

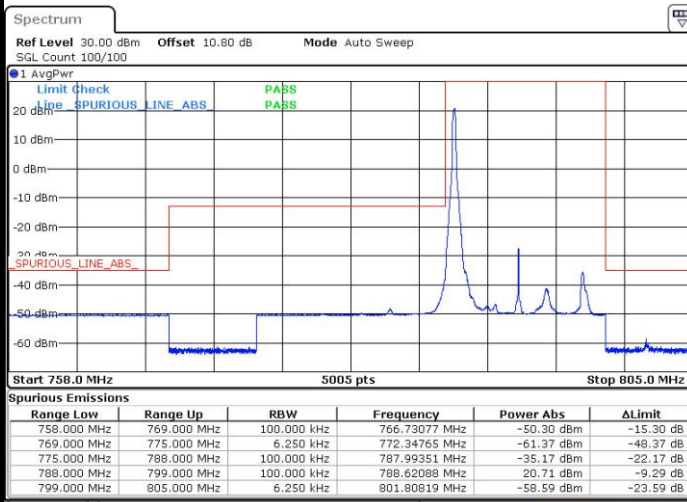


Date: 11.APR.2019 00:49:27

Highest Band Edge / 1 RB

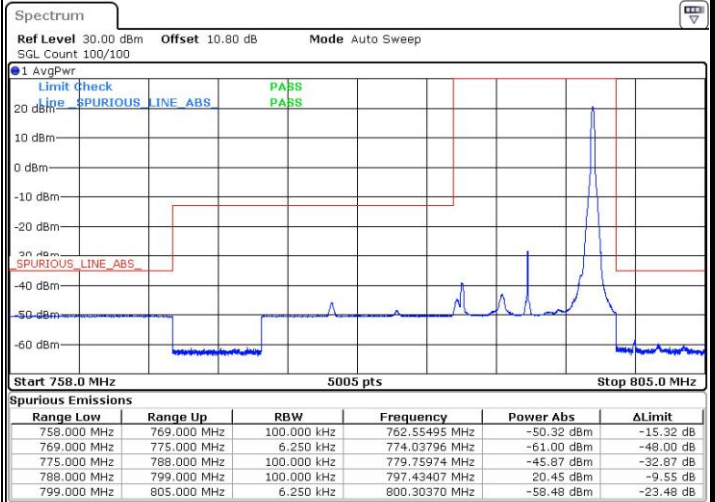

Date: 11.APR.2019 00:51:08

Band Edge / Full RB

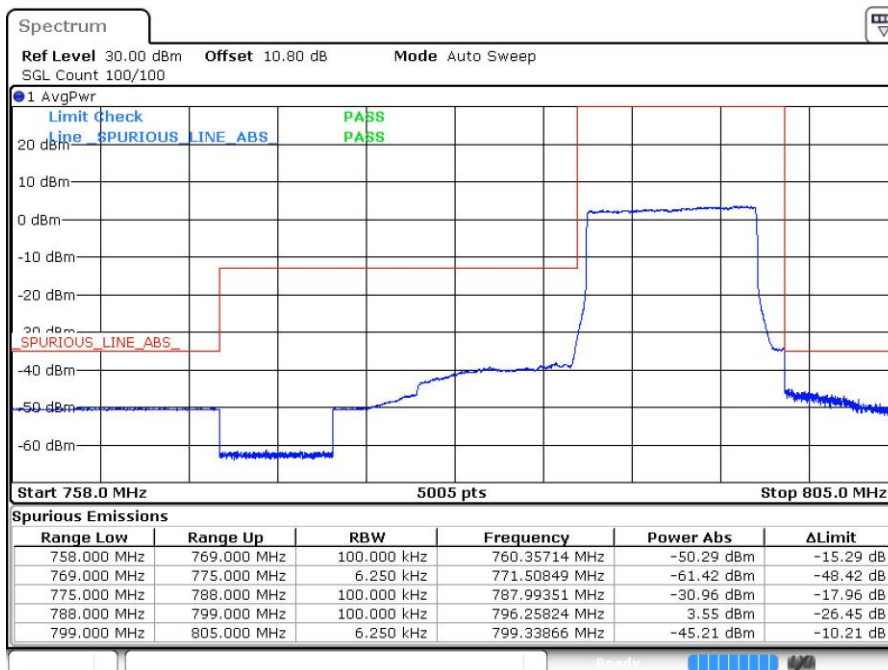


Date: 11.APR.2019 00:44:26




LTE Band 14 / 10MHz / 16QAM

Lowest Band Edge / 1 RB

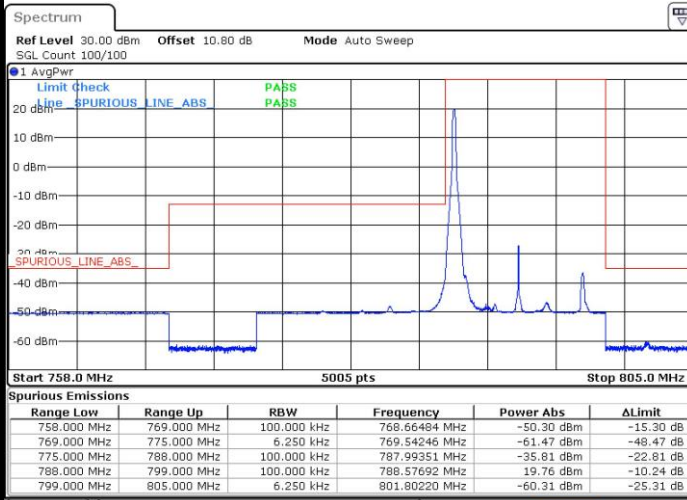


Date: 11.APR.2019 00:47:47

Highest Band Edge / 1 RB

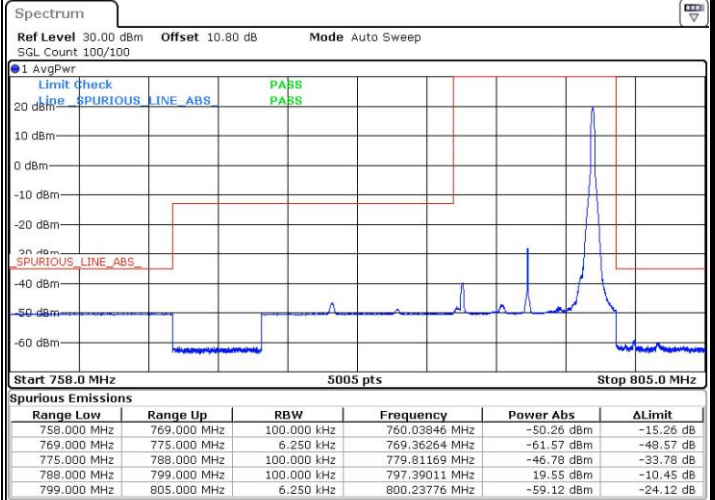

Date: 11.APR.2019 00:52:48

Band Edge / Full RB

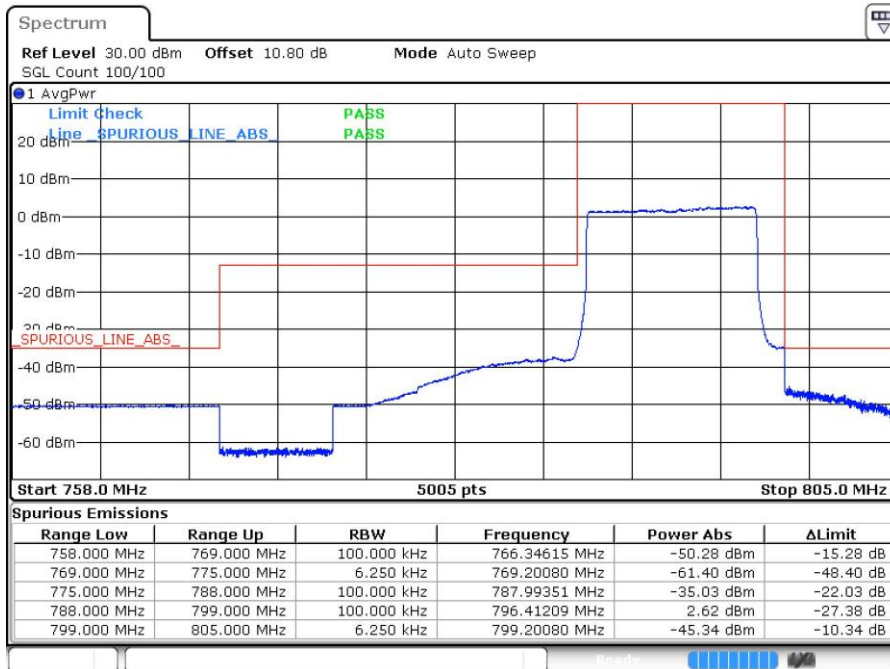


Date: 11.APR.2019 00:46:06




LTE Band 14 / 10MHz / 64QAM

Lowest Band Edge / 1 RB

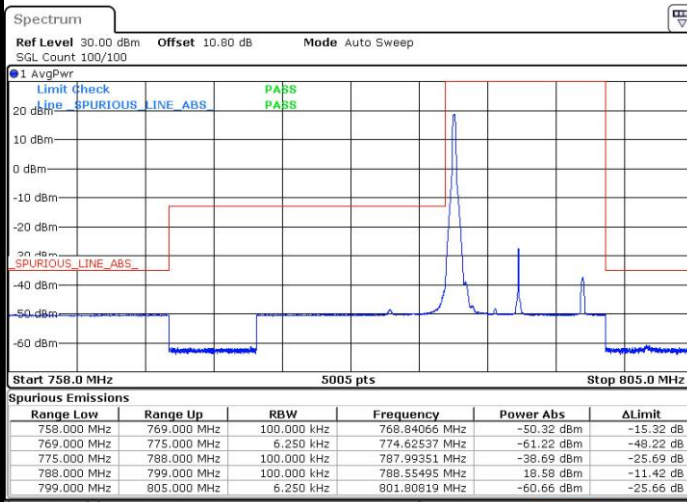


Date: 11.APR.2019 00:57:53

Highest Band Edge / 1 RB

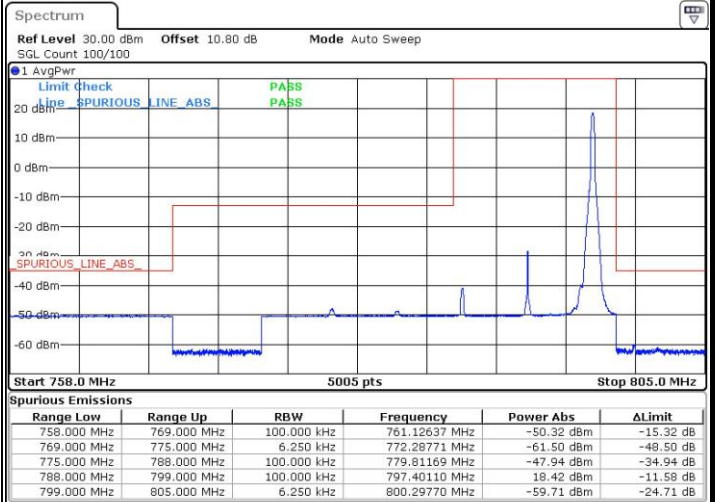

Date: 11.APR.2019 00:59:33

Band Edge / Full RB

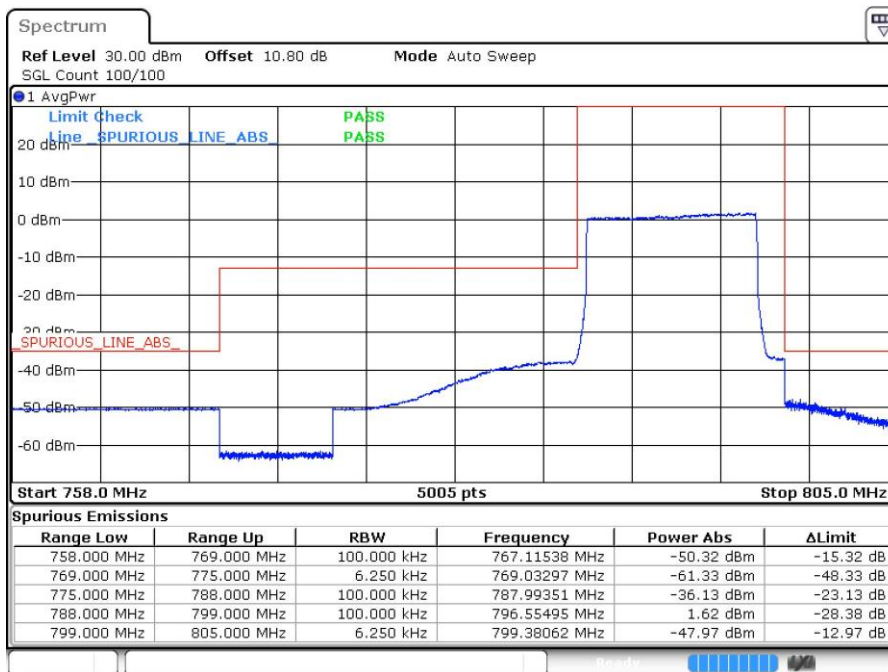


Date: 11.APR.2019 00:58:12






# Conducted Spurious Emission

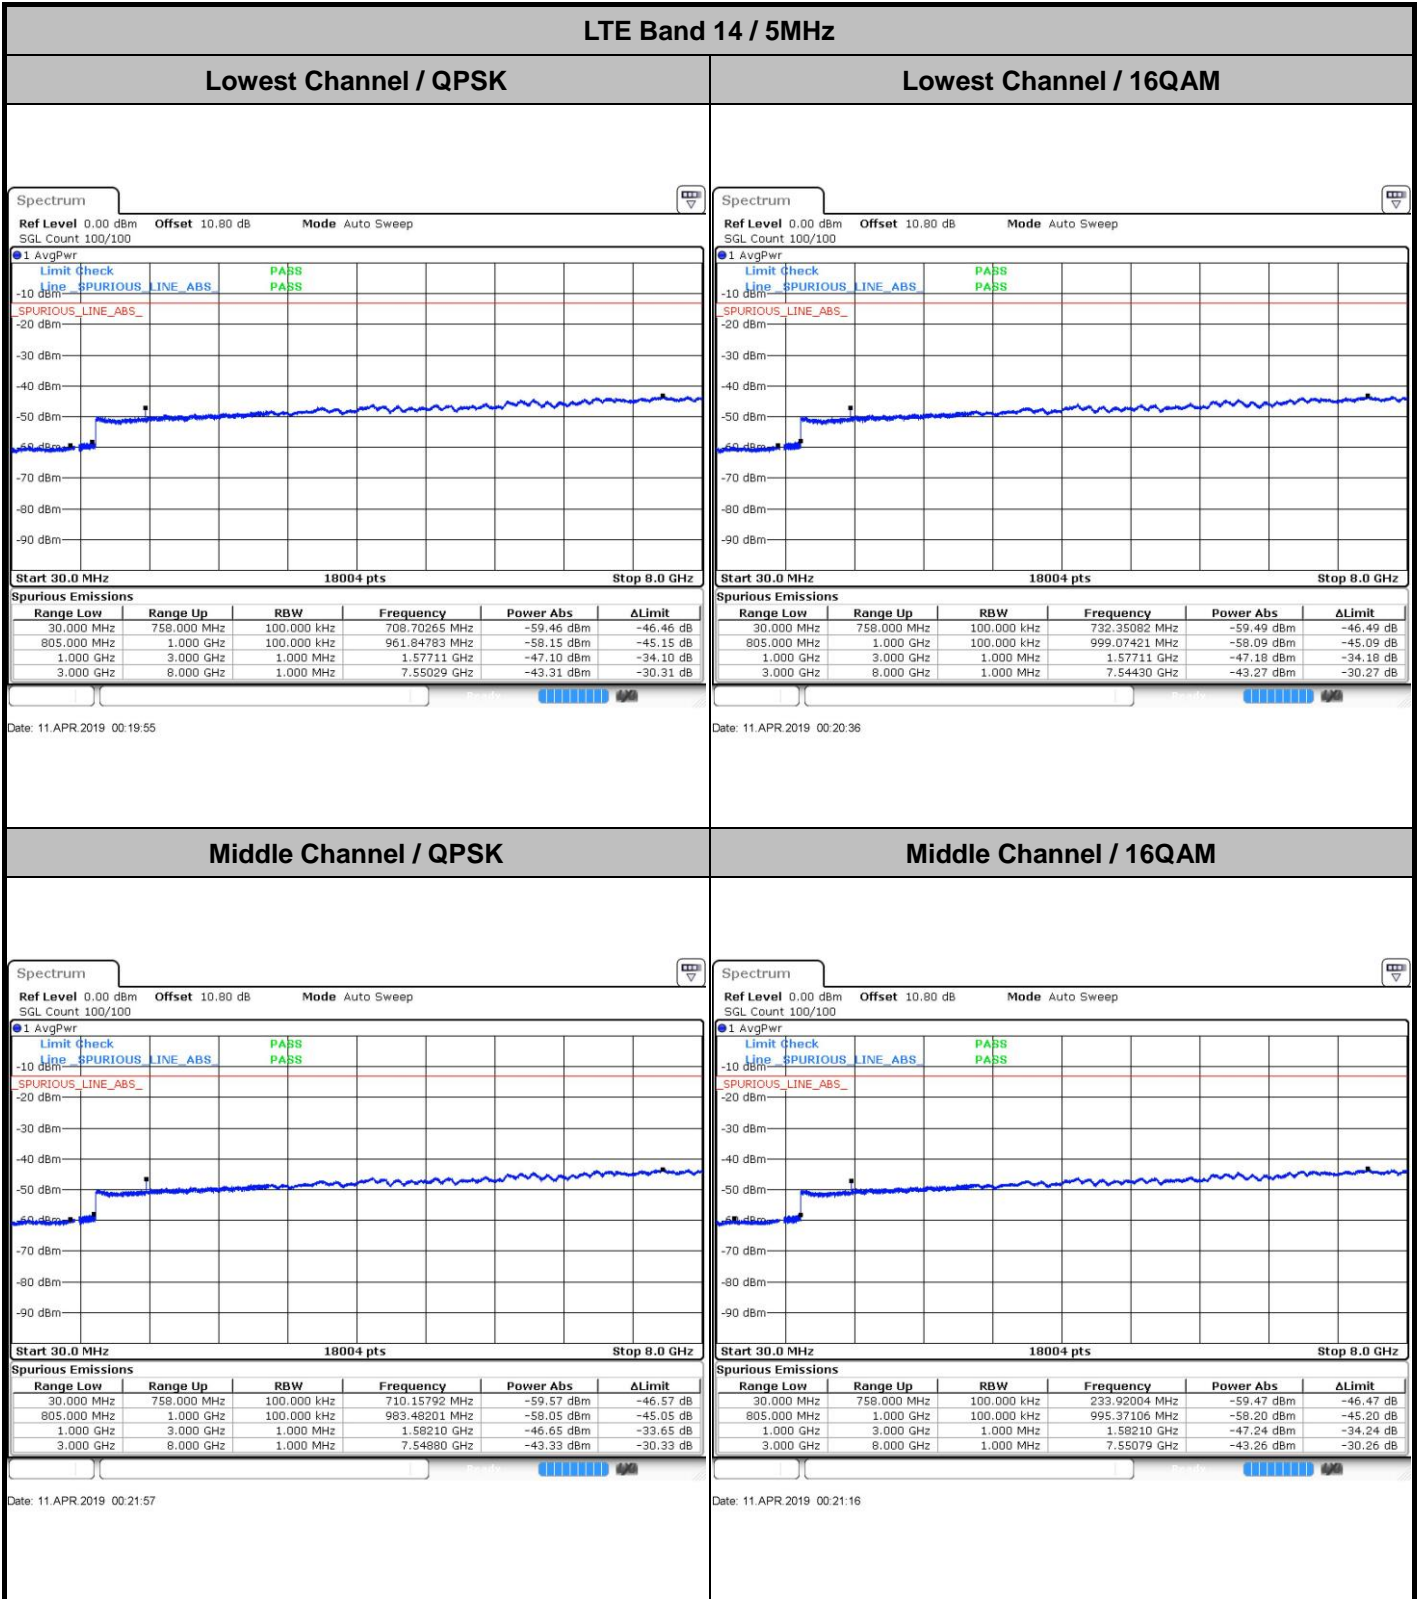




LTE Band 14 / 5MHz

Highest Channel / QPSK

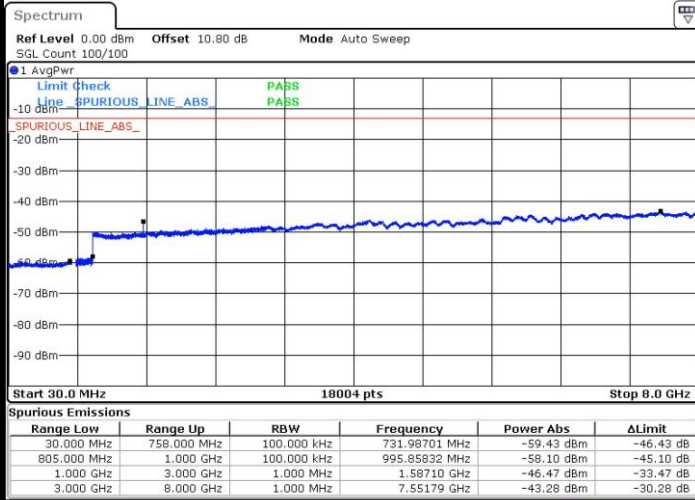

Date: 11.APR.2019 00:30:58


Highest Channel / 16QAM

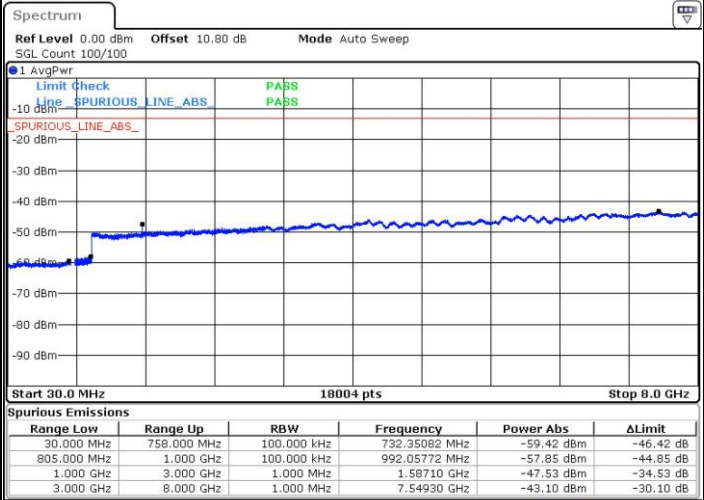

Date: 11.APR.2019 00:31:39


LTE Band 14 / 10MHz

Middle Channel / QPSK

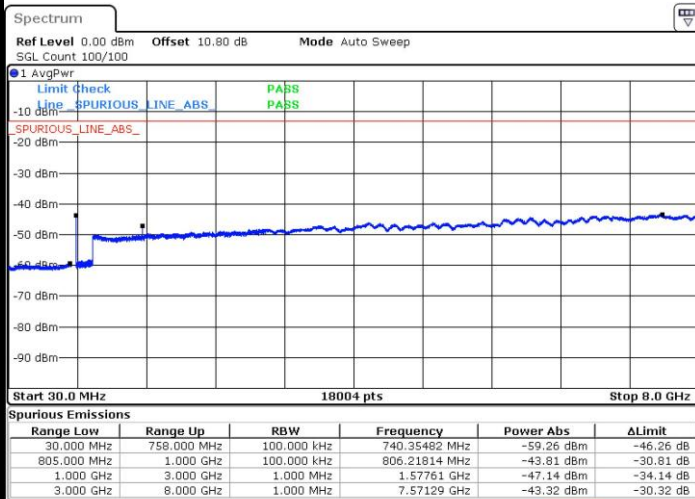

Date: 11.APR.2019 00:54:08

Middle Channel / 16QAM

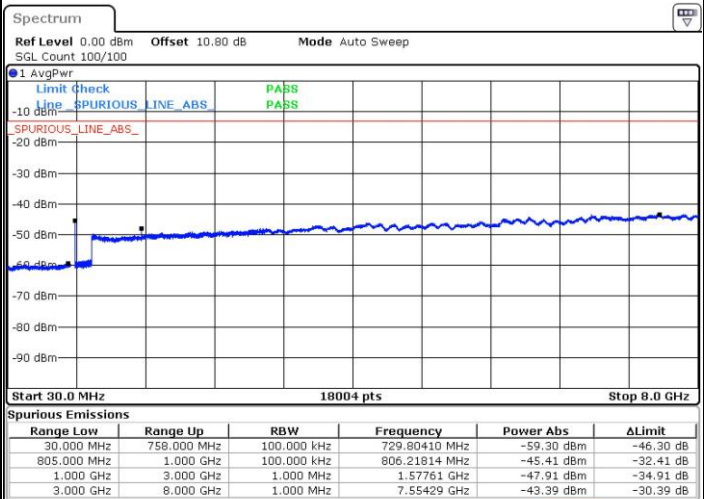



Date: 11.APR.2019 00:53:28



LTE Band 14 / 5MHz

Lowest Channel / 64QAM


Middle Channel / 64QAM

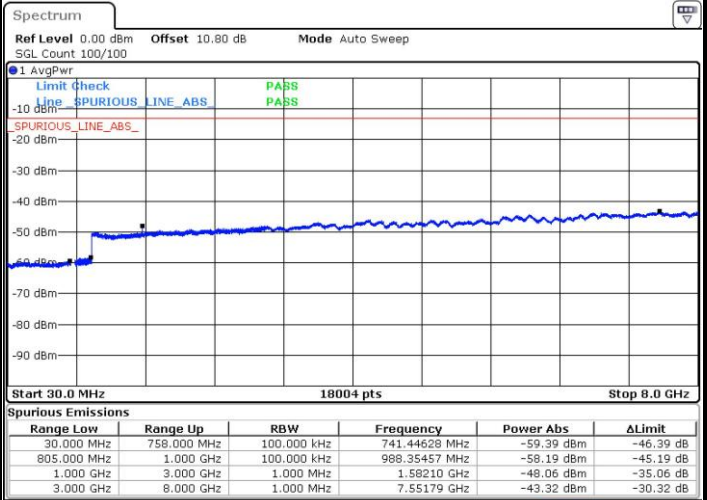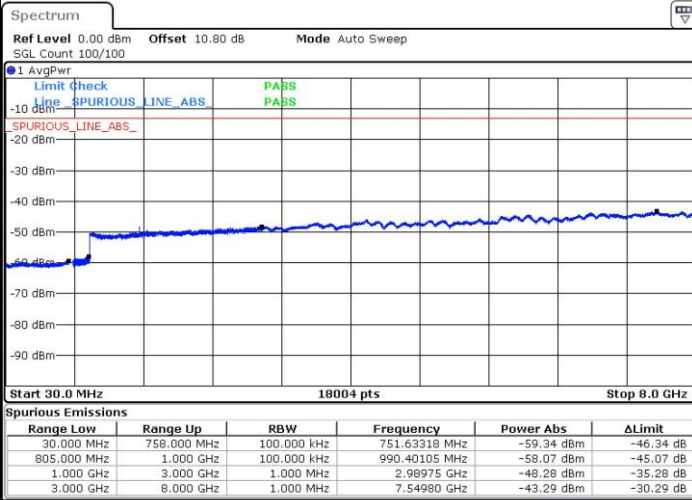

Date: 11.APR.2019 00:36:06

Date: 11.APR.2019 00:36:47

Highest Channel / 64QAM

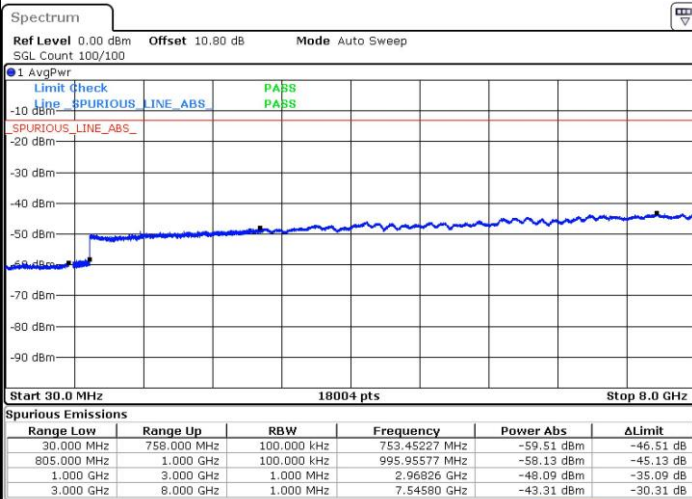


Date: 11.APR.2019 00:41:58



LTE Band 14 / 10MHz

Middle Channel / 64QAM

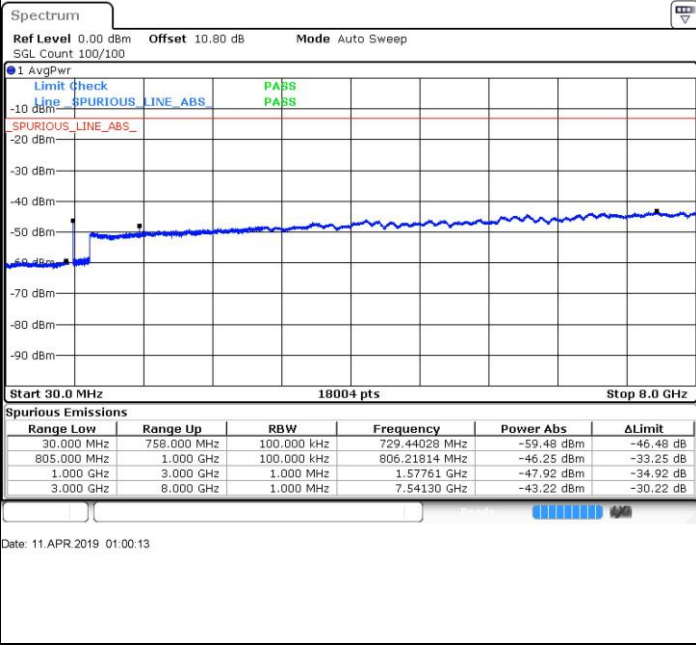



Frequency Stability

Test Conditions		LTE Band 14 (QPSK) / Middle Channel	Limit
Temperature (°C)	Voltage (Volt)	BW 10MHz	Note 2.
		Deviation (ppm)	Result
50	Normal Voltage	0.0054	PASS
40	Normal Voltage	0.0014	
30	Normal Voltage	0.0035	
20(Ref.)	Normal Voltage	0.0000	
10	Normal Voltage	0.0055	
0	Normal Voltage	0.0021	
-10	Normal Voltage	0.0084	
-20	Normal Voltage	0.0016	
-30	Normal Voltage	0.0011	
20	Maximum Voltage	0.0015	
20	Normal Voltage	0.0000	
20	Battery End Point	0.0029	

Note:

1. Normal Voltage =7.6 V. ; Battery End Point (BEP) =7.0 V. ; Maximum Voltage =8.7 V.
2. Note: The frequency fundamental emissions stay within the authorized frequency block.



## Appendix B. Test Results of ERP and Radiated Test

### ERP

LTE Band 14 / 5MHz (Average) (GT - LC = 2.58 dB)							
Channel	Mode	RB		Conducted		ERP	
		Size	Offset	power(dBm)	power(W)	ERP(dBm)	ERP(W)
Lowest	QPSK	1	0	23.68	0.2333	24.11	0.2576
Middle		1	0	23.85	0.2427	24.28	0.2679
Highest		1	0	23.61	0.2296	24.04	0.2535
Lowest	16QAM	1	0	22.92	0.1959	23.35	0.2163
Middle		1	0	23.08	0.2032	23.51	0.2244
Highest		1	0	22.84	0.1923	23.27	0.2123
Lowest	64QAM	1	12	21.93	0.1560	22.36	0.1722
Middle		1	12	22.03	0.1596	22.46	0.1762
Highest		1	12	21.91	0.1552	22.34	0.1714
Limit	ERP < 3W			Result		PASS	

LTE Band 14 / 10MHz (Average) (GT - LC = 2.58 dB)							
Channel	Mode	RB		Conducted		ERP	
		Size	Offset	power(dBm)	power(W)	ERP(dBm)	ERP(W)
Lowest	QPSK	-	-	-	-	-	-
Middle		1	0	23.86	0.2432	24.29	0.2685
Highest		-	-	-	-	-	-
Lowest	16QAM	-	-	-	-	-	-
Middle		1	0	23.18	0.2080	23.61	0.2296
Highest		-	-	-	-	-	-
Lowest	64QAM	-	-	-	-	-	-
Middle		1	0	22.10	0.1622	22.53	0.1791
Highest		-	-	-	-	-	-
Limit	ERP < 3W			Result		PASS	



**Radiated Spurious Emission**

<Sample 2>

**LTE Band 14**

LTE Band 14 / 5MHz / QPSK									
Channel	Frequency ( MHz )	ERP ( dBm )	Limit ( dBm )	Over Limit ( dB )	SPA Reading (dBm)	S.G. Power ( dBm )	TX Cable loss ( dB )	TX Antenna Gain (dBi)	Polarization (H/V)
Lowest	1576	-46.03	-42.15	-3.88	-57.06	-51.63	0.65	8.40	H
	2364	-59.06	-13	-46.06	-75.23	-66.59	0.93	10.61	H
	3153	-56.94	-13	-43.94	-75.23	-65.16	1.17	11.54	H
									H
									H
									H
									H
	1576	-48.25	-42.15	-6.10	-59.05	-53.85	0.65	8.40	V
	2364	-58.60	-13	-45.60	-74.90	-66.13	0.93	10.61	V
	3153	-56.36	-13	-43.36	-74.66	-64.58	1.17	11.54	V
									V
									V
									V
									V



Middle	1584	-46.66	-42.15	-4.51	-57.63	-52.29	0.66	8.44	H
	2372	-58.90	-13	-45.90	-75.05	-66.44	0.93	10.62	H
	3163	-56.73	-13	-43.73	-75.06	-64.97	1.17	11.56	H
									H
									H
									H
									H
	1584	-48.16	-42.15	-6.01	-58.92	-53.79	0.66	8.44	V
	2372	-58.75	-13	-45.75	-75.03	-66.29	0.93	10.62	V
	3163	-56.86	-13	-43.86	-75.22	-65.10	1.17	11.56	V
									V
									V
									V
									V
Highest	1584	-47.10	-42.15	-4.95	-58.07	-52.73	0.66	8.44	H
	2380	-58.88	-13	-45.88	-74.97	-66.43	0.94	10.63	H
	3173	-56.55	-13	-43.55	-74.89	-64.81	1.17	11.58	H
									H
									H
									H
									H
	1584	-48.49	-42.15	-6.34	-59.25	-54.12	0.66	8.44	V
	2380	-58.93	-13	-45.93	-75.16	-66.48	0.94	10.63	V
	3173	-56.64	-13	-43.64	-75.04	-64.90	1.17	11.58	V
									V
									V
									V
									V

Remark: Spurious emissions within 30-1000MHz were found more than 20dB below limit line.





LTE Band 14 / 10MHz / QPSK										
Channel	Frequency ( MHz )	ERP ( dBm )	Limit ( dBm )	Over Limit ( dB )	SPA Reading (dBm)	S.G. Power ( dBm )	TX Cable loss ( dB )	TX Antenna Gain (dBi)	Polarization (H/V)	
Middle	1576	-45.71	-42.15	-3.56	-56.74	-51.31	0.65	8.40	H	
	3152	-56.31	-13	-43.31	-74.6	-64.53	1.17	11.53	H	
	3944	-52.73	-13	-39.73	-73.27	-61.59	1.64	12.66	H	
	4728	-50.00	-13	-37.00	-72.91	-58.63	1.86	12.65	H	
	5520	-50.80	-13	-37.80	-74.69	-59.94	2.01	13.30	H	
										H
										H
	1576	-45.80	-42.15	-3.65	-56.6	-51.40	0.65	8.40	V	
	3152	-56.10	-13	-43.10	-74.39	-64.32	1.17	11.53	V	
	3944	-54.69	-13	-41.69	-75.35	-63.55	1.64	12.66	V	
	4728	-52.00	-13	-39.00	-75.02	-60.63	1.86	12.65	V	
	5520	-52.63	-13	-39.63	-76.65	-61.77	2.01	13.30	V	
										V
										V

Remark: Spurious emissions within 30-1000MHz were found more than 20dB below limit line.



<Sample 5>

**LTE Band 14**

LTE Band 14 / 10MHz / QPSK									
Channel	Frequency ( MHz )	ERP ( dBm )	Limit ( dBm )	Over Limit ( dB )	SPA Reading (dBm)	S.G. Power ( dBm )	TX Cable loss ( dB )	TX Antenna Gain (dBi)	Polarization (H/V)
Middle	1576	-48.60	-42.15	-6.45	-59.63	-54.20	0.65	8.40	H
	2368	-59.54	-13	-46.54	-75.71	-67.07	0.93	10.62	H
	4731	-53.33	-13	-40.33	-76.25	-61.96	1.86	12.65	H
									H
									H
									H
									H
	1576	-51.41	-42.15	-9.26	-62.21	-57.01	0.65	8.40	V
	2368	-59.41	-13	-46.41	-75.72	-66.94	0.93	10.62	V
	4731	-52.12	-13	-39.12	-75.14	-60.75	1.86	12.65	V
									V
									V
									V
									V

**Remark:** Spurious emissions within 30-1000MHz were found more than 20dB below limit line.