



# FCC RADIO TEST REPORT

**FCC ID** : UZ7TC78A1  
**Equipment** : Touch Computer  
**Brand Name** : Zebra  
**Model Name** : TC78A1  
**Applicant** : Zebra Technologies Corporation  
1 Zebra Plaza, Holtsville, NY 11742  
**Manufacturer** : Zebra Technologies Corporation  
1 Zebra Plaza, Holtsville, NY 11742  
**Standard** : FCC 47 CFR Part 2, 90(R)

The product was received on Aug. 19, 2022 and testing was performed from Aug. 26, 2022 to Oct. 14, 2022. We, Sporton International Inc. EMC & Wireless Communications Laboratory, would like to declare that the tested sample has been evaluated in accordance with the test procedures given in ANSI / TIA-603-E and has been in compliance with the applicable technical standards.

The test results in this report apply exclusively to the tested model / sample. Without written approval from Sporton International Inc. EMC & Wireless Communications Laboratory, the test report shall not be reproduced except in full.

*Louis Wu*

Approved by: Louis Wu

**Sporton International Inc. EMC & Wireless Communications Laboratory**

No. 52, Huaya 1st Rd., Guishan Dist., Taoyuan City 333, Taiwan (R.O.C.)



## Table of Contents

History of this test report.....	3
Summary of Test Result.....	4
<b>1 General Description .....</b>	<b>5</b>
1.1 Product Feature of Equipment Under Test.....	5
1.2 Product Specification of Equipment Under Test.....	6
1.3 Modification of EUT .....	6
1.4 Testing Site.....	6
1.5 Applied Standards .....	7
<b>2 Test Configuration of Equipment Under Test .....</b>	<b>8</b>
2.1 Test Mode.....	8
2.2 Connection Diagram of Test System.....	9
2.3 Support Unit used in test configuration and system .....	9
2.4 Measurement Results Explanation Example.....	9
2.5 Frequency List of Low/Middle/High Channels .....	10
<b>3 Conducted Test Items.....</b>	<b>11</b>
3.1 Measuring Instruments .....	11
3.2 Conducted Output Power Measurement and ERP.....	12
3.3 Peak-to-Average Ratio .....	13
3.4 Occupied Bandwidth.....	14
3.5 Conducted Band Edge .....	15
3.6 Emission Mask.....	16
3.7 Conducted Spurious Emission .....	17
3.8 Frequency Stability .....	18
<b>4 Radiated Test Items .....</b>	<b>19</b>
4.1 Measuring Instruments .....	19
4.2 Radiated Spurious Emission .....	21
<b>5 List of Measuring Equipment.....</b>	<b>22</b>
<b>6 Uncertainty of Evaluation .....</b>	<b>24</b>
<b>Appendix A. Test Results of Conducted Test</b>	
<b>Appendix B. Test Results of Radiated Test</b>	
<b>Appendix C. Test Setup Photographs</b>	





### Summary of Test Result

Report Clause	Ref Std. Clause	Test Items	Result (PASS/FAIL)	Remark
3.2	§2.1046	Conducted Output Power	Reporting only	-
	§90.542 (a)(7)	Effective Radiated Power	Pass	-
3.3	-	Peak-to-Average Ratio	Reporting only	-
3.4	§2.1049	Occupied Bandwidth	Reporting only	-
3.5	§2.1053 §90.543 (e)(2)	Conducted Band Edge Measurement	Pass	-
3.6	§2.1051 §90.210 (n)	Emission Mask	Pass	-
3.7	§2.1053 §90.543 (e)(3)	Conducted Spurious Emission	Pass	-
3.8	§2.1055 §90.539 (e)	Frequency Stability Temperature & Voltage	Pass	-
4.2	§2.1053 §90.543 (e)(3) §90.543 (f)	Radiated Spurious Emission	Pass	12.36 dB under the limit at 1577.000 MHz

**Declaration of Conformity:**

1. The test results (PASS/FAIL) with all measurement uncertainty excluded are presented in accordance with the regulation limits or requirements declared by manufacturers.  
It's means measurement values may risk exceeding the limit of regulation standards, if measurement uncertainty is include in test results.
2. The measurement uncertainty please refer to report "Uncertainty of Evaluation".

**Comments and Explanations:**

The product specifications of the EUT presented in the report are declared by the manufacturer who shall take full responsibility for the authenticity.

**Reviewed by: Wei Chen****Report Producer: Clio Lo**



# 1 General Description

## 1.1 Product Feature of Equipment Under Test

Product Feature	
Equipment	Touch Computer
Brand Name	Zebra
Model Name	TC78A1
FCC ID	UZ7TC78A1
Sample 1	SE5500 + Premium config
Sample 2	SE4770 + Base config
Sample 3	SE5500 + Base config
EUT supports Radios application	GSM/EGPRS/WCDMA/HSPA/LTE/5G NR/NFC/GNSS WLAN 11a/b/g/n HT20/HT40 WLAN 11ac VHT20/VHT40/VHT80/VHT160 WLAN 11ax HE20/HE40/HE80/HE160 Bluetooth BR/EDR/LE
HW Version	EV2
SW Version	athena_A11_userdebug_GMS_RelKey_2022-07-14-1733 _product_SE
MFD	11JUN22
DUT Stage	Identical Prototype

Remark: The EUT's information above is declared by manufacturer.

Specification of Accessories				
Adapter	Brand Name	Zebra	Part Number	PWR-WUA5V12W0US
Battery 1X	Brand Name	Zebra	Part Number	BT-000442-0020
Battery 1.5X	Brand Name	Zebra	Part Number	BT-000442-0820
Wireless Battery	Brand Name	Zebra	Part Number	BT-000442-002A
USB TYPE A to TYPE C cable	Brand Name	Zebra	Part Number	CBL-TC5X-USBC2A-01
USB TYPE C to 3.5mm audio connector	Brand Name	Zebra	Part Number	ADP-USBC-35MM1-01
3.5mm Earphone	Brand Name	Zebra	Part Number	HDST-35MM-PTVP-01
USB TYPE C Earphone	Brand Name	Zebra	Part Number	HPST-USBC-PTT1-01
Trigger Handle	Brand Name	Zebra	Part Number	TRG-NGTC5-ELEC-01
Soft Holster	Brand Name	Zebra	Part Number	SG-NGTC5TC7-HLSTR-01
TC53/TC58 RUGGED BOOT	Brand Name	Zebra	Part Number	SG-NGTC5EXO1-01



## 1.2 Product Specification of Equipment Under Test

Product Specification is subject to this standard	
Tx Frequency	790.5 ~ 795.5 MHz
Rx Frequency	760.5 ~ 765.5 MHz
Bandwidth	5MHz / 10MHz
Maximum Output Power to Antenna	23.39 dBm
Antenna Type	PIFA Antenna
Antenna Gain	0.37 dBi
Type of Modulation	QPSK / 16QAM / 64QAM / 256QAM

**Remark:** The above EUT's information was declared by manufacturer. Please refer to Comments and Explanations in report summary.

## 1.3 Modification of EUT

No modifications made to the EUT during the testing.

## 1.4 Testing Site

Test Site	Sporton International Inc. EMC & Wireless Communications Laboratory
Test Site Location	No.52, Huaya 1st Rd., Guishan Dist., Taoyuan City 333, Taiwan (R.O.C.) TEL: +886-3-327-3456 FAX: +886-3-328-4978
Test Site No.	<b>Sporton Site No.</b> TH03-HY
Test Engineer	George Chen
Temperature (°C)	23.4~25.2
Relative Humidity (%)	52~59

Test Site	Sporton International Inc. Wensan Laboratory
Test Site Location	No.58, Aly. 75, Ln. 564, Wenhua 3rd, Rd., Guishan Dist., Taoyuan City 333010, Taiwan (R.O.C.) TEL: +886-3-327-0868 FAX: +886-3-327-0855
Test Site No.	<b>Sporton Site No.</b> 03CH12-HY (TAF Code: 3786)
Test Engineer	Jack Cheng, Wilson Wu, Jesse Fan and Tim Lee
Temperature (°C)	20~25
Relative Humidity (%)	50~60
Remark	The Radiated Spurious Emission test item subcontracted to Sporton International Inc. Wensan Laboratory.

**Note:** The test site complies with ANSI C63.4 2014 requirement.

FCC Designation No.: TW1190 and TW3786



## **1.5 Applied Standards**

According to the specifications declared by the manufacturer, the EUT must comply with the requirements of the following standards:

- ♦ ANSI C63.26-2015
- ♦ FCC 47 CFR Part 2, Part 90(R)
- ♦ ANSI / TIA-603-E
- ♦ FCC KDB 971168 D01 Power Meas. License Digital Systems v03r01
- ♦ FCC KDB 412172 D01 Determining ERP and EIRP v01r01
- ♦ FCC KDB 414788 D01 Radiated Test Site v01r01

**Remark:**

1. All the test items were validated and recorded in accordance with the standards without any modification during the testing.
2. This EUT has also been tested and complied with the requirements of FCC Part 15, Subpart B, recorded in a separate test report.
3. The TAF code is not including all the FCC KDB listed without accreditation.



## 2 Test Configuration of Equipment Under Test

### 2.1 Test Mode


Antenna port conducted and radiated test items listed below are performed according to KDB 971168 D01 Power Meas. License Digital Systems v03r01 with maximum output power.

For radiated measurement, the measured emission level of the EUT was maximized by rotating the EUT on a turntable, adjusting the orientation of the EUT and EUT antenna in three orthogonal axis (X: flat, Y: portrait, Z: landscape), and adjusting the measurement antenna orientation, following C63.26 exploratory test procedures and only the worst case emissions were reported in this report..

Conducted Test Cases	Band	Bandwidth (MHz)						Modulation				RB #			Test Channel		
		1.4	3	5	10	15	20	QPSK	16QAM	64QAM	256QAM	1	Half	Full	L	M	H
Max. Output Power	14	-	-	v	v	-	-	v	v	v	v	v	v	v	v	v	v
Peak-to-Average Ratio	14	-	-	v	v	-	-	v	v	v	v			v		v	
26dB and 99% Bandwidth	14	-	-	v	v	-	-	v	v	v	v			v		v	
Conducted Band Edge	14	-	-	v	v	-	-	v	v	v	v	v		v	v		v
Emission Mask	14	-	-	v	v	-	-	v	v	v	v	v		v	v	v	v
Conducted Spurious Emission	14	-	-	v	v	-	-	v				v			v	v	v
Frequency Stability	14	-	-		v	-	-	v						v		v	
E.R.P	14	-	-	v	v	-	-	v	v	v	v	Max. Power					
Radiated Spurious Emission	14	Worst Case												v	v	v	
Remark	<ol style="list-style-type: none"> <li>The mark "v " means that this configuration is chosen for testing</li> <li>The mark "-" means that this bandwidth is not supported.</li> <li>The device is investigated from 30MHz to 10 times of fundamental signal for radiated spurious emission test under different RB size/offset and modulations in exploratory test. Subsequently, only the worst case emissions are reported.</li> <li>All the radiated test cases were performed with Battery 1X and Sample 1.</li> <li>One representative bandwidth is selected to perform PAR and frequency stability.</li> </ol>																



## 2.2 Connection Diagram of Test System

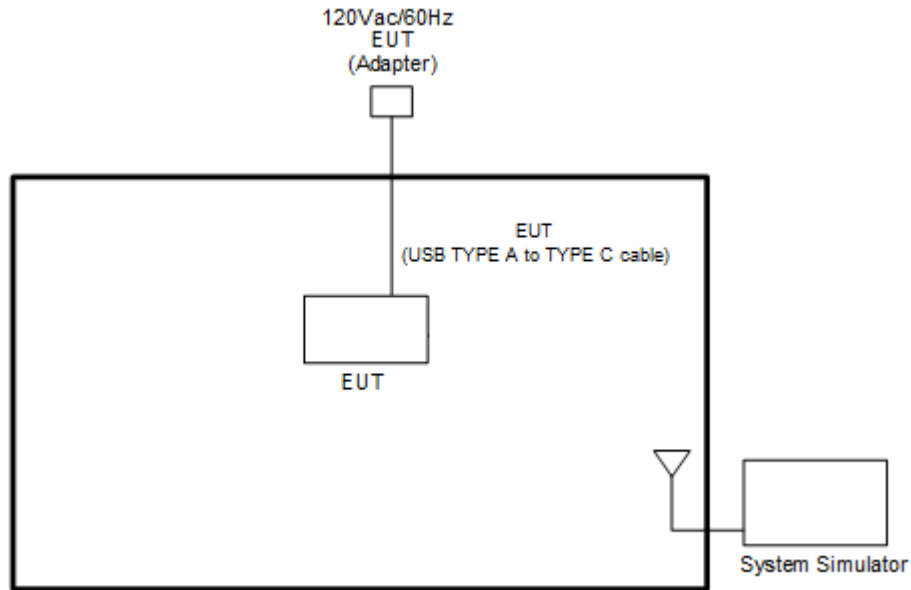

## 2.3 Support Unit used in test configuration and system

Item	Equipment	Brand Name	Model No.	FCC ID	Data Cable	Power Cord
1.	System Simulator	Anritsu	MT8821C	N/A	N/A	Unshielded, 1.8 m

## 2.4 Measurement Results Explanation Example

### For all conducted test items:

The offset level is set in the spectrum analyzer to compensate the RF cable loss and attenuator factor between EUT conducted output port and spectrum analyzer. With the offset compensation, the spectrum analyzer reading level is exactly the EUT RF output level.

The spectrum analyzer offset is derived from RF cable loss and attenuator factor.

Offset = RF cable loss + attenuator factor.

Following shows an offset computation example with cable loss 4.5 dB and 10dB attenuator.

Example :

Offset(dB) = RF cable loss(dB) + attenuator factor(dB).

$$= 4.5 + 10 = 14.5 \text{ (dB)}$$



## 2.5 Frequency List of Low/Middle/High Channels

LTE Band 14 Channel and Frequency List				
BW [MHz]	Channel/Frequency(MHz)	Lowest	Middle	Highest
10	Channel	-	23330	-
	Frequency	-	793	-
5	Channel	23305	23330	23355
	Frequency	790.5	793	795.5


### 3 Conducted Test Items

#### 3.1 Measuring Instruments


See list of measuring instruments of this test report.

##### 3.1.1 Test Setup


##### 3.1.2 Conducted Output Power

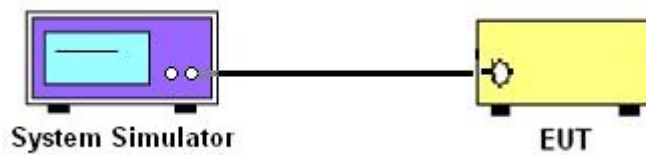

##### 3.1.3 Peak-to-Average Ratio, Occupied Bandwidth, Conducted Band-Edge, Emission Mask, and Conducted Spurious Emission

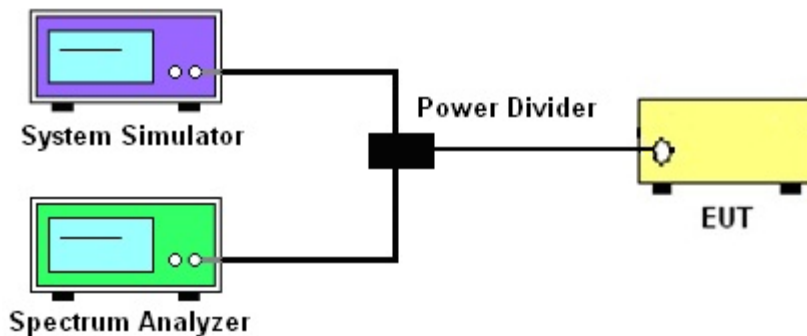

##### 3.1.4 Frequency Stability

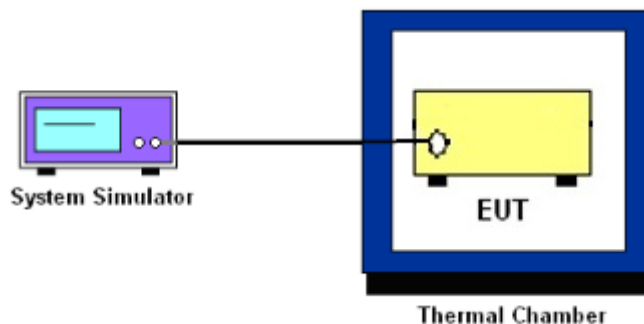

##### 3.1.5 Test Result of Conducted Test

Please refer to Appendix A.



## 3.2 Conducted Output Power Measurement and ERP

### 3.2.1 Description of the Conducted Output Power Measurement and ERP Measurement

A base station simulator was used to establish communication with the EUT. Its parameters were set to transmit the maximum power on the EUT. The measured power in the radio frequency on the transmitter output terminals shall be reported.

The ERP of mobile transmitters must not exceed 3 Watts for LTE Band 14.

According to KDB 412172 D01 Power Approach,

$EIRP = P_T + G_T - L_C$ ,  $ERP = EIRP - 2.15$ , where

$P_T$  = transmitter output power in dBm

$G_T$  = gain of the transmitting antenna in dBi

$L_C$  = signal attenuation in the connecting cable between the transmitter and antenna in dB

### 3.2.2 Test Procedures

1. The transmitter output port was connected to base station.
2. Set EUT at maximum power through base station.
3. Select lowest, middle, and highest channels for each band and different modulation.
4. Measure and record the power level from the system simulator.



### **3.3 Peak-to-Average Ratio**

#### **3.3.1 Description of the PAR Measurement**

Power Complementary Cumulative Distribution Function (CCDF) curves provide a means for characterizing the power peaks of a digitally modulated signal on a statistical basis. A CCDF curve depicts the probability of the peak signal amplitude exceeding the average power level. Most contemporary measurement instrumentation include the capability to produce CCDF curves for an input signal provided that the instrument's resolution bandwidth can be set wide enough to accommodate the entire input signal bandwidth. In measuring transmissions in this band using an average power technique, the peak-to-average ratio (PAR) of the transmission may not exceed 13 dB.

#### **3.3.2 Test Procedures**

The testing follows ANSI C63.26-2015 Section 5.2.6

1. The EUT was connected to spectrum and system simulator via a power divider.
2. Set the CCDF (Complementary Cumulative Distribution Function) option in spectrum analyzer.
3. The highest RF powers were measured and recorded the maximum PAPR level associated with a probability of 0.1 %.
4. Record the deviation as Peak to Average Ratio.



## 3.4 Occupied Bandwidth

### 3.4.1 Description of Occupied Bandwidth Measurement

The occupied bandwidth is the width of a frequency band such that, below the lower and above the upper frequency limits, the mean powers emitted are each equal to a specified percentage 0.5% of the total mean transmitted power.

The 26 dB emission bandwidth is defined as the frequency range between two points, one above and one below the carrier frequency, at which the spectral density of the emission is attenuated 26 dB below the maximum in-band spectral density of the modulated signal. Spectral density (power per unit bandwidth) is to be measured with a detector of resolution bandwidth equal to approximately 1.0% of the emission bandwidth.

### 3.4.2 Test Procedures

The testing follows ANSI C63.26-2015 Section 5.4.3 (26dB) and Section 5.4.4 (99OB)

1. The EUT was connected to spectrum analyzer and system simulator via a power divider.
2. The spectrum analyzer center frequency is set to the nominal EUT channel center frequency. The span range for the spectrum analyzer shall be between two and five times the anticipated OBW.
3. The nominal resolution bandwidth (RBW) shall be in the range of 1 to 5 % of the anticipated OBW, and the VBW shall be at least 3 times the RBW.
4. Set the detection mode to peak, and the trace mode to max hold.
5. Determine the reference value: Set the EUT to transmit a modulated signal. Allow the trace to stabilize. Set the spectrum analyzer marker to the highest level of the displayed trace.  
(this is the reference value)
6. Determine the “-26 dB down amplitude” as equal to (Reference Value – X).
7. Place two markers, one at the lowest and the other at the highest frequency of the envelope of the spectral display such that each marker is at or slightly below the “-X dB down amplitude” determined in step 6. If a marker is below this “-X dB down amplitude” value it shall be placed as close as possible to this value. The OBW is the positive frequency difference between the two markers.
8. Use the 99 % power bandwidth function of the spectrum analyzer and report the measured bandwidth.



## 3.5 Conducted Band Edge

### 3.5.1 Description of Conducted Band Edge Measurement

90.543(e)

- (1) On all frequencies between 769-775 MHz and 799-805 MHz, by a factor not less than  $76 + 10 \log (P)$  dB in a 6.25 kHz band segment, for base and fixed stations.
- (2) On all frequencies between 769-775 MHz and 799-805 MHz, by a factor not less than  $65 + 10 \log (P)$  dB in a 6.25 kHz band segment, for mobile and portable stations.
- (3) On any frequency between 775-788 MHz, above 805 MHz, and below 758 MHz, by at least  $43 + 10 \log (P)$  dB.

### 3.5.2 Test Procedures

The testing follows FCC KDB 971168 D01 v03r01 Section 6.1.

1. The EUT was connected to spectrum analyzer and system simulator via a power divider.
2. The band edges of low and high channels for the highest RF powers were measured.
3. Set RBW  $\geq 1\%$  EBW in the 100kHz band immediately outside and adjacent to the band edge.
4. Beyond the 100kHz band from the band edge, RBW=100kHz was used.
5. Set spectrum analyzer with RMS detector.
6. The RF fundamental frequency should be excluded against the limit line in the operating frequency band.
7. Checked that all the results comply with the emission limit line.

The limit line is derived from  $43 + 10\log(P)$ dB below the transmitter power P(Watts)



## **3.6 Emission Mask**

### **3.6.1 Description of Emissions Mask Measurement**

Transmitters designed must meet the emission mask comply with the emission mask provisions of FCC Part 90.210(n).

### **3.6.2 Test Procedures**

The testing follows FCC KDB 971168 D01 v03r01 Section 6.0.

1. The EUT was connected to spectrum analyzer and system simulator via a power divider.
2. The power of the modulated signal was measured on a spectrum analyzer using an RMS and 10 second sweep time in order to maximize the level.
3. The RF fundamental frequency should be excluded against the limit line in the operating frequency band.





## 3.7 Conducted Spurious Emission

### 3.7.1 Description of Conducted Spurious Emission Measurement

The power of any emission outside of the authorized operating frequency ranges must be lower than the transmitter power (P) by a factor of at least  $43 + 10 \log (P)$  dB.

It is measured by means of a calibrated spectrum analyzer and scanned from 30MHz up to a frequency including its 10<sup>th</sup> harmonic.

### 3.7.2 Test Procedures

The testing follows FCC KDB 971168 D01 v03r01 Section 6.1.

1. The EUT was connected to spectrum analyzer and base station via power divider.
2. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.
3. The middle channel for the highest RF power within the transmitting frequency was measured.
4. The conducted spurious emission for the whole frequency range was taken.
5. Make the measurement with the spectrum analyzer's RBW = 1MHz, VBW = 3MHz.
6. Set spectrum analyzer with RMS detector.
7. Taking the record of maximum spurious emission.
8. The RF fundamental frequency should be excluded against the limit line in the operating frequency band.
9. The limit line is derived from  $43 + 10\log(P)$ dB below the transmitter power P(Watts)



## **3.8 Frequency Stability**

### **3.8.1 Description of Frequency Stability Measurement**

The frequency stability shall be sufficient to ensure that the fundamental emission stays within the authorized frequency block.

### **3.8.2 Test Procedures for Temperature Variation**

The testing follows FCC KDB 971168 D01 v03r01 Section 9.0.

1. The EUT was set up in the thermal chamber and connected with the base station.
2. With power OFF, the temperature was decreased to -30°C and the EUT was stabilized before testing. Power was applied and the maximum change in frequency was recorded within one minute.
3. With power OFF, the temperature was raised in 10°C step up to 50°C. The EUT was stabilized at each step for at least half an hour. Power was applied and the maximum frequency change was recorded within one minute.

### **3.8.3 Test Procedures for Voltage Variation**

The testing follows FCC KDB 971168 D01 v03r01 Section 9.0.

1. The EUT was placed in a temperature chamber at 20±5° C and connected with the base station.
2. The power supply voltage to the EUT was varied from 85% to 115% of the nominal value measured at the input to the EUT.
3. The variation in frequency was measured for the worst case.


## 4 Radiated Test Items

### 4.1 Measuring Instruments


See list of measuring instruments of this test report.

#### 4.1.1 Test Setup


For radiated test below 30MHz

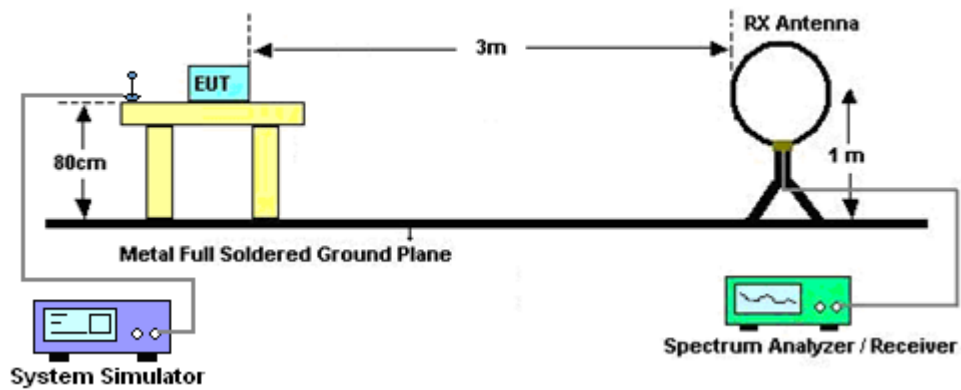

For radiated test from 30MHz to 1GHz

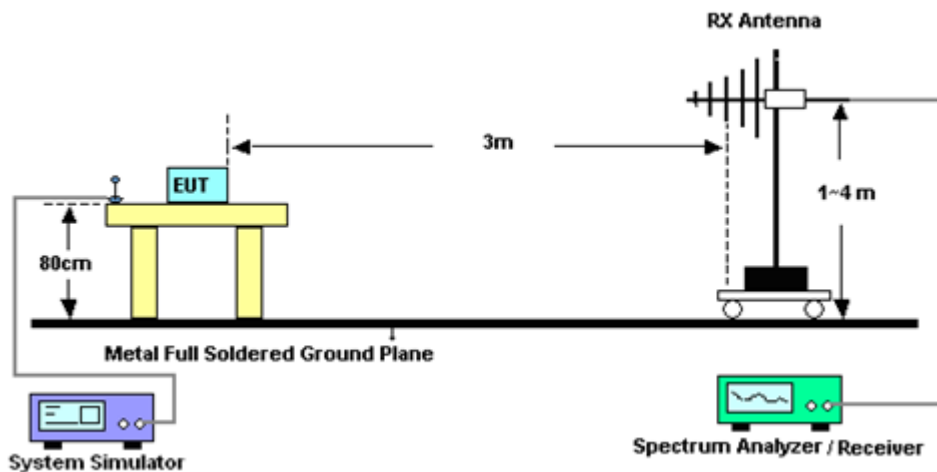

For radiated test above 1GHz

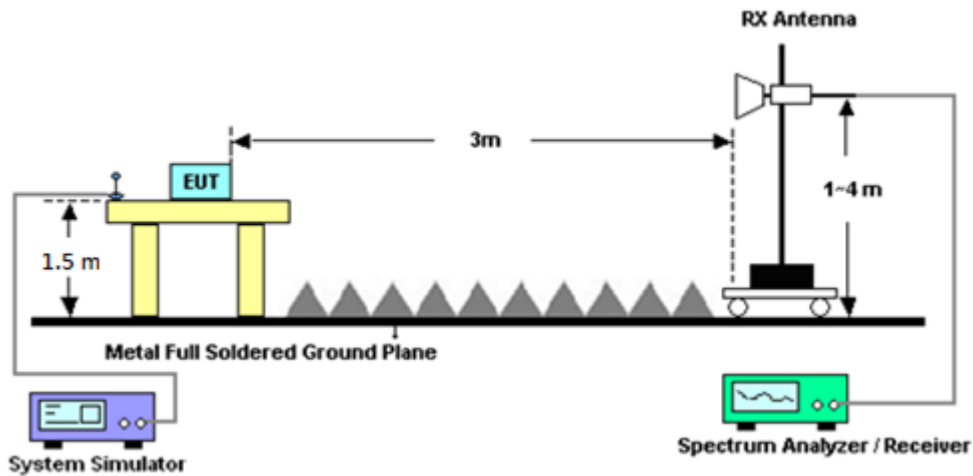

#### 4.1.2 Test Result of Radiated Test

Please refer to Appendix B.

**Note:**

The low frequency, which started from 9 kHz to 30MHz, was pre-scanned and the result which was 20dB lower than the limit line was not reported.

There is adequate comparison measurement of both open-field test site and alternative test site - semi-Anechoic chamber according to 414788 D01 Radiated Test Site v01r01, and the result came out very similar.



## 4.2 Radiated Spurious Emission

### 4.2.1 Description of Radiated Spurious Emission

The radiated spurious emission was measured by substitution method according to ANSI / TIA-603-E. The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitter power (P) by a factor of at least  $43 + 10 \log (P)$  dB.

For operations in the 758-775 MHz and 788-805 MHz bands, all emissions including harmonics in the band 1559–1610 MHz shall be limited to -70 dBW/MHz equivalent isotropically radiated power (EIRP) for wideband signals, and -80 dBW EIRP for discrete emissions of less than 700 Hz bandwidth. For the purpose of equipment authorization, a transmitter shall be tested with an antenna that is representative of the type that will be used with the equipment in normal operation.

The spectrum is scanned from 30 MHz up to a frequency including its 10th harmonic.

### 4.2.2 Test Procedures

The testing follows FCC KDB 971168 D01 v03r01 Section 7 and ANSI / TIA-603-E Section 2.2.12.

1. The EUT was placed on a turntable with 0.8 meter for frequency below 1GHz and 1.5 meter for frequency above 1GHz respectively above ground.
2. The EUT was set 3 meters from the receiving antenna, which was mounted on the antenna tower.
3. The table was rotated 360 degrees to determine the position of the highest spurious emission.
4. The height of the receiving antenna is varied between one meter and four meters to search the maximum spurious emission for both horizontal and vertical polarizations.
5. Make the measurement with the spectrum analyzer's RBW = 1MHz, VBW = 3MHz, Sweep = 500ms, Taking the record of maximum spurious emission.
6. A horn antenna was substituted in place of the EUT and was driven by a signal generator.
7. Tune the output power of signal generator to the same emission level with EUT maximum spurious emission.
8. Taking the record of output power at antenna port.
9. Repeat step 7 to step 8 for another polarization.
10. The RF fundamental frequency should be excluded against the limit line in the operating frequency band.
11. The limit line is derived from  $43 + 10\log(P)$ dB below the transmitter power P(Watts)



## 5 List of Measuring Equipment

Instrument	Brand Name	Model No.	Serial No.	Characteristics	Calibration Date	Test Date	Due Date	Remark
Radio Communication Analyzer	Anritsu	MT8821C	6262025280	LTE FDD/TDD LTE-2CC DLCA/ULCA	Oct. 29, 2021	Aug. 26, 2022~ Oct. 14, 2022	Oct. 28, 2022	Conducted (TH03-HY)
Spectrum Analyzer	Rohde & Schwarz	FSV40	101908	10Hz~40GHz	Oct. 01, 2021	Aug. 26, 2022~ Sep. 29, 2022	Sep. 30, 2022	Conducted (TH03-HY)
Spectrum Analyzer	Rohde & Schwarz	FSV40	101908	10Hz~40GHz	Sep. 27, 2022	Sep. 30, 2022~ Oct. 14, 2022	Sep. 26, 2023	Conducted (TH03-HY)
Thermal Chamber	ESPEC	SH-641	92013720	-40℃ ~90℃	Sep. 09, 2021	Aug. 26, 2022~ Sep. 07, 2022	Sep. 08, 2022	Conducted (TH03-HY)
Thermal Chamber	ESPEC	SH-641	92013720	-40℃ ~90℃	Sep. 07, 2022	Sep. 08, 2022~ Oct. 14, 2022	Sep. 06, 2023	Conducted (TH03-HY)
DC Power Supply	GW Instek	GPP-2323	GES906037	0V~64V ; 0A~6A	Jan. 06, 2022	Aug. 26, 2022~ Oct. 14, 2022	Jan. 05, 2023	Conducted (TH03-HY)
Coupler	Warison	20dB 25W SMA Directional Coupler	#B	1-18GHz	Jan. 07, 2022	Aug. 26, 2022~ Oct. 14, 2022	Jan. 06, 2023	Conducted (TH03-HY)
Loop Antenna	Rohde & Schwarz	HFH2-Z2	100488	9 kHz~30 MHz	May 13, 2022	Sep. 08, 2022~ Sep. 26, 2022	May 12, 2023	Radiation (03CH12-HY)
Bilog Antenna	TESEQ	CBL 6111D & 00800N1D01N- 06	40103 & 07	30MHz~1GHz	Apr. 24, 2022	Sep. 08, 2022~ Sep. 26, 2022	Apr. 23, 2023	Radiation (03CH12-HY)
Bilog Antenna	TESEQ	CBL 6111D & N-6-06	35414 & AT-N0602	30MHz~1GHz	Oct. 09, 2021	Sep. 08, 2022~ Sep. 26, 2022	Oct. 08, 2022	Radiation (03CH12-HY)
Horn Antenna	SCHWARZBE CK	BBHA 9120 D	9120D-1328	1GHz~18GHz	Dec. 03, 2021	Sep. 08, 2022~ Sep. 26, 2022	Dec. 02, 2022	Radiation (03CH12-HY)
Horn Antenna	SCHWARZBE CK	BBHA 9120 D	9120D-1212	1GHz~18GHz	Mar. 10, 2022	Sep. 08, 2022~ Sep. 26, 2022	Mar. 09, 2023	Radiation (03CH12-HY)
Preamplifier	COM-POWER	PA-103	161075	10MHz~1GHz	Mar. 23, 2022	Sep. 08, 2022~ Sep. 26, 2022	Mar. 22, 2023	Radiation (03CH12-HY)
Preamplifier	Aglient	8449B	3008A02375	1GHz~26.5GHz	May 24, 2022	Sep. 08, 2022~ Sep. 26, 2022	May 23, 2023	Radiation (03CH12-HY)
Preamplifier	E-INSTRUMEN T TECH LTD.	ERA-100M-18G -56-01-A70	EC1900270	1GHz-18GHz	Dec. 27, 2021	Sep. 08, 2022~ Sep. 26, 2022	Dec. 26, 2022	Radiation (03CH12-HY)
Spectrum Analyzer	Keysight	N9010A	MY53470118	10Hz~44GHz	Jan. 12, 2022	Sep. 08, 2022~ Sep. 26, 2022	Jan. 11, 2023	Radiation (03CH12-HY)
RF Cable	HUBER + SUHNER	SUCOFLEX 104	MY9837/4PE	9kHz~30MHz	Mar. 10, 2022	Sep. 08, 2022~ Sep. 26, 2022	Mar. 09, 2023	Radiation (03CH12-HY)
RF Cable	HUBER + SUHNER	SUCOFLEX 126E	0058/126E	30MHz~18GHz	Dec. 10, 2021	Sep. 08, 2022~ Sep. 26, 2022	Dec. 09, 2022	Radiation (03CH12-HY)
RF Cable	HUBER + SUHNER	SUCOFLEX 102	505134/2	30MHz~40GHz	Feb. 21, 2022	Sep. 08, 2022~ Sep. 26, 2022	Feb. 20, 2023	Radiation (03CH12-HY)
RF Cable	HUBER + SUHNER	SUCOFLEX 102	803953/2	30MHz~40GHz	Mar. 08, 2022	Sep. 08, 2022~ Sep. 26, 2022	Mar. 07, 2023	Radiation (03CH12-HY)
Filter	Wainwright	WHKX12-1080- 1200-15000-60 SS	SN1	1.2GHz High Pass Filter	Mar. 15, 2022	Sep. 08, 2022~ Sep. 26, 2022	Mar. 14, 2023	Radiation (03CH12-HY)
Filter	Wainwright	WHKX12-2700- 3000-18000-60 ST	SN2	3GHz High Pass Filter	Jul. 11, 2022	Sep. 08, 2022~ Sep. 26, 2022	Jul. 10, 2023	Radiation (03CH12-HY)
Filter	Wainwright	WLKS1200-12S S	SN2	1.2GHz Low Pass Filter	Mar. 15, 2022	Sep. 08, 2022~ Sep. 26, 2022	Mar. 14, 2023	Radiation (03CH12-HY)
Filter	Wainwright	WHKX8-5872.5- 6750-18000-40 ST	SN2	6.75GHz High Pass Filter	Mar. 16, 2022	Sep. 08, 2022~ Sep. 26, 2022	Mar. 15, 2023	Radiation (03CH12-HY)



Instrument	Brand Name	Model No.	Serial No.	Characteristics	Calibration Date	Test Date	Due Date	Remark
Hygrometer	TECPEL	DTM-303B	TP140349	N/A	Sep. 30, 2021	Sep. 08, 2022~ Sep. 26, 2022	Sep. 29, 2022	Radiation (03CH12-HY)
Controller	EMEC	EM1000	N/A	Control Turn table & Ant Mast	N/A	Sep. 08, 2022~ Sep. 26, 2022	N/A	Radiation (03CH12-HY)
Antenna Mast	EMEC	AM-BS-4500-B	N/A	1m~4m	N/A	Sep. 08, 2022~ Sep. 26, 2022	N/A	Radiation (03CH12-HY)
Turn Table	EMEC	TT2000	N/A	0~360 Degree	N/A	Sep. 08, 2022~ Sep. 26, 2022	N/A	Radiation (03CH12-HY)
Software	Audix	E3 6.2009-8-24	RK-000989	N/A	N/A	Sep. 08, 2022~ Sep. 26, 2022	N/A	Radiation (03CH12-HY)



## 6 Uncertainty of Evaluation

### Uncertainty of Radiated Emission Measurement (30 MHz ~ 1000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ( $U = 2Uc(y)$ )	3.31 dB
---	---------

### Uncertainty of Radiated Emission Measurement (1 GHz ~ 18 GHz)

Measuring Uncertainty for a Level of Confidence of 95% ( $U = 2Uc(y)$ )	3.25 dB
---	---------





## Appendix A. Test Results of Conducted Test

### Conducted Output Power(Average power & ERP)

LTE Band 14 Maximum Average Power [dBm] (GT - LC = 0.37 dB)								
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest	ERP (dBm)	ERP (W)
10	1	0	QPSK		23.39		21.61	0.1449
10	1	25			23.29			
10	1	49			23.21			
10	25	0			22.44			
10	25	12			22.41			
10	25	25			22.25			
10	50	0			22.34			
10	1	0	16-QAM		22.70		20.92	0.1236
10	1	25			22.69			
10	1	49			22.57			
10	25	0			21.47			
10	25	12			21.44			
10	25	25			21.41			
10	50	0			21.40			
10	1	0	64-QAM		21.58		19.80	0.0955
10	1	25			21.50			
10	1	49			21.42			
10	25	0			20.44			
10	25	12			20.46			
10	25	25			20.35			
10	50	0			20.42			
10	1	0	256-QAM		18.64		16.88	0.0488
10	1	25			18.66			
10	1	49			18.55			
10	25	0			18.62			
10	25	12			18.66			
10	25	25			18.55			
10	50	0			18.62			
Limit	ERP < 3W			Result			Pass	



LTE Band 14 Maximum Average Power [dBm] (GT - LC = 0.37 dB)								
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest	ERP (dBm)	ERP (W)
5	1	0	QPSK	23.33	23.35	23.36	21.58	0.1439
5	1	12		23.22	23.24	23.23		
5	1	24		23.17	23.15	23.16		
5	12	0		22.46	22.43	22.38		
5	12	7		22.38	22.43	22.38		
5	12	13		22.28	22.26	22.21		
5	25	0		22.32	22.37	22.34		
5	1	0	16-QAM	22.66	22.64	22.67	20.93	0.1239
5	1	12		22.67	22.68	22.71		
5	1	24		22.50	22.53	22.58		
5	12	0		21.48	21.47	21.49		
5	12	7		21.45	21.45	21.45		
5	12	13		21.41	21.40	21.35		
5	25	0		21.36	21.40	21.43		
5	1	0	64-QAM	21.53	21.52	21.60	19.82	0.0959
5	1	12		21.53	21.43	21.45		
5	1	24		21.39	21.40	21.42		
5	12	0		20.46	20.38	20.42		
5	12	7		20.48	20.47	20.40		
5	12	13		20.35	20.31	20.28		
5	25	0		20.38	20.38	20.41		
5	1	0	256-QAM	18.62	18.61	18.60	16.91	0.0491
5	1	12		18.60	18.69	18.69		
5	1	24		18.53	18.58	18.49		
5	12	0		18.58	18.57	18.65		
5	12	7		18.65	18.60	18.69		
5	12	13		18.53	18.50	18.58		
5	25	0		18.61	18.55	18.58		
Limit	ERP < 3W			Result			Pass	



## LTE Band 14


### Peak-to-Average Ratio

Mode	LTE Band 14 / 5MHz				
Mod.	QPSK	16QAM	64QAM	256QAM	Limit: 13dB
RB Size	Full RB	Full RB	Full RB	Full RB	Result
Middle CH	4.43	5.36	6.17	6.64	PASS
Mode	LTE Band 14 / 10MHz				
Mod.	QPSK	16QAM	64QAM	256QAM	Limit: 13dB
RB Size	Full RB	Full RB	Full RB	Full RB	Result
Middle CH	4.75	5.51	6.41	6.64	PASS



LTE Band 14 / 5MHz / QPSK


Middle Channel / Full RB

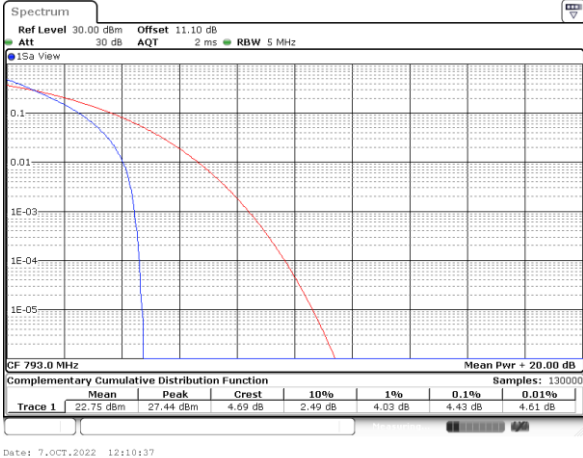

Date: 7.OCT.2022 12:10:37

LTE Band 14 / 5MHz / 16QAM


Middle Channel / Full RB

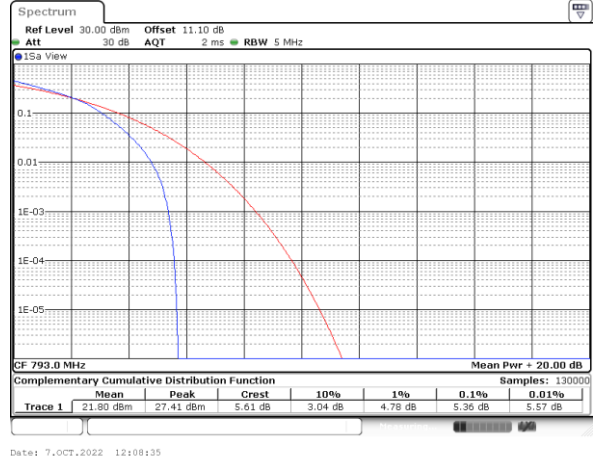

Date: 7.OCT.2022 12:08:35

LTE Band 14 / 5MHz / 64QAM


Middle Channel / Full RB

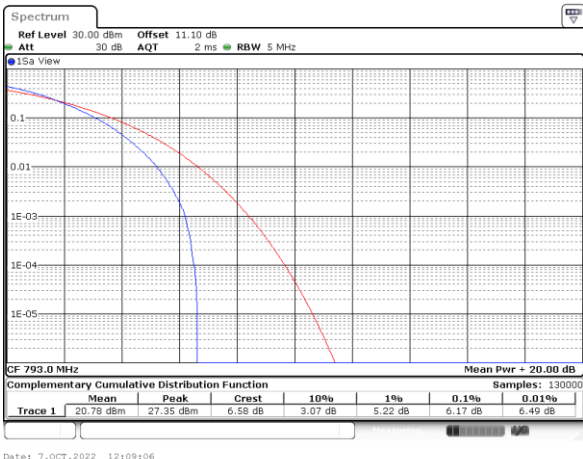


Date: 7.OCT.2022 12:09:06

LTE Band 14 / 5MHz / 256QAM

Middle Channel / Full RB

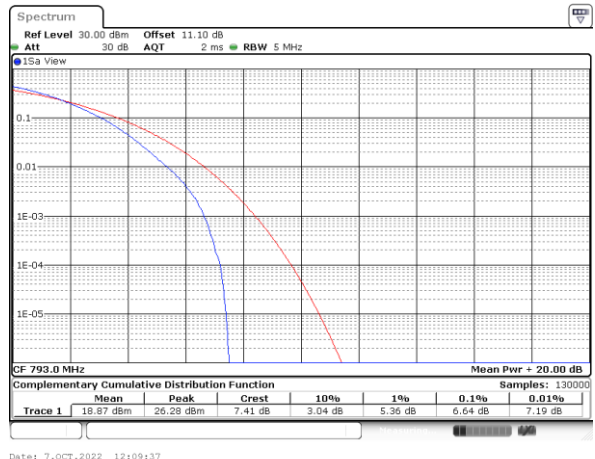

Date: 7.OCT.2022 12:09:37

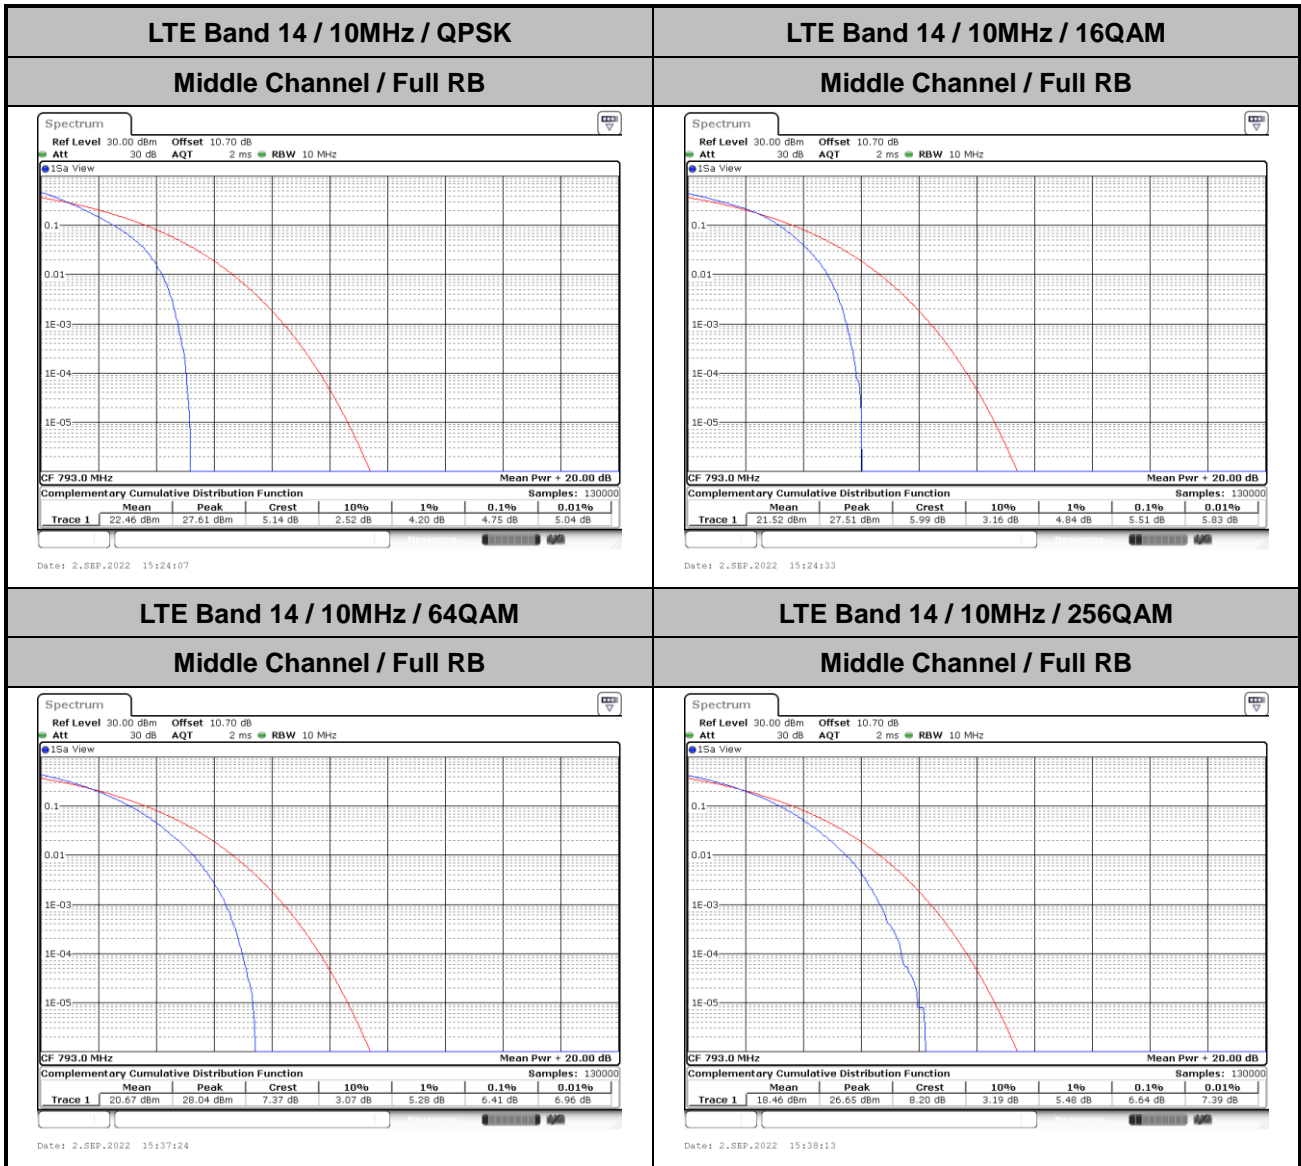




**26dB Bandwidth**

Mode	LTE Band 14 : 26dB BW(MHz)											
BW	1.4MHz		3MHz		5MHz		10MHz		15MHz		20MHz	
Mod.	QPSK	16QAM	QPSK	16QAM	QPSK	16QAM	QPSK	16QAM	QPSK	16QAM	QPSK	16QAM
Middle CH	-	-	-	-	4.93	4.95	9.73	9.79	-	-	-	-
Mode	LTE Band 14 : 26dB BW(MHz)											
BW	1.4MHz		3MHz		5MHz		10MHz		15MHz		20MHz	
Mod.	64QAM	256QAM	64QAM	256QAM	64QAM	256QAM	64QAM	256QAM	64QAM	256QAM	64QAM	256QAM
Middle CH	-	-	-	-	4.94	4.92	9.79	9.71	-	-	-	-




LTE Band 14

Middle Channel / 5MHz / QPSK

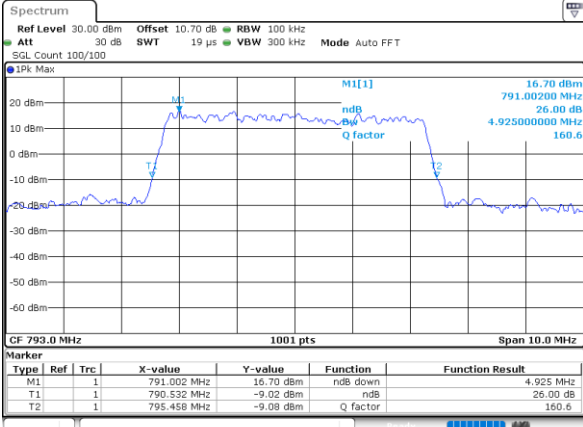


Date: 2,SEP,2022 14:49:52

Middle Channel / 5MHz / 16QAM

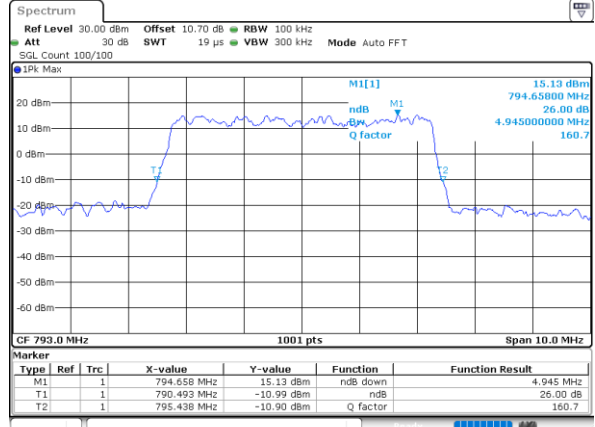


Date: 2,SEP,2022 14:50:16

Middle Channel / 10MHz / QPSK

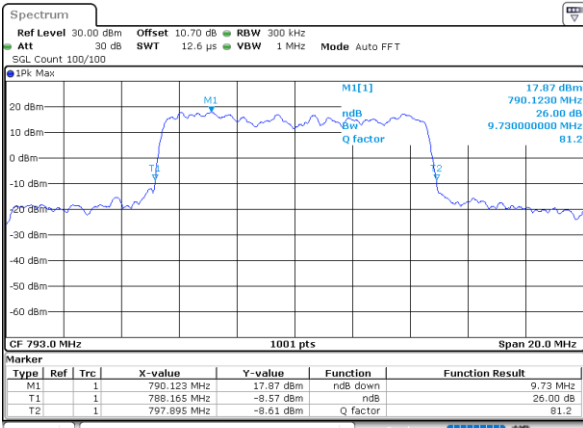


Date: 2,SEP,2022 15:23:42

Middle Channel / 10MHz / 16QAM

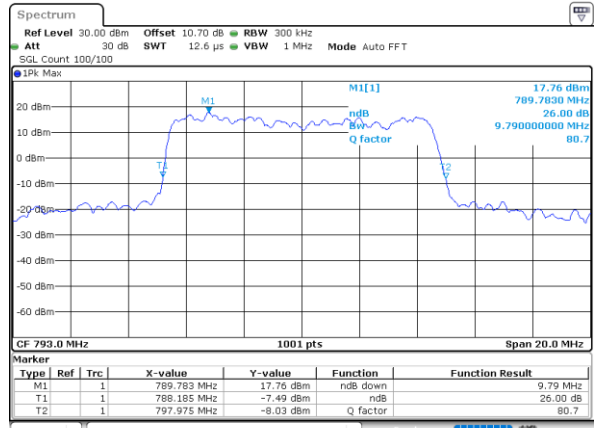


Date: 2,SEP,2022 15:25:22

Middle Channel / 5MHz / 64QAM

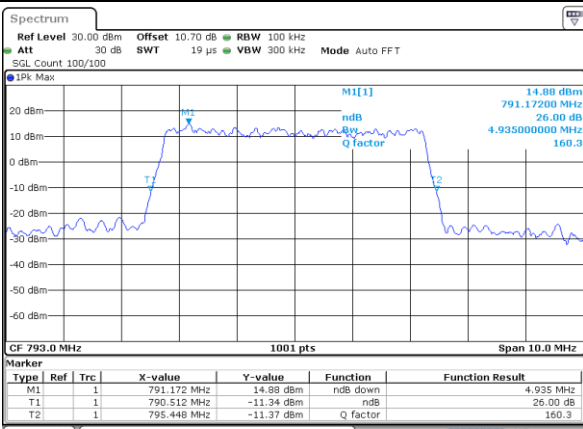

Date: 2,SEP,2022 14:51:26

Middle Channel / 10MHz / 64QAM

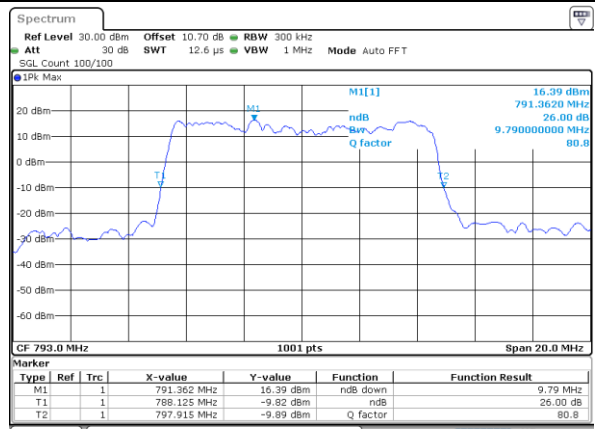


Date: 2,SEP,2022 15:37:49




LTE Band 14

Middle Channel / 5MHz / 256QAM

Middle Channel / 10MHz / 256QAM

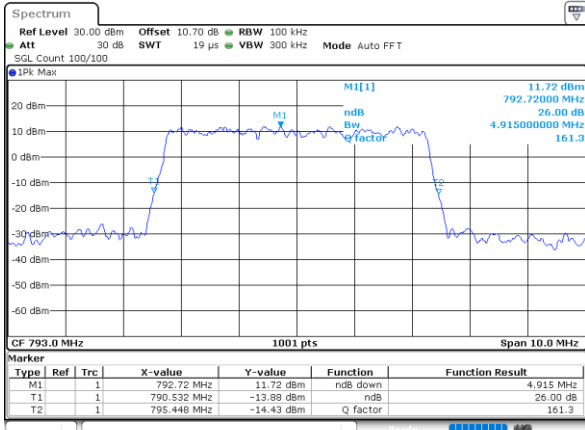

Date: 2.SEP.2022 14:51:50

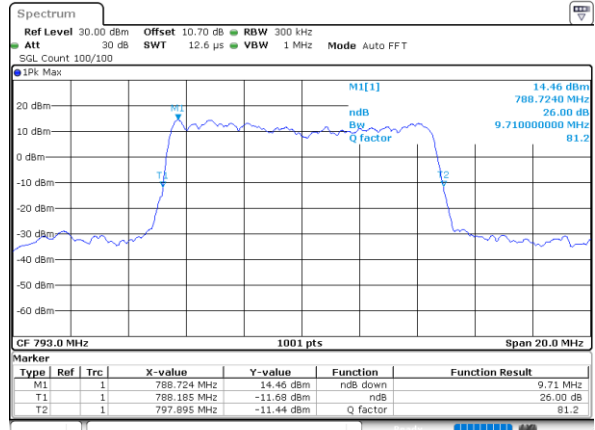

Date: 2.SEP.2022 15:39:02






**Occupied Bandwidth**

Mode	LTE Band 14 : 99%OBW(MHz)											
BW	1.4MHz		3MHz		5MHz		10MHz		15MHz		20MHz	
Mod.	QPSK	16QAM	QPSK	16QAM	QPSK	16QAM	QPSK	16QAM	QPSK	16QAM	QPSK	16QAM
Middle CH	-	-	-	-	4.50	4.52	9.09	9.05	-	-	-	-
Mode	LTE Band 14 : 99%OBW(MHz)											
BW	1.4MHz		3MHz		5MHz		10MHz		15MHz		20MHz	
Mod.	64QAM	256QAM	64QAM	256QAM	64QAM	256QAM	64QAM	256QAM	64QAM	256QAM	64QAM	256QAM
Middle CH	-	-	-	-	4.50	4.49	9.11	9.07	-	-	-	-




LTE Band 14

Middle Channel / 5MHz / QPSK

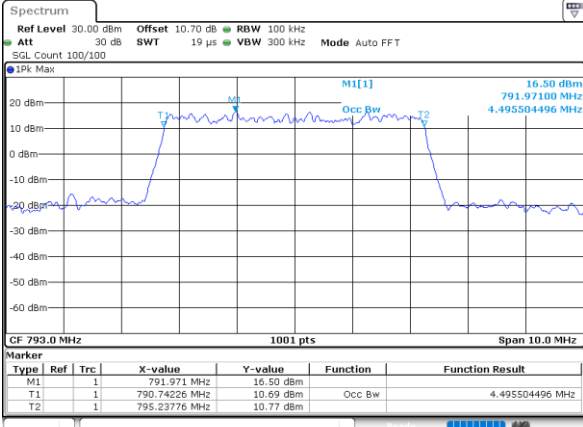


Date: 2.SEP.2022 14:49:29

Middle Channel / 5MHz / 16QAM

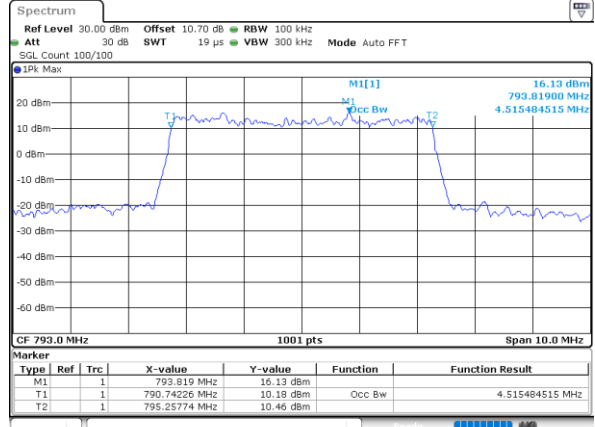


Date: 2.SEP.2022 14:50:39

Middle Channel / 10MHz / QPSK

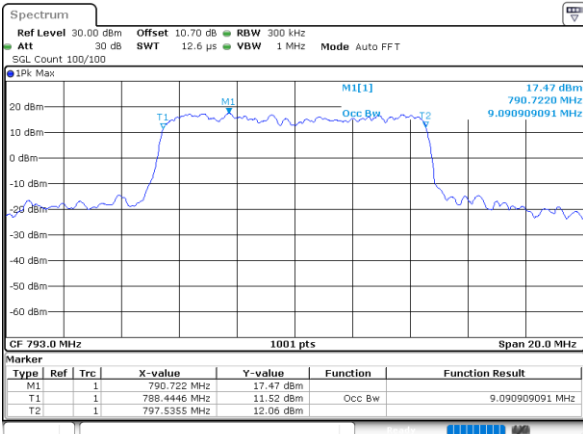


Date: 2.SEP.2022 15:23:19

Middle Channel / 10MHz / 16QAM

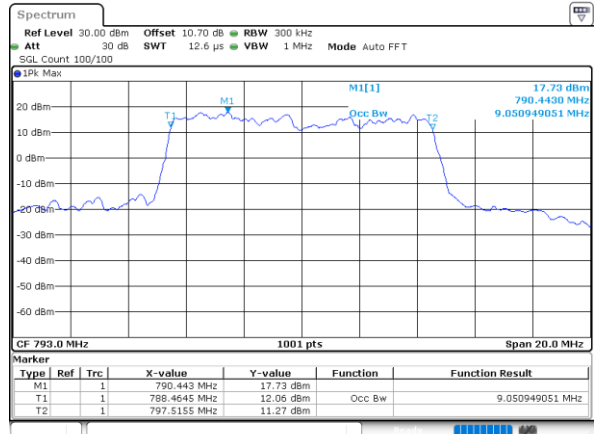


Date: 2.SEP.2022 15:24:59

Middle Channel / 5MHz / 64QAM

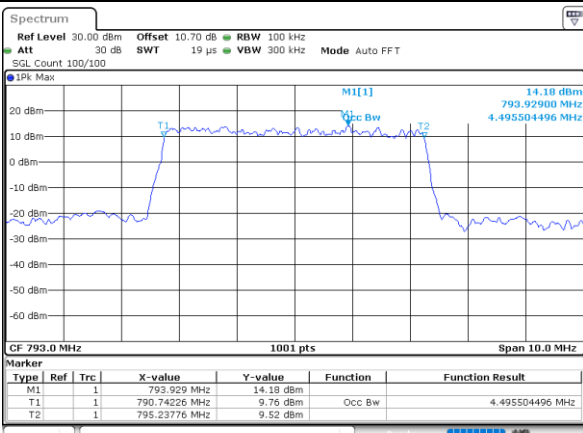

Date: 2.SEP.2022 14:51:03

Middle Channel / 10MHz / 64QAM

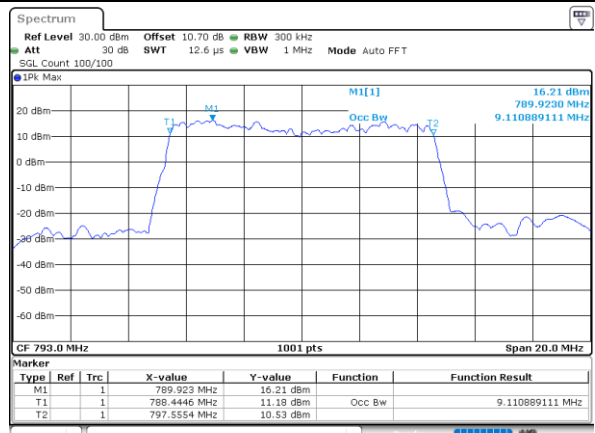


Date: 2.SEP.2022 15:36:59




LTE Band 14

Middle Channel / 5MHz / 256QAM

Middle Channel / 10MHz / 256QAM

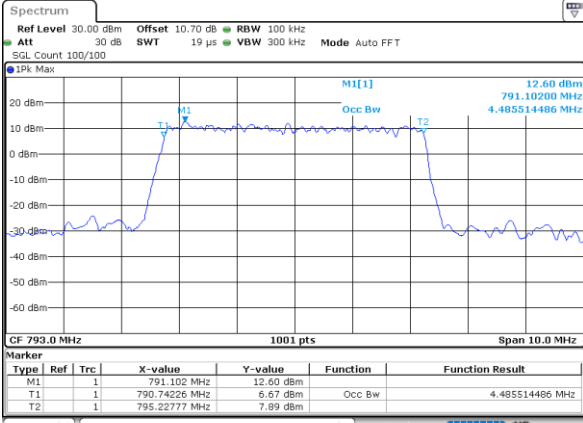

Date: 2.SEP.2022 14:52:13

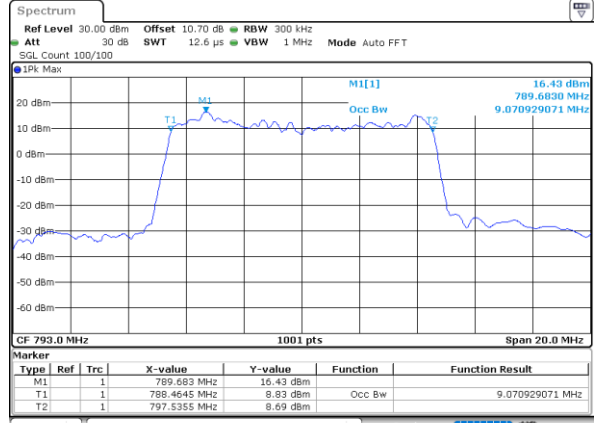


Date: 2.SEP.2022 15:38:38



# Conducted Band Edge


## LTE Band 14 / 5MHz / QPSK

### Lowest Band Edge / 1 RB

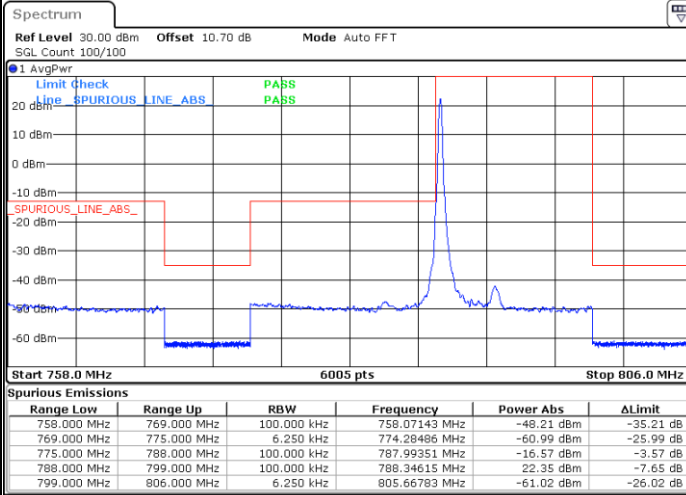


Date: 2.SEP.2022 14:29:45

### Highest Band Edge / 1 RB

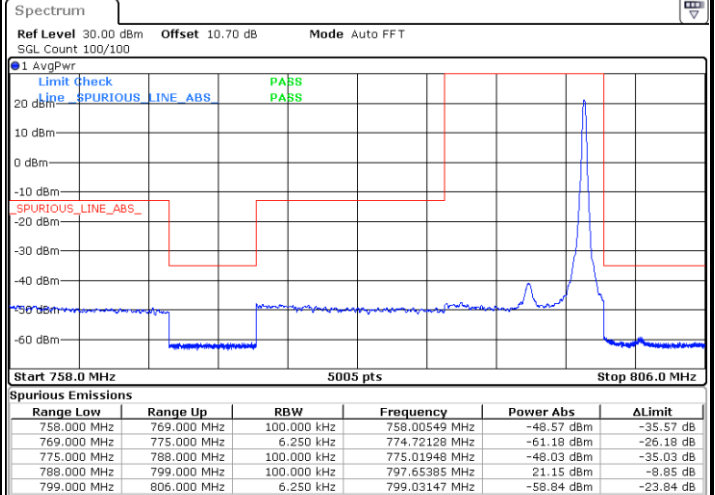


Date: 2.SEP.2022 15:07:59

### Lowest Band Edge / Full RB

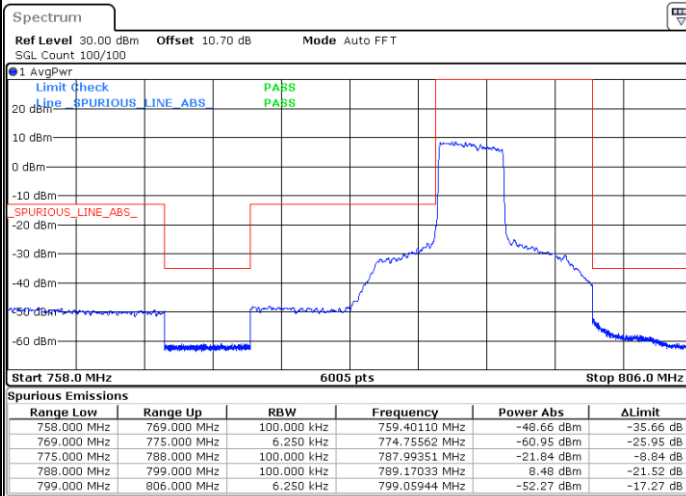

Date: 2.SEP.2022 14:28:55

### Highest Band Edge / Full RB

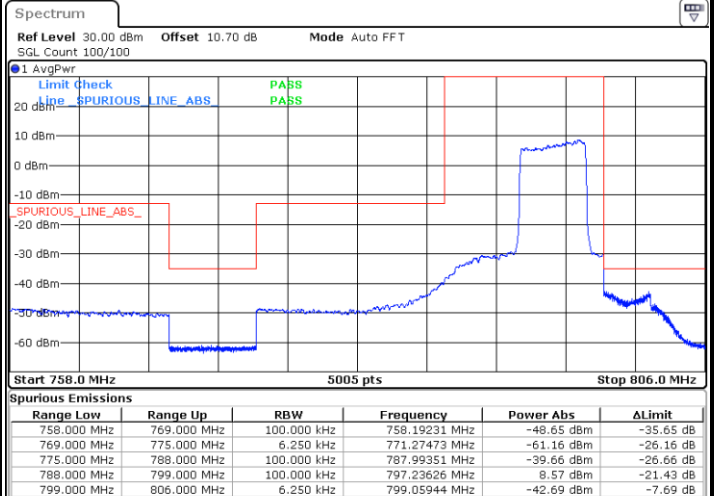


Date: 2.SEP.2022 15:08:49



LTE Band 14 / 5MHz / 16QAM


Lowest Band Edge / 1 RB

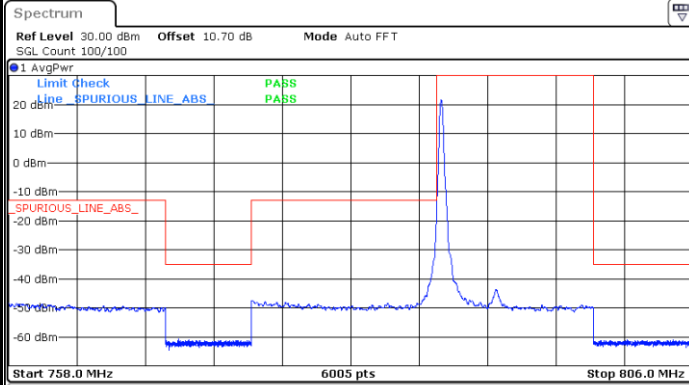

Range Low	Range Up	RBW	Frequency	Power Abs	ΔLimit
758.000 MHz	769.000 MHz	100.000 kHz	758.54396 MHz	-48.55 dBm	-35.55 dB
769.000 MHz	775.000 MHz	6.250 kHz	769.88306 MHz	-60.89 dBm	-25.89 dB
775.000 MHz	788.000 MHz	100.000 kHz	787.99351 MHz	-19.97 dBm	-8.97 dB
788.000 MHz	799.000 MHz	100.000 kHz	788.32418 MHz	21.54 dBm	-8.46 dB
799.000 MHz	806.000 MHz	6.250 kHz	804.56993 MHz	-61.06 dBm	-26.06 dB

Date: 2.SEP.2022 14:31:49


Highest Band Edge / 1 RB

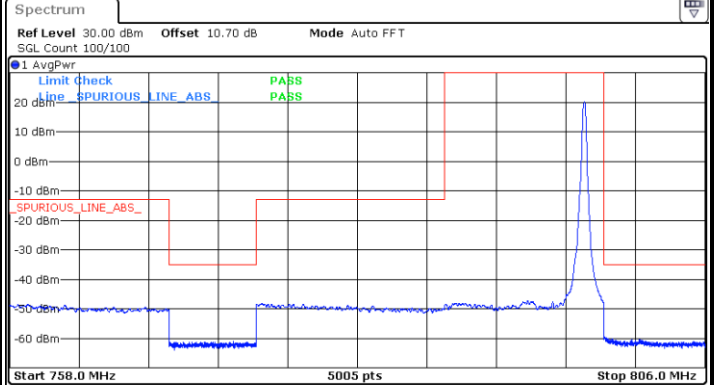

Range Low	Range Up	RBW	Frequency	Power Abs	ΔLimit
758.000 MHz	769.000 MHz	100.000 kHz	759.24725 MHz	-48.57 dBm	-35.57 dB
769.000 MHz	775.000 MHz	6.250 kHz	773.45055 MHz	-61.17 dBm	-26.17 dB
775.000 MHz	788.000 MHz	100.000 kHz	775.40909 MHz	-48.27 dBm	-35.27 dB
788.000 MHz	799.000 MHz	100.000 kHz	797.67582 MHz	20.18 dBm	-9.82 dB
799.000 MHz	806.000 MHz	6.250 kHz	799.01049 MHz	-59.55 dBm	-24.55 dB

Date: 2.SEP.2022 15:10:30


Lowest Band Edge / Full RB

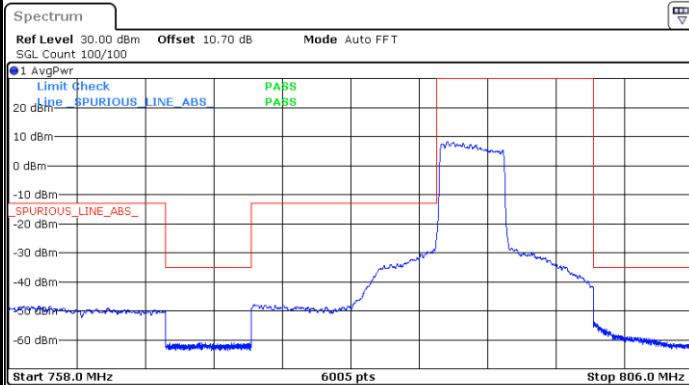

Range Low	Range Up	RBW	Frequency	Power Abs	ΔLimit
758.000 MHz	769.000 MHz	100.000 kHz	760.89560 MHz	-48.45 dBm	-35.45 dB
769.000 MHz	775.000 MHz	6.250 kHz	773.61619 MHz	-60.99 dBm	-25.99 dB
775.000 MHz	788.000 MHz	100.000 kHz	787.99351 MHz	-25.19 dBm	-12.19 dB
788.000 MHz	799.000 MHz	100.000 kHz	788.75275 MHz	8.34 dBm	-21.66 dB
799.000 MHz	806.000 MHz	6.250 kHz	799.07343 MHz	-53.85 dBm	-18.85 dB

Date: 2.SEP.2022 14:32:39

Highest Band Edge / Full RB

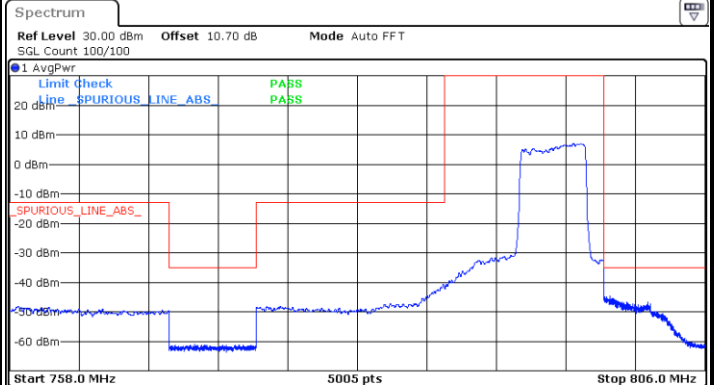


Range Low	Range Up	RBW	Frequency	Power Abs	ΔLimit
758.000 MHz	769.000 MHz	100.000 kHz	758.59890 MHz	-48.20 dBm	-35.20 dB
769.000 MHz	775.000 MHz	6.250 kHz	770.77123 MHz	-61.13 dBm	-26.13 dB
775.000 MHz	788.000 MHz	100.000 kHz	787.94156 MHz	-40.63 dBm	-27.63 dB
788.000 MHz	799.000 MHz	100.000 kHz	796.92857 MHz	6.98 dBm	-23.02 dB
799.000 MHz	806.000 MHz	6.250 kHz	799.43706 MHz	-44.73 dBm	-9.73 dB

Date: 2.SEP.2022 15:09:39



LTE Band 14 / 5MHz / 64QAM


Lowest Band Edge / 1 RB

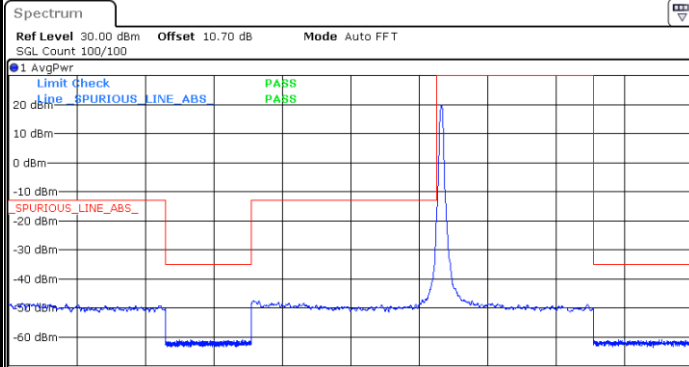

Range Low	Range Up	RBW	Frequency	Power Abs	ΔLimit
758.000 MHz	759.000 MHz	100.000 kHz	758.93955 MHz	-48.52 dBm	-35.52 dB
769.000 MHz	775.000 MHz	6.250 kHz	769.99100 MHz	-60.96 dBm	-25.96 dB
775.000 MHz	788.000 MHz	100.000 kHz	787.99351 MHz	-19.15 dBm	-5.15 dB
788.000 MHz	799.000 MHz	100.000 kHz	788.35714 MHz	19.88 dBm	-10.12 dB
799.000 MHz	806.000 MHz	6.250 kHz	803.61888 MHz	-60.90 dBm	-25.90 dB

Date: 2.SEP.2022 14:34:20


Highest Band Edge / 1 RB

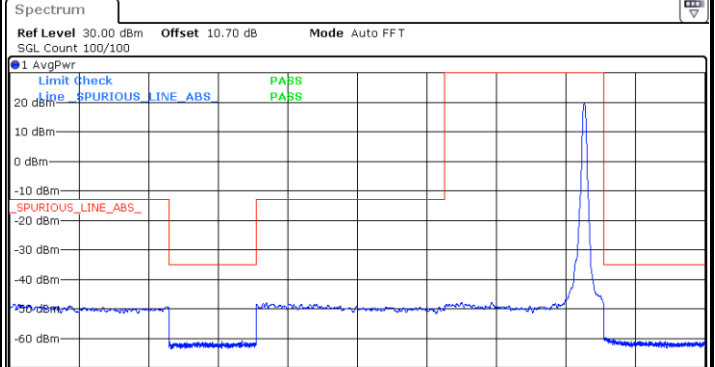

Range Low	Range Up	RBW	Frequency	Power Abs	ΔLimit
758.000 MHz	769.000 MHz	100.000 kHz	758.30220 MHz	-48.37 dBm	-35.37 dB
769.000 MHz	775.000 MHz	6.250 kHz	774.02597 MHz	-60.89 dBm	-25.89 dB
775.000 MHz	788.000 MHz	100.000 kHz	775.72078 MHz	-48.05 dBm	-35.05 dB
788.000 MHz	799.000 MHz	100.000 kHz	797.66484 MHz	19.52 dBm	-10.48 dB
799.000 MHz	806.000 MHz	6.250 kHz	799.01748 MHz	-59.54 dBm	-24.54 dB

Date: 2.SEP.2022 15:11:19


Lowest Band Edge / Full RB

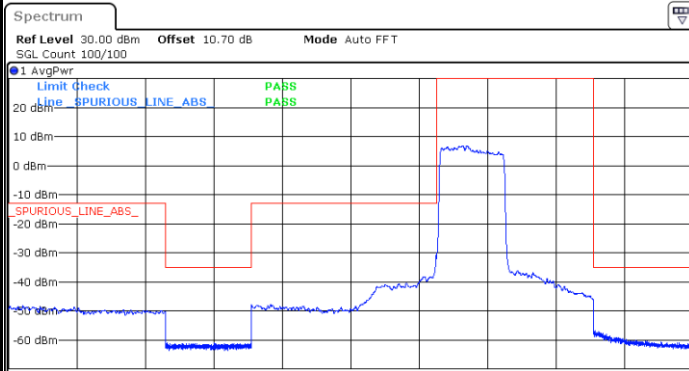

Range Low	Range Up	RBW	Frequency	Power Abs	ΔLimit
758.000 MHz	759.000 MHz	100.000 kHz	759.00549 MHz	-48.35 dBm	-35.35 dB
769.000 MHz	775.000 MHz	6.250 kHz	772.40180 MHz	-60.94 dBm	-25.94 dB
775.000 MHz	788.000 MHz	100.000 kHz	787.99351 MHz	-29.94 dBm	-16.94 dB
788.000 MHz	799.000 MHz	100.000 kHz	789.84066 MHz	-6.76 dBm	-23.24 dB
799.000 MHz	806.000 MHz	6.250 kHz	799.10140 MHz	-56.88 dBm	-21.88 dB

Date: 2.SEP.2022 14:33:30

Highest Band Edge / Full RB

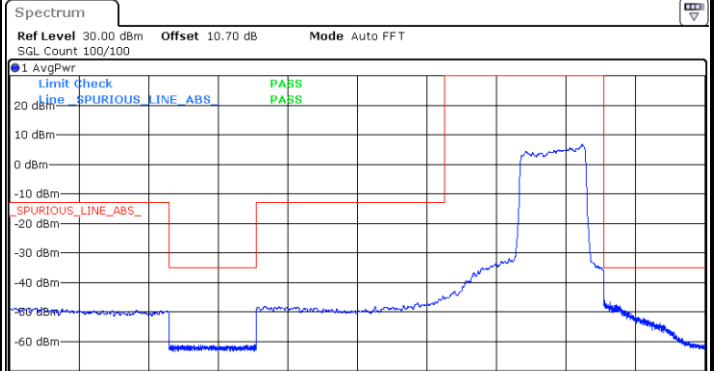


Range Low	Range Up	RBW	Frequency	Power Abs	ΔLimit
758.000 MHz	769.000 MHz	100.000 kHz	759.84066 MHz	-48.69 dBm	-35.69 dB
769.000 MHz	775.000 MHz	6.250 kHz	774.87712 MHz	-61.19 dBm	-26.19 dB
775.000 MHz	788.000 MHz	100.000 kHz	787.88961 MHz	-44.76 dBm	-31.76 dB
788.000 MHz	799.000 MHz	100.000 kHz	797.52198 MHz	6.69 dBm	-23.31 dB
799.000 MHz	806.000 MHz	6.250 kHz	799.08741 MHz	-46.09 dBm	-11.09 dB

Date: 2.SEP.2022 15:12:09




LTE Band 14 / 5MHz / 256QAM

Lowest Band Edge / 1 RB

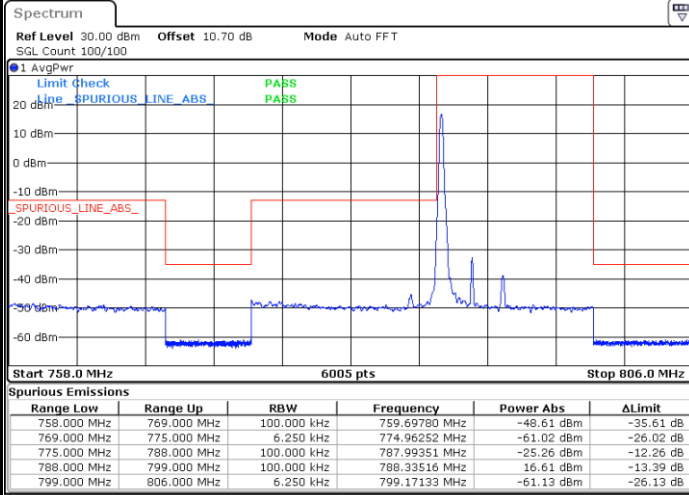


Date: 2.SEP.2022 14:35:10

Highest Band Edge / 1 RB

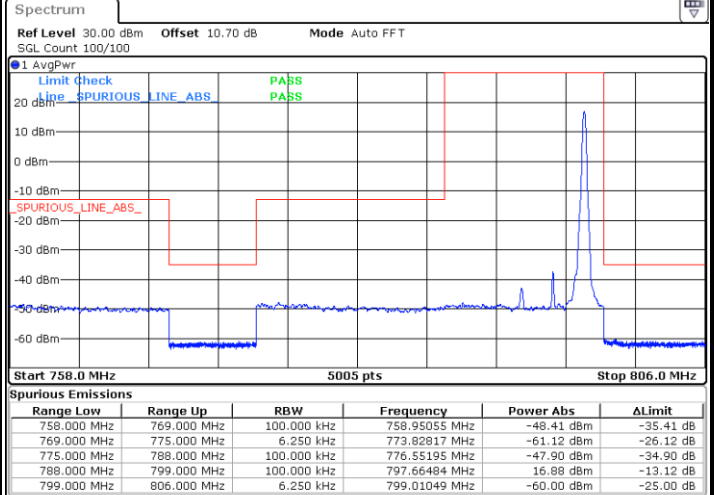


Date: 2.SEP.2022 15:13:52

Lowest Band Edge / Full RB

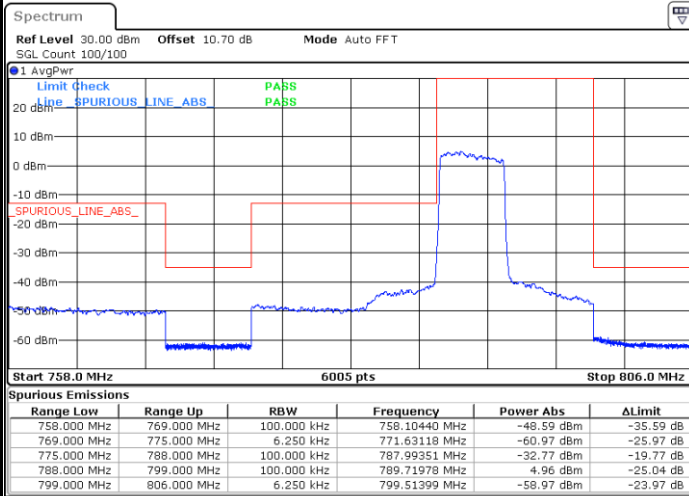

Date: 2.SEP.2022 14:36:02

Highest Band Edge / Full RB

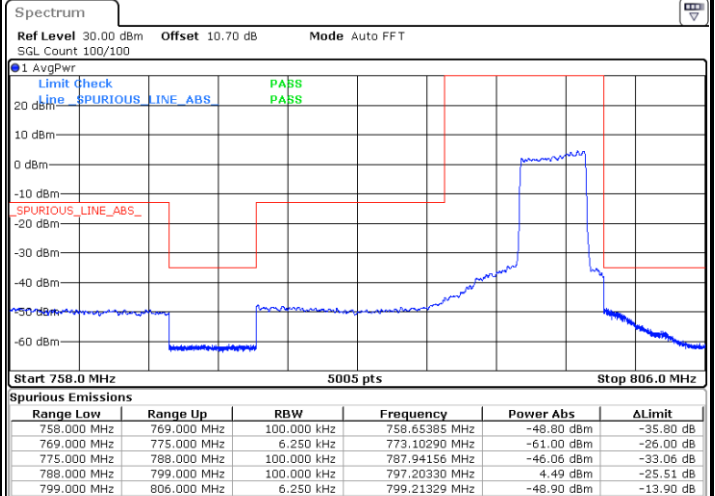


Date: 2.SEP.2022 15:12:59




LTE Band 14 / 10MHz / QPSK


Lowest Band Edge / 1 RB

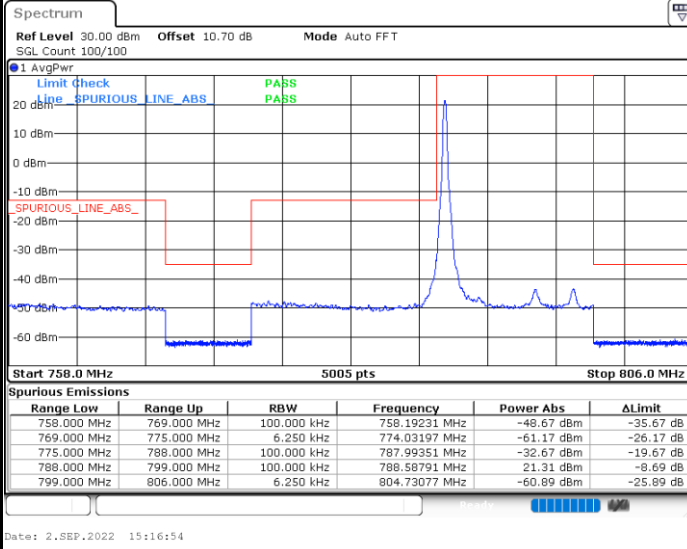

Highest Band Edge / 1 RB

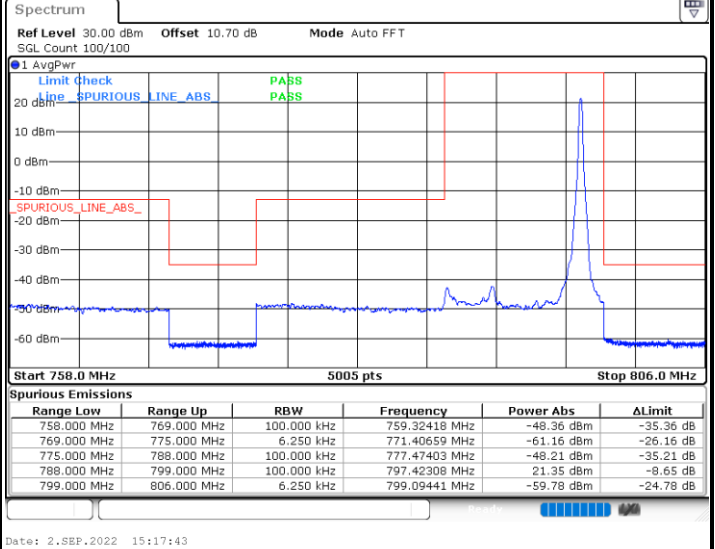

Band Edge / Full RB

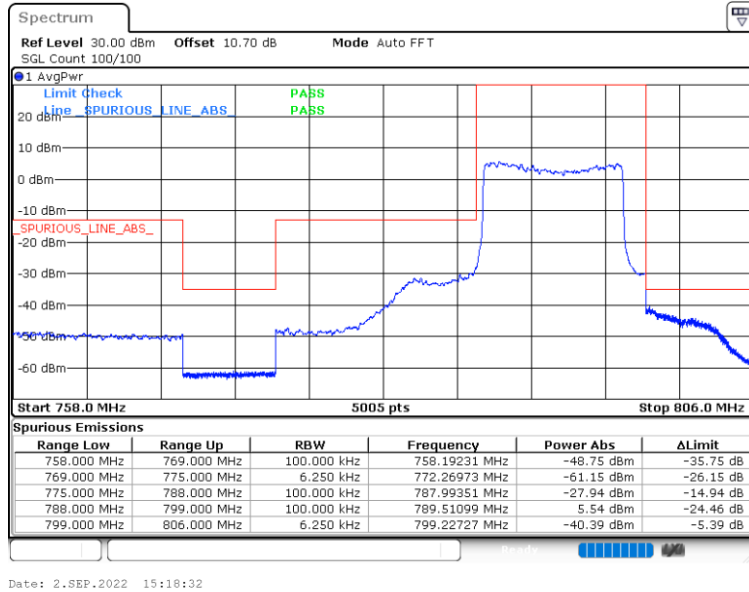







LTE Band 14 / 10MHz / 16QAM

Lowest Band Edge / 1 RB

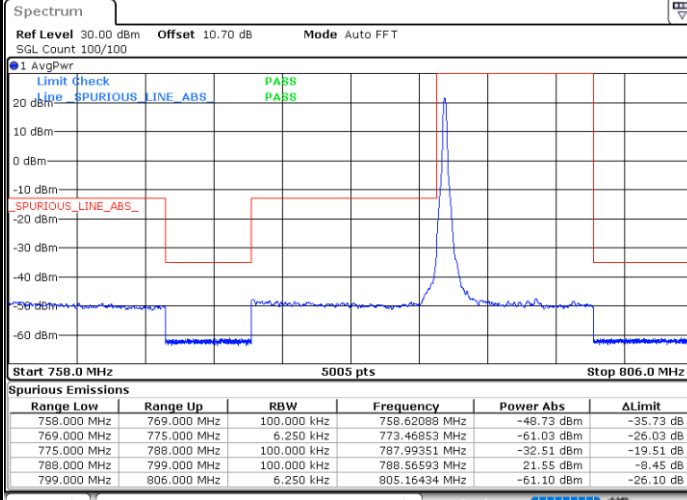


Date: 2.SEP.2022 15:27:50

Highest Band Edge / 1 RB

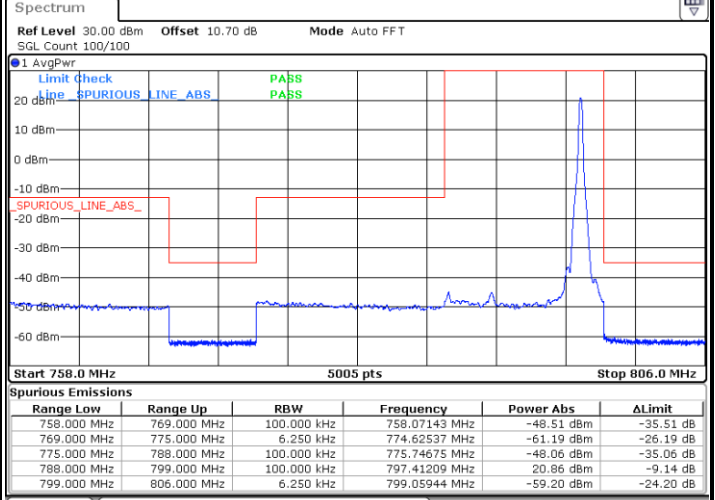

Date: 2.SEP.2022 15:27:00

Band Edge / Full RB

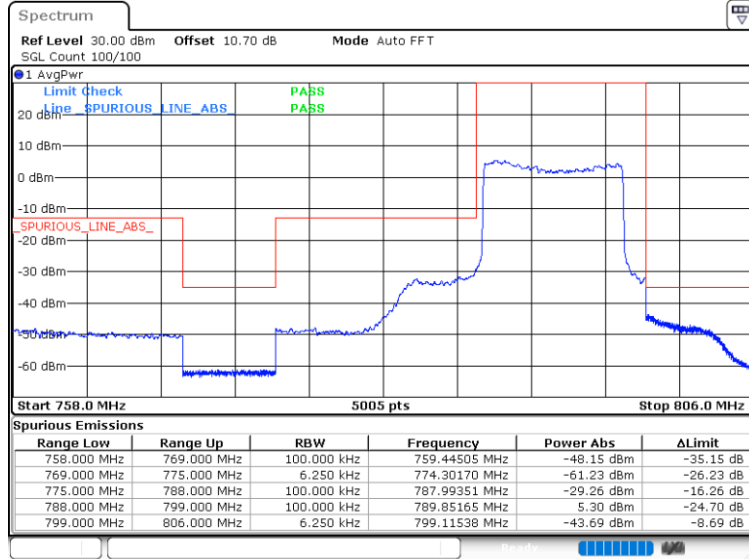


Date: 2.SEP.2022 15:26:10




LTE Band 14 / 10MHz / 64QAM


Lowest Band Edge / 1 RB

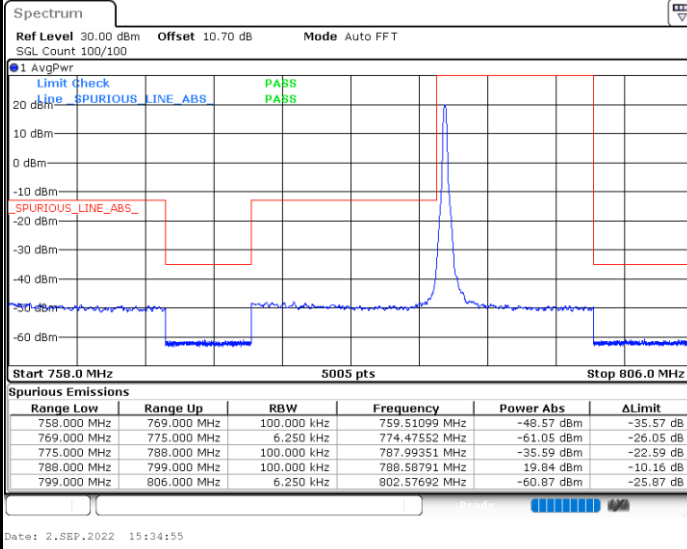

Highest Band Edge / 1 RB

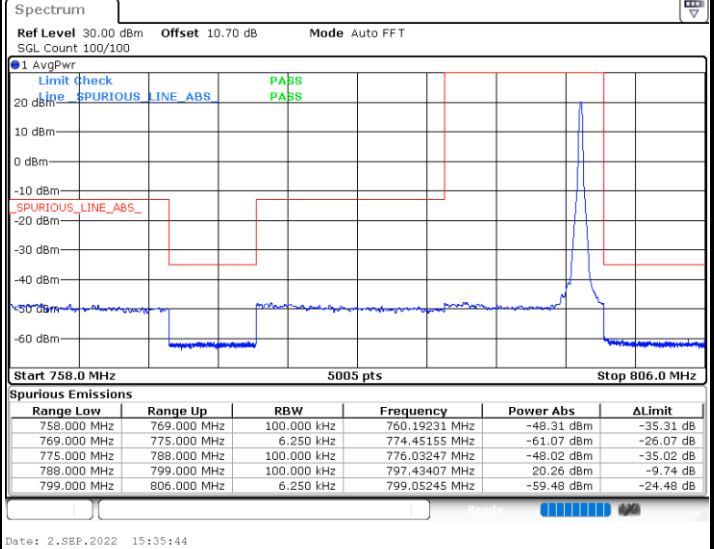


Band Edge / Full RB

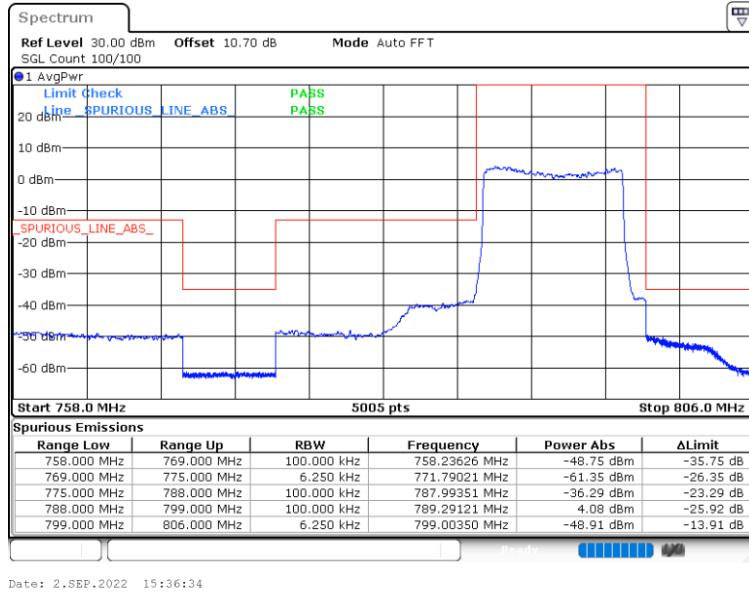




LTE Band 14 / 10MHz / 256QAM

Lowest Band Edge / 1 RB

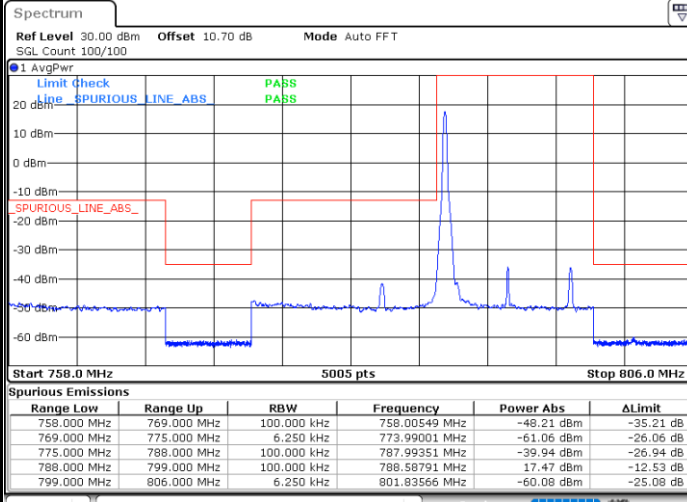


Date: 2.SEP.2022 15:41:28

Highest Band Edge / 1 RB

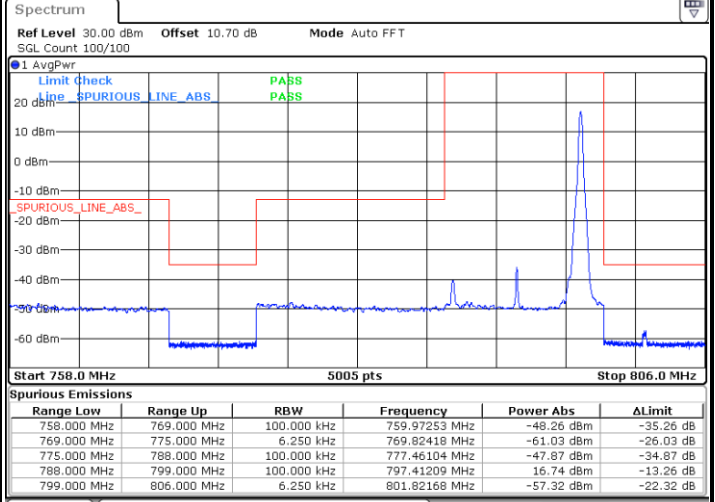

Date: 2.SEP.2022 15:40:39

Band Edge / Full RB

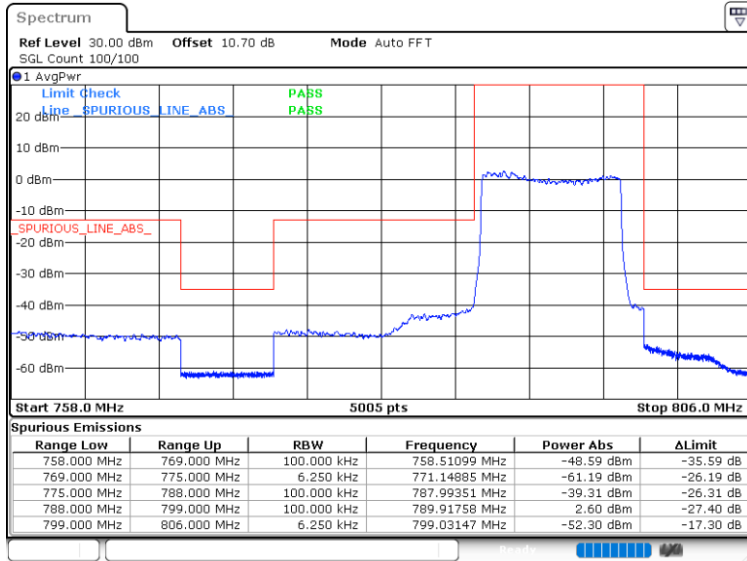


Date: 2.SEP.2022 15:39:49



# Conducted Spurious Emission


## LTE Band 14 / 5MHz

### Lowest Channel / QPSK

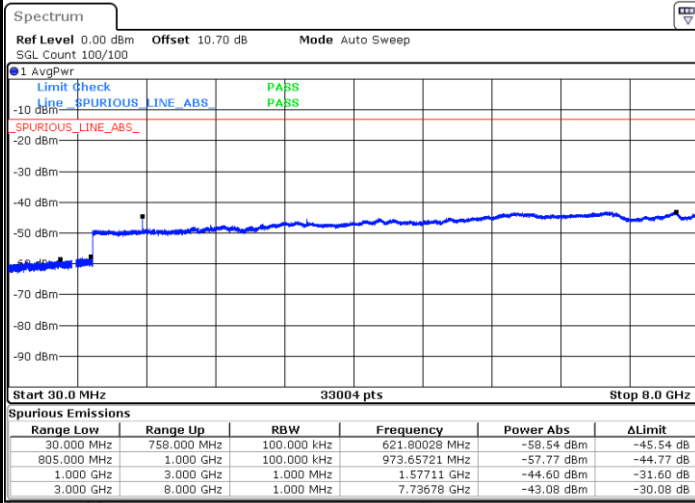


Date: 2.SEP.2022 14:31:00

### Middle Channel / QPSK

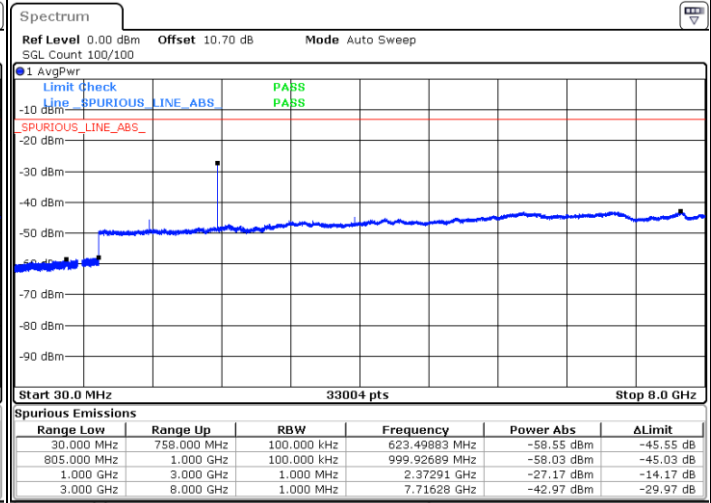

Date: 2.SEP.2022 14:53:25

### Highest Channel / QPSK

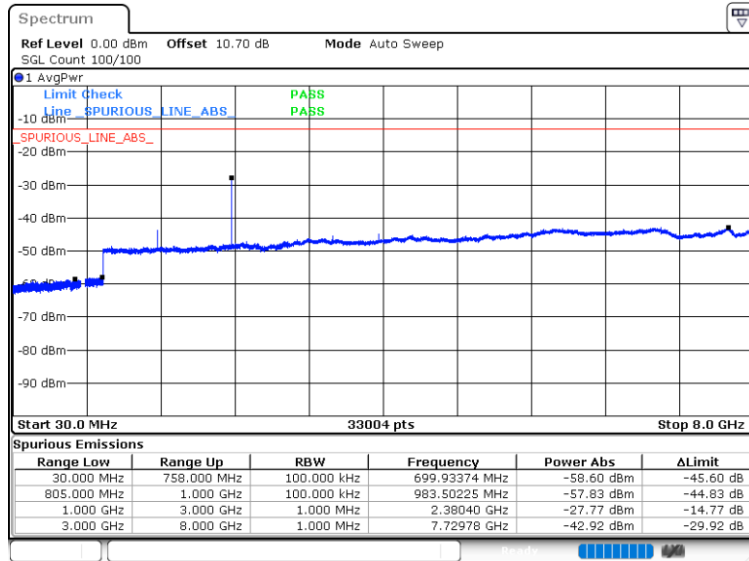


Date: 2.SEP.2022 15:07:09



LTE Band 14 / 10MHz

Middle Channel / QPSK

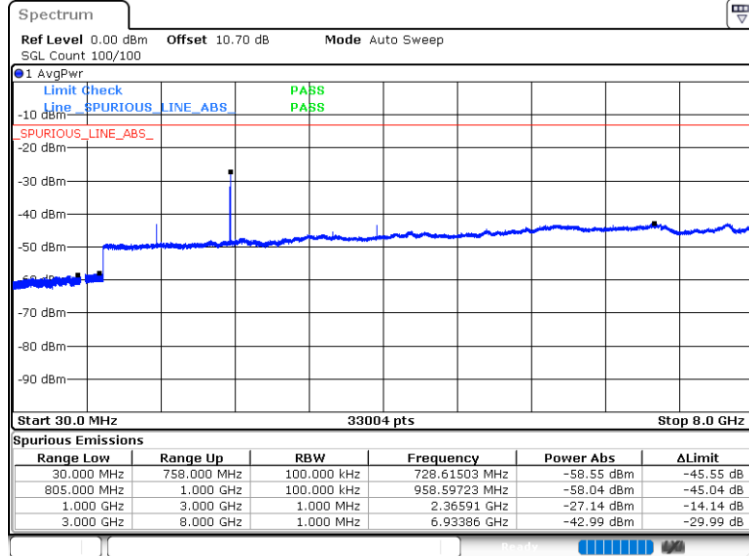


Date: 2.SEP.2022 15:19:46




Mask

LTE Band 14 / 5MHz / QPSK

Lowest Channel / 1RB

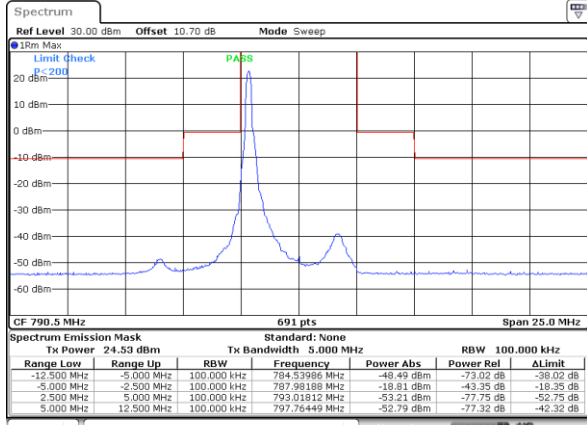


Date: 2,SEP,2022 14:13:10

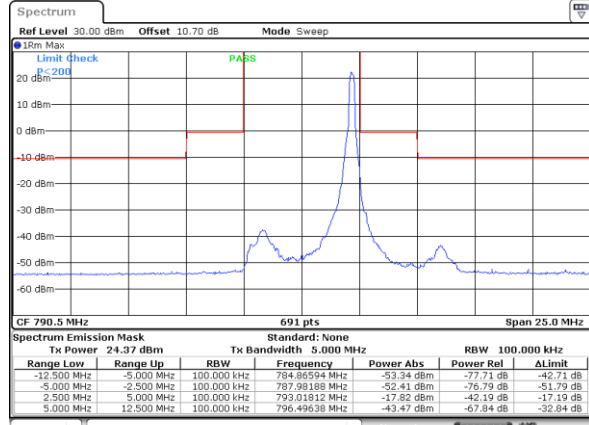

Date: 2,SEP,2022 14:13:12

Lowest Channel / Full RB

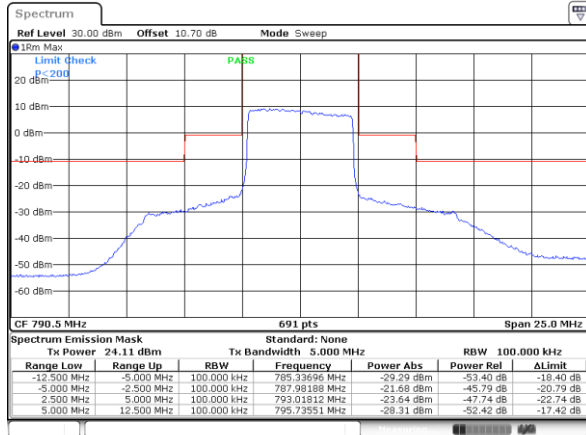


Date: 2,SEP,2022 14:13:16




LTE Band 14 / 5MHz / 16QAM

Lowest Channel / 1RB

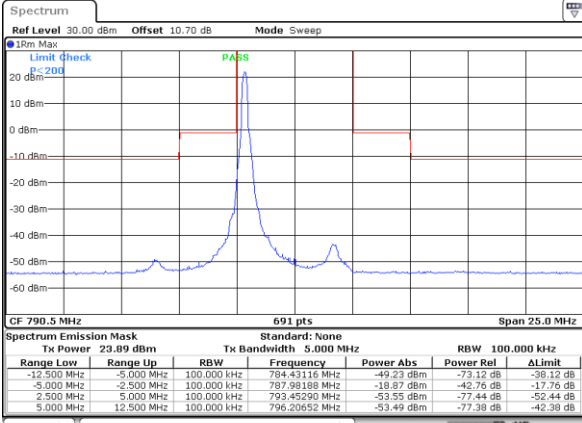


Date: 2,SEP,2022 14:42:25

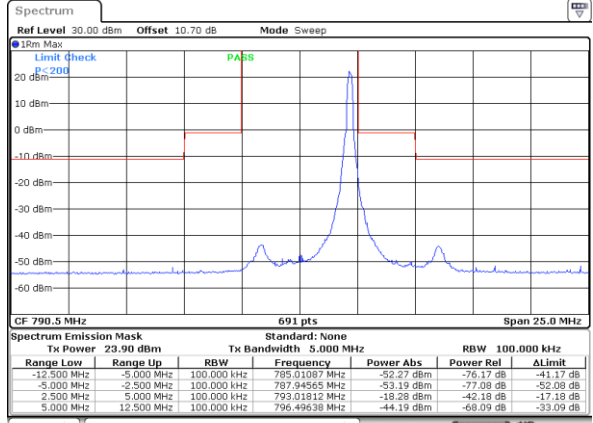

Date: 2,SEP,2022 14:41:22

Lowest Channel / Full RB

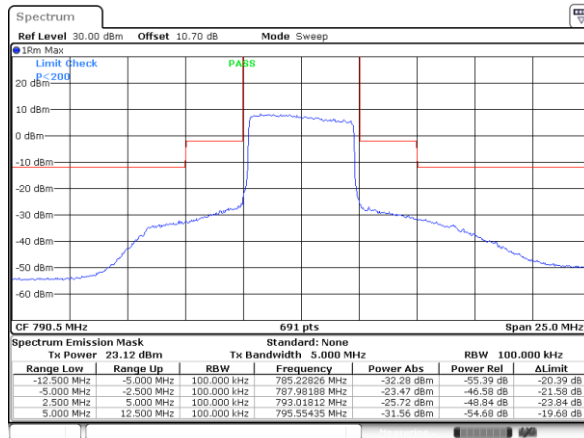


Date: 2,SEP,2022 14:40:18




LTE Band 14 / 5MHz / 64QAM

Lowest Channel / 1RB

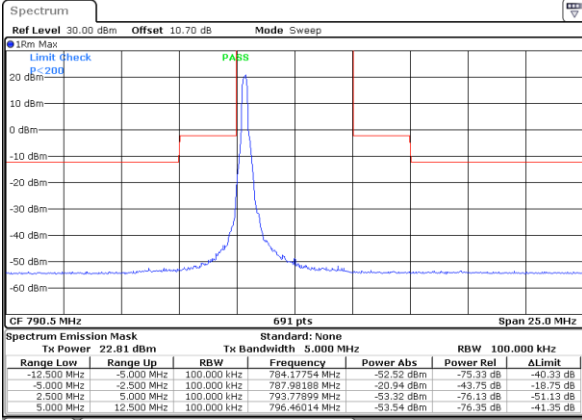


Date: 2,SEP,2022 14:43:27

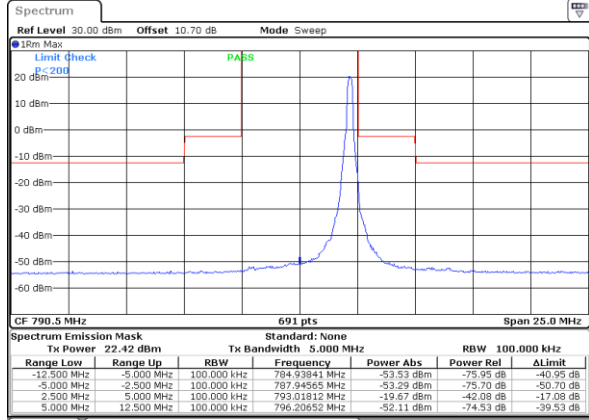

Date: 2,SEP,2022 14:44:28

Lowest Channel / Full RB

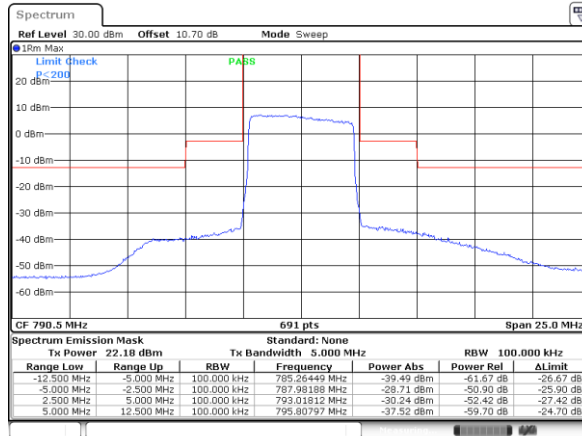


Date: 2,SEP,2022 14:45:31






LTE Band 14 / 5MHz / 256QAM

Lowest Channel / 1RB

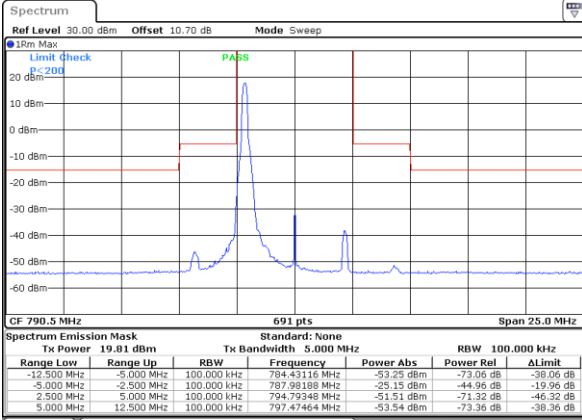


Date: 2,SEP,2022 14:48:46

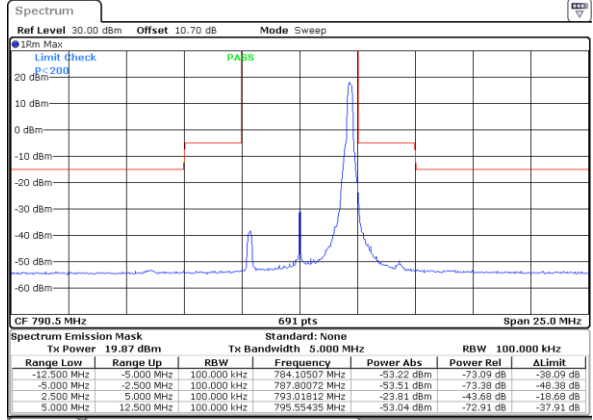

Date: 2,SEP,2022 14:47:40

Lowest Channel / Full RB

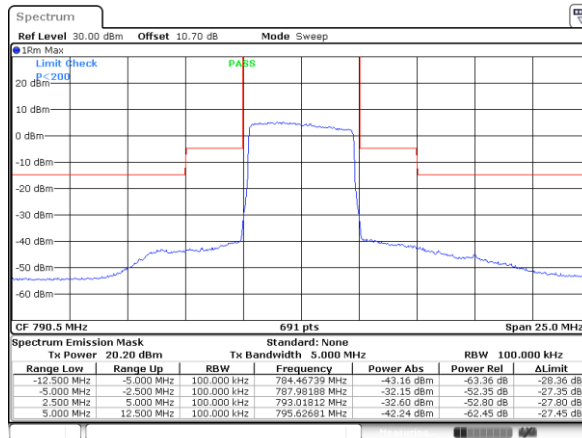


Date: 2,SEP,2022 14:46:34




LTE Band 14 / 5MHz / QPSK

Middle Channel / 1RB

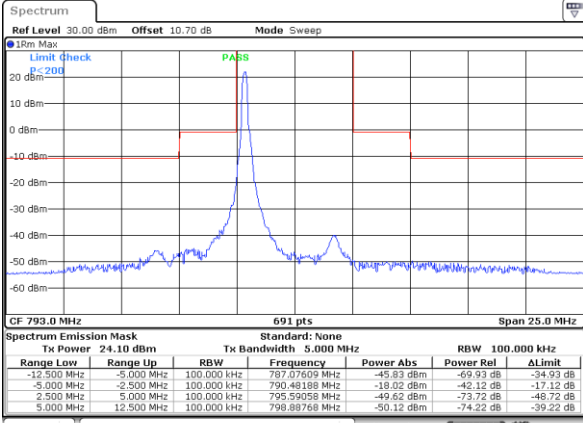


Date: 2,SEP,2022 14:54:28

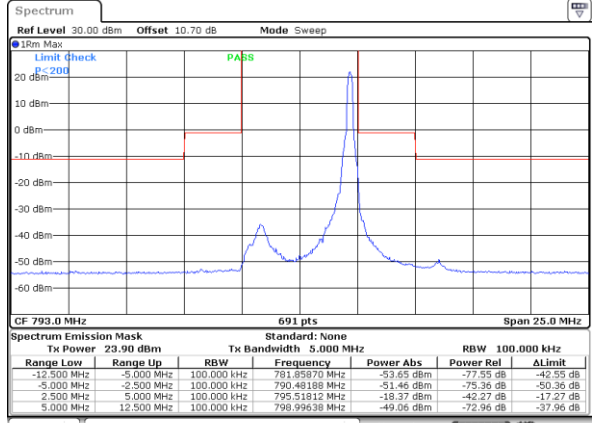

Date: 2,SEP,2022 14:55:30

Middle Channel / Full RB

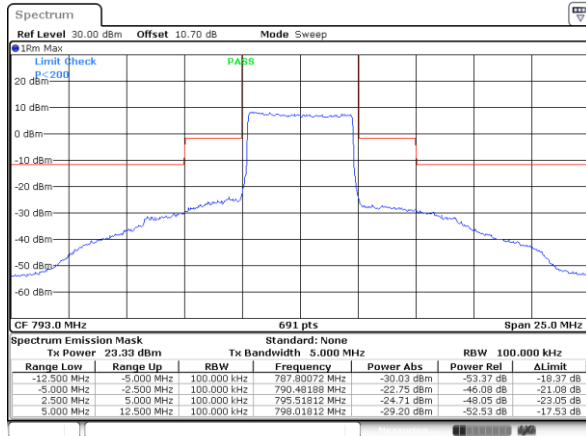


Date: 2,SEP,2022 14:56:32




LTE Band 14 / 5MHz / 16QAM

Middle Channel / 1RB

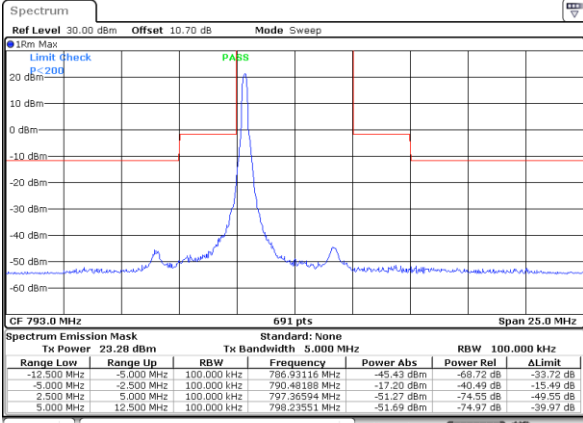


Date: 2,SEP,2022 14:59:40

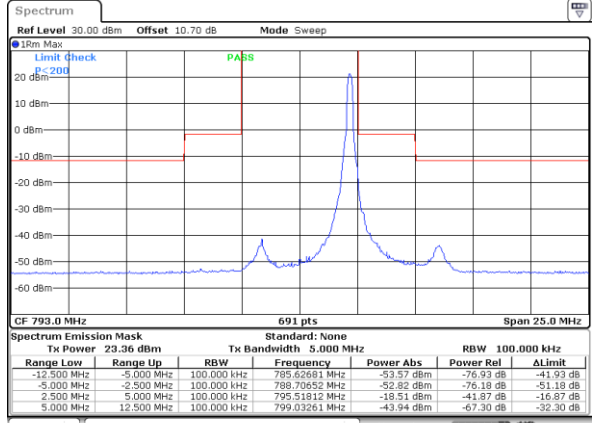

Date: 2,SEP,2022 14:58:37

Middle Channel / Full RB

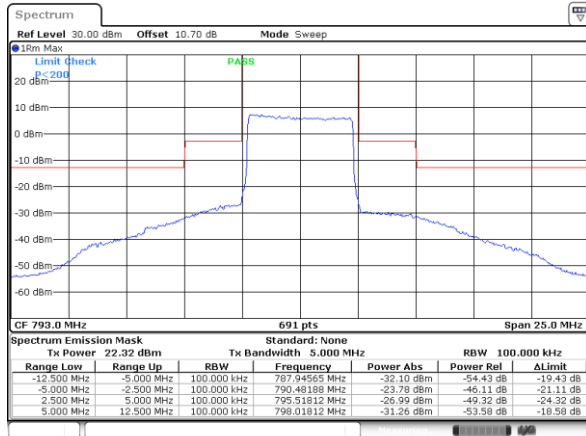


Date: 2,SEP,2022 14:57:35




LTE Band 14 / 5MHz / 64QAM

Middle Channel / 1RB

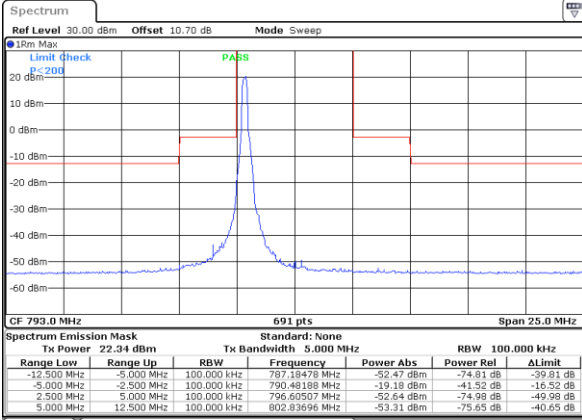


Date: 2,SEP,2022 15:10:44

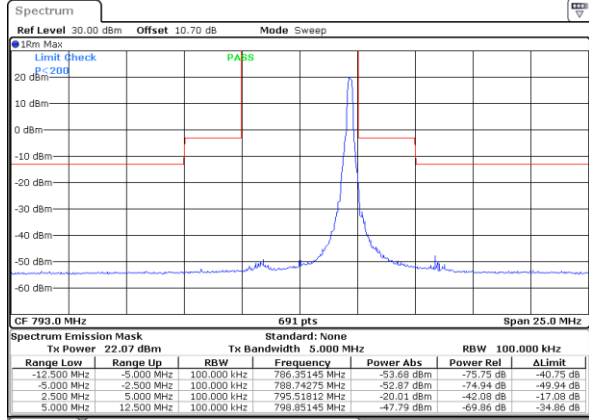

Date: 2,SEP,2022 15:01:46

Middle Channel / Full RB

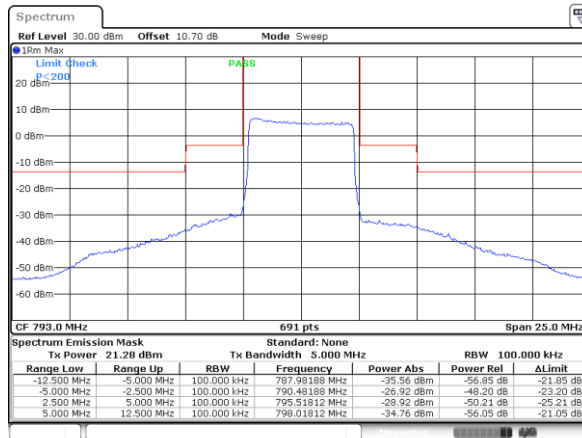


Date: 2,SEP,2022 15:02:49




LTE Band 14 / 5MHz / 256QAM

Middle Channel / 1RB

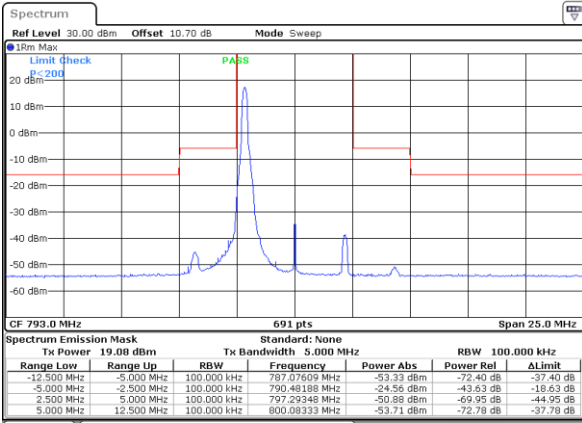


Date: 2,SEP,2022 15:10:56

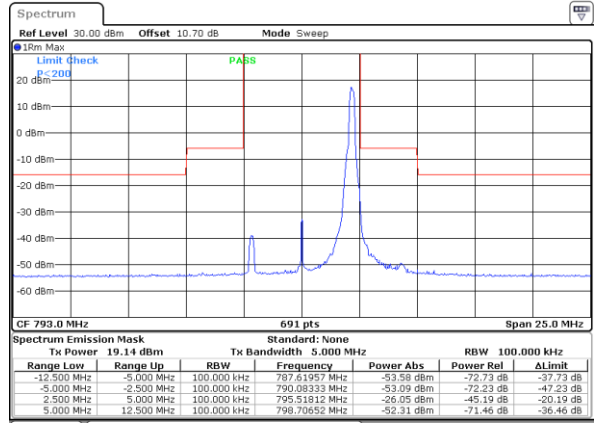

Date: 2,SEP,2022 15:10:54

Middle Channel / Full RB

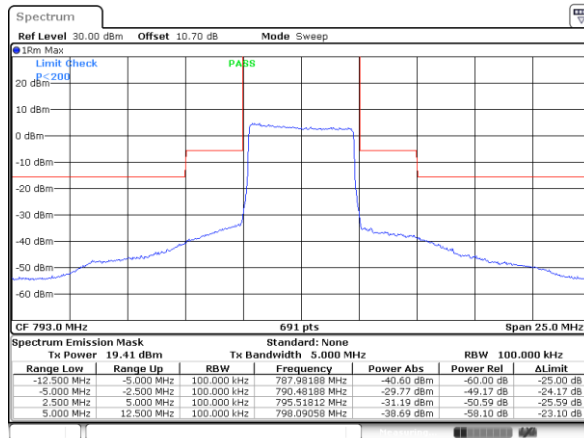


Date: 2,SEP,2022 15:03:51




LTE Band 14 / 5MHz / QPSK

Highest Channel / 1RB

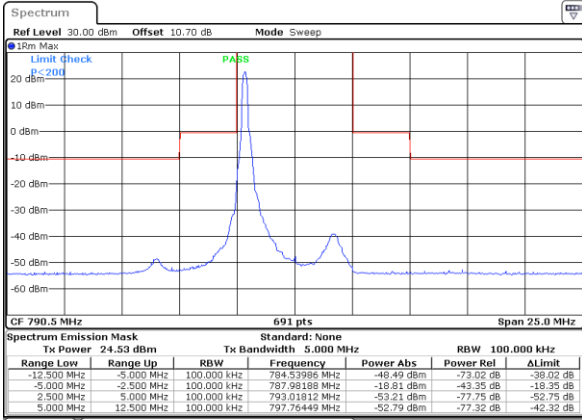


Date: 2.SEP.2022 14:13:10

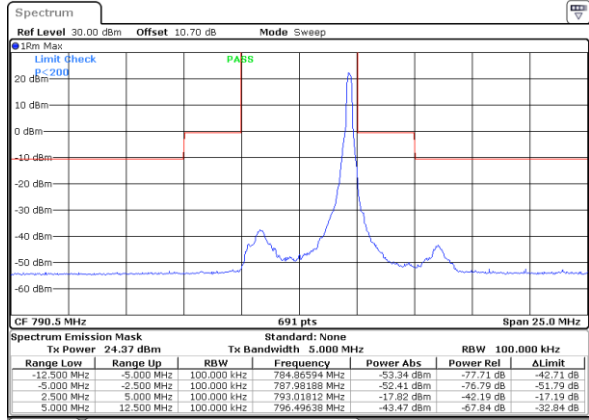

Date: 2.SEP.2022 14:13:12

Highest Channel / Full RB

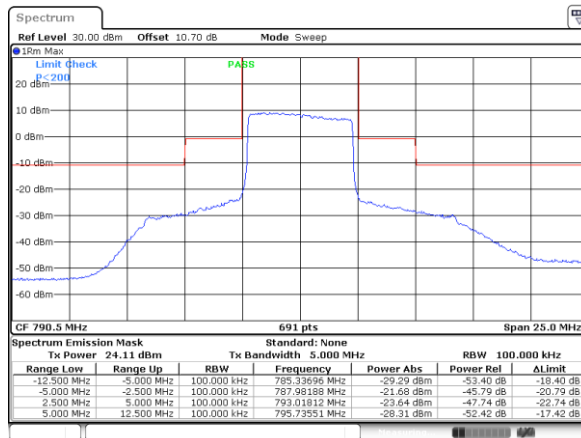


Date: 2.SEP.2022 14:13:16




LTE Band 14 / 5MHz / 16QAM

Highest Channel / 1RB

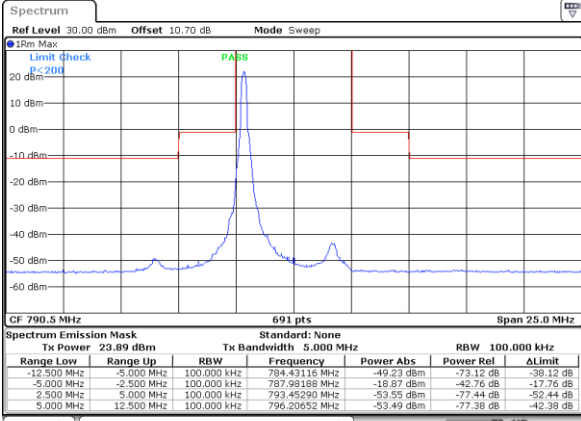


Date: 2.SEP.2022 14:42:25

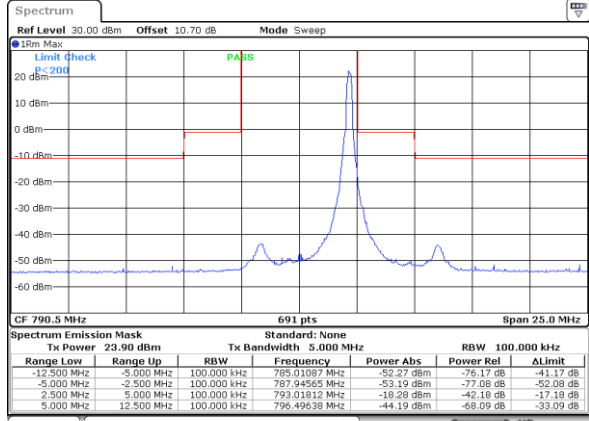

Date: 2.SEP.2022 14:41:22

Highest Channel / Full RB

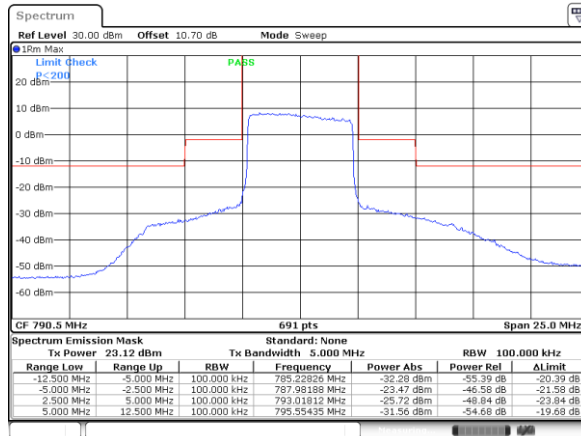


Date: 2.SEP.2022 14:40:18




LTE Band 14 / 5MHz / 64QAM

Highest Channel / 1RB

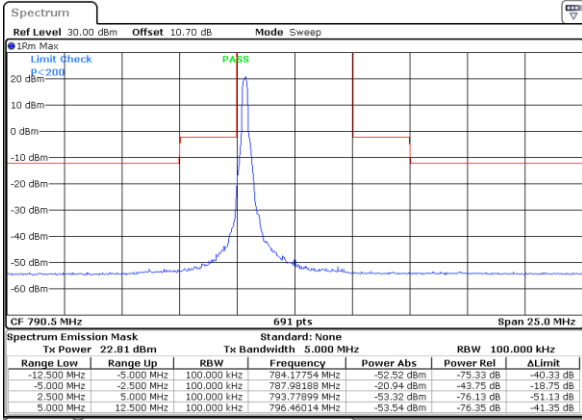


Date: 2.SEP.2022 14:43:27

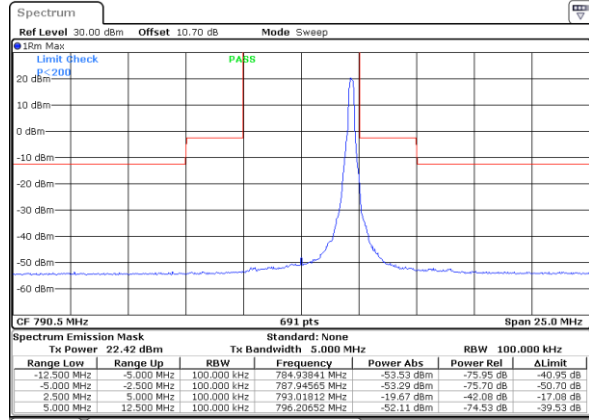

Date: 2.SEP.2022 14:44:28

Highest Channel / Full RB

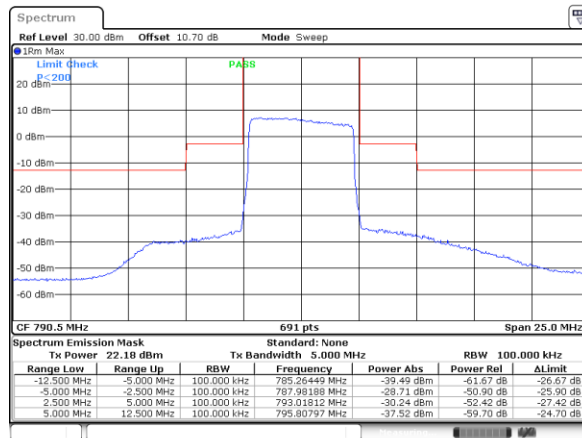


Date: 2.SEP.2022 14:45:31






LTE Band 14 / 5MHz / 256QAM

Highest Channel / 1RB

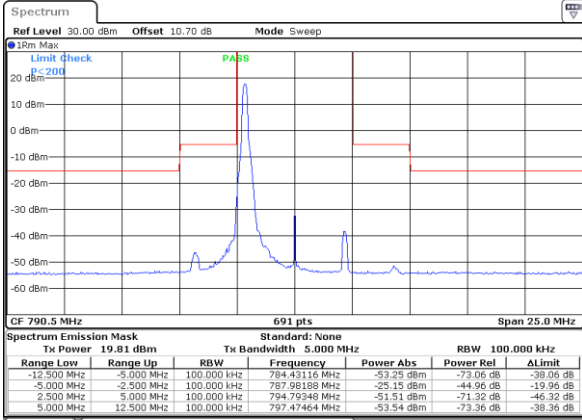


Date: 2.SEP.2022 14:48:46

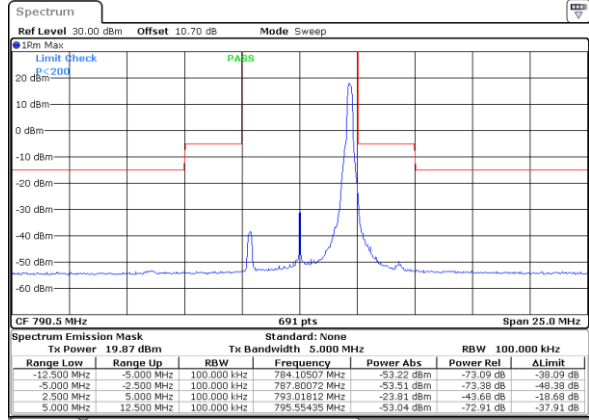

Date: 2.SEP.2022 14:47:40

Highest Channel / Full RB

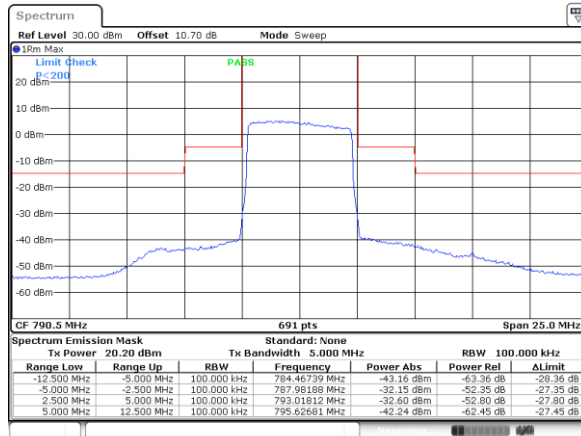


Date: 2.SEP.2022 14:46:34




LTE Band 14 / 10MHz / QPSK

Middle Channel / 1RB

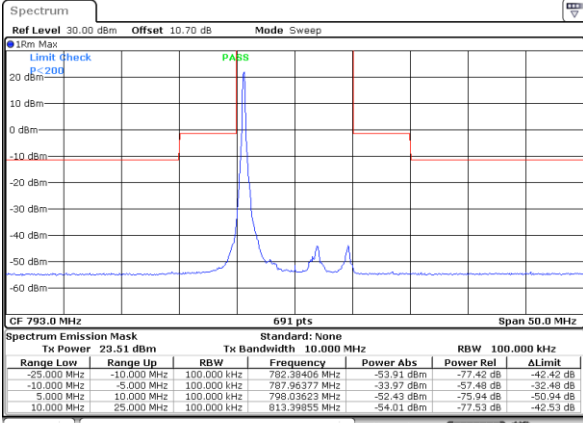


Date: 2,SEP,2022 15:12:19

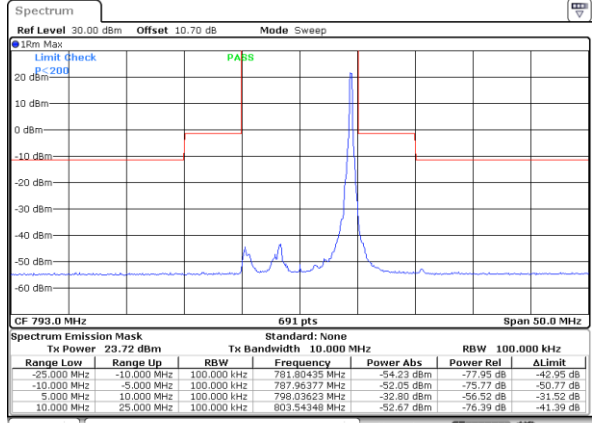

Date: 2,SEP,2022 15:21:52

Middle Channel / Full RB

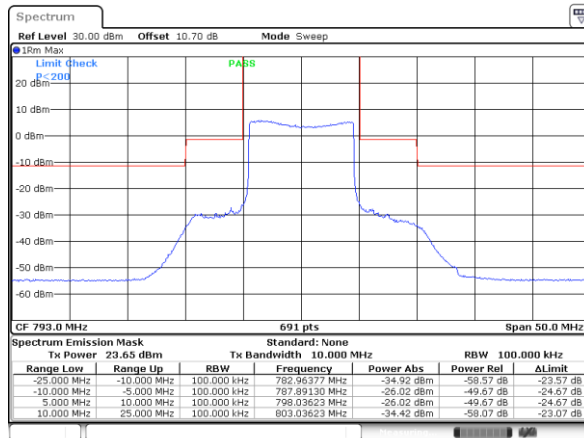


Date: 2,SEP,2022 15:22:14




LTE Band 14 / 10MHz / 16QAM

Middle Channel / 1RB

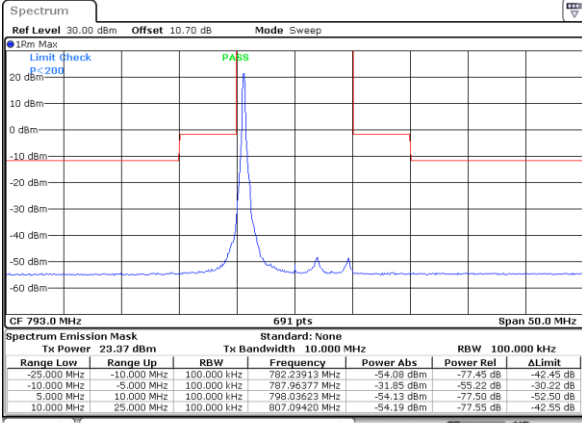


Date: 2,SEP,2022 15:12:53

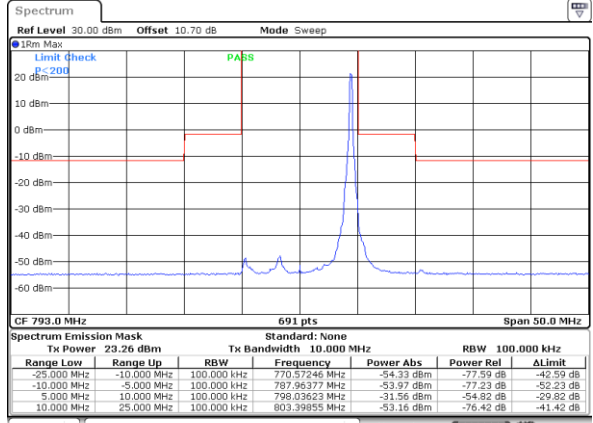

Date: 2,SEP,2022 15:12:56

Middle Channel / Full RB

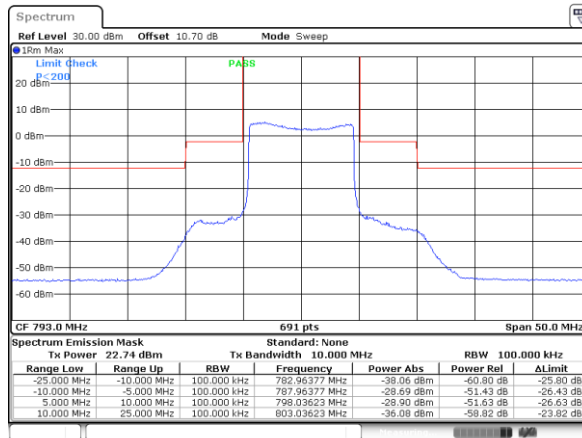


Date: 2,SEP,2022 15:30:59




LTE Band 14 / 10MHz / 64QAM

Middle Channel / 1RB

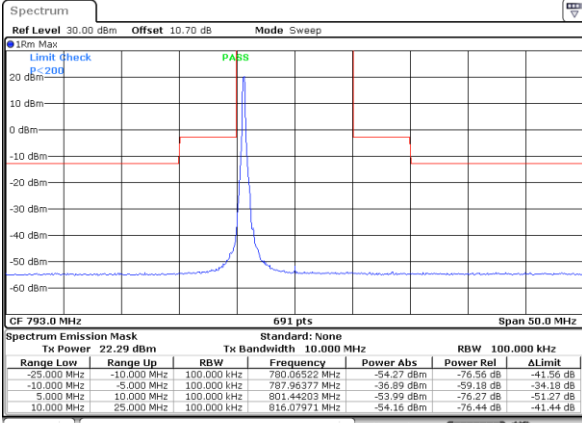


Date: 2,SEP,2022 15:13:07

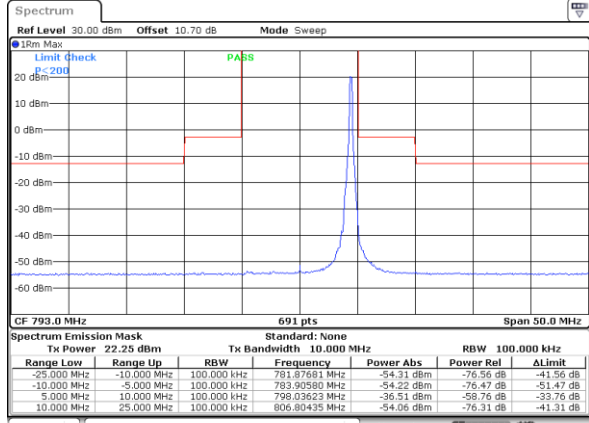

Date: 2,SEP,2022 15:13:04

Middle Channel / Full RB

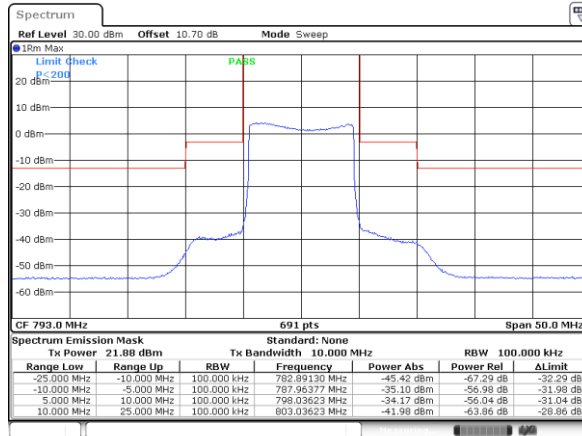


Date: 2,SEP,2022 15:13:02




LTE Band 14 / 10MHz / 256QAM

Middle Channel / 1RB

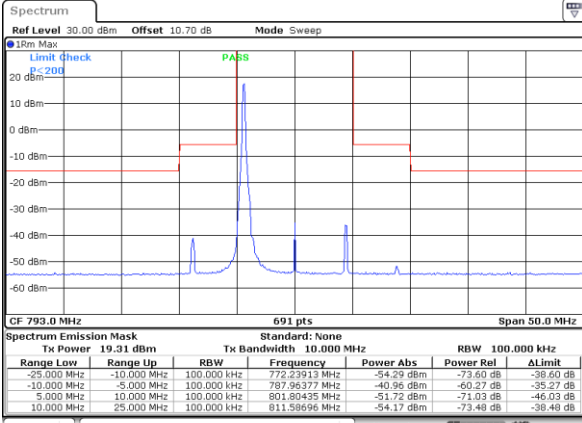


Date: 2,SEP,2022 15:42:31

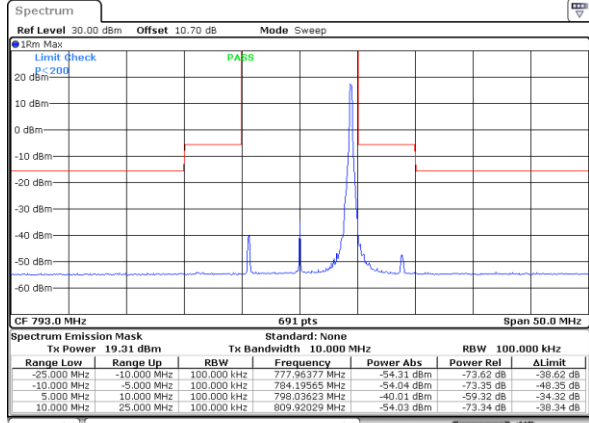

Date: 2,SEP,2022 15:43:33

Middle Channel / Full RB

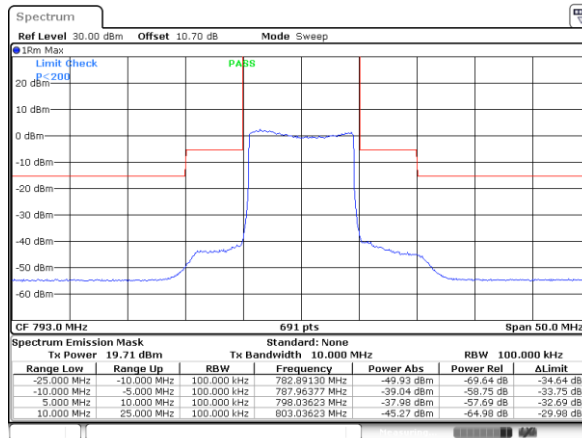

Date: 2,SEP,2022 15:44:36



### Frequency Stability

Test Conditions		LTE Band 14 (QPSK) / Middle Channel	Limit
Temperature (°C)	Voltage (Volt)	BW 10MHz	Note 2.
		Deviation (ppm)	Result
50	Normal Voltage	0.0095	PASS
40	Normal Voltage	0.0106	
30	Normal Voltage	0.0061	
20(Ref.)	Normal Voltage	0.0000	
10	Normal Voltage	0.0092	
0	Normal Voltage	0.0156	
-10	Normal Voltage	0.0045	
-20	Normal Voltage	0.0016	
-30	Normal Voltage	0.0087	
20	Maximum Voltage	0.0074	
20	Normal Voltage	0.0000	
20	Battery End Point	0.0054	

**Note:**

- 1. Normal Voltage = 4.05 V. ; Battery End Point (BEP) = 3.85 V. ; Maximum Voltage = 4.35 V.
- 2. The frequency fundamental emissions stay within the authorized frequency block.



### Appendix B. Test Results of Radiated Test

### LTE Band 14

LTE Band 14 / 5MHz / QPSK									
Channel	Frequency ( MHz )	ERP ( dBm )	Limit ( dBm )	Margin ( dB )	SPA Reading (dBm)	S.G. Power ( dBm )	TX Cable loss ( dB )	TX Antenna Gain (dBi)	Polarization (H/V)
Lowest	1577	-54.51	-42.15	-12.36	-66.03	-60.51	0.80	8.95	H
	2362	-51.58	-13	-38.58	-66.35	-58.25	0.99	9.81	H
	3153	-53.36	-13	-40.36	-70.87	-61.52	1.10	11.41	H
									H
									H
									H
									H
	1577	-56.49	-42.15	-14.34	-67.95	-62.49	0.80	8.95	V
	2365	-52.76	-13	-39.76	-67.72	-59.44	0.99	9.83	V
	3153	-53.34	-13	-40.34	-71.09	-61.50	1.10	11.41	V
									V
									V
									V
									V



LTE Band 14 / 5MHz / QPSK									
Channel	Frequency ( MHz )	ERP ( dBm )	Limit ( dBm )	Margin ( dB )	SPA Reading (dBm)	S.G. Power ( dBm )	TX Cable loss ( dB )	TX Antenna Gain (dBi)	Polarization (H/V)
Middle	1582	-57.55	-42.15	-15.40	-69.11	-63.60	0.80	9.00	H
	2370	-52.41	-13	-39.41	-67.17	-59.12	0.99	9.85	H
	3163	-53.13	-13	-40.13	-70.66	-61.30	1.10	11.43	H
									H
									H
									H
									H
	1582	-57.37	-42.15	-15.22	-68.84	-63.42	0.80	9.00	V
	2373	-53.02	-13	-40.02	-67.94	-59.74	0.99	9.87	V
	3163	-52.81	-13	-39.81	-70.61	-60.98	1.10	11.43	V
									V
									V
									V
									V
Highest	1590	-55.06	-42.15	-12.91	-66.66	-61.20	0.80	9.09	H
	2380	-51.81	-13	-38.81	-66.56	-58.56	1.00	9.90	H
	3173	-53.27	-13	-40.27	-70.86	-61.46	1.10	11.45	H
									H
									H
									H
									H
	1587	-56.38	-42.15	-14.23	-67.86	-62.49	0.80	9.06	V
	2380	-52.95	-13	-39.95	-67.82	-59.70	1.00	9.90	V
	3173	-52.81	-13	-39.81	-70.65	-61.00	1.10	11.45	V
									V
									V
									V
									V

Remark: Spurious emissions within 30-1000MHz were found more than 20dB below limit line.





LTE Band 14 / 10MHz / QPSK									
Channel	Frequency ( MHz )	ERP ( dBm )	Limit ( dBm )	Margin ( dB )	SPA Reading (dBm)	S.G. Power ( dBm )	TX Cable loss ( dB )	TX Antenna Gain (dBi)	Polarization (H/V)
Middle	1574	-55.21	-42.15	-13.06	-66.71	-61.17	0.80	8.91	H
	2366	-52.05	-13	-39.05	-66.82	-58.74	0.99	9.83	H
	3157	-53.40	-13	-40.40	-70.91	-61.56	1.10	11.41	H
									H
									H
									H
									H
	1574	-57.44	-42.15	-15.29	-68.9	-63.40	0.80	8.91	V
	2366	-52.99	-13	-39.99	-67.95	-59.68	0.99	9.83	V
	3157	-52.79	-13	-39.79	-70.54	-60.95	1.10	11.41	V
									V
									V
									V
									V

Remark: Spurious emissions within 30-1000MHz were found more than 20dB below limit line.