



FCC 47 CFR PART 15 SUBPART C

TEST REPORT

For

Wireless Audio Receiver

Model: AW1

Trade Name: Audioengine

Prepared for

**BEAUTIFUL ENTERPRISE CO., LTD.
26TH FLOOR, BEAUTIFUL GROUP TOWER, 77 CONNAUGHT ROAD
CENTRAL, HONG KONG**

Prepared by

**COMPLIANCE CERTIFICATION SERVICES (SHENZHEN) INC.
(aka COMPLIANCE ENGINEERING SERVICE (CHINA))
NO. 5, JINAO INDUSTRIAL PARK, NO. 35 JUKENG ROAD,
DASHUIKENG VILLAGE, GUANLAN TOWN, BAOAN
DISTRICT, SHENZHEN, CHINA**

TEL: 86-755-28055000

FAX: 86-755-28055221



Note: This report shall not be reproduced except in full, without the written approval of Compliance Certification Services Inc. This document may be altered or revised by Compliance Certification Services Inc. personnel only, and shall be noted in the revision section of the document



TABLE OF CONTENTS

1. TEST RESULT CERTIFICATION.....	3
2. EUT DESCRIPTION	4
3. TEST METHODOLOGY	5
3.1 EUT CONFIGURATION.....	5
3.2 EUT EXERCISE.....	5
3.3 GENERAL TEST PROCEDURES	5
3.4 FCC PART 15.205 RESTRICTED BANDS OF OPERATIONS	6
3.5 DESCRIPTION OF TEST MODES	6
4. INSTRUMENT CALIBRATION.....	7
5. FACILITIES AND ACCREDITATIONS	8
5.1 FACILITIES	8
5.2 EQUIPMENT	8
5.3 LABORATORY ACCREDITATIONS AND LISTING	8
6. SETUP OF EQUIPMENT UNDER TEST	9
6.1 SETUP CONFIGURATION OF EUT	9
6.2 SUPPORT EQUIPMENT	9
7. FCC PART 15.247 REQUIREMENTS.....	10
7.1 6DB BANDWIDTH	10
7.2 PEAK POWER.....	14
7.3 PEAK POWER SPECTRAL DENSITY	15
7.4 BAND EDGES MEASUREMENT	18
7.5 SPURIOUS EMISSIONS	23
7.6 POWERLINE CONDUCTED EMISSIONS	34
APPENDIX 1 PHOTOGRPHS OF TEST SETUP.....	38



1. TEST RESULT CERTIFICATION

Applicant: BEAUTIFUL ENTERPRISE CO., LTD.
 26TH FLOOR, BEAUTIFUL GROUP TOWER, 77
 CONNAUGHT ROAD CENTRAL, HONG KONG

Equipment Under Test: Wireless Audio Receiver

Trade Name: Audioengine

Model: AW1

Date of Test: August 27~28, 2007

APPLICABLE STANDARDS	
STANDARD	TEST RESULT
FCC Part 15 Subpart C	No non-compliance noted

We hereby certify that:

The above equipment was tested by Compliance Certification Services Inc. The test data, data evaluation, test procedures, and equipment configurations shown in this report were made in accordance with the procedures given in ANSI C63.4: 2003 and the energy emitted by the sample EUT tested as described in this report is in compliance with conducted and radiated emission limits of FCC Rules Part 15.207, 15.209 and 15.247.

The test results of this report relate only to the tested sample EUT identified in this report.

Approved by:

Clinton Kao / Manager
COMPLIANCE CERTIFICATION
SERVICES (SHENZHEN) INC.

Tested By:

Maya You

Reviewed by:

Eric Wong / Assistant manager
COMPLIANCE CERTIFICATION
SERVICES (SHENZHEN) INC.



2. EUT DESCRIPTION

Product	Wireless Audio Receiver
Trade Name	Audioengine
Model Number	AW1
Model Discrepancy	N/A
Power Supply	RX: DC5V Powered by the adaptor Adaptor Manufacturer/ Model No.: KINGWALL/ AS070-050-BA100 AC Input: AC100-240V, 0.4A, 50/60Hz; DC Output: DC5V, 1A
Frequency Range	2405 ~ 2477 MHz
Transmit Power	12.44 dBm
Modulation Technique	DQPSK
Number of Channels	37 Channels
Antenna Specification	Chip Antenna Gain: 2 dBi (max)
Temperature Range	0 ~ +55°C

Note: This submittal(s) (test report) is intended for FCC ID: UZZAW1RECEIVER filing to comply with Section 15.207, 15.209 and 15.247 of the FCC Part 15, Subpart C Rules.



3. TEST METHODOLOGY

The tests documented in this report were performed in accordance with ANSI C63.4: 2003. Radiated testing was performed at an antenna to EUT distance 3 meters.

3.1 EUT CONFIGURATION

The EUT configuration for testing is installed on RF field strength measurement to meet the Commissions requirement and operating in a manner that intends to maximize its emission characteristics in a continuous normal application.

3.2 EUT EXERCISE

The EUT was operated in the engineering mode to fix the Tx frequency that was for the purpose of the measurements.

According to its specifications, the EUT must comply with the requirements of the Section 15.207, 15.209 and 15.247 under the FCC Rules Part 15 Subpart C.

3.3 GENERAL TEST PROCEDURES

Conducted Emissions

The EUT is placed on the turntable, which is 0.8 m above ground plane. According to the requirements in Section 13.1.4.1 of ANSI C63.4: 2003. Conducted emissions from the EUT measured in the frequency range between 0.15 MHz and 30MHz using CISPR Quasi-peak and average detector modes.

Radiated Emissions

The EUT is placed on a turn table, which is 0.8 m above ground plane. The turntable shall rotate 360 degrees to determine the position of maximum emission level. EUT is set 3m away from the receiving antenna, which varied from 1m to 4m to find out the highest emission. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical. In order to find out the max. emission, the relative positions of this hand-held transmitter (EUT) was rotated through three orthogonal axes according to the requirements in Section 13.1.4.1 of ANSI C63.4: 2003.

3.4 FCC PART 15.205 RESTRICTED BANDS OF OPERATIONS

(a) Except as shown in paragraph (d) of this section, only spurious emissions are permitted in any of the frequency bands listed below:

MHz	MHz	MHz	GHz
0.090 - 0.110	16.42 - 16.423	399.9 - 410	4.5 - 5.15
¹ 0.495 - 0.505	16.69475 - 16.69525	608 - 614	5.35 - 5.46
2.1735 - 2.1905	16.80425 - 16.80475	960 - 1240	7.25 - 7.75
4.125 - 4.128	25.5 - 25.67	1300 - 1427	8.025 - 8.5
4.17725 - 4.17775	37.5 - 38.25	1435 - 1626.5	9.0 - 9.2
4.20725 - 4.20775	73 - 74.6	1645.5 - 1646.5	9.3 - 9.5
6.215 - 6.218	74.8 - 75.2	1660 - 1710	10.6 - 12.7
6.26775 - 6.26825	108 - 121.94	1718.8 - 1722.2	13.25 - 13.4
6.31175 - 6.31225	123 - 138	2200 - 2300	14.47 - 14.5
8.291 - 8.294	149.9 - 150.05	2310 - 2390	15.35 - 16.2
8.362 - 8.366	156.52475 -	2483.5 - 2500	17.7 - 21.4
8.37625 - 8.38675	156.52525	2655 - 2900	22.01 - 23.12
8.41425 - 8.41475	156.7 - 156.9	3260 - 3267	23.6 - 24.0
12.29 - 12.293	162.0125 - 167.17	3332 - 3339	31.2 - 31.8
12.51975 - 12.52025	167.72 - 173.2	3345.8 - 3358	36.43 - 36.5
12.57675 - 12.57725	240 - 285	3600 - 4400	(²)
13.36 - 13.41	322 - 335.4		

¹ Until February 1, 1999, this restricted band shall be 0.490-0.510 MHz.

² Above 38.6

(b) Except as provided in paragraphs (d) and (e), the field strength of emissions appearing within these frequency bands shall not exceed the limits shown in Section 15.209. At frequencies equal to or less than 1000 MHz, compliance with the limits in Section 15.209 shall be demonstrated using measurement instrumentation employing a CISPR quasi-peak detector. Above 1000 MHz, compliance with the emission limits in Section 15.209 shall be demonstrated based on the average value of the measured emissions. The provisions in Section 15.35 apply to these measurements.

3.5 DESCRIPTION OF TEST MODES

The EUT has been tested under operating condition.

Test program used to control the EUT for staying in continuous transmitting and receiving mode is programmed.

Channel low, mid and high with highest data rate (worst case) are chosen for full testing.

The field strength of spurious radiation emission was measured in the following position: EUT stand-up position (Y mode) and lie-down position (X, Z mode) The following data show only the worst case setup.

The worst case (X axis) was reported.



4. INSTRUMENT CALIBRATION

The measuring equipment, which was utilized in performing the tests documented herein, has been calibrated in accordance with the manufacturer's recommendations for utilizing calibration equipment, which is traceable to recognized national standards.



5. FACILITIES AND ACCREDITATIONS

5.1 FACILITIES

All measurement facilities used to collect the measurement data are located at

No. 5, Jinao industrial park, No.35 Jukeng Road, Dashuikeng Village, Guanlan Town, Baoan District, Shenzhen, China

The sites are constructed in conformance with the requirements of ANSI C63.7, ANSI C63.4: 2003 and CISPR Publication 22.

5.2 EQUIPMENT

Radiated emissions are measured with one or more of the following types of Linearly polarized antennas: tuned dipole, biconical, log periodic, bi-log, and/or ridged waveguide, horn. Spectrum analyzers with pre-selectors and quasi-peak detectors are used to perform radiated measurements.

Conducted emissions are measured with Line Impedance Stabilization Networks and EMI Test Receivers.

Calibrated wideband preamplifiers, coaxial cables, and coaxial attenuators are also used for making measurements.

All receiving equipment conforms to CISPR Publication 16-1, "Radio Interference Measuring Apparatus and Measurement Methods."

5.3 LABORATORY ACCREDITATIONS AND LISTING

The test facilities used to perform radiated and conducted emissions tests are accredited by National Voluntary Laboratory Accreditation Program for the specific scope of accreditation under Lab Code: 200577-0 to perform Electromagnetic Interference tests according to FCC PART 15 AND CISPR 22 requirements. No part of this report may be used to claim or imply product endorsement by NVLAP or any agency of the US Government. In addition, the test facilities are listed with Federal Communications Commission.



6. SETUP OF EQUIPMENT UNDER TEST

6.1 SETUP CONFIGURATION OF EUT

See test photographs attached in Appendix 1 for the actual connections between EUT and support equipment.

6.2 SUPPORT EQUIPMENT

Device Type	Brand	Model	FCC ID	Series No.	Data Cable	Power Cord
Cassette Play	AOITION	BS-8501	DoC	N/A	N/A	N/A
Notebook	IBM	2672	DoC	992F2VG	N/A	Un-Shielded, 1.8m
Headphone	JiaFen	CD-750A	DoC	N/A	Un-Shielded, 2.1m	N/A

Notes:

- 1. All the equipment/cables were placed in the worst-case configuration to maximize the emission during the test.*
- 2. Grounding was established in accordance with the manufacturer's requirements and conditions for the intended use.*

7. FCC PART 15.247 REQUIREMENTS

7.1 6dB BANDWIDTH

LIMIT


For the direct sequence systems, the minimum 6dB bandwidth shall be at least 500kHz.

MEASUREMENT EQUIPMENT USED

Name of Equipment	Manufacturer	Model	Serial Number	Calibration Due
PSA Spectrum Analyzer	Agilent	E4446A	US44300399	02/05/2008

Remark: Each piece of equipment is scheduled for calibration once a year.

Test Configuration



TEST PROCEDURE

1. Place the EUT on the table and set it in the transmitting mode.
2. Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to the spectrum analyzer.
3. Set the spectrum analyzer as RBW = 100kHz, VBW = RBW, Span = 10MHz, Sweep = auto.
4. Mark the peak frequency and -6dB (upper and lower) frequency.
5. Repeat until all the rest channels are investigated.



TEST RESULTS

No non-compliance noted

Test Data

Test mode: TX

Channel	Frequency (MHz)	Bandwidth (kHz)	Limit (kHz)	Margin (kHz)
Low	2405	1130	>500	PASS
Mid	2441	1130		PASS
High	2477	1130		PASS




Test Plot

6dB Bandwidth (CH Low)

Agilent 16:21:04 Aug 24, 2007

R T

Mkr1 1.13 MHz
-0.30 dB

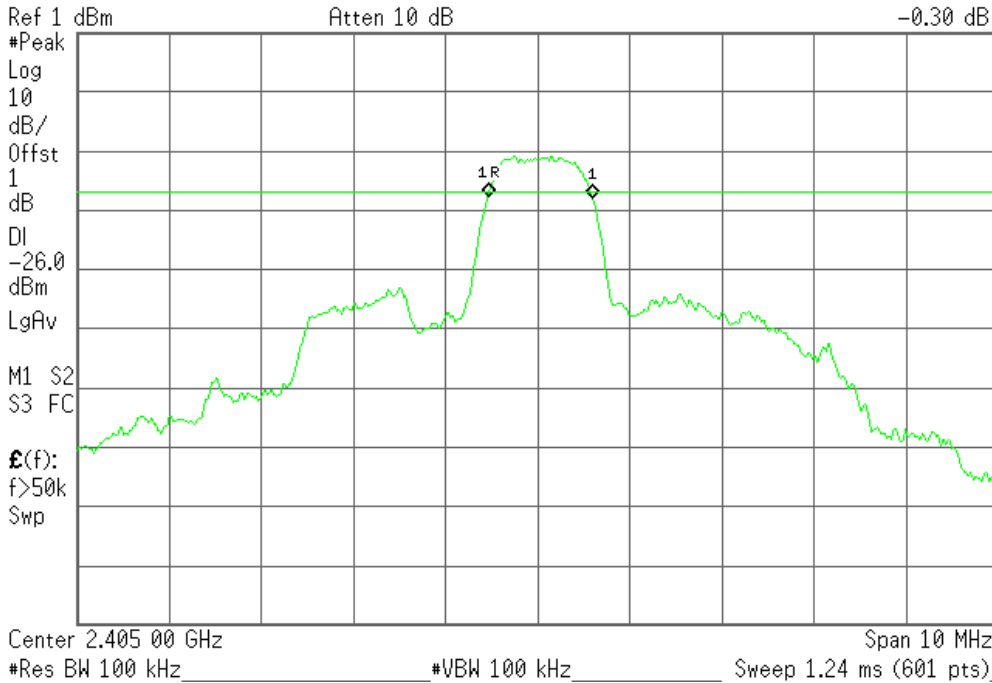


6dB Bandwidth (CH Mid)

Agilent 16:33:37 Aug 24, 2007

R

Mkr1 1.13 MHz
-0.08 dB

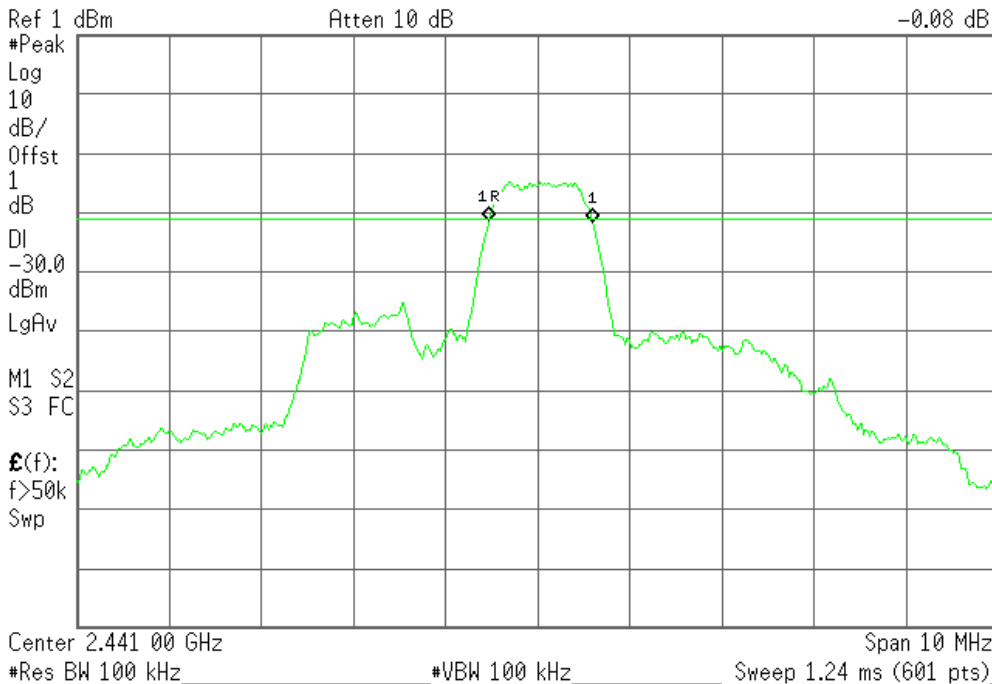




6dB Bandwidth (CH High)

Agilent 16:53:08 Aug 24, 2007

R

Mkr1 1.13 MHz
-0.52 dB

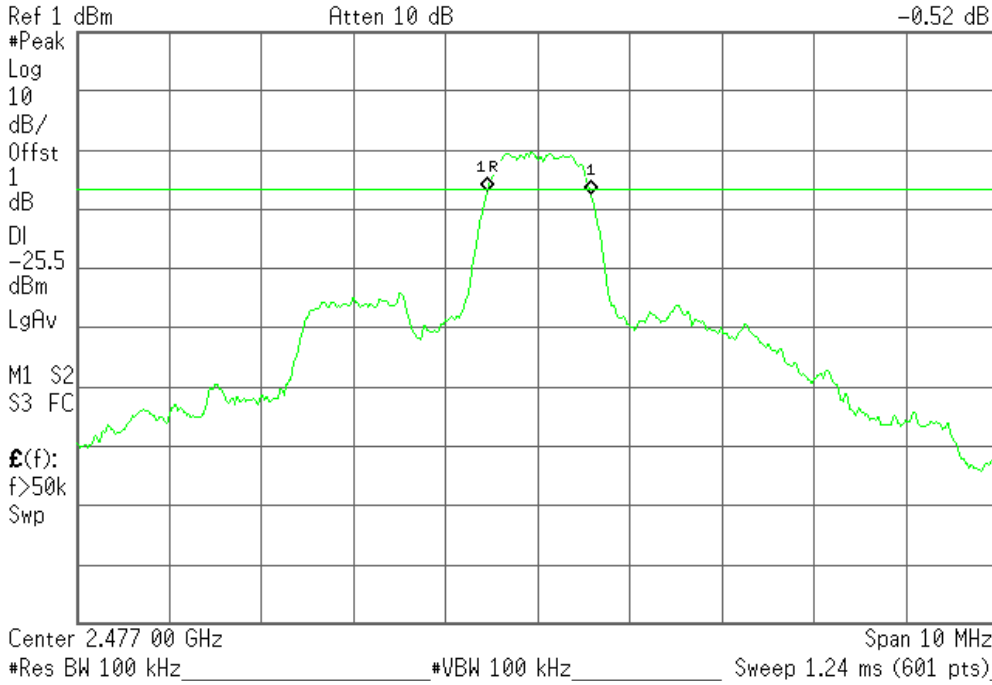



7.2 PEAK POWER

LIMIT

The maximum peak output power of the intentional radiator shall not exceed the following:


1. For systems using digital modulation in the bands of 902-928 MHz, 2400-2483.5 MHz, and 5725-5850 MHz: 1 watt.
2. Except as shown in paragraphs (b)(3) (i), (ii) and (iii) of this section, if transmitting antennas of directional gain greater than 6 dBi are used the peak output power from the intentional radiator shall be reduced below the stated values in paragraphs (b)(1) or (b)(2) of this section, as appropriate, by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

MEASUREMENT EQUIPMENT USED

Name of Equipment	Manufacturer	Model	Serial Number	Calibration Due
RF Power Meter & Sensor	Anritsu	ML2487A	6K00001491	02/23/2008

Remark: Each piece of equipment is scheduled for calibration once a year.

Test Configuration



TEST PROCEDURE

The transmitter output is connected to the RF Power Meter. The RF Power Meter is set to the peak power detection.

TEST RESULTS

No non-compliance noted

Test Data

Channel	Frequency (MHz)	Reading Power (dBm)	Factor (dB)	Output Power (dBm)	Output Power (W)	Limit (W)	Result
Low	2405	11.44	1.00	12.44	0.01754	1	PASS
Md	2441	9.53	1.00	10.53	0.01130		PASS
Hgh	2477	7.88	1.00	8.88	0.00773		PASS



7.3 PEAK POWER SPECTRAL DENSITY

LIMIT


1. For direct sequence systems, the peak power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8dBm in any 3kHz band during any time interval of continuous transmission.
2. The direct sequence operating of the hybrid system, with the frequency hopping operation turned off, shall comply with the power density requirements of paragraph (d) of this section.

MEASUREMENT EQUIPMENT USED

Name of Equipment	Manufacturer	Model	Serial Number	Calibration Due
PSA Spectrum Analyzer	Agilent	E4446A	US44300399	02/08/2007

Remark: Each piece of equipment is scheduled for calibration once a year.

Test Configuration



TEST PROCEDURE

1. Place the EUT on the table and set it in transmitting mode.
2. Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to the spectrum analyzer.
3. Set the spectrum analyzer as RBW = 3kHz, VBW = 10kHz, Span = 1.5MHz, Sweep=100s
4. Record the max. reading.
5. Repeat the above procedure until the measurements for all frequencies are completed.

TEST RESULTS

No non-compliance noted

Test Data

Channel	Frequency	Reading (dBm)	Factor (dB)	PPSD (dBm)	Limit (dBm)	Result
Low	2405	-3.47	1.00	-2.47	8.00	PASS
Mid	2441	-5.47	1.00	-4.47		PASS
High	2477	-7.53	1.00	-6.53		PASS




Test Plot

PPSD (CH Low)

Agilent 12:02:46 Aug 24, 2007

R T

Mkr1 2.405 010 GHz
-2.47 dBm

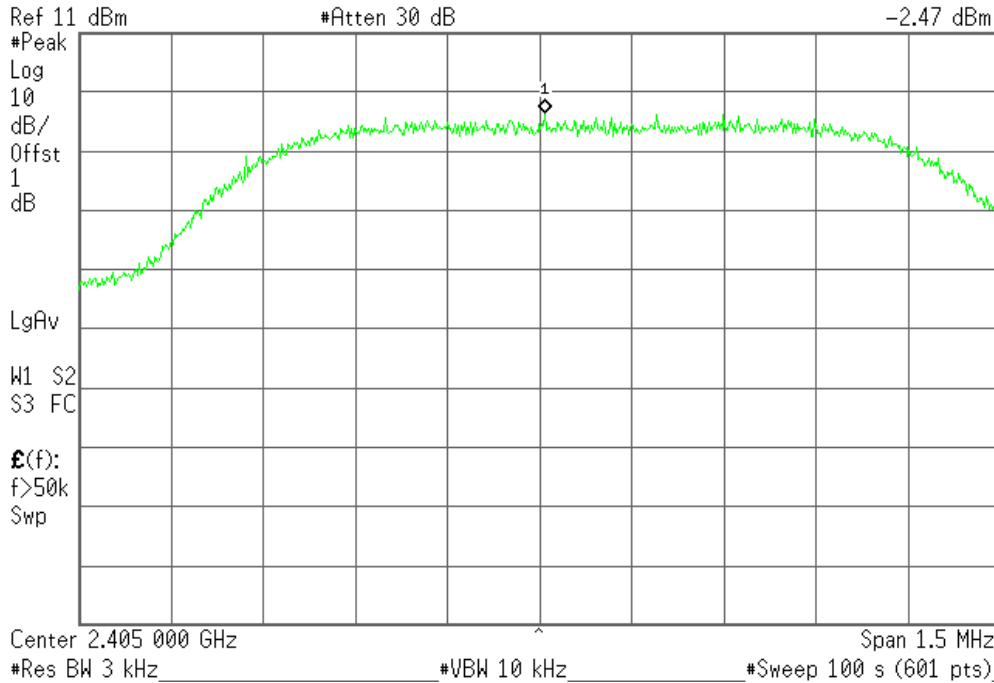


PPSD (CH Mid)

Agilent 11:59:49 Aug 24, 2007

R

Mkr1 2.441 298 GHz
-4.47 dBm

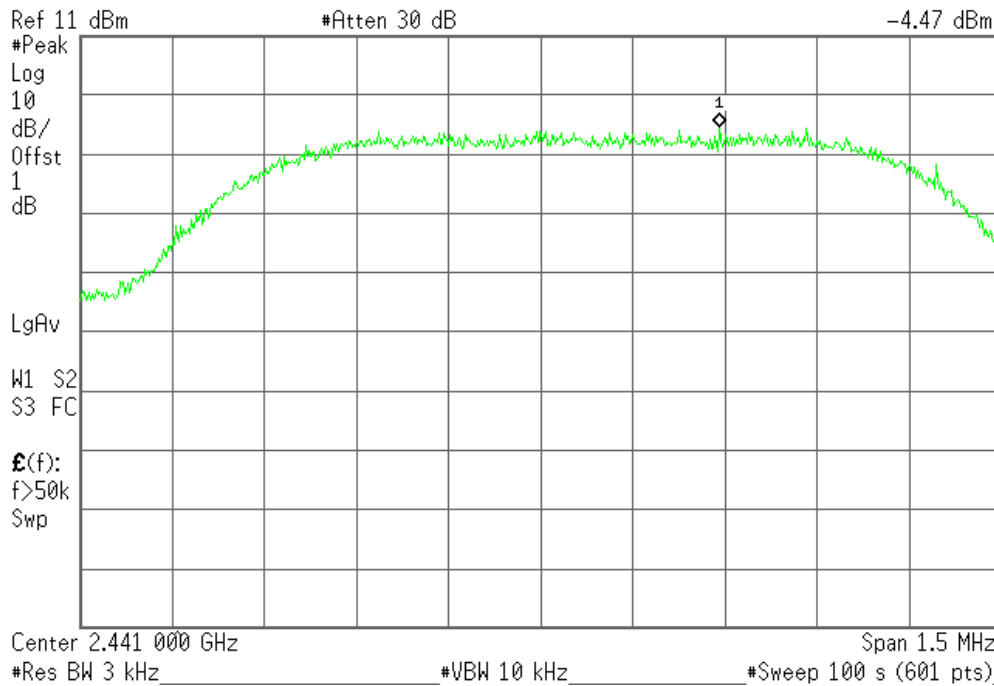




PPSD (CH High)

Agilent 11:57:37 Aug 24, 2007

R

Mkr1 2.476 821 GHz
-6.53 dBm

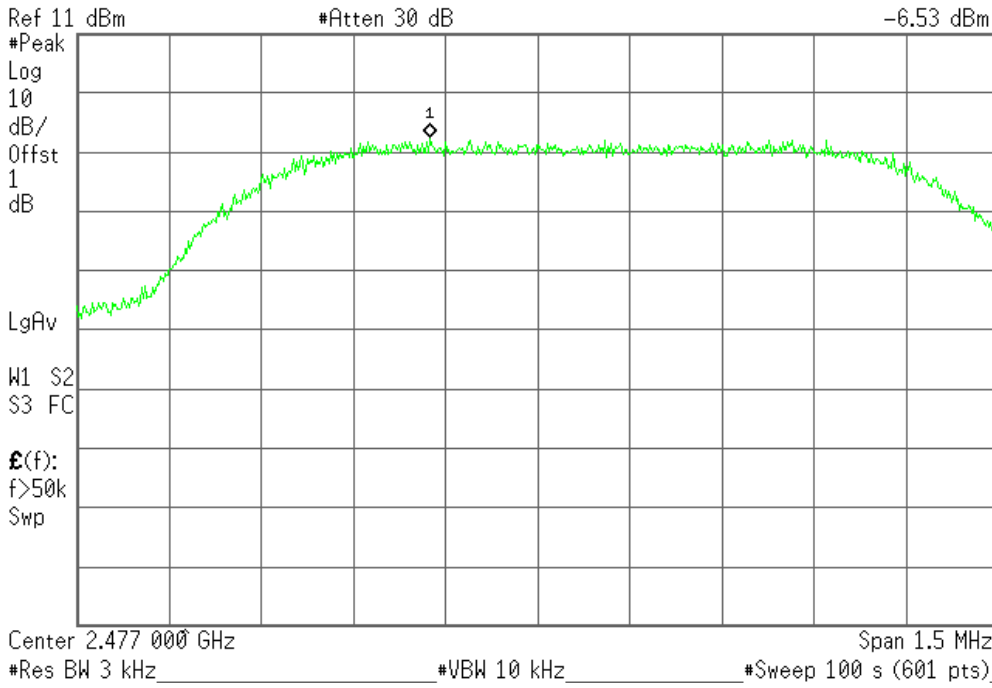

7.4BAND EDGES MEASUREMENT


LIMIT

According to §15.247(c), in any 100 kHz bandwidth outside the frequency bands in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20dB below that in the 100kHz bandwidth within the band that contains the highest level of the desired power, In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in 15.209(a).

MEASUREMENT EQUIPMENT USED

Name of Equipment	Manufacturer	Model	Serial Number	Calibration Due
PSA Spectrum Analyzer	Agilent	E4446A	US44300399	02/08/2007

Test Configuration

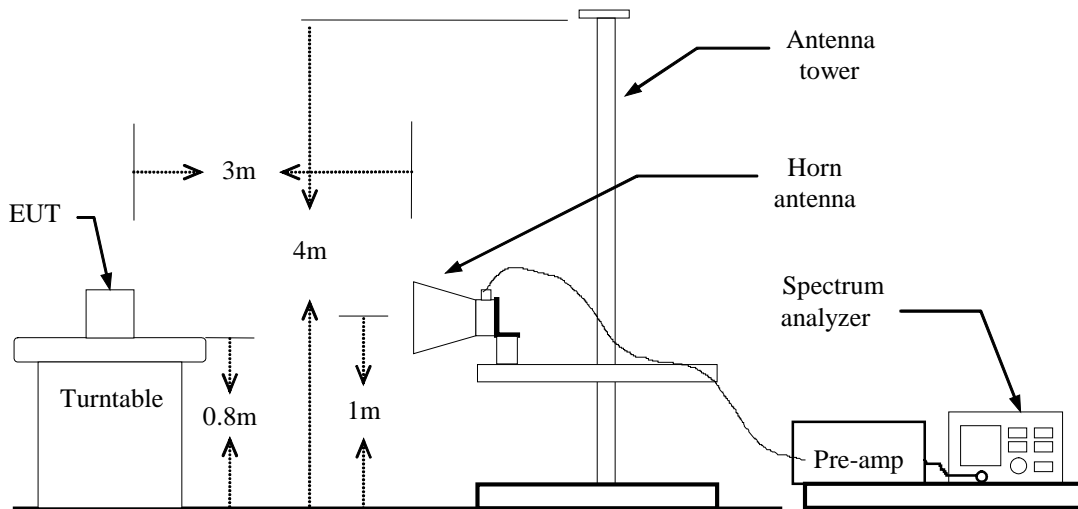

TEST PROCEDURE

1. The EUT is placed on a turntable, which is 0.8m above the ground plane.
2. The turntable shall be rotated for 360 degrees to determine the position of maximum emission level.
3. EUT is set 3m away from the receiving antenna, which is varied from 1m to 4m to find out the highest emission.
4. Set the spectrum analyzer in the following setting in order to capture the lower and upper band-edges of the emission:
 - (a) PEAK: RBW=VBW=1MHz / Sweep=AUTO
 - (b) AVERAGE: RBW=1MHz / VBW=10Hz / Sweep=AUTO
5. Repeat the procedures until all the PEAK and AVERAGE versus POLARIZATION are measured.

TEST RESULTS

Refer to attach spectrum analyzer data chart.



Test Data


Band Edges (CH-Low)

Detector mode: Peak

Polarity: Vertical

Agilent 12:23:30 Aug 24, 2007

R

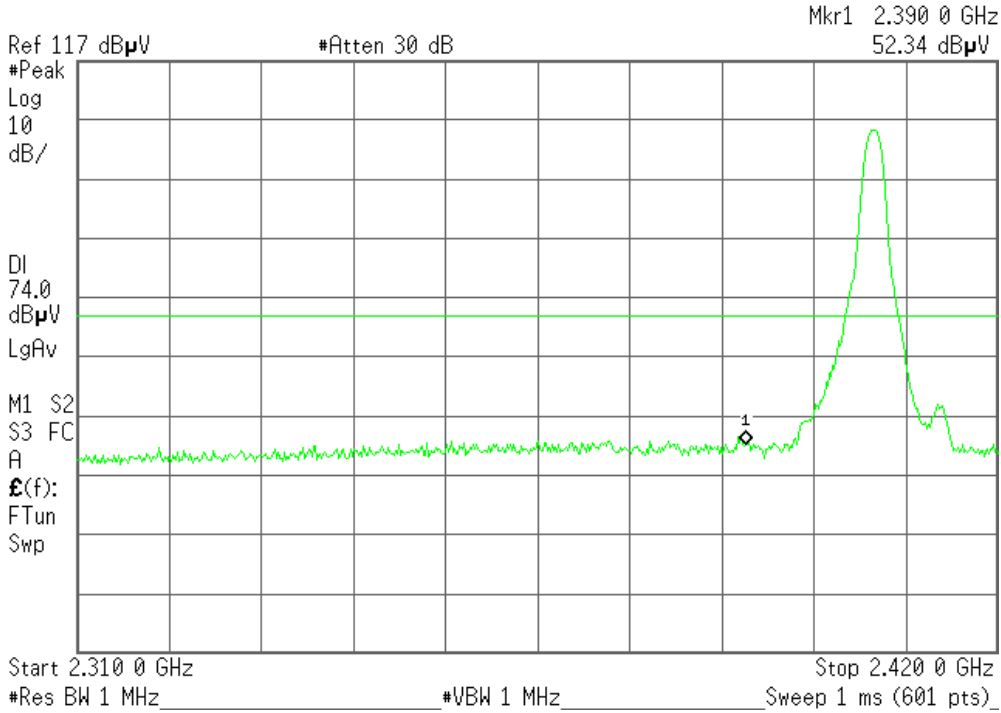


Detector mode: Average

Polarity: Vertical

Agilent 12:24:03 Aug 24, 2007

R T

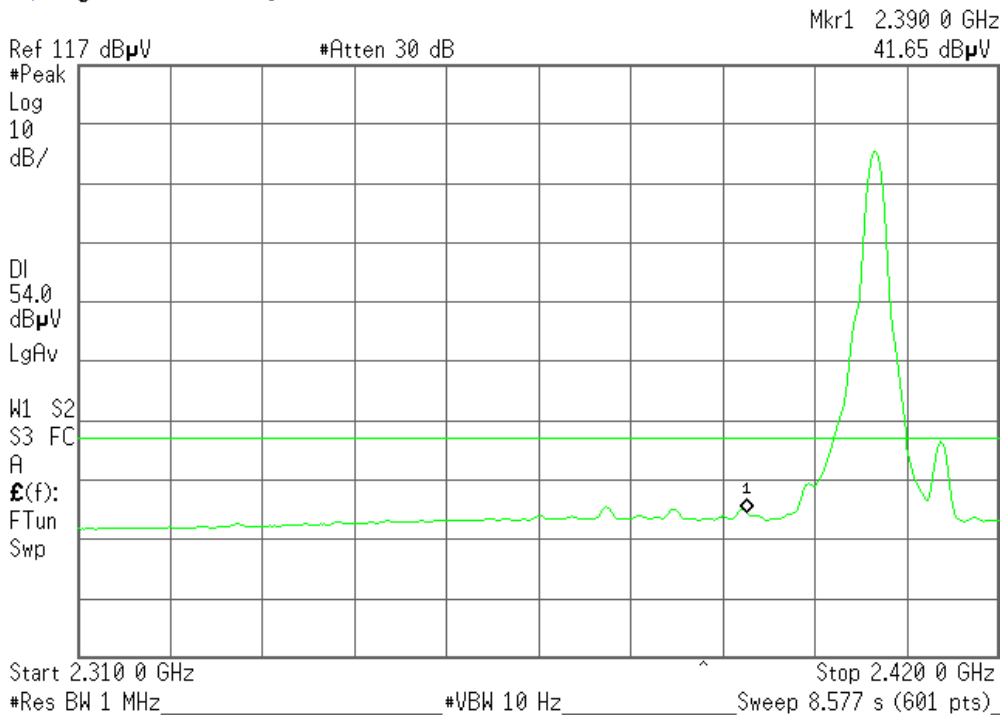




Detector mode: Peak

Polarity: Horizontal

Agilent 12:29:02 Aug 24, 2007

R T

Mkr1 2.390 0 GHz
51.06 dB μ V

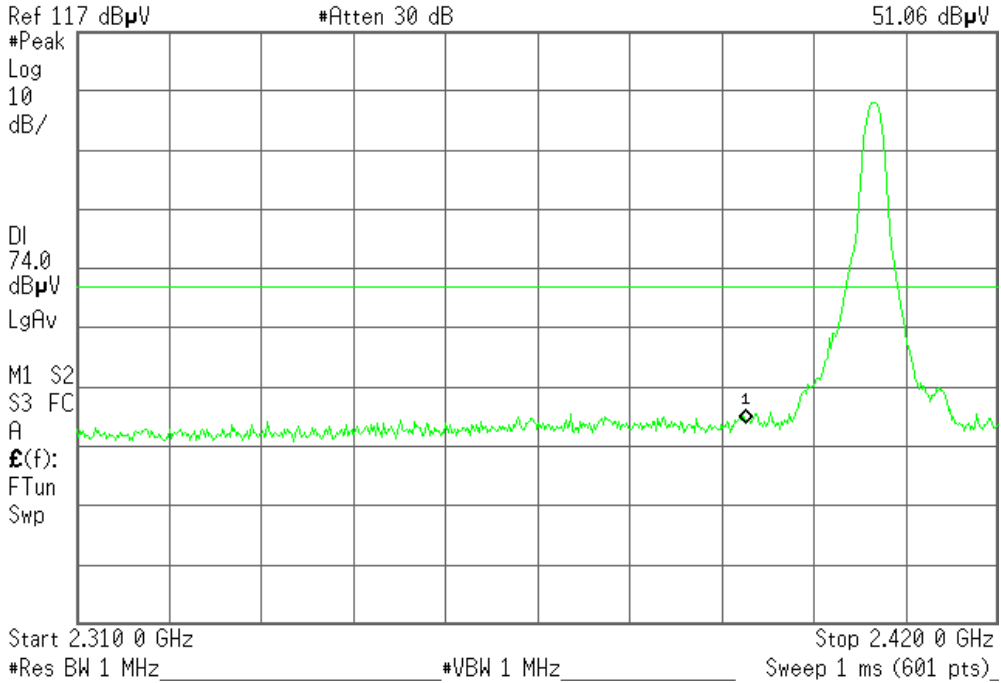


Detector mode: Average

Polarity: Horizontal

Agilent 12:29:21 Aug 24, 2007

R T

Mkr1 2.390 0 GHz
41.52 dB μ V

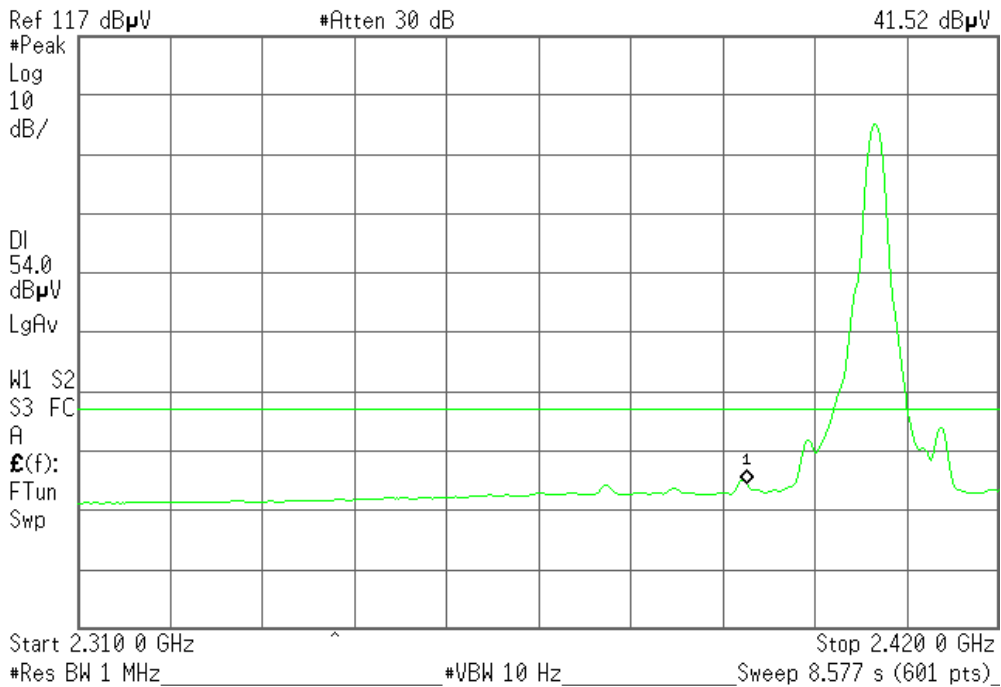



Band Edges (CH-High)

Detector mode: Peak

Polarity: Vertical


Agilent 12:25:13 Aug 24, 2007

R

Mkr1 2.483 50 GHz
51.92 dB μ V

Ref 117 dB μ V

#Atten 30 dB

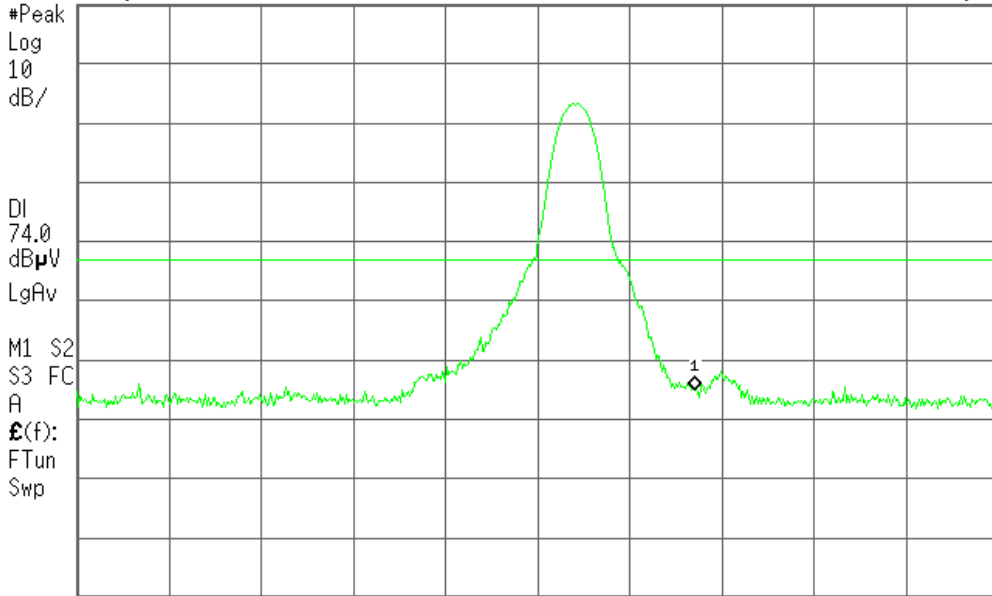

Start 2.450 00 GHz

Stop 2.500 00 GHz

#Res BW 1 MHz

#VBW 1 MHz

Sweep 1 ms (601 pts)

Detector mode: Average

Polarity: Vertical


Agilent 12:25:30 Aug 24, 2007

R T

Mkr1 2.483 50 GHz
41.88 dB μ V

Ref 117 dB μ V

#Atten 30 dB

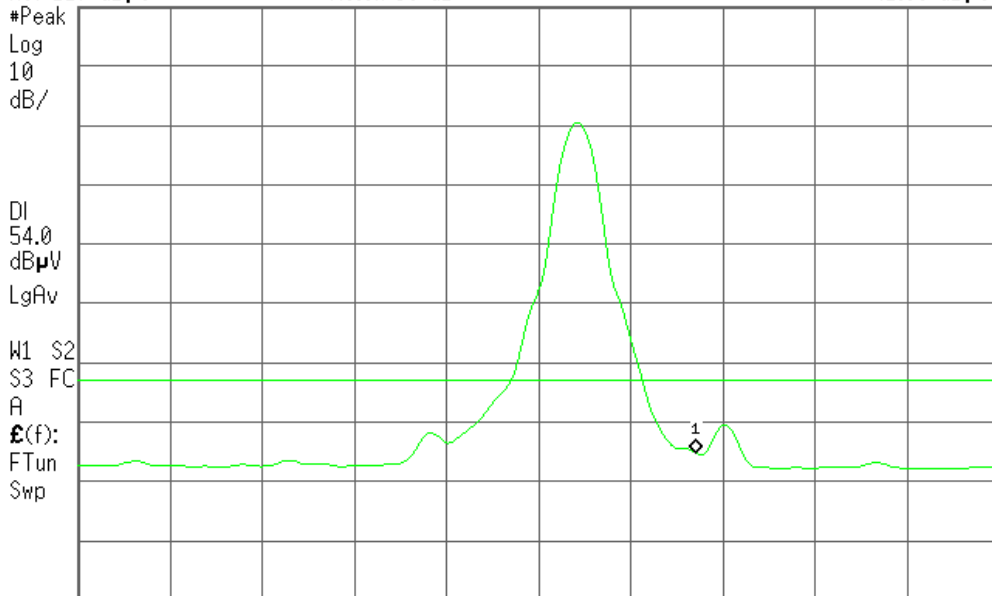

Start 2.450 00 GHz

Stop 2.500 00 GHz

#Res BW 1 MHz

#VBW 10 Hz

Sweep 3.899 s (601 pts)




Detector mode: Peak

Polarity: Horizontal

Agilent 12:27:40 Aug 24, 2007

R T

Mkr1 2.483 50 GHz
52.84 dBμV

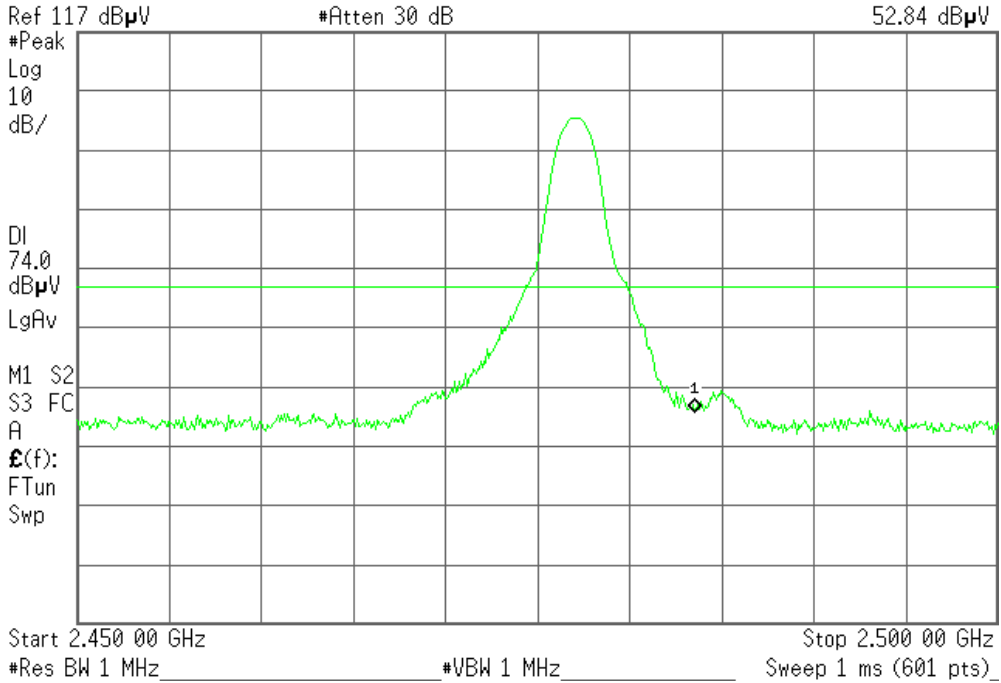


Detector mode: Average

Polarity: Horizontal

Agilent 12:27:58 Aug 24, 2007

R T

Mkr1 2.483 50 GHz
43.13 dBμV

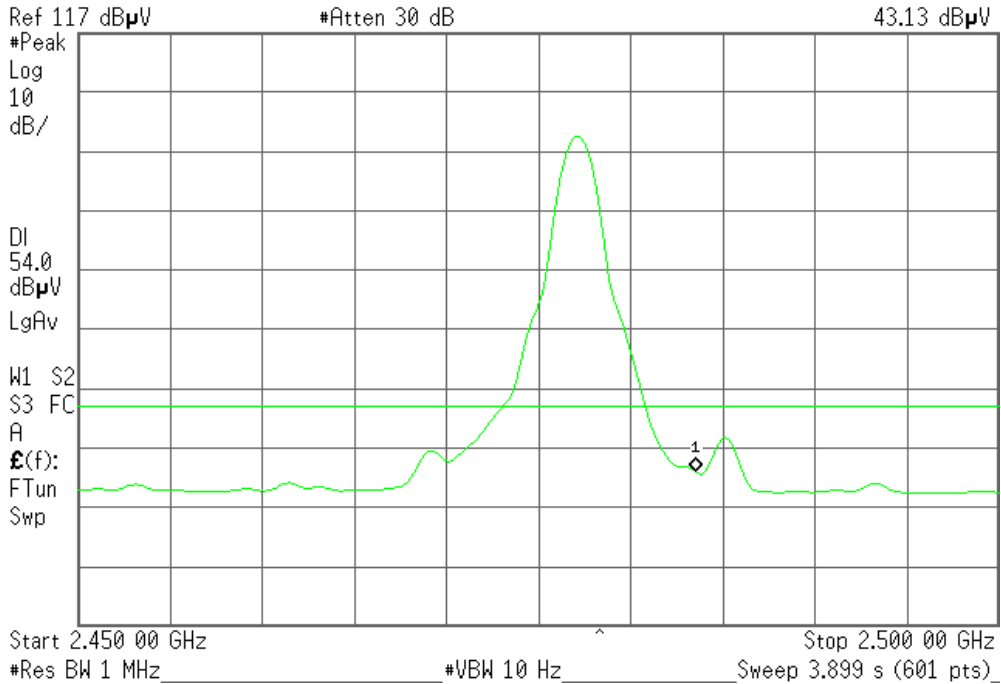



7.5 SPURIOUS EMISSIONS

7.5.1 Conducted Measurement

LIMIT


In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement. Attenuation below the general limits specified in Section 15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in Section 15.205(a), must also comply with the radiated emission limits specified in Section 15.209(a) (see Section 15.205(c)).

MEASUREMENT EQUIPMENT USED

Name of Equipment	Manufacturer	Model	Serial Number	Calibration Due
PSA Spectrum Analyzer	Agilent	E4446A	US44300399	02/05/2008

Remark: Each piece of equipment is scheduled for calibration once a year.

Test Configuration



TEST PROCEDURE

Conducted RF measurements of the transmitter output were made to confirm that the EUT antenna port conducted emissions meet the specified limit and to identify any spurious signals that require further investigation or measurements on the radiated emissions site.

The transmitter output is connected to the spectrum analyzer. The resolution bandwidth is set to 100 KHz. The video bandwidth is set to 100 KHz.

Measurements are made over the 30MHz to 26GHz range with the transmitter set to the lowest, middle, and highest channels.

TEST RESULTS

No non-compliance noted




Test Plot

CH Low

30MHz – 2.9GHz

Agilent 12:03:51 Aug 24, 2007


R

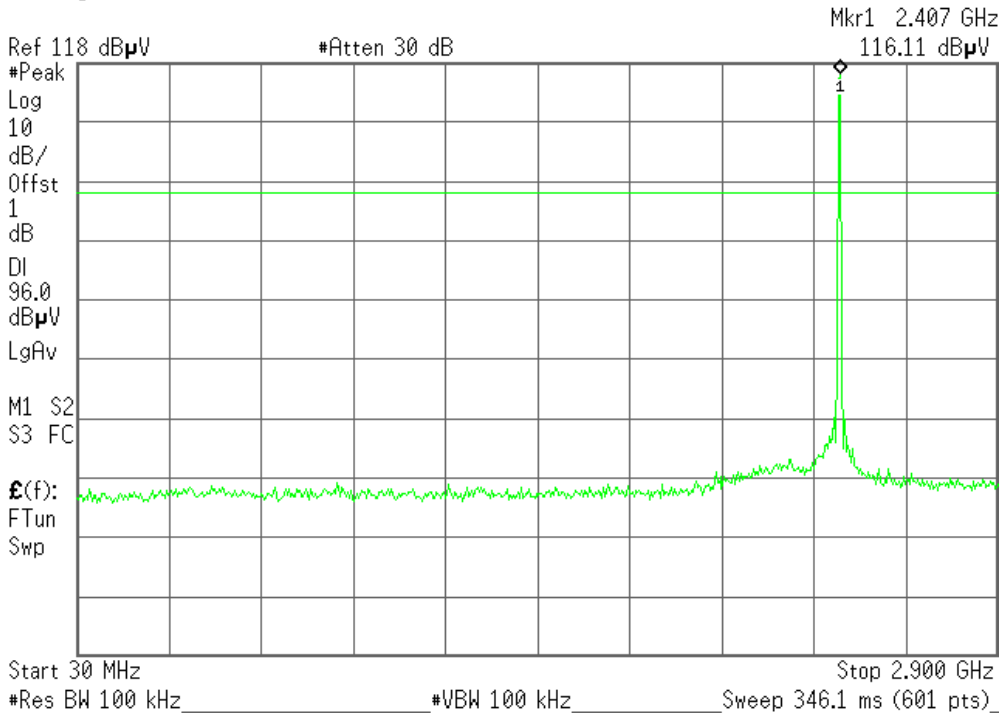

2.9GHz – 26.5GHz

Agilent 12:04:57 Aug 24, 2007

R T

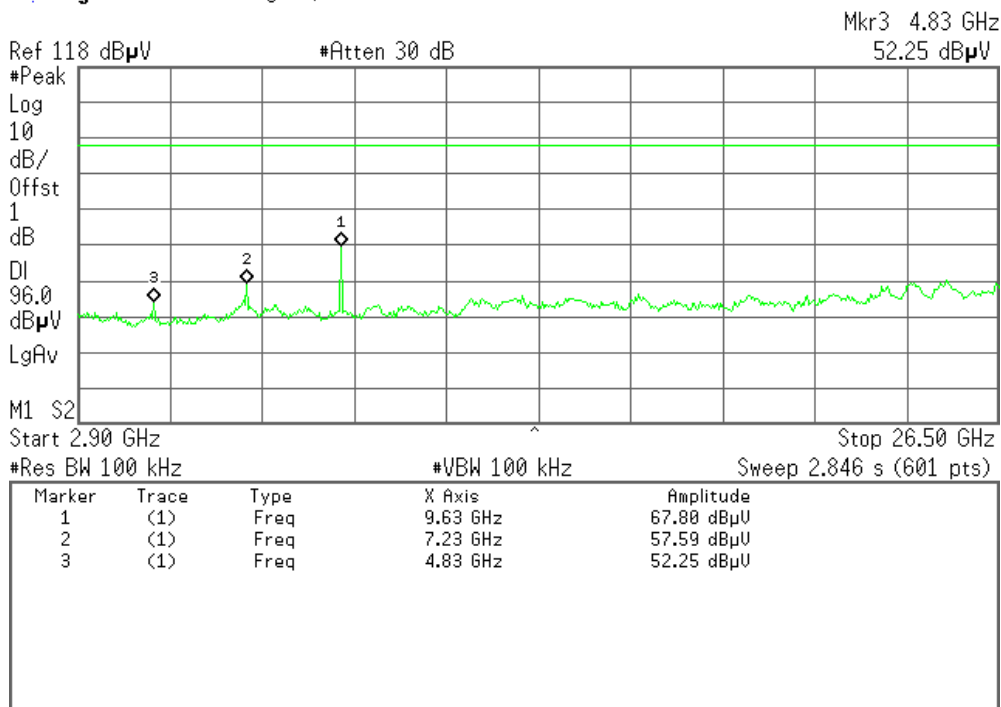




CH Mid

30MHz – 2.9GHz

Agilent 12:05:52 Aug 24, 2007


R T

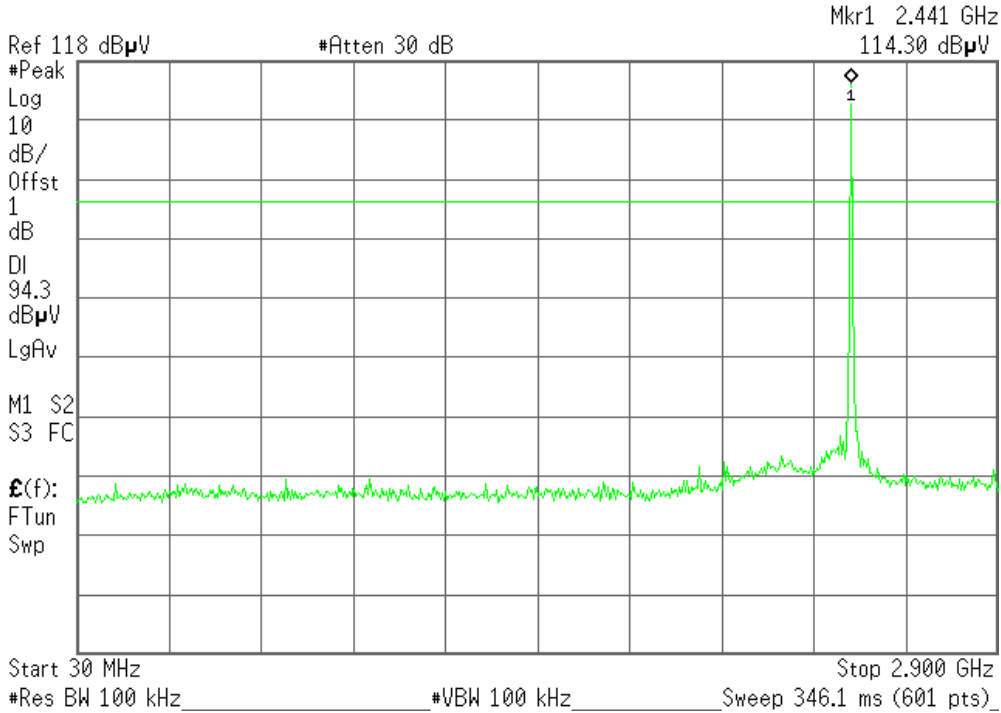

2.9GHz – 26.5GHz

Agilent 12:06:49 Aug 24, 2007

R T

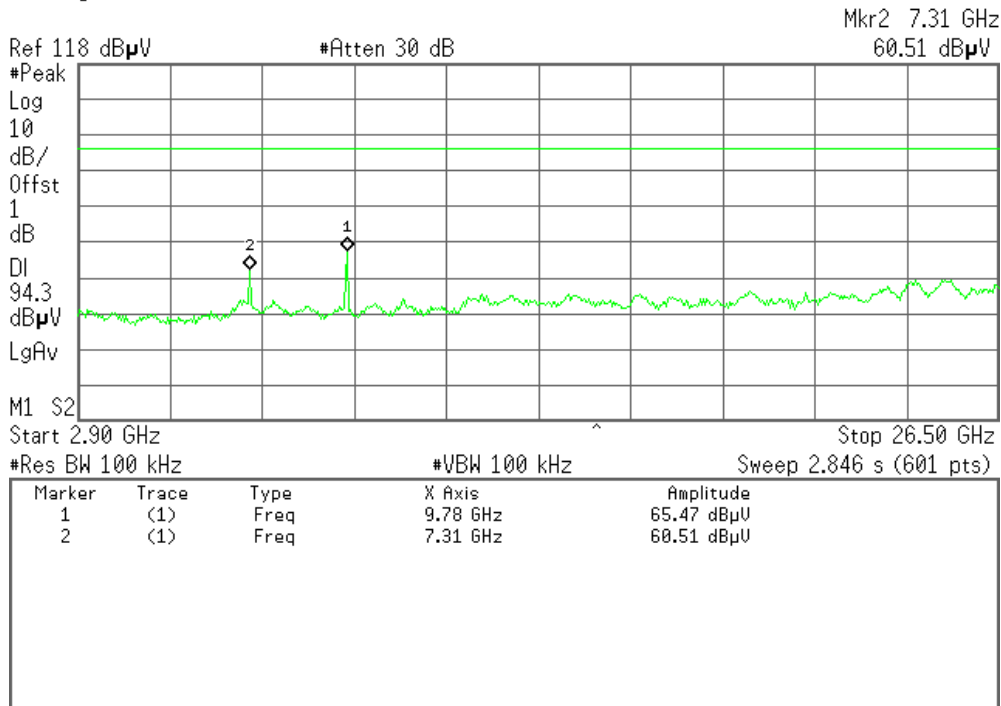




CH High

30MHz – 2.9GHz

Agilent 12:07:34 Aug 24, 2007


R T

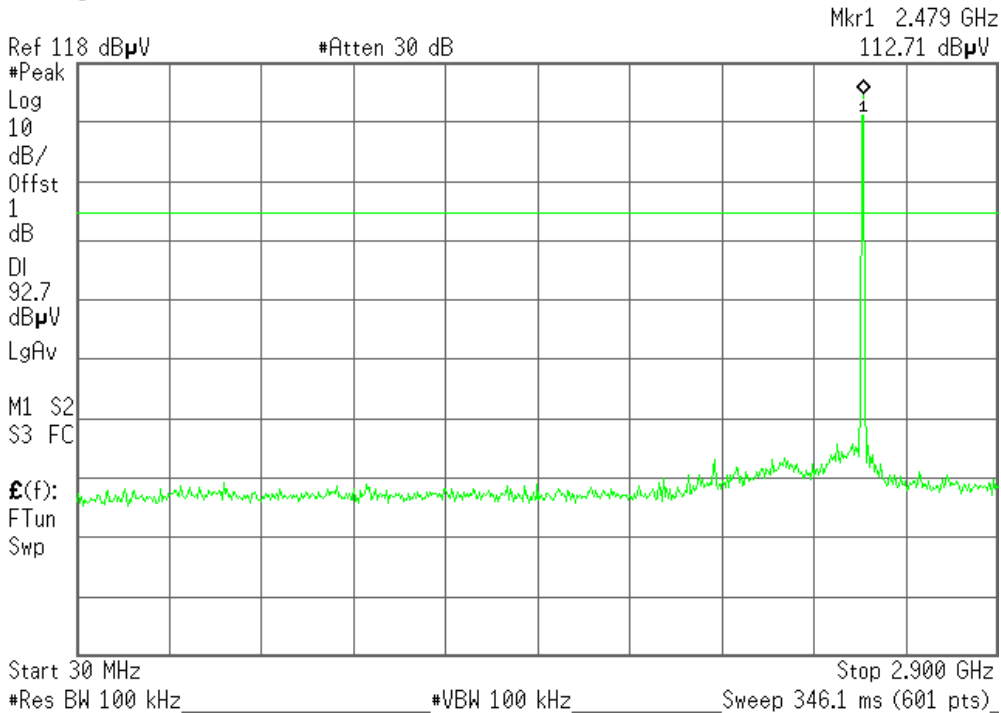

2.9GHz – 26.5GHz

Agilent 12:08:18 Aug 24, 2007

R

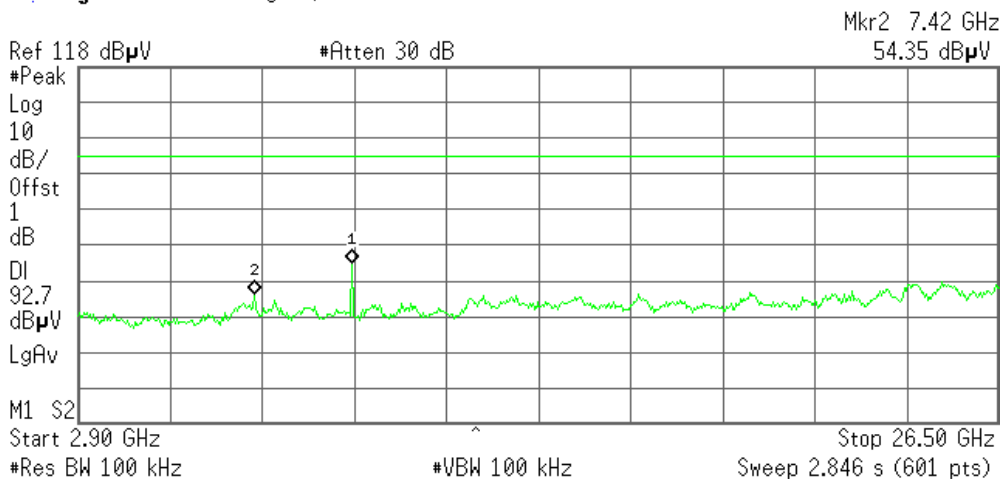

Marker	Trace	Type	X Axis	Amplitude
1	(1)	Freq	9.90 GHz	63.14 dBµV
2	(1)	Freq	7.42 GHz	54.35 dBµV



7.5.2 Radiated Emissions

LIMIT

1. Except as provided elsewhere in this Subpart, the emissions from an intentional radiator shall not exceed the field strength levels specified in the following table:

Frequency (MHz)	Field Strength (mV/m)	Measurement Distance (m)
30-88	100*	3
88-216	150*	3
216-960	200*	3
Above 960	500	3

Note: Except as provided in paragraph (g), fundamental emissions from intentional radiators operating under this Section shall not be located in the frequency bands 54-72 MHz, 76-88 MHz, 174-216 MHz or 470-806 MHz. However, operation within these frequency bands is permitted under other sections of this Part, e.g., Sections 15.231 and 15.241.

2. In the above emission table, the tighter limit applies at the band edges.

Frequency (Hz)	Field Strength (μ V/m at 3-meter)	Field Strength (dB μ V/m at 3-meter)
30-88	100	40
88-216	150	43.5
216-960	200	46
Above 960	500	54


MEASUREMENT EQUIPMENT USED

966 RF CHAMBER 2				
Name of Equipment	Manufacturer	Model	Serial Number	Calibration Due
PSA Spectrum Analyzer	Agilent	E4446A	US44300399	02/05/2008
EMI Test Receiver	R&S	ESCI	1166.5950 03	01/13/2008
Pre-Amplifier	MITEQ	N/A	AFS42-00102650-42-10P-42	02/14/2008
Bi-log Antenna	SCHWAZBECK	CBL6143	5082	06/09/2008
Turn Table	EMCO	2081-1.21	N/A	N.C.R
Antenna Tower	CT	N/A	N/A	N.C.R
Controller	CT	N/A	N/A	N.C.R
RF Comm. Test set	HP	8920B	US36142090	N.C.R
Site NSA	C&C	N/A	N/A	06/09/2008
Horn Antenna	TRC	N/A	N/A	03/04/2008


Remark: Each piece of equipment is scheduled for calibration once a year.

Test Configuration

Below 1 GHz

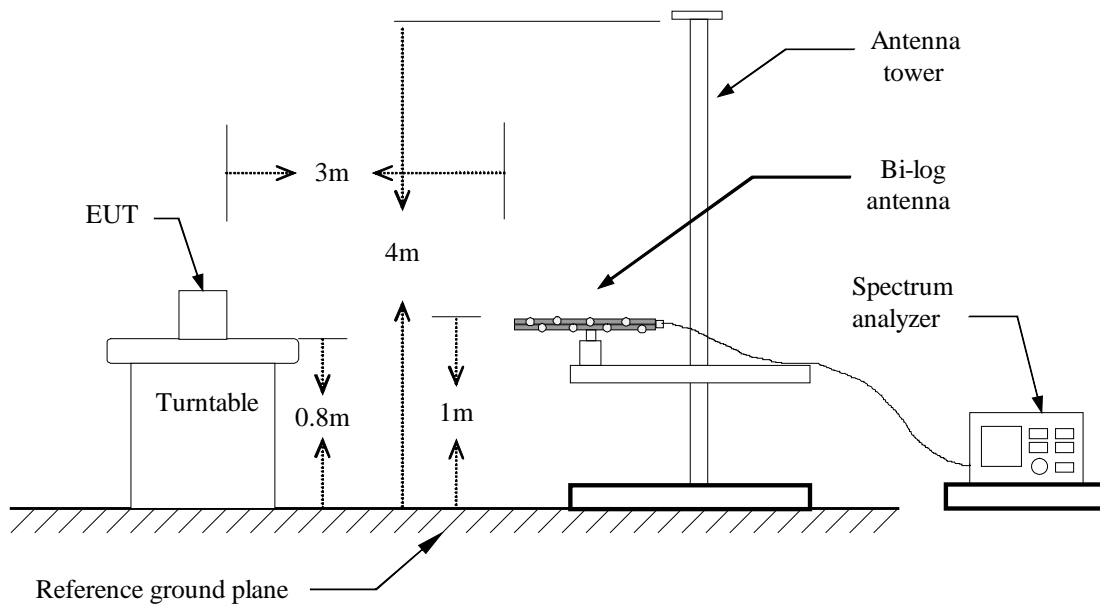

Above 1 GHz

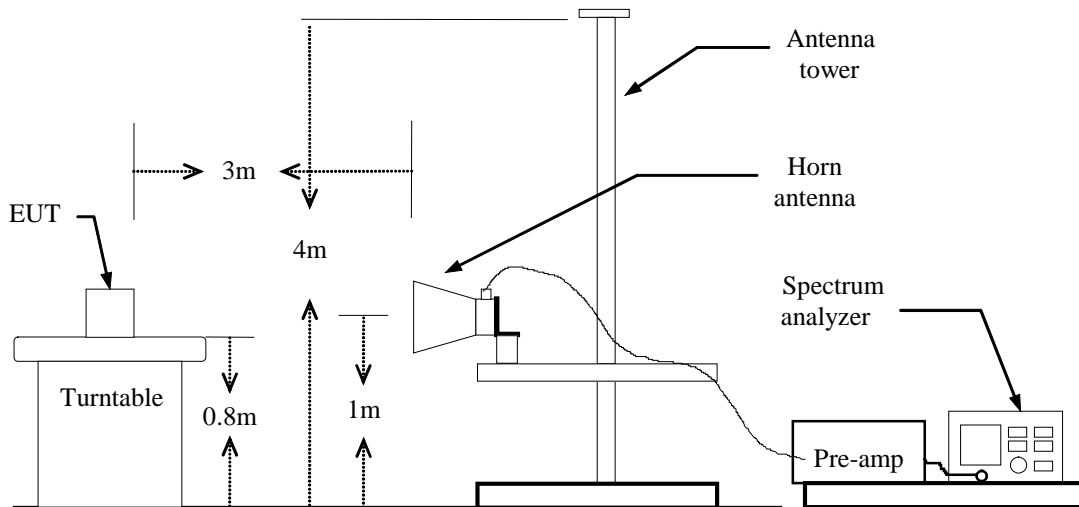

TEST PROCEDURE

1. The EUT is placed on a turntable, which is 0.8m above ground plane.
2. The turntable shall be rotated for 360 degrees to determine the position of maximum emission level.
3. EUT is set 3m away from the receiving antenna, which is varied from 1m to 4m to find out the highest emissions.
4. Maximum procedure was performed on the six highest emissions to ensure EUT compliance.
5. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical.
6. Repeat above procedures until the measurements for all frequencies are complete.

**TEST RESULTS****Below 1 GHz****Operation Mode:** Normal**Test Date:** August 27, 2007**Temperature:** 20°C**Tested by:** Maya**Humidity:** 70 % RH**Polarity:** Ver. / Hor.

Freq. (MHz)	Ant.Pol. H/V	Detector Mode (PK/QP)	Reading (dBuV)	Factor (dB)	Actual FS (dBuV/m)	Limit 3m (dBuV/m)	Safe Margin (dB)
83.100	V	Peak	52.69	-16.50	36.19	40.00	-3.81
87.150	V	Peak	51.10	-16.18	34.92	40.00	-5.08
185.250	V	Peak	54.39	-14.67	39.72	43.50	-3.78
455.166	V	Peak	51.00	-8.12	42.88	46.00	-3.12
466.833	V	Peak	49.45	-7.96	41.49	46.00	-4.51
506.500	V	Peak	47.70	-7.37	40.33	46.00	-5.67
161.850	H	Peak	53.14	-15.01	38.13	43.50	-5.37
233.400	H	Peak	54.12	-12.87	41.25	46.00	-4.75
295.000	H	Peak	52.08	-11.05	41.03	46.00	-4.97
336.166	H	Peak	50.77	-9.76	41.01	46.00	-4.99
356.000	H	Peak	50.29	-9.25	41.04	46.00	-4.96
430.666	H	Peak	48.82	-8.34	40.48	46.00	-5.52

Notes:

1. Measuring frequencies from 30 MHz to the 1GHz.
2. Radiated emissions measured in frequency range from 30 MHz to 1000MHz were made with an instrument using Peak detector mode.
3. Data of measurement within this frequency range shown " --- " in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
4. The IF bandwidth of SPA between 30MHz to 1GHz was 100kHz.

**Above 1 GHz****Operation Mode:** TX(CH Low)**Test Date:** August 27, 2007**Temperature:** 20°C**Tested by:** Maya**Humidity:** 70 % RH**Polarity:** Ver. / Hor.

Freq. (MHz)	Ant. Pol H/V	Peak Reading (dBuV)	AV Reading (dBuV)	Ant. / CL CF (dB)	Actual Fs		Peak Limit (dBuV/m)	AV Limit (dBuV/m)	Margin (dB)	Remark
					Peak (dBuV/m)	AV (dBuV/m)				
2253.33	V	52.59	---	-6.46	46.13	---	74.00	54.00	-7.87	Peak
2370.00	V	53.75	---	-5.99	47.76	---	74.00	54.00	-6.24	Peak
2490.00	V	51.74	---	-5.52	46.22	---	74.00	54.00	-7.78	Peak
4808.33	V	53.27	---	0.65	53.92	---	74.00	54.00	-0.08	Peak
N/A										
2356.66	H	53.65	---	-6.05	47.60	---	74.00	54.00	-6.40	Peak
2723.33	H	51.27	---	-4.86	46.41	---	74.00	54.00	-7.59	Peak
2926.66	H	51.29	---	-4.29	47.00	---	74.00	54.00	-7.00	Peak
4808.33	H	50.61	---	0.65	51.26	---	74.00	54.00	-2.74	Peak
N/A										

Notes:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Measurements above show only up to 6 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (ie: margin > 20dB from the applicable limit) and considered that's already beyond the background noise floor.
3. Radiated emissions measured in frequency above 1000MHz were made with an instrument using Peak detector mode and average detector mode of the emission shown in Actual FS column.
4. Spectrum setting:
 - a. Peak Setting 1GHz - 26GHz, RBW = 1MHz, VBW = 1MHz, Sweep time = 200 ms.
 - b. AV Setting 1GHz - 26GHz, RBW = 1MHz, VBW = 10Hz, Sweep time = 200 ms.



Operation Mode: TX(CH Mid)

Test Date: August 27, 2007

Temperature: 20°C

Tested by: Maya

Humidity: 70 % RH

Polarity: Ver. / Hor.

Freq. (MHz)	Ant. Pol H/V	Peak Reading (dBuV)	AV Reading (dBuV)	Ant. / CL CF (dB)	Actual Fs		Peak Limit (dBuV/m)	AV Limit (dBuV/m)	Margin (dB)	Remark
					Peak (dBuV/m)	AV (dBuV/m)				
2260.00	V	53.02	---	-6.43	46.59	---	74.00	54.00	-7.41	Peak
2360.00	V	52.37	---	-6.03	46.34	---	74.00	54.00	-7.66	Peak
2930.00	V	50.88	---	-4.28	46.60	---	74.00	54.00	-7.40	Peak
4883.33	V	50.50	---	0.78	51.28	---	74.00	54.00	-2.72	Peak
N/A										
2653.33	H	52.19	---	-5.05	47.14	---	74.00	54.00	-6.86	Peak
2736.66	H	50.82	---	-4.82	46.00	---	74.00	54.00	-8.00	Peak
2923.33	H	51.35	---	-4.30	47.05	---	74.00	54.00	-6.95	Peak
4883.33	H	48.60	---	0.78	49.38	---	74.00	54.00	-4.62	Peak
N/A										

Notes:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Measurements above show only up to 6 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (ie: margin > 20dB from the applicable limit) and considered that's already beyond the background noise floor.
3. Radiated emissions measured in frequency above 1000MHz were made with an instrument using Peak detector mode and average detector mode of the emission shown in Actual FS column.
4. Spectrum setting:
 - a. Peak Setting 1GHz - 26GHz, RBW = 1MHz, VBW = 1MHz, Sweep time = 200 ms.
 - b. AV Setting 1GHz - 26GHz, RBW = 1MHz, VBW = 10Hz, Sweep time = 200 ms.

**Operation Mode:** TX(CH High)**Test Date:** August 27, 2007**Temperature:** 20°C**Tested by:** Maya**Humidity:** 70 % RH**Polarity:** Ver. / Hor.

Freq. (MHz)	Ant. Pol H/V	Peak Reading (dBuV)	AV Reading (dBuV)	Ant. / CL CF (dB)	Actual Fs		Peak Limit (dBuV/m)	AV Limit (dBuV/m)	Margin (dB)	Remark
					Peak (dBuV/m)	AV (dBuV/m)				
2406.66	V	52.72	---	-5.85	46.87	---	74.00	54.00	-7.13	Peak
2666.66	V	51.16	---	-5.02	46.14	---	74.00	54.00	-7.86	Peak
2860.00	V	50.65	---	-4.48	46.17	---	74.00	54.00	-7.83	Peak
4958.33	V	49.81	---	0.91	50.72	---	74.00	54.00	-3.28	Peak
N/A										
2643.33	H	51.43	---	-5.08	46.35	---	74.00	54.00	-7.65	Peak
2743.33	H	50.73	---	-4.80	45.93	---	74.00	54.00	-8.07	Peak
2853.33	H	50.77	---	-4.50	46.27	---	74.00	54.00	-7.73	Peak
4991.66	H	45.67	---	0.97	46.64	---	74.00	54.00	-7.36	Peak
N/A										

Notes:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Measurements above show only up to 6 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (ie: margin > 20dB from the applicable limit) and considered that's already beyond the background noise floor.
3. Radiated emissions measured in frequency above 1000MHz were made with an instrument using Peak detector mode and average detector mode of the emission shown in Actual FS column.
4. Spectrum setting:
 - a. Peak Setting 1GHz - 26GHz, RBW = 1MHz, VBW = 1MHz, Sweep time = 200 ms.
 - b. AV Setting 1GHz - 26GHz, RBW = 1MHz, VBW = 10Hz, Sweep time = 200 ms.

7.6 POWERLINE CONDUCTED EMISSIONS

LIMIT

For an intentional radiator which is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed 250 microvolts (The limit decreases linearly with the logarithm of the frequency in the range 0.15 MHz to 0.50 MHz). The limits at specific frequency range is listed as follows:

Frequency Range (MHz)	Limits (dB μ V)	
	Quasi-peak	Average
0.15 to 0.50	66 to 56	56 to 46
0.50 to 5	56	46
5 to 30	60	50

Compliance with this provision shall be based on the measurement of the radio frequency voltage between each power line (LINE and NEUTRAL) and ground at the power terminals.

MEASUREMENT EQUIPMENT USED

Conducted Emission Test Site G				
Name of Equipment	Manufacturer	Model	Serial Number	Calibration Due
EMI Test Receiver	ROHDE&SCHWARZ	ESCI	100088	02/05/2008
LISN	EMCO	3825/2	1371	02/05/2008
LISN	EMCO	3825/2	8901-1459	02/05/2008

Remark: Each piece of equipment is scheduled for calibration once a year.

Test Configuration

See test photographs attached in Appendix 1 for the actual connections between EUT and support equipment.

TEST PROCEDURE

1. The EUT was placed on a table, which is 0.8m above ground plane.
2. Maximum procedure was performed on the six highest emissions to ensure EUT compliance.
3. Repeat above procedures until all frequency measured were complete.

APPENDIX 1 PHOTOGRPHS OF TEST SETUP

Radiated Emission Set up Photos



Conducted Emission Set Up Photos

