

TEST REPORT



DT&C Co., Ltd.

42, Yurim-ro, 154Beon-gil, Cheoin-gu, Yongin-si, Gyeonggi-do, Korea, 17042
Tel : 031-321-2664, Fax : 031-321-1664

1. Report No : DRTFCC2105-0053

2. Customer

- Name (FCC) : Point Mobile Co., LTD. / Name (IC) : POINTMOBILE CO.,LTD
- Address (FCC) : B-9F, Kabul Great Valley 32 Digital-ro 9-gil, Geumcheon-gu Seoul South Korea 153-709
Address (IC) : B-9F Kabul Great Valley, 32, Digital-ro 9-gil, Geumcheon-gu Seoul Korea (Republic Of)

3. Use of Report : FCC & IC Certification

4. Product Name / Model Name : Mobile Computer / PM30W

FCC ID : V2X-PM30W

IC : 10664A-PM30W

5. FCC Regulation(s): Part 15.247

IC Standard(s): RSS-247 Issue 2

Test Method used: KDB558074 D01v05r02, ANSI C63.10-2013

6. Date of Test : 2021.02.05 ~ 2021.03.16

7. Location of Test : Permanent Testing Lab On Site Testing

8. Testing Environment : See appended test report.

9. Test Result : Refer to the attached test result.

The results shown in this test report refer only to the sample(s) tested unless otherwise stated.

Affirmation	Tested by	Reviewed by
	Name : JaeHyeok Bang (Signature)	Name : JaeJin Lee (Signature)

2021 . 05 . 27 .

DT&C Co., Ltd.

This test report is a general report that does not use the KOLAS accreditation mark and is not related to KS Q ISO/IEC 17025 and KOLAS accreditation.

If this report is required to confirmation of authenticity, please contact to report@dtnc.net

Test Report Version

Test Report No.	Date	Description	Revised by	Reviewed by
DRTFCC2105-0053	May, 27. 2021	Initial issue	JaeHyeok Bang	JaeJin Lee

Table of Contents

1. General Information	5
1.1 Explanations for Reference Test Data.....	5
1.1.1 Introduction.....	5
1.1.2 Explain the Differences	5
1.1.3 Spot Check Verification Data	5
1.1.4 Reference Section	5
1.2. Testing Laboratory	6
1.3. Testing Environment.....	6
1.4. Measurement Uncertainty.....	6
1.5. Details of Applicant	7
1.6. Description of EUT	7
1.7. Declaration by the applicant / manufacturer	7
1.8. Test Equipment List	8
1.9. Summary of Test Results	9
2. Test Methodology	10
2.1. EUT Configuration.....	10
2.2. EUT Exercise.....	10
2.3. General Test Procedures	10
2.4. Instrument Calibration	10
2.5. Description of Test Modes.....	11
3. Test Result	12
3.1. Maximum Peak Conducted Output Power	12
3.1.1. Test Setup.....	12
3.1.2. Test Procedures	12
3.1.3. Test Results.....	12
3.2. 6 dB Bandwidth	14
3.2.1. Test Setup.....	14
3.2.2. Test Procedures	14
3.2.3. Test Results.....	14
3.3. Power Spectral Density.....	23
3.3.1. Test Setup.....	23
3.3.2. Test Procedures	23
3.3.3. Test Results.....	23
3.4. Unwanted Emissions (Conducted)	32
3.4.1. Test Setup.....	32
3.4.2. Test Procedures	32
3.4.3. Test Results.....	33
3.5. Unwanted Emissions (Radiated).....	65
3.5.1. Test Setup.....	67
3.5.2. Test Procedures	67
3.5.3. Test Results.....	68
3.6. AC Power-Line Conducted Emissions	70
3.6.1. Test Setup.....	70
3.6.2. Test Procedures	70
3.6.3. Test Results.....	70
3.7. Occupied Bandwidth.....	73
3.7.1. Test Setup.....	73
3.7.2. Test Procedures	73
3.7.3. Test Results.....	73
4. Antenna Requirements	82

APPENDIX I	83
APPENDIX II	84
APPENDIX III	87

1. General Information

1.1 Explanations for Reference Test Data

1.1.1 Introduction

This report includes the WLAN test data of FCC ID: V2X-PM30 / IC: 10664A-PM30 with reference to KDB 484596 D01v01. The applicant takes full responsibility that the test data as reference section below represents compliance for FCC ID: V2X-PM30W / IC: 10664A-PM30W.

Reference FCC ID / IC	Exhibit type	Separated FCC ID / IC
FCC ID: V2X-PM30 / IC: 10664A-PM30	Original Grant / New Single Certification	FCC ID: V2X-PM30W / IC: 10664A-PM30W

1.1.2 Explain the Differences

FCC ID: V2X-PM30W / IC: 10664A-PM30W is same the internal printed circuit board with FCC ID: V2X-PM30 / IC: 10664A-PM30. For FCC ID: V2X-PM30W / IC: 10664-PM30W, WWAN transmitter has been removed. (It does not changed the SW/HW component of WLAN.)

1.1.3 Spot Check Verification Data

Equipment Class (capability)	FCC Part/ RSS Std.	Mode	TX Freq. (MHz)	Test item	Detector Mode	Reference FCC ID: V2X-PM30 / IC: 10664A-PM30		Separated FCC ID: V2X-PM30W / IC: 10664A-PM30W		Limit (dBuV/m)	Deviation (dB)
						Frequency (MHz)	Result (dBuV/m)	Frequency (MHz)	Result (dBuV/m)		
DTS (WLAN)	15.247 / RSS-247	802.11n (HT20)	2 462	Radiated Band edge	Average	2 483.78	51.29	2 484.31	50.17	54.00	-1.12
		802.11n (HT20)	2 462	Radiated Spurious emission	Average	4 923.81	41.86	4 922.56	42.04	54.00	0.18

Note1: The spot check were performed based on worst-case results reported in the original test report.

The spot check test results are within 3dB and two products shows a good correlation. It also complies with the FCC limit.

1.1.4 Reference Section

Reference FCC ID: V2X-PM30 / IC: 10664A-PM30

Equipment Class	FCC Part/ RSS Std.	Capability	Band(MHz)	Exhibit type	Report title	Reference Sections
DTS	15.247 / RSS-247	WLAN	2 412 ~ 2 462	Original Grant/ New Single Certification	DTS	All

1.2. Testing Laboratory

DT&C Co., Ltd.	
The 3 m test site and conducted measurement facility used to collect the radiated data are located at the 42, Yurim-ro, 154beon-gil, Cheoin-gu, Yongin-si, Gyeonggi-do, Korea 17042.	
The test site complies with the requirements of Part 2.948 according to ANSI C63.4-2014.	
- FCC & IC MRA Designation No. : KR0034	
- ISED#: 5740A	
www.dtnc.net	
Telephone	: + 82-31-321-2664
FAX	: + 82-31-321-1664

1.3. Testing Environment

Ambient Condition	
▪ Temperature	+22 °C ~ +26 °C
▪ Relative Humidity	+35 % ~ +44 %

1.4. Measurement Uncertainty

The measurement uncertainties shown below were calculated in accordance with requirements of ANSI C63.4-2014 and ANSI C63.10-2013. All measurement uncertainty values are shown with a coverage factor of $k = 2$ to indicate a 95 % level of confidence.

Parameter	Measurement uncertainty
Antenna-port conducted emission	1.0 dB (The confidence level is about 95 %, $k = 2$)
AC power-line conducted emission	3.6 dB (The confidence level is about 95 %, $k = 2$)
Radiated emission (1 GHz Below)	4.9 dB (The confidence level is about 95 %, $k = 2$)
Radiated emission (1 GHz ~ 18 GHz)	5.0 dB (The confidence level is about 95 %, $k = 2$)
Radiated emission (18 GHz Above)	5.3 dB (The confidence level is about 95 %, $k = 2$)

1.5. Details of Applicant

Applicant Name(FCC)	Point Mobile Co., LTD
Applicant Name(IC)	POINTMOBILE CO.,LTD
Address (FCC)	B-9F, Kabul Great Valley 32 Digital-ro 9-gil, Geumcheon-gu Seoul South Korea 153-709
Address (IC)	B-9F Kabul Great Valley, 32, Digital-ro 9-gil, Geumcheon-gu Seoul Korea (Republic Of)

1.6. Description of EUT

Equipment Class	Digital Transmission System (DTS)
Product Name	Mobile Computer
Model Name	PM30W
Add Model Name	-
Firmware Version Identification Number	30.00xx
EUT Serial Number (Reference product) ^{Note1}	Conducted : 2034310066 Radiated: 2033910156
EUT Serial Number (Separated product) ^{Note2}	Conducted : 2034310069 Radiated: 2034010538
Power Supply	DC 3.85 V
Frequency Range	<ul style="list-style-type: none"> ▪ 802.11b/g/n(20 MHz) : 2 412 MHz ~ 2 462 MHz ▪ 802.11n(40 MHz) : 2 422 MHz ~ 2 452 MHz
Max. RF Output Power	2.4 GHz Band <ul style="list-style-type: none"> ▪ 802.11b : 22.05 dBm ▪ 802.11g : 24.67 dBm ▪ 802.11n (HT20) : 24.56 dBm ▪ 802.11n (HT40) : 24.69 dBm
Modulation Technique	<ul style="list-style-type: none"> ▪ 802.11b: CCK, DSSS ▪ 802.11g/n: OFDM
Antenna Specification	Antenna Type: LDS Antenna Gain: 1.49 dBi (PK)

Note1: Reference FCC ID: V2X-PM30 / IC: 10664A-PM30

Note2: Separated FCC ID: V2X-PM30W / IC: 10664A-PM30W

1.7. Declaration by the applicant / manufacturer

N/A

1.8. Test Equipment List

Type	Manufacturer	Model	Cal.Date (yy/mm/dd)	Next.Cal.Date (yy/mm/dd)	S/N
Spectrum Analyzer	Agilent Technologies	N9020A	20/12/16	21/12/16	MY50410357
Spectrum Analyzer	Agilent Technologies	N9020A	20/12/16	21/12/16	MY48011700
Spectrum Analyzer	Agilent Technologies	N9020A	20/12/16	21/12/16	MY48010133
DC Power Supply	Agilent Technologies	66332A	20/06/24	21/06/24	MY43000211
Multimeter	FLUKE	17B	20/12/16	21/12/16	26030065WS
Signal Generator	Rohde Schwarz	SMBV100A	20/12/16	21/12/16	255571
Signal Generator	ANRITSU	MG3695C	20/12/16	21/12/16	173501
Thermohygrometer	BODYCOM	BJ5478	20/12/16	21/12/16	120612-1
Thermohygrometer	BODYCOM	BJ5478	20/12/16	21/12/16	120612-2
Thermohygrometer	BODYCOM	BJ5478	20/07/01	21/07/01	N/A
Loop Antenna	ETS-Lindgren	6502	21/01/28	23/01/28	00226186
BILOG ANTENNA	Schwarzbeck	VULB 9160	20/12/16	21/12/16	3362
Horn Antenna	ETS-Lindgren	3117	20/10/23	21/10/23	00143278
Horn Antenna	A.H.Systems Inc.	SAS-574	20/06/24	21/06/24	155
PreAmplifier	tsj	MLA-0118-B01-40	20/12/16	21/12/16	1852267
PreAmplifier	tsj	MLA-1840-J02-45	20/06/24	21/06/24	16966-10728
PreAmplifier	H.P	8447D	20/12/16	21/12/16	2944A07774
High Pass Filter	Wainwright Instruments	WHKX12-935-1000-15000-40SS	20/06/24	21/06/24	8
High Pass Filter	Wainwright Instruments	WHKX10-2838-3300-18000-60SS	20/06/24	21/06/24	1
High Pass Filter	Wainwright Instruments	WHNX8.0/26.5-6SS	20/06/24	21/06/24	3
Attenuator	Hefei Shunze	SS5T2.92-10-40	20/06/24	21/06/24	16012202
Attenuator	SRTechnology	F01-B0606-01	20/06/24	21/06/24	13092403
Attenuator	Aeroflex/Weinschel	20515	20/06/24	21/06/24	Y2370
Attenuator	SMAJK	SMAJK-2-3	20/06/24	21/06/24	2
Attenuator	SMAJK	SMAJK-50-10	20/06/24	21/06/24	15081901
Power Meter & Wide Bandwidth Sensor	Anritsu	ML2488B MA2491A	20/12/16	21/12/16	0910025 0845333
Power Meter Wide Bandwidth Sensor	Agilent Technologies	N1911A N1921A	20/06/24	21/06/24	MY53360016 MY53360018
EMI Receiver	ROHDE&SCHWARZ	ESW44	20/11/16	21/11/16	101645
PULSE LIMITER	Rohde Schwarz	ESH3-Z2	20/08/25	21/08/25	101333
LISN	SCHWARZBECK	NSLK 8128 RC	20/10/23	21/10/23	8128 RC-387
HYGROMETER	TESTO	608-H1	21/01/19	22/01/19	34862883
Cable	DT&C	Cable	21/01/08	22/01/08	G-1
Cable	DT&C	Cable	21/01/08	22/01/08	G-2
Cable	HUBER+SUHNER	SUCOFLEX 100	21/01/08	22/01/08	G-3
Cable	DT&C	Cable	21/01/08	22/01/08	G-4
Cable	Junkosha	MWX241	21/01/08	22/01/08	mmW-1
Cable	Junkosha	MWX241	21/01/08	22/01/08	mmW-4
Cable	HUBER+SUHNER	SUCOFLEX100	21/01/08	22/01/08	M-01
Cable	HUBER+SUHNER	SUCOFLEX100	21/01/08	22/01/08	M-02
Cable	JUNFLON	MWX241	21/01/08	22/01/08	M-03
Cable	JUNFLON	J12J101757-00	21/01/08	22/01/08	M-07
Cable	HUBER+SUHNER	SUCOFLEX106	21/01/08	22/01/08	M-09
Cable	DT&C	Cable	21/01/05	22/01/05	RFC-69
Test Software	tsj	Radiated Emission Measurement	NA	NA	Version 2.00.0177
Test Software	tsj	Noise Terminal Measurement	NA	NA	Version 2.00.0170

Note1: The measurement antennas were calibrated in accordance to the requirements of ANSI C63.5-2017.

Note2: The cable is not a regular calibration item, so it has been calibrated by DT & C itself.

1.9. Summary of Test Results

FCC part section(s)	RSS section(s)	Test Description	Limit	Test Condition	Status Note 1
15.247(a)	RSS-247[5.2]	6 dB Bandwidth	> 500 kHz	Conducted	C
15.247(b)	RSS-247[5.4]	Maximum Peak Conducted Output Power	< 1 Watt		C
15.247(d)	RSS-247[5.5]	Out of Band Emissions / Band Edge	20 dBc in any 100 kHz BW		C
15.247(e)	RSS-247[5.2]	Power Spectral Density	< 8 dBm/3 kHz		C
-	RSS-Gen[6.7]	Occupied Bandwidth (99 %)	NA		C
15.247(d) 15.205 15.209	RSS-247[5.5] RSS-Gen[8.9] RSS-Gen[8.10]	General Field Strength Limits (Restricted Bands and Radiated Emission Limits)	FCC Part 15.209 limits (Reference to section 3.5)	Radiated	C Note 3, 4
15.207	RSS-Gen[8.8]	AC Power-Line Conducted Emissions	FCC Part 15.207 limits (Reference to section 3.6)	AC Line Conducted	C
15.203	-	Antenna Requirements	FCC Part 15.203 (Reference to section 4)	-	C

Note 1: **C**=Comply **NC**=Not Comply **NT**=Not Tested **NA**=Not Applicable

Note 2: For radiated emission tests below 30 MHz were performed on semi-anechoic chamber which is correlated with OATS.

Note 3: This test item was performed in three orthogonal EUT positions and the worst case data was reported.

Note 4: This device supports wireless charging.

So per KDB648474 D03v01r0, the radiated test items were performed all not charging, charging, the handset is placed on the representative charging pad under normal conditions and in a simulated call configuration.

2. Test Methodology

The measurement procedures described in the ANSI C63.10-2013 and the guidance provided in KDB558074 D01v05r02 were used in measurement of the EUT.

The EUT was tested per the guidance of KDB558074 D01v05r02. And ANSI C63.10-2013 was used to reference appropriate EUT setup and maximizing procedures of radiated spurious emission and AC line conducted emission testing.

2.1. EUT Configuration

The EUT configuration for testing is installed on RF field strength measurement to meet the Commissions requirement and operating in a manner that intends to maximize its emission characteristics in a continuous normal application.

2.2. EUT Exercise

The EUT was operated in the test mode to fix the TX frequency that was for the purpose of the measurements. According to its specifications, the EUT must comply with the requirements of the Section 15.207, 15.209 and 15.247 under the FCC Rules Part 15 Subpart C.

2.3. General Test Procedures

Conducted Emissions

The power-line conducted emission test procedure is not described on the KDB558074 D01v05r02.

So this test was fulfilled with the requirements in Section 6.2 of ANSI C63.10-2013.

The EUT is placed on the wooden table, which is 0.8 m above ground plane and the conducted emissions from the EUT measured in the frequency range between 0.15 MHz and 30 MHz using CISPR Quasi-peak and Average detector.

Radiated Emissions

Basically the radiated tests were performed with KDB558074 D01v05r02. But some requirements and procedures like test site requirements, EUT setup and maximizing procedure were fulfilled with the requirements in Section 5 and 6 of the ANSI C63.10-2013 as stated on section 12.1 of the KDB558074 D01v05r02.

The EUT is placed on a non-conductive table. For emission measurements at or below 1 GHz, the table height is 80 cm. For emission measurements above 1 GHz, the table height is 1.5 m. The turntable shall rotate 360 degrees to determine the position of maximum emission level. EUT is set 3 m away from the receiving antenna, which varied from 1 m to 4 m to find out the highest emission. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical.

2.4. Instrument Calibration

The measuring equipment, which was utilized in performing the tests documented herein, has been calibrated in accordance with the manufacturer's recommendations for utilizing calibration equipment, which is traceable to recognized national standards.

2.5. Description of Test Modes

The EUT has been tested with the operating condition for maximizing the emission characteristics. A test program is used to control the EUT for staying in continuous transmitting.

Transmitting Configuration of EUT

Mode	Data rate
802.11b	1 Mbps ~ 11 Mbps
802.11g	6 Mbps ~ 54 Mbps
802.11n(HT20)	MCS 0 ~ MCS 7
802.11n(HT40)	MCS 0 ~ MCS 7

EUT Operation test setup

- Test Software: QRCT / V3.0-00277

- Power setting:

Mode	Frequency (MHz)	Power Setting		
802.11b	Data Rate	1 ~ 11	-	-
	2 412	19	-	-
	2 437	19	-	-
	2 462	19	-	-
802.11g	Data Rate	6 ~ 12	18 ~ 24	36 ~ 54
	2 412	20	18	17
	2 437	20	18	17
	2 462	19	17	16
802.11n (HT20)	Data Rate	mcs0 ~ mcs2	mcs3 ~ mcs5	mcs6 ~ mcs7
	2 412	19	17	16
	2 437	20	18	17
	2 462	19	17	16
802.11n (HT40)	Data Rate	mcs0 ~ mcs2	mcs3 ~ mcs5	mcs6 ~ mcs7
	2 422	16	14	12
	2 437	19	17	15
	2 452	15	12	10

Test Mode

Test mode	Worst case data rate	Tested Frequency (MHz)		
TM 1	802.11b 1 Mbps	2 412	2 437	2 462
TM 2	802.11g 54 Mbps	2 412	2 437	2 462
TM 3	802.11n(HT20) MCS 7	2 412	2 437	2 462
TM 4	802.11n(HT40) MCS 5	2 422	2 437	2 452

Note1: The worst case data rate was determined according to the power measurements.

Note2: The power measurement results for all modes and data rate were reported.


3. Test Result

3.1. Maximum Peak Conducted Output Power

■ Test Requirements and limit, Part 15.247(b) & RSS-247 [5.4]

The maximum permissible conducted output power is **1 Watt**.

3.1.1. Test Setup

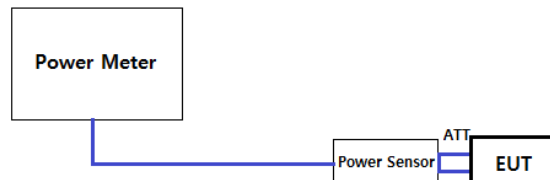

3.1.2. Test Procedures

- KDB558074 D01v05r02 - Section 8.3.1.3
- ANSI C63.10-2013 – Section 11.9.1.3

RBW ≥ DTSPKPM1 Peak-reading power meter method

The maximum conducted output powers were measured using a broadband peak RF power meter which has greater video bandwidth than DUT's DTS bandwidth and utilize a fast-responding diode detector.

- KDB558074 D01v05r02 - Section 8.3.2.3
- ANSI C63.10-2013 – Section 11.9.2.3

Method AVGPM-G

The average conducted output powers were measured using a wideband gated RF power meter provided that the gate parameters are adjusted such that the power is measured only when the EUT is transmitting at its maximum power control level. Since this measurement is made only during the ON time of the transmitter, no duty cycle correction is required.

3.1.3. Test Results

- Refer to the next page

Mode	Freq. (MHz)	Det.	Maximum Peak Conducted Output Power (dBm)							
			Data Rate (Mbps)							
			1	2	5.5	11	-	-	-	-
802.11b	2 412	PK	21.79	21.51	21.65	21.74	-	-	-	-
		AV	19.67	19.56	19.57	19.65	-	-	-	-
	2 437	PK	22.05	21.77	21.92	22.03	-	-	-	-
		AV	19.85	19.78	19.79	19.89	-	-	-	-
	2 462	PK	21.96	21.68	21.82	21.92	-	-	-	-
		AV	19.84	19.74	19.76	19.86	-	-	-	-

Mode	Freq. (MHz)	Det.	Maximum Peak Conducted Output Power (dBm)							
			Data Rate (Mbps]							
			1	2	5.5	11	-	-	-	-
802.11g	2 412	PK	22.14	22.27	22.07	22.51	22.50	23.84	23.69	23.94
		AV	18.24	18.19	18.13	17.26	17.25	16.43	16.61	16.64
	2 437	PK	22.42	22.59	22.39	22.86	22.85	24.21	24.06	24.67
		AV	18.43	18.39	18.34	17.43	17.42	16.58	16.80	16.46
	2 462	PK	21.55	21.44	21.28	21.71	21.69	23.71	23.64	23.94
		AV	17.63	17.51	17.50	16.58	16.71	16.04	15.94	15.96

Mode	Freq. (MHz)	Det.	Maximum Peak Conducted Output Power (dBm)							
			Data Rate (Mbps)							
			0	1	2	3	4	5	6	7
802.11n (HT20)	2 412	PK	21.75	21.77	23.01	21.97	23.07	23.11	22.91	23.16
		AV	17.60	17.15	17.34	16.14	16.18	16.15	15.89	15.99
	2 437	PK	22.55	22.45	23.80	22.78	24.34	24.39	24.41	24.56
		AV	18.46	18.12	18.38	17.15	17.22	17.28	16.54	16.57
	2 462	PK	21.74	21.54	22.81	22.04	23.19	21.94	23.24	23.41
		AV	17.68	17.34	17.53	16.43	16.59	16.47	15.97	16.21

Mode	Freq. (MHz)	Det.	Maximum Peak Conducted Output Power (dBm)							
			Data Rate (Mbps)							
			0	1	2	3	4	5	6	7
802.11n (HT40)	2 422	PK	21.69	21.57	22.07	20.73	22.84	23.09	21.37	21.46
		AV	16.35	16.54	16.50	15.28	15.19	15.31	14.04	14.15
	2 437	PK	23.28	23.11	23.91	22.31	24.35	24.69	22.91	23.38
		AV	18.47	18.63	18.59	17.25	17.58	17.73	16.01	16.19
	2 452	PK	20.97	20.73	21.48	19.74	21.30	21.41	20.13	20.61
		AV	15.45	15.57	15.61	13.38	13.11	12.94	11.28	11.71

3.2. 6 dB Bandwidth

▣ Test Requirements and limit, Part 15.247(a) & RSS-247 [5.2]

The bandwidth at 6 dB down from the highest in-band spectral density is measured with a spectrum analyzer connected to the EUT's antenna terminal while the EUT is operating in transmission mode at the appropriate frequencies.

The minimum permissible 6 dB bandwidth is 500 kHz.

3.2.1. Test Setup

Refer to the APPENDIX I.

3.2.2. Test Procedures

- KDB558074 D01v05r02 - Section 8.2
- ANSI C63.10-2013 – Section 11.8.2

1. Set resolution bandwidth (RBW) = 100 kHz
2. Set the video bandwidth (VBW) $\geq 3 \times$ RBW.
3. Detector = **Peak**.
4. Trace mode = **max hold**.
5. Sweep = **auto couple**.
6. Allow the trace to stabilize.
7. Option 1 - Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission.


Option 2 - The automatic bandwidth measurement capability of an instrument may be employed using the X dB bandwidth mode with X set to 6 dB, if the functionality described above (i.e., RBW = 100 kHz, VBW $\geq 3 \times$ RBW, peak detector with maximum hold) is implemented by the instrumentation function. When using this capability, care shall be taken so that the bandwidth measurement is not influenced by any intermediate power nulls in the fundamental emission that might be ≥ 6 dB.

3.2.3. Test Results

Test Mode	Frequency	Test Results (MHz)
TM 1	2 412	8.08
	2 437	8.56
	2 462	9.04
TM 2	2 412	16.46
	2 437	16.45
	2 462	16.48
TM 3	2 412	17.68
	2 437	17.68
	2 462	17.70
TM 4	2 422	35.91
	2 437	36.15
	2 452	36.43

6 dB Bandwidth

TM 1 & 2 412

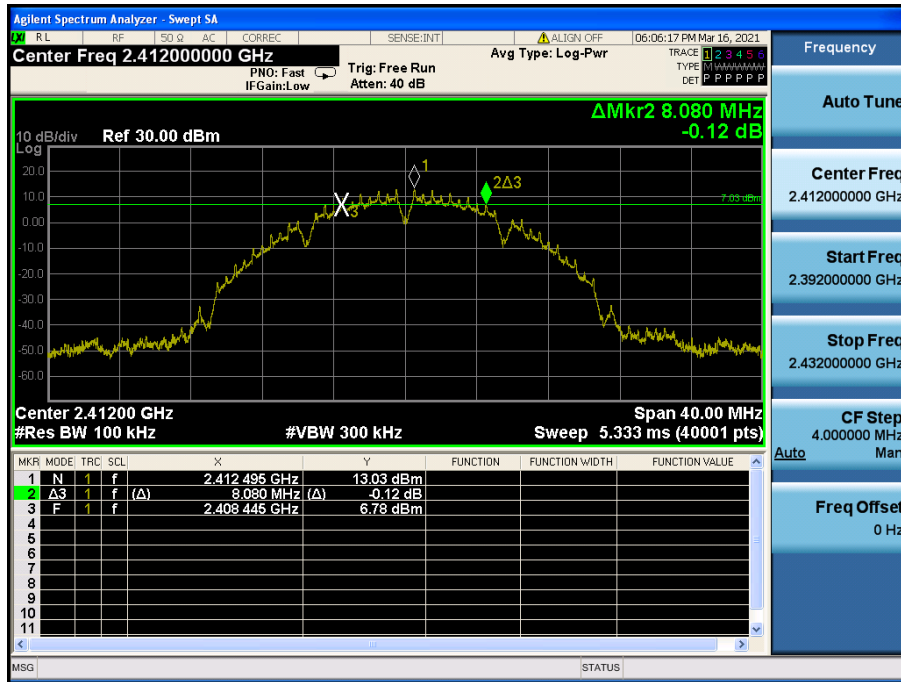


6 dB Bandwidth

TM 1 & 2 437




6 dB Bandwidth

TM 1 & 2 462

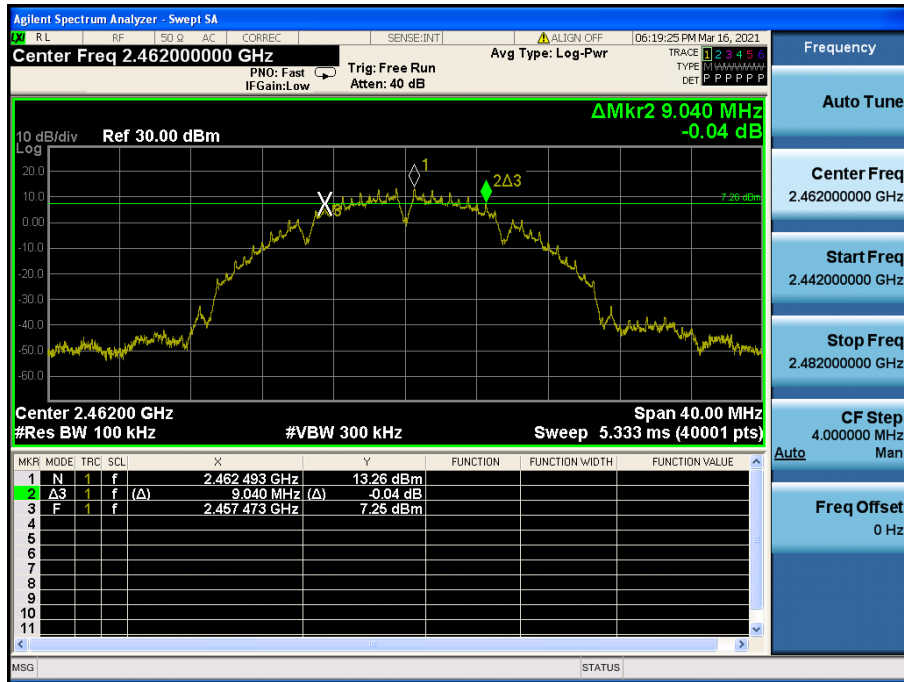


6 dB Bandwidth

TM 2 & 2412

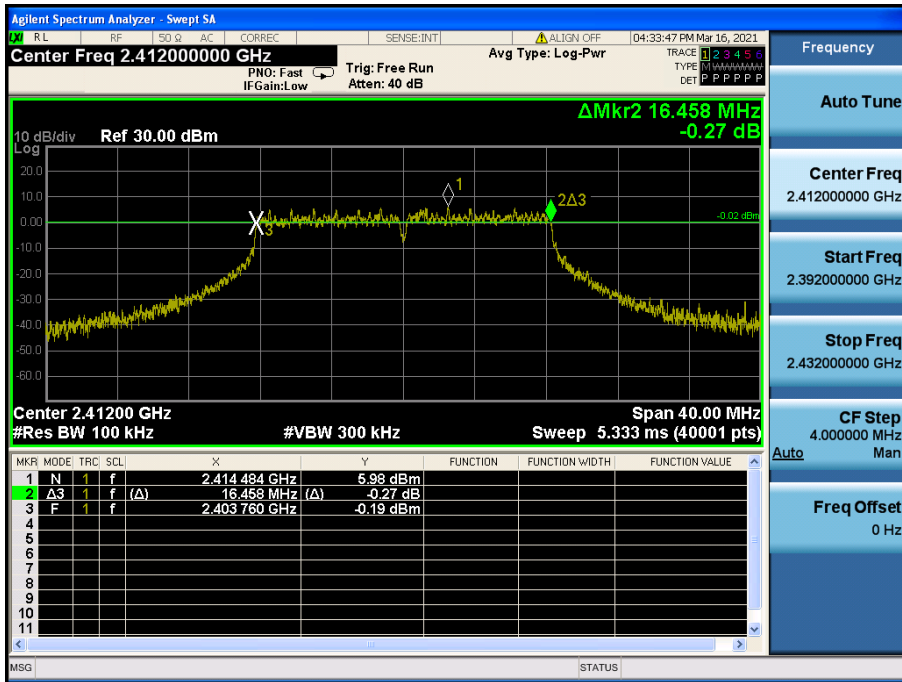


6 dB Bandwidth

TM 2 & 2437

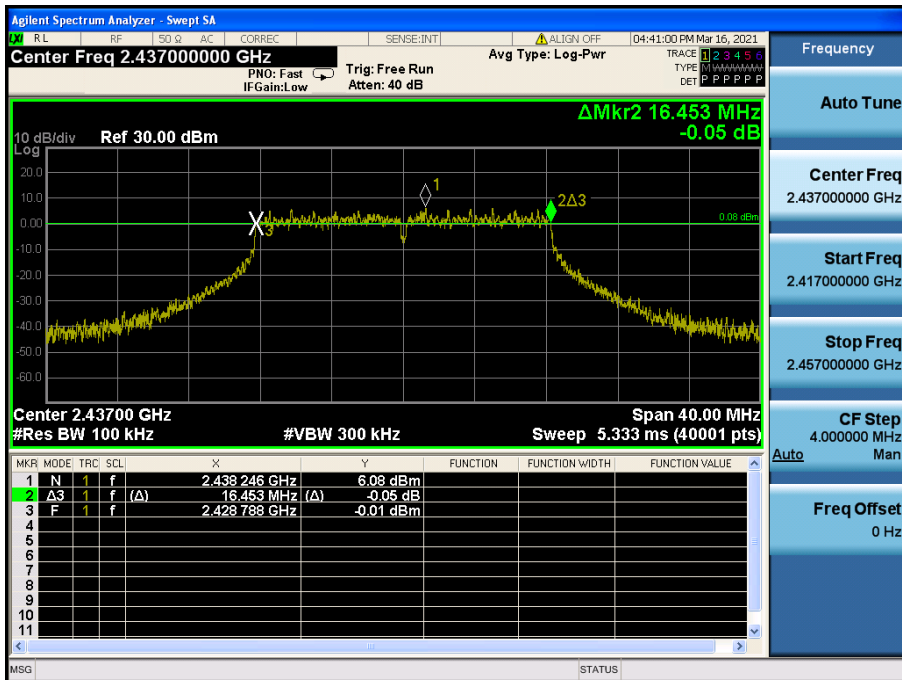


6 dB Bandwidth

TM 2 & 2 462

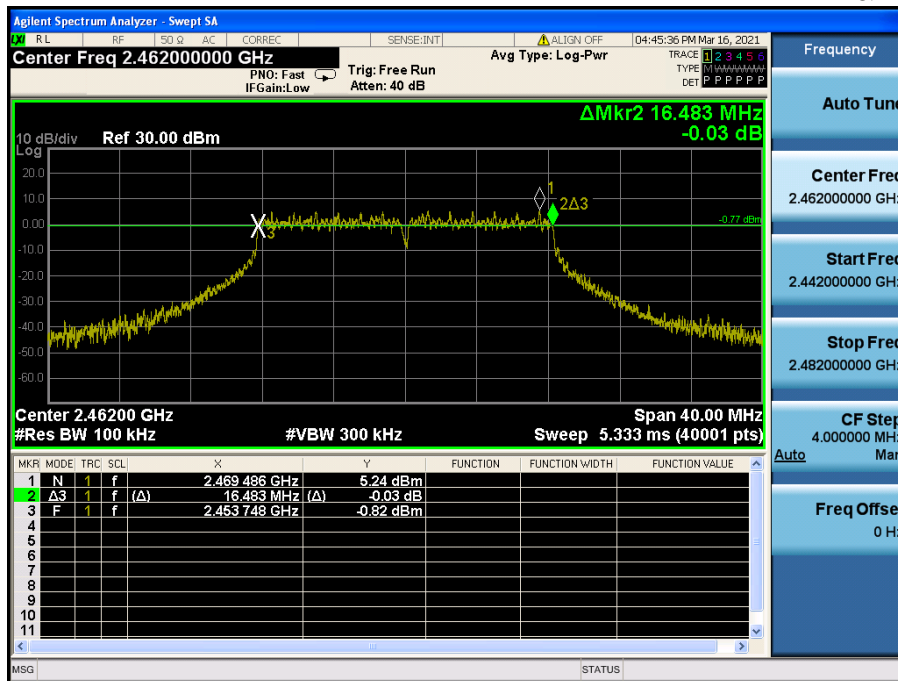


6 dB Bandwidth

TM 3 & 2412

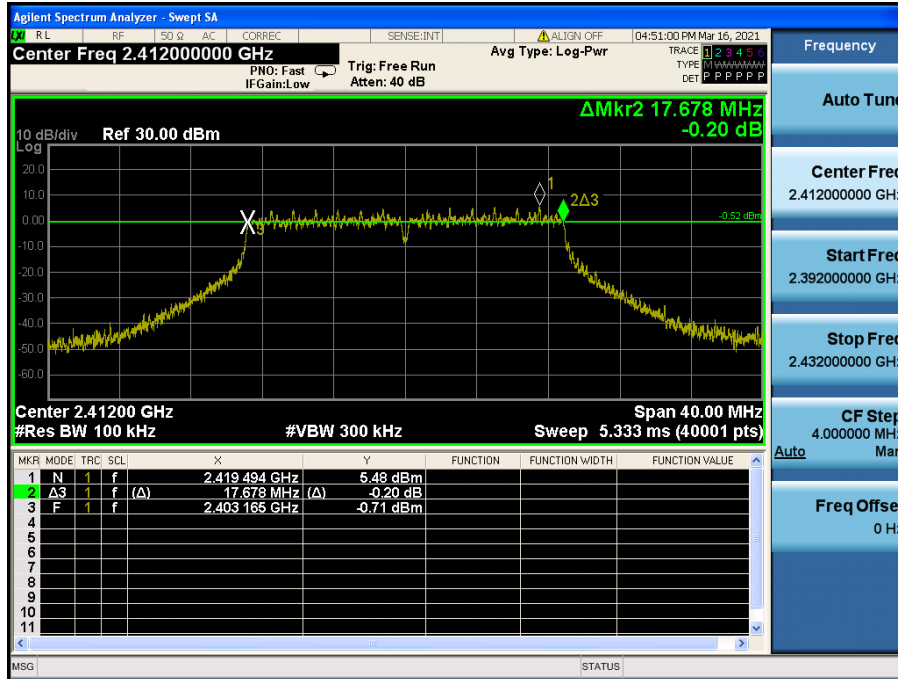

6 dB Bandwidth

TM 3 & 2437

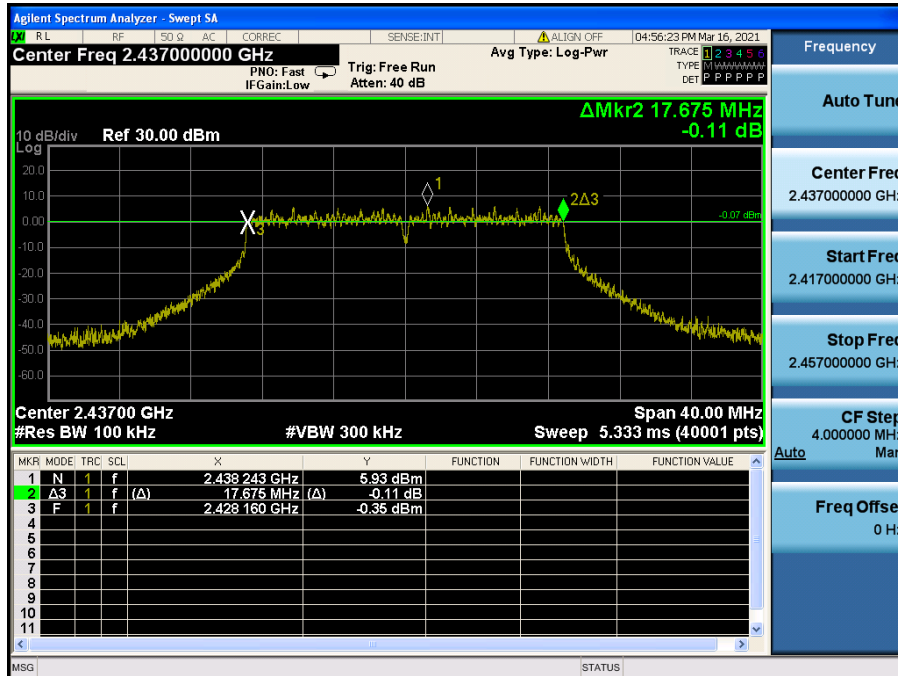


6 dB Bandwidth

TM 3 & 2 462




6 dB Bandwidth

TM 4 & 2 422

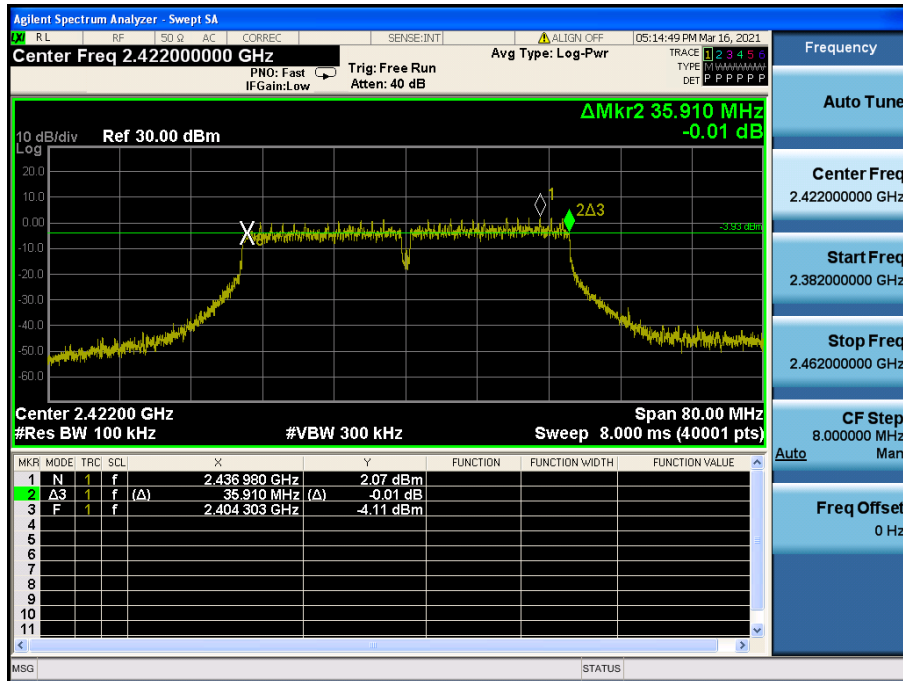


6 dB Bandwidth

TM 4 & 2 437

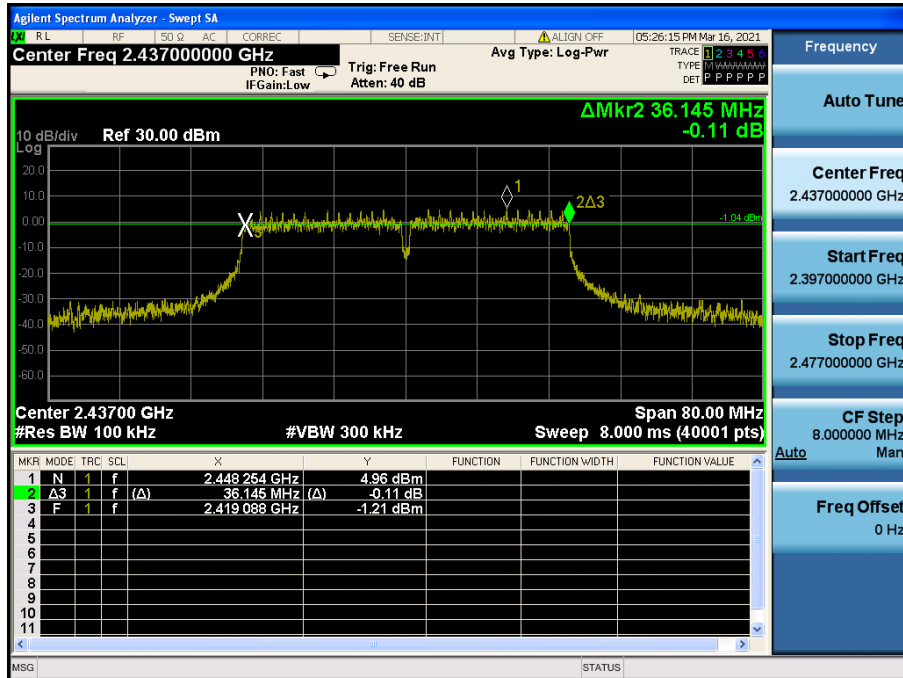

6 dB Bandwidth

TM 4 & 2 452

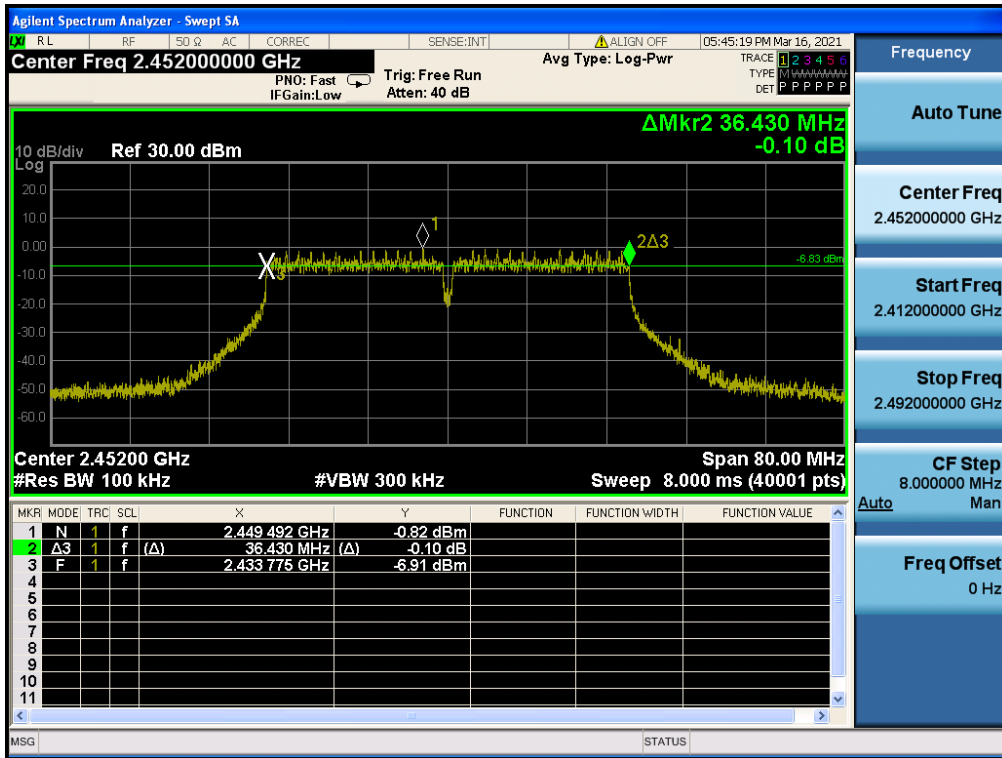

3.3. Power Spectral Density

■ Test requirements and limit, Part 15.247(e) & RSS-247 [5.2]

The peak power density is measured with a spectrum analyzer connected to the antenna terminal while the EUT is operating in transmission mode at the appropriate frequencies.

Minimum Standard

The power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission

3.3.1. Test Setup

Refer to the APPENDIX I.

3.3.2. Test Procedures

- KDB558074 D01v05r02 - Section 8.4
- ANSI C63.10-2013 – Section 11.10.2

Method PKPSD (peak PSD)


1. Set analyzer center frequency to DTS channel center frequency.
2. Set the span to **1.5 times** the DTS bandwidth.
3. Set the RBW : **3 kHz ≤ RBW ≤ 100 kHz**.
4. Set the VBW ≥ **3 x RBW**.
5. Detector = **peak**.
6. Sweep time = **auto couple**.
7. Trace mode = **max hold**.
8. Allow trace to fully stabilize.
9. Use the **peak marker function** to determine the maximum amplitude level within the RBW.
10. If measured value exceeds limit, reduce RBW (no less than 3 kHz) and repeat.

3.3.3. Test Results

Test Mode	Frequency	RBW	PKPSD (dBm)	Limit (dBm)
TM 1	2 412	3 kHz	-3.18	8.00
	2 437	3 kHz	-3.64	8.00
	2 462	3 kHz	-4.11	8.00
TM 2	2 412	3 kHz	-8.46	8.00
	2 437	3 kHz	-7.08	8.00
	2 462	3 kHz	-9.04	8.00
TM 3	2 412	3 kHz	-8.55	8.00
	2 437	3 kHz	-7.16	8.00
	2 462	3 kHz	-8.03	8.00
TM 4	2 422	3 kHz	-12.42	8.00
	2 437	3 kHz	-10.21	8.00
	2 452	3 kHz	-15.73	8.00


Power Spectral Density

TM 1 & 2 412

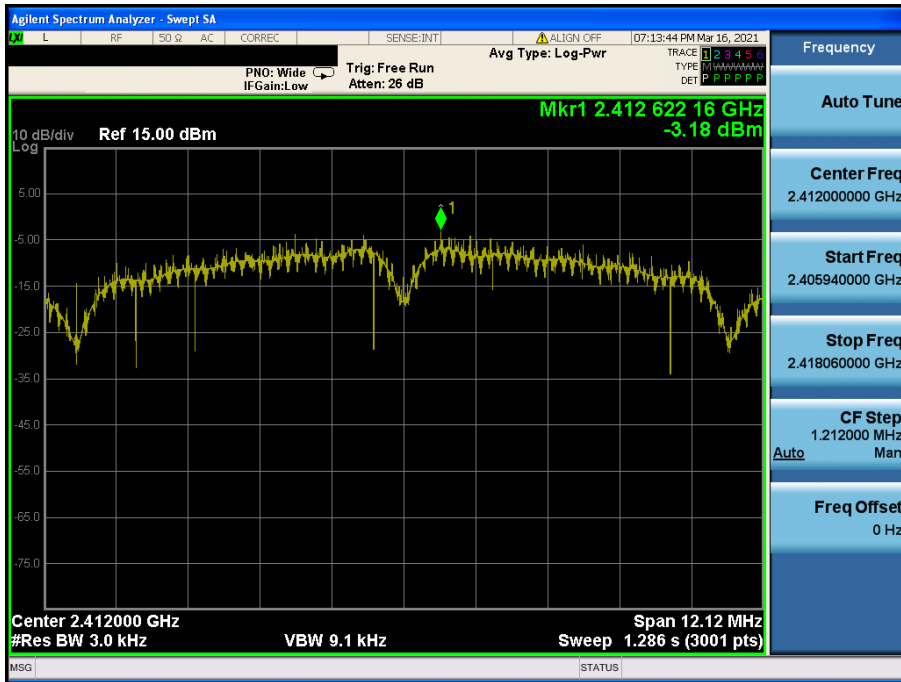

Power Spectral Density

TM 1 & 2 437

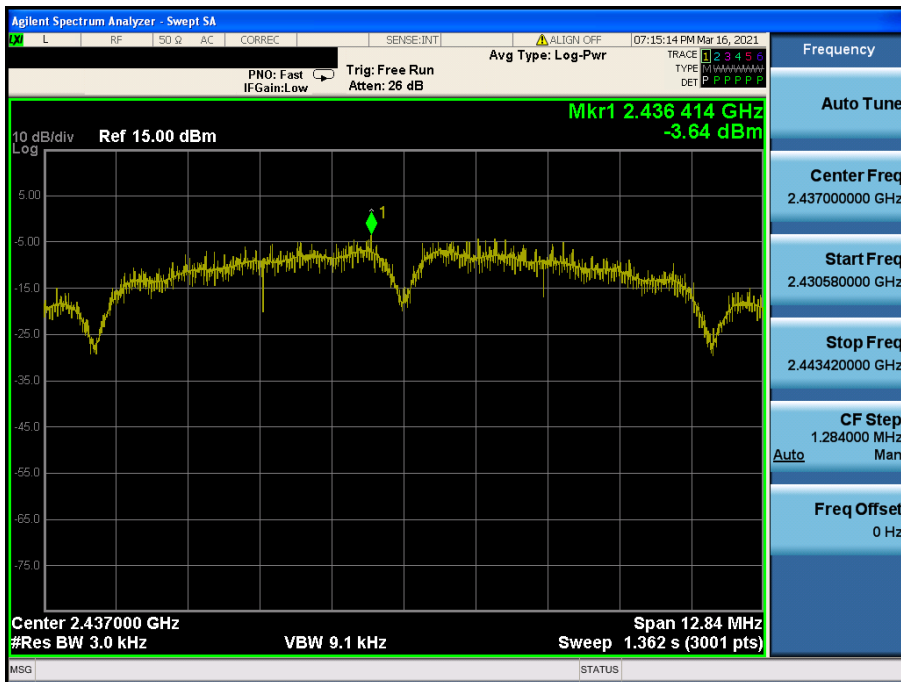


Power Spectral Density

TM 1 & 2 462




Power Spectral Density

TM 2 & 2 412

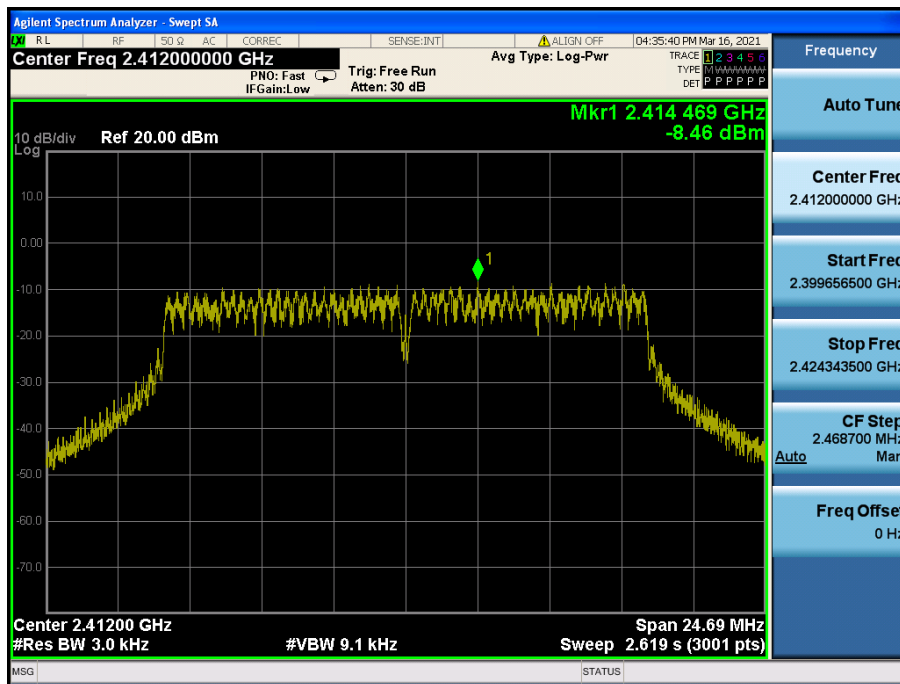


Power Spectral Density

TM 2 & 2 437

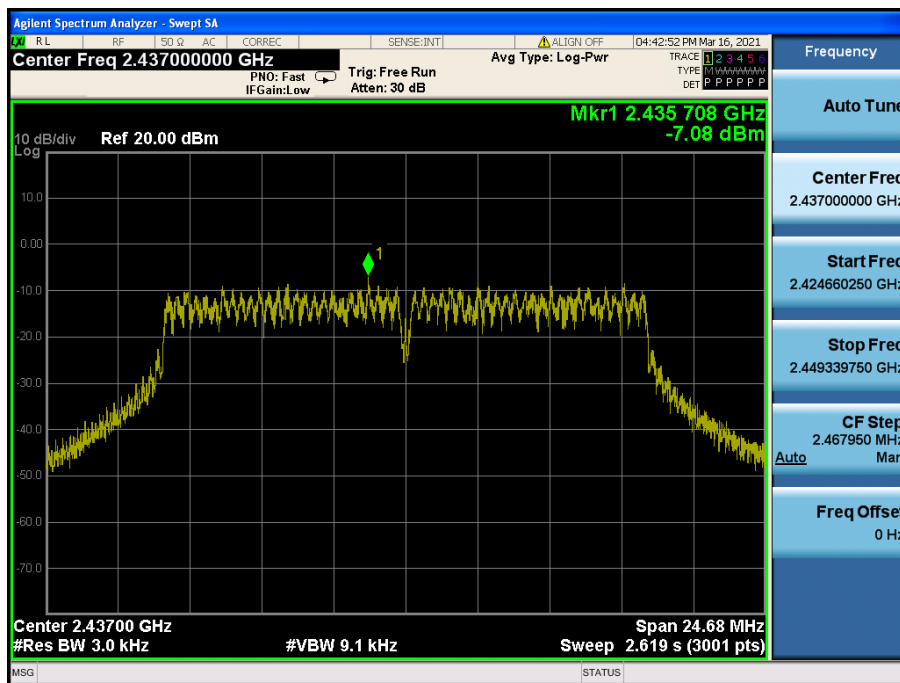


Power Spectral Density

TM 2 & 2 462

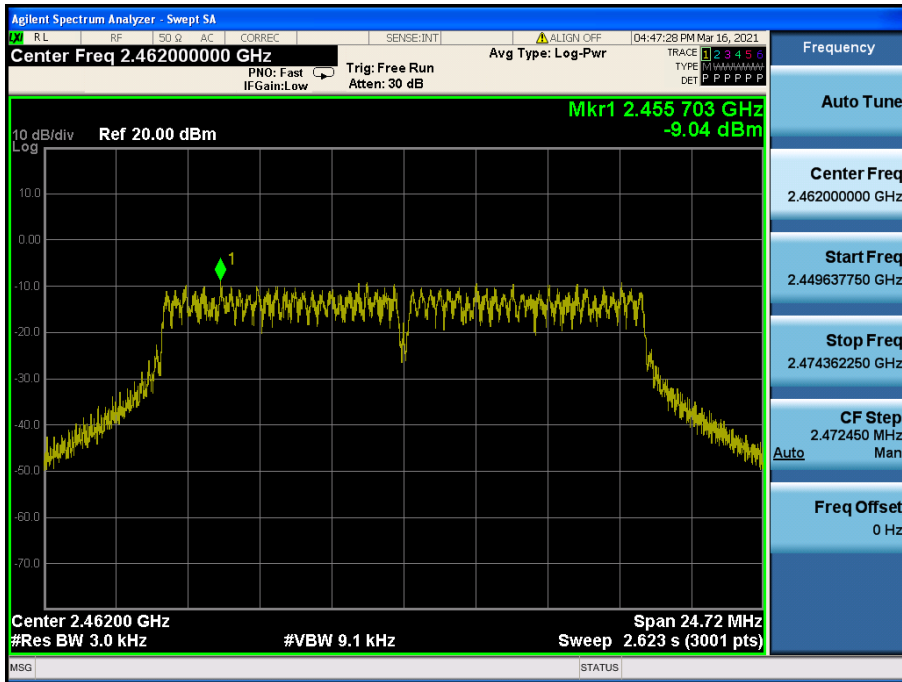


Power Spectral Density

TM 3 & 2 412

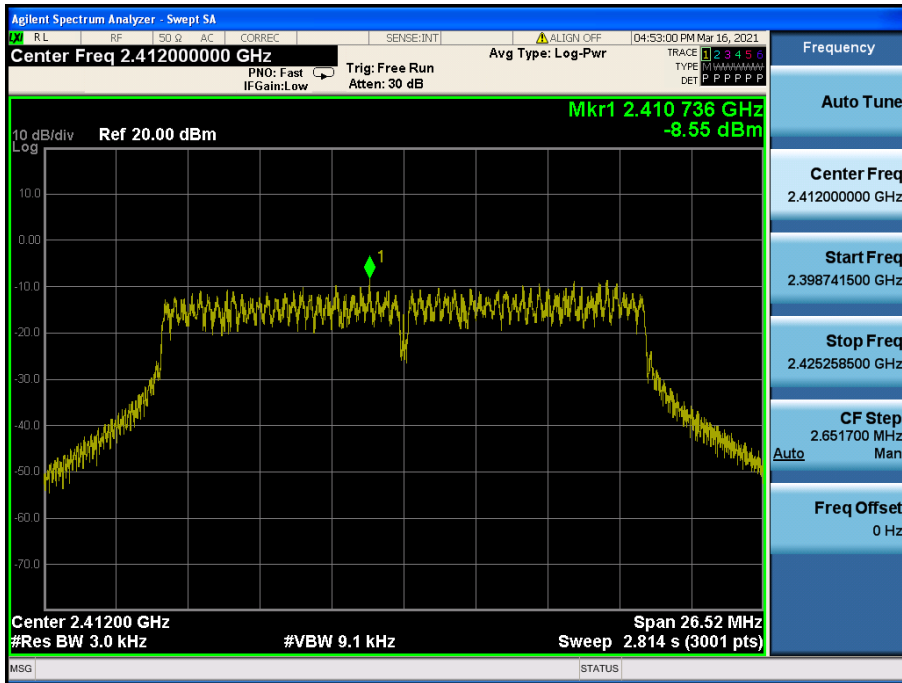


Power Spectral Density

TM 3 & 2 437

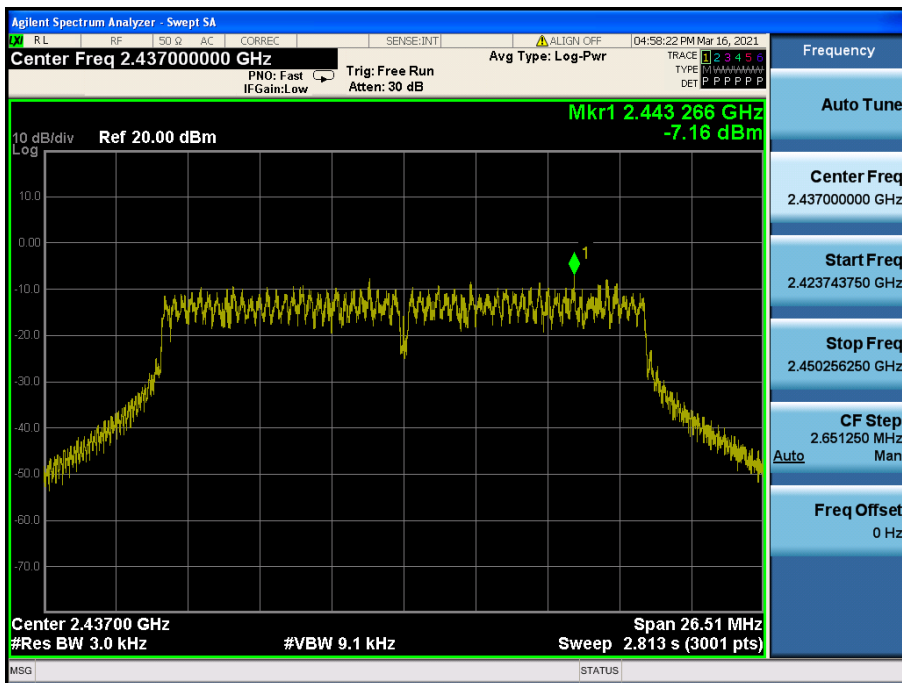


Power Spectral Density

TM 3 & 2 462

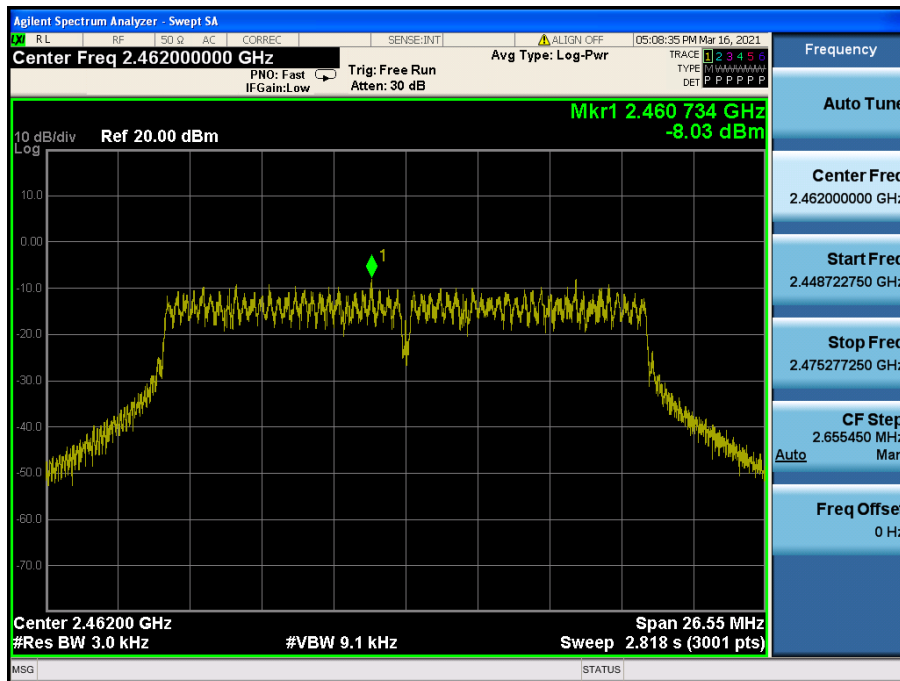


Power Spectral Density

TM 4 & 2 422

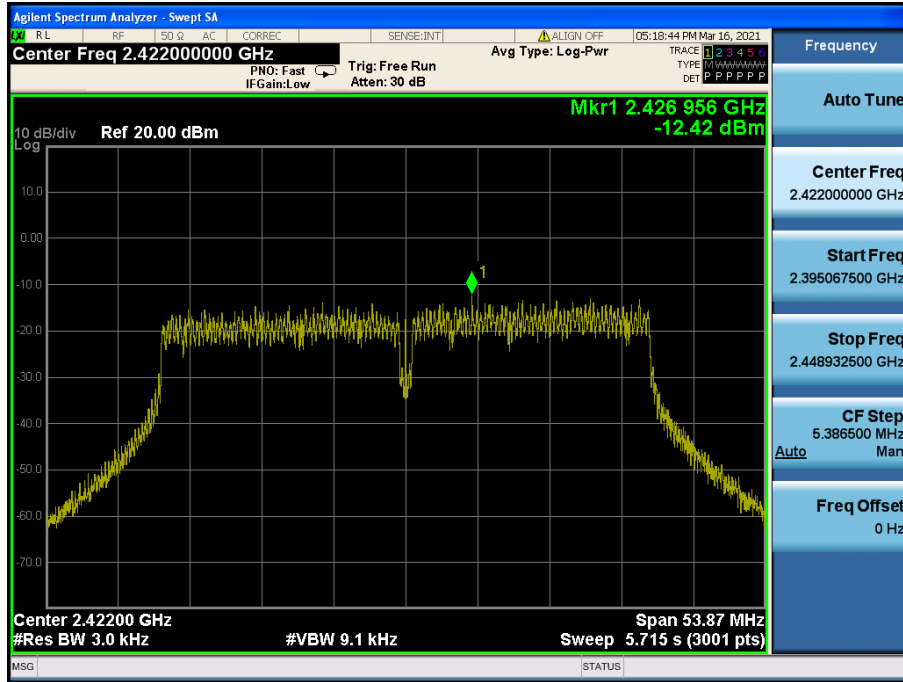


Power Spectral Density

TM 4 & 2 437

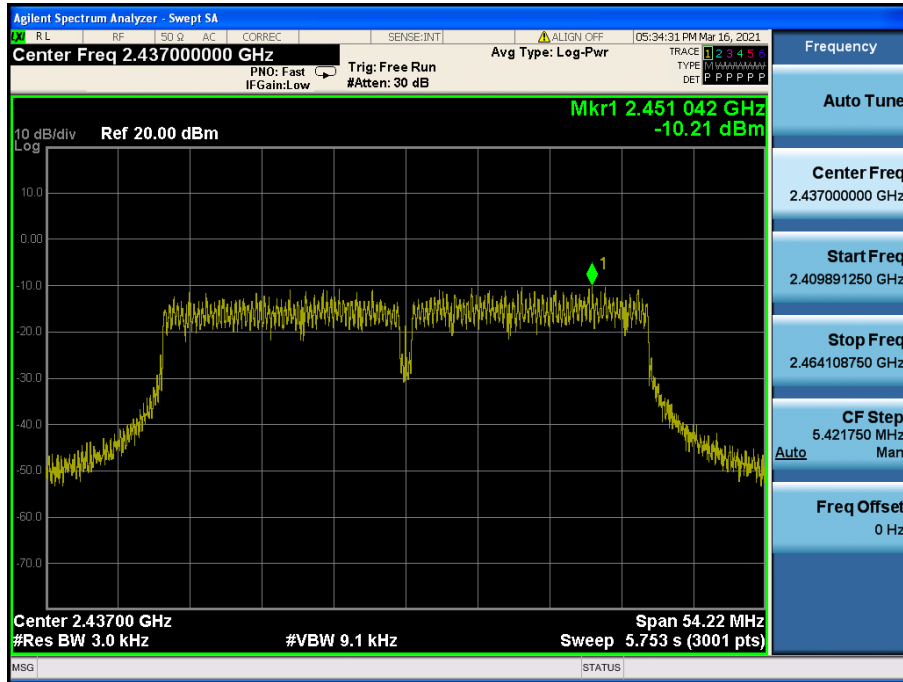

Power Spectral Density

TM 4 & 2 452

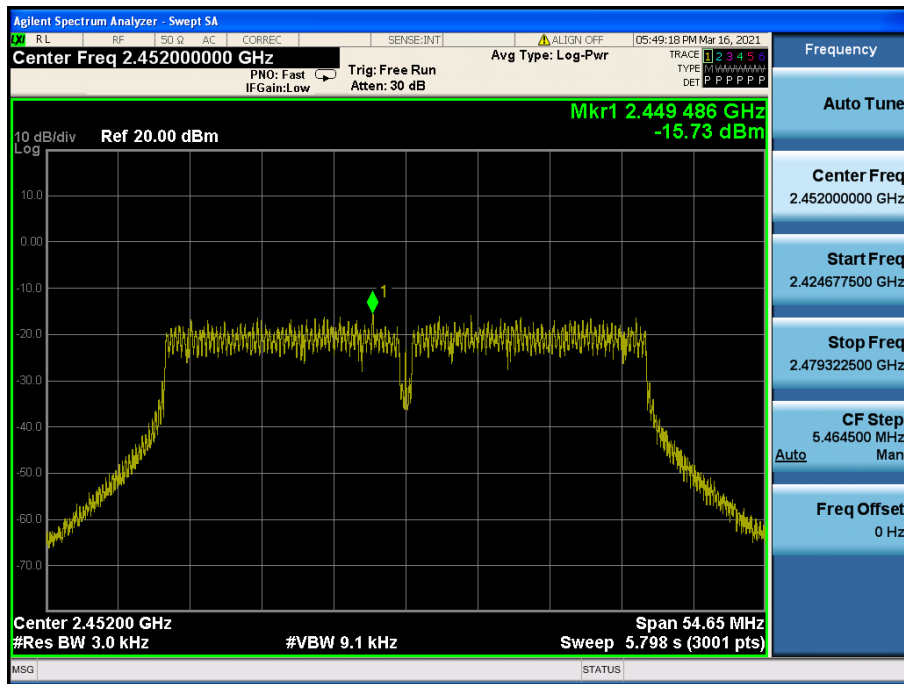

3.4. Unwanted Emissions (Conducted)

■ Test requirements and limit, Part 15.247(d) & RSS-247 [5.5]

In any 100 kHz bandwidth outside of the authorized frequency band, the power shall be attenuated according to the following conditions :

If the peak output power procedure is used to measure the fundamental emission power to demonstrate compliance to 15.247(b)(3) requirements, then the peak conducted output power measured within any 100 kHz outside the authorized frequency band shall be attenuated by at least 20 dB relative to the maximum measured in-band peak PSD level.

If the average output power procedure is used to measure the fundamental emission power to demonstrate compliance to 15.247(b)(3) requirements, then the power in any 100 kHz outside of the authorized frequency band shall be attenuated by at least 30 dB relative to the maximum measured inband average PSD level.

In either case, attenuation to levels below the general emission limits specified in §15.209(a) is not required.

3.4.1. Test Setup

Refer to the APPENDIX I including path loss

3.4.2. Test Procedures

- KDB558074 D01v05r02 - Section 8.5
- ANSI C63.10-2013 – Section 11.11

Reference level measurement

1. Set instrument center frequency to DTS channel center frequency.
2. Set the span to ≥ 1.5 times the DTS bandwidth.
3. Set the RBW = 100 kHz.
4. Set the VBW $\geq 3 \times$ RBW.
5. Detector = peak.
6. Sweep time = auto couple.
7. Trace mode = max hold.
8. Allow trace to fully stabilize.
9. Use the peak marker function to determine the maximum PSD level
LIMIT LINE = 20 dB below of the reference level.

Emission level measurement

1. Set the center frequency and span to encompass frequency range to be measured.
2. Set the RBW = 100 kHz.(Actual 1 MHz , See below note)
3. Set the VBW $\geq 3 \times$ RBW.(Actual 3 MHz, See below note)
4. Detector = peak.
5. Ensure that the number of measurement points \geq span / RBW
6. Sweep time = auto couple.
7. Trace mode = max hold.
8. Allow the trace to stabilize (this may take some time, depending on the extent of the span).
9. Use the peak marker function to determine the maximum amplitude level.

Note: The conducted spurious emission was tested with below settings.


Frequency range	RBW	VBW	Detector	Trace	Sweep Point
9 kHz ~ 30 MHz	100 kHz	300 kHz	Peak	Max Hold	40 001
30 MHz ~ 10 GHz	1 MHz	3 MHz			
10 GHz ~ 25 GHz	1 MHz	3 MHz			

If the emission level with above setting was close to the limit (ie, less than 3 dB margin) then zoom scan is required using RBW = 100 kHz, VBW = 300 kHz, SPAN = 100 MHz and BINS = 2 001 to get accurate emission level within 100 kHz BW.


3.4.3. Test Results

TM 1 & 2 412



Reference

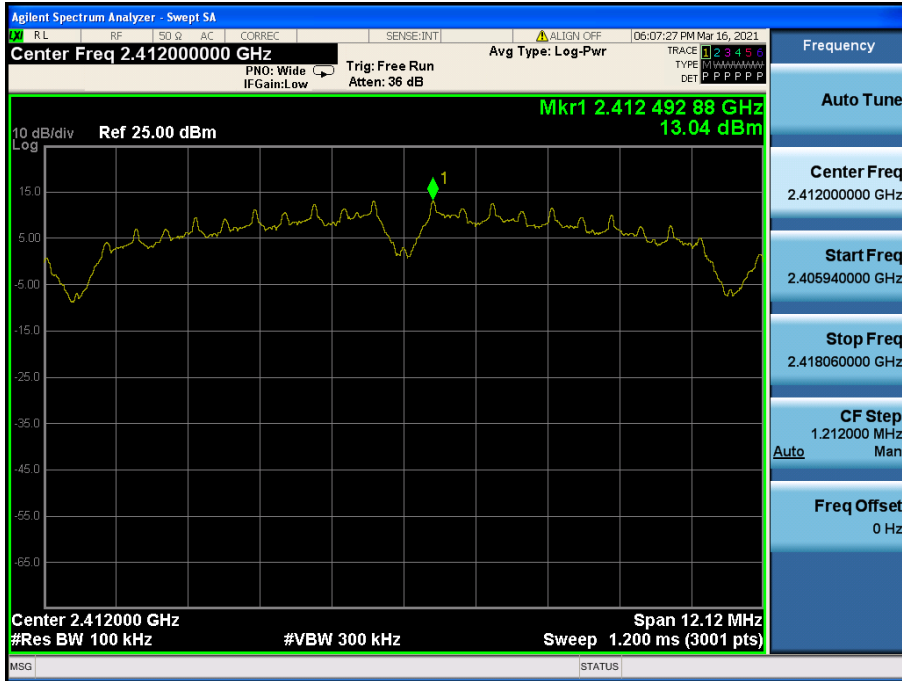


Low Band-edge

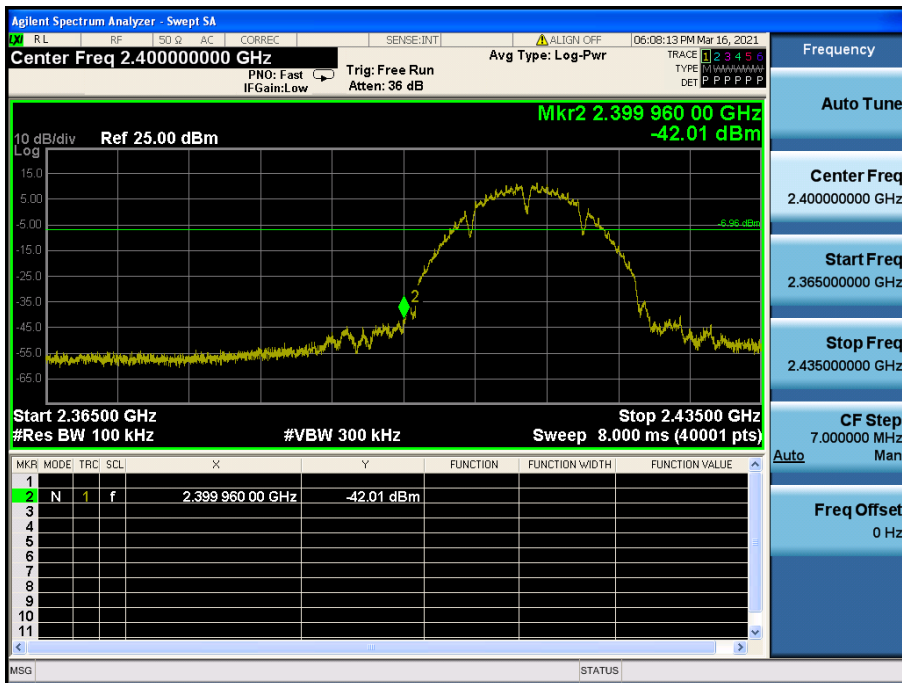

Conducted Spurious Emissions

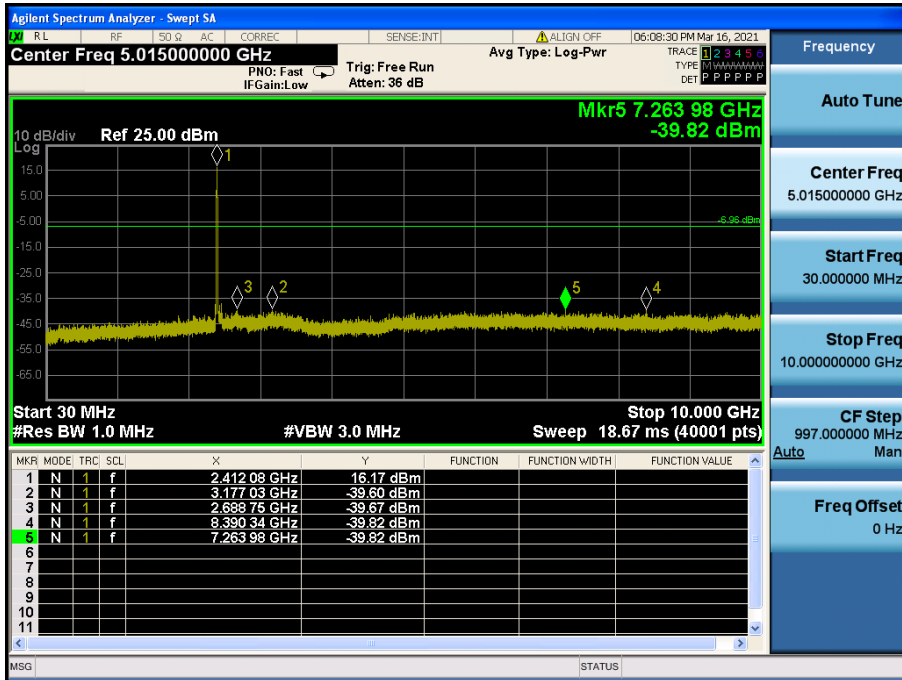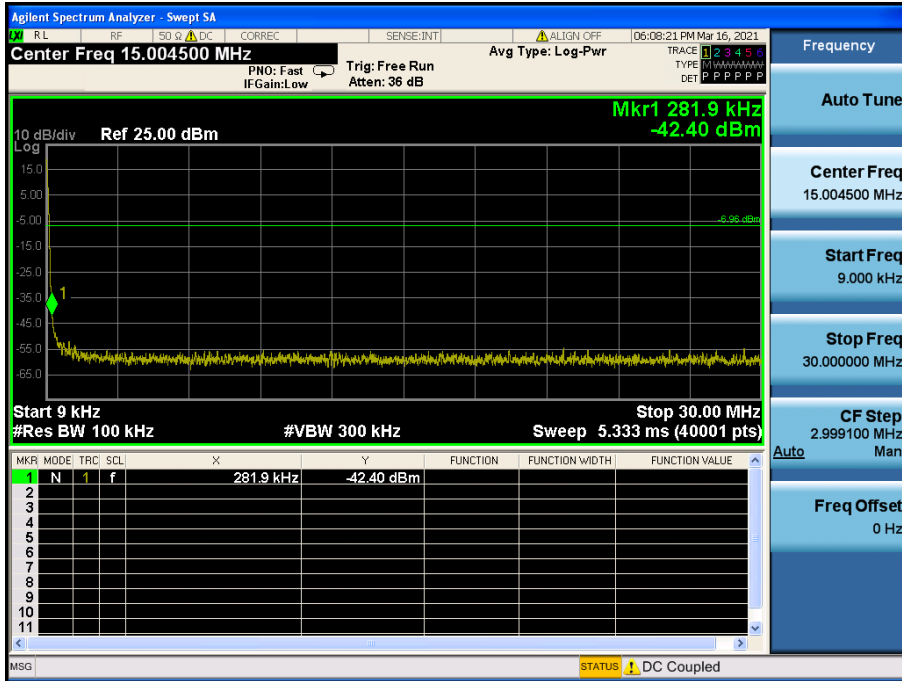


Conducted Spurious Emissions

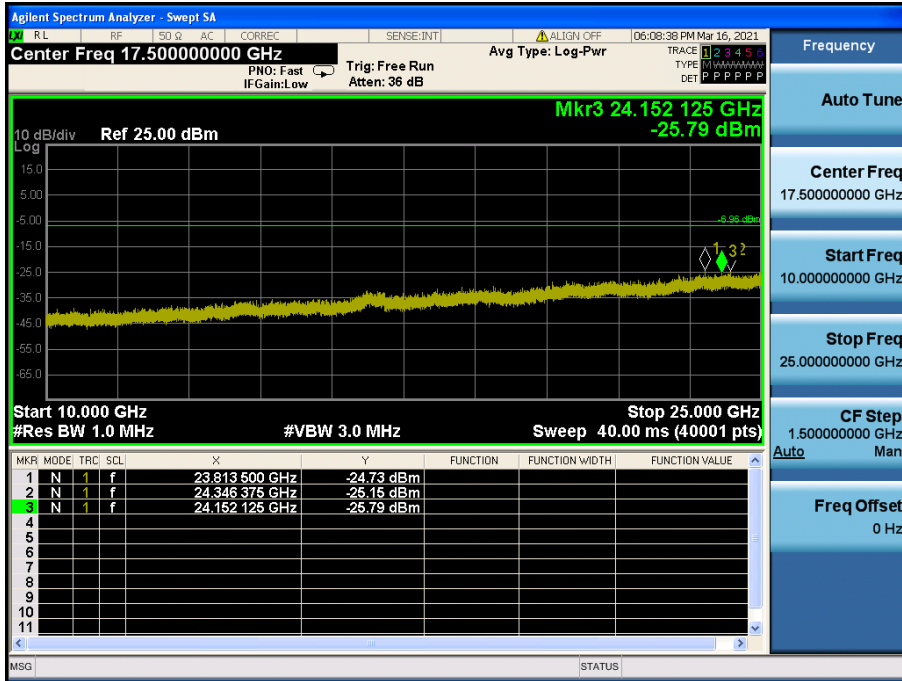


TM 1 & 2 437



Reference

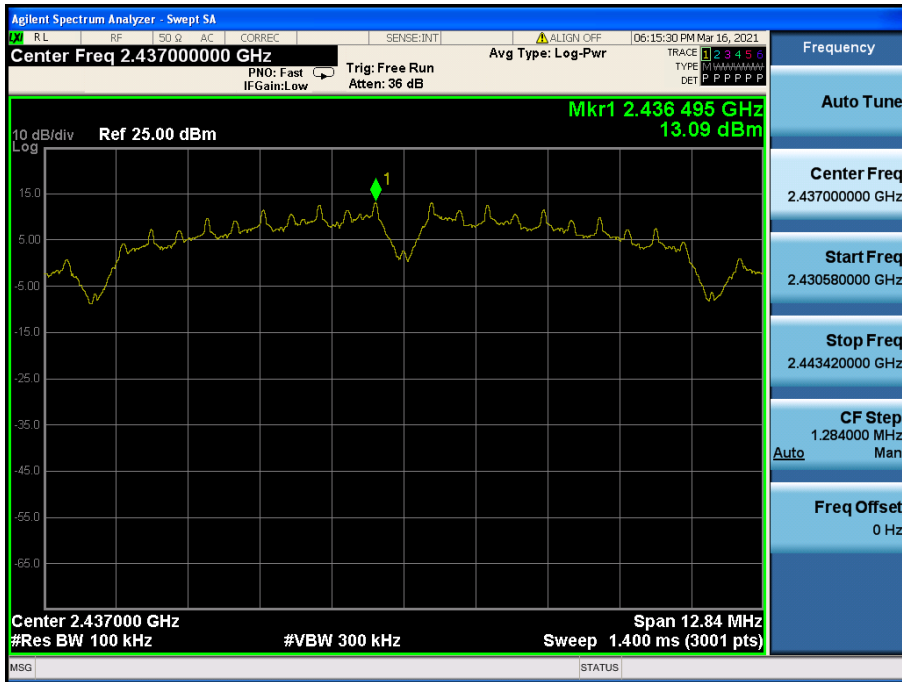

Conducted Spurious Emissions

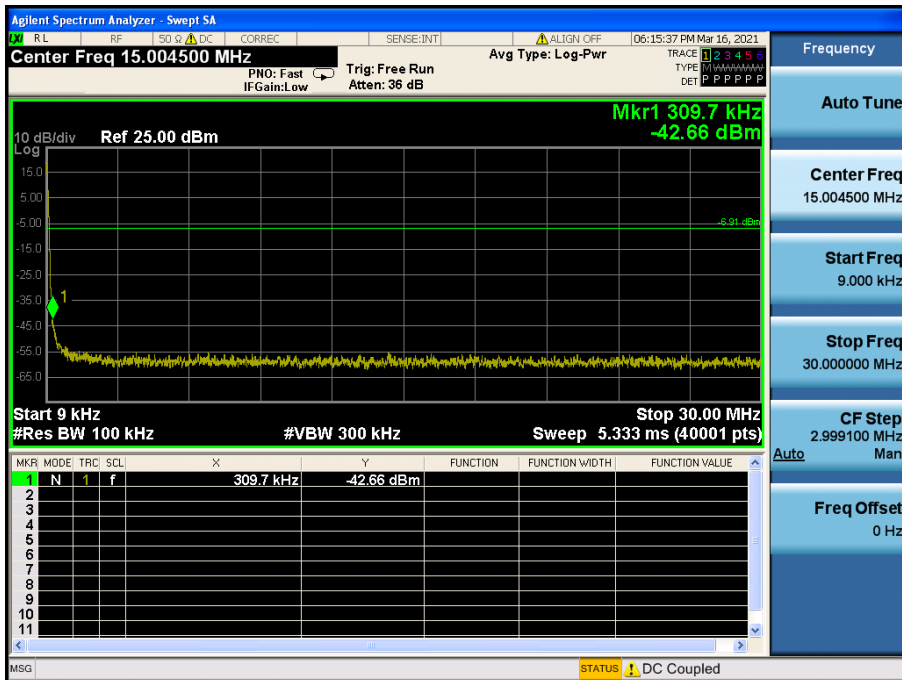


Conducted Spurious Emissions

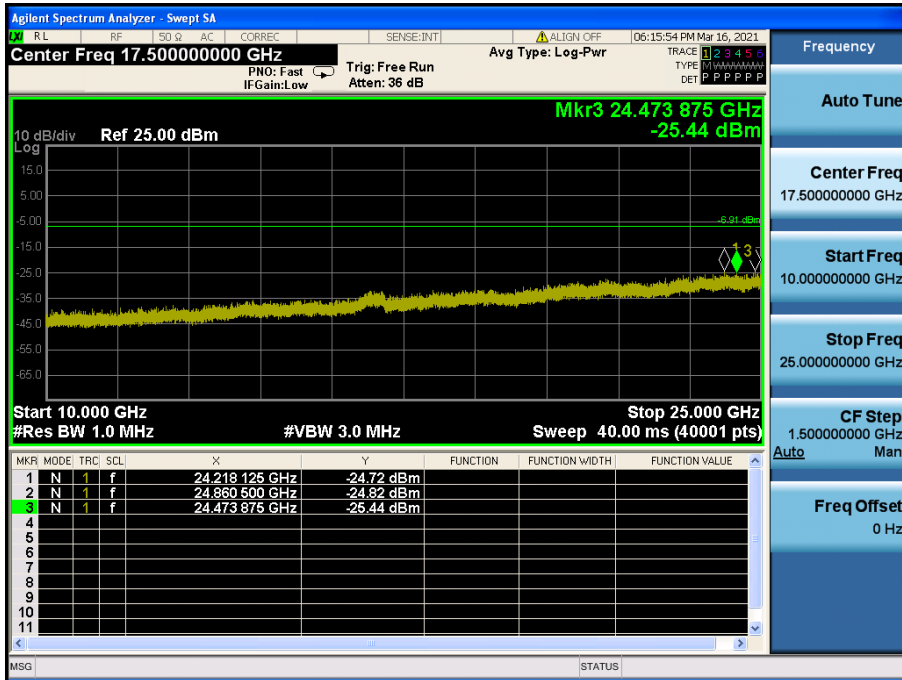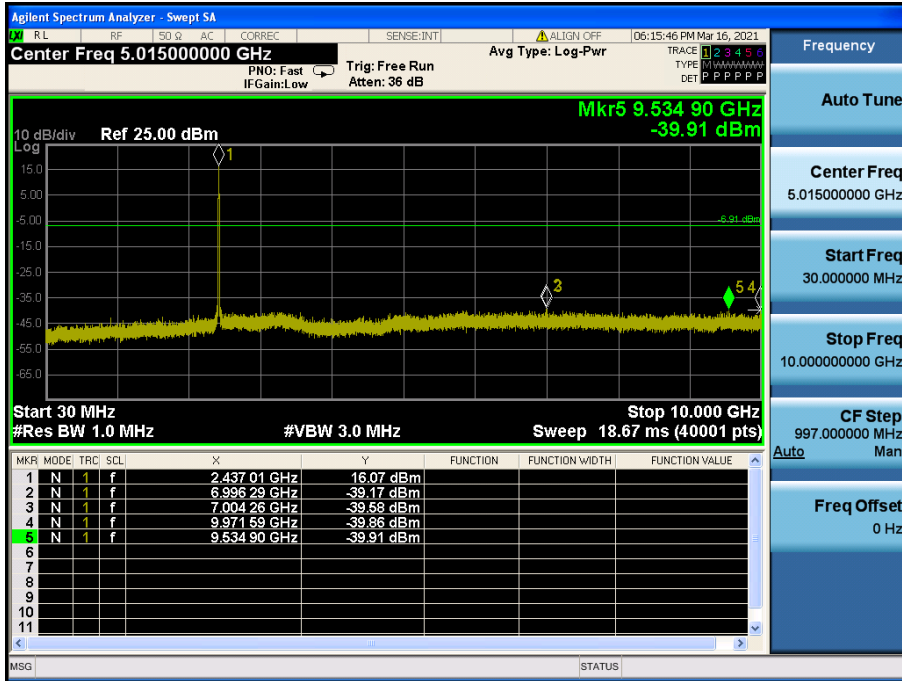

TM 1 & 2 462



Reference

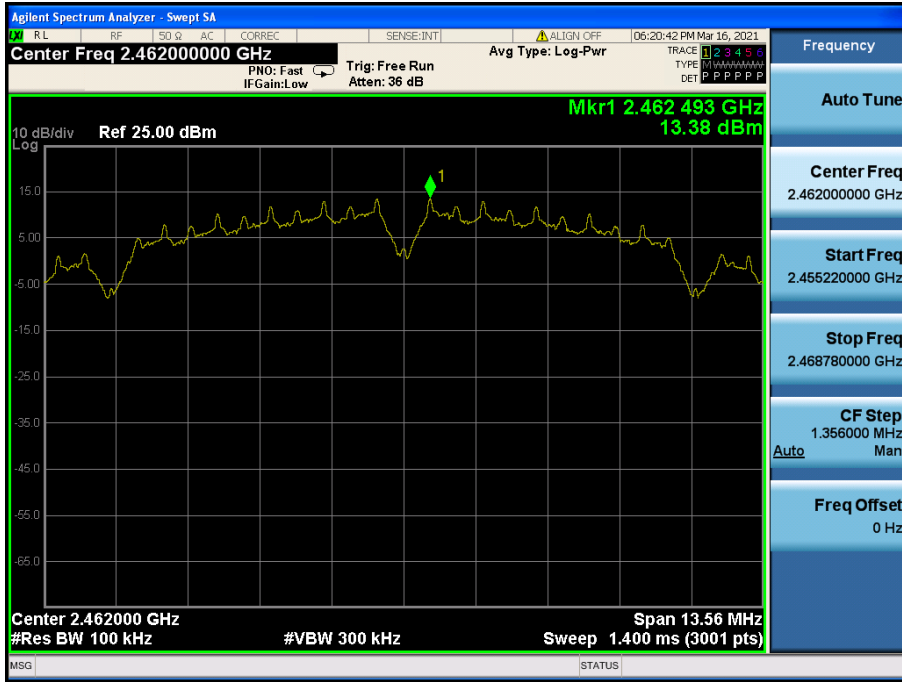


High Band-edge



Conducted Spurious Emissions

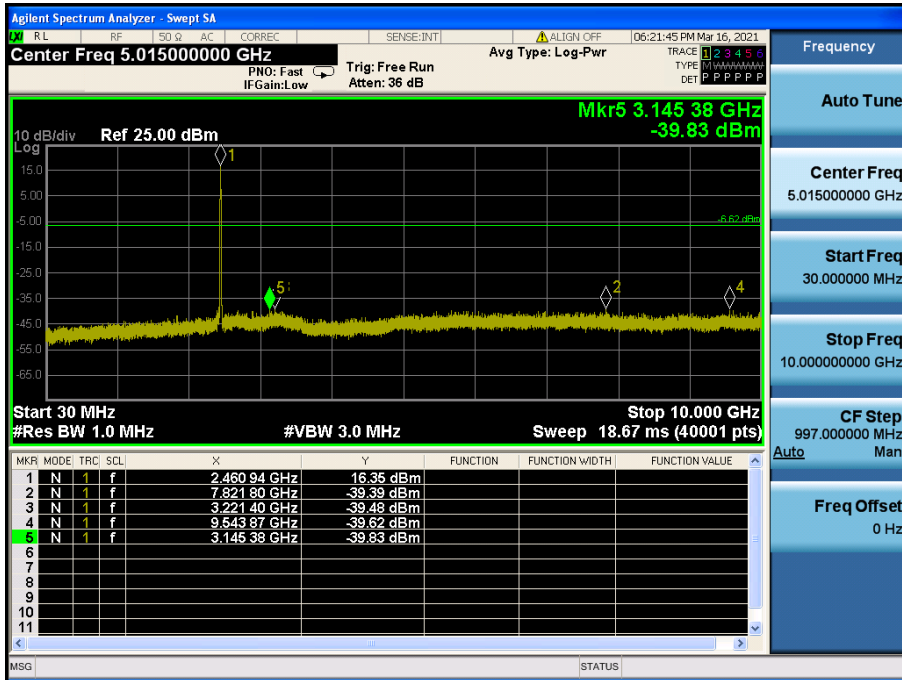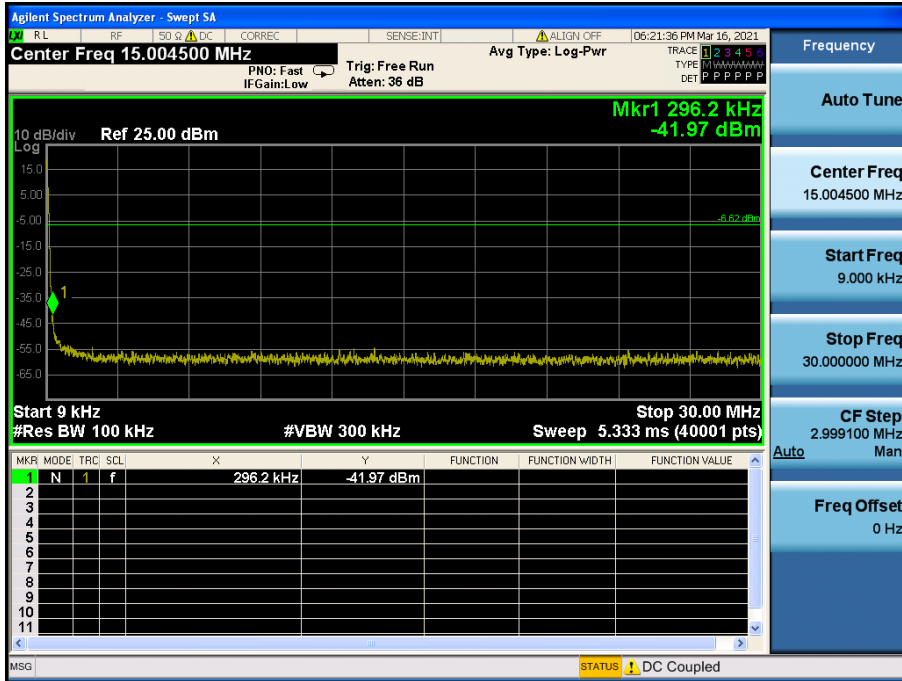


Conducted Spurious Emissions

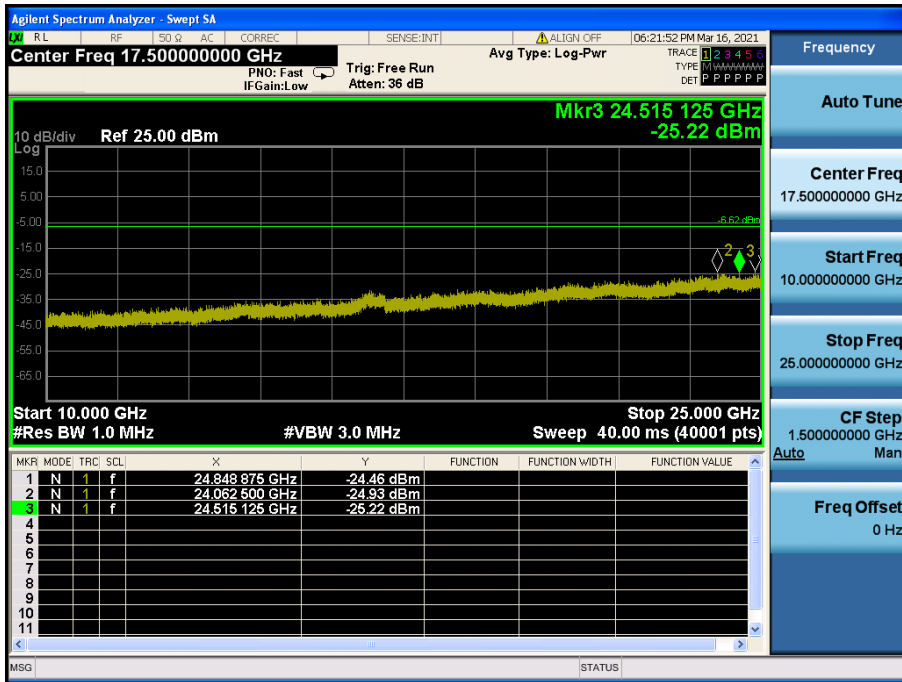


TM 2 & 2 412



Reference

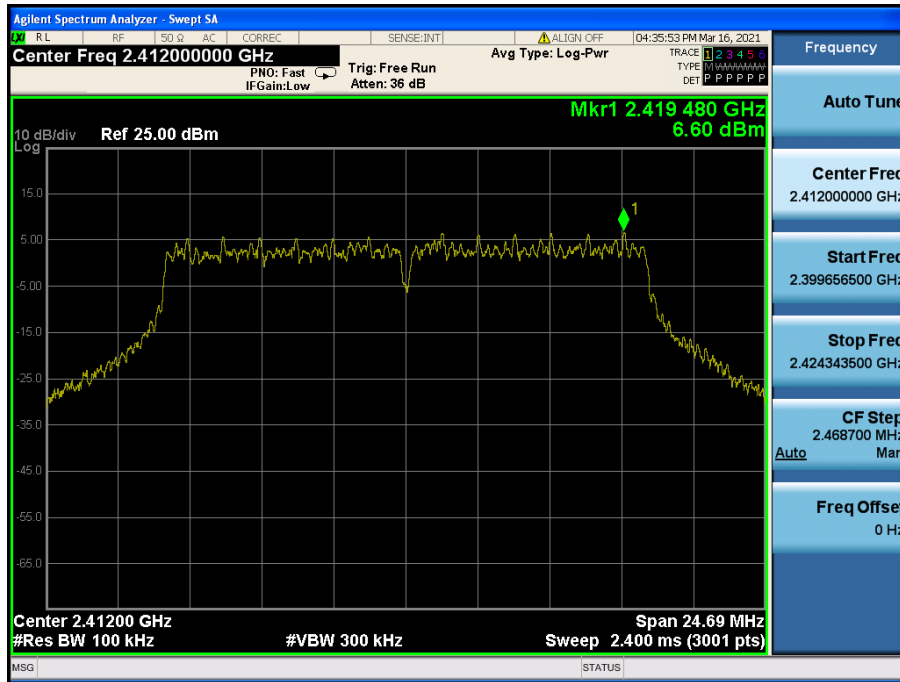


Low Band-edge

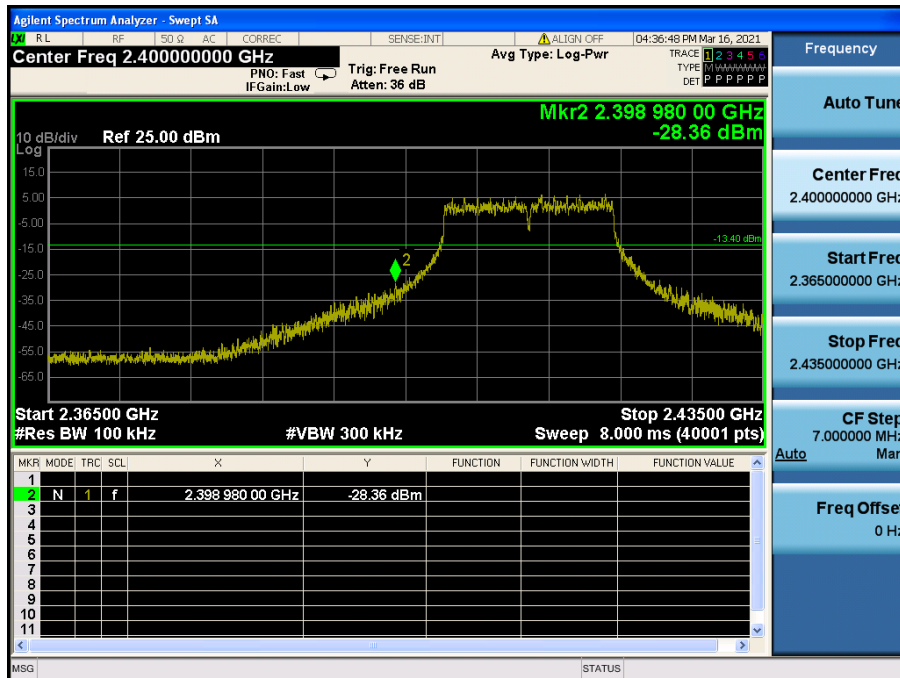

Conducted Spurious Emissions

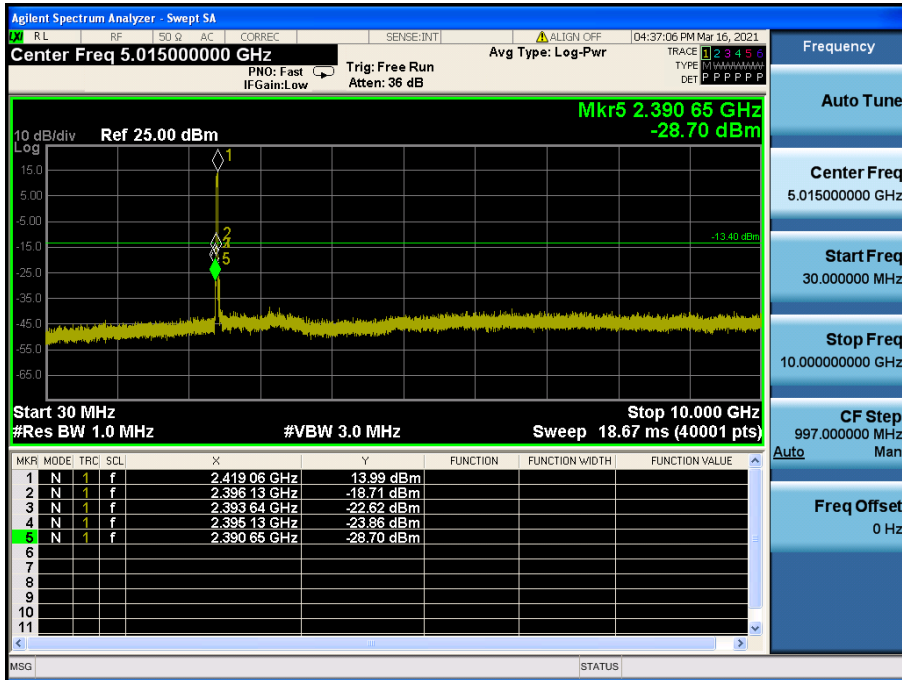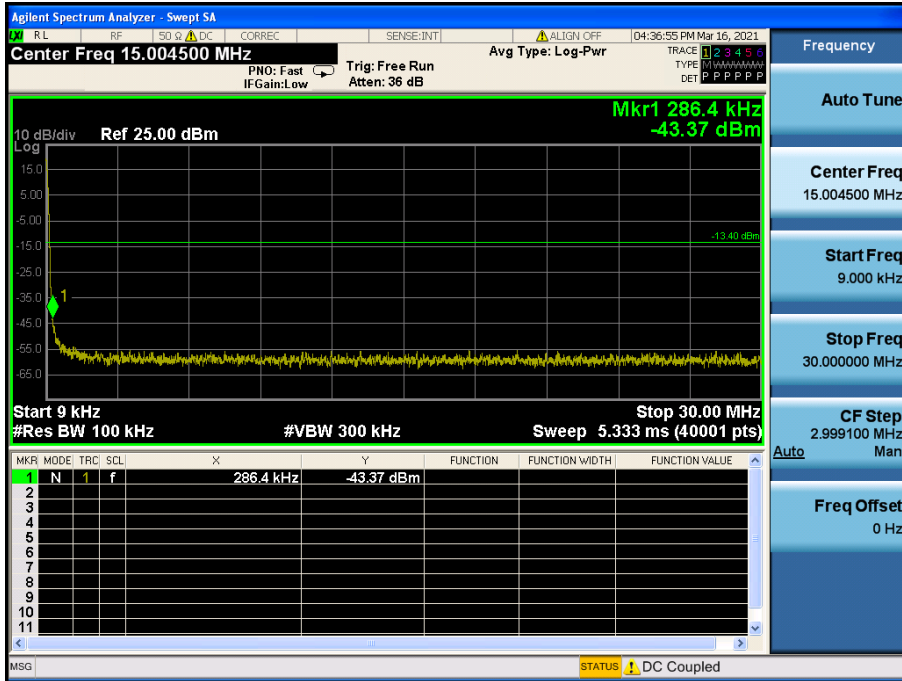


Conducted Spurious Emissions

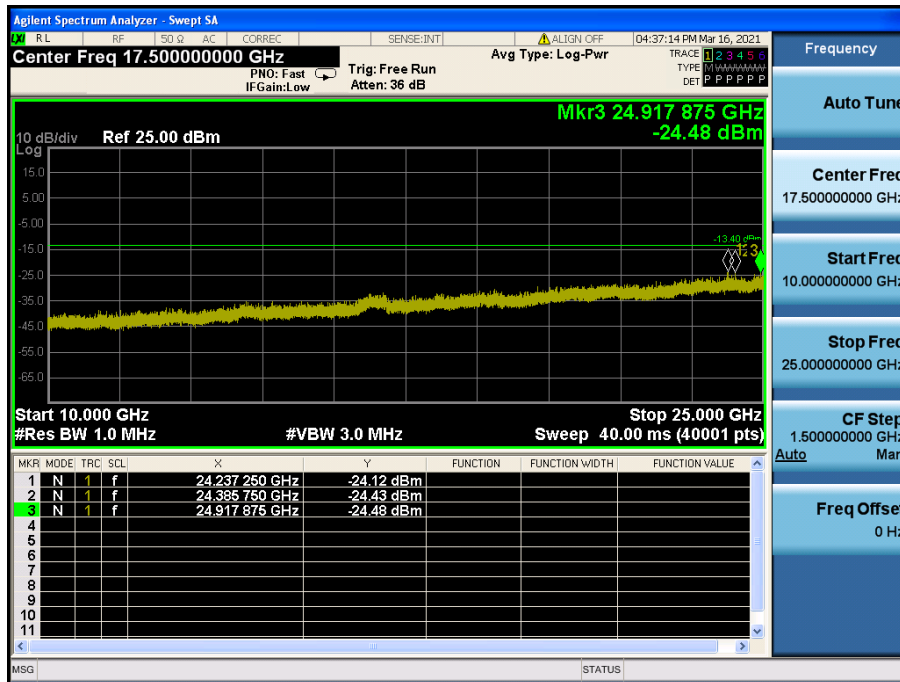


TM 2 & 2 437



Reference

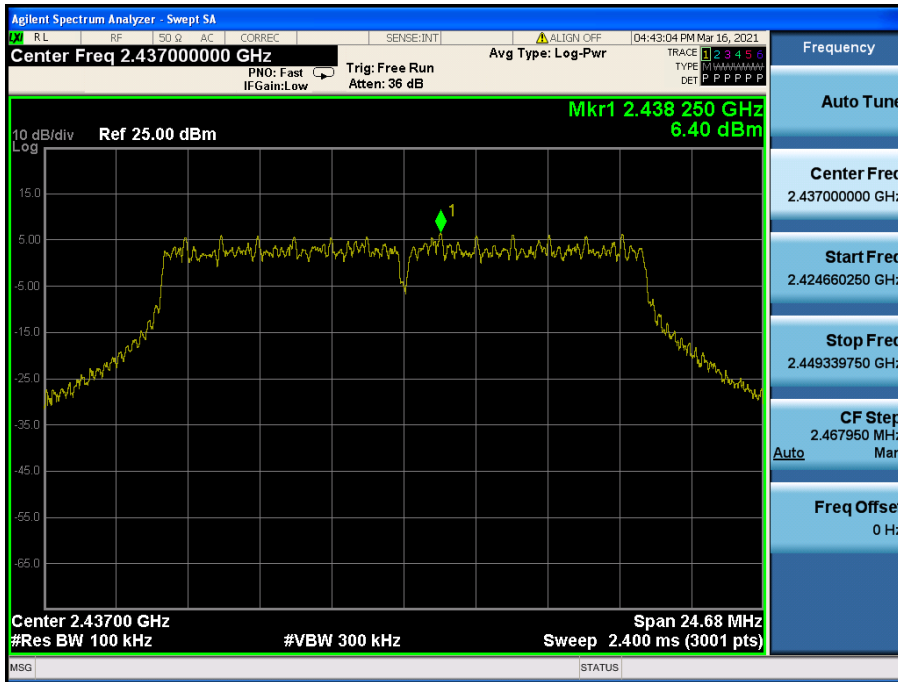

Conducted Spurious Emissions

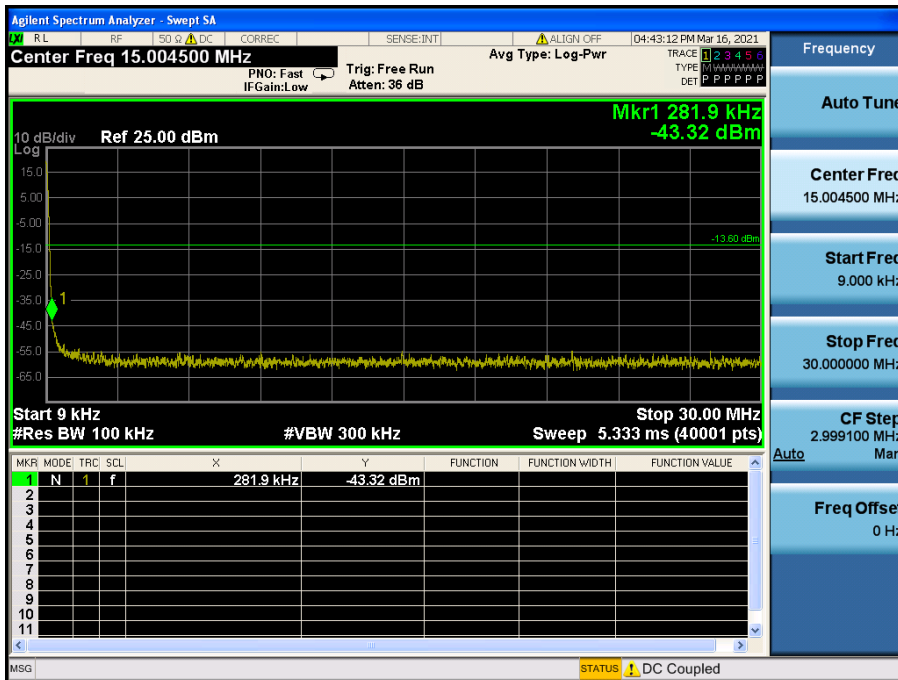


Conducted Spurious Emissions

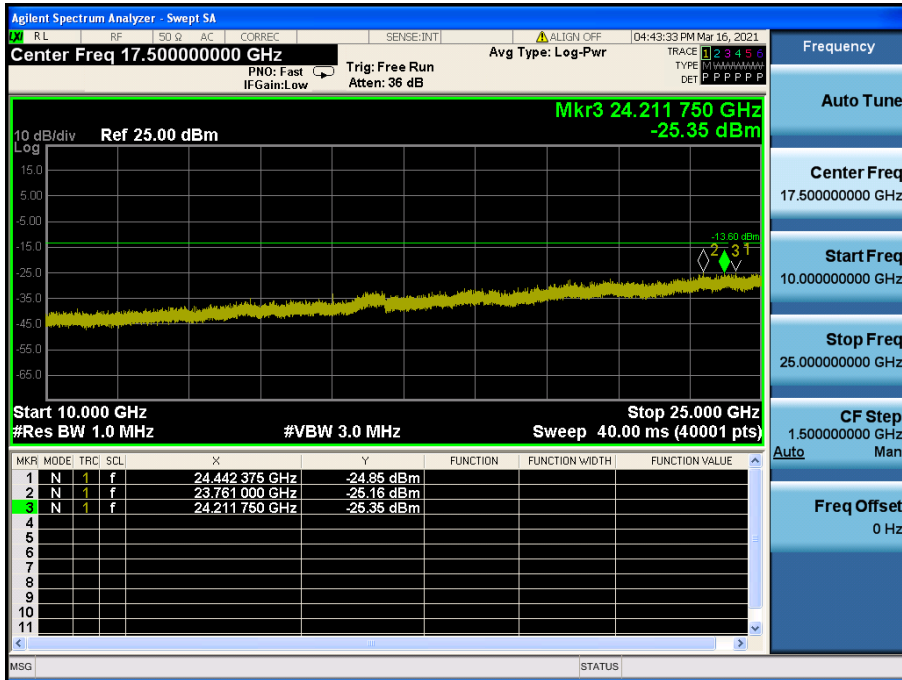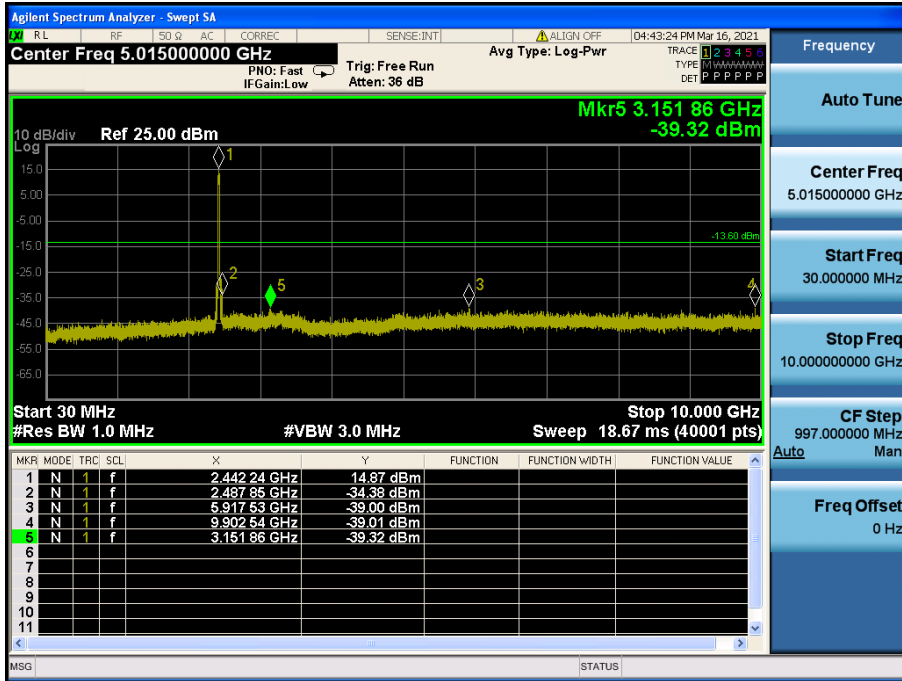


TM 2 & 2 462



Reference

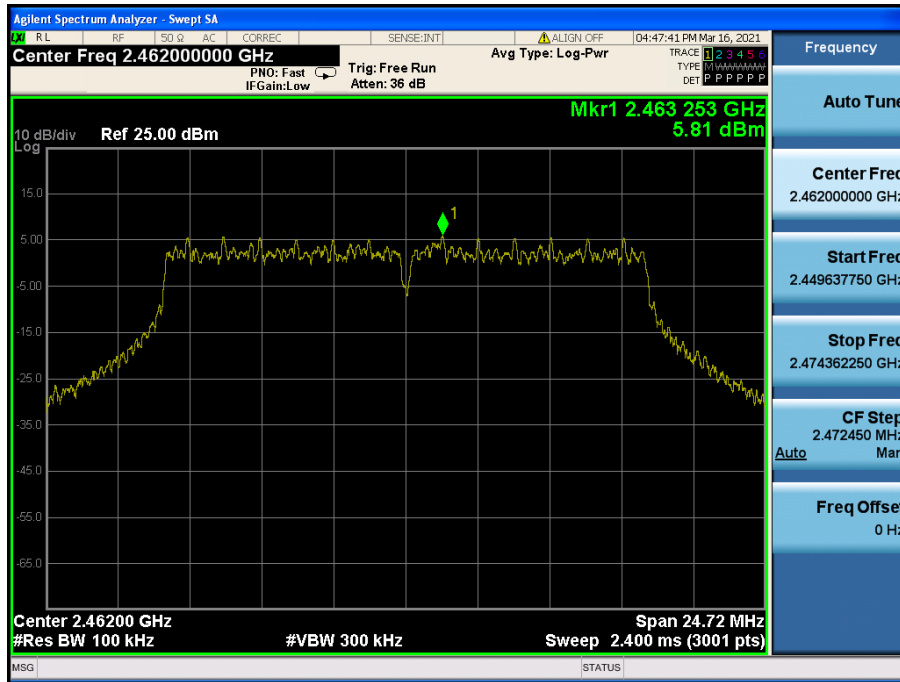


High Band-edge

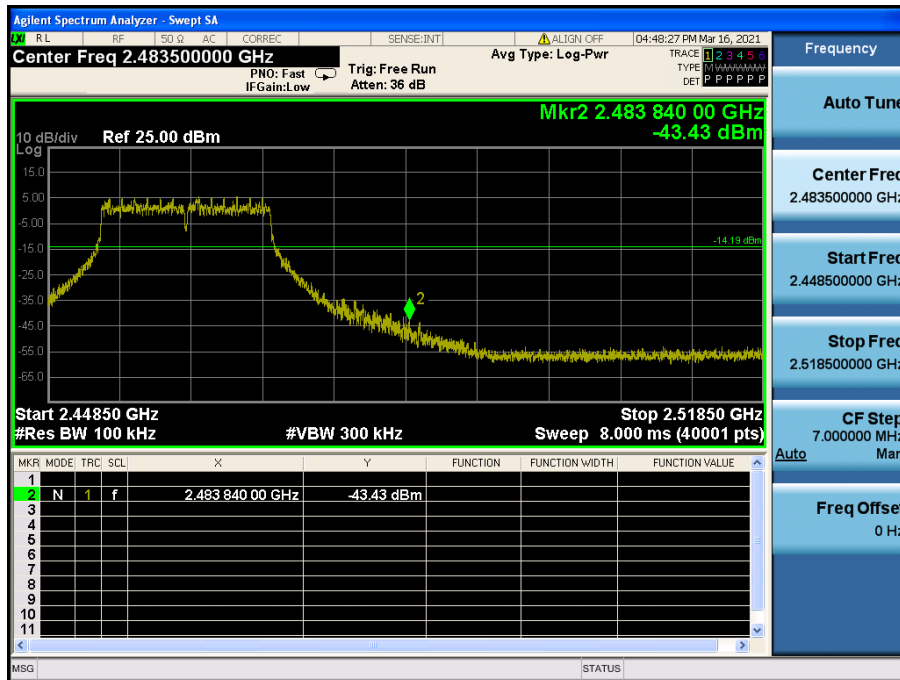

Conducted Spurious Emissions

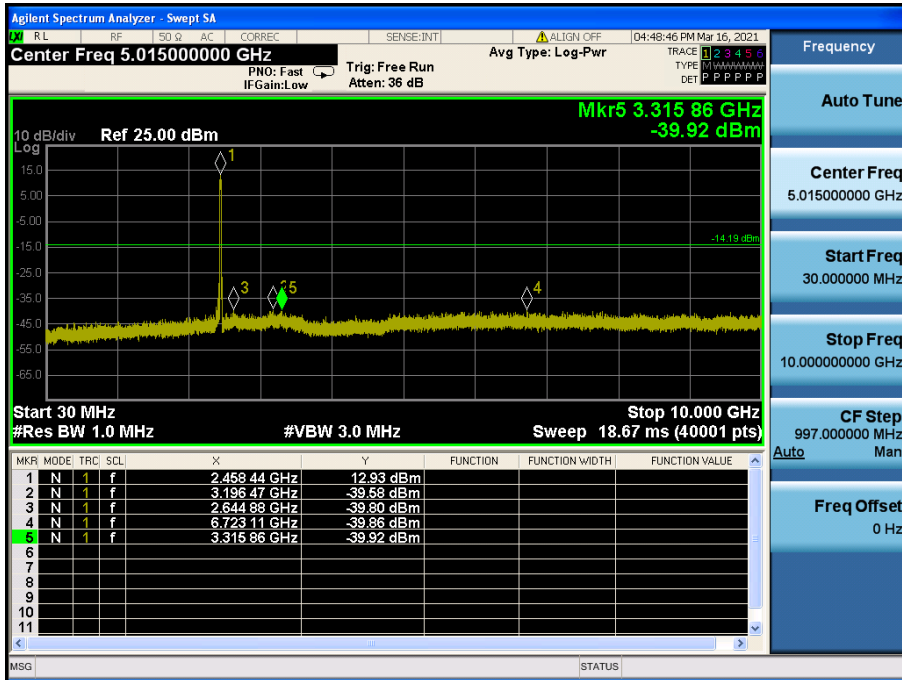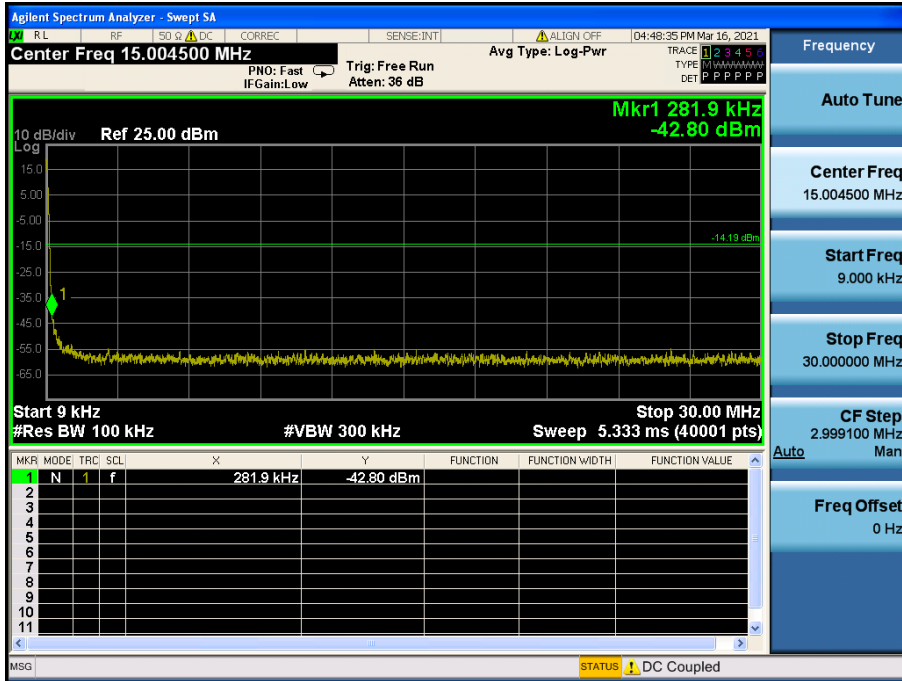


Conducted Spurious Emissions

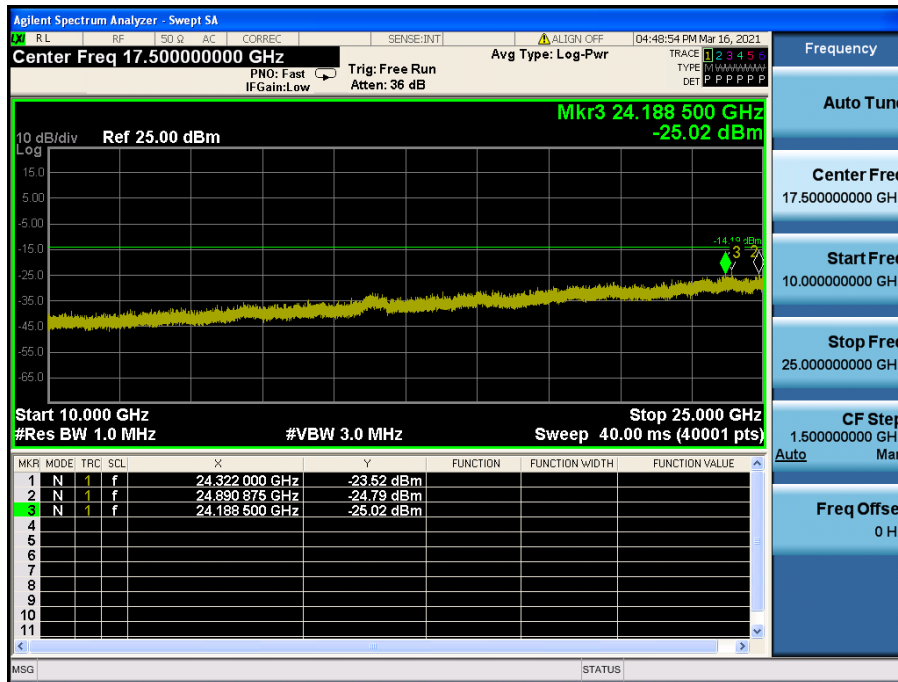


TM 3 & 2 412



Reference

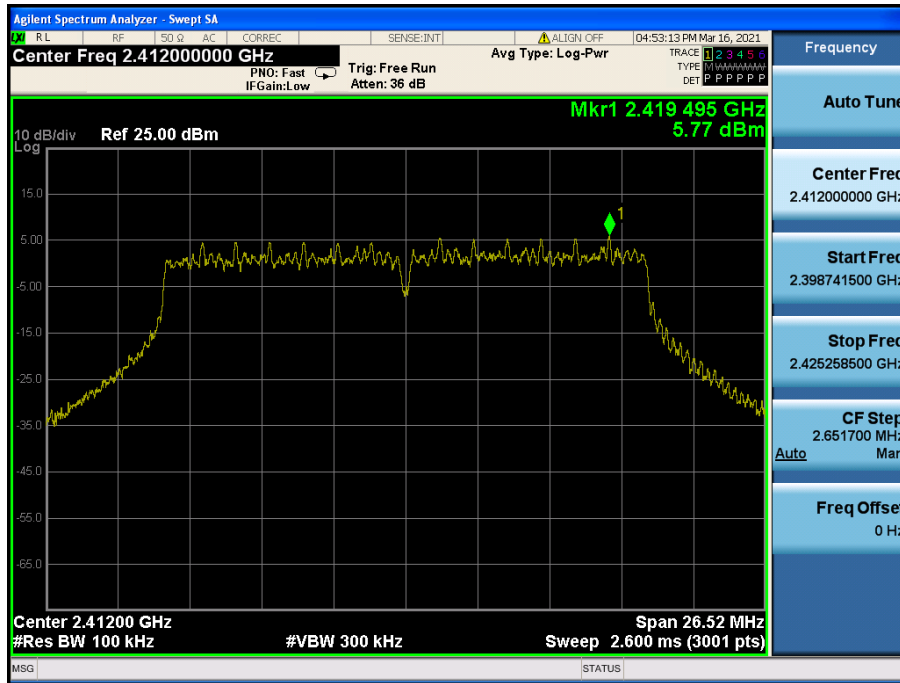


Low Band-edge

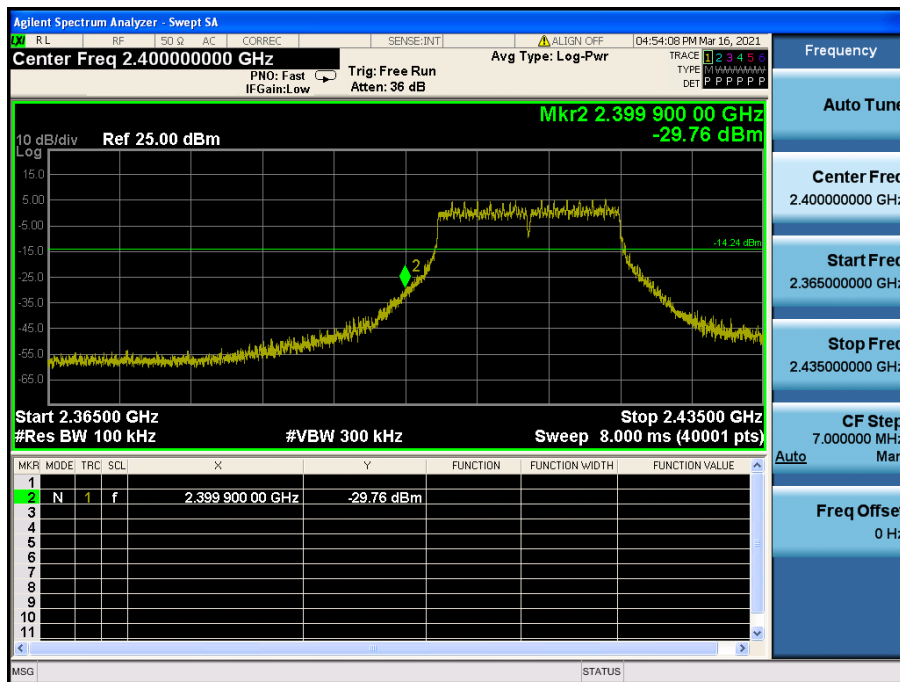

Conducted Spurious Emissions

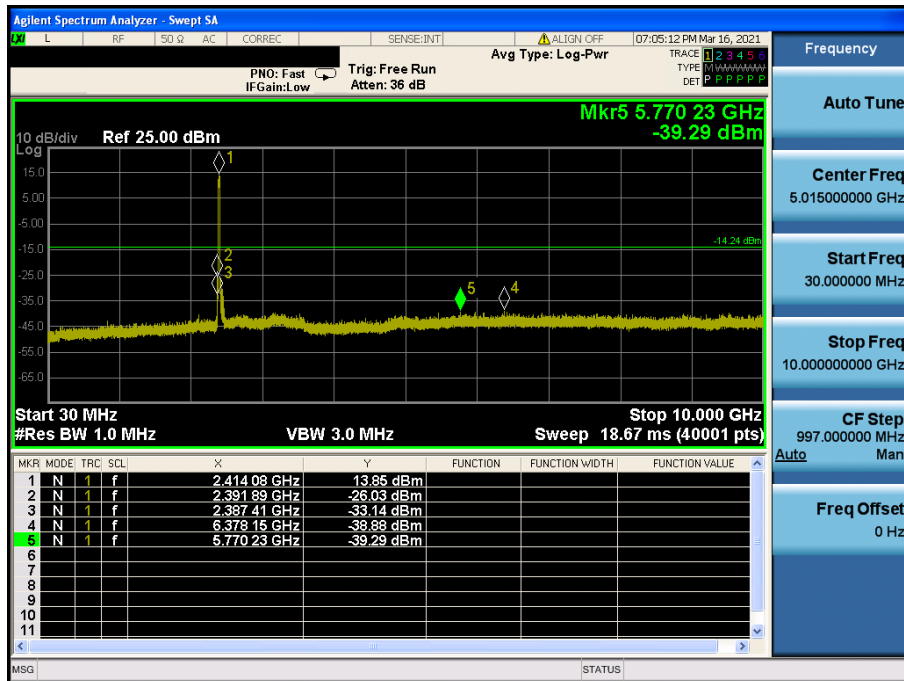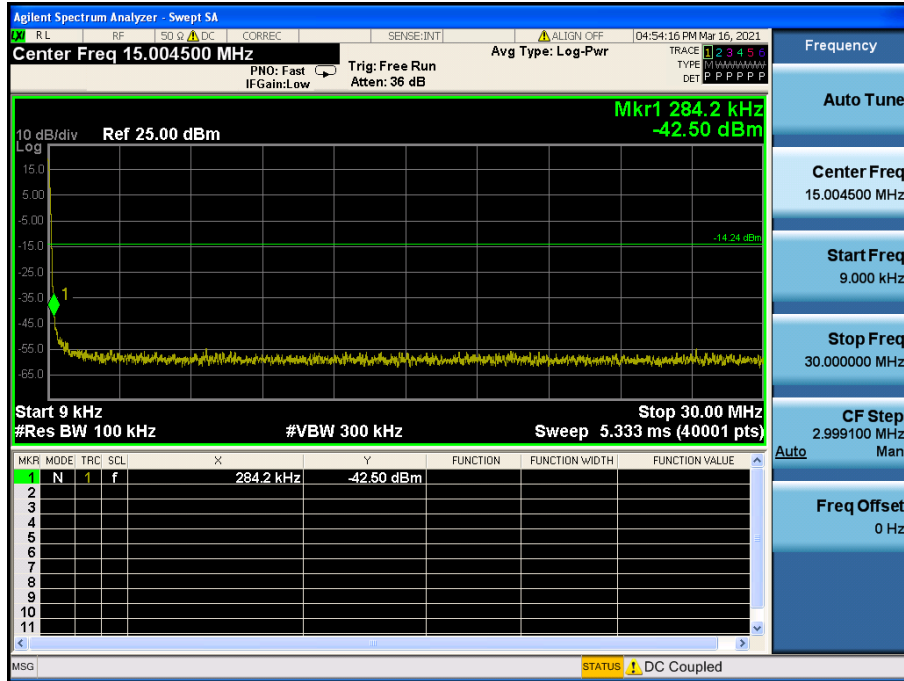


Conducted Spurious Emissions

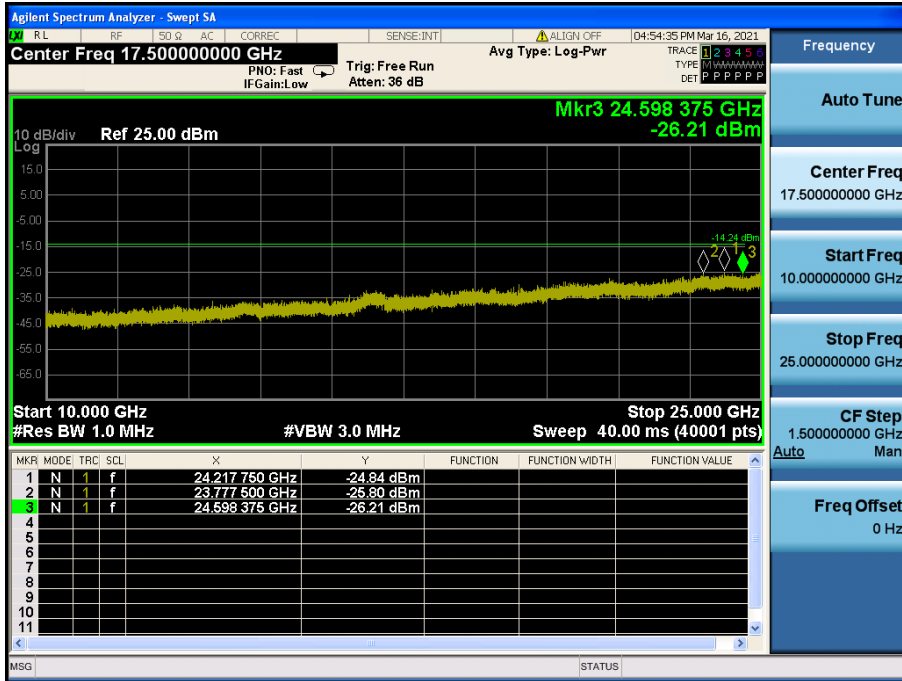


TM 3 & 2 437



Reference

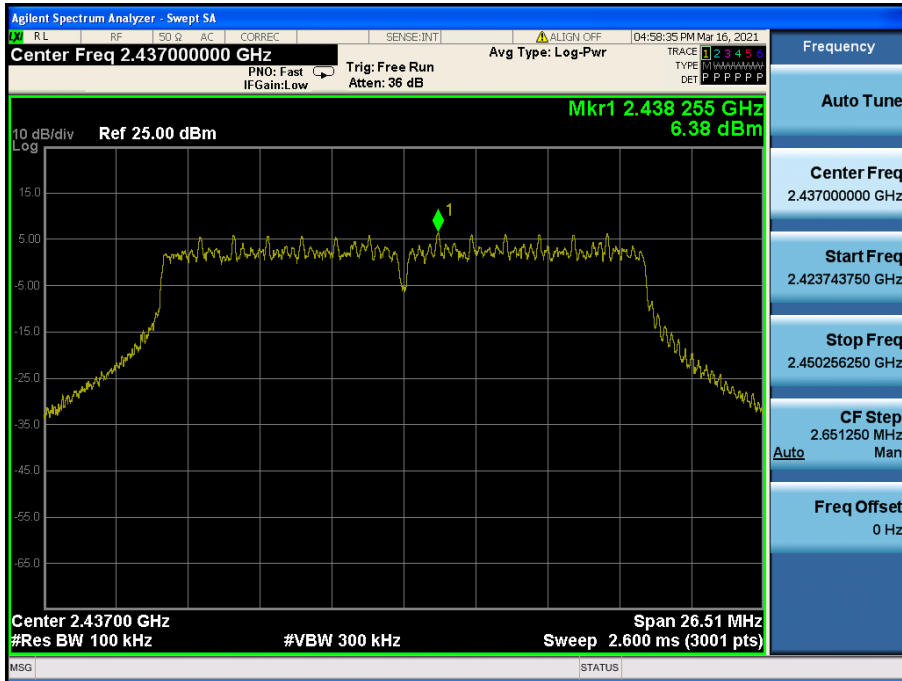

Conducted Spurious Emissions

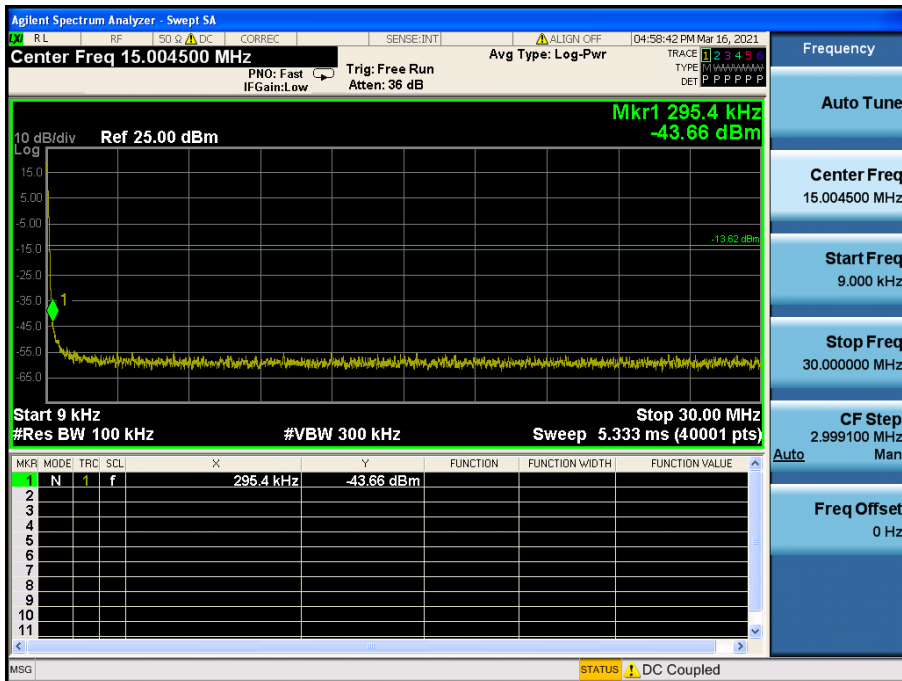


Conducted Spurious Emissions

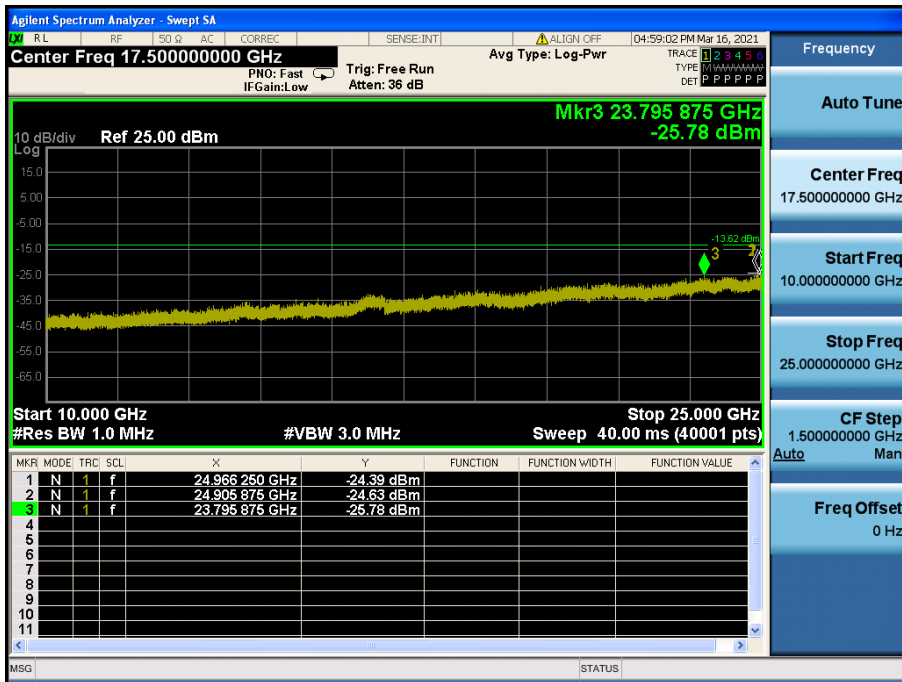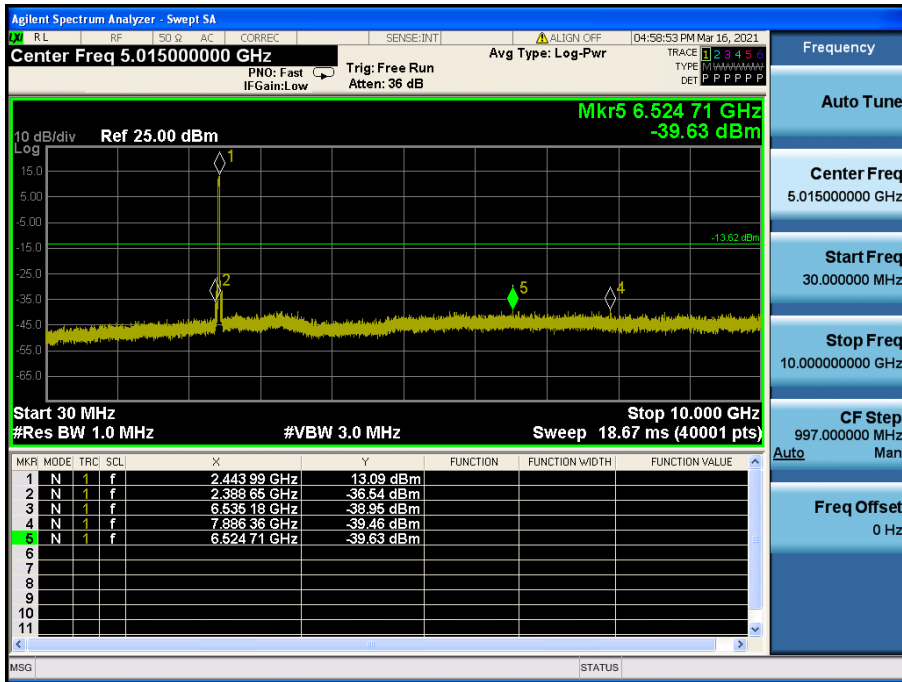


TM 3 & 2 462



Reference

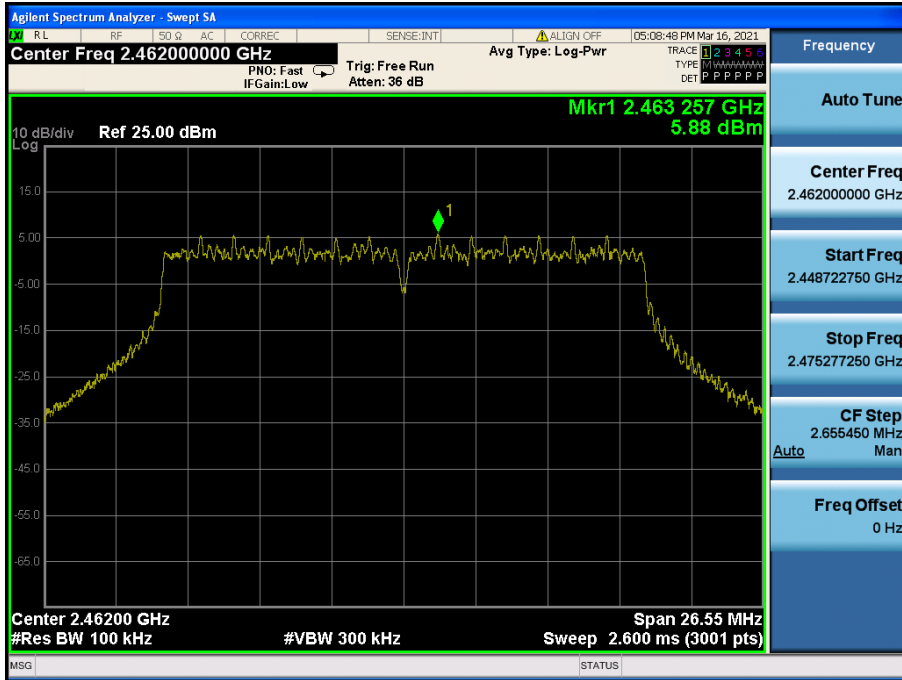


High Band-edge

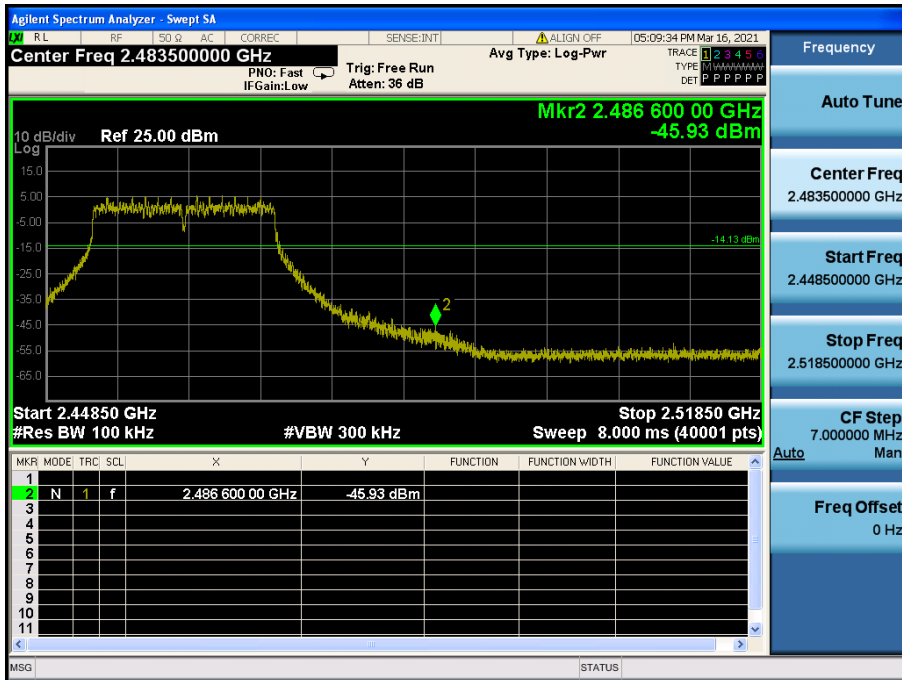

Conducted Spurious Emissions

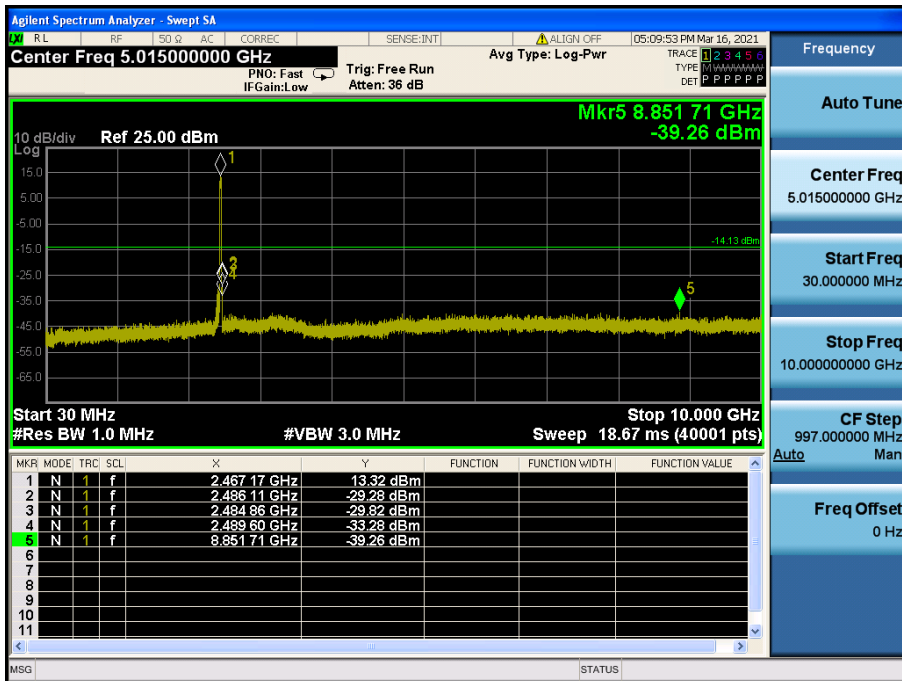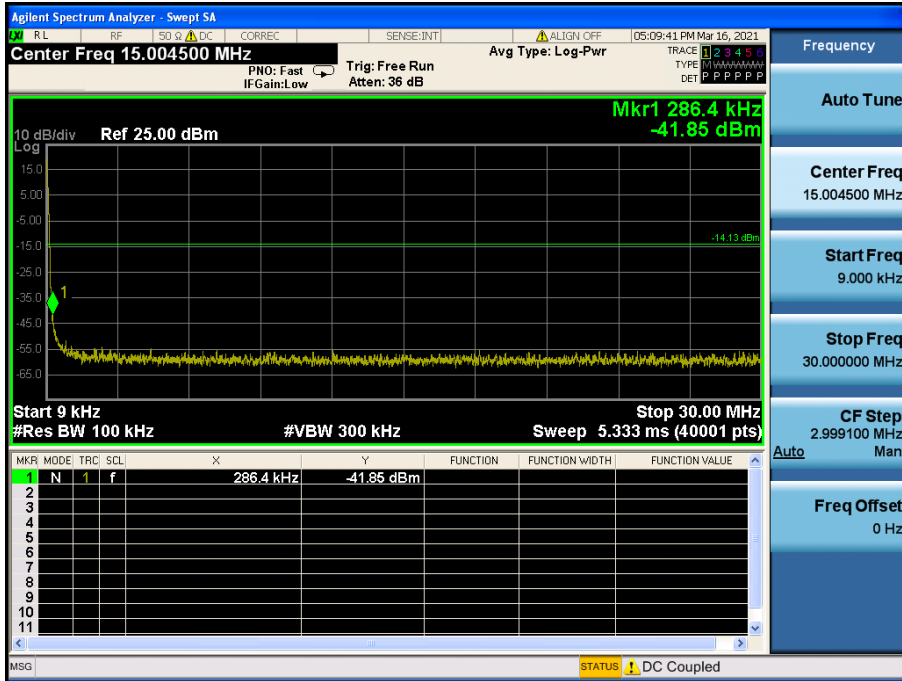


Conducted Spurious Emissions

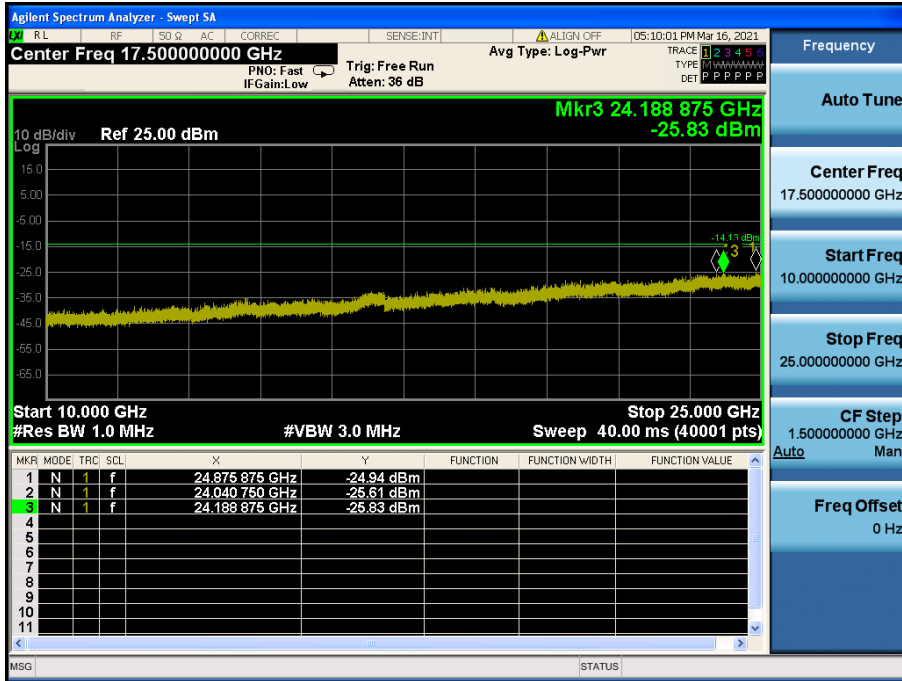


TM 4 & 2 422



Reference

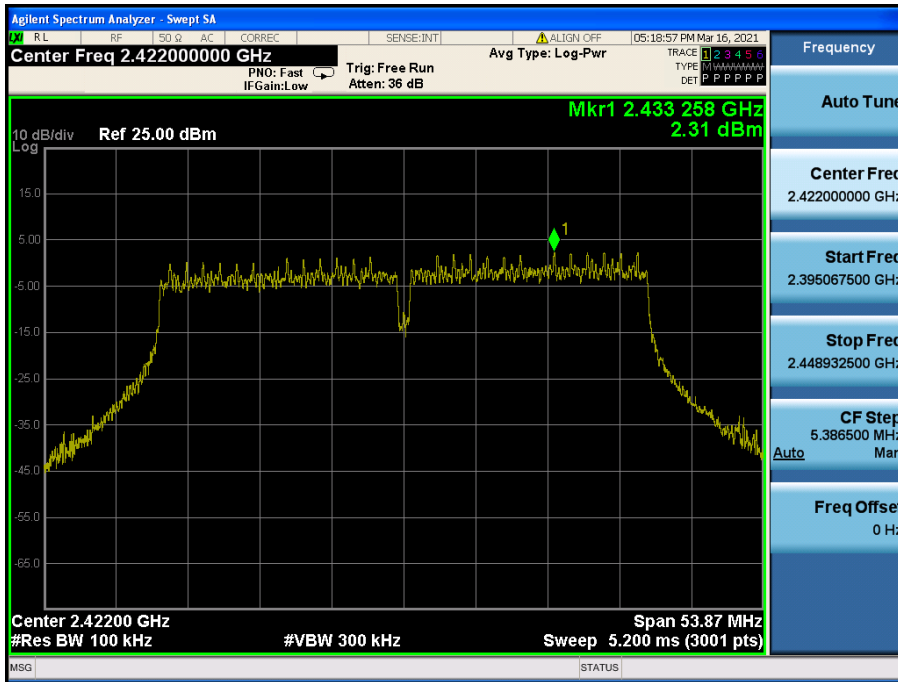


Low Band-edge

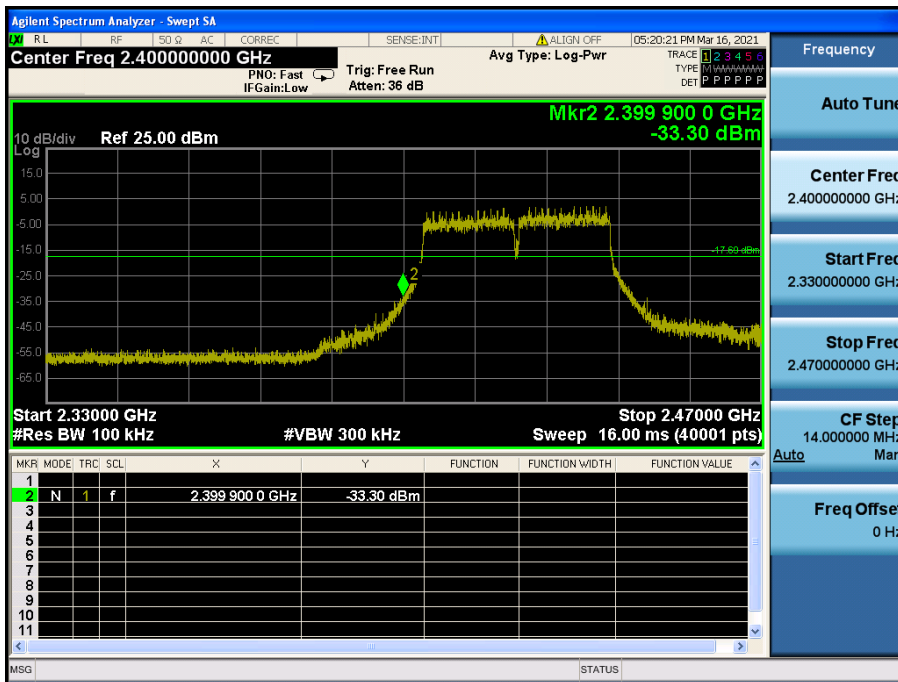

Conducted Spurious Emissions

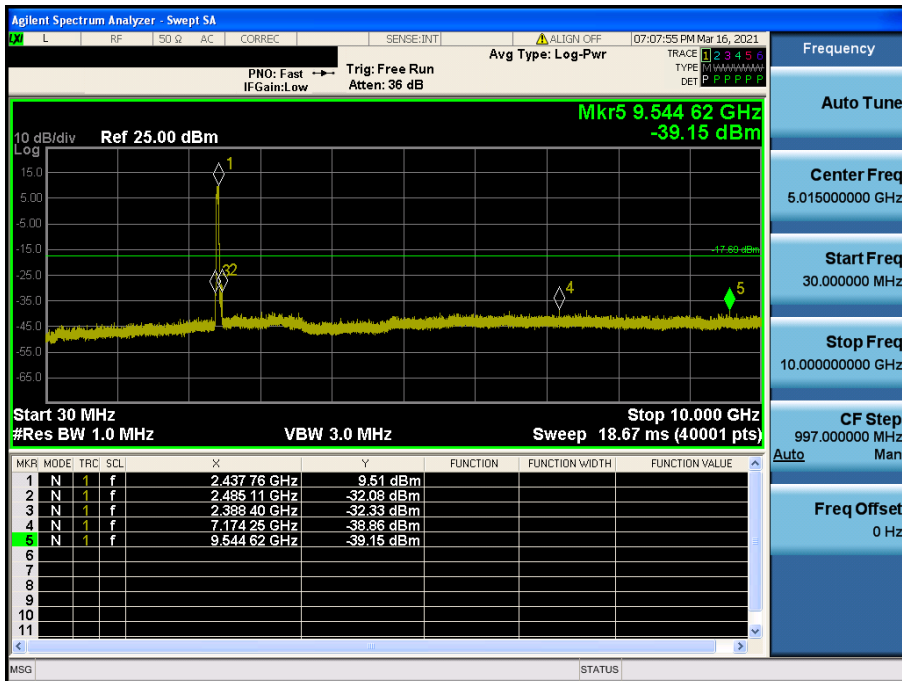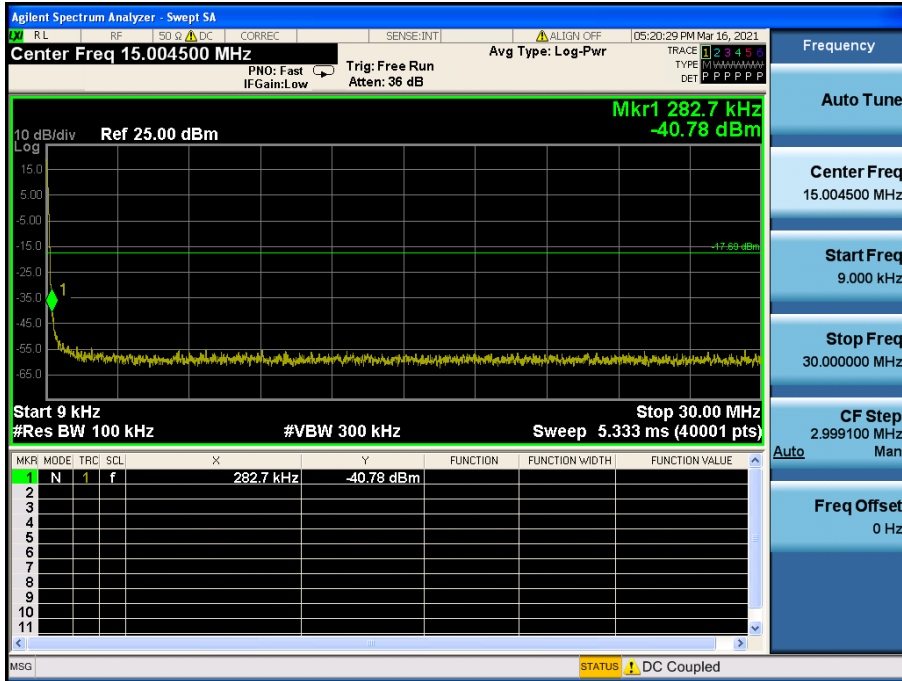


Conducted Spurious Emissions

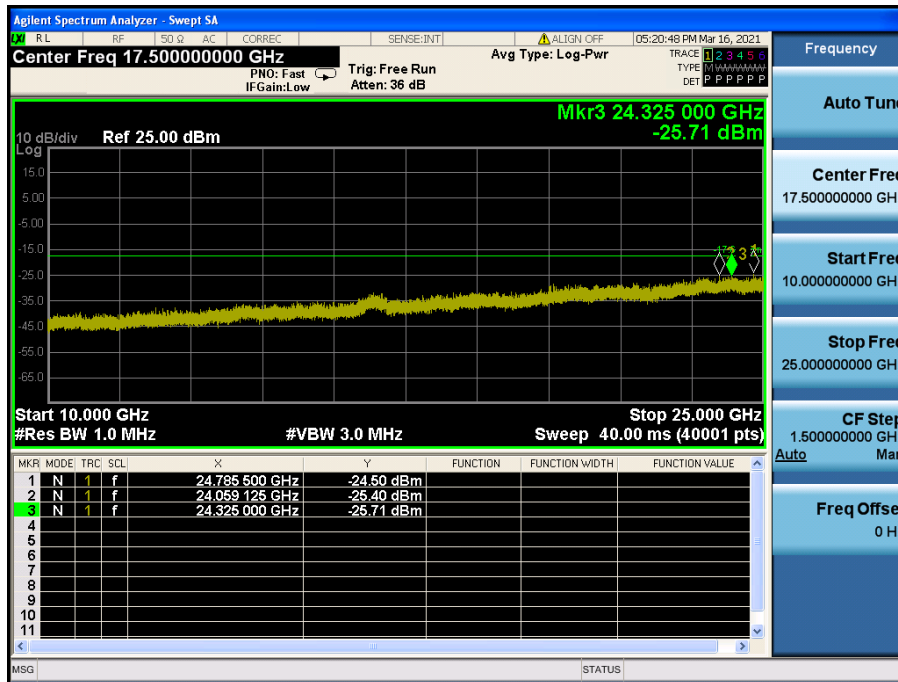


TM 4 & 2 437



Reference

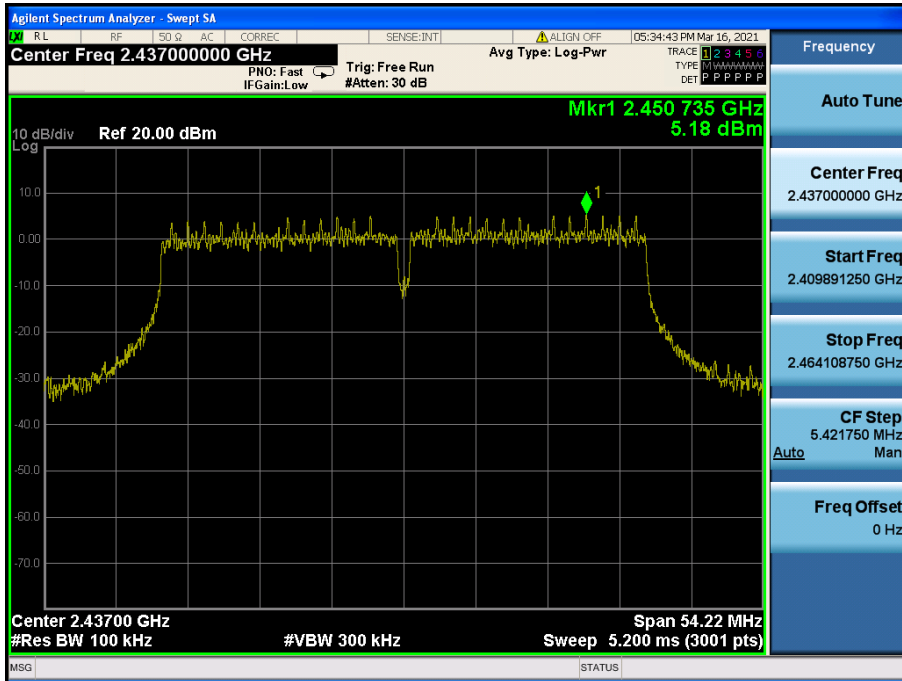

Conducted Spurious Emissions

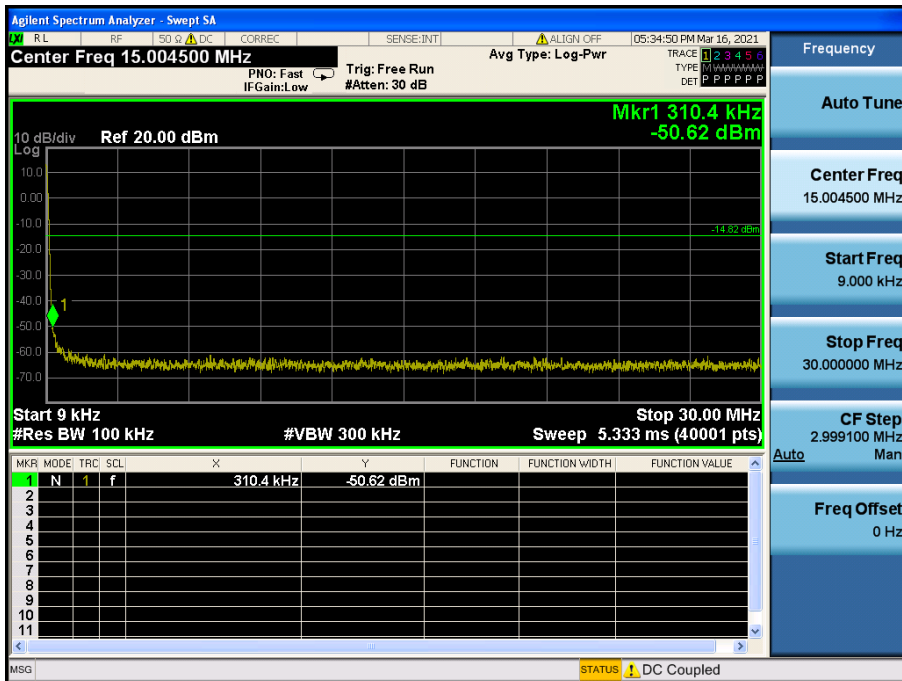


Conducted Spurious Emissions

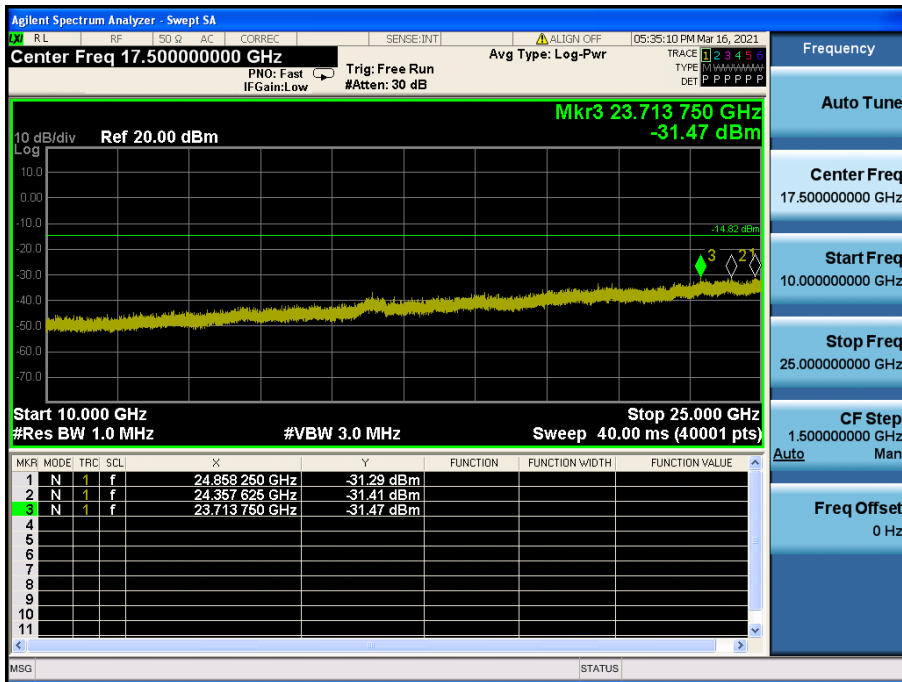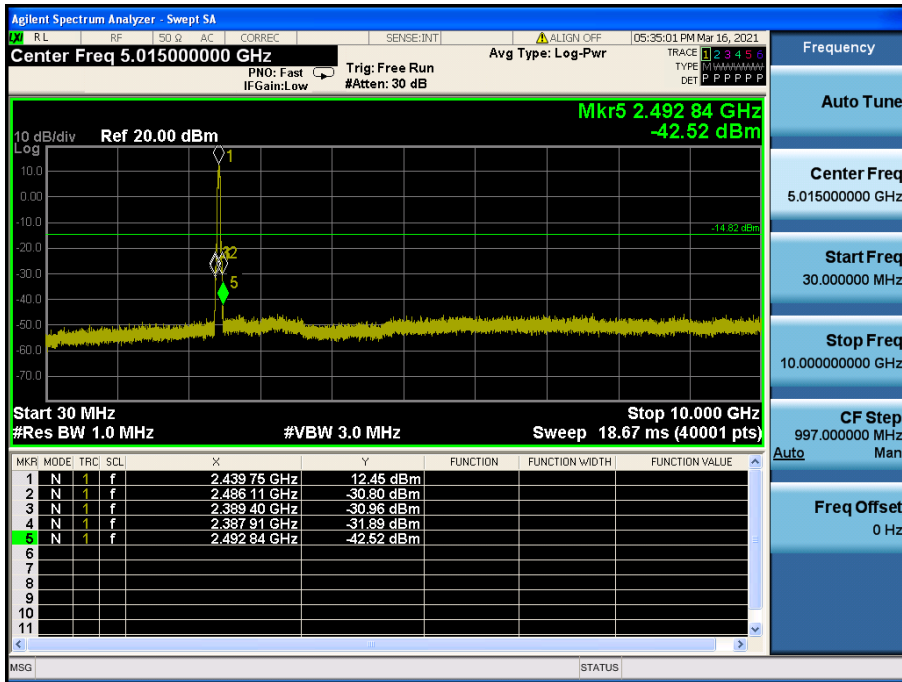


TM 4 & 2 452



Reference

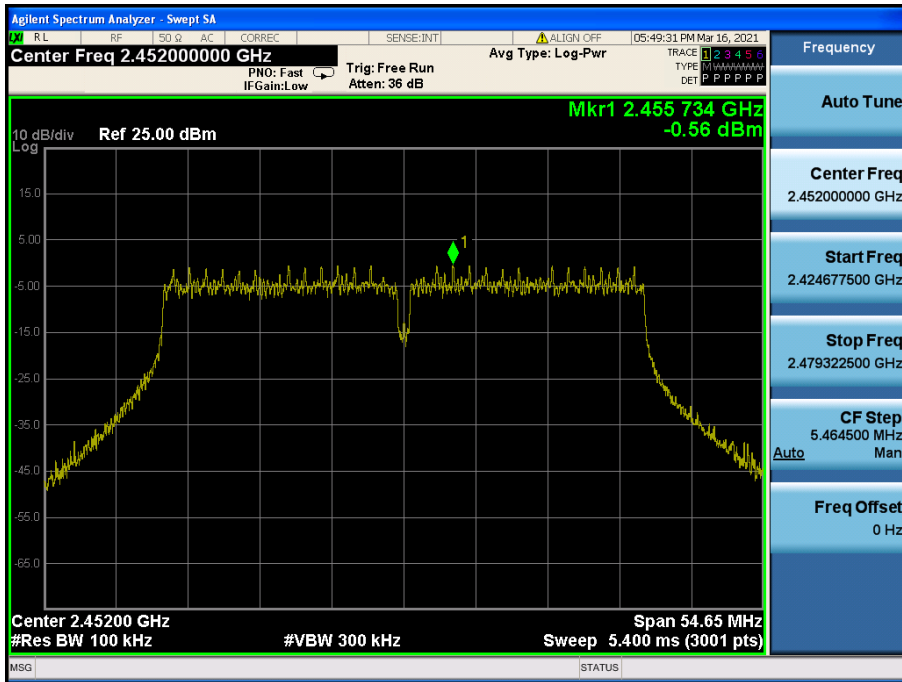

High Band-edge

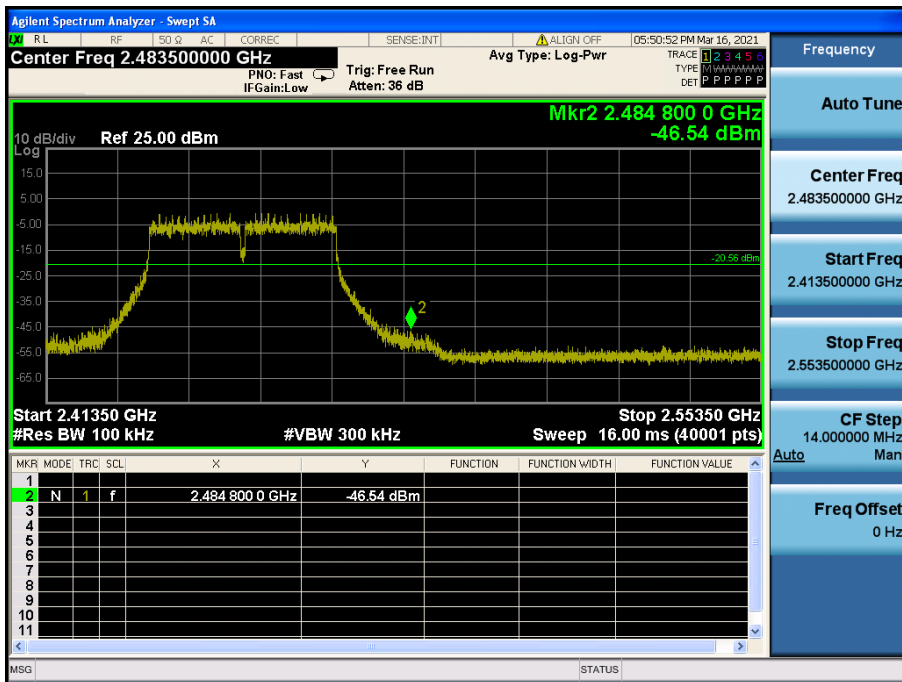

Conducted Spurious Emissions

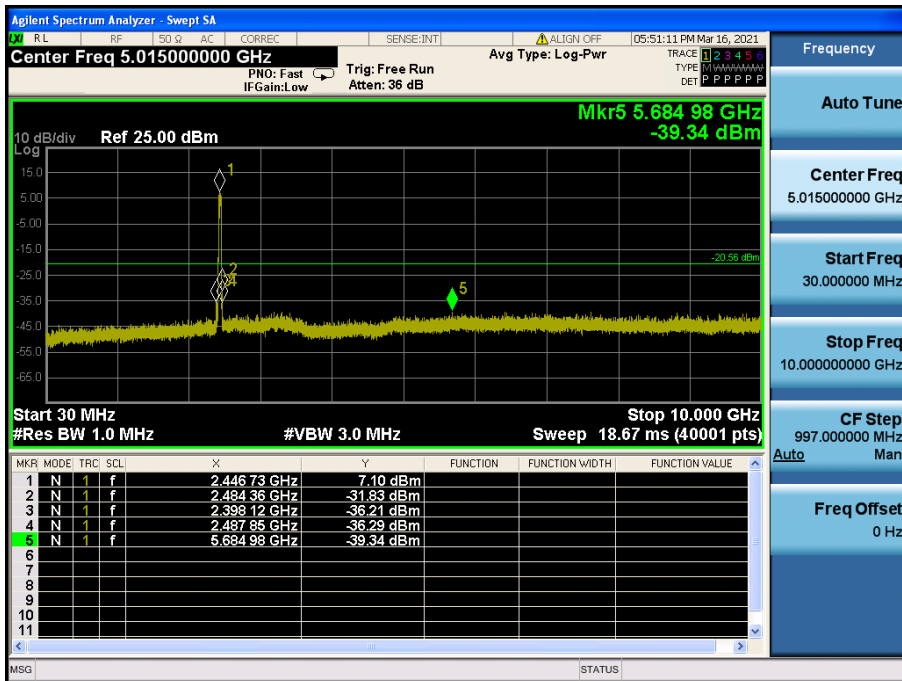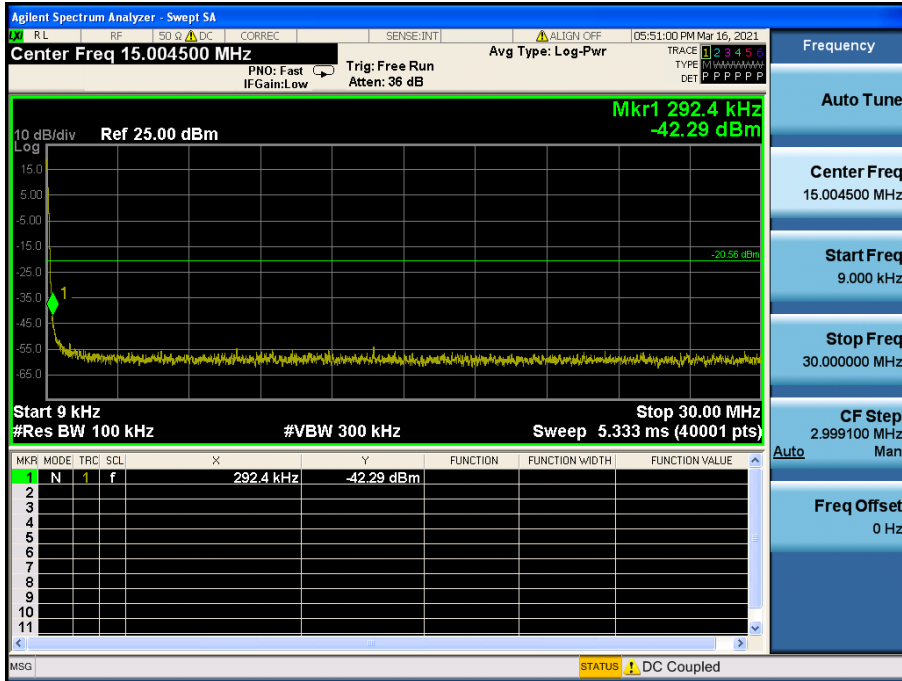

Conducted Spurious Emissions

