



# Test Report

Test Report No.:	KT108EF03003		
Registration No.:	99058		
Applicant:	Digital Signature, Inc.		
Applicant Address:	1221 East Dyer Rd., Suite 290 Santa Ana, Ca, 92705 USA		
Product:	USB Dongle		
FCC ID:	V5G-WU100-K1	Model No.	WU100-K1, WU100-K2
Receipt No.:	08-0220	Date of receipt:	February 20, 2008
Date of Issue:	March 06, 2008		
Testing location	Korea Technology Institute Co., Ltd. 51-19, Sanglim3-Ri, Docheok-Myeun, Gwangju-Shi, Gyeongki-Do, Korea		
Test Standards:	FCC/ANSI. C63.4: 2003		
Rule Parts: FCC	Part 15, Class B		
Equipment Class:	Computing Device Peripheral		
Test Result:	The above-mentioned product has been tested with compliance.		

Tested by: T. W. Lee  
/ Engineer

Approved by: G. C. Min  
/President

Signature

Date

Signature

Date

Other Aspects:

Abbreviations:

\* OK, Pass=passed \* Fail=failed \* N/A=not applicable

- This test report is not permitted to copy partly without our permission.
- This test result is dependent on only equipment to be used.
- This test result is based on a single evaluation of one sample of the above mentioned.
- This test report must not be used by the client to claim product endorsement by NVLAP or any agency of the U.S Government.
- We certify this test report has been based on the measurement standards that is traceable to the national or international standards.



**>>> Contents <<<**

<b>1. General</b>	<b>3</b>
<b>2. Test Site</b>	<b>3</b>
<b>2.1 Location</b>	<b>3</b>
<b>2.2 List of Test and Measurement Instruments</b>	<b>4</b>
<b>2.3 Test Data</b>	<b>4</b>
<b>2.4 Test Environment</b>	<b>4</b>
<b>3. Description of the tested samples</b>	<b>5</b>
<b>3.1 Rating and Physical characteristics</b>	<b>5</b>
<b>3.2 Submitted documents</b>	<b>5</b>
<b>4. Measurement conditions</b>	<b>6</b>
<b>4.1 Modes of operation</b>	<b>6</b>
<b>4.2 List of peripherals</b>	<b>6</b>
<b>4.3 Uncertainty</b>	<b>6</b>
<b>4.4 Test Setup</b>	<b>7</b>
<b>5. Emission Test</b>	<b>8</b>
<b>5.1 Conducted Emissions</b>	<b>8</b>
<b>5.2 Radiated Emissions</b>	<b>12</b>
<b>6. Information about test item</b>	<b>17</b>
<b>7. Test Report</b>	<b>18</b>

**>>> List of Tables <<<**

<b>1. Test Setup Diagram</b>	<b>7</b>
<b>2. Spectral Diagram, Line-PE</b>	<b>9</b>
<b>3. Spectral Diagram, Neutral-PE</b>	<b>10</b>

**>>> List of Figures <<<**

<b>1. List of Test and Measurement Equipment</b>	<b>4</b>
<b>2. Test Data, Conducted Emissions</b>	<b>11</b>
<b>3. Test Data, Radiated Emissions</b>	<b>13</b>



## **1. General**

This equipment has been shown to be capable of compliance with the applicable technical standards and was tested in accordance with the measurement procedures as indicated in this report.

We attest to the accuracy of data. Korea Technology Institute Co., Ltd. performed all measurements reported herein. And were made under Chief Engineer's supervisor.

We assume full responsibility for the completeness of these measurements and vouch for the qualifications of all persons taking them.

## **2. Test Site**

Korea Technology Institute Co., Ltd.

### **2.1 Location**

51-19, Sanglim3-Ri, Docheok-Myeun, Gwangju-Shi, Gyeongki-Do, Korea

The Test Site is in compliance with ANSI C63.4/2001 for measurement of radio Interference.



## 2.2 List of Test and Measurement Instruments

**Table 1: List of Test and Measurement Equipment**

### - Conducted Emissions

Kind of Equipment	Type	S/N	Calibrated until
Spectrum Analyzer	8564E	3745A01024	03.2008
Field Strength Meter	ESIB40	100093	07.2008
LISN	KNW407	8-1157-2	01.2008
LISN	EM-7823	115019	05.2008
Conducted Cable	N/A	N/A	11.2008

### - Radiated Emissions

Kind of Equipment	Type	S/N	Calibrated until
Field Strength Meter	ESIB40	100093	07.2008
Spectrum Analyzer	8564E	3745A01024	03.2008
Loop Antenna	6502	3434	06.2008
Biconic Logarithmic Periodic Antenna	VULB9163	9163-281	09.2008
Horn Antenna	9170	BBH9170268	10.2008
Horn Antenna	3115	6443	08.2008
Open Site Cable	N/A	N/A	11.2008
Antenna Mast	DETT-03	N/A	N/A
Antenna & Turntable controller	DETT-04	91X519	N/A

## 2.3 Test Date

Date of Application: February 20, 2008

Date of Test: February 28, 2008

## 2.4 Test Environment

See each test item's description.



### 3. Description of the tested samples

The EUT is a USB Dongle.

#### 3.1. Rating and Physical Characteristics

Parts	Specifications	Note
USB Controller Part	<ul style="list-style-type: none"> <li>■ Standard 8052 8-bit core</li> <li>■ 4K Bytes of program memory ROM that contains a boot loader program that loads the application firmware from external EEPROM</li> <li>■ 8K Bytes of program memory RAM which is loaded by the boot loader program</li> <li>■ Master only interface</li> <li>■ 3.3-V core and 5-V compatible input/output buffers used for codec port interface</li> </ul>	
Wireless Module Part	<ul style="list-style-type: none"> <li>■ Digital In/Digital Out</li> <li>■ Support I2S digital audio interface input/output</li> <li>■ Duplex utility control channel</li> <li>■ LFH (Long-periodic Frequency Hopping spread spectrum) is added to existing operating modes (FS, AAFS, FHSS)</li> </ul>	

#### 3.2 Submitted Documents

- User's Guide
- Block Diagram



## 4. Measurement Conditions

Testing Input Voltage: AC 220V

### 4.1 Modes of Operation

The EUT was in the following operation mode during all testing;

- 1) File transfer each disk.

### 4.2 Additional Equipment

DEVICE TYPE	Manufacturer	M/N	S/N	FCC ID
PC	JOOYONTECH	JT4334	N / A	DOC
Monitor	HEWLETT PACKARD	Pavilion vf17	CNC5040351	DOC
Keyboard	COMPAQ COMPUTER CORPORATION	SDM4700P	B58A20CLPNL0LZ	DOC
Mouse	logitech	M-S69	3892D101	DOC
Mouse	SEJIN ELECTRON INC.	SMB-400	0CIM004047	GJJS965M3
Printer	HEWLETT PACKARD	C4569A	SG6A7160PJ	DOC

### 4.3 Uncertainty

- 1) Radiated disturbance

$U_c$  (Combined standard Uncertainty) =  $\pm 1.8\text{dB}$

Expanded uncertainty  $U = K U_c$

$K = 2$

$\therefore U = \pm 3.6\text{dB}$

- 2) Conducted disturbance


$U_c = \pm 0.88\text{dB}$

$U = K U_c = 2 \times U_c = \pm 1.8\text{dB}$



### 4.4 Test Setup

Figure 1: Test Setup Diagram

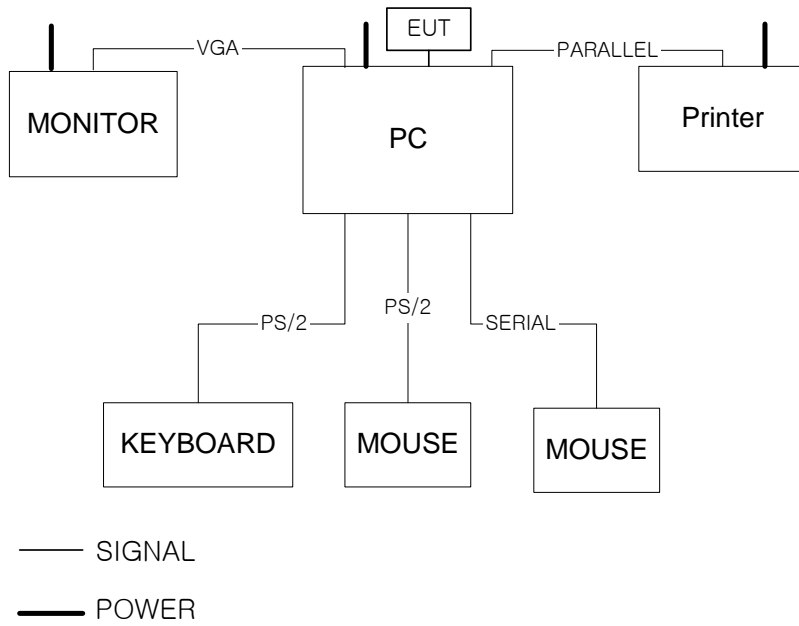



## 5. EMISSION Test

### 5.1. Conducted Emissions

**Result:** **Pass**

The line-conducted facility is located inside a 2.3M x 3.5M x 5.5M shielded closure.

The shielding effectiveness of the shielded room is in accordance with MIL-Std-285 or NSA 605-05. A 1m x 1.5m wooden table 80cm high is placed 80cm away from the conducting ground plane and 40cm away from the sidewall of the shielded room. Electro-Metroics Model EM-7823 (9kHz-30MHz) 50ohm/50 uH Line-Impedance Stabilization Networks (LISN) are bonded to the shielded room.

The EUT is powered from the Electro-Metroics LISN and the support equipment is powered from the Kyoritsu LISN. Power to the LISN are filtered by a high-current high-insertion loss shield enclosures power line filters (100dB 14kHz-1GHz).

The purpose of the filter is to attenuate ambient signal interference and this filter is also bonded to the shielded enclosure.

All electrical cables are shielded by copper pipe with inner diameter of 1".

If the EUT is a DC-Powered device, power will be derived from the source power supply it normally will be powered from and this supply lines will be connected to the Rohde & Schwarz LISN.

All interconnecting cables more than 1 meter were shortened by non-inductive bundling (serpentine fashion) to a 1-meter length.

Sufficient time for the EUT, Support equipment, and test equipment was allowed in order for them to warm up to their normal operating condition. The RF output of the LISN was connected to the spectrum analyzer to determine the frequency producing the maximum EME from the EUT.

The frequency producing the maximum level was reexamined using EMI field Intensity meter (ESPC ). The detector function was set to CISPR quasi-peak mode.

The bandwidth of the receiver was set to 10kHz. The EUT, support equipment, and interconnecting cables were arranged and manipulated to maximize each emission. Each emission was maximized by: switching power lines; varying the mode of operation or resolution; clock or data exchange speed; if applicable; whichever determined the worst-case emission.

Photographs of the worst-case emission can be seen in photograph of conducted test.

Each EME reported was calibrated using self-calibrating mode.





Figure 2: Spectral Diagram, LINE-PE

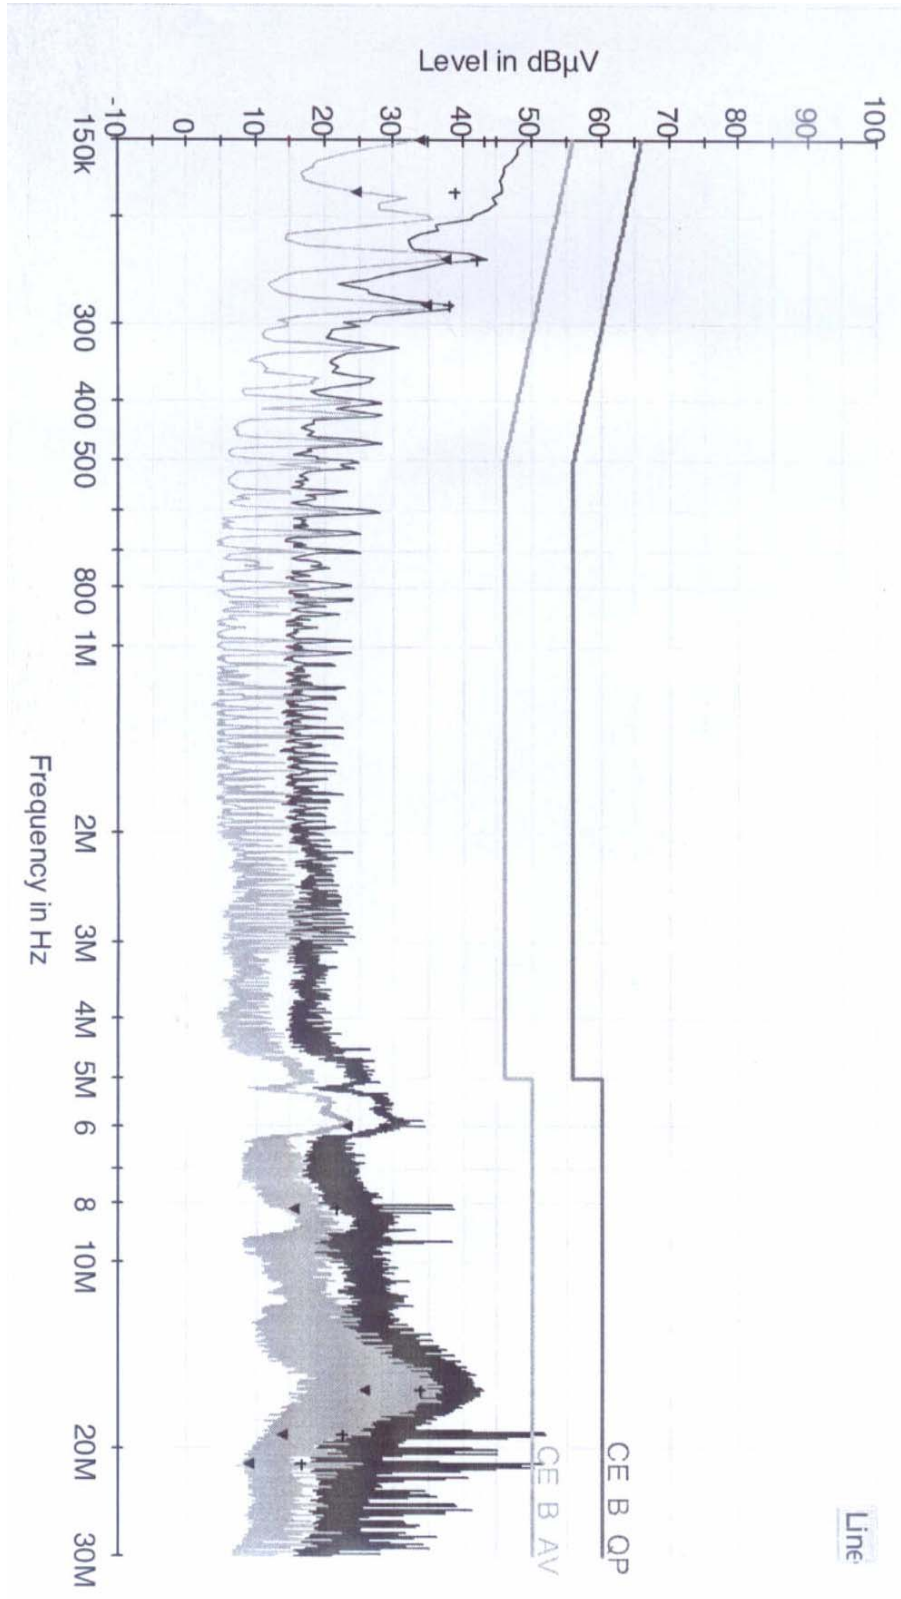




Figure 3: Spectral Diagram, NEUTRAL-PE

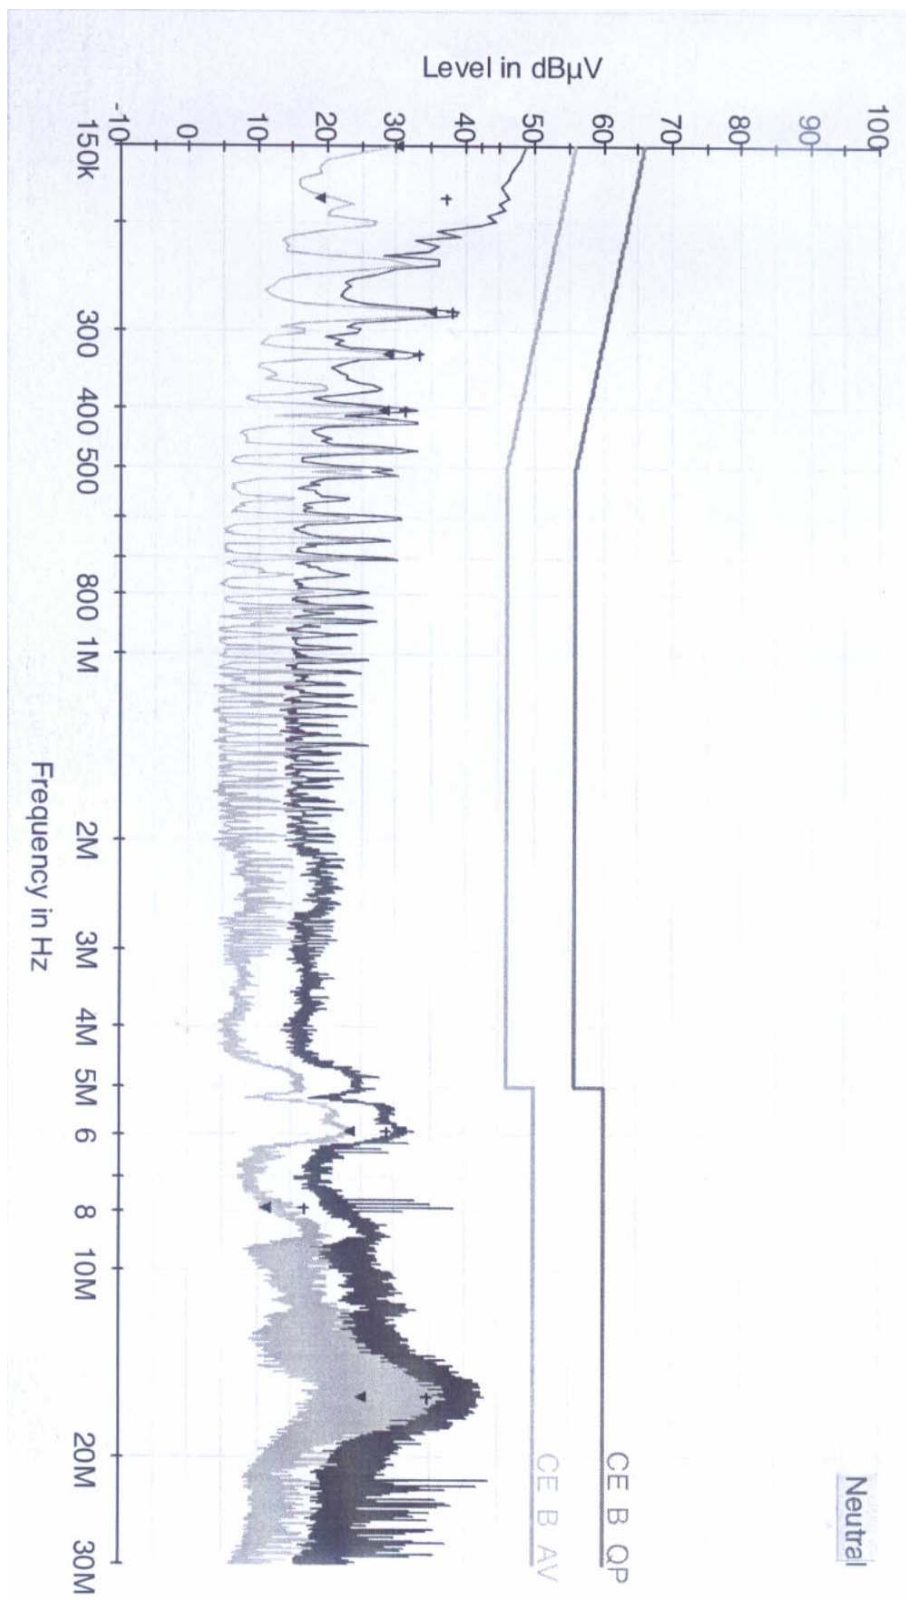




Table 2: Test Data, Conducted Emissions

Frequency (MHz)	(1) Reading (dB $\mu$ V)	Line	(2)C/F (dB)	(3)Actual (dB $\mu$ V)	(4) Limit (dB $\mu$ V)	(5) Margin (dB)
0.15	43.10	L1	0.12	43.22	66.00	22.78
0.18	39.00	L1	0.12	39.12	64.49	25.37
0.23	42.00	L1	0.12	42.12	62.45	20.33
0.28	38.10	L2	0.12	38.22	60.82	20.60
0.33	33.30	L2	0.08	33.38	59.45	26.07
16.07	34.80	L2	0.34	35.14	60.00	24.86

## NOTES:

1. All modes of operation were investigated  
And the worst-case emissions are reported.
2. All other emissions are non-significant.
3. All readings are calibrated by self-mode in receiver.
4. Measurements using CISPR Quasi-peak mode.
5. L1 = LINE-PE, L2 = NEUTRAL-PE
6. C/F = Correction Factor(LISN factor + Cable loss)
7. The limit for Class B digital device is 66dBuV to 56dBuV from 150KHz to 500KHz, 56dBuV from 500KHz to 5MHz, 60dBuV Above 5MHz.

## ♣ Margin Calculation

$$(5) \text{ Margin} = (4) \text{ Limit} - (3) \text{ Actual}$$

$$[(3) \text{ Actual} = (1) \text{ Reading} + (2) \text{ C/F}]$$



## 5.2 Radiated Emissions

### Result:

**Pass**

Preliminary measurements were made indoors at 1 meter using broadband antennas, broadband Amplifier, and spectrum analyzer to determine the frequency producing the maximum EME. Appropriate precaution was taken to ensure that all EME from the EUT were maximized and investigated. The system configurations, clock speed, mode of operation or video resolution, turntable azimuth with respect to the antenna were noted for each frequency found. The spectrum was scanned from 30MHz to 1GHz using Biconical Antenna and LogPeriodic Antenna. Above 1GHz, Double ridged horn Antenna was used.

Final measurements were made outdoors at 3-meter test range using Schwarzbeck antennas. The test equipment was placed on a wooden table situated on a 4x4 meter area adjacent to the measurement area. Turntable was to protect from weather in the dome that made with Polyethylene film. Sufficient time for the EUT, support equipment, and test equipment was allowed in order for them to warm up to their normal operating condition. Each frequency found during pre-scan measurements was re-examined and investigated using EMI/Field Intensity Meter (ESIB40). The detector function was set to CISPR quasi-peak or peak mode as appropriate and the bandwidth of the receiver was set to 120kHz or 1 MHz depending on the frequency or type or signal.

The EUT, support equipment and interconnecting cables were re-configured to the set-up producing the maximum emission for the frequency and were placed on top of a 0.8meter high non-metallic 1 x 1.5 meter table.

The EUT, support equipment, and interconnecting cables were re-arranged and manipulated to maximize each EME emission. The turntable containing the system was rotated; the antenna height was varied 1 to 4 meters and stopped at the azimuth or height producing the maximum emission. Each emission was maximized by: varying the mode of operation or resolution; clock or data exchange speed, and/or support equipment, if applicable; and changing the polarity of the antenna and rotating the EUT in turns with three orthogonal axes for portable devices, whichever determined the worst-case emission.

Photographs of the worst-case emission can be seen in photograph of radiated emission test. Each EME reported was calibrated using self-calibrating mode.



**Table 3: Test Data, Radiated Emissions**

Frequency (MHz)	(1) Reading (dB $\mu$ V)	Pol	Hei(m)	(2) AFCL (dB/m)	(3) Total (dB $\mu$ V/m)	(4) Limit (dB $\mu$ V/m)	(5) Margin (dB)
47.56	9.40	V	1.05	13.40	22.80	40.00	17.20
123.80	12.80	V	1.09	11.53	24.33	43.50	19.17
143.96	10.90	V	1.16	9.78	20.68	43.50	22.82
269.92	12.50	H	1.73	15.97	28.47	46.00	17.53
336.04	5.80	V	1.18	18.84	24.64	46.00	21.36
733.84	7.50	H	1.22	26.36	33.86	46.00	12.14

\* Radiated Measurements at 3-meters

**Notes:**

- 1.All modes of operation were investigated.  
And the worst-case emission are reported.
- 2.All other emission is non-significant.
- 3.All readings are calibrated by self-mode in receiver.
- 4.Measurements using CISPR quasi-peak mode.
- 5.AFCL = Antenna factor and cable loss
- 6.H = Horizontal, V = Vertical Polarization
7. The limit for Class B digital device is 100uV(40dBuV) from 30MHz to 88MHz, 150 uV (43.5dBuV) from 88MHz to 216MHz, 200uV(46dBuV) from 216MHz to 960MHz and 500 uV (54dBuV) from above 960MHz.

♣ **Margin Calculation**

(5) Margin = (4) Limit – (3) Actual

[(3) Actual = (1) Reading + (2) AFCL]



**6. Information about test item**

**WU100-K1**

**6.1 Equipment information**

Equipment model name	WU100-K1
Type of equipment	Bluetooth Dongle
Frequency band	2402 ~ 2480 MHz
Type of Modulation	GFSK
Channel Spacing	1.0 MHz
Type of antenna	Chip Antenna
Power	1. USB mode : DC 5.0 V (By USB port of PC)

**6.2 Tested frequency**

Frequency	TX	RX
Low frequency	2402MHz	2402MHz
Middle frequency	2441MHz	2441MHz
High frequency	2480MHz	2480MHz

**6.3 Tested environment**

Temperature	: 5 ~ 10 (°C)
Relative humidity content	: 20 ~75 %
Air pressure	: 1005 ~ 1009 mbar
Details of power supply:	N/A

**6.4 Ancillary Equipment**

Equipment	Model No.	Serial No.	Manufacturer
Notebook : COMPAQ type EvoD5M	SV20	-	SAMSUNG

**6.5 EMI Suppression Device(s)/Modifications**

EMI suppression device(s) added and/or modifications made during resting

- ➔ 1. USB Cable : added the Core



## 7. Test Report

### 7.1 Summary of tests

FCC Part Section(s)	Parameter	Limit	Test Condition	Status (note 1)
<b>I. Transmit mode(Tx)</b>				
15.247(a)	Carrier Frequency Separation	>25 kHz	Conducted	C
	Number of Hopping Frequencies	>75 hops		C
	20 dB Bandwidth	< 1MHz		C
	Dwell Time	0.4 seconds within a 30 second period per any frequency		C
15.247(b)	Transmitter Output Power	< 1Watt		C
15.247(c)	Band-edge (or Occupied BW for IC)	2400 < f < 2483.5 MHz		C
	Out of Band Emissions (Bandwidth at 20 dB below)	The radiated emission to any 100kHz of outband shall be at least 20dB below the highest inband spectral density.		C
15.247(e)	Power Spectral Density	< 8 dBm	C	
15.205 15.209	General Field Strength Limits (Restricted Band and Radiated)	< FCC 15.209 limits	Radiated	C
15.207	AC Conducted Emissions	EN 55022	Line Conducted	C
<b>II. Receive mode(Rx)</b>				
15.107/ 15.207	AC Conducted Emissions	EN 55022	Line Conducted	C
15.109/ 15.209	Radiated Emission Out-of-Band Emissions (Band Width at 20dB below)	< FCC 15.209 limits	Radiated	C
Note 1: C=Complies NC=Not Complies NT=Not Tested NA=Not Applicable				

The sample was tested according to the following specification:

FCC Parts 15.247; ANSI C-63.4-2001



## 7.2 Transmitter requirements

### 7.2.1 Carrier Frequency Separation

**Procedure:**

The carrier frequency separation was measured with a spectrum analyzer connected to the antenna terminal, while EUT had its hopping function enabled.

After the trace being stable, the reading value between the peaks of the adjacent channels using the marker-delta function was recorded as the measurement results.

The spectrum analyzer is set to:

Span = 3 MHz (wide enough to capture the peaks of two adjacent channels)

RBW = 30 kHz (1% of the span or more)      Sweep = auto

VBW = 30 kHz      Detector function = peak

Trace = max hold

**Measurement Data:**

Frequency of marker #1 (MHz)	Frequency of marker #2 (MHz)	Test Results	
		Carrier Frequency Separation (MHz)	Results
2440.035	2441.055	1.02	Complies

- See next pages for actual measured spectrum plots.

**Minimum Standard:**

The EUT shall have hopping channel carrier frequencies separated by a minimum of 25kHz or the 20dB bandwidth of the hopping channel, whichever is greater.

**Measurement Setup**

Same as the Chapter 4.4 (Figure 1)







**7.2.2 Number of Hopping Frequencies**

**Procedure:**

The number of hopping frequencies was measured with a spectrum analyzer connected to the antenna terminal, while EUT had its hopping function enabled.

To get higher resolution, four frequency ranges within the 2400 ~ 2484 MHz FH band were examined.

The spectrum analyzer is set to:

Frequency range 1: Start = 2400MHz, Stop = 2460MHz  
 2: Start = 2460MHz, Stop = 2484MHz

RBW = 100 kHz (1% of the span or more)      Sweep = auto  
 VBW = 100 kHz (VBW ≥ RBW)                      Detector function = peak  
 Trace = max hold                                      Span = 60MHz, 24MHz

**Measurement Data: Complies**

<b>Total number of Hopping Channels</b>	79
---	----


-See next pages of actual measured spectrum plots.

**Minimum Standard:**


At least 75 hops
------------------

**Measurement Setup**

Same as the Chapter 4.4 (Figure 1)

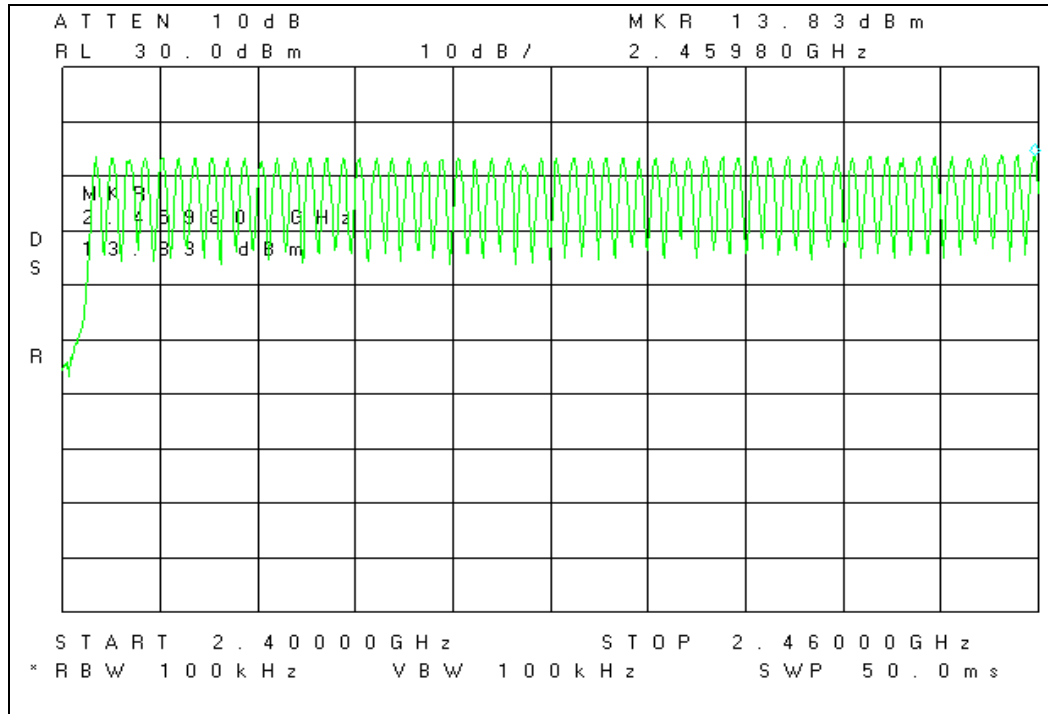

[ 2400- 2460 MHz Hopping Channels ]

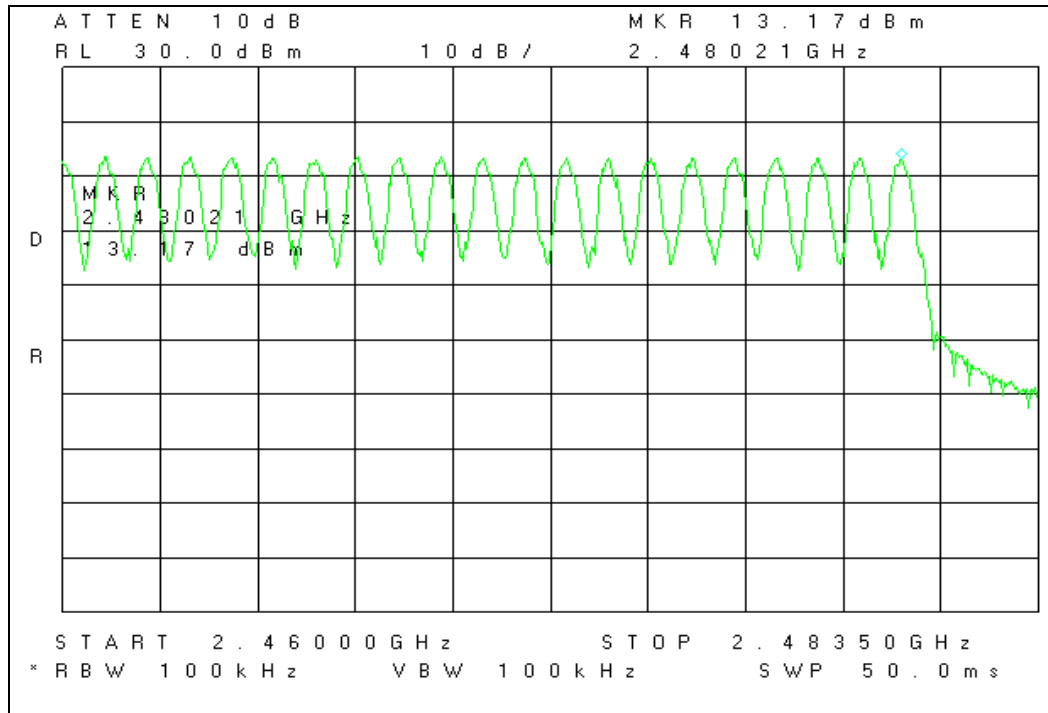

[ 2460- 2483.5 MHz Hopping Channels ]



**7.2.3. 20 dB Bandwidth**

**Procedure:**

The bandwidth at 20 dB below the highest inband spectral density was measured with a spectrum analyzer connected to the antenna terminal, while EUT had its hopping function disabled at the highest, middle and the lowest available channels.

After the trace being stable, Use the marker-to-peak function to set the marker to the peak of the emission. Use the marker-delta function to measure 20dB down one side of the emission. Reset the marker-delta function, and move the marker to the other side of the emission, until it is ) as close as possible to ) even with the reference marker level. The marker-delta reading at this is the 20 dB bandwidth of the emission.

The spectrum analyzer is set to:

Center frequency = the highest, middle and the lowest channels

Span = 2 MHz (approximately 2 or 3 times of the 20 dB bandwidth)

RBW = 10 kHz (1% of the 20dB bandwidth or more)      Sweep = auto

VBW = 30 kHz (VBW ≥ RBW)      Detector function = peak

Trace = max hold

**Measurement Data:**

Frequency (MHz)	Channel No.	Test Results	
		Measured Bandwidth (MHz)	Result
2402	1	0.82	Complies
2441	40	0.78	Complies
2480	79	0.77	Complies

- See next pages for actual measured spectrum plots.

**Minimum Standard:**

The transmitter shall have a maximum 20dB bandwidth of 1 MHz.

**Measurement Setup**

Same as the Chapter 4.4 (Figure 1)







**7.2.4 Time of Occupancy (Dwell Time)**

**Procedure:**

The dwell time was measured with a spectrum analyzer connected to the terminal, while EUT had its hopping function enabled.

The spectrum analyzer is set to:

Center frequency = 2441 MHz      Span = zero

RBW = 1 MHz                              VBW = 1 MHz (VBW ≥ RBW)

Trace = max hold                              Detector function = peak

**Measurement Data:**

Packet Type	Burst duration in one hop (us)	Test Results	
		Dwell Time (ms)	Result
DH1	222	17.54	Complies

- See next pages of actual measured spectrum plots.

**Minimum Standard:**


0.4 seconds within a 30 second period per any frequency
---

**Measurement Setup**

Same as the Chapter 4.4 (Figure 1)



RBW 3 MHz    Marker 1 [T1 ]  
\*VBW 3 MHz    5.70 dBm  
SWT 3 ms    978.000000  $\mu$ s

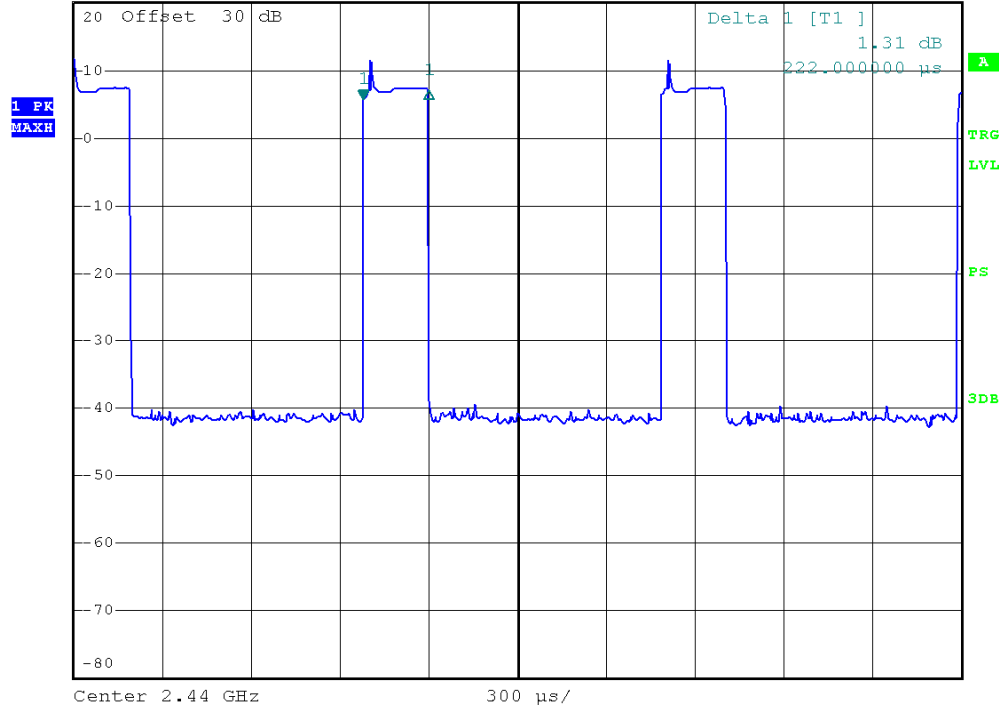

[ Burst duration in one hop = 222 us ]





**7.2.5 Peak Output Power**

**Procedure:**

The peak output power was measured with a spectrum analyzer connected to the terminal, while EUT had its hopping function disable at the highest, middle and the lowest available channels.

After the trace being stable, Use the marker-to-peak function to set the marker to the peak of the emission. The indicated level is the peak output power.

The spectrum analyzer is set to:

Center frequency = the highest, middle and the lowest channels

Span = 5 MHz (approximately 5 times of the 20 dB bandwidth)

RBW = 1 MHz (greater than the 20dB bandwidth of the emission being measured)

VBW = 1 MHz (VBW ≥ RBW)                      Detector function = peak

Trace = max hold                                      Sweep = auto

**Measurement Data:**


Frequency (MHz)	Ch.	Test Results		
		dBm	W	Result
2402	1	<b>12.83</b>	<b>0.192</b>	Complies
2441	40	<b>12.67</b>	<b>0.185</b>	Complies
2480	79	<b>12.50</b>	<b>0.192</b>	Complies

- See next pages of actual measured spectrum plots.


<b>Minimum Standard:</b>	< 1W
--------------------------	------

**Measurement Setup**


Same as the Chapter 4.4 (Figure 1)

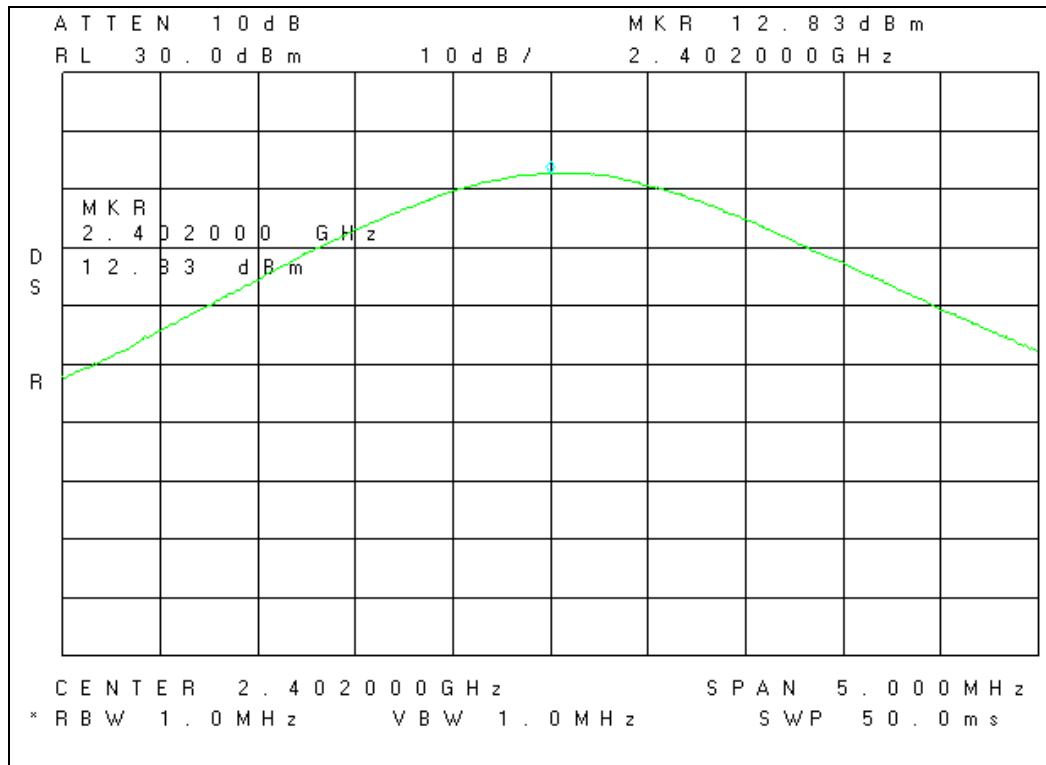

[ 2402 MHz Peak Output Power ]

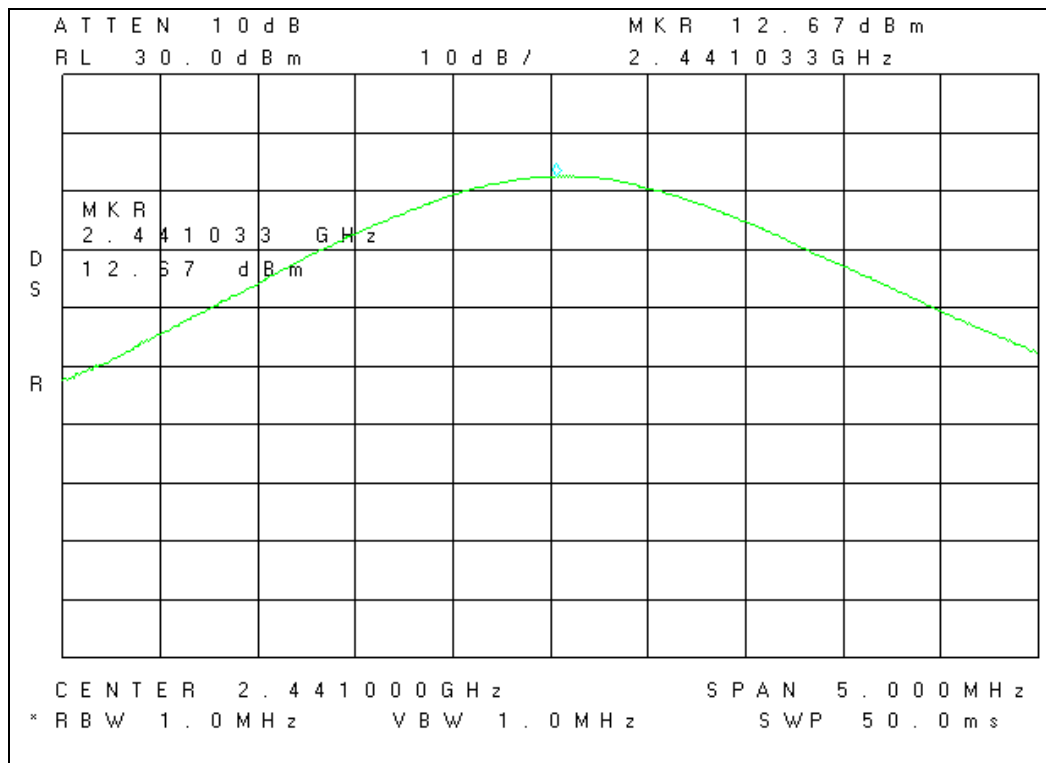

[ 2441 MHz Peak Output Power ]

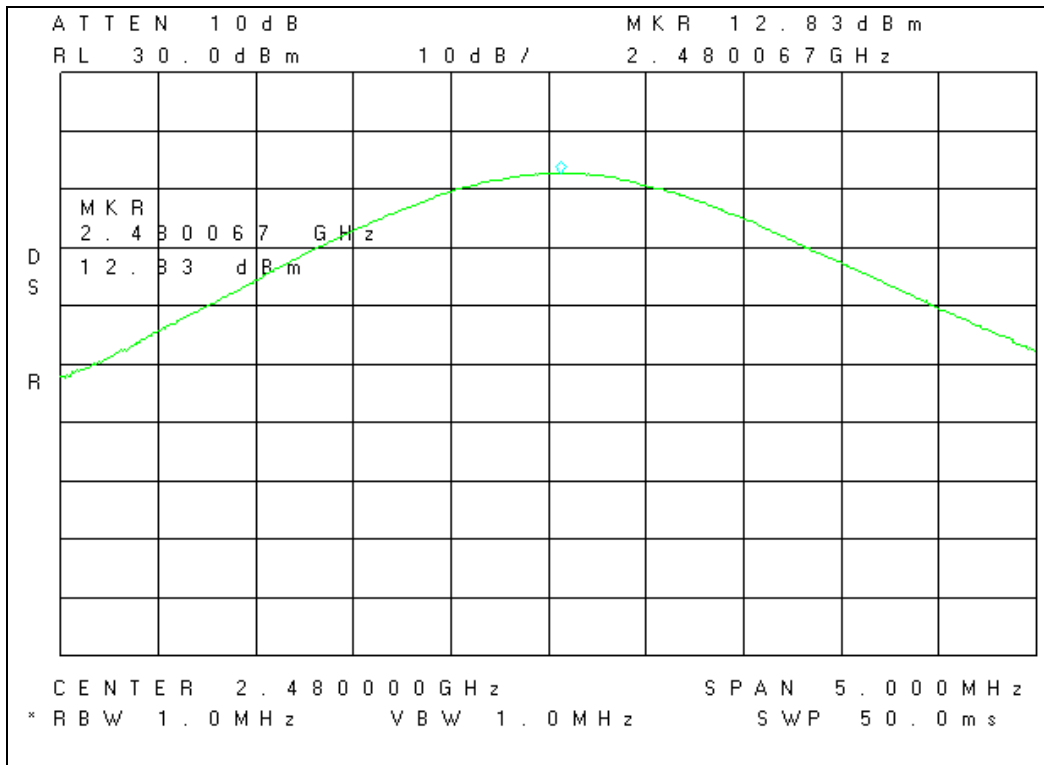

[ 2480 MHz Peak Output Power ]



**7.2.6 Band – edge (at 20 dB blow)**

**Procedure:**

The bandwidth at 20 dB down from the highest inband spectral density is measured with a spectrum analyzer connected to the antenna terminal,, while EUT had its hopping function disabled at the highest, middle and the lowest available channels.

After the trace being stable, Use the marker-to-peak function to measure 20 dB down both sides of the intentional emission.

The spectrum analyzer is set to:

Center frequency = the highest, middle and the lowest channels

RBW = 100 kHz

VBW = 1 kHz

Span = 100 MHz

Detector function = peak

Trace = max hold

Sweep = auto

**Measurement Data: Complies**


- All conducted emission in any 100kHz bandwidth outside of the spread spectrum band was at least 20dB lower than the highest inband spectral density. Therefore the applying equipment meets the requirement.
- See next pages of actual measured spectrum plots.

<b>Minimum Standard:</b>	> 20 dBc
--------------------------	----------


**Measurement Setup**

Same as the Chapter 3.2.1 (Figure 1)

TEST EQUIPMENT USED: 01, 02, 19, 50

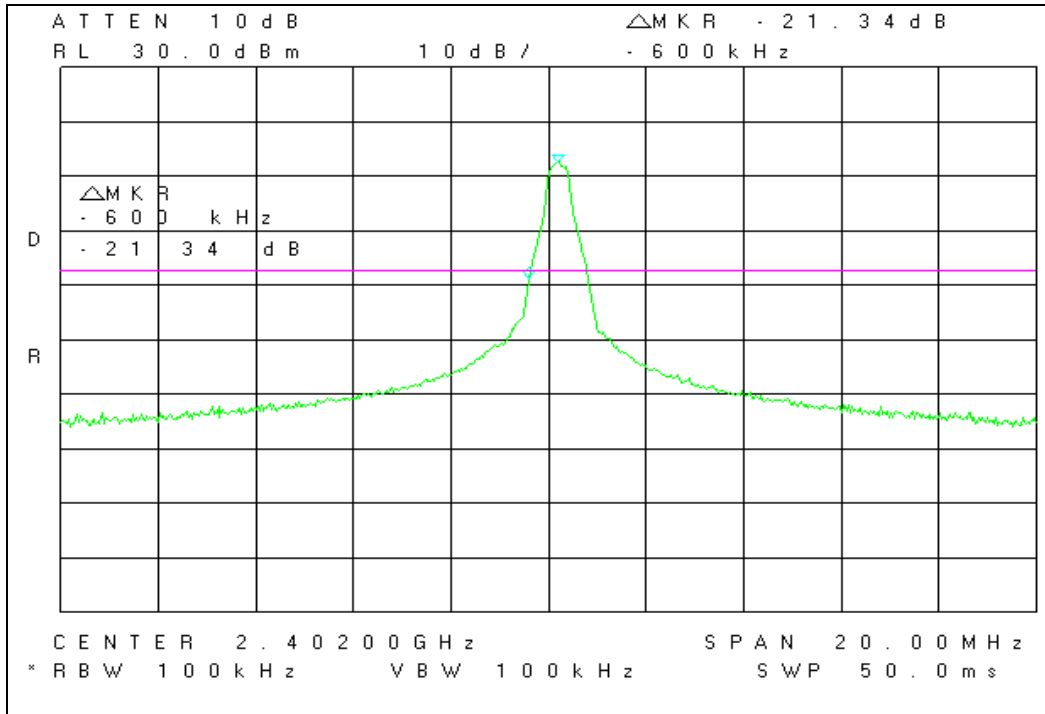

[ 2402 MHz Band-edge ]

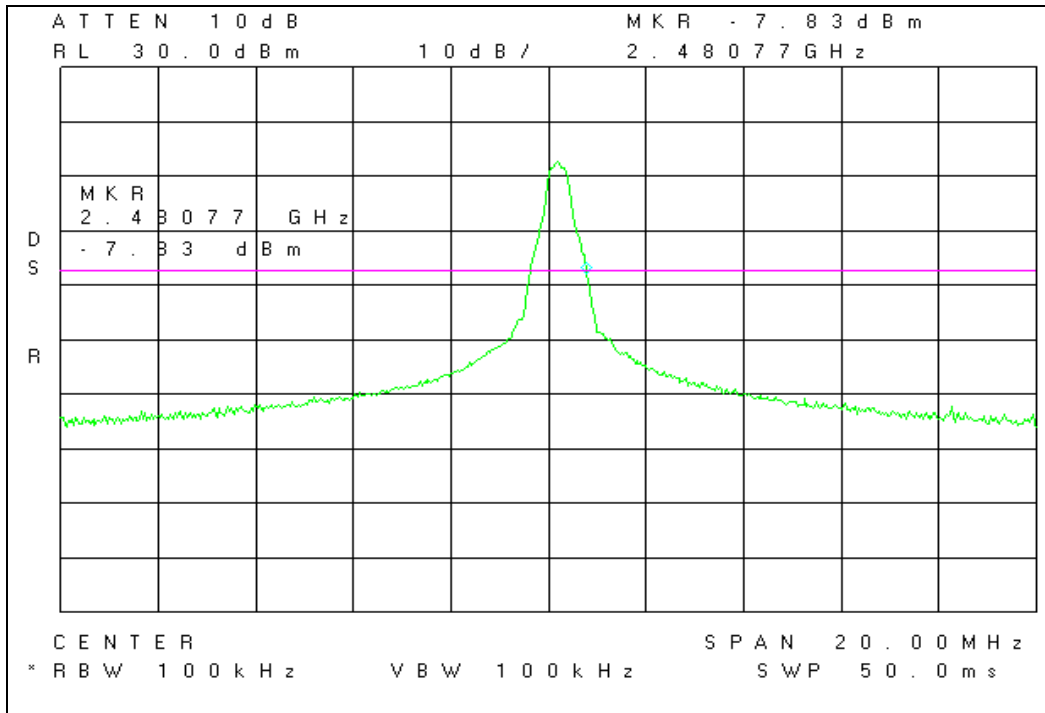

[ 2480 MHz Band-edge ]



**7.2.7 Peak Power Spectral Density**

**Procedure:**

The transmitter was connected directly to a spectrum analyzer. The power level was set to the maximum level. Set RBW = 3 kHz, VBW > RBW, Span = 300 kHz, sweep time = 100 seconds(It is allowed to be longer than Span /3 kHz). Measurements were carried out at the low, mid, high channels.

The spectrum analyzer is set to:

Center frequency = the highest, middle and the lowest channels

RBW = 3 kHz

VBW = 30 kHz

Span = 300 kHz

Detector function = peak

Trace = max hold

Sweep = 100 s

**Measurement Data:**

Frequency (MHz)	Ch.	Test Results		
		dBm	W	Result
2402	1	<b>4.83</b>	<b>0.0030</b>	Complies
2441	40	<b>4.17</b>	<b>0.0026</b>	Complies
2480	79	<b>4.00</b>	<b>0.0025</b>	Complies

- See next pages of actual measured spectrum plots.

<b>Minimum Standard:</b>	< 8 dBm
--------------------------	---------

**Measurement Setup**

Same as the Chapter 4.4 (Figure 1)









**7.2.7 Transmitter Radiated Emissions**

Tests were performed to identify the maximum transmitter radiated emission levels.

**Procedure:**

The transmitter was connected directly to a spectrum analyzer. The power level was set to the maximum level. Set RBW = 3 kHz, VBW > RBW, Span = 300 kHz, sweep time = 100 seconds(It is allowed to be longer than Span /3 kHz). Measurements were carried out at the low, mid, high channels.

The spectrum analyzer is set to:

Center frequency = the highest, middle and the lowest channels

RBW = 100 kHz

VBW = 100 kHz

Span = 300 kHz

Detector function = Average

Trace = max hold

Sweep = auto

Frequency (MHz)	Pol.	Height [m]	Angle [° ]	Reading (dB $\mu$ V)	AFCL (dBm)	Actual (dB $\mu$ V/m)	Limit (dB $\mu$ V/m)	Margin (dB)
--------------------	------	---------------	---------------	-------------------------	---------------	--------------------------	-------------------------	----------------

**It was not observed any other spurious emissions from the EUT up to 25 GHz**

Notes. No spurious emissions were detected above the noise floor of the measuring receiver

