

FCC PART 15.225

EMI MEASUREMENT AND TEST REPORT

For

Advanced Card Systems Ltd.

Units 2010-2013, 20th Floor, Chevalier Commercial Centre, 8 Wang Hoi Road,
Kowloon Bay, Hong Kong

FCC ID: V5MACR1281U

Report Type: Original Report	Product Type: Contactless Smart Card Reader and Writer
Test Engineer: <u>Wayne Cheng</u>	<i>Wayne Cheng</i>
Report Number: <u>RSZ10122101</u>	
Report Date: <u>2011-01-17</u>	
Reviewed By: <u>Merry Zhao</u> EMC Manager	<i>Merry Zhao</i>
Prepared By:	Bay Area Compliance Laboratories Corp. (Shenzhen) 6/F, the 3rd Phase of WanLi Industrial Building, ShiHua Road, FuTian Free Trade Zone Shenzhen, Guangdong, China Tel: +86-755-33320018 Fax: +86-755-33320008

Note: This test report is prepared for the customer shown above and for the device described herein. It may not be duplicated or used in part without prior written consent from Bay Area Compliance Laboratories Corp. This report **must not** be used by the customer to claim product certification, approval, or endorsement by NVLAP*, NIST, or any agency of the Federal Government.

* This report contains data that are not covered by the NVLAP accreditation and are marked with an asterisk "★" (Rev.2)

TABLE OF CONTENTS

GENERAL INFORMATION.....4

 PRODUCT DESCRIPTION FOR EQUIPMENT UNDER TEST (EUT)4

 OBJECTIVE4

 RELATED SUBMITTAL(S)/GRANT(S).....4

 TEST METHODOLOGY4

 TEST FACILITY4

SYSTEM TEST CONFIGURATION.....6

 JUSTIFICATION6

 EUT EXERCISE SOFTWARE6

 EQUIPMENT MODIFICATIONS6

 HOST SYSTEM CONFIGURATION LIST AND DETAILS6

 LOCAL SUPPORT EQUIPMENT LIST AND DETAILS6

 EXTERNAL I/O CABLE.....7

 CONFIGURATION OF TEST SETUP7

 BLOCK DIAGRAM OF TEST SETUP8

SUMMARY OF TEST RESULTS9

FCC §15.203 - ANTENNA REQUIREMENT.....10

 APPLICABLE STANDARD10

 ANTENNA CONNECTED CONSTRUCTION10

FCC §15.207 – AC LINE CONDUCTED EMISSIONS.....11

 MEASUREMENT UNCERTAINTY11

 EUT SETUP11

 EMI TEST RECEIVER SETUP.....12

 TEST EQUIPMENT LIST AND DETAILS.....12

 TEST PROCEDURE12

 TEST RESULTS SUMMARY.....12

 TEST DATA12

FCC §15.205 & §15.209 - RADIATED SPURIOUS EMISSIONS15

 MEASUREMENT UNCERTAINTY15

 EUT SETUP.....15

 EMI TEST RECEIVER SETUP.....16

 TEST EQUIPMENT LIST AND DETAILS.....16

 CORRECTED AMPLITUDE & MARGIN CALCULATION16

 TEST RESULTS SUMMARY.....16

 TEST DATA17

FCC §15.225(A) (B) (C) – FIELD STRENGTH OF RADIATED EMISSIONS.....18

 APPLICABLE STANDARD18

 TEST EQUIPMENT LIST AND DETAILS.....18

 EUT SETUP.....18

 TEST DATA18

FCC §15.225(D) & §15.209 - OUT OF BAND EMISSION.....22

 APPLICABLE STANDARD22

 TEST EQUIPMENT LIST AND DETAILS.....22

 EUT SETUP.....22

TEST DATA	22
FCC §15.225(E) - FREQUENCY STABILITY.....	25
APPLICABLE STANDARD	25
TEST EQUIPMENT LIST AND DETAILS.....	25
TEST PROCEDURE	25
TEST DATA	25
FCC §15.215(C) – 20 DB BANDWIDTH TESTING.....	27
REQUIREMENT	27
TEST EQUIPMENT LIST AND DETAILS.....	27
TEST PROCEDURE	27
TEST DATA	27

GENERAL INFORMATION

Product Description for Equipment Under Test (EUT)

The *Advanced Card Systems Ltd.*'s product, model number: *ACR1281U* (FCC ID: *V5MACR1281U*) or the "EUT" as referred to in this report is a *Contactless Smart Card Reader and Writer*. The EUT is measured approximately 12.0 cm (L) x 7.2 cm (W) x 2.0 cm (H). Rated input voltage: DC 5 V USB.

Note: This products, model: ACR1281U, has two kinds of appearances, there are only plastic appearances different, for detail, please refer to the EUT photo.

** All measurement and test data in this report was gathered from production sample serial number: 1012089 (Assigned by BACL, Shenzhen). The EUT was received on 2010-12-21.*

Objective

This Type approval report is prepared on behalf of *Advanced Card Systems Ltd.* in accordance with Part 2, Subpart J, and Part 15, Subparts A, B and C of the Federal Communication Commissions rules.

The objective is to determine compliance with FCC rules, sec 15.203, 15.205, 15.207, 15.209 and 15.225.

Related Submittal(s)/Grant(s)

No Related Submittals.

Test Methodology

All measurements contained in this report were conducted with ANSI C63.4-2009, American National Standard for Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the range of 9 kHz to 40 GHz.

All radiated and conducted emissions measurement was performed at Bay Area Compliance Lab Corp. (ShenZhen). The radiated testing was performed at an antenna-to-EUT distance of 3 meters.

Test Facility

The Test site used by Bay Area Compliance Laboratories Corp.(Shenzhen) to collect test data is located in the 6/F, the 3rd Phase of WanLi Industrial Building, ShiHua Road, FuTian Free Trade Zone Shenzhen, Guangdong, China.

Test site at Bay Area Compliance Laboratories Corp. (Shenzhen) has been fully described in reports submitted to the Federal Communication Commission (FCC). The details of these reports have been found to be in compliance with the requirements of Section 2.948 of the FCC Rules on December 06, 2010. The facility also complies with the radiated and AC line conducted test site criteria set forth in ANSI C63.4-2009.

The Federal Communications Commission has the reports on file and is listed under FCC Registration No.: 382179. The test site has been approved by the FCC for public use and is listed in the FCC Public Access Link (PAL) database.

Additionally, Bay Area Compliance Laboratories Corp. (Shenzhen) is a National Institute of Standards and Technology (NIST) accredited laboratory, under the National Voluntary Laboratory Accredited Program (Lab Code 200707-0).



The current scope of accreditations can be found at <http://ts.nist.gov/Standards/scopes/2007070.htm>

SYSTEM TEST CONFIGURATION

Justification

The system was configured for testing in a typical fashion (as normally used by a typical user).

EUT Exercise Software

APDU.exe. The software was provided by the manufacture.

Equipment Modifications

Bay Area Compliance Lab Corp. (Shenzhen) has not done any modification on the EUT.

Host System Configuration List and Details

Manufacturer	Description	Model	Serial Number	FCC ID
DELL	Motherboard	OWC297	CN-OWC297-70821-566-02BR	DoC
DELL	Power	NPS-250KB D	CN-0H2678-17972-56E8NBM	DoC
Seagate	Hard Disk	ST340014A	5JXK3NAD	DoC
DELL	3.5' Floppy	N/A	CN-0N8893-69802-54Q-02OZ	DoC
Lite-ON	CD-Rom	LTN-489S	N/A	DoC
Intel	CPU	Celeron D-2533	N/A	N/A
ProMOS	Memory	V826632K24SATG-C0	0525-K1933700	N/A
Intel	Ethernet	PRO 10/100 VE	N/A	DoC


Local Support Equipment List and Details

Manufacturer	Description	Model	Serial Number	FCC ID
DELL	PC	DELL 170L	CN-0TC670-70821-560-F4WQ	DoC
DELL	Keyboard	SK-8110	CN07N244-71616-56I-1100	DoC
DELL	Mouse	M071KC	519046820	DoC
DELL	LCD Monitor	1505FP	Y4287-7168-574-GBSH	DoC
N/A	Card	N/A	N/A	N/A


External I/O Cable

Cable Description	Length (m)	From/Port	To
Shielded Detachable K/B Cable	1.5	K/B Port	K/B
Shielded Detachable Mouse Cable	1.5	Mouse Port	Mouse
Shielded Detachable VGA Cable	1.5	VGA Port	Monitor
Shielded Detachable Printer Line	1.2	Parallel Port	Printer
Shielded Detachable Serial Cable	1.2	Serial Port/Host	Modem
Shielded Undetachable USB Cable with a core	2.0	EUT	PC
Unshielded Undetachable Power Cable	1.8	PC	LISN

Configuration of Test Setup

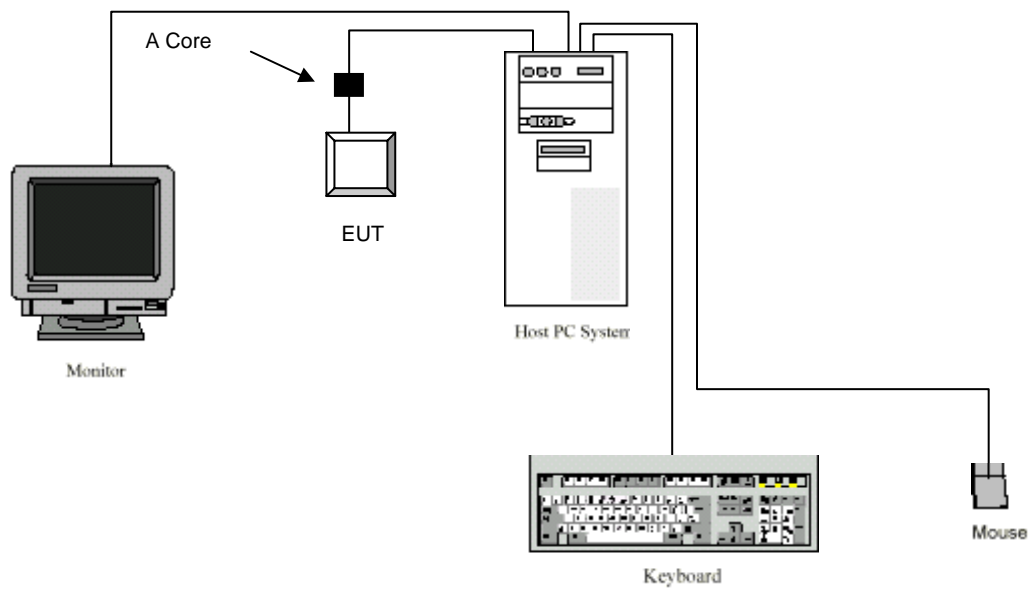

Block Diagram of Test Setup

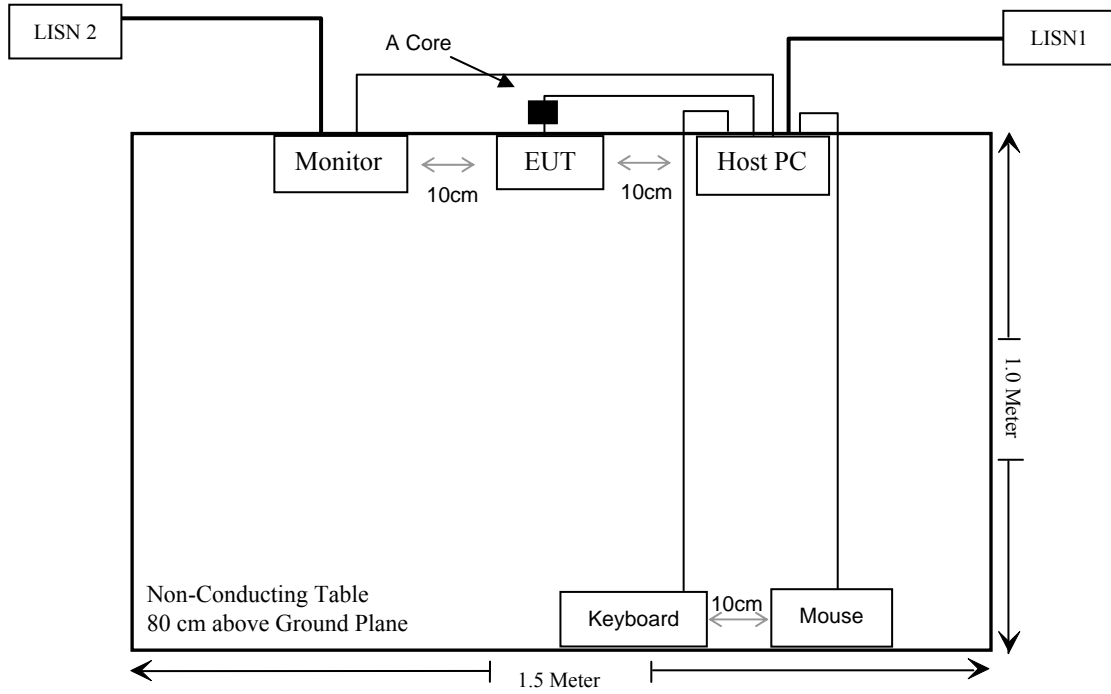

SUMMARY OF TEST RESULTS

FCC Rules	Description of Test	Result
§15.203	Antenna Requirement	Compliance
§15.205	Restricted Band of operation	Compliance
§15.207	AC Line Conducted Emission	Compliance
§15.209	Radiated Spurious Emission Test	Compliance
§15.225(a) (b) (c) §15.31(f)	Field Strength of Radiated Emissions	Compliance
§15.225(d) §15.209§15.31(f)	Out of Band Emission	Compliance
§15.225(e)	Frequency Stability	Compliance
§15.215(c)	20 dB Bandwidth Testing	Compliance

FCC §15.203 - ANTENNA REQUIREMENT

Applicable Standard

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section.

Antenna Connected Construction

The EUT has a printed antenna on PCB, which complies with the Part 15.203. Please see EUT photo for details.


FCC §15.207 – AC LINE CONDUCTED EMISSIONS

Measurement Uncertainty

All measurements involve certain levels of uncertainties, especially in field of EMC. The factors contributing to uncertainties are spectrum analyzer, cable loss, and LISN.

Based on NIS 81, The Treatment of Uncertainty in EMC Measurements, the best estimate of the uncertainty of any conducted emissions measurement at Bay Area Compliance Lab Corp. (ShenZhen) is ± 2.4 dB.

EUT Setup

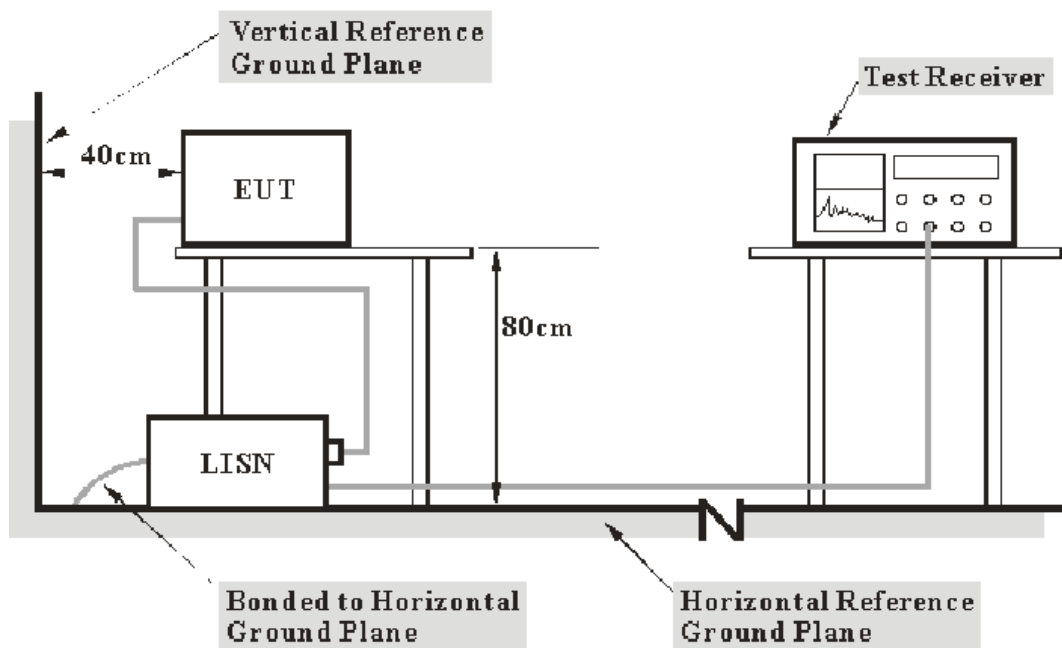

- Note:**
1. Support units were connected to second LISN.
 2. Both of LISNs (AMN) 80 cm from EUT and at the least 80 cm from other units and other metal planes support units.

The setup of EUT is according with per ANSI C63.4-2009 measurement procedure. The specification used was with the FCC Part 15.207.

The external I/O cables were draped along the test table and formed a bundle 30 to 40 cm long in the middle.

The spacing between the peripherals was 10 cm.

The host PC was connected to a 120 VAC/60 Hz power source.

EMI Test Receiver Setup

The EMI test receiver was set to investigate the spectrum from 150 kHz to 30 MHz.

During the conducted emission test, the EMI test receiver was set with the following configurations:

<i>Frequency Range</i>	<i>IF B/W</i>
150 kHz – 30 MHz	9 kHz

Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
Rohde & Schwarz	EMI Test Receiver	ESCS30	100035	2010-03-03	2011-03-02
Rohde & Schwarz	L.I.S.N.	ESH2-Z5	892107/021	2010-03-09	2011-03-08

* **Statement of Traceability:** Bay Area Compliance Lab Corp. (ShenZhen) attests that all calibrations have been performed in accordance to NVLAP requirements, traceable to the NIST.

Test Procedure

During the conducted emission test, the host PC was connected to the outlet of the first LISN, and all other support equipment power cords were connected to the outlet of the second LISN.

Maximizing procedure was performed on the six (6) highest emissions of the EUT.

All data was recorded in the Quasi-peak and average detection mode.

Test Results Summary

According to the recorded data in following table, the EUT complied with the FCC Part 15.207, with the worst margin reading of:

15.72 dB at 28.060 MHz in the **Line** conductor mode

Test Data


Environmental Conditions

Temperature:	25 °C
Relative Humidity:	56 %
ATM Pressure:	100.0 kPa

The testing was performed by Wayne Cheng on 2011-01-12.


Test Mode: Transmitting

120 V, 60 Hz, Line:

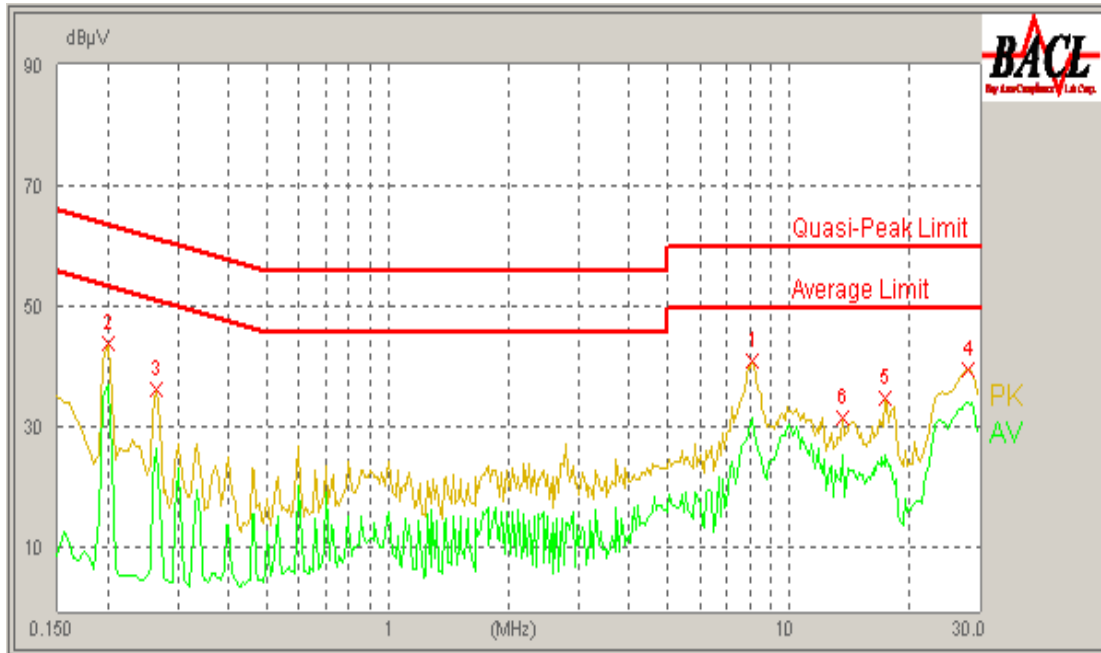

Frequency (MHz)	Correction Factor (dB)	Cord. Result (dBµV)	Limit (dBµV)	Margin (dB)	Remark (PK/QP/Ave)
28.060	10.20	34.28	50.00	15.72	Ave
0.200	10.10	37.12	54.57	17.45	Ave
8.115	10.10	31.82	50.00	18.18	Ave
8.130	10.10	41.27	60.00	18.73	QP
27.960	10.20	39.93	60.00	20.07	QP
0.200	10.10	44.26	64.57	20.31	QP
13.560	10.10	25.77	50.00	24.23	AV
17.305	10.10	34.96	60.00	25.04	QP
0.265	10.10	26.97	52.71	25.74	Ave
17.335	10.10	23.85	50.00	26.15	Ave
0.265	10.10	36.54	62.71	26.17	QP
13.565	10.10	31.89	60.00	28.11	QP

120 V, 60 Hz, Neutral:

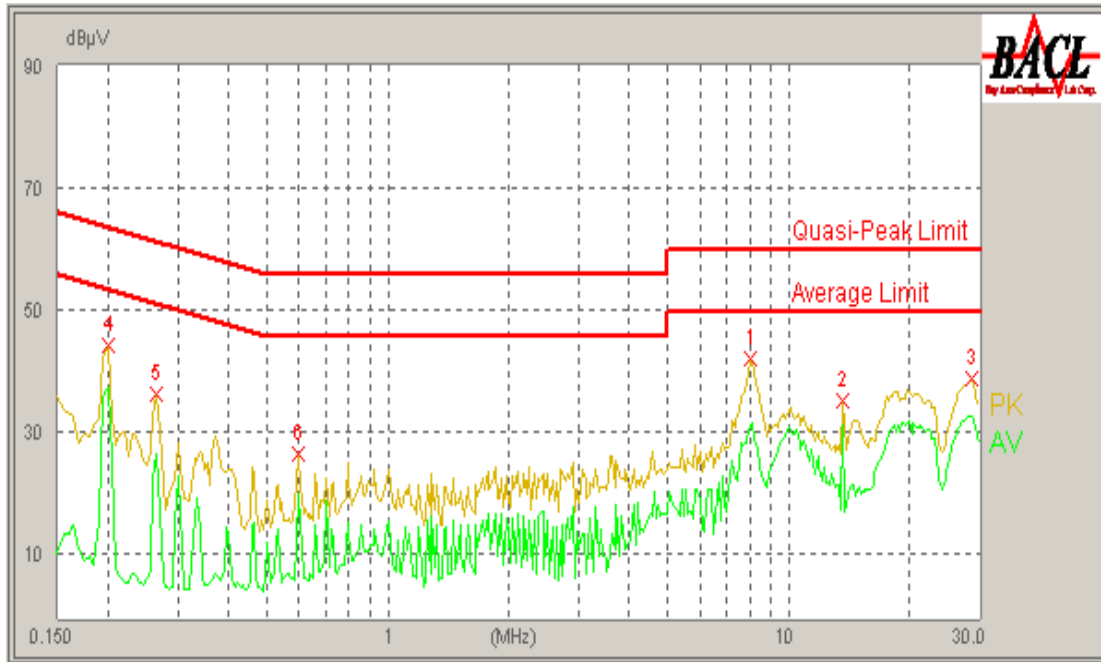

Frequency (MHz)	Correction Factor (dB)	Cord. Result (dBµV)	Limit (dBµV)	Margin (dB)	Remark (PK/QP/Ave)
0.200	10.10	37.69	54.57	16.88	Ave
28.460	10.20	33.09	50.00	16.91	Ave
8.010	10.10	42.23	60.00	17.77	QP
13.560	10.10	31.54	50.00	18.46	Ave
7.995	10.10	31.10	50.00	18.90	Ave
0.200	10.10	44.46	64.57	20.11	QP
28.460	10.20	39.02	60.00	20.98	QP
13.560	10.10	35.52	60.00	24.48	QP
0.600	10.20	20.22	46.00	25.78	Ave
0.265	10.10	26.72	52.71	25.99	Ave
0.265	10.10	36.56	62.71	26.15	QP
0.595	10.20	26.66	56.00	29.34	QP

FCC §15.205 & §15.209 - RADIATED SPURIOUS EMISSIONS


Measurement Uncertainty

All measurements involve certain levels of uncertainties, especially in field of EMC. The factors contributing to uncertainties are spectrum analyzer, cable loss, antenna factor calibration, antenna directivity, antenna factor variation with height, antenna phase center variation, antenna factor frequency interpolation, measurement distance variation, site imperfections, mismatch (average), and system repeatability.

Based on NIS 81, The Treatment of Uncertainty in EMC Measurements, the best estimate of the uncertainty of a radiation emissions measurement at Bay Area Compliance Lab Corp. (ShenZhen) is ± 4.0 dB.

The fundamental data was recorded in average detection mode: set the VBW AVE on, then record the data.

EUT Setup

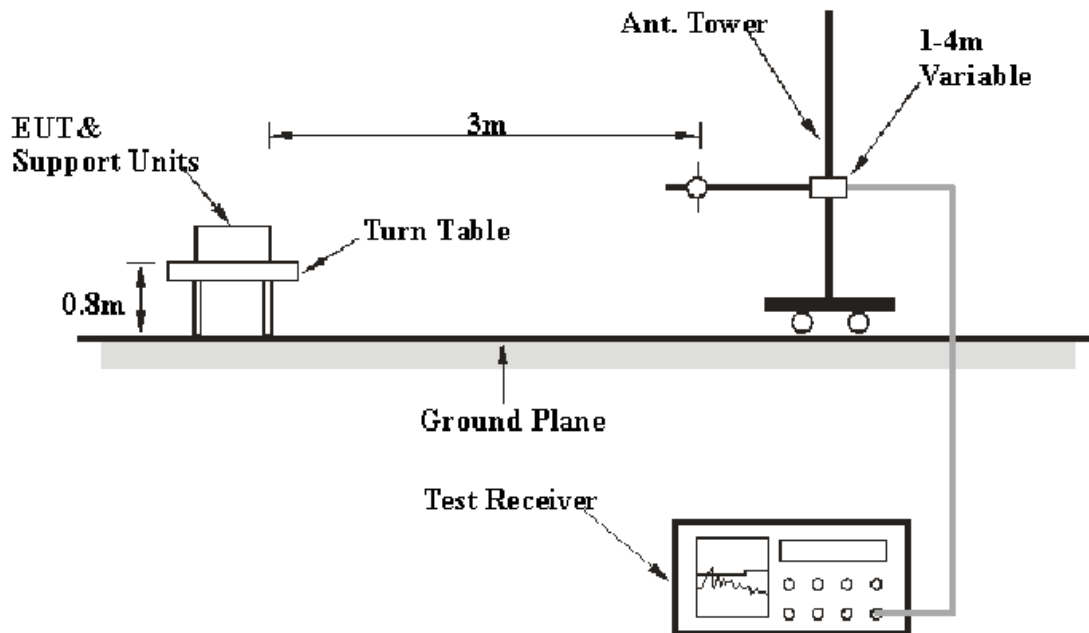

The radiated emission tests were performed in the 3-meter chamber A test site, using the setup accordance with the ANSI C63.4-2009. The specification used was the FCC Part Subpart C limits.

The spacing between the peripherals was 10 cm.

The host PC was connected to a 120 VAC/60 Hz power source.

EMI Test Receiver Setup

According to FCC Rules, 47 CFR 15.33, the EUT emissions were investigated up to 1000 MHz.

During the radiated emission test, the EMI test Receiver was set with the following configurations:

<i>Frequency Range</i>	<i>RBW</i>	<i>Video B/W</i>
30 – 1000 MHz	100 kHz	300 kHz

Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
Rohde & Schwarz	EMI Test Receiver	ESCI	100035	2010-11-24	2011-11-23
Sunol Sciences	Broadband Antenna	JB1	A040904-1	2010-03-11	2011-03-10

* **Statement of Traceability:** Bay Area Compliance Lab Corp. (ShenZhen) attests that all calibrations have been performed per the NVLAP requirements, traceable to NIST.

Corrected Amplitude & Margin Calculation

The Corrected Amplitude is calculated by adding the Antenna Loss and Cable Loss, and subtracting the Amplifier Gain from the Amplitude reading. The basic equation is as follows:

$$\text{Corr. Amp.} = \text{Meter Reading} + \text{Antenna Loss} + \text{Cable Loss} - \text{Amplifier Gain}$$

The “**Margin**” column of the following data tables indicates the degree of compliance with the applicable limit. For example, a margin of 7dB means the emission is 7dB below the maximum limit. The equation for margin calculation is as follows:

$$\text{Margin} = \text{Limit} - \text{Corr. Amp.}$$

Test Results Summary

According to the data in the following table, the EUT complied with the FCC Part 15.209 with the worst margin reading of:

0.3 dB at 203.41900 MHz in the Horizontal polarization


Test Data

Environmental Conditions

Temperature:	25 °C
Relative Humidity:	56 %
ATM Pressure:	100.9 kPa

The testing was performed by Wayne Cheng on 2011-01-13.

Test mode: Transmitting

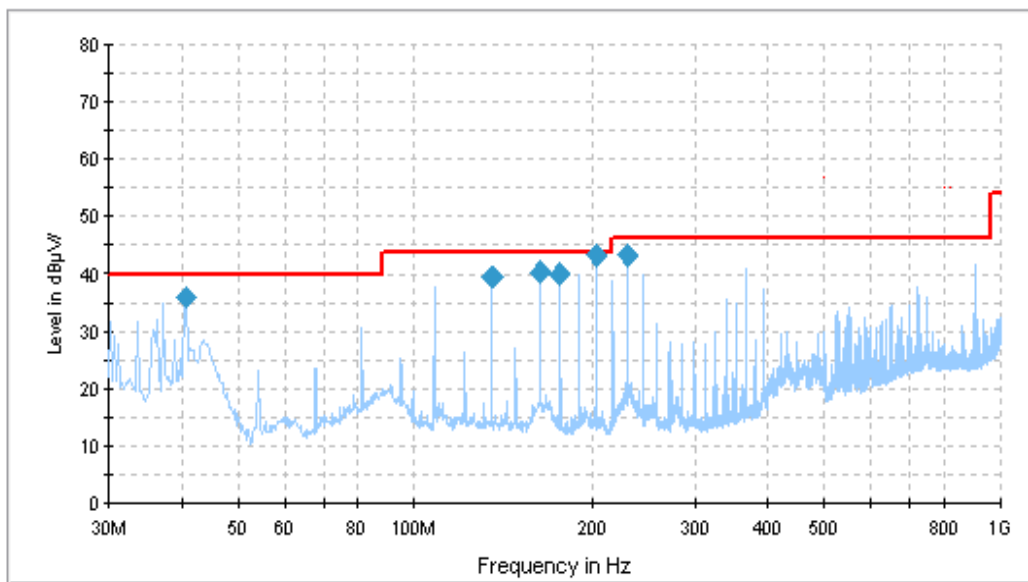

Frequency (MHz)	Corrected Amplitude (dBµV/m)	Antenna Height (cm)	Antenna Polarity (H/V)	Turntable Position (deg)	Correction Factor (dB)	Limit (dBµV/m)	Margin (dB)
203.419000	43.2	153.0	H	49.0	-14.3	43.5	0.3*
230.531750	43.1	100.0	H	265.0	-13.8	46.0	2.9*
162.732250	40.5	200.0	H	239.0	-14.5	43.5	3.0*
176.290500	40.1	100.0	V	200.0	-15.2	43.5	3.4*
135.608000	39.7	100.0	V	152.0	-12.9	43.5	3.8*
40.677000	36.0	100.0	V	219.0	-12.5	40.0	4.0

* Within measurement uncertainty.

FCC §15.225(a) (b) (c) – FIELD STRENGTH OF RADIATED EMISSIONS

Applicable Standard

As per FCC Part 15.225

(a) The field strength of any emissions within the band 13.553-13.567 MHz shall not exceed 15,848 microvolts/meter at 30 meters.

(b) Within the bands 13.410-13.553 MHz and 13.567-13.710 MHz, the field strength of any emissions shall not exceed 334 microvolts/meter at 30 meters.

(c) Within the bands 13.110-13.410 MHz and 13.710-14.010 MHz the field strength of any emissions shall not exceed 106 microvolts/meter at 30 meters.

Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
HP	Amplifier	8447E	1937A01046	2010-08-02	2011-08-01
Rohde & Schwarz	EMI Test Receiver	ESCI	100035	2010-11-24	2011-11-23
ETS	Passive Loop Antenna	6512	00029604	2010-04-27	2011-04-26

* **Statement of Traceability:** Bay Area Compliance Lab Corp. (ShenZhen) attests that all calibrations have been performed per the NVLAP requirements, traceable to NIST.

EUT Setup

The field strength of radiated emissions tests were performed in the 3-meter chamber A test site, using the setup accordance with the ANSI C63.4-2009. The specification used was the FCC Part Subpart C limits.

Test Data

Environmental Conditions

Temperature:	25 °C
Relative Humidity:	56 %
ATM Pressure:	100.9 kPa

The testing was performed by Wayne Cheng on 2011-01-13.



Test Mode: Transmitting

Test Result: Pass

Indicated			Table Angle Degree	Antenna Height (m)	Detector (PK/QP/AV)	Correction Factor			Cord. Amp. (dBµV/m) @3m	FCC Part 15.225	
Frequency Range (MHz)	Mark Point (MHz)	Maximum Reading (dBµV) @3m				Ant. Factor (dB)	Cable Loss (dB)	Pre-Amp. (dB)		Limit (dBµV/m) @3m	Result
13.110-13.410	13.3506	3.4	188	1.30	QP	32.1	0.20	0.0	35.7	80.5	Pass
13.410-13.553	13.553	9.0	182	1.35	QP	32.1	0.20	0.0	41.3	90.5	Pass
13.553-13.567	13.562	32.2	173	1.26	QP	32.1	0.20	0.0	64.5	124	Pass
13.567-13.710	13.567	18.1	181	1.30	QP	32.1	0.20	0.0	50.4	90.5	Pass
13.710-14.010	13.7725	-2.6	189	1.37	QP	32.1	0.20	0.0	29.7	80.5	Pass





RBW 9 kHz
 MT 10 ms
 PREAMP OFF
 Att 10 dB

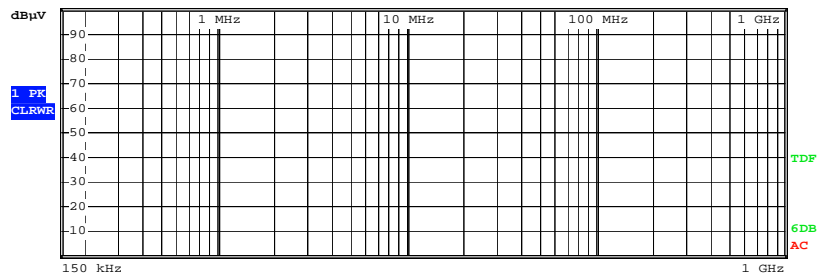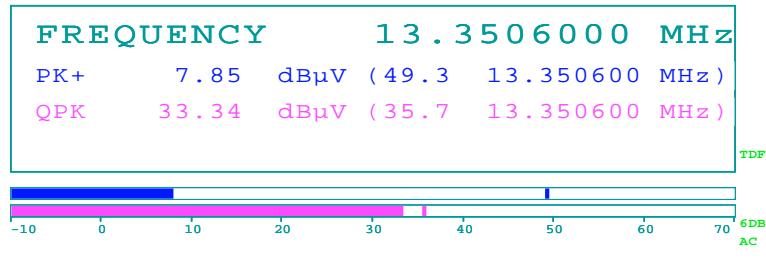

Date: 13.JAN.2011 00:51:07





Att 10 dB
RBW 9 kHz
MT 10 ms
PREAMP OFF

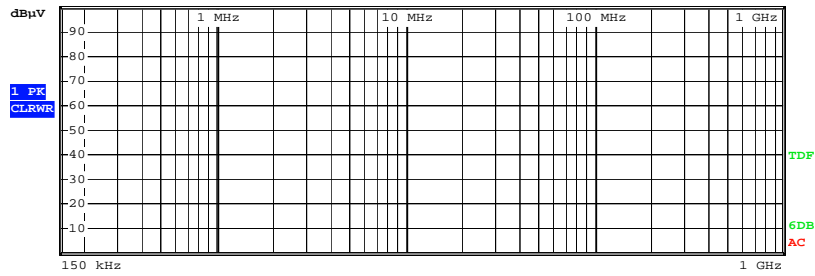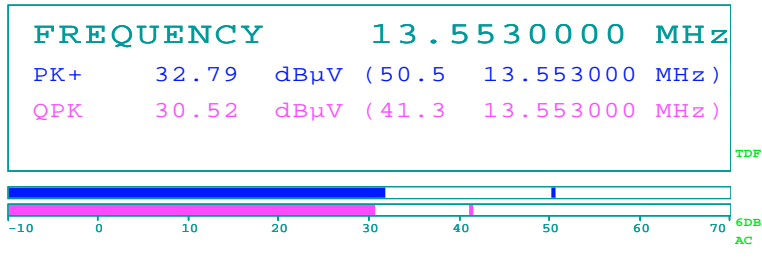

Date: 13.JAN.2011 00:55:14



Att 10 dB
RBW 9 kHz
MT 10 ms
PREAMP OFF

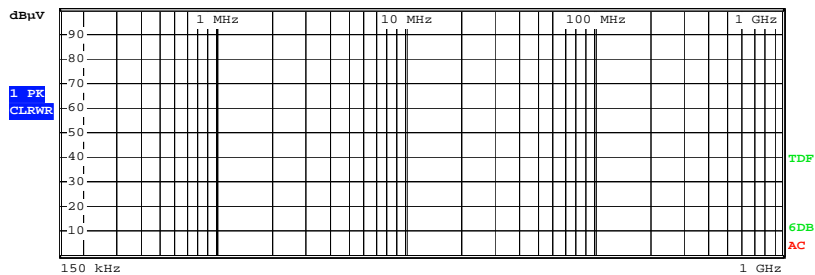
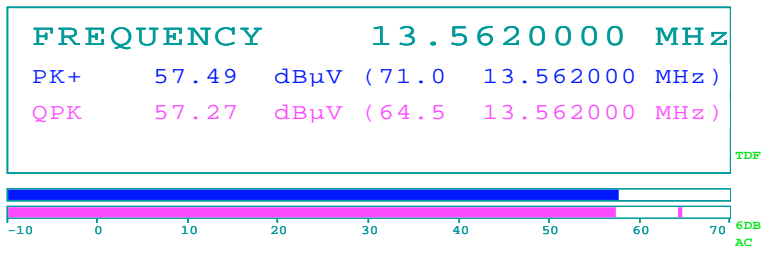


Date: 13.JAN.2011 00:56:16



Att 10 dB

RBW 9 kHz
MT 10 ms
PREAMP OFF

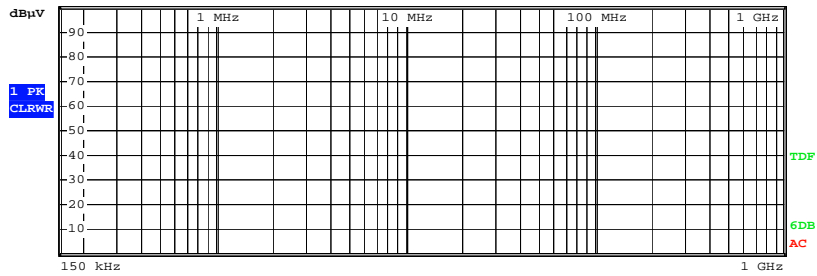
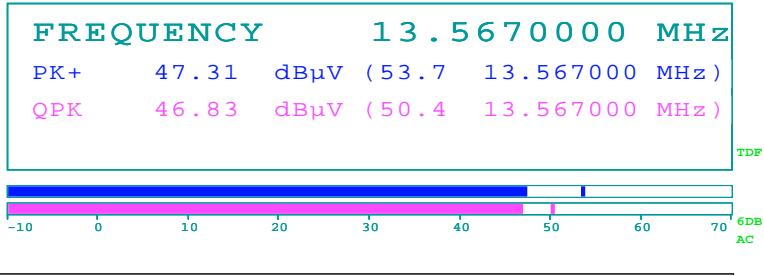


Date: 13.JAN.2011 00:57:03



Att 10 dB

RBW 9 kHz
MT 10 ms
PREAMP OFF

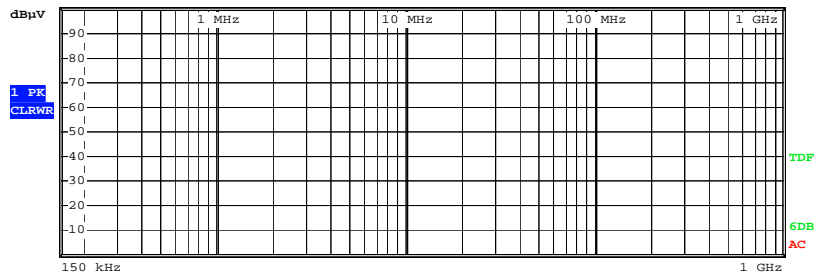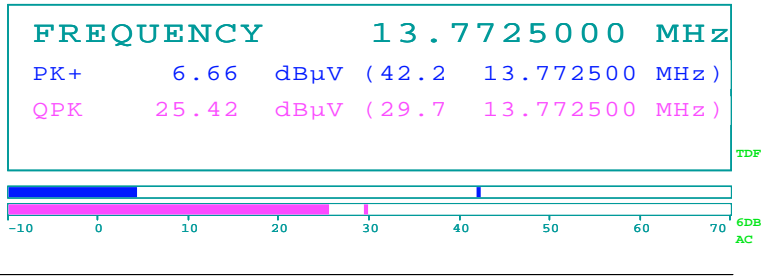

Date: 13.JAN.2011 00:57:49

FCC §15.225(d) & §15.209 - OUT OF BAND EMISSION

Applicable Standard

As per FCC Part 15.225(d) §15.31(f) The field strength of any emissions appearing outside of the 13.110–14.010 MHz band shall not exceed the general radiated emission limits in §15.209.

Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
HP	Amplifier	8447E	1937A01046	2010-08-02	2011-08-01
Rohde & Schwarz	EMI Test Receiver	ESCI	100035	2010-11-24	2011-11-23
ETS	Passive Loop Antenna	6512	00029604	2010-04-27	2011-04-26

* **Statement of Traceability:** Bay Area Compliance Lab Corp. (Shenzhen) attests that all calibrations have been performed per the NVLAP requirements, traceable to NIST.

EUT Setup

The out of band emission tests were performed in the 3-meter chamber A test site, using the setup accordance with the ANSI C63.4-2003. The specification used was the FCC Part Subpart C limits.

Test Data


Environmental Conditions

Temperature:	25 °C
Relative Humidity:	56 %
ATM Pressure:	100.9 kPa


The testing was performed by Wayne Cheng on 2011-01-13.

Test Mode: Transmitting


Indicated		Table Angle Degree	Antenna Height (m)	Detector PK/QP/AV	Correction Factor			Cord. Amp. (dB μ V/m) @3m	FCC Part 15.225	
Frequency (MHz)	Maximum Reading (dB μ V) @3m				Ant. Factor (dB)	Cable Loss (dB)	Pre-Amp. Gain (dB)		Limit (dB μ V/m) @3m	Result
0.009000	-2.71	168	1.55	PK	87.8	0.05	0.0	85.14	128.52	Pass
0.175920	13.97	183	1.50	PK	63.5	0.08	0.0	77.55	104.00	Pass
18.25092	20.68	187	1.61	PK	31.7	0.18	0.0	52.56	69.5	Pass
27.12000	24.98	189	1.44	PK	29.2	0.27	0.0	54.45	69.5	Pass

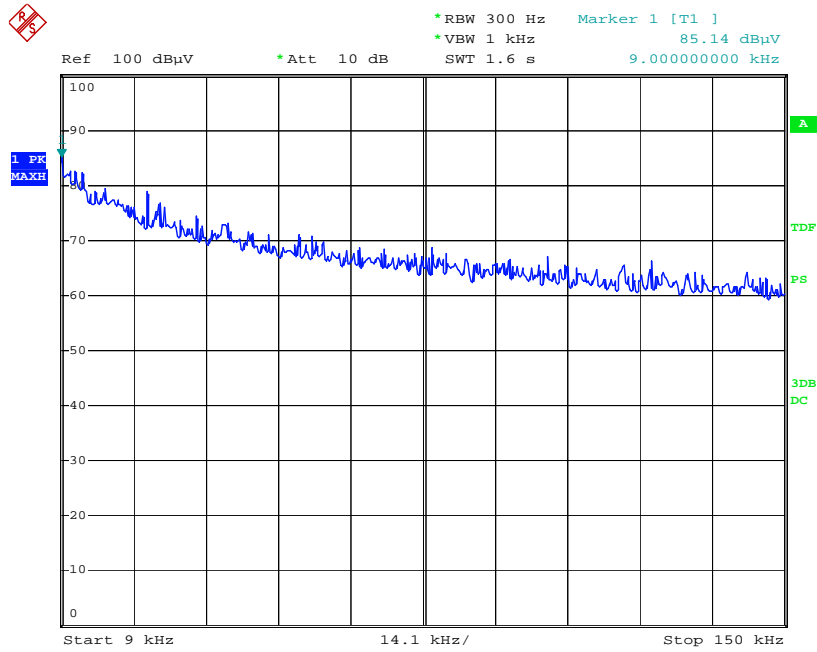


Date: 13.JAN.2011 00:29:00

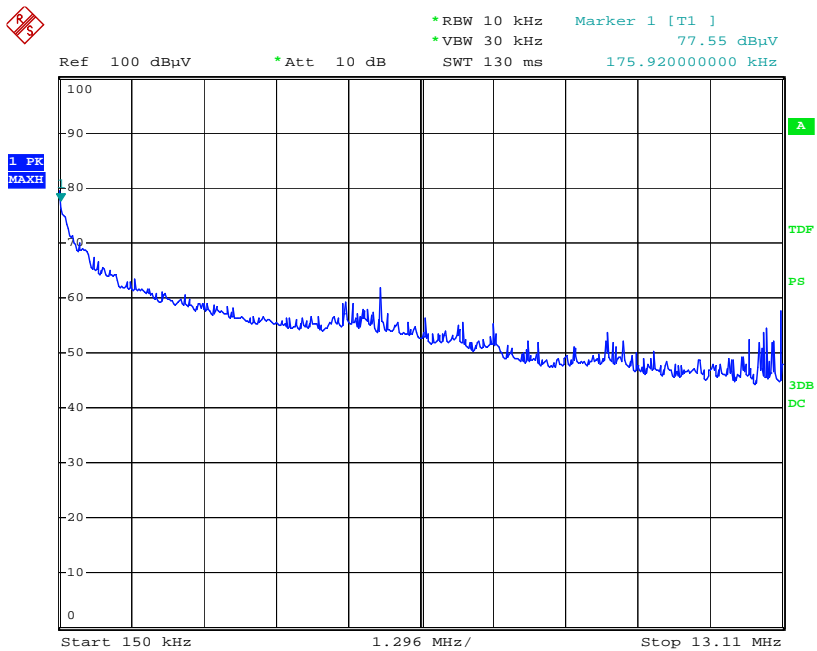

Date: 13.JAN.2011 00:30:48

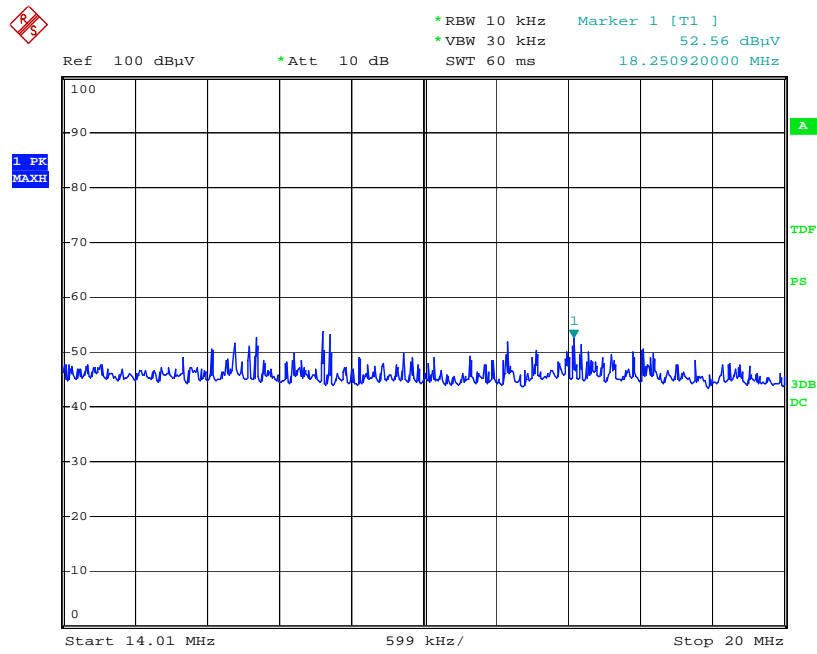

Date: 13.JAN.2011 00:32:57

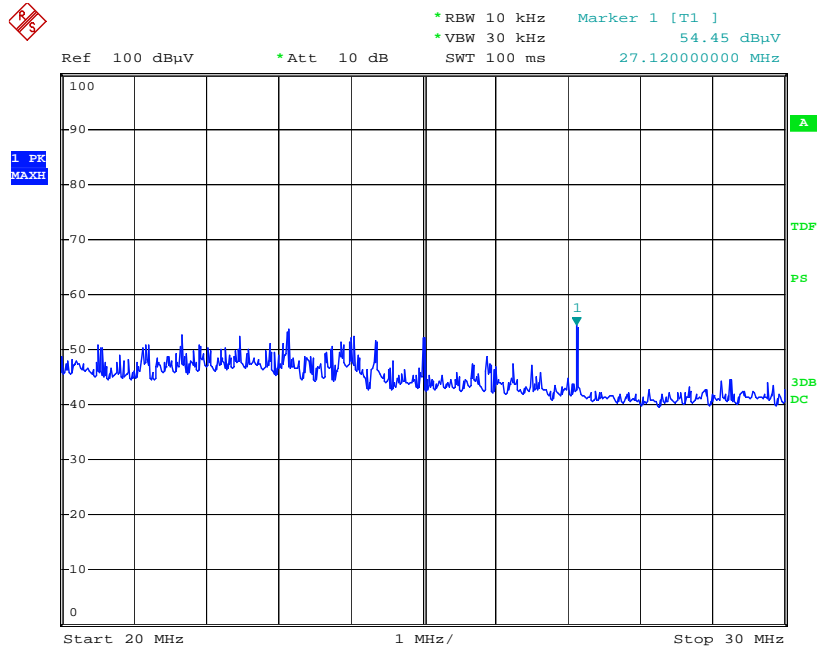

Date: 13.JAN.2011 00:36:11

FCC §15.225(e) - FREQUENCY STABILITY

Applicable Standard

The frequency tolerance of the carrier signal shall be maintained within $\pm 0.01\%$ of the operating frequency over a temperature variation of -20 degrees to $+50$ degrees C at normal supply voltage, and for a variation in the primary supply voltage from 85% to 115% of the rated supply voltage at a temperature of 20 degrees C. For battery operated equipment, the equipment tests shall be performed using a new battery.

Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
Rohde & Schwarz	EMI Test Receiver	ESCI	100035	2010-11-24	2011-11-23
WUHUAN	Temperature & Humidity Chamber	HTP205	20021115	2010-06-04	2011-06-03

* **Statement of Traceability:** Bay Area Compliance Lab Corp. (Shenzhen) attests that all calibrations have been performed in accordance to NVLAP requirements, traceable to the NIST.

Test Procedure

Frequency Stability vs. Temperature: The equipment under test was connected to PC, than to an external AC power supply and loop antenna was connected to a f Spectrum Analyzer. The EUT was placed inside the temperature chamber.

After the temperature stabilized for approximately 20 minutes, the frequency output was recorded from the Spectrum Analyzer.

Frequency Stability vs. Voltage: An external variable AC power supply Source. The voltage was set to 115% of the nominal value and was then decreased until the transmitter light no longer illuminated; i.e., the end point. The output frequency was recorded for each voltage.

Test Data

Environmental Conditions

Temperature:	25 °C
Relative Humidity:	56 %
ATM Pressure:	100.9 kPa

The testing was performed by Wayne Cheng on 2011-01-13.

Test Result: Pass

Test Mode: Transmitting

Power Supply	Temperature (°C)	Measured Frequency (MHz)	Frequency Error (%)	Part 15.225 Limit (%)
AC 120V	0	13.56069	0.005088496	± 0.01
	10	13.56081	0.005973451	± 0.01
	20	13.56070	0.005162242	± 0.01
	25	13.56081	0.005973451	± 0.01
	30	13.56090	0.006637168	± 0.01
	40	13.56099	0.007300885	± 0.01
	50	13.56080	0.005899705	± 0.01
Max. = AC 138V	25	13.56104	0.007669617	± 0.01
Min. = AC 102V	25	13.56109	0.008038348	± 0.01

FCC §15.215(c) – 20 dB BANDWIDTH TESTING

Requirement

Per FCC Part 15.215 (c) Intentional radiators operating under the alternative provisions to the general emission limits, as contained in §§ 15.217 through 15.257 and in Subpart E of this part, must be designed to ensure that the 20 dB bandwidth of the emission, or whatever bandwidth may otherwise be specified in the specific rule section under which the equipment operates, is contained within the frequency band designated in the rule section under which the equipment is operated. The requirement to contain the designated bandwidth of the emission within the specified frequency band includes the effects from frequency sweeping, frequency hopping and other modulation techniques that may be employed as well as the frequency stability of the transmitter over expected variations in temperature and supply voltage. If a frequency stability is not specified in the regulations, it is recommended that the fundamental emission be kept within at least the central 80% of the permitted band in order to minimize the possibility of out-of-band operation.

Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
Rohde & Schwarz	EMI Test Receiver	ESCI	100035	2010-11-24	2011-11-23
HP	Amplifier	8447E	1937A01046	2010-08-02	2011-08-01
Sunol Sciences	Bilog Antenna	JB1	A040904-2	2010-05-05	2011-05-04

* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Shenzhen) attests that all calibrations have been performed per the NVLAP requirements, traceable to NIST.

Test Procedure

1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
2. Position the EUT without connection to measurement instrument. Turn on the EUT and connect it to measurement instrument. Then set it to any one convenient frequency within its operating range. Set a reference level on the measuring instrument equal to the highest peak value.
3. Measure the frequency difference of two frequencies that were attenuated 20 dB from the reference level. Record the frequency difference as the emission bandwidth.

Test Data


Environmental Conditions

Temperature:	25 °C
Relative Humidity:	56 %
ATM Pressure:	100.9 kPa

The testing was performed by Wayne Cheng on 2011-01-13.

Test Mode: Transmitting

20 dB Occupied Bandwidth

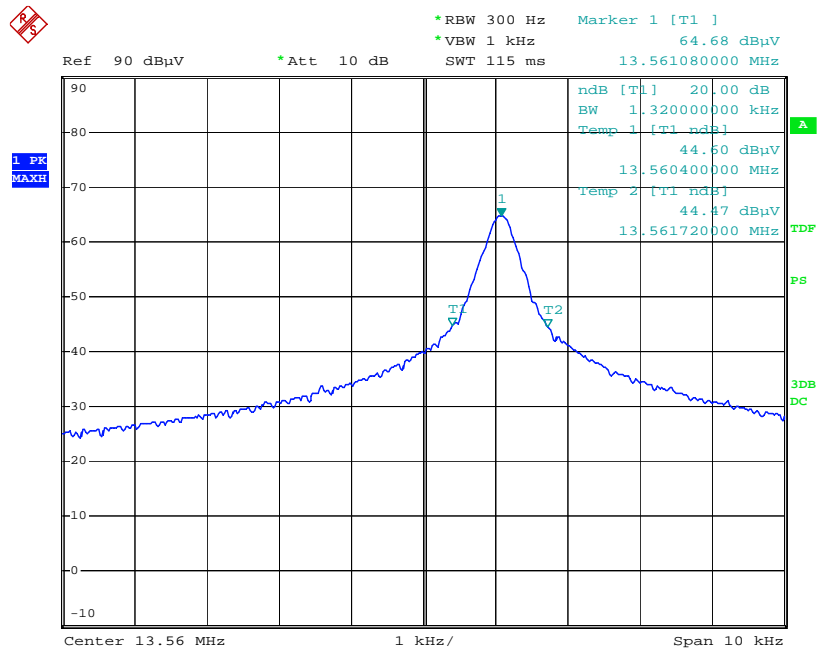

Date: 13.JAN.2011 00:25:04

***** END OF REPORT *****