

FCC RF Test Report


APPLICANT : PAX Technology Limited
EQUIPMENT : Wireless POS Terminal
BRAND NAME : PAX
MODEL NAME : D210-W
MARKETING NAME : D210-W
FCC ID : V5PD210WF
STANDARD : FCC Part 15 Subpart C §15.247
CLASSIFICATION : (DTS) Digital Transmission System

The product was testing was completed on Feb. 20, 2014. We, SPORTON INTERNATIONAL (SHENZHEN) INC., would like to declare that the tested sample has been evaluated in accordance with the procedures and shown to be compliant with the applicable technical standards.

The test results in this report apply exclusively to the tested model / sample. Without written approval of SPORTON INTERNATIONAL (SHENZHEN) INC., the test report shall not be reproduced except in full.



Reviewed by: Joseph Lin / Supervisor



Approved by: Jones Tsai / Manager



SPORTON INTERNATIONAL (SHENZHEN) INC.

No. 3 Building, the third floor of south, Shahe River west, Fengzeyuan warehouse, Nanshan District, Shenzhen, Guangdong, P.R.C.



TABLE OF CONTENTS

REVISION HISTORY 3

SUMMARY OF TEST RESULT 4

1 GENERAL DESCRIPTION 5

 1.1 Applicant 5

 1.2 Manufacturer 5

 1.3 Feature of Equipment Under Test 5

 1.4 Product Specification of Equipment Under Test 5

 1.5 Modification of EUT 6

 1.6 Testing Site 6

 1.7 Applied Standards 7

2 TEST CONFIGURATION OF EQUIPMENT UNDER TEST 8

 2.1 Carrier Frequency Channel 8

 2.2 Pre-Scanned RF Power 9

 2.3 Test Mode 10

 2.4 Connection Diagram of Test System 11

 2.5 Support Unit used in test configuration and system 12

 2.6 EUT Operation Test Setup 12

 2.7 Measurement Results Explanation Example 12

3 TEST RESULT 13

 3.1 6dB and 99% Bandwidth Measurement 13

 3.2 Output Power Measurement 15

 3.3 Power Spectral Density Measurement 18

 3.4 Conducted Band Edges and Spurious Emission Measurement 20

 3.5 Radiated Band Edges and Spurious Emission Measurement 30

 3.6 AC Conducted Emission Measurement 47

 3.7 Antenna Requirements 51

4 LIST OF MEASURING EQUIPMENT 52

5 UNCERTAINTY OF EVALUATION 53

APPENDIX A. SETUP PHOTOGRAPHS

SUMMARY OF TEST RESULT

Report Section	FCC Rule	IC Rule	Description	Limit	Result	Remark
3.1	15.247(a)(2)	RSS-210 A8.2(a)	6dB Bandwidth	$\geq 0.5\text{MHz}$	Pass	-
3.1	-	RSS-Gen 4.6.1	99% Bandwidth	-	Pass	-
3.2	15.247(b)	RSS-210 A8.4	Power Output Measurement	$\leq 30\text{dBm}$	Pass	-
3.3	15.247(e)	RSS-210 A8.2(b)	Power Spectral Density	$\leq 8\text{dBm}/3\text{kHz}$	Pass	-
3.4	15.247(d)	RSS-210 A8.5	Conducted Band Edges	$\leq 20\text{dBc}$	Pass	-
			Conducted Spurious Emission		Pass	-
3.5	15.247(d)	RSS-210 A8.5	Radiated Band Edges and Radiated Spurious Emission	15.209(a) & 15.247(d)	Pass	Under limit 7.19 dB at 2389.830 MHz
3.6	15.207	RSS-Gen 7.2.4	AC Conducted Emission	15.207(a)	Pass	Under limit 10.15 dB at 0.430 MHz
3.7	15.203 & 15.247(b)	RSS-210 A8.4	Antenna Requirement	N/A	Pass	-

1 General Description

1.1 Applicant

PAX Technology Limited

Room 2416, 24/F., Sun Hung Kai Centre, 30 Harbour Road, Wanchai, Hong Kong

1.2 Manufacturer

PAX Computer Technology (Shenzhen) Co., Ltd.

4/F No.3 Building, Software Park, Second Central Science-Tech Road, High-Tech industrial Park, Shenzhen,Guangdong, P.R.C.

1.3 Feature of Equipment Under Test

Product Feature	
Equipment	Wireless POS Terminal
Brand Name	PAX
Model Name	D210-W
Marketing Name	D210-W
FCC ID	V5PD210WF
EUT supports Radios application	WLAN2.4GHz 802.11b/g/n HT20 / RFID
HW Version	D210-XXX-XXX
SW Version	V1.XX
EUT Stage	Identical Prototype

Remark: The above EUT's information was declared by manufacturer. Please refer to the specifications or user's manual for more detailed description.

1.4 Product Specification of Equipment Under Test

Product Specification subjective to this standard	
Tx/Rx Channel Frequency Range	2412 MHz ~ 2462 MHz
Maximum (Peak) Output Power to Antenna	802.11b : 16.26 dBm (0.0423 W) 802.11g : 17.12 dBm (0.0515 W) 802.11n HT20 : 17.24 dBm (0.0530 W)
99% Occupied Bandwidth	802.11b : 12.20 MHz 802.11g : 17.80 MHz 802.11n HT20 : 18.50 MHz
Antenna Type	FPC Antenna with gain 0.85 dBi
Type of Modulation	802.11b : DSSS (DBPSK / DQPSK / CCK) 802.11g/n : OFDM (BPSK / QPSK / 16QAM / 64QAM)



1.5 Modification of EUT

No modifications are made to the EUT during all test items.

1.6 Testing Site

Test Site	SPORTON INTERNATIONAL (KUNSHAN) INC.	
Test Site Location	No. 3-2, PingXiang Road, Kunshan, Jiangsu Province, P.R.C. TEL: +86-0512-5790-0158 FAX: +86-0512-5790-0958	
Test Site No.	Sporton Site No.	FCC/IC Registration No.
	TH01-KS	149928/4086E-1

Test Site	SPORTON INTERNATIONAL (SHENZHEN) INC.	
Test Site Location	No. 3 Building, the third floor of south, Shahe River west, Fengzeyuan warehouse, Nanshan District, Shenzhen, Guangdong, P.R.C. TEL: +86-755-3320-2398	
Test Site No.	Sporton Site No.	FCC/IC Registration No.
	CO01-SZ	03CH01-SZ

Note: The test site complies with ANSI C63.4 2003 requirement.

1.7 Applied Standards

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

- ♦ FCC Part 15 Subpart C §15.247
- ♦ FCC KDB Publication No. 558074 D01 DTS Meas. Guidance v03r01
- ♦ ANSI C63.4-2003
- ♦ IC RSS-210 Issue 8
- ♦ IC RSS-Gen Issue 3
- ♦ NOTICE 2012-DRS0126

Remark:

1. All test items were verified and recorded according to the standards and without any deviation during the test.
2. This EUT has also been tested and complied with the requirements of FCC Part 15, Subpart B, recorded in a separate test report.
3. Per the section 2.2.3 of Notice of 2012-DRS0126, “ Receivers Excluded from Industry Canada Requirements”, only radiocommunication receivers operating in stand-alone mode within the band 30-960 MHz and scanner receivers are subject to Industry Canada requirements.

2 Test Configuration of Equipment Under Test

The EUT has been associated with peripherals and configuration operated in a manner tended to maximize its emission characteristics in a typical application. Frequency range investigated: conducted emission (150 kHz to 30 MHz) and radiated emission (9 kHz to the 10th harmonic of the highest fundamental frequency or to 40 GHz, whichever is lower).

The final configuration from all the combinations and the worst-case data rates were investigated by measuring the maximum power across all the data rates and modulation modes under section 2.2.

Based on the worst configuration found above, the RF power setting is set individually to meet FCC compliance limit for the final conducted and radiated tests shown in section 2.3.

2.1 Carrier Frequency Channel

Frequency Band	Channel	Freq. (MHz)	Channel	Freq. (MHz)
2400-2483.5 MHz	1	2412	7	2442
	2	2417	8	2447
	3	2422	9	2452
	4	2427	10	2457
	5	2432	11	2462
	6	2437	-	-

2.2 Pre-Scanned RF Power

Preliminary tests were performed in different data rate and data rate associated with the highest power were chosen for full test shown in the following tables.

Channel	Frequency	2.4GHz 802.11b RF Power (dBm)			
		DSSS Data Rate			
		1 Mbps	2 Mbps	5.5 Mbps	11 Mbps
CH 01	2412 MHz	16.11	16.13	16.03	16.09
CH 06	2437 MHz	16.06	16.09	16.06	16.04
CH 11	2462 MHz	16.26	16.25	16.13	16.18

Channel	Frequency	2.4GHz 802.11g RF Power (dBm)							
		OFDM Data Rate							
		6 Mbps	9 Mbps	12Mbps	18Mbps	24Mbps	36Mbps	48Mbps	54Mbps
CH 01	2412 MHz	16.80	16.63	16.72	16.75	16.61	16.57	16.61	16.69
CH 06	2437 MHz	16.62	16.73	16.78	16.84	16.92	16.68	16.71	16.74
CH 11	2462 MHz	17.12	17.08	17.03	17.05	16.97	14.21	14.18	14.32

Channel	Frequency	2.4GHz 802.11n HT20 RF Power (dBm)							
		OFDM Data Rate							
		MCS0	MCS1	MCS2	MCS3	MCS4	MCS5	MCS6	MCS7
CH 01	2412 MHz	16.80	16.81	16.91	16.88	16.86	16.82	16.83	16.88
CH 06	2437 MHz	17.02	17.03	16.95	16.84	17.06	16.98	16.99	17.12
CH 11	2462 MHz	17.24	17.18	17.13	17.12	17.08	17.02	16.99	17.09


2.3 Test Mode

Final results of test modes, data rates and test channels are shown as following table.


Test Cases				
	Test Items	Mode	Data Rate	Test Channel
Conducted TCs	6dB and 99% BW Power Spectral Density	802.11b	1 Mbps	1/6/11
		802.11g	6 Mbps	1/6/11
		802.11n HT20	MCS0	1/6/11
	Output Power	802.11b	1 Mbps	1/6/11
		802.11g	6 Mbps	1/6/11
		802.11n HT20	MCS0	1/6/11
	Conducted Band Edge	802.11b	1 Mbps	1/11
		802.11g	6 Mbps	1/11
		802.11n HT20	MCS0	1/11
	Conducted Spurious Emission	802.11b	1 Mbps	1/6/11
		802.11g	6 Mbps	1/6/11
		802.11n HT20	MCS0	1/6/11
Radiated TCs	Radiated Band Edge	802.11b	1 Mbps	1/11
		802.11g	6 Mbps	1/11
		802.11n HT20	MCS0	1/11
	Radiated Spurious Emission	802.11b	1 Mbps	1/6/11
		802.11g	6 Mbps	1/6/11
		802.11n HT20	MCS0	1/6/11
AC Conducted Emission	Mode 1 : WLAN Link + Adapter			

2.4 Connection Diagram of Test System

<WLAN Tx Mode>

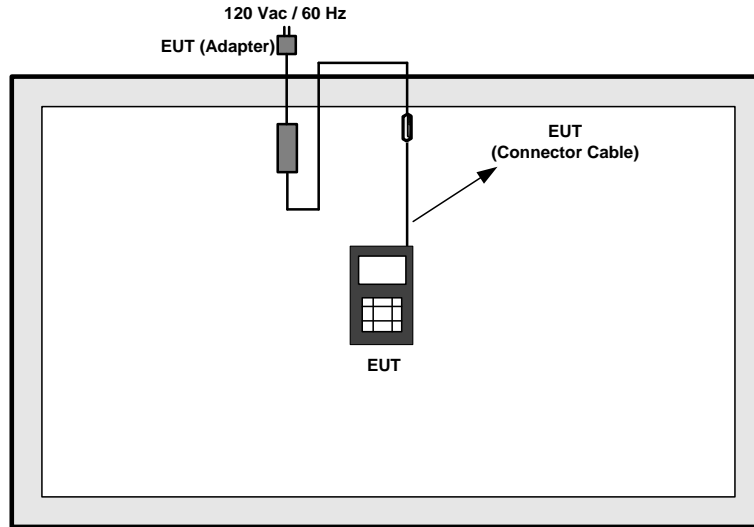

<AC Conducted Emission Mode>

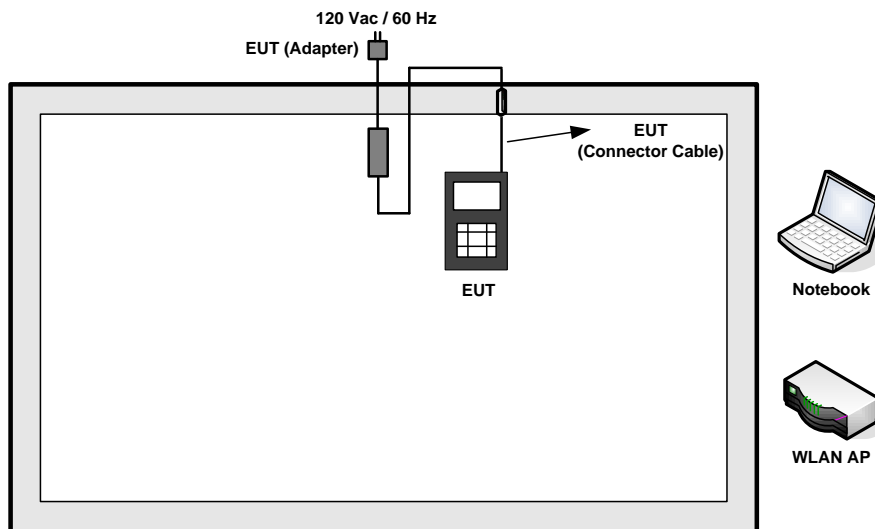

2.5 Support Unit used in test configuration and system

Item	Equipment	Trade Name	Model Name	FCC ID	Data Cable	Power Cord
1.	WLAN AP	doing	TL-WR740N	N/A	N/A	N/A
2.	Notebook	Dell	Vostro 2420	FCC DoC	N/A	AC I/P: Unshielded, 1.2 m DC O/P: Shielded, 1.8 m

2.6 EUT Operation Test Setup

For WLAN RF test items, an engineering test program was provided and enabled to make EUT continuous transmit/receive.

For AC power line conducted emissions, the EUT was set to connect with the WLAN AP under large package sizes transmission.

2.7 Measurement Results Explanation Example

For all conducted test items:

The offset level is set in the spectrum analyzer to compensate the RF cable loss and attenuator factor between EUT conducted output port and spectrum analyzer. With the offset compensation, the spectrum analyzer reading level is exactly the EUT RF output level.

Example:

The spectrum analyzer offset is derived from RF cable loss and attenuator factor.

Offset = RF cable loss + attenuator factor.

Following shows an offset computation example with cable loss 5.6 dB and 10dB attenuator.

$$\begin{aligned}
 \text{Offset(dB)} &= \text{RF cable loss(dB)} + \text{attenuator factor(dB)}. \\
 &= 5.6 + 10 = 15.6 \text{ (dB)}
 \end{aligned}$$

3 Test Result

3.1 6dB and 99% Bandwidth Measurement

3.1.1 Limit of 6dB and 99% Bandwidth

The minimum 6 dB bandwidth shall be at least 500 kHz.


3.1.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

3.1.3 Test Procedures

1. The testing follows FCC KDB Publication No. 558074 DTS D01 Meas. Guidance v03r01.
2. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.
3. Set to the maximum power setting and enable the EUT transmit continuously.
4. Make the measurement with the spectrum analyzer's resolution bandwidth (RBW) = 100 kHz. Set the Video bandwidth (VBW) = 300 kHz. In order to make an accurate measurement. The 6 dB bandwidth must be greater than 500 kHz.
5. For 99% Bandwidth Measurement, the spectrum analyzer's resolution bandwidth (RBW) = 1MHz and set the Video bandwidth (VBW) = 3MHz.
6. Measure and record the results in the test report.

3.1.4 Test Setup

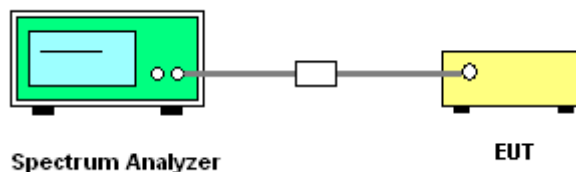




3.1.5 Test Result of 6dB and 99% Occupied Bandwidth

Test Band :	2.4GHz	Temperature :	23~24°C
Test Engineer :	Adonis Li	Relative Humidity :	47~48%

Mod.	Data Rate	N _{TX}	Channel	Freq. (MHz)	99% Bandwidth (MHz)	6dB Bandwidth (MHz)	6dB Bandwidth Min. Limit (MHz)	Pass/Fail
11b	1Mbps	1	1	2412	12.20	10.04	0.5	Pass
11b	1Mbps	1	6	2437	12.20	10.04	0.5	Pass
11b	1Mbps	1	11	2462	12.20	10.04	0.5	Pass
11g	6Mbps	1	1	2412	17.80	16.64	0.5	Pass
11g	6Mbps	1	6	2437	17.75	16.52	0.5	Pass
11g	6Mbps	1	11	2462	17.75	16.52	0.5	Pass
HT20	MCS0	1	1	2412	18.50	17.80	0.5	Pass
HT20	MCS0	1	6	2437	18.50	17.76	0.5	Pass
HT20	MCS0	1	11	2462	18.45	17.76	0.5	Pass

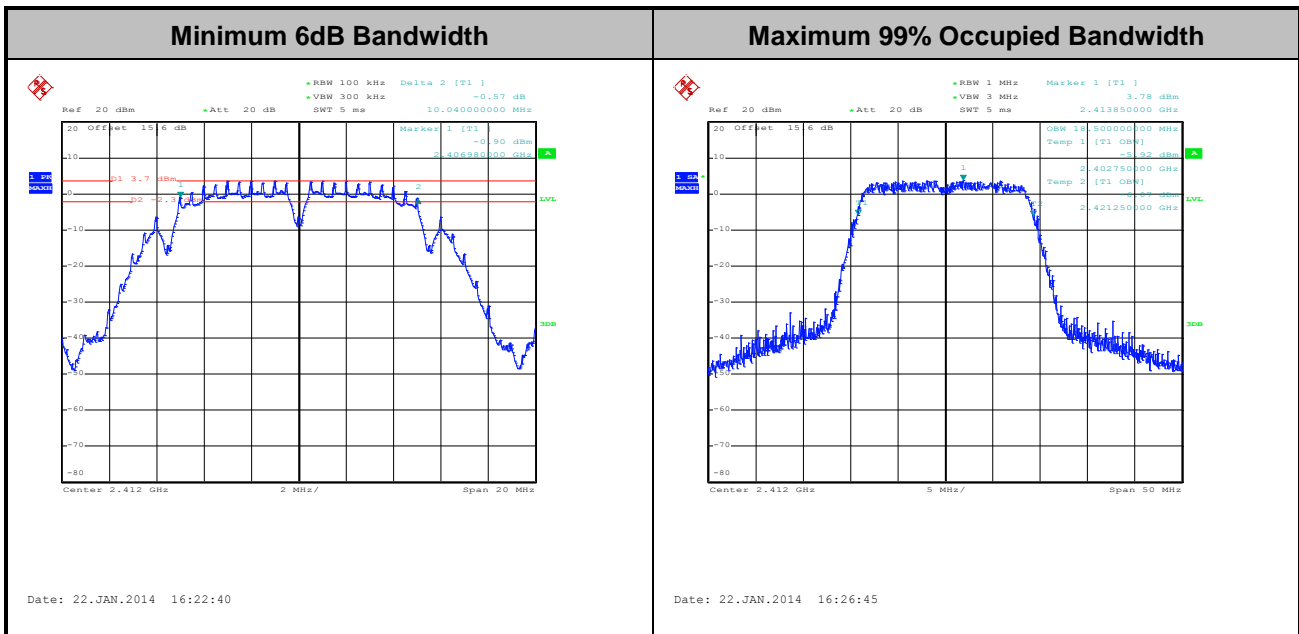

Note: The occupied channel bandwidth is maintained within the band of operation for all of the modulations.

3.2 Output Power Measurement

3.2.1 Limit of Output Power

For systems using digital modulation in the 2400-2483.5MHz, the limit for peak output power is 30dBm. If transmitting Antenna of directional gain greater than 6dBi are used the peak output power from the intentional radiator shall be reduced below the above stated value by the amount in dB that the directional gain of the Antenna exceeds 6 dBi. In case of point-to-point operation, the limit has to be reduced by 1dB for every 3dB that the directional gain of the Antenna exceeds 6dBi.


3.2.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

3.2.3 Test Procedures

1. The testing follows the Measurement Procedure of FCC KDB No. 558074 DTS D01 Meas. Guidance v03r01.
2. The RF output of EUT was connected to the power meter by RF cable and attenuator. The path loss was compensated to the results for each measurement.
3. Set to the maximum power setting and enable the EUT transmit continuously.
4. Measure the conducted output power and record the results in the test report.

3.2.4 Test Setup

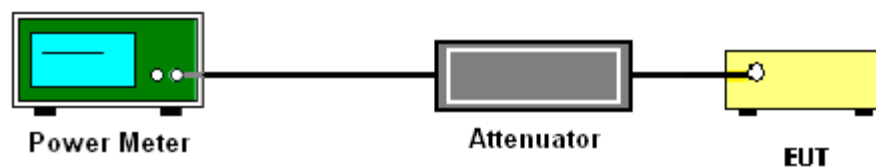



3.2.5 Test Result of Peak Output Power

Test Mode :	2.4GHz	Temperature :	23~24°C
Test Engineer :	Adonis Li	Relative Humidity :	47~48%

Mod.	Data Rate	N _{TX}	Channel	Freq. (MHz)	RF Output Power (dBm)	Power Limit (dBm)	DG (dBi)	Pass/Fail
11b	1Mbps	1	1	2412	16.11	30	0.85	Pass
11b	1Mbps	1	6	2437	16.06	30	0.85	Pass
11b	1Mbps	1	11	2462	16.26	30	0.85	Pass
11g	6Mbps	1	1	2412	16.80	30	0.85	Pass
11g	6Mbps	1	6	2437	16.62	30	0.85	Pass
11g	6Mbps	1	11	2462	17.12	30	0.85	Pass
HT20	MCS0	1	1	2412	16.80	30	0.85	Pass
HT20	MCS0	1	6	2437	17.02	30	0.85	Pass
HT20	MCS0	1	11	2462	17.24	30	0.85	Pass

Note: Measured power (dBm) has offset with cable loss.



3.2.6 Test Result of Average output Power (Reporting Only)

Test Mode :	2.4GHz	Temperature :	23~24°C
Test Engineer :	Adonis Li	Relative Humidity :	47~48%

Mod.	Data Rate	N _{TX}	Channel	Freq. (MHz)	Duty Factor (dB)	Average Output Power (dBm)	Power Limit (dBm)	DG (dBi)	Pass/Fail
11b	1Mbps	1	1	2412	0.00	12.36	30	0.85	Pass
11b	1Mbps	1	6	2437	0.00	12.58	30	0.85	Pass
11b	1Mbps	1	11	2462	0.00	12.65	30	0.85	Pass
11g	6Mbps	1	1	2412	0.00	7.02	30	0.85	Pass
11g	6Mbps	1	6	2437	0.00	7.25	30	0.85	Pass
11g	6Mbps	1	11	2462	0.00	7.37	30	0.85	Pass
HT20	MCS0	1	1	2412	0.00	7.39	30	0.85	Pass
HT20	MCS0	1	6	2437	0.00	7.74	30	0.85	Pass
HT20	MCS0	1	11	2462	0.00	7.79	30	0.85	Pass

Note: Measured power (dBm) has offset with cable loss and duty factor.

3.3 Power Spectral Density Measurement

3.3.1 Limit of Power Spectral Density

The peak power spectral density shall not be greater than 8dBm in any 3kHz band at any time interval of continuous transmission.


3.3.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

3.3.3 Test Procedures

1. The testing follows Measurement Procedure 10.2 Method PKPSD of FCC KDB Publication No. 558074 D01 DTS Meas. Guidance v03r01
2. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.
3. Set to the maximum power setting and enable the EUT transmit continuously.
4. Make the measurement with the spectrum analyzer's resolution bandwidth (RBW) = 3 kHz. Video bandwidth VBW = 10 kHz In order to make an accurate measurement, set the span to 1.5 times DTS Channel Bandwidth. (6dB BW)
5. Detector = peak, Sweep time = auto couple, Trace mode = max hold, Allow trace to fully stabilize. Use the peak marker function to determine the maximum power level.
6. Measure and record the results in the test report.

3.3.4 Test Setup

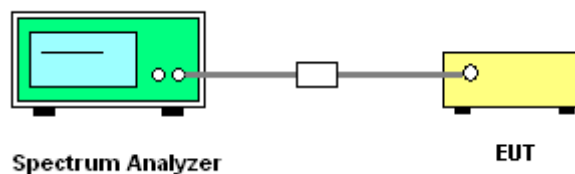


3.3.5 Test Result of Power Spectral Density

Test Mode :	2.4GHz	Temperature :	23~24°C
Test Engineer :	Adonis Li	Relative Humidity :	47~48%

Mod.	Data Rate	N _{TX}	Channel	Freq. (MHz)	Peak Power Density (dBm/3kHz)	Max. Limits (dBm/3kHz)	DG (dBi)	Pass/Fail
11b	1Mbps	1	1	2412	-6.50	8	0.85	Pass
11b	1Mbps	1	6	2437	-6.03	8	0.85	Pass
11b	1Mbps	1	11	2462	-6.29	8	0.85	Pass
11g	6Mbps	1	1	2412	-18.22	8	0.85	Pass
11g	6Mbps	1	6	2437	-18.25	8	0.85	Pass
11g	6Mbps	1	11	2462	-18.08	8	0.85	Pass
HT20	MCS0	1	1	2412	-18.88	8	0.85	Pass
HT20	MCS0	1	6	2437	-18.23	8	0.85	Pass
HT20	MCS0	1	11	2462	-18.81	8	0.85	Pass

Note: Measured power density (dBm) has offset with cable loss.

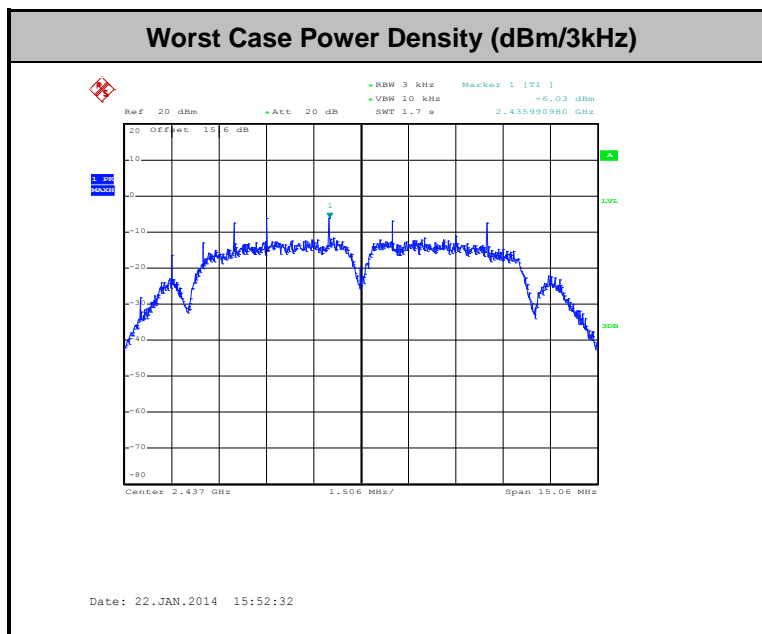

3.4 Conducted Band Edges and Spurious Emission Measurement

3.4.1 Limit of Conducted Band Edges and Spurious Emission Measurement

In any 100 kHz bandwidth outside of the authorized frequency band, the emissions which fall in the non-restricted bands shall be attenuated at least 20 dB / 30dB relative to the maximum PSD level in 100 kHz by RF conducted measurement and radiated emissions which fall in the restricted bands, as defined in Section 15.205(a), must also comply with the radiated emission limits specified in Section 15.209(a).


3.4.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

3.4.3 Test Procedures

1. The testing follows FCC KDB Publication No. 558074 D01 DTS Meas. Guidance v03r01.
2. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.
3. Set to the maximum power setting and enable the EUT transmit continuously.
4. Set RBW = 100 kHz, VBW=300 kHz, Peak Detector. Unwanted Emissions measured in any 100 kHz bandwidth outside of the authorized frequency band shall be attenuated by at least 20 dB relative to the maximum in-band peak PSD level in 100 kHz when maximum peak conducted output power procedure is used. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, the attenuation required under this paragraph shall be 30 dB instead of 20 dB per 15.247(d).
5. Measure and record the results in the test report.
6. The RF fundamental frequency should be excluded against the limit line in the operating frequency band.


3.4.4 Test Setup

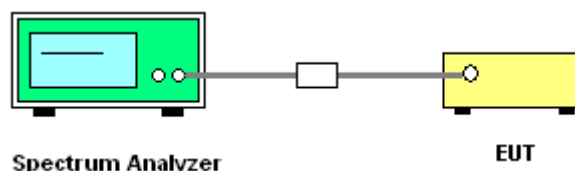



3.4.5 Test Result of Conducted Band Edges and Spurious Emission

Test Mode :	802.11b	Temperature :	23~24°C
Test Band :	2.4GHz Low	Relative Humidity :	47~48%
Test Channel :	01	Test Engineer :	Adonis Li

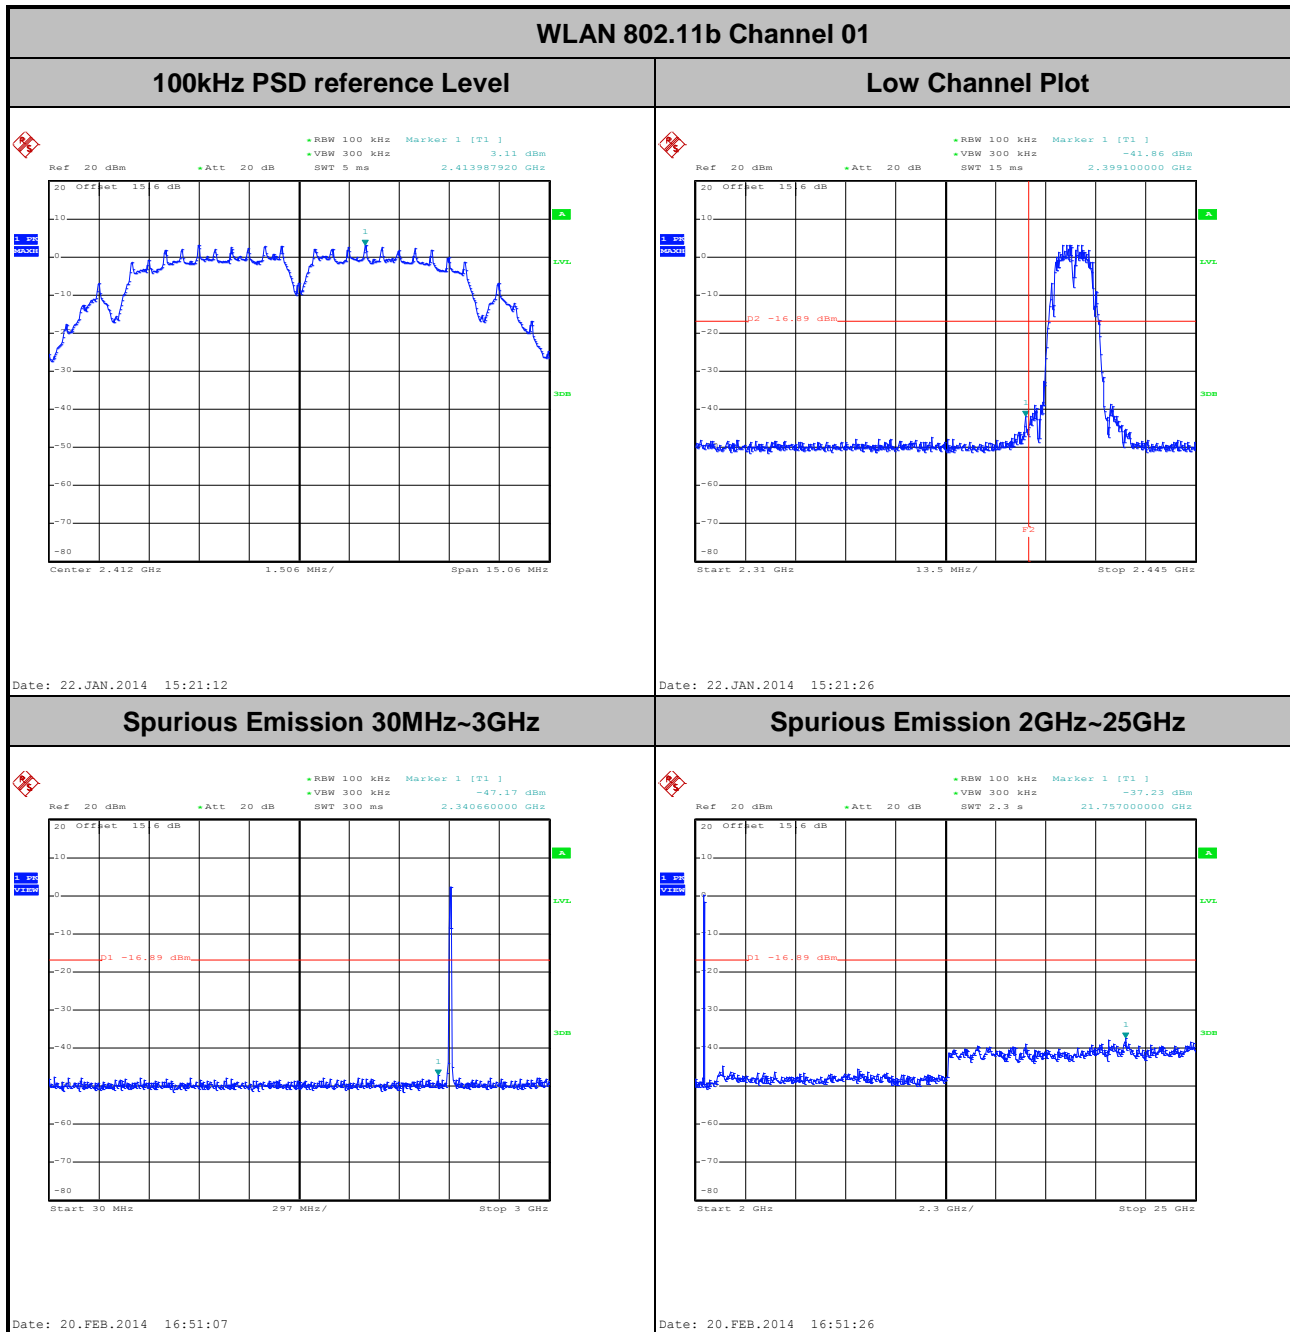




Test Mode :	802.11b	Temperature :	23~24°C
Test Band :	2.4GHz Mid	Relative Humidity :	47~48%
Test Channel :	06	Test Engineer :	Adonis Li


WLAN 802.11b Channel 06

100kHz PSD reference Level

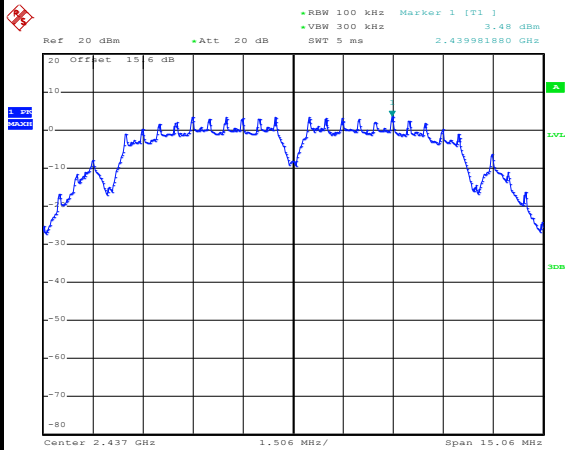


Date: 22.JAN.2014 15:52:41

Spurious Emission 30MHz~3GHz

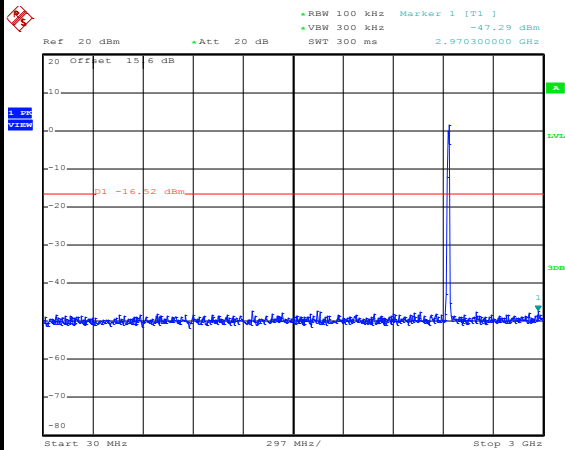

Date: 20.FEB.2014 16:54:02

Spurious Emission 2GHz~25GHz

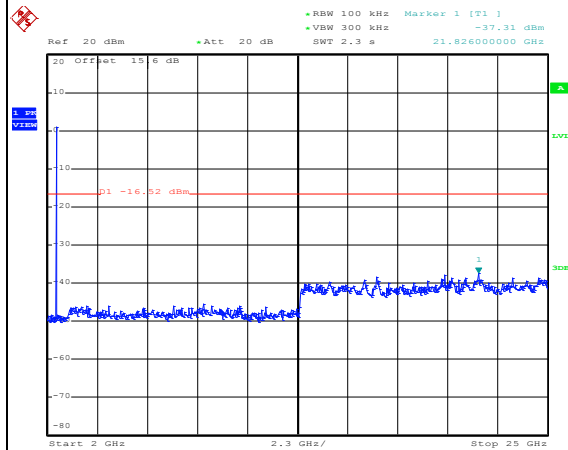


Date: 20.FEB.2014 16:54:20



Test Mode :	802.11b	Temperature :	23~24°C
Test Band :	2.4GHz High	Relative Humidity :	47~48%
Test Channel :	11	Test Engineer :	Adonis Li


WLAN 802.11b Channel 11

100kHz PSD reference Level

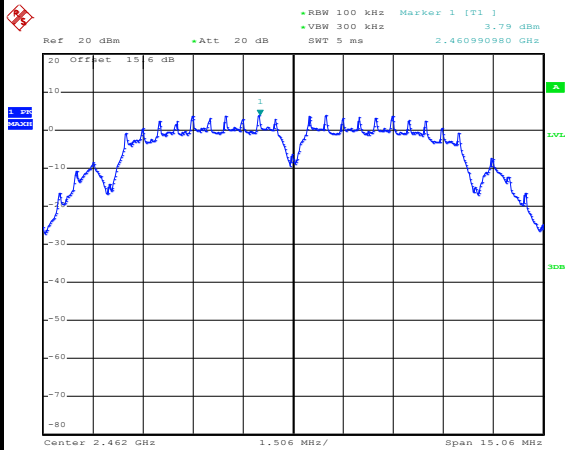


Date: 22.JAN.2014 15:56:19

High Channel Plot

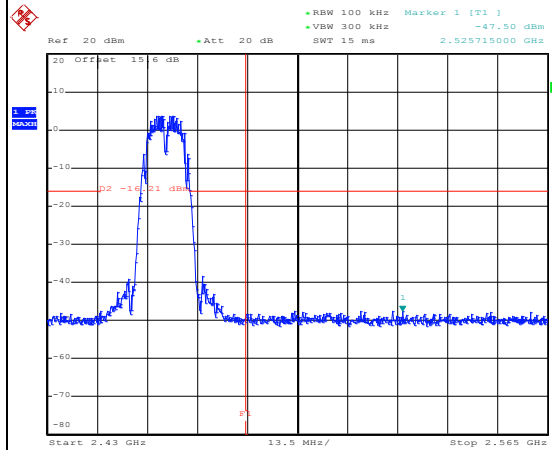


Date: 22.JAN.2014 15:56:33

Spurious Emission 30MHz~3GHz

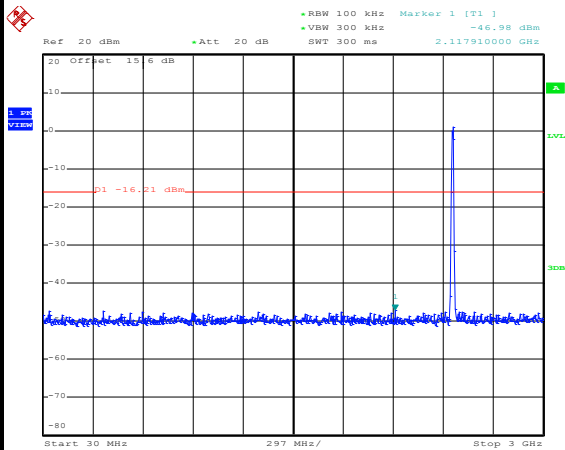

Date: 20.FEB.2014 16:55:10

Spurious Emission 2GHz~25GHz

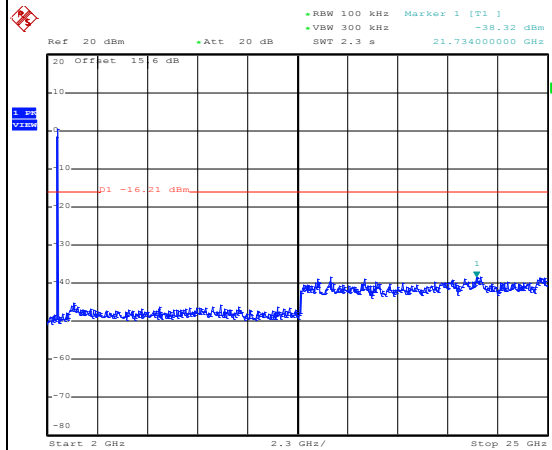


Date: 20.FEB.2014 16:55:28



Test Mode :	802.11g	Temperature :	23~24°C
Test Band :	2.4GHz Low	Relative Humidity :	47~48%
Test Channel :	01	Test Engineer :	Adonis Li


WLAN 802.11g Channel 01

100kHz PSD reference Level

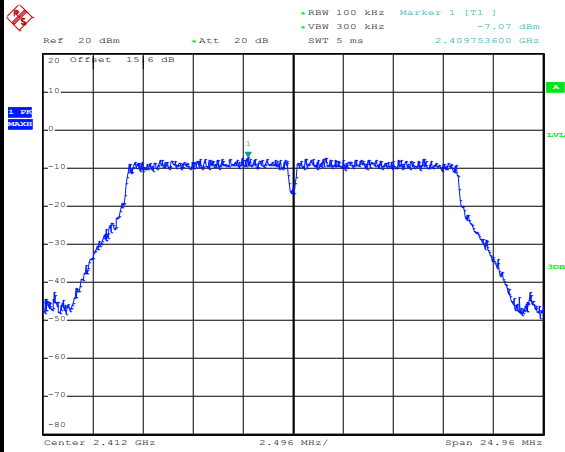


Date: 22.JAN.2014 15:59:43

Low Channel Plot

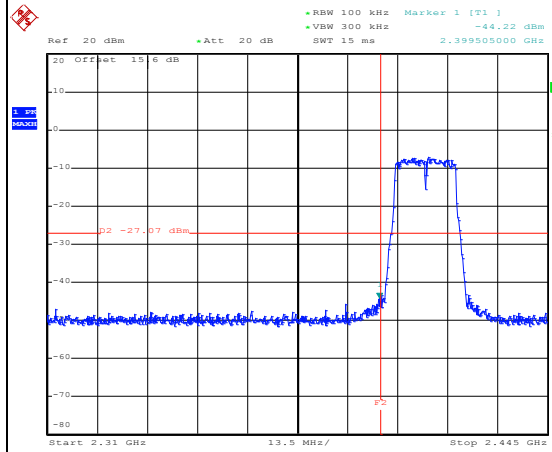


Date: 22.JAN.2014 15:59:57

Spurious Emission 30MHz~3GHz

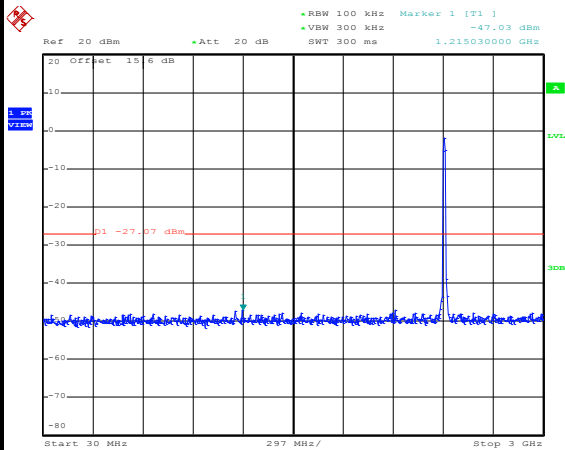

Date: 20.FEB.2014 16:59:51

Spurious Emission 2GHz~25GHz

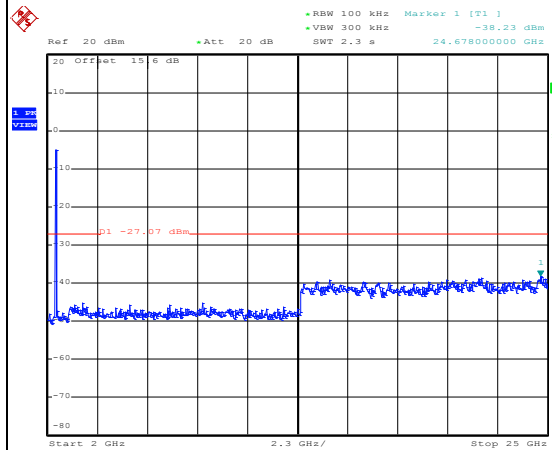


Date: 20.FEB.2014 17:00:09



Test Mode :	802.11g	Temperature :	23~24°C
Test Band :	2.4GHz Mid	Relative Humidity :	47~48%
Test Channel :	06	Test Engineer :	Adonis Li


WLAN 802.11g Channel 06

100kHz PSD reference Level

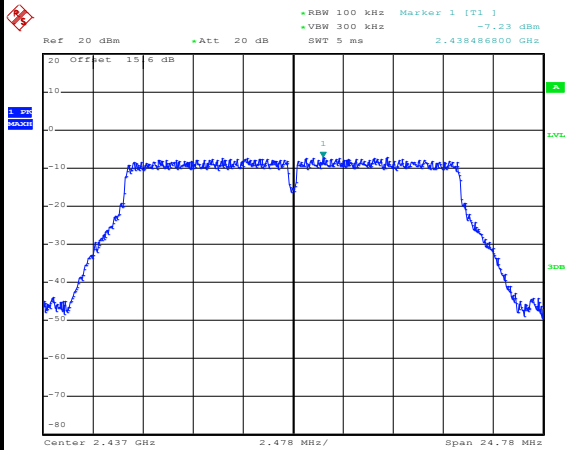


Date: 22.JAN.2014 16:03:15

Spurious Emission 30MHz~3GHz

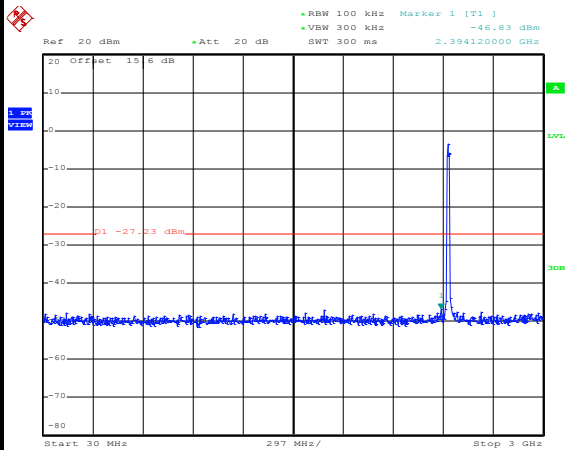

Date: 20.FEB.2014 17:02:01

Spurious Emission 2GHz~25GHz

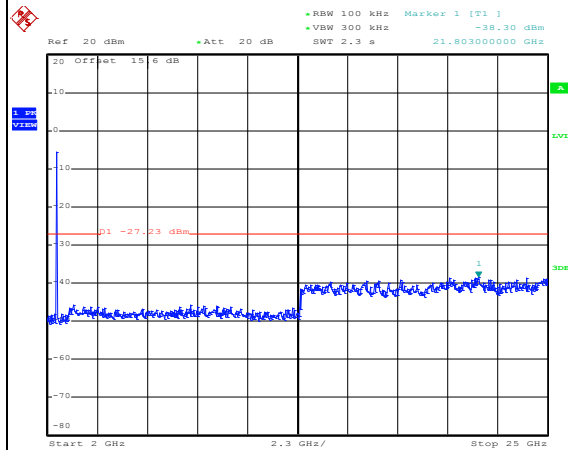


Date: 20.FEB.2014 17:02:20



Test Mode :	802.11g	Temperature :	23~24°C
Test Band :	2.4GHz High	Relative Humidity :	47~48%
Test Channel :	11	Test Engineer :	Adonis Li


WLAN 802.11g Channel 11

100kHz PSD reference Level

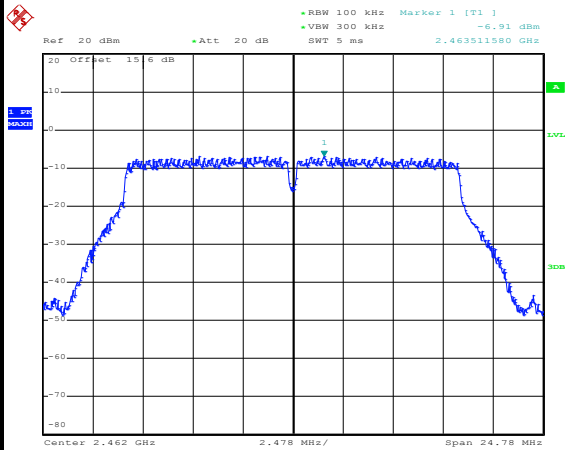


Date: 22.JAN.2014 16:37:20

High Channel Plot

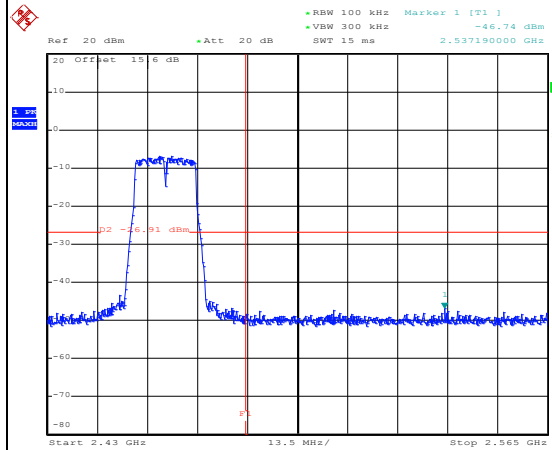


Date: 22.JAN.2014 16:37:34

Spurious Emission 30MHz~3GHz

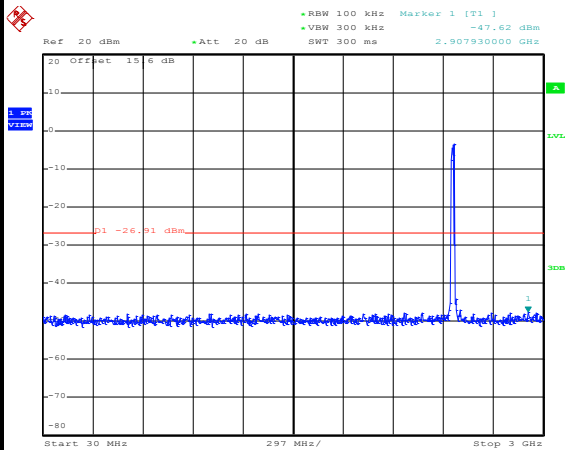

Date: 20.FEB.2014 17:16:47

Spurious Emission 2GHz~25GHz

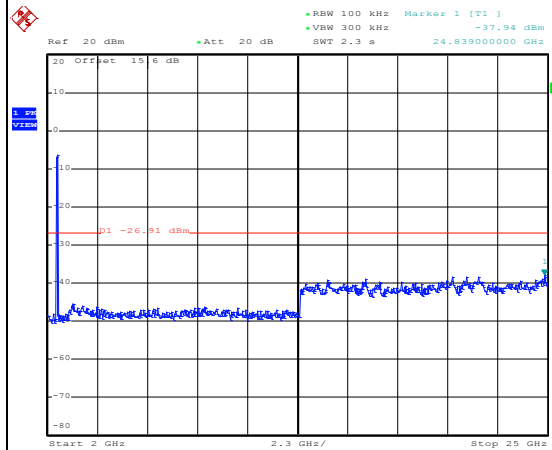


Date: 20.FEB.2014 17:17:05



Test Mode :	802.11n HT20	Temperature :	23~24°C
Test Band :	2.4GHz Low	Relative Humidity :	47~48%
Test Channel :	01	Test Engineer :	Adonis Li


WLAN 802.11n HT20 Channel 01

100kHz PSD reference Level

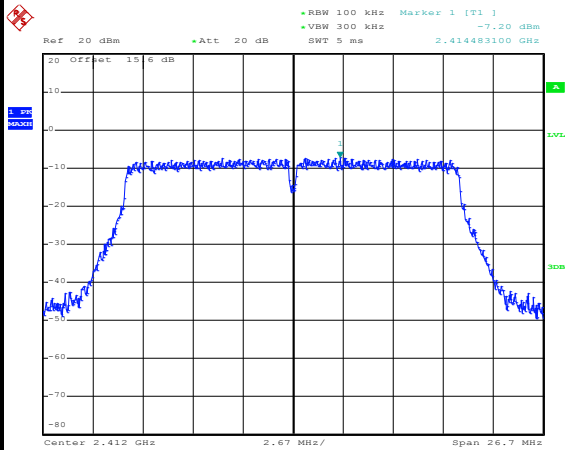


Date: 22.JAN.2014 16:25:42

Low Channel Plot

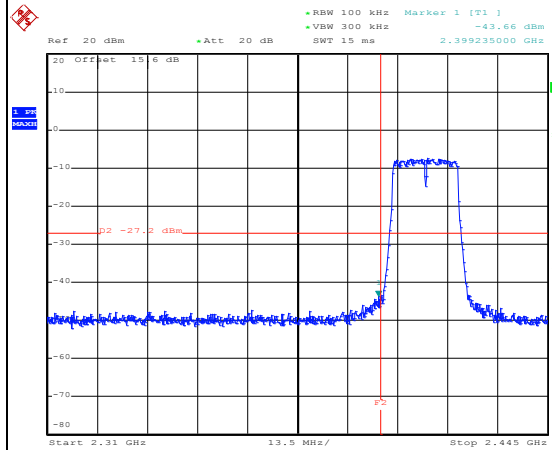


Date: 22.JAN.2014 16:25:56

Spurious Emission 30MHz~3GHz

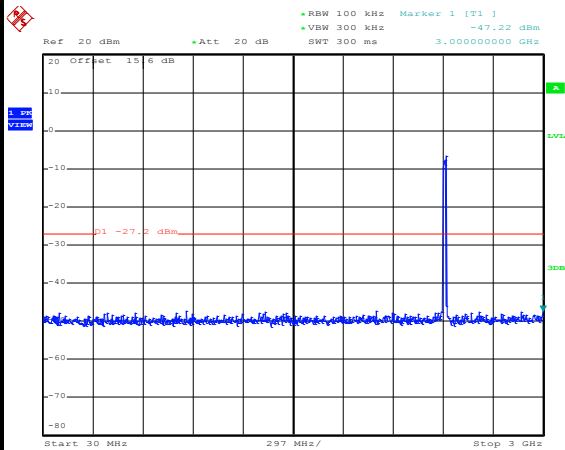

Date: 20.FEB.2014 17:05:15

Spurious Emission 2GHz~25GHz

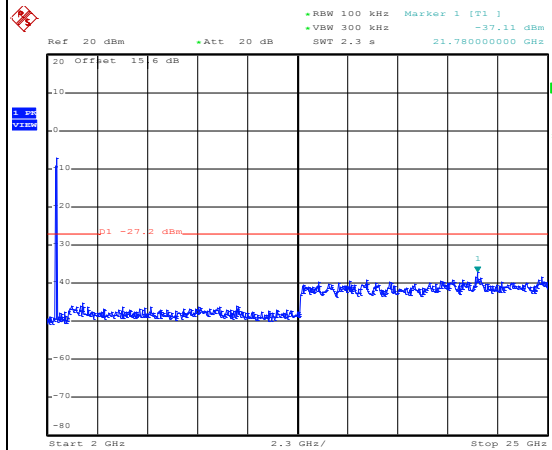


Date: 20.FEB.2014 17:05:34



Test Mode :	802.11n HT20	Temperature :	23~24°C
Test Band :	2.4GHz Mid	Relative Humidity :	47~48%
Test Channel :	06	Test Engineer :	Adonis Li


WLAN 802.11n HT20 Channel 06

100kHz PSD reference Level

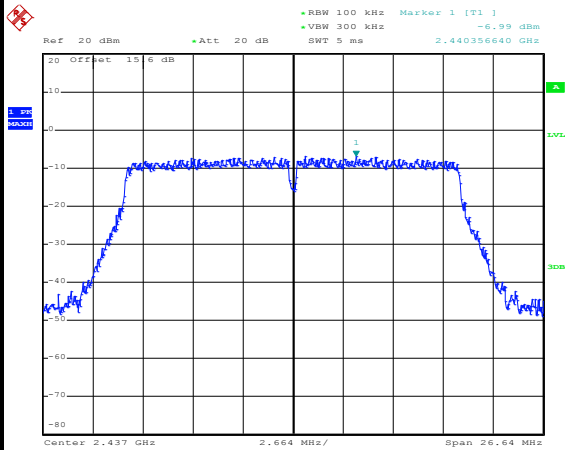


Date: 22.JAN.2014 16:15:42

Spurious Emission 30MHz~3GHz

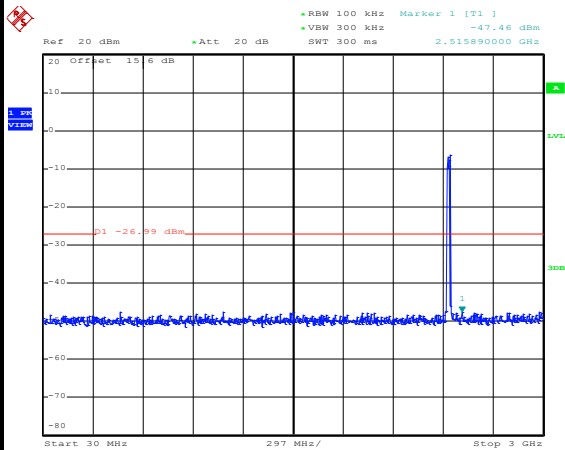

Date: 20.FEB.2014 17:06:20

Spurious Emission 2GHz~25GHz

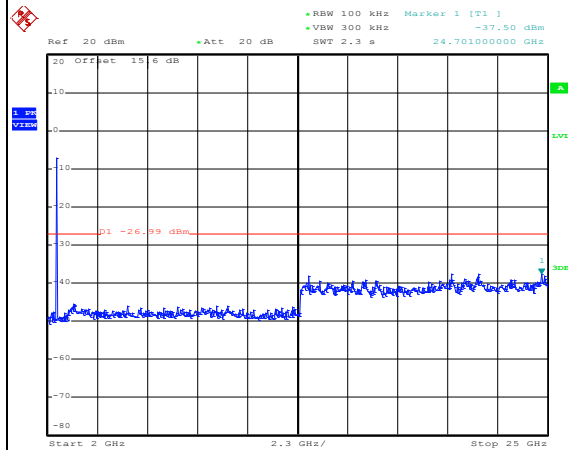


Date: 20.FEB.2014 17:06:38



Test Mode :	802.11n HT20	Temperature :	23~24°C
Test Band :	2.4GHz High	Relative Humidity :	47~48%
Test Channel :	11	Test Engineer :	Adonis Li


WLAN 802.11n HT20 Channel 11

100kHz PSD reference Level

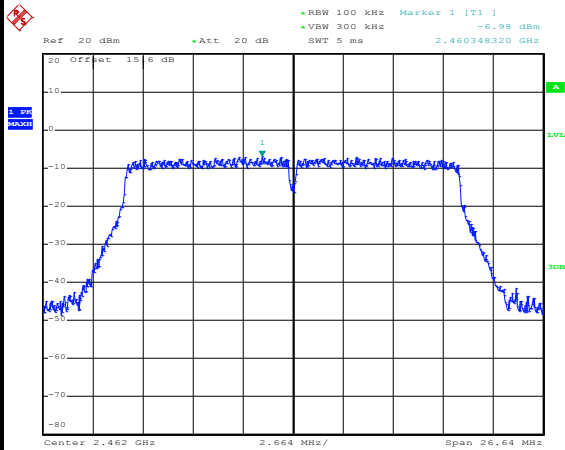


Date: 22.JAN.2014 16:18:20

High Channel Plot

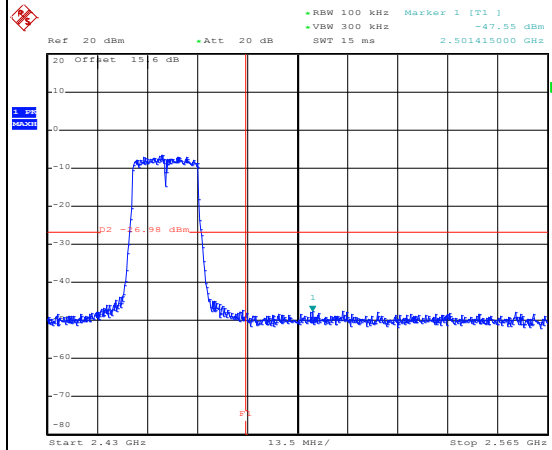


Date: 22.JAN.2014 16:18:34

Spurious Emission 30MHz~3GHz

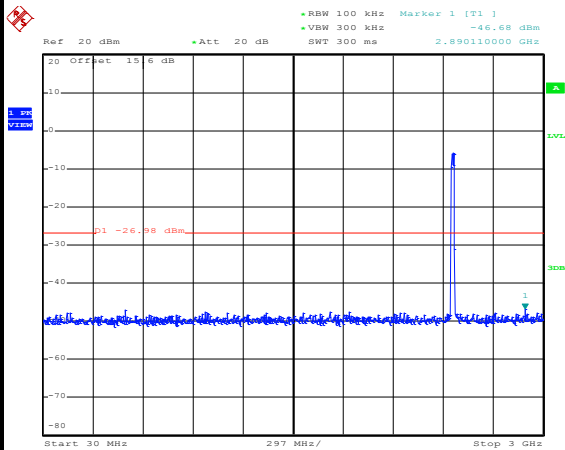

Date: 20.FEB.2014 17:13:32

Spurious Emission 2GHz~25GHz

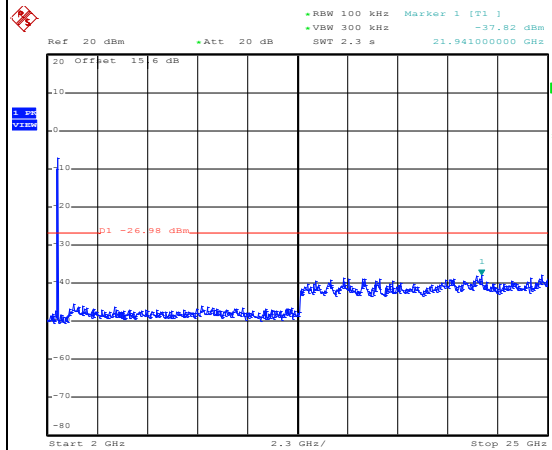

Date: 20.FEB.2014 17:13:50

3.5 Radiated Band Edges and Spurious Emission Measurement

3.5.1 Limit of Radiated band edge and Spurious Emission Measurement

In any 100 kHz bandwidth outside the intentional radiator frequency band, all harmonics/spurious must be at least 20 dB below the highest emission level within the authorized band. If the output power of this device was measured by spectrum analyzer, the attenuation under this paragraph shall be 30 dB instead of 20 dB. In addition, radiated emissions which fall in the restricted bands must also comply with the FCC section 15.209 limits as below.

Frequency (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009 – 0.490	2400/F(kHz)	300
0.490 – 1.705	24000/F(kHz)	30
1.705 – 30.0	30	30
30 – 88	100	3
88 – 216	150	3
216 - 960	200	3
Above 960	500	3

3.5.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.


3.5.3 Test Procedures

1. The testing follows FCC KDB Publication No. 558074 D01 DTS Meas. Guidance v03r01.
2. The EUT was arranged to its worst case and then tune the antenna tower (from 1 m to 4 m) and turntable (from 0 degree to 360 degrees) to find the maximum reading. A pre-amp and a high pass filter are used for the test in order to get better signal level.
3. The EUT was placed on a turntable with 0.8 meter above ground.
4. The EUT was set 3 meters from the interference receiving antenna, which was mounted on the top of a variable height antenna tower.
5. Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level
6. For measurement below 1GHz, If the emission level of the EUT measured by the peak detector is 3 dB lower than the applicable limit, the peak emission level will be reported. Otherwise, the emission measurement will be repeated using the quasi-peak detector and reported.
7. Use the following spectrum analyzer settings:
 - (1) Span shall wide enough to fully capture the emission being measured;
 - (2) Set RBW=100 kHz for $f < 1$ GHz; $VBW \geq RBW$; Sweep = auto; Detector function = peak; Trace = max hold;
 - (3) Set RBW = 1 MHz, VBW= 3MHz for $f \geq 1$ GHz for peak measurement.
 For average measurement:
 - $VBW = 10$ Hz, when duty cycle is no less than 98 percent.
 - $VBW \geq 1/T$, when duty cycle is less than 98 percent where T is the minimum transmission duration over which the transmitter is on and is transmitting at its maximum power control level for the tested mode of operation.


Band	Duty Cycle (%)	T(ms)	1/T(kHz)	VBW Setting
802.11b	100	-	-	10Hz
802.11g	100	-	-	10Hz
2.4GHz 802.11n HT20	100	-	-	10Hz

3.5.4 Test Setup


For radiated emissions below 30MHz

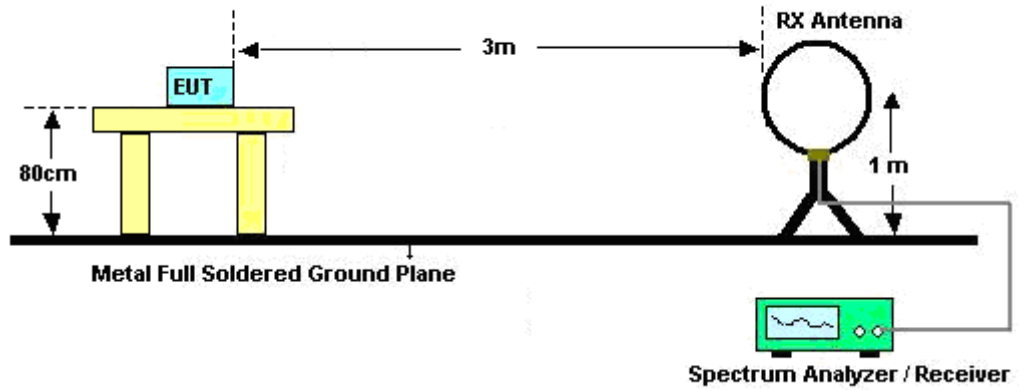

For radiated emissions from 30MHz to 1GHz

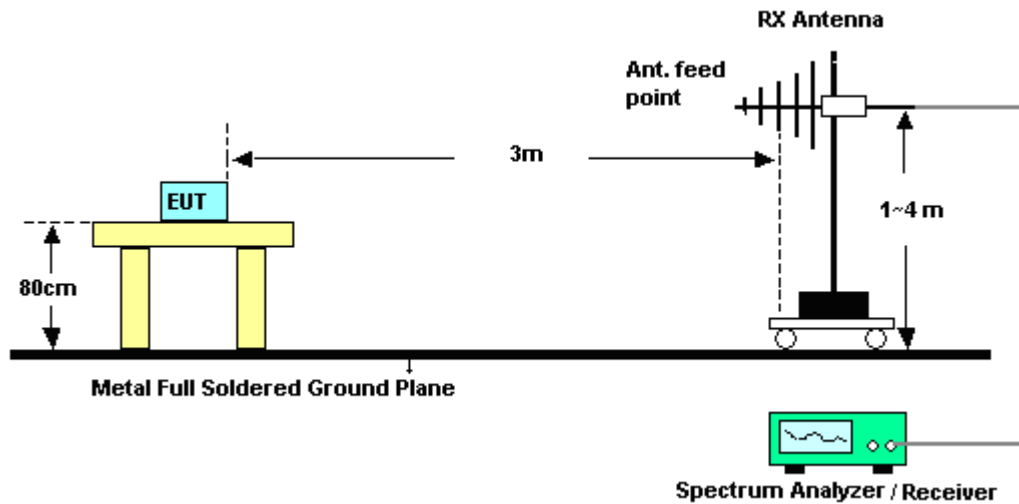

For radiated emissions above 1GHz

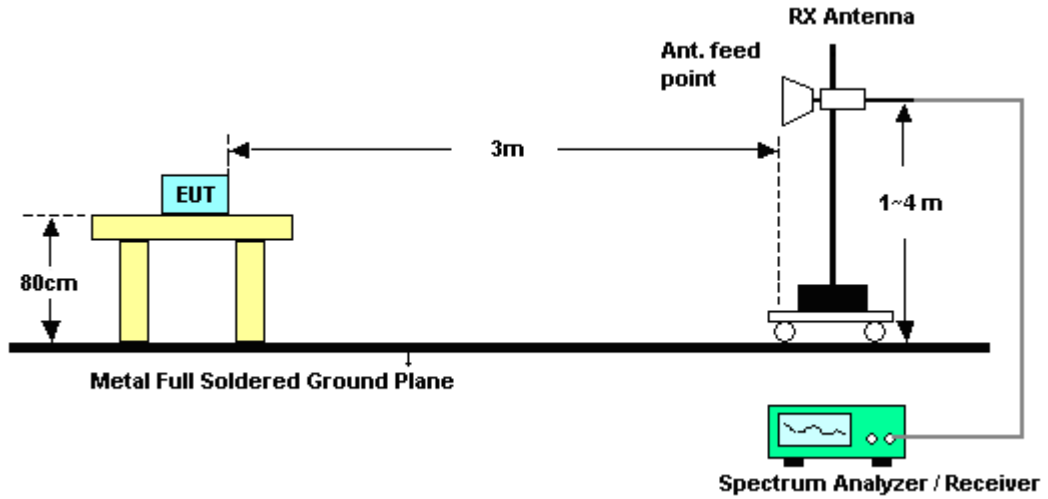

3.5.5 Test Results of Radiated Spurious Emissions (9kHz ~ 30MHz)

The low frequency, which started from 9 kHz to 30MHz, was pre-scanned and the result which was 20dB lower than the limit line per 15.31(o) was not reported.



3.5.6 Test Result of Radiated Spurious at Band Edges

Test Mode :	802.11b	Temperature :	23~25°C
Test Band :	Low	Relative Humidity :	48~52%
Test Channel :	01	Test Engineer :	Gavin Zhang

ANTENNA POLARITY : HORIZONTAL										
Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Remark
2389.38	52.26	-21.74	74	45.28	31.98	5.59	30.59	111	106	Peak
2386.32	40.83	-13.17	54	33.85	31.98	5.59	30.59	111	106	Average

ANTENNA POLARITY : VERTICAL										
Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Remark
2389.65	53.08	-20.92	74	46.1	31.98	5.59	30.59	100	108	Peak
2386.32	41.17	-12.83	54	34.19	31.98	5.59	30.59	100	108	Average

Test Mode :	802.11b	Temperature :	23~25°C
Test Band :	High	Relative Humidity :	48~52%
Test Channel :	11	Test Engineer :	Gavin Zhang

ANTENNA POLARITY : HORIZONTAL										
Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Remark
2487.43	54.94	-19.06	74	47.29	32.41	5.71	30.47	106	103	Peak
2486.92	43.36	-10.64	54	35.71	32.41	5.71	30.47	106	103	Average

ANTENNA POLARITY : VERTICAL										
Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Remark
2487.43	54.25	-19.75	74	46.6	32.41	5.71	30.47	100	260	Peak
2486.95	42.81	-11.19	54	35.16	32.41	5.71	30.47	100	260	Average



Test Mode :	802.11g	Temperature :	23~25°C
Test Band :	Low	Relative Humidity :	48~52%
Test Channel :	01	Test Engineer :	Gavin Zhang

ANTENNA POLARITY : HORIZONTAL										
Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Remark
2389.38	55.88	-18.12	74	48.9	31.98	5.59	30.59	110	104	Peak
2389.02	40.76	-13.24	54	33.78	31.98	5.59	30.59	110	104	Average

ANTENNA POLARITY : VERTICAL										
Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Remark
2389.83	59.77	-14.23	74	52.73	31.98	5.62	30.56	100	99	Peak
2389.02	42.35	-11.65	54	35.37	31.98	5.59	30.59	100	99	Average

Test Mode :	802.11g	Temperature :	23~25°C
Test Band :	High	Relative Humidity :	48~52%
Test Channel :	11	Test Engineer :	Gavin Zhang

ANTENNA POLARITY : HORIZONTAL										
Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Remark
2483.59	57.6	-16.4	74	49.95	32.41	5.71	30.47	106	103	Peak
2483.5	42.03	-11.97	54	34.38	32.41	5.71	30.47	106	103	Average

ANTENNA POLARITY : VERTICAL										
Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Remark
2483.71	56.13	-17.87	74	48.48	32.41	5.71	30.47	123	110	Peak
2483.5	41.2	-12.8	54	33.55	32.41	5.71	30.47	123	110	Average



Test Mode :	802.11n HT20	Temperature :	23~25°C
Test Band :	Low	Relative Humidity :	48~52%
Test Channel :	01	Test Engineer :	Gavin Zhang

ANTENNA POLARITY : HORIZONTAL										
Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Remark
2389.74	60.09	-13.91	74	53.11	31.98	5.59	30.59	136	103	Peak
2389.92	45.11	-8.89	54	38.07	31.98	5.62	30.56	136	103	Average

ANTENNA POLARITY : VERTICAL										
Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Remark
2389.56	62.7	-11.3	74	55.72	31.98	5.59	30.59	100	107	Peak
2389.83	46.81	-7.19	54	39.77	31.98	5.62	30.56	100	107	Average

Test Mode :	802.11n HT20	Temperature :	23~25°C
Test Band :	High	Relative Humidity :	48~52%
Test Channel :	11	Test Engineer :	Gavin Zhang

ANTENNA POLARITY : HORIZONTAL										
Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Remark
2483.8	57.24	-16.76	74	49.59	32.41	5.71	30.47	133	245	Peak
2483.59	42.39	-11.61	54	34.74	32.41	5.71	30.47	133	245	Average

ANTENNA POLARITY : VERTICAL										
Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Remark
2483.62	60.59	-13.41	74	52.94	32.41	5.71	30.47	123	254	Peak
2483.56	44.48	-9.52	54	36.83	32.41	5.71	30.47	123	254	Average

3.5.7 Test Result of Radiated Spurious Emission (30MHz ~ 10th Harmonic)

Note: Pre-scanned all test modes and only choose the worst case mode recorded in the test report for radiated spurious emission below 1GHz.

Test Mode :	802.11b	Temperature :	23~25°C
Test Channel :	01	Relative Humidity :	48~52%
Test Engineer :	Gavin Zhang	Polarization :	Horizontal
Remark :	1. 2412 MHz is fundamental signal which can be ignored. 2. Average measurement was not performed if peak level went lower than the average limit.		

Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Remark
2412	103.66	-	-	96.53	32.07	5.62	30.56	111	106	Peak
2412	95.96	-	-	88.83	32.07	5.62	30.56	111	106	Average
4824	41.4	-32.6	74	56.48	33.82	8.36	57.26	102	185	Peak

Test Mode :	802.11b	Temperature :	23~25°C
Test Channel :	01	Relative Humidity :	48~52%
Test Engineer :	Gavin Zhang	Polarization :	Vertical
Remark :	1. 2412 MHz is fundamental signal which can be ignored. 2. Average measurement was not performed if peak level went lower than the average limit.		

Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Remark
2412	104.14	-	-	97.01	32.07	5.62	30.56	100	108	Peak
2412	96.43	-	-	89.3	32.07	5.62	30.56	100	108	Average
4824	45.5	-28.5	74	60.58	33.82	8.36	57.26	102	185	Peak



Test Mode :	802.11b	Temperature :	23~25°C
Test Channel :	06	Relative Humidity :	48~52%
Test Engineer :	Gavin Zhang	Polarization :	Horizontal
Remark :	1. 2437 MHz is fundamental signal which can be ignored. 2. Average measurement was not performed if peak level went lower than the average limit.		

Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Remark
2437	102.62	-	-	95.26	32.24	5.65	30.53	114	125	Peak
2437	95.42	-	-	88.06	32.24	5.65	30.53	114	125	Average
4874	41.11	-32.89	74	55.94	33.93	8.41	57.17	103	200	Peak
7311	37.29	-36.71	74	50.57	33.89	9.99	57.16	152	324	Peak

Test Mode :	802.11b	Temperature :	23~25°C
Test Channel :	06	Relative Humidity :	48~52%
Test Engineer :	Gavin Zhang	Polarization :	Vertical
Remark :	1. 2437 MHz is fundamental signal which can be ignored. 2. Average measurement was not performed if peak level went lower than the average limit.		

Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Remark
2437	104.25	-	-	96.89	32.24	5.65	30.53	117	230	Peak
2437	96.75	-	-	89.39	32.24	5.65	30.53	117	230	Average
4874	42.47	-31.53	74	57.3	33.93	8.41	57.17	103	200	Peak
7311	37.21	-36.79	74	50.49	33.89	9.99	57.16	152	324	Peak



Test Mode :	802.11b	Temperature :	23~25°C
Test Channel :	11	Relative Humidity :	48~52%
Test Engineer :	Gavin Zhang	Polarization :	Horizontal
Remark :	1. 2462 MHz is fundamental signal which can be ignored. 2. Average measurement was not performed if peak level went lower than the average limit.		

Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Remark
2462	104.26	-	-	96.75	32.33	5.68	30.5	106	103	Peak
2462	96.78	-	-	89.27	32.33	5.68	30.5	106	103	Average
4924	43	-31	74	57.57	34.05	8.46	57.08	120	190	Peak
7386	36.35	-37.65	74	49.44	33.94	10.02	57.05	145	203	Peak

Test Mode :	802.11b	Temperature :	23~25°C
Test Channel :	11	Relative Humidity :	48~52%
Test Engineer :	Gavin Zhang	Polarization :	Vertical
Remark :	1. 2462 MHz is fundamental signal which can be ignored. 2. Average measurement was not performed if peak level went lower than the average limit.		

Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Remark
2462	103.76	-	-	96.25	32.33	5.68	30.5	100	260	Peak
2462	96.21	-	-	88.7	32.33	5.68	30.5	100	260	Average
4924	40.8	-33.2	74	55.37	34.05	8.46	57.08	120	190	Peak
7386	36.35	-37.65	74	49.44	33.94	10.02	57.05	145	203	Peak



Test Mode :	802.11g	Temperature :	23~25°C
Test Channel :	01	Relative Humidity :	48~52%
Test Engineer :	Gavin Zhang	Polarization :	Horizontal
Remark :	1. 2412 MHz is fundamental signal which can be ignored. 2. Average measurement was not performed if peak level went lower than the average limit.		

Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Remark
2412	97.14	-	-	90.01	32.07	5.62	30.56	200	0	Peak
2412	88.69	-	-	81.56	32.07	5.62	30.56	200	0	Average
4824	41.6	-32.4	74	56.68	33.82	8.36	57.26	102	185	Peak

Test Mode :	802.11g	Temperature :	23~25°C
Test Channel :	01	Relative Humidity :	48~52%
Test Engineer :	Gavin Zhang	Polarization :	Vertical
Remark :	1. 2412 MHz is fundamental signal which can be ignored. 2. Average measurement was not performed if peak level went lower than the average limit.		

Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Remark
2412	98.36	-	-	91.23	32.07	5.62	30.56	100	99	Peak
2412	89.52	-	-	82.39	32.07	5.62	30.56	100	99	Average
4824	43.74	-30.26	74	58.82	33.82	8.36	57.26	102	185	Peak



Test Mode :	802.11g	Temperature :	23~25°C
Test Channel :	06	Relative Humidity :	48~52%
Test Engineer :	Gavin Zhang	Polarization :	Horizontal
Remark :	1. 2437 MHz is fundamental signal which can be ignored. 2. Average measurement was not performed if peak level went lower than the average limit.		

Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Remark
2437	95.92	-	-	88.56	32.24	5.65	30.53	100	120	Peak
2437	87.38	-	-	80.02	32.24	5.65	30.53	100	120	Average
4874	40.84	-33.16	74	55.67	33.93	8.41	57.17	103	200	Peak
7311	37.36	-36.64	74	50.64	33.89	9.99	57.16	152	324	Peak

Test Mode :	802.11g	Temperature :	23~25°C
Test Channel :	06	Relative Humidity :	48~52%
Test Engineer :	Gavin Zhang	Polarization :	Vertical
Remark :	1. 2437 MHz is fundamental signal which can be ignored. 2. Average measurement was not performed if peak level went lower than the average limit.		

Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Remark
2437	97.8	-	-	90.44	32.24	5.65	30.53	100	118	Peak
2437	89.02	-	-	81.66	32.24	5.65	30.53	100	118	Average
4874	42.95	-31.05	74	57.78	33.93	8.41	57.17	103	200	Peak
7311	36.62	-37.38	74	49.9	33.89	9.99	57.16	152	324	Peak



Test Mode :	802.11g	Temperature :	23~25°C
Test Channel :	11	Relative Humidity :	48~52%
Test Engineer :	Gavin Zhang	Polarization :	Horizontal
Remark :	1. 2462 MHz is fundamental signal which can be ignored. 2. Average measurement was not performed if peak level went lower than the average limit.		

Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Remark
2462	97.59	-	-	90.08	32.33	5.68	30.5	106	103	Peak
2462	89.04	-	-	81.53	32.33	5.68	30.5	106	103	Average
4924	41.7	-32.3	74	56.27	34.05	8.46	57.08	120	190	Peak
7386	36.23	-37.77	74	49.32	33.94	10.02	57.05	145	203	Peak

Test Mode :	802.11g	Temperature :	23~25°C
Test Channel :	11	Relative Humidity :	48~52%
Test Engineer :	Gavin Zhang	Polarization :	Vertical
Remark :	1. 2462 MHz is fundamental signal which can be ignored. 2. Average measurement was not performed if peak level went lower than the average limit.		

Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Remark
2462	98.92	-	-	91.41	32.33	5.68	30.5	123	110	Peak
2462	90.17	-	-	82.66	32.33	5.68	30.5	123	110	Average
4924	41.34	-32.66	74	55.91	34.05	8.46	57.08	120	190	Peak
7386	36.9	-37.1	74	49.99	33.94	10.02	57.05	145	203	Peak



Test Mode :	2.4GHz 802.11n HT20	Temperature :	23~25°C
Test Channel :	01	Relative Humidity :	48~52%
Test Engineer :	Gavin Zhang	Polarization :	Horizontal
Remark :	1. 2412 MHz is fundamental signal which can be ignored. 2. Average measurement was not performed if peak level went lower than the average limit.		

Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Remark
104.69	28.58	-14.92	43.5	47.64	10.3	1.29	30.65	-	-	Peak
230.79	33.35	-12.65	46	49.98	11.8	1.8	30.23	-	-	Peak
384.05	33.07	-12.93	46	45.12	15.42	2.25	29.72	-	-	Peak
528.58	34.27	-11.73	46	43.35	17.58	2.63	29.29	-	-	Peak
815.7	38.4	-7.6	46	43.61	20.5	3.2	28.91	145	250	Peak
864.2	35.43	-10.57	46	40.35	20.63	3.3	28.85	-	-	Peak
2412	97.42	-	-	90.29	32.07	5.62	30.56	126	103	Peak
2412	88.83	-	-	81.7	32.07	5.62	30.56	126	103	Average
4824	41.03	-32.97	74	56.11	33.82	8.36	57.26	102	185	Peak



Test Mode :	2.4GHz 802.11n HT20	Temperature :	23~25°C
Test Channel :	01	Relative Humidity :	48~52%
Test Engineer :	Gavin Zhang	Polarization :	Vertical
Remark :	1. 2412 MHz is fundamental signal which can be ignored. 2. Average measurement was not performed if peak level went lower than the average limit.		

Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Remark
104.69	24.44	-19.06	43.5	43.5	10.3	1.29	30.65	-	-	Peak
232.73	24.67	-21.33	46	41.21	11.87	1.81	30.22	-	-	Peak
527.61	35.57	-10.43	46	44.67	17.57	2.62	29.29	132	208	Peak
719.67	31.76	-14.24	46	38.23	19.58	2.99	29.04	-	-	Peak
815.7	32.43	-13.57	46	37.64	20.5	3.2	28.91	-	-	Peak
911.73	35.5	-10.5	46	39.94	20.99	3.36	28.79	-	-	Peak
2412	99.35	-	-	92.22	32.07	5.62	30.56	100	107	Peak
2412	90.78	-	-	83.65	32.07	5.62	30.56	100	107	Average
4824	43.9	-30.1	74	58.98	33.82	8.36	57.26	102	185	Peak



Test Mode :	2.4GHz 802.11n HT20	Temperature :	23~25°C
Test Channel :	06	Relative Humidity :	48~52%
Test Engineer :	Gavin Zhang	Polarization :	Horizontal
Remark :	1. 2437 MHz is fundamental signal which can be ignored. 2. Average measurement was not performed if peak level went lower than the average limit.		

Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Remark
2437	98.49	-	-	91.13	32.24	5.65	30.53	162	104	Peak
2437	89.88	-	-	82.52	32.24	5.65	30.53	162	104	Average
4874	41.82	-32.18	74	56.65	33.93	8.41	57.17	103	200	Peak
7311	37.47	-36.53	74	50.75	33.89	9.99	57.16	152	324	Peak

Test Mode :	2.4GHz 802.11n HT20	Temperature :	23~25°C
Test Channel :	06	Relative Humidity :	48~52%
Test Engineer :	Gavin Zhang	Polarization :	Vertical
Remark :	1. 2437 MHz is fundamental signal which can be ignored. 2. Average measurement was not performed if peak level went lower than the average limit.		

Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Remark
2437	98.87	-	-	91.51	32.24	5.65	30.53	100	107	Peak
2437	90.57	-	-	83.21	32.24	5.65	30.53	100	107	Average
4874	42.91	-31.09	74	57.74	33.93	8.41	57.17	103	200	Peak
7311	36.53	-37.47	74	49.81	33.89	9.99	57.16	152	324	Peak



Test Mode :	2.4GHz 802.11n HT20	Temperature :	23~25°C
Test Channel :	11	Relative Humidity :	48~52%
Test Engineer :	Gavin Zhang	Polarization :	Horizontal
Remark :	1. 2462 MHz is fundamental signal which can be ignored. 2. Average measurement was not performed if peak level went lower than the average limit.		

Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Remark
2462	97.73	-	-	90.22	32.33	5.68	30.5	133	245	Peak
2462	88.84	-	-	81.33	32.33	5.68	30.5	133	245	Average
4924	41.23	-32.77	74	55.8	34.05	8.46	57.08	120	190	Peak
7386	36.89	-37.11	74	49.98	33.94	10.02	57.05	145	203	Peak

Test Mode :	2.4GHz 802.11n HT20	Temperature :	23~25°C
Test Channel :	11	Relative Humidity :	48~52%
Test Engineer :	Gavin Zhang	Polarization :	Vertical
Remark :	1. 2462 MHz is fundamental signal which can be ignored. 2. Average measurement was not performed if peak level went lower than the average limit.		

Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Remark
2462	97.25	-	-	89.74	32.33	5.68	30.5	123	254	Peak
2462	89.03	-	-	81.52	32.33	5.68	30.5	123	254	Average
4924	41.78	-32.22	74	56.35	34.05	8.46	57.08	120	190	Peak
7386	36.7	-37.3	74	49.79	33.94	10.02	57.05	145	203	Peak

3.6 AC Conducted Emission Measurement

3.6.1 Limit of AC Conducted Emission

For equipment that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed the limits in the following table.

Frequency of Emission (MHz)	Conducted Limit (dB μ V)	
	Quasi-Peak	Average
0.15-0.5	66 to 56*	56 to 46*
0.5-5	56	46
5-30	60	50

*Decreases with the logarithm of the frequency.


3.6.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

3.6.3 Test Procedures

1. The EUT was placed 0.4 meter from the conducting wall of the shielding room, and it was kept at least 80 centimeters from any other grounded conducting surface.
2. Connect EUT to the power mains through a line impedance stabilization network (LISN).
3. All the support units are connecting to the other LISN.
4. The LISN provides 50 ohm coupling impedance for the measuring instrument.
5. The FCC states that a 50 ohm, 50 microhenry LISN should be used.
6. Both sides of AC line were checked for maximum conducted interference.
7. The frequency range from 150 kHz to 30 MHz was searched.
8. Set the test-receiver system to Peak Detect Function and specified bandwidth with Maximum Hold Mode.

3.6.4 Test Setup

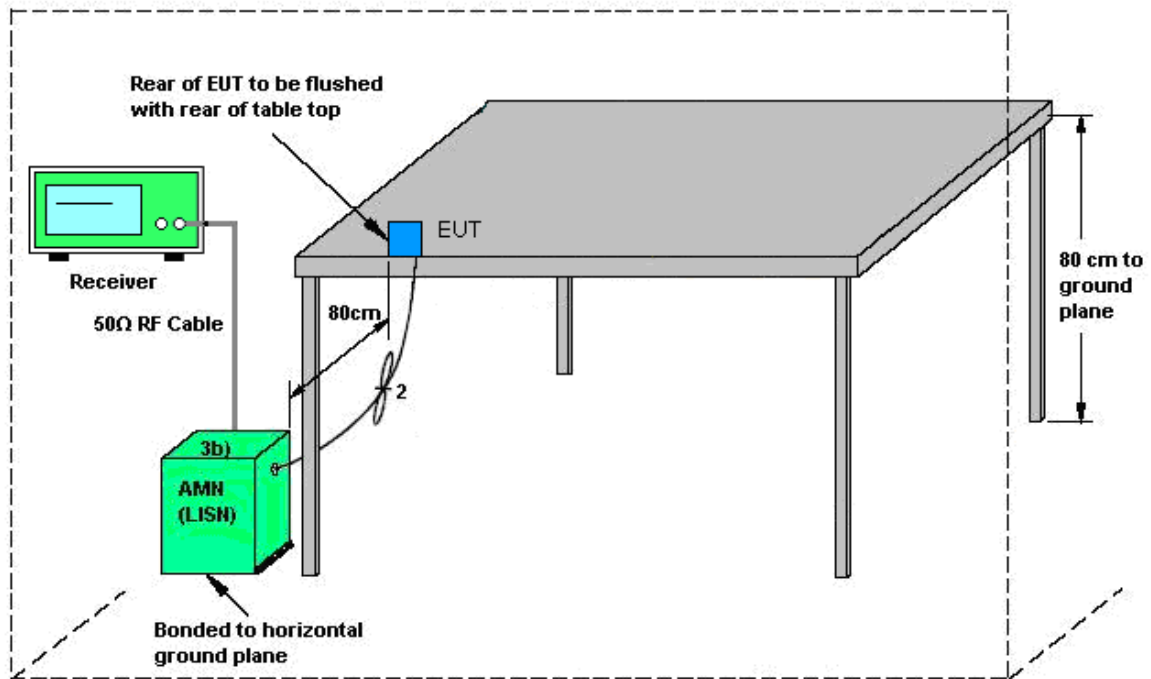


AMN = Artificial mains network (LISN)
AE = Associated equipment
EUT = Equipment under test
ISN = Impedance stabilization network



3.6.5 Test Result of AC Conducted Emission

Test Mode :	Mode 1	Temperature :	21~22°C
Test Engineer :	Henry Chen	Relative Humidity :	41~42%
Test Voltage :	120Vac / 60Hz	Phase :	Line
Function Type :	WLAN Link + Adapter		

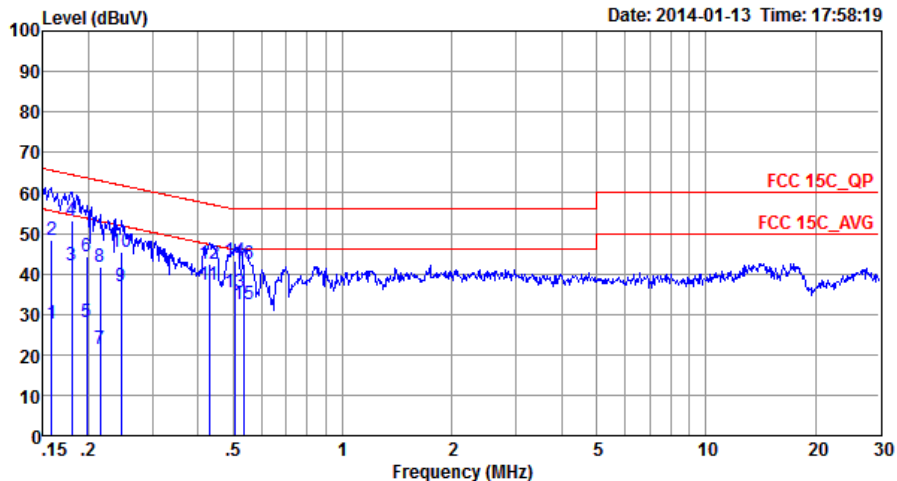


Site : CO01-SZ
 Condition: FCC 15C_QP LISN_L_20130328 LINE

	Freq	Level	Over Limit	Limit Line	Read Level	LISN Factor	Cable Loss	Remark
	MHz	dBuV	dB	dBuV	dBuV	dB	dB	
1	0.16	27.61	-27.95	55.56	17.20	0.06	10.35	Average
2	0.16	48.41	-17.15	65.56	38.00	0.06	10.35	QP
3	0.18	41.98	-12.52	54.50	31.59	0.07	10.32	Average
4	0.18	53.08	-11.42	64.50	42.69	0.07	10.32	QP
5	0.20	27.87	-25.84	53.71	17.50	0.07	10.30	Average
6	0.20	44.17	-19.54	63.71	33.80	0.07	10.30	QP
7	0.22	21.25	-31.76	53.01	10.89	0.08	10.28	Average
8	0.22	41.55	-21.46	63.01	31.19	0.08	10.28	QP
9	0.25	36.93	-14.98	51.91	26.59	0.09	10.25	Average
10	0.25	45.53	-16.38	61.91	35.19	0.09	10.25	QP
11 *	0.43	37.09	-10.15	47.24	26.80	0.13	10.16	Average
12	0.43	42.49	-14.75	57.24	32.20	0.13	10.16	QP
13	0.51	35.40	-10.60	46.00	25.10	0.14	10.16	Average
14	0.51	43.10	-12.90	56.00	32.80	0.14	10.16	QP
15	0.54	32.30	-13.70	46.00	22.01	0.14	10.15	Average
16	0.54	42.30	-13.70	56.00	32.01	0.14	10.15	QP



Test Mode :	Mode 1	Temperature :	21~22°C
Test Engineer :	Henry Chen	Relative Humidity :	41~42%
Test Voltage :	120Vac / 60Hz	Phase :	Neutral
Function Type :	WLAN Link + Adapter		

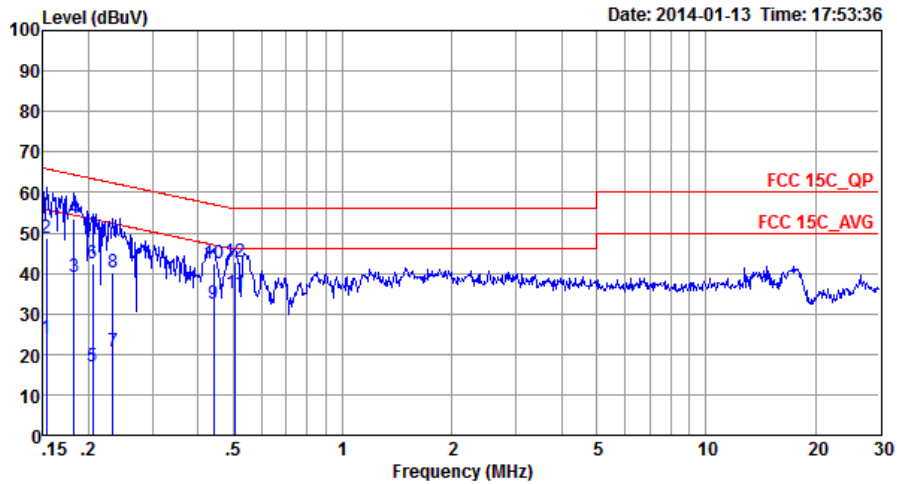

Site : C001-SZ
 Condition: FCC 15C_QP LISN_N_20130328 NEUTRAL

	Freq	Level	Over Limit	Limit Line	Read Level	LISN Factor	Cable Loss	Remark
	MHz	dBuV	dB	dBuV	dBuV	dB	dB	
1	0.15	23.90	-31.92	55.82	13.50	0.04	10.36	Average
2	0.15	48.80	-17.02	65.82	38.40	0.04	10.36	QP
3	0.18	39.15	-15.22	54.37	28.80	0.04	10.31	Average
4 *	0.18	53.45	-10.92	64.37	43.10	0.04	10.31	QP
5	0.21	17.13	-36.27	53.40	6.80	0.04	10.29	Average
6	0.21	42.33	-21.07	63.40	32.00	0.04	10.29	QP
7	0.23	20.80	-31.55	52.35	10.50	0.04	10.26	Average
8	0.23	40.10	-22.25	62.35	29.80	0.04	10.26	QP
9	0.44	32.60	-14.42	47.02	22.40	0.04	10.16	Average
10	0.44	42.50	-14.52	57.02	32.30	0.04	10.16	QP
11	0.51	35.00	-11.00	46.00	24.80	0.04	10.16	Average
12	0.51	42.70	-13.30	56.00	32.50	0.04	10.16	QP

3.7 Antenna Requirements

3.7.1 Standard Applicable

If directional gain of transmitting antennas is greater than 6dBi, the power shall be reduced by the same level in dB comparing to gain minus 6dBi. For the fixed point-to-point operation, the power shall be reduced by one dB for every 3 dB that the directional gain of the antenna exceeds 6 dBi. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the FCC rule.

3.7.2 Antenna Anti-Replacement Construction

An embedded-in antenna design is used.

3.7.3 Antenna Gain

The antenna peak gain of EUT is less than 6 dBi. Therefore, it is not necessary to reduce maximum peak output power limit.

4 List of Measuring Equipment

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Test Date	Due Date	Remark
Spectrum Analyzer	R&S	FSP40	100319	9kHz~40GHz	Dec. 28, 2013	Jan. 22, 2014~ Feb. 20, 2014	Dec. 27, 2014	Conducted (TH01-KS)
Pulse Power Sensor	Anritsu	MA2411B	0917070	30MHz~40GHz	Feb. 28, 2013	Jan. 22, 2014~ Feb. 20, 2014	Feb. 27, 2014	Conducted (TH01-KS)
Power Meter	Anritsu	ML2495A	1005002	50MHz Bandwidth	Feb. 28, 2013	Jan. 22, 2014~ Feb. 20, 2014	Feb. 27, 2014	Conducted (TH01-KS)
Spectrum Analyzer	Agilent Technologies	N9038A	MY522601 85	20Hz~26.5GHz	Apr. 04, 2013	Jan. 21, 2014	Apr. 03, 2014	Radiation (03CH01-SZ)
Double Ridge Horn Antenna	ETS Lindgren	3117	00119436	1GHz~18GHz	Oct. 26, 2013	Jan. 21, 2014	Oct. 25, 2014	Radiation (03CH01-SZ)
Bilog Antenna	SCHAFFNER	CBL6112B	2614	30MHz~2GHz	Dec. 26, 2013	Jan. 21, 2014	Dec. 25, 2014	Radiation (03CH01-SZ)
Amplifier	ADVANTEST	BB525C	E9007003	9kHz~3000MHz GAIN 30db	Mar. 29, 2013	Jan. 21, 2014	Mar. 28, 2014	Radiation (03CH01-SZ)
Amplifier	Yiai	AV3860B	04030	2GHz~26.5GHz	Mar. 29, 2013	Jan. 21, 2014	Mar. 28, 2014	Radiation (03CH01-SZ)
SHF-EHF-Horn	Schwarzbeck	BBHA9170	BBHA9170 249	14GHz~40GHz	Nov. 23, 2013	Jan. 21, 2014	Nov. 22, 2014	Radiation (03CH01-SZ)
Loop Antenna	R&S	HFH2-Z2	100354	9kHz~30MHz	May 29, 2013	Jan. 21, 2014	May 28, 2014	Radiation (03CH01-SZ)
Turn Table	EM Electronics	EM 1000	N/A	0 ~ 360 degree	N/A	Jan. 21, 2014	N/A	Radiation (03CH01-SZ)
Antenna Mast	EM Electronics	EM 1000	N/A	1 m - 4 m	N/A	Jan. 21, 2014	N/A	Radiation (03CH01-SZ)
ESCIO TEST Receiver	R&S	1142.8007.03	100724	9kHz~3GHz	Mar. 29, 2013	Jan. 13, 2014	Mar. 28, 2014	Conduction (CO01-SZ)
AC LISN	EMCO	3816/2SH	00103912	9kHz~30MHz	Mar. 28, 2013	Jan. 13, 2014	Mar. 27, 2014	Conduction (CO01-SZ)
AC LISN (for auxiliary equipment)	EMCO	3816/2SH	00103892	9kHz~30MHz	Mar. 28, 2013	Jan. 13, 2014	Mar. 27, 2014	Conduction (CO01-SZ)
AC Power Source	Chroma	61602	616020000 891	N/A	Nov. 20, 2013	Jan. 13, 2014	Nov. 19, 2014	Conduction (CO01-SZ)



5 Uncertainty of Evaluation

Uncertainty of Conducted Emission Measurement (150kHz ~ 30MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	2.31
---	------

Uncertainty of Radiated Emission Measurement (30 MHz ~ 1000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	3.90
---	------