



BUREAU  
VERITAS

Test Report No.: RF200417W002-2



# FCC TEST REPORT (Part 15, Subpart C)

Applicant:	PAX Technology Limited
Address:	Room 2416, 24/F., Sun Hung Kai Centre, 30 Harbour Hong Kong, China

Manufacturer or Supplier:	PAX Computer Technology (Shenzhen) Co., Ltd.
Address:	4/F, No.3 Building, Software Park, Second Central Science-Tech Road, High-Tech industrial Park, Shenzhen, Guangdong, P.R.C.
Product:	Smart Kiosk
Brand Name:	PAX
Model Name:	SK600
Additional model:	SK800
FCC ID:	V5PSK
Date of tests:	Apr. 18, 2020 ~ May. 06, 2020

The tests have been carried out according to the requirements of the following standard:

- FCC Part 15, Subpart C, Section 15.247
- ANSI C63.10-2013

**CONCLUSION: The submitted sample was found to COMPLY with the test requirement**

Prepared by Alex Chen Engineer / Mobile Department	Approved by Luke Lu Manager / Mobile Department
Date: May. 07, 2020	Date: May. 07, 2020

This report is governed by, and incorporates by reference, CPS Conditions of Service as posted at the date of issuance of this report at <http://www.bureauveritas.com/home/about-us/our-business/cps/about-us/terms-conditions> and is intended for your exclusive use. Any copying or replication of this report to or for any other person or entity, or use of our name or trademark, is permitted only with our prior written permission. This report sets forth our findings solely with respect to the test samples identified herein. The results set forth in this report are not indicative or representative of the quality or characteristics of the lot from which a test sample was taken or any similar or identical product unless specifically and expressly noted. Our report includes all of the tests requested by you and the results thereof based upon the information that you provided to us. Measurement uncertainty is only provided upon request for accredited tests. You have 60 days from date of issuance of this report to notify us of any material error or omission caused by our negligence or if you require measurement uncertainty; provided, however, that such notice shall be in writing and shall specifically address the issue you wish to raise. A failure to raise such issue within the prescribed time shall constitute your unqualified acceptance of the completeness of this report, the tests conducted and the correctness of the report contents.

BV 7Layers Communications Technology  
(Shenzhen) Co. Ltd

No.B102, Dazu Chuangxin Mansion, North of Beihuan  
Avenue, North Area, Hi-Tech Industrial Park, Nanshan  
District, Shenzhen, Guangdong, China

Tel: +86 755 8869 6566  
Fax: +86 755 8869 6577  
Email: [customerservice.sw@bureauveritas.com](mailto:customerservice.sw@bureauveritas.com)



# TABLE OF CONTENTS

**RELEASE CONTROL RECORD ..... 4**

**1 SUMMARY OF TEST RESULTS..... 5**

1.1 MEASUREMENT UNCERTAINTY ..... 5

**2 GENERAL INFORMATION ..... 6**

2.1 GENERAL DESCRIPTION OF EUT ..... 6

2.2 DESCRIPTION OF TEST MODES ..... 8

2.2.1 CONFIGURATION OF SYSTEM UNDER TEST ..... 9

2.2.2 TEST MODE APPLICABILITY AND TESTED CHANNEL DETAIL..... 9

2.3 DUTY CYCLE OF TEST SIGNAL ..... 12

2.4 GENERAL DESCRIPTION OF APPLIED STANDARDS ..... 14

2.5 DESCRIPTION OF SUPPORT UNITS ..... 14

**3 TEST TYPES AND RESULTS..... 15**

3.1 CONDUCTED EMISSION MEASUREMENT ..... 15

3.1.1 LIMITS OF CONDUCTED EMISSION MEASUREMENT ..... 15

3.1.2 TEST INSTRUMENTS..... 15

3.1.3 TEST PROCEDURES ..... 16

3.1.4 DEVIATION FROM TEST STANDARD ..... 16

3.1.5 TEST SETUP ..... 17

3.1.6 EUT OPERATING CONDITIONS ..... 17

3.1.7 TEST RESULTS ..... 18

3.2 RADIATED EMISSION MEASUREMENT ..... 22

3.2.1 LIMITS OF RADIATED EMISSION MEASUREMENT ..... 22

3.2.2 TEST INSTRUMENTS..... 23

3.2.3 TEST PROCEDURES ..... 24

3.2.4 DEVIATION FROM TEST STANDARD ..... 24

3.2.5 TEST SETUP ..... 25

3.2.6 EUT OPERATING CONDITIONS ..... 25

3.2.7 TEST RESULTS ..... 26

3.3 6 DB BANDWIDTH MEASUREMENT ..... 44

3.3.1 LIMITS OF 6DB BANDWIDTH MEASUREMENT ..... 44

3.3.2 TEST INSTRUMENTS..... 44

3.3.3 TEST PROCEDURE..... 44

3.3.4 DEVIATION FROM TEST STANDARD ..... 44



3.3.5	TEST SETUP .....	45
3.3.6	EUT OPERATING CONDITIONS .....	45
3.3.7	TEST RESULTS .....	46
3.4	CONDUCTED OUTPUT POWER.....	50
3.4.1	LIMITS OF CONDUCTED OUTPUT POWER MEASUREMENT .....	50
3.4.2	TEST SETUP .....	50
3.4.3	TEST INSTRUMENTS.....	50
3.4.4	TEST PROCEDURES .....	50
3.4.5	DEVIATION FROM TEST STANDARD .....	50
3.4.6	EUT OPERATING CONDITIONS .....	50
3.4.7	TEST RESULTS .....	51
3.4.7.1	MAXIMUM PEAK OUTPUT POWER .....	51
3.4.7.2	AVERAGE OUTPUT POWER (FOR REFERENCE).....	52
3.5	POWER SPECTRAL DENSITY MEASUREMENT .....	53
3.5.1	LIMITS OF POWER SPECTRAL DENSITY MEASUREMENT .....	53
3.5.2	TEST SETUP .....	53
3.5.3	TEST INSTRUMENTS.....	53
3.5.4	TEST PROCEDURE.....	53
3.5.5	DEVIATION FROM TEST STANDARD .....	53
3.5.6	EUT OPERATING CONDITION .....	53
3.5.7	TEST RESULTS .....	54
3.6	OUT OF BAND EMISSION MEASUREMENT .....	58
3.6.1	LIMITS OF OUT OF BAND EMISSION MEASUREMENT .....	58
3.6.2	TEST SETUP .....	58
3.6.3	TEST INSTRUMENTS.....	58
3.6.4	TEST PROCEDURE.....	58
3.6.5	DEVIATION FROM TEST STANDARD .....	59
3.6.6	EUT OPERATING CONDITION .....	59
3.6.7	TEST RESULTS .....	59
<b>4</b>	<b>PHOTOGRAPHS OF THE TEST CONFIGURATION .....</b>	<b>68</b>
<b>5</b>	<b>APPENDIX A - MODIFICATIONS RECORDERS FOR ENGINEERING CHANGES TO THE EUT BY THE LAB .....</b>	<b>69</b>



**BUREAU  
VERITAS**

Test Report No.: RF200417W002-2

## RELEASE CONTROL RECORD

ISSUE NO.	REASON FOR CHANGE	DATE ISSUED
RF190429W001-2	Original release	Jul. 11, 2019
RF191120W002-2	Based on the original product add one model SK800, changed power module. In this report verify RSE&CE worst case, other test date is copied from the original test report RF190429W001-2.	Dec. 10, 2019
RF200417W002-2	Based on the original report RF191120W002-2 changed the WWAN module from ME3630 to GM500_U1A, the module ME3630 and module GM500_U1A are identical in hardware, only cancel LTE B17 and GSM function, no affect other RF function. In this report verify RSE worst case, other test data was copied from the original test report RF191120W002-2.	May. 07, 2020



# 1 SUMMARY OF TEST RESULTS

The EUT has been tested according to the following specifications:

APPLIED STANDARD: FCC PART 15, SUBPART C (SECTION 15.247)			
STANDARD SECTION	TEST TYPE AND LIMIT	RESULT	REMARK
15.207	AC Power Conducted Emission	PASS	Meet the requirement of limit. Minimum passing margin is -6.06dB at 0.408000MHz.
15.205 15.209	Radiated Emissions	PASS	Meet the requirement of limit. Minimum passing margin is -3.53dB at 2483.5MHz.
15.247(d)	Out of band Emission Measurement	PASS	Meet the requirement of limit.
15.247(a)(2)	6dB bandwidth	PASS	Meet the requirement of limit.
15.247(b)	Conducted Output power	PASS	Meet the requirement of limit.
15.247(e)	Power Spectral Density	PASS	Meet the requirement of limit.
15.203	Antenna Requirement	PASS	No antenna connector is used

## 1.1 MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the EUT as specified in CISPR 16-4-2:

MEASUREMENT	UNCERTAINTY
AC Power Conducted emissions	±2.70dB
All Radiated emissions	±4.48dB
Conducted emissions	±2 dB
Occupied Channel Bandwidth	±21.7KHz
Conducted Output power	±1.03 dB
Power Spectral Density	±0.95 dB

This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k = 2.



## 2 GENERAL INFORMATION

### 2.1 GENERAL DESCRIPTION OF EUT

<b>PRODUCT</b>	Smart Kiosk
<b>BRAND NAME</b>	PAX
<b>MODEL NAME</b>	SK600
<b>ADDITIONAL MODEL</b>	SK800
<b>NOMINAL VOLTAGE</b>	AC 120V
<b>MODULATION TECHNOLOGY</b>	DSSS, OFDM, GFSK
<b>MODULATION TYPE</b>	CCK, DQPSK, DBPSK for DSSS 64QAM, 16QAM, QPSK, BPSK for OFDM BT-LE(GFSK) for GFSK
<b>TRANSMISSION RATE</b>	802.11b: 11/ 5.5/ 2.0 / 1.0 Mbps 802.11g: 54/ 48/ 36 / 24 / 18 / 9/ 6 Mbps 802.11n: up to 65 Mbps BT_LE: 1 Mbps
<b>OPERATING FREQUENCY</b>	2412-2462MHz for 11b/g/n(HT20) 2402-2480MHz for BT-LE(GFSK)
<b>MAX. OUTPUT POWER</b>	WLAN: 216.272mW (Maximum) BT-LE: 2.877mW (Maximum)
<b>ANTENNA TYPE</b>	PIFA Antenna with 1.5dBi gain
<b>HW VERSION</b>	N/A
<b>SW VERSION</b>	N/A
<b>I/O PORTS</b>	Refer to user's manual
<b>CABLE SUPPLIED</b>	Refer to note as below



**NOTE:**

1. For a more detailed features description, please refer to the manufacturer’s specifications or the user's manual.
2. The hardware differences between SK800 with SK600:

Product size and weight	
SK600	Size: 660 x325 x 178 (mm) Weight: 7.8kg
SK800	Size: 965x 390x 175 (mm) Weight: 13kg

Product screen size	
SK600	screen size: 15"
SK800	screen size: 23.8"

Except Listings above, the others are the same.

3. The EUT incorporates a SISO function. Physically, the EUT provides one transmitter and one receiver.

MODULATION MODE	TX/RX FUNCTION
<b>802.11b</b>	1TX /1RX
<b>802.11g</b>	1TX /1RX
<b>802.11n (20MHz)</b>	1TX /1RX
<b>BT_LE</b>	1TX /1RX

4. For the test results, the EUT had been tested with all conditions. But only the worst case was shown in test report. SK600 was main test model for full conducted test items.



## 2.2 DESCRIPTION OF TEST MODES

11 channels are provided for 802.11b, 802.11g and 802.11n (HT20):

CHANNEL	FREQUENCY	CHANNEL	FREQUENCY
1	2412 MHz	7	2442 MHz
2	2417 MHz	8	2447 MHz
3	2422 MHz	9	2452 MHz
4	2427 MHz	10	2457 MHz
5	2432 MHz	11	2462 MHz
6	2437 MHz		

40 channels are provided for BT-LE (GFSK):

CHANNEL	FREQ. (MHZ)	CHANNEL	FREQ. (MHZ)	CHANNEL	FREQ. (MHZ)	CHANNEL	FREQ. (MHZ)
0	2402	10	2422	20	2442	30	2462
1	2404	11	2424	21	2444	31	2464
2	2406	12	2426	22	2446	32	2466
3	2408	13	2428	23	2448	33	2468
4	2410	14	2430	24	2450	34	2470
5	2412	15	2432	25	2452	35	2472
6	2414	16	2434	26	2454	36	2474
7	2416	17	2436	27	2456	37	2476
8	2418	18	2438	28	2458	38	2478
9	2420	19	2440	29	2460	39	2480





### 2.2.1 CONFIGURATION OF SYSTEM UNDER TEST

Please see section 5 photographs of the test configuration for reference.

### 2.2.2 TEST MODE APPLICABILITY AND TESTED CHANNEL DETAIL

Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates, XYZ axis and antenna ports.

The worst case was found when positioned on Y axis for radiated emission. Following test modes were selected for the final test, and the final worst case is marked in boldface and recorded in the report:

EUT CONFIGURE MODE	APPLICABLE TO				MODE
	RE<1G	RE≥1G	PLC	APCM	
-	√	√	√	√	-

Where **RE<1G**: Radiated Emission below 1GHz      **RE≥1G**: Radiated Emission above 1GHz  
**PLC**: Power Line Conducted Emission      **APCM**: Antenna Port Conducted Measurement

**NOTE:** No need to concern of Conducted Emission due to the EUT is powered by battery.

### RADIATED EMISSION TEST (BELOW 1GHz):

- Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- Following channel(s) was (were) selected for the final test as listed below.

MODE	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TECHNOLOGY	MODULATION TYPE	DATA RATE (Mbps)
802.11g	1 to 11	1	OFDM	BPSK	6.0
BT-LE	0 to 39	0	GFSK	GFSK	1



**RADIATED EMISSION TEST (ABOVE 1GHz):**

Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).

Following channel(s) was (were) selected for the final test as listed below.

MODE	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TECHNOLOGY	MODULATION TYPE	DATA RATE (Mbps)
802.11b	1 to 11	1, 6, 11	CCK	DBPSK	1.0
802.11g	1 to 11	1, 6, 11	OFDM	BPSK	6.0
802.11n HT20	1 to 11	1, 6, 11	OFDM	BPSK	6.5
BT-LE	0 to 39	0,19, 39	GFSK	GFSK	1

**POWER LINE CONDUCTED EMISSION TEST:**

Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).

Following channel(s) was (were) selected for the final test as listed below.

MODE	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TECHNOLOGY	MODULATION TYPE	DATA RATE (Mbps)
802.11g	1 to 11	1	OFDM	BPSK	6.0

**BANDEDGE MEASUREMENT:**

Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).

Following channel(s) was (were) selected for the final test as listed below.

MODE	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TECHNOLOGY	MODULATION TYPE	DATA RATE (Mbps)
802.11b	1 to 11	1, 11	CCK	DBPSK	1.0
802.11g	1 to 11	1, 11	OFDM	BPSK	6.0
802.11n HT20	1 to 11	1, 11	OFDM	BPSK	6.5
BT-LE	0 to 39	0, 39	GFSK	GFSK	1



**ANTENNA PORT CONDUCTED MEASUREMENT:**

- This item includes all test value of each mode, but only includes spectrum plot of worst value of each mode.
- Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- Following channel(s) was (were) selected for the final test as listed below.

MODE	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TECHNOLOGY	MODULATION TYPE	DATA RATE (Mbps)
802.11b	1 to 11	1, 6, 11	CCK	DBPSK	1.0
802.11g	1 to 11	1, 6, 11	OFDM	BPSK	6.0
802.11n HT20	1 to 11	1, 6, 11	OFDM	BPSK	6.5
BT-LE	0 to 39	0, 19, 39	GFSK	GFSK	1

**TEST CONDITION:**

APPLICABLE TO	ENVIRONMENTAL CONDITIONS	TEST VOLTAGE	TESTED BY
RE<1G	22deg. C, 54%RH	AC 120V	Jacky Liu
RE≥1G	22deg. C, 54%RH	AC 120V	Jacky Liu
PLC	24deg. C, 55%RH	AC 120V	Harris Wang
APCM	25deg. C, 60%RH	AC 120V	Chase Zhou




### 2.3 Duty Cycle of Test Signal

#### WIFI 2.4GHZ

**802.11b:** Duty cycle = 8.400/8.520 = 0.986 > 98%, Duty factor is not required.

**802.11g:** Duty cycle = 1.390/1.500 = 0.927 < 98%, Duty factor = 10 \* log( 1/0.927) = 0.331


**802.11n (HT20):** Duty cycle = 0.164/0.268 = 0.612 < 98%, Duty factor = 10 \* log( 1/0.612) = 2.133

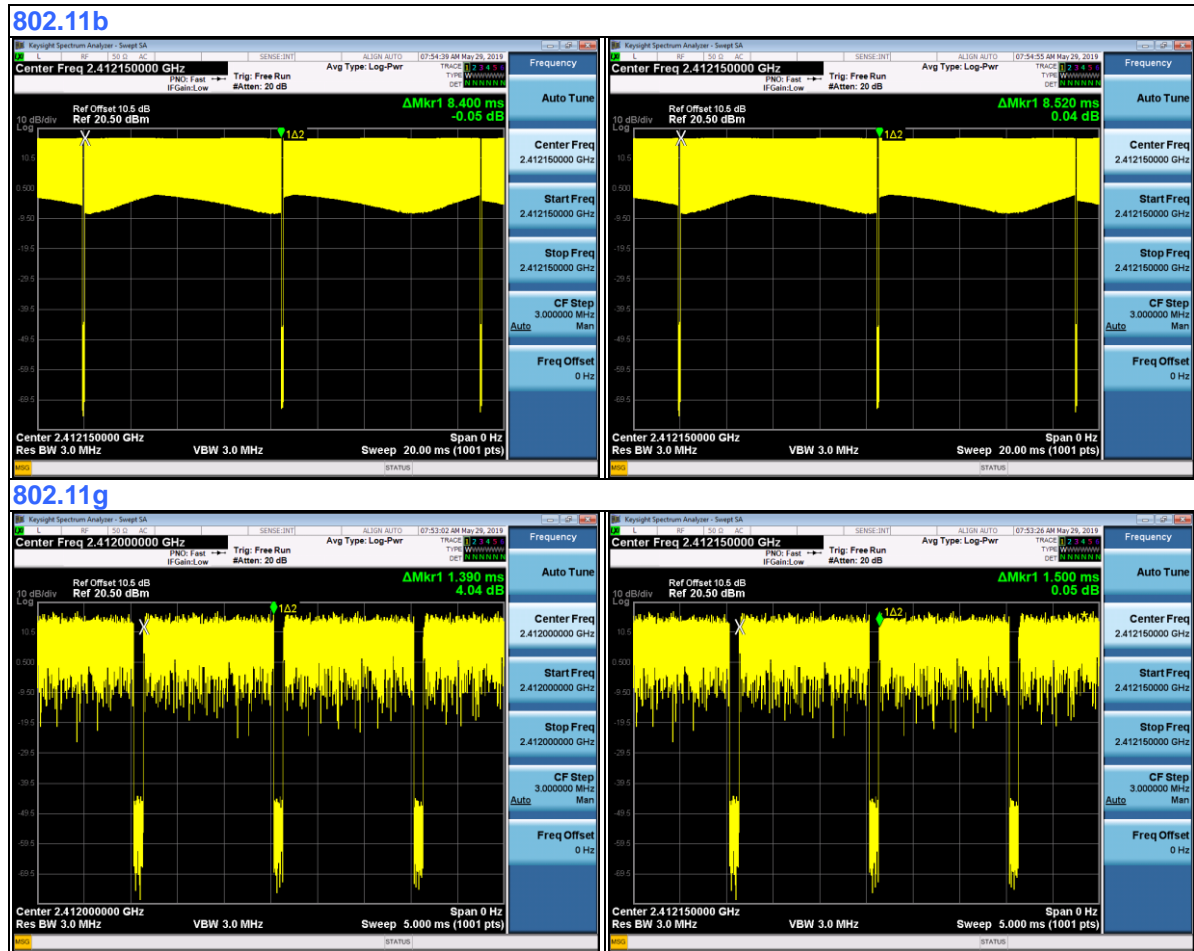



**BUREAU  
VERITAS**

Test Report No.: RF200417W002-2

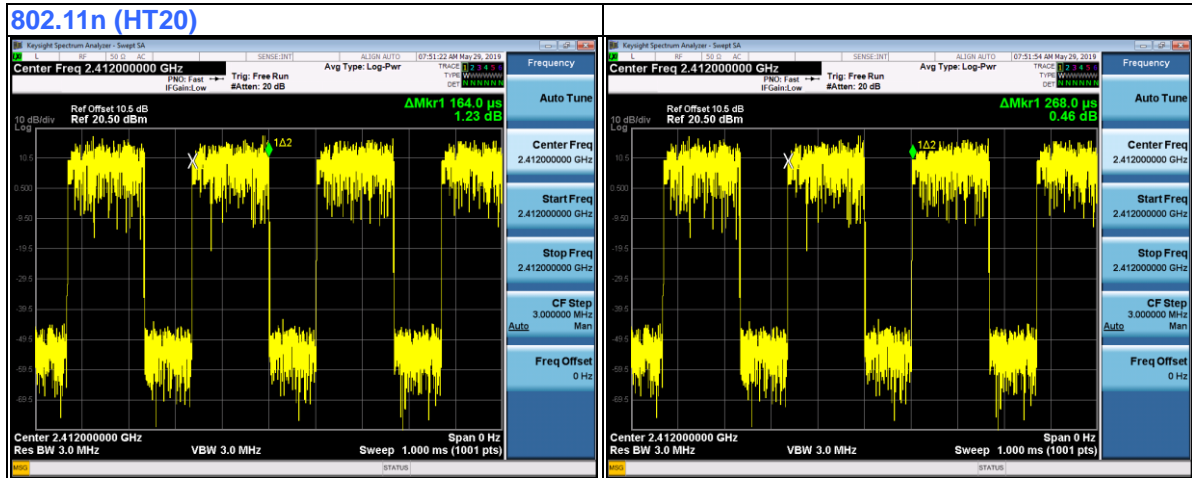

BV 7Layers Communications Technology  
(Shenzhen) Co. Ltd

No.B102, Dazu Chuangxin Mansion, North of Beihuan  
Avenue, North Area, Hi-Tech Industrial Park, Nanshan  
District, Shenzhen, Guangdong, China

Tel: +86 755 8869 6566  
Fax: +86 755 8869 6577  
Email: [customerservice.sw@bureauveritas.com](mailto:customerservice.sw@bureauveritas.com)



## 2.4 GENERAL DESCRIPTION OF APPLIED STANDARDS

The EUT is a RF Product. According to the specifications of the manufacturer, it must comply with the requirements of the following standards:

**FCC Part 15, Subpart C, Section 15.247**

**558074 D01 15.247 Meas Guidance v05r02**

**ANSI C63.10-2013**

Note:

1. All test items have been performed and recorded as per the above standards.
2. The EUT is also considered as a kind of computer peripheral, because the connection to computer is necessary for typical use. It has been verified to comply with the requirements of FCC Part 15, Subpart B, Class B (sDoC). The test report has been issued separately.

## 2.5 DESCRIPTION OF SUPPORT UNITS

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

NO.	PRODUCT	BRAND	MODEL NO.	SERIAL NO.	FCC ID
1	DC source	LONG WEI	PS-6403D	010934269	N/A
2	PC	HP	A6608CN	3CR83825X3	N/A

NO.	SIGNAL CABLE DESCRIPTION OF THE ABOVE SUPPORT UNITS
1	DC Line: Unshielded, Detachable 1.0m
2	AC Line: Unshielded, Detachable 1.5m



### 3 TEST TYPES AND RESULTS

#### 3.1 CONDUCTED EMISSION MEASUREMENT

##### 3.1.1 LIMITS OF CONDUCTED EMISSION MEASUREMENT

FREQUENCY OF EMISSION (MHz)	CONDUCTED LIMIT (dBµV)	
	Quasi-peak	Average
0.15 ~ 0.5	66 to 56	56 to 46
0.5 ~ 5	56	46
5 ~ 30	60	50

**NOTE:** 1.The lower limit shall apply at the transition frequencies.

2. The limit decreases in line with the logarithm of the frequency in the range of 0.15 to 0.50MHz.

3. All emanations from a class A/B digital device or system, including any network of conductors and apparatus connected thereto, shall not exceed the level of field strengths specified above.

##### 3.1.2 TEST INSTRUMENTS

Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Next Cal.
EMI Test Receiver	Rohde&Schwarz	ESR3	101900	Feb. 28,20	Feb. 27,21
EMC32 test software	Rohde&Schwarz	EMC32	NA	NA	NA
LISN network	Rohde&Schwarz	ENV216	101922	Feb. 28,20	Feb. 27,21

**NOTE:**

1. The test was performed in CE shielded room.

2. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to CEPREI/CHINA, GRGT/CHINA and NIM/CHINA.



### 3.1.3 TEST PROCEDURES

- a. The EUT was placed 0.4 meters from the conducting wall of the shielded room with EUT being connected to the power mains through a line impedance stabilization network (LISN). Other support units were connected to the power mains through another LISN. The two LISNs provide 50 ohm/ 50uH of coupling impedance for the measuring instrument.
- b. Both lines of the power mains connected to the EUT were checked for maximum conducted interference.
- c. The frequency range from 150kHz to 30MHz was searched. Emission levels under (Limit - 20dB) was not recorded.

**NOTE:** All modes of operation were investigated and the worst-case emissions are reported.


### 3.1.4 DEVIATION FROM TEST STANDARD

No deviation.





### 3.1.5 TEST SETUP

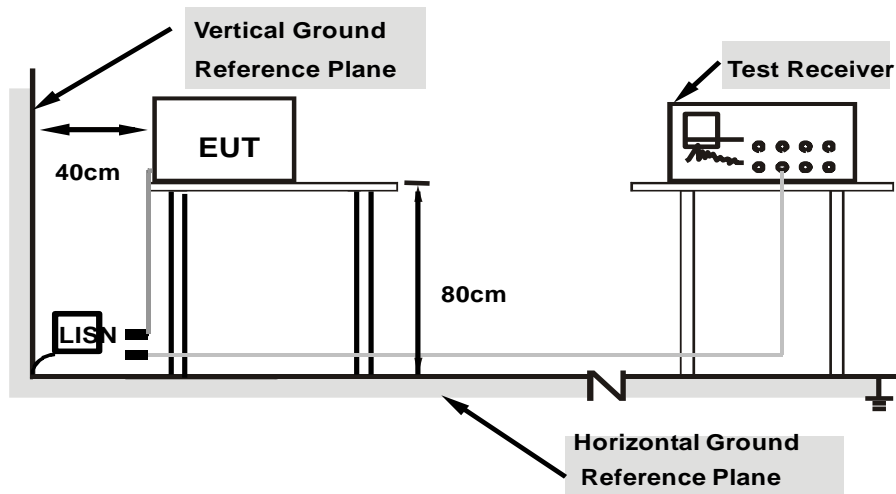

- Note:**
- 1.Support units were connected to second LISN.
  - 2.Both of LISNs (AMN) are 80 cm from EUT and at least 80 from other units and other metal planes

For the actual test configuration, please refer to the attached file (Test Setup Photo).

### 3.1.6 EUT OPERATING CONDITIONS

- a. Turned on the power and connected of all equipment.
- b. EUT was operated according to the type used was description in manufacturer's specifications or the User's Manual.



### 3.1.7 TEST RESULTS


#### CONDUCTED WORST-CASE DATA: SK600

<b>Frequency Range</b>	150KHz ~ 30MHz	<b>Detector Function &amp; Resolution Bandwidth</b>	Quasi-Peak (QP) / Average (AV), 9 kHz
<b>Input Power</b>	120Vac, 60Hz	<b>Environmental Conditions</b>	25deg. C, 52RH
<b>Tested By</b>	Tony	<b>TEST DATE</b>	2019/11/25
<b>Test Voltage</b>	AC 120V		

Frequency (MHz)	QuasiPeak (dBuV)	CAverage (dBuV)	Limit (dBuV)	Margin (dB)	Line	Filter	Corr. (dB)
0.162000	---	36.40	55.36	-18.96	L	ON	9.9
0.162000	46.35	---	65.36	-19.01	L	ON	9.9
<b>0.408000</b>	---	<b>41.63</b>	<b>47.69</b>	<b>-6.06</b>	<b>L</b>	<b>ON</b>	<b>10.0</b>
0.408000	47.28	---	57.69	-10.41	L	ON	10.0
0.436000	---	33.19	47.14	-13.95	L	ON	10.0
0.436000	39.78	---	57.14	-17.36	L	ON	10.0
0.824000	---	23.98	46.00	-22.02	L	ON	10.1
0.824000	30.50	---	56.00	-25.50	L	ON	10.1
1.220000	---	18.99	46.00	-27.01	L	ON	10.1
1.220000	26.48	---	56.00	-29.52	L	ON	10.1
13.560000	---	29.93	50.00	-20.07	L	ON	10.5
13.560000	40.06	---	60.00	-19.94	L	ON	10.5

- REMARKS:**
1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
  2. "-": The Quasi-peak reading value also meets average limit and measurement with the average detector is unnecessary.
  3. The emission levels of other frequencies were very low against the limit.
  4. Margin value = Emission level - Limit value
  5. Correction factor = Insertion loss + Cable loss
  6. Emission Level = Correction Factor + Reading Value.

Full Spectrum

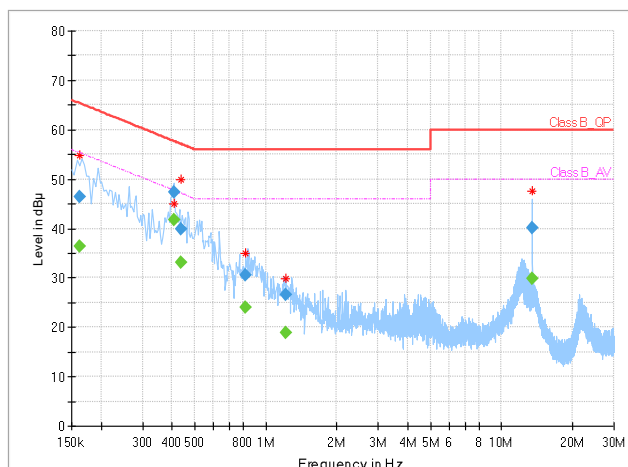




<b>Frequency Range</b>	150KHz ~ 30MHz	<b>Detector Function &amp; Resolution Bandwidth</b>	Quasi-Peak (QP) / Average (AV), 9 kHz
<b>Input Power</b>	120Vac, 60Hz	<b>Environmental Conditions</b>	25deg. C, 52RH
<b>Tested By</b>	Tony	<b>TEST DATE</b>	2019/11/25
<b>Test Voltage</b>	AC 120V		

Frequency (MHz)	QuasiPeak (dBuV)	CAverage (dBuV)	Limit (dBuV)	Margin (dB)	Line	Filter	Corr. (dB)
0.154000	---	37.17	55.78	-18.61	N	ON	9.9
0.154000	48.26	---	65.78	-17.52	N	ON	9.9
0.404000	---	41.04	47.77	-6.73	N	ON	9.9
0.404000	45.84	---	57.77	-11.93	N	ON	9.9
0.412000	---	38.26	47.61	-9.34	N	ON	9.9
0.412000	46.17	---	57.61	-11.44	N	ON	9.9
0.752000	---	19.32	46.00	-26.68	N	ON	9.9
0.752000	28.22	---	56.00	-27.78	N	ON	9.9
1.300000	---	18.50	46.00	-27.50	N	ON	10.0
1.300000	25.49	---	56.00	-30.51	N	ON	10.0

- REMARKS:**
1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
  2. "-": The Quasi-peak reading value also meets average limit and measurement with the average detector is unnecessary.
  3. The emission levels of other frequencies were very low against the limit.
  4. Margin value = Emission level - Limit value
  5. Correction factor = Insertion loss + Cable loss
  6. Emission Level = Correction Factor + Reading Value.

Full Spectrum

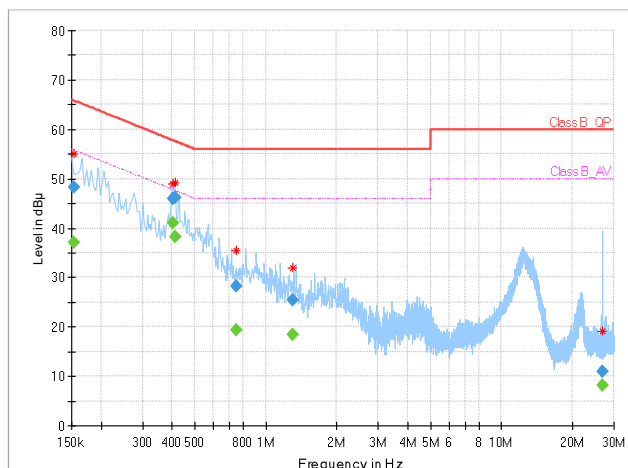




**SK800**

<b>Frequency Range</b>	150KHz ~ 30MHz	<b>Detector Function &amp; Resolution Bandwidth</b>	Quasi-Peak (QP) / Average (AV), 9 kHz
<b>Input Power</b>	120Vac, 60Hz	<b>Environmental Conditions</b>	25deg. C, 52RH
<b>Tested By</b>	Tony	<b>TEST DATE</b>	2019/11/25
<b>Test Voltage</b>	AC 120V		

Frequency (MHz)	QuasiPeak (dBuV)	CAverage (dBuV)	Limit (dBuV)	Margin (dB)	Line	Filter	Corr. (dB)
0.158000	---	30.40	55.57	-25.17	L	ON	9.9
0.158000	43.94	---	65.57	-21.63	L	ON	9.9
0.460000	---	22.71	46.69	-23.98	L	ON	10.0
0.460000	30.47	---	56.69	-26.22	L	ON	10.0
0.528000	---	22.50	46.00	-23.50	L	ON	10.0
0.528000	33.46	---	56.00	-22.54	L	ON	10.0
0.936000	---	17.23	46.00	-28.77	L	ON	10.1
0.936000	26.02	---	56.00	-29.98	L	ON	10.1
3.480000	---	18.44	46.00	-27.56	L	ON	10.2
3.480000	30.99	---	56.00	-25.01	L	ON	10.2
4.128000	---	14.82	46.00	-31.18	L	ON	10.2
4.128000	24.70	---	56.00	-31.30	L	ON	10.2

- REMARKS:**
1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
  2. "-": The Quasi-peak reading value also meets average limit and measurement with the average detector is unnecessary.
  3. The emission levels of other frequencies were very low against the limit.
  4. Margin value = Emission level - Limit value
  5. Correction factor = Insertion loss + Cable loss
  6. Emission Level = Correction Factor + Reading Value.

Full Spectrum

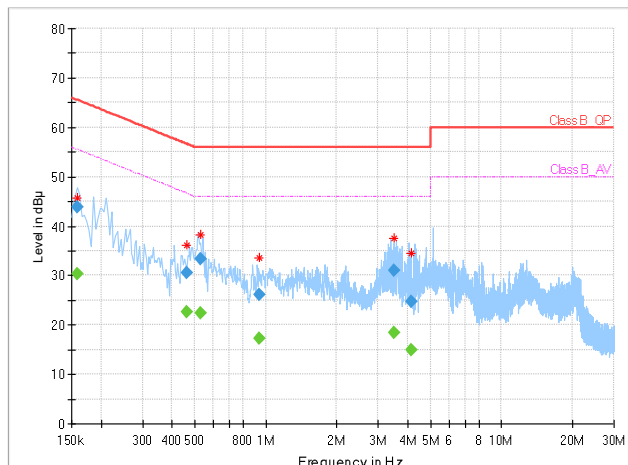




<b>Frequency Range</b>	150KHz ~ 30MHz	<b>Detector Function &amp; Resolution Bandwidth</b>	Quasi-Peak (QP) / Average (AV), 9 kHz
<b>Input Power</b>	120Vac, 60Hz	<b>Environmental Conditions</b>	25deg. C, 52RH
<b>Tested By</b>	Tony	<b>TEST DATE</b>	2019/11/25
<b>Test Voltage</b>	AC 120V		

Frequency (MHz)	QuasiPeak (dBuV)	CAverage (dBuV)	Limit (dBuV)	Margin (dB)	Line	Filter	Corr. (dB)
0.150000	---	30.23	56.00	-25.77	N	ON	9.9
0.150000	43.92	---	66.00	-22.08	N	ON	9.9
0.200000	---	26.26	53.61	-27.35	N	ON	9.9
0.200000	39.99	---	63.61	-23.62	N	ON	9.9
0.512000	---	20.96	46.00	-25.04	N	ON	9.9
0.512000	31.09	---	56.00	-24.91	N	ON	9.9
1.784000	---	21.48	46.00	-24.52	N	ON	10.0
1.784000	26.70	---	56.00	-29.30	N	ON	10.0
3.560000	---	24.82	46.00	-21.18	N	ON	10.1
3.560000	37.01	---	56.00	-18.99	N	ON	10.1
3.724000	---	19.68	46.00	-26.32	N	ON	10.1
3.724000	32.33	---	56.00	-23.67	N	ON	10.1

- REMARKS:**
1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
  2. "-": The Quasi-peak reading value also meets average limit and measurement with the average detector is unnecessary.
  3. The emission levels of other frequencies were very low against the limit.
  4. Margin value = Emission level - Limit value
  5. Correction factor = Insertion loss + Cable loss
  6. Emission Level = Correction Factor + Reading Value.

Full Spectrum

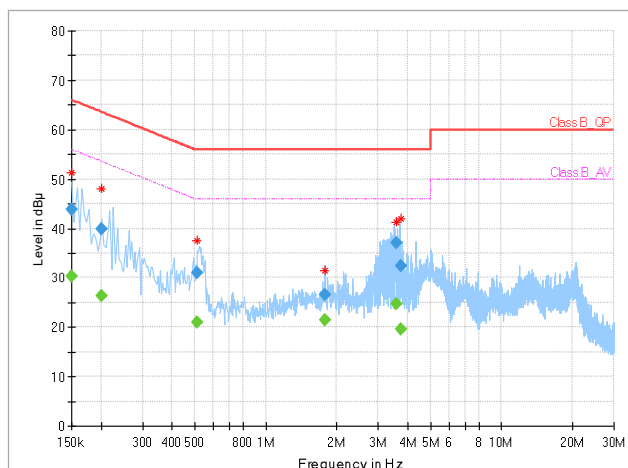



### 3.2 RADIATED EMISSION MEASUREMENT

#### 3.2.1 LIMITS OF RADIATED EMISSION MEASUREMENT

Radiated emissions which fall in the restricted bands, as defined in Section 15.205(a), must also comply with the radiated emission limits specified in Section 15.209(a).

FREQUENCIES (MHz)	FIELD STRENGTH (microvolts/meter)	MEASUREMENT DISTANCE (meters)
0.009 ~ 0.490	2400/F(kHz)	300
0.490 ~ 1.705	24000/F(kHz)	30
1.705 ~ 30.0	30	30
30 ~ 88	100	3
88 ~ 216	150	3
216 ~ 960	200	3
Above 960	500	3

**NOTE:**

1. The lower limit shall apply at the transition frequencies.
2. Emission level (dBuV/m) = 20 log Emission level (uV/m).
3. As shown in 15.35(b), for frequencies above 1000MHz, the field strength limits are based on average detector, however, the peak field strength of any emission shall not exceed the maximum permitted average limits, specified above by more than 20dB under any condition of modulation.



### 3.2.2 TEST INSTRUMENTS

Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Next Cal.
3m Semi-anechoic Chamber	ETS-LINDGREN	9m*6m*6m	Euroshieldpn-CT0001143-1216	Feb. 28,20	Feb. 27,21
Bilog Antenna	ETS-LINDGREN	3143B	00161965	Feb. 28,20	Feb. 27,21
Horn Antenna	ETS-LINDGREN	3117	00168728	Feb. 28,20	Feb. 27,21
Horn Antenna (18GHz-40GHz)	N/A	QWH-SL-18-40-K-SG/QMS-00361	15433	Nov. 24, 19	Nov. 23, 20
Test Software	E3	V 9.160323	N/A	N/A	N/A
Test Software	ADT	ADT_Radiated_V7.6.15.9.2	N/A	N/A	N/A
10dB Attenuator	JFW/USA	50HF-010-SMA	1505	Jun. 24,19	Jun. 23,20
MXE EMI Receiver	KEYSIGHT	N9038A-544	MY54450026	Feb. 28,20	Feb. 27,21
Signal Pre-Amplifier	EMSI	EMC 9135	980249	Jun. 24,19	Jun. 23,20
Signal Pre-Amplifier	EMSI	EMC 012645B	980257	Jun. 24,19	Jun. 23,20
Signal Pre-Amplifier	EMSI	EMC 184045B	980259	Jun. 24,19	Jun. 23,20

- NOTE:**
1. The calibration interval of the above test instruments is 12 months or 24 months and the calibrations are traceable to CEPREI/CHINA, GRGT/CHINA and NIM/CHINA.
  2. The test was performed in 3m Chamber.
  3. The FCC Site Registration No. is 525120; The Designation No. is CN1171.



### 3.2.3 TEST PROCEDURES

- a. The EUT was placed on the top of a rotating table 0.8 meters (for below 1GHz) / 1.5 meters (for above 1GHz) above the ground at 3 meter chamber room for test. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. The antenna is a broadband antenna, and its height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- f. During the test, each emission was maximized by: having the EUT continuously working, investigated all operating modes, rotated about all 3 axis (X, Y & Z) and considered typical configuration to obtain worst position, manipulating interconnecting cables, For battery operated equipment, the equipment tests shall be perform using fresh batteries. The turntable was rotated to maximize the emission level.

#### Note:

1. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 120kHz for Quasi-peak detection (QP) at frequency below 1GHz.
2. The resolution bandwidth of test receiver/spectrum analyzer is 1 MHz and the video bandwidth is 3MHz for Peak detection (PK) at frequency above 1GHz.
3. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and the video bandwidth is  $\geq 1/T$  (Duty cycle < 98%) or 10Hz (Duty cycle > 98%) for Average detection (AV) at frequency above 1GHz.
4. All modes of operation were investigated and the worst-case emissions are reported.

### 3.2.4 DEVIATION FROM TEST STANDARD


No deviation






### 3.2.5 TEST SETUP

< Frequency Range 30MHz~1GHz >

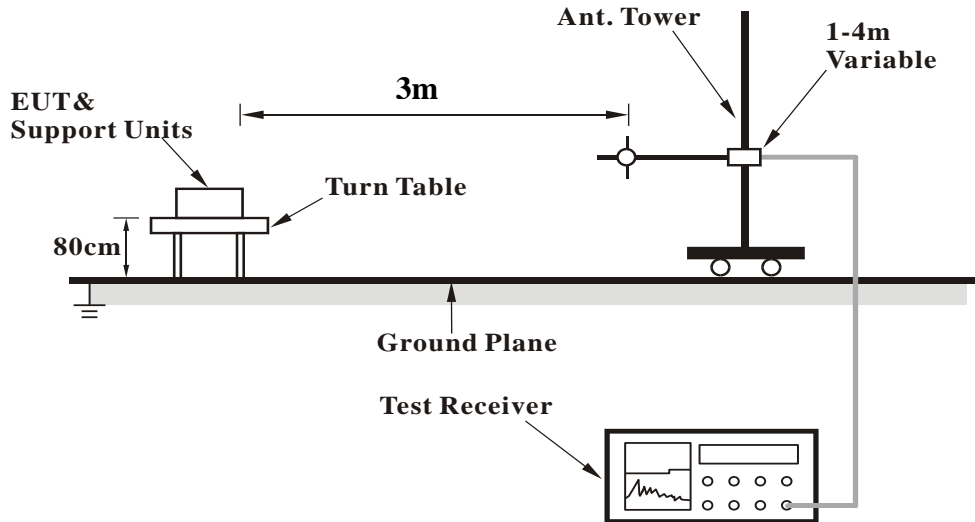

<Frequency Range above 1GHz>

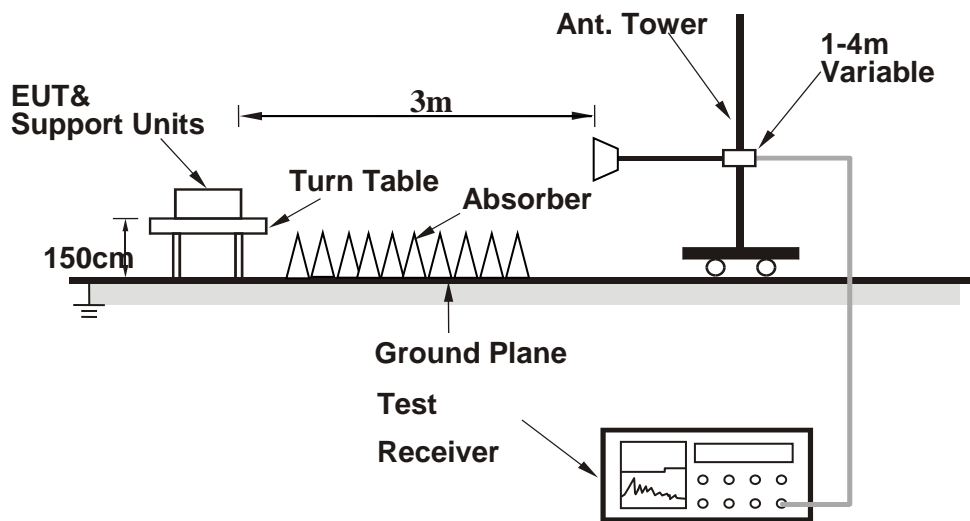

For the actual test configuration, please refer to the attached file (Test Setup Photo).

### 3.2.6 EUT OPERATING CONDITIONS

- a. Set the EUT under full load condition and placed them on a testing table.
- b. Set the transmitter part of EUT under transmission condition continuously at specific channel frequency.
- c. The necessary accessories enable the EUT in full functions.



### 3.2.7 TEST RESULTS

**SK600**

**BELOW 1GHz WORST-CASE DATA:**

**30 MHz – 1GHz data:**


**802.11g**

<b>CHANNEL</b>	TX Channel 1	<b>DETECTOR FUNCTION</b>	Quasi-Peak (QP)
<b>FREQUENCY RANGE</b>	30MHz ~ 1GHz		

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M										
FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB /m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
195.65	37.55	61.66	43.5	-5.95	10.69	1.77	36.57	200	0	Peak
261.47	33.9	55.24	46	-12.1	13.25	2.08	36.67	200	0	Peak
325.15	30.59	50.17	46	-15.41	14.88	2.31	36.77	200	0	Peak
392.54	36.98	54.24	46	-9.02	16.97	2.59	36.82	200	0	Peak
521.36	35.45	50.66	46	-10.55	18.84	3.03	37.08	200	0	Peak
650.14	38.32	50.87	46	-7.68	21.55	3.35	37.45	200	0	Peak

**REMARKS:**

1. Emission Level = Read Level+ Antenna Factor + Cable Loss- Preamp Factor  
Margin value = Emission level – Limit value.

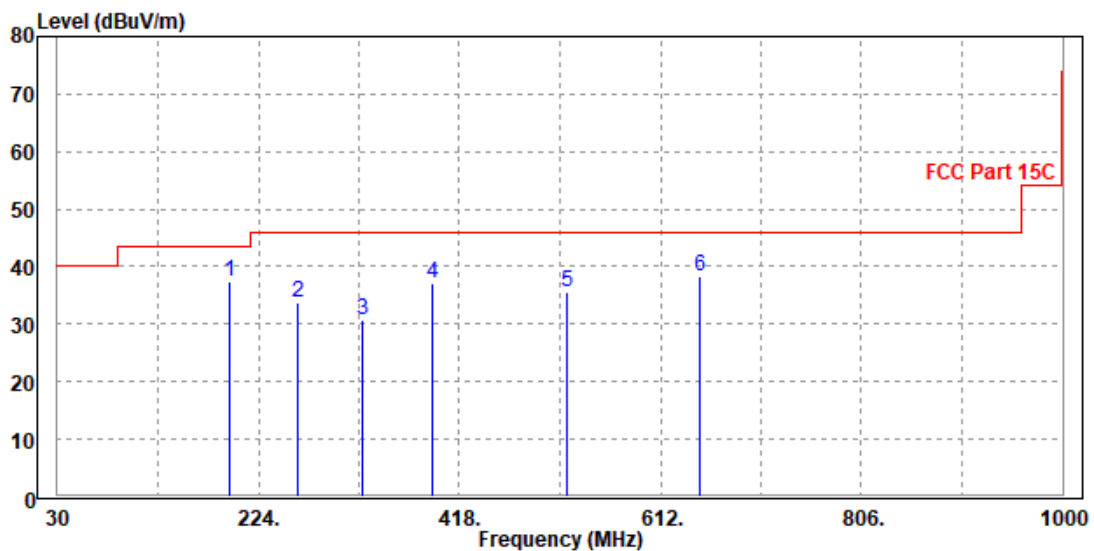




<b>CHANNEL</b>	TX Channel 1	<b>DETECTOR FUNCTION</b>	Quasi-Peak (QP)
<b>FREQUENCY RANGE</b>	30MHz ~ 1GHz		

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M										
FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB /m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
121.36	35.25	62.17	43.5	-8.25	8.7	1.45	37.07	100	0	Peak
130.55	37.84	64.65	43.5	-5.66	8.71	1.48	37	100	0	Peak
195.66	37.46	61.55	43.5	-6.04	10.71	1.77	36.57	100	0	Peak
391.25	41.1	58.31	46	-4.90	17.03	2.58	36.82	100	0	Peak
521.16	36.98	52.03	46	-9.01	19	3.03	37.08	100	0	Peak
961.26	44	53.1	54	-9.99	24.3	4.31	37.71	100	0	Peak

**REMARKS:**

1. Emission Level = Read Level+ Antenna Factor + Cable Loss- Preamp Factor  
Margin value = Emission level – Limit value.

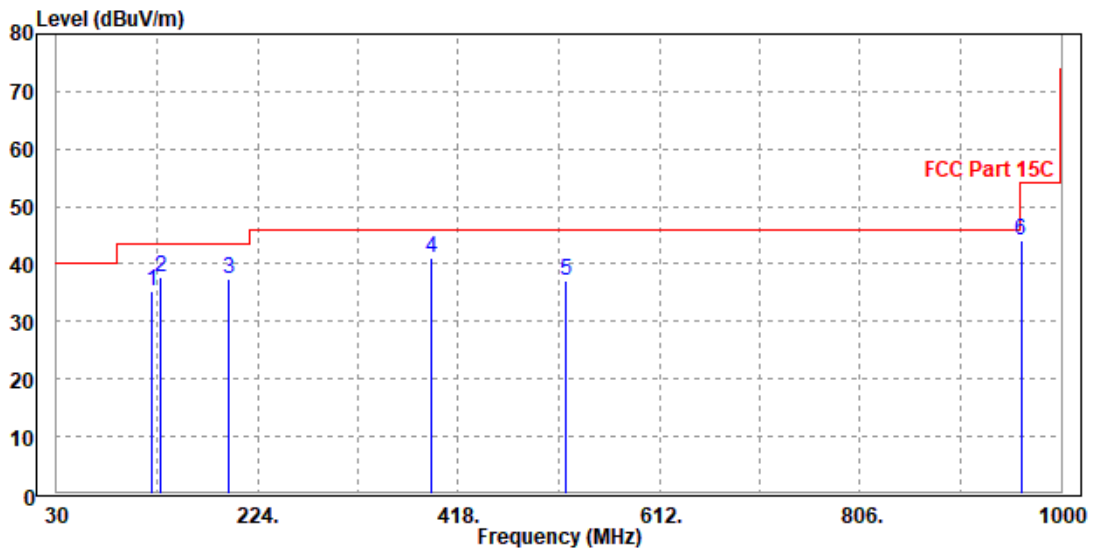



ABOVE 1GHZ WORST-CASE DATA:

Note: For higher frequency, the emission is too low to be detected.

802.11b

CHANNEL	TX Channel 1	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 25GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M										
FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB /m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
2390	53.45	56.91	74	-20.55	33.1	4.88	41.44	109	332	Peak
2390	44.41	47.87	54	-9.59	33.1	4.88	41.44	109	332	Average
2412	107.25	110.66			33.14	4.9	41.45	109	332	Peak
2412	103.85	107.26			33.14	4.9	41.45	109	332	Average
2483.5	50.06	53.27	74	-23.94	33.27	4.98	41.46	109	332	Peak
2483.5	39.82	43.03	54	-14.18	33.27	4.98	41.46	109	332	Average
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M										
FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB /m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
2390	50.64	54.99	74	-23.36	32.21	4.88	41.44	132	345	Peak
2390	39.72	44.07	54	-14.28	32.21	4.88	41.44	132	345	Average
2412	101.1	105.38			32.27	4.9	41.45	132	345	Peak
2412	98.82	103.1			32.27	4.9	41.45	132	345	Average
2483.5	49.59	53.61	74	-24.41	32.46	4.98	41.46	132	345	Peak
2483.5	38.33	42.35	54	-15.67	32.46	4.98	41.46	132	345	Average

REMARKS:

- Emission Level = Read Level+ Antenna Factor + Cable Loss- Preamp Factor  
Margin value = Emission level – Limit value.
- 2412MHz: Fundamental frequency.



<b>CHANNEL</b>	TX Channel 6	<b>DETECTOR FUNCTION</b>	Peak (PK)
<b>FREQUENCY RANGE</b>	1GHz ~ 25GHz		Average (AV)

**ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M**

FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB /m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
2390	48.9	52.36	74	-25.1	33.1	4.88	41.44	115	321	Peak
2390	38.66	42.12	54	-15.34	33.1	4.88	41.44	115	321	Average
2437	106.53	109.86			33.19	4.93	41.45	115	321	Peak
2437	102.9	106.23			33.19	4.93	41.45	115	321	Average
2483.5	50.04	53.25	74	-23.96	33.27	4.98	41.46	115	321	Peak
2483.5	39.49	42.7	54	-14.51	33.27	4.98	41.46	115	321	Average

**ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M**

FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB /m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
2390	48.32	52.67	74	-25.68	32.21	4.88	41.44	125	342	Peak
2390	38.86	43.21	54	-15.14	32.21	4.88	41.44	125	342	Average
2437	100.47	104.65			32.34	4.93	41.45	125	342	Peak
2437	97.14	101.32			32.34	4.93	41.45	125	342	Average
2483.5	49.14	53.16	74	-24.86	32.46	4.98	41.46	125	342	Peak
2483.5	38.56	42.58	54	-15.44	32.46	4.98	41.46	125	342	Average

**REMARKS:**

- Emission Level = Read Level+ Antenna Factor + Cable Loss- Preamp Factor  
Margin value = Emission level – Limit value.
- 2437MHz: Fundamental frequency.



<b>CHANNEL</b>	TX Channel 11	<b>DETECTOR FUNCTION</b>	Peak (PK)
<b>FREQUENCY RANGE</b>	1GHz ~ 25GHz		Average (AV)

**ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M**

FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB /m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
2390	49.77	53.23	74	-24.23	33.1	4.88	41.44	116	322	Peak
2390	39.05	42.51	54	-14.95	33.1	4.88	41.44	116	322	Average
2462	107.06	110.32			33.23	4.96	41.45	116	322	Peak
2462	103.98	107.24			33.23	4.96	41.45	116	322	Average
2483.5	55.21	58.42	74	-18.79	33.27	4.98	41.46	116	322	Peak
2483.5	43.82	47.03	54	-10.18	33.27	4.98	41.46	116	322	Average

**ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M**

FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB /m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
2390	49.11	53.46	74	-24.89	32.21	4.88	41.44	335	123	Peak
2390	37.97	42.32	54	-16.03	32.21	4.88	41.44	335	123	Average
2462	101.59	105.68			32.4	4.96	41.45	335	123	Peak
2462	98.22	102.31			32.4	4.96	41.45	335	123	Average
2483.5	51.73	55.75	74	-22.27	32.46	4.98	41.46	335	123	Peak
2483.5	40.52	44.54	54	-13.48	32.46	4.98	41.46	335	123	Average

**REMARKS:**

- Emission Level = Read Level+ Antenna Factor + Cable Loss- Preamp Factor  
Margin value = Emission level – Limit value.
- 2462MHz: Fundamental frequency.



**802.11g**

<b>CHANNEL</b>	TX Channel 1	<b>DETECTOR FUNCTION</b>	Peak (PK)
<b>FREQUENCY RANGE</b>	1GHz ~ 25GHz		Average (AV)

<b>ANTENNA POLARITY &amp; TEST DISTANCE: HORIZONTAL AT 3 M</b>										
<b>FREQ. (MHz)</b>	<b>EMISSION LEVEL (dBuV/m)</b>	<b>READ LEVEL (dBuV)</b>	<b>LIMIT (dBuV/m)</b>	<b>MARGIN (dB)</b>	<b>ANTENNA FACTOR (dB /m)</b>	<b>CABLE LOSS (dB)</b>	<b>PREAMP FACTOR (dB)</b>	<b>ANTENNA HEIGHT (cm)</b>	<b>TABLE ANGLE (Degree)</b>	<b>REMARK</b>
2390	68.8	72.26	74	-5.2	33.1	4.88	41.44	200	140	Peak
2390	49.19	52.65	54	-4.81	33.1	4.88	41.44	200	140	Average
2412	109.81	113.22			33.14	4.9	41.45	200	140	Peak
2412	99.12	102.53			33.14	4.9	41.45	200	140	Average
2483.5	66.91	70.12	74	-7.09	33.27	4.98	41.46	200	140	Peak
2483.5	44.92	48.13	54	-9.08	33.27	4.98	41.46	200	140	Average
<b>ANTENNA POLARITY &amp; TEST DISTANCE: VERTICAL AT 3 M</b>										
<b>FREQ. (MHz)</b>	<b>EMISSION LEVEL (dBuV/m)</b>	<b>READ LEVEL (dBuV)</b>	<b>LIMIT (dBuV/m)</b>	<b>MARGIN (dB)</b>	<b>ANTENNA FACTOR (dB /m)</b>	<b>CABLE LOSS (dB)</b>	<b>PREAMP FACTOR (dB)</b>	<b>ANTENNA HEIGHT (cm)</b>	<b>TABLE ANGLE (Degree)</b>	<b>REMARK</b>
2390	60.98	65.33	74	-13.02	32.21	4.88	41.44	100	195	Peak
2390	43.3	47.65	54	-10.7	32.21	4.88	41.44	100	195	Average
2412	104.94	109.22			32.27	4.9	41.45	100	195	Peak
2412	92.28	96.56			32.27	4.9	41.45	100	195	Average
2483.5	64.73	68.75	74	-9.27	32.46	4.98	41.46	100	195	Peak
2483.5	45.19	49.21	54	-8.81	32.46	4.98	41.46	100	195	Average

**REMARKS:**

1. Emission Level = Read Level+ Antenna Factor + Cable Loss- Preamp Factor  
Margin value = Emission level – Limit value.
2. 2412MHz: Fundamental frequency.



<b>CHANNEL</b>	TX Channel 6	<b>DETECTOR FUNCTION</b>	Peak (PK)
<b>FREQUENCY RANGE</b>	1GHz ~ 25GHz		Average (AV)

**ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M**

FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB /m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
2390	50.56	54.02	74	-23.44	33.1	4.88	41.44	125	280	Peak
2390	40.22	43.68	54	-13.78	33.1	4.88	41.44	125	280	Average
2437	110.45	113.78			33.19	4.93	41.45	125	280	Peak
2437	101.32	104.65			33.19	4.93	41.45	125	280	Average
2483.5	50.47	53.68	74	-23.53	33.27	4.98	41.46	125	280	Peak
2483.5	40.06	43.27	54	-13.94	33.27	4.98	41.46	125	280	Average

**ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M**

FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB /m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
2390	49.06	53.41	74	-24.94	32.21	4.88	41.44	112	305	Peak
2390	38.3	42.65	54	-15.7	32.21	4.88	41.44	112	305	Average
2437	104.79	108.97			32.34	4.93	41.45	112	305	Peak
2437	97.16	101.34			32.34	4.93	41.45	112	305	Average
2483.5	48.65	52.67	74	-25.35	32.46	4.98	41.46	112	305	Peak
2483.5	38.13	42.15	54	-15.87	32.46	4.98	41.46	112	305	Average

**REMARKS:**

1. Emission Level = Read Level+ Antenna Factor + Cable Loss- Preamp Factor  
Margin value = Emission level – Limit value.
2. 2437MHz: Fundamental frequency.





<b>CHANNEL</b>	TX Channel 11	<b>DETECTOR FUNCTION</b>	Peak (PK)
<b>FREQUENCY RANGE</b>	1GHz ~ 25GHz		Average (AV)

<b>ANTENNA POLARITY &amp; TEST DISTANCE: HORIZONTAL AT 3 M</b>										
FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB /m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
2390	50.9	54.36	74	-23.1	33.1	4.88	41.44	100	278	Peak
2390	39.86	43.32	54	-14.14	33.1	4.88	41.44	100	278	Average
2462	109.16	112.42			33.23	4.96	41.45	100	278	Peak
2462	101.42	104.68			33.23	4.96	41.45	100	278	Average
2483.5	69.36	72.57	74	-4.64	33.27	4.98	41.46	100	278	Peak
2483.5	49.92	53.13	54	-4.08	33.27	4.98	41.46	100	278	Average

<b>ANTENNA POLARITY &amp; TEST DISTANCE: VERTICAL AT 3 M</b>										
FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB /m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
2390	49.33	53.68	74	-24.67	32.21	4.88	41.44	125	321	Peak
2390	39.77	44.12	54	-14.23	32.21	4.88	41.44	125	321	Average
2462	105.36	109.45			32.4	4.96	41.45	125	321	Peak
2462	98.22	102.31			32.4	4.96	41.45	125	321	Average
2483.5	68.46	72.48	74	-5.54	32.46	4.98	41.46	125	321	Peak
2483.5	49.74	53.76	54	-4.26	32.46	4.98	41.46	125	321	Average

**REMARKS:**

1. Emission Level = Read Level+ Antenna Factor + Cable Loss- Preamp Factor  
Margin value = Emission level – Limit value.
2. 2462MHz: Fundamental frequency.



**802.11n (20MHz)**

<b>CHANNEL</b>	TX Channel 1	<b>DETECTOR FUNCTION</b>	Peak (PK)
<b>FREQUENCY RANGE</b>	1GHz ~ 25GHz		Average (AV)

<b>ANTENNA POLARITY &amp; TEST DISTANCE: HORIZONTAL AT 3 M</b>										
<b>FREQ. (MHz)</b>	<b>EMISSION LEVEL (dBuV/m)</b>	<b>READ LEVEL (dBuV)</b>	<b>LIMIT (dBuV/m)</b>	<b>MARGIN (dB)</b>	<b>ANTENNA FACTOR (dB /m)</b>	<b>CABLE LOSS (dB)</b>	<b>PREAMP FACTOR (dB)</b>	<b>ANTENNA HEIGHT (cm)</b>	<b>TABLE ANGLE (Degree)</b>	<b>REMARK</b>
2390	68.67	72.13	74	-5.33	33.1	4.88	41.44	117	265	Peak
2390	50.25	53.71	54	-3.75	33.1	4.88	41.44	117	265	Average
2412	110.37	113.78			33.14	4.9	41.45	117	265	Peak
2412	99.86	103.27			33.14	4.9	41.45	117	265	Average
2483.5	50.96	54.17	74	-23.04	33.27	4.98	41.46	117	265	Peak
2483.5	40.45	43.66	54	-13.55	33.27	4.98	41.46	117	265	Average
<b>ANTENNA POLARITY &amp; TEST DISTANCE: VERTICAL AT 3 M</b>										
<b>FREQ. (MHz)</b>	<b>EMISSION LEVEL (dBuV/m)</b>	<b>READ LEVEL (dBuV)</b>	<b>LIMIT (dBuV/m)</b>	<b>MARGIN (dB)</b>	<b>ANTENNA FACTOR (dB /m)</b>	<b>CABLE LOSS (dB)</b>	<b>PREAMP FACTOR (dB)</b>	<b>ANTENNA HEIGHT (cm)</b>	<b>TABLE ANGLE (Degree)</b>	<b>REMARK</b>
2390	66.07	70.42	74	-7.93	32.21	4.88	41.44	121	325	Peak
2390	48.4	52.75	54	-5.6	32.21	4.88	41.44	121	325	Average
2412	105.96	110.24			32.27	4.9	41.45	121	325	Peak
2412	95.85	100.13			32.27	4.9	41.45	121	325	Average
2483.5	50.11	54.13	74	-23.89	32.46	4.98	41.46	121	325	Peak
2483.5	39.66	43.68	54	-14.34	32.46	4.98	41.46	121	325	Average

**REMARKS:**

1. Emission Level = Read Level+ Antenna Factor + Cable Loss- Preamp Factor  
Margin value = Emission level – Limit value.
2. 2412MHz: Fundamental frequency.



<b>CHANNEL</b>	TX Channel 6	<b>DETECTOR FUNCTION</b>	Peak (PK)
<b>FREQUENCY RANGE</b>	1GHz ~ 25GHz		Average (AV)

<b>ANTENNA POLARITY &amp; TEST DISTANCE: HORIZONTAL AT 3 M</b>										
<b>FREQ. (MHz)</b>	<b>EMISSION LEVEL (dBuV/m)</b>	<b>READ LEVEL (dBuV)</b>	<b>LIMIT (dBuV/m)</b>	<b>MARGIN (dB)</b>	<b>ANTENNA FACTOR (dB /m)</b>	<b>CABLE LOSS (dB)</b>	<b>PREAMP FACTOR (dB)</b>	<b>ANTENNA HEIGHT (cm)</b>	<b>TABLE ANGLE (Degree)</b>	<b>REMARK</b>
2390	49.96	53.42	74	-24.04	33.1	4.88	41.44	119	268	Peak
2390	39.23	42.69	54	-14.77	33.1	4.88	41.44	119	268	Average
2437	109.03	112.36			33.19	4.93	41.45	119	268	Peak
2437	98.8	102.13			33.19	4.93	41.45	119	268	Average
2483.5	50.86	54.07	74	-23.14	33.27	4.98	41.46	119	268	Peak
2483.5	40.35	43.56	54	-13.65	33.27	4.98	41.46	119	268	Average
<b>ANTENNA POLARITY &amp; TEST DISTANCE: VERTICAL AT 3 M</b>										
<b>FREQ. (MHz)</b>	<b>EMISSION LEVEL (dBuV/m)</b>	<b>READ LEVEL (dBuV)</b>	<b>LIMIT (dBuV/m)</b>	<b>MARGIN (dB)</b>	<b>ANTENNA FACTOR (dB /m)</b>	<b>CABLE LOSS (dB)</b>	<b>PREAMP FACTOR (dB)</b>	<b>ANTENNA HEIGHT (cm)</b>	<b>TABLE ANGLE (Degree)</b>	<b>REMARK</b>
2390	48.8	53.15	74	-25.2	32.21	4.88	41.44	125	326	Peak
2390	38.21	42.56	54	-15.79	32.21	4.88	41.44	125	326	Average
2437	105.71	109.89			32.34	4.93	41.45	125	326	Peak
2437	95.34	99.52			32.34	4.93	41.45	125	326	Average
2483.5	50.3	54.32	74	-23.7	32.46	4.98	41.46	125	326	Peak
2483.5	39.63	43.65	54	-14.37	32.46	4.98	41.46	125	326	Average

**REMARKS:**

1. Emission Level = Read Level+ Antenna Factor + Cable Loss- Preamp Factor  
Margin value = Emission level – Limit value.
2. 2437MHz: Fundamental frequency.



<b>CHANNEL</b>	TX Channel 11	<b>DETECTOR FUNCTION</b>	Peak (PK)
<b>FREQUENCY RANGE</b>	1GHz ~ 25GHz		Average (AV)

<b>ANTENNA POLARITY &amp; TEST DISTANCE: HORIZONTAL AT 3 M</b>										
FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB /m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
2390	50.66	54.12	74	-23.34	33.1	4.88	41.44	118	267	Peak
2390	40.06	43.52	54	-13.94	33.1	4.88	41.44	118	267	Average
2462	109.4	112.66			33.23	4.96	41.45	118	267	Peak
2462	98.87	102.13			33.23	4.96	41.45	118	267	Average
2483.5	68.39	71.6	74	-5.61	33.27	4.98	41.46	118	267	Peak
<b>2483.5</b>	<b>50.47</b>	<b>53.68</b>	<b>54</b>	<b>-3.53</b>	<b>33.27</b>	<b>4.98</b>	<b>41.46</b>	<b>118</b>	<b>267</b>	<b>Average</b>
<b>ANTENNA POLARITY &amp; TEST DISTANCE: VERTICAL AT 3 M</b>										
FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB /m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
2390	50	54.35	74	-24	32.21	4.88	41.44	115	345	Peak
2390	39.77	44.12	54	-14.23	32.21	4.88	41.44	115	345	Average
2462	104.87	108.96			32.4	4.96	41.45	115	345	Peak
2462	94.16	98.25			32.4	4.96	41.45	115	345	Average
2483.5	65.83	69.85	74	-8.17	32.46	4.98	41.46	115	345	Peak
2483.5	48.13	52.15	54	-5.87	32.46	4.98	41.46	115	345	Average

**REMARKS:**

- Emission Level = Read Level+ Antenna Factor + Cable Loss- Preamp Factor  
Margin value = Emission level – Limit value.
- 2462MHz: Fundamental frequency.



**BELOW 1GHz WORST-CASE DATA:**

**9 KHz – 30 MHz data:** the amplitude of spurious emissions attenuated more than 20 dB below the permissible value is not required in the report.

**30 MHz – 1GHz data:**


**BT-LE (GFSK)**

<b>CHANNEL</b>	TX Channel 0	<b>DETECTOR FUNCTION</b>	Quasi-Peak (QP)
<b>FREQUENCY RANGE</b>	30MHz ~ 1GHz		

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M										
FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB /m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
195.65	37.55	61.66	43.5	-5.95	10.69	1.77	36.57	200	0	Peak
262.66	35.02	56.34	46	-10.98	13.28	2.08	36.68	200	0	Peak
324.14	30.24	49.85	46	-15.76	14.85	2.31	36.77	200	0	Peak
390.14	36.42	53.77	46	-9.58	16.89	2.58	36.82	200	0	Peak
519.85	34.29	49.52	46	-11.71	18.82	3.02	37.07	200	0	Peak
652.55	36.89	49.37	46	-9.11	21.62	3.35	37.45	200	0	Peak

**REMARKS:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value

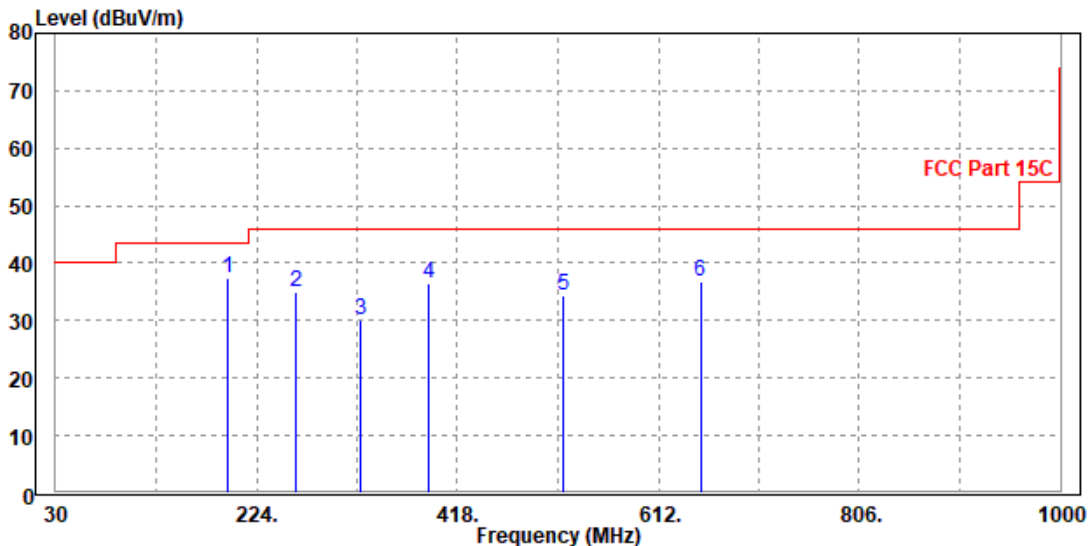




<b>CHANNEL</b>	TX Channel 0	<b>DETECTOR FUNCTION</b>	Quasi-Peak (QP)
<b>FREQUENCY RANGE</b>	30MHz ~ 1GHz		

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M										
FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB /m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
124.25	36.34	63.23	43.5	-7.16	8.7	1.46	37.05	100	0	Peak
131.21	37.06	63.85	43.5	-6.44	8.71	1.49	36.99	100	0	Peak
196.55	38.08	62.15	43.5	-5.42	10.73	1.77	36.57	100	0	Peak
393.55	40.52	57.65	46	-5.48	17.1	2.59	36.82	100	0	Peak
523.65	38.11	53.14	46	-7.89	19.03	3.03	37.09	100	0	Peak
963.77	45.81	54.87	54	-8.19	24.33	4.32	37.71	100	0	Peak

**REMARKS:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value

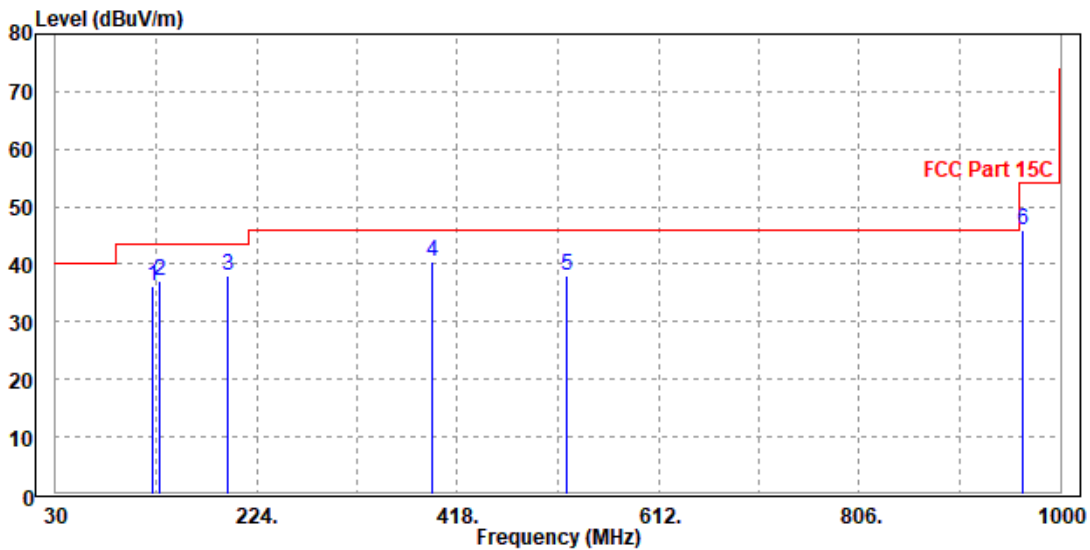



ABOVE 1GHz TEST DATA:

Note: For higher frequency, the emission is too low to be detected.

BT-LE (GFSK)

CHANNEL	TX Channel 0	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 25GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M										
FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB /m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
2390	50.16	53.62	74	-23.84	33.1	4.88	41.44	100	0	Peak
2390	39.12	42.58	54	-14.88	33.1	4.88	41.44	100	0	Average
2402	98.93	102.36			33.12	4.89	41.44	100	0	Peak
2402	88.69	92.12			33.12	4.89	41.44	100	0	Average
2483.5	50.06	53.27	74	-23.94	33.27	4.98	41.46	100	0	Peak
2483.5	40.34	43.55	54	-13.66	33.27	4.98	41.46	100	0	Average
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M										
FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB /m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
2390	48.1	52.45	74	-25.9	32.21	4.88	41.44	100	125	Peak
2390	38.86	43.21	54	-15.14	32.21	4.88	41.44	100	125	Average
2402	96.98	101.28			32.25	4.89	41.44	100	125	Peak
2402	86.34	90.64			32.25	4.89	41.44	100	125	Average
2483.5	49.45	53.47	74	-24.55	32.46	4.98	41.46	100	125	Peak
2483.5	38.67	42.69	54	-15.33	32.46	4.98	41.46	100	125	Average

REMARKS:

- Emission Level = Read Level+ Antenna Factor + Cable Loss- Preamp Factor  
Margin value = Emission level – Limit value.
- 2402MHz: Fundamental frequency.



<b>CHANNEL</b>	TX Channel 19	<b>DETECTOR FUNCTION</b>	Peak (PK)
<b>FREQUENCY RANGE</b>	1GHz ~ 25GHz		Average (AV)

<b>ANTENNA POLARITY &amp; TEST DISTANCE: HORIZONTAL AT 3 M</b>										
FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB /m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
2390	49.17	52.63	74	-24.83	33.1	4.88	41.44	100	230	Peak
2390	39.05	42.51	54	-14.95	33.1	4.88	41.44	100	230	Average
2440	96.97	100.29			33.19	4.94	41.45	100	230	Peak
2440	86.35	89.67			33.19	4.94	41.45	100	230	Average
2483.5	50.44	53.65	74	-23.56	33.27	4.98	41.46	100	230	Peak
2483.5	39.32	42.53	54	-14.68	33.27	4.98	41.46	100	230	Average
<b>ANTENNA POLARITY &amp; TEST DISTANCE: VERTICAL AT 3 M</b>										
FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB /m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
2390	48.26	52.61	74	-25.74	32.21	4.88	41.44	100	136	Peak
2390	38	42.35	54	-16	32.21	4.88	41.44	100	136	Average
2440	97.61	101.78			32.34	4.94	41.45	100	136	Peak
2440	87.64	91.81			32.34	4.94	41.45	100	136	Average
2483.5	50.21	54.23	74	-23.79	32.46	4.98	41.46	100	136	Peak
2483.5	38.54	42.56	54	-15.46	32.46	4.98	41.46	100	136	Average

**REMARKS:**

1. Emission Level = Read Level+ Antenna Factor + Cable Loss- Preamp Factor  
Margin value = Emission level – Limit value.
2. 2440MHz: Fundamental frequency.





<b>CHANNEL</b>	TX Channel 39	<b>DETECTOR FUNCTION</b>	Peak (PK)
<b>FREQUENCY RANGE</b>	1GHz ~ 25GHz		Average (AV)

<b>ANTENNA POLARITY &amp; TEST DISTANCE: HORIZONTAL AT 3 M</b>										
FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB /m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
2390	53.74	62.13	74	-20.26	33.1	4.88	46.37	130	195	Peak
2390	38.57	46.96	54	-15.43	33.1	4.88	46.37	130	195	Average
2480	99.12	107.25			33.26	4.98	46.37	130	195	Peak
2480	89.43	97.56			33.26	4.98	46.37	130	195	Average
2483.5	49.57	57.69	74	-24.43	33.27	4.98	46.37	130	195	Peak
2483.5	37.84	45.96	54	-16.16	33.27	4.98	46.37	130	195	Average

<b>ANTENNA POLARITY &amp; TEST DISTANCE: VERTICAL AT 3 M</b>										
FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB /m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
2390	52.96	62.24	74	-21.04	32.21	4.88	46.37	180	300	Peak
2390	38.84	48.12	54	-15.16	32.21	4.88	46.37	180	300	Average
2480	95.31	104.25			32.45	4.98	46.37	180	300	Peak
2480	88.32	97.26			32.45	4.98	46.37	180	300	Average
2483.5	49.22	58.15	74	-24.78	32.46	4.98	46.37	180	300	Peak
2483.5	37.95	46.88	54	-16.05	32.46	4.98	46.37	180	300	Average

**REMARKS:**

1. Emission Level = Read Level+ Antenna Factor + Cable Loss- Preamp Factor  
Margin value = Emission level – Limit value.
2. 2480MHz: Fundamental frequency.



**SK800**

**ABOVE 1GHz TEST DATA:**

**Note:** For higher frequency, the emission is too low to be detected.

**802.11g**

<b>CHANNEL</b>	TX Channel 1	<b>DETECTOR FUNCTION</b>	Peak (PK)
<b>FREQUENCY RANGE</b>	1GHz ~ 25GHz		Average (AV)

<b>ANTENNA POLARITY &amp; TEST DISTANCE: HORIZONTAL AT 3 M</b>										
FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB /m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
2390	70.19	73.65	74	-3.81	33.1	4.88	41.44	200	270	Peak
2390	48.7	52.16	54	-5.3	33.1	4.88	41.44	200	270	Average
2412	110.83	114.24			33.14	4.9	41.45	200	270	Peak
2412	100.15	103.56			33.14	4.9	41.45	200	270	Average
2483.5	64.46	67.67	74	-9.54	33.27	4.98	41.46	200	270	Peak
2483.5	43.16	46.37	54	-10.84	33.27	4.98	41.46	200	270	Average
<b>ANTENNA POLARITY &amp; TEST DISTANCE: VERTICAL AT 3 M</b>										
FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB /m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
2390	60.21	64.56	74	-13.79	32.21	4.88	41.44	100	220	Peak
2390	45.3	49.65	54	-8.7	32.21	4.88	41.44	100	220	Average
2412	105.96	110.24			32.27	4.9	41.45	100	220	Peak
2412	91.09	95.37			32.27	4.9	41.45	100	220	Average
2483.5	65.43	69.45	74	-8.57	32.46	4.98	41.46	100	220	Peak
2483.5	44.34	48.36	54	-9.66	32.46	4.98	41.46	100	220	Average

**REMARKS:**

1. Emission Level = Read Level+ Antenna Factor + Cable Loss- Preamp Factor  
Margin value = Emission level – Limit value.
2. 2412MHz: Fundamental frequency.



**BT-LE (GFSK)**

<b>CHANNEL</b>	TX Channel 39	<b>DETECTOR FUNCTION</b>	Peak (PK)
<b>FREQUENCY RANGE</b>	1GHz ~ 25GHz		Average (AV)

**ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M**

FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB /m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
2390	54.73	63.12	74	-19.27	33.1	4.88	46.37	220	190	Peak
2390	38.17	46.56	54	-15.83	33.1	4.88	46.37	220	190	Average
2480	97.1	105.23			33.26	4.98	46.37	220	190	Peak
2480	90.43	98.56			33.26	4.98	46.37	220	190	Average
2483.5	48.01	56.13	74	-25.99	33.27	4.98	46.37	220	190	Peak
2483.5	38.86	46.98	54	-15.14	33.27	4.98	46.37	220	190	Average

**ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M**

FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB /m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
2390	51.96	61.24	74	-22.04	32.21	4.88	46.37	140	300	Peak
2390	37.28	46.56	54	-16.72	32.21	4.88	46.37	140	300	Average
2480	94.92	103.86			32.45	4.98	46.37	140	300	Peak
2480	87.83	96.77			32.45	4.98	46.37	140	300	Average
2483.5	49.22	58.15	74	-24.78	32.46	4.98	46.37	140	300	Peak
2483.5	37.92	46.85	54	-16.08	32.46	4.98	46.37	140	300	Average

**REMARKS:**

- Emission Level = Read Level+ Antenna Factor + Cable Loss- Preamp Factor  
Margin value = Emission level – Limit value.
- 2480MHz: Fundamental frequency.



### 3.3 6 dB BANDWIDTH MEASUREMENT

#### 3.3.1 LIMITS OF 6dB BANDWIDTH MEASUREMENT

The minimum of 6dB Bandwidth Measurement is 0.5 MHz.

#### 3.3.2 TEST INSTRUMENTS

Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Next Cal.
Power Meter	ANRITSU	ML2495A	1506002	Feb. 28,20	Feb. 27,21
EXA Signal Analyzer	KEYSIGHT	N9010A-526	MY54510322	Feb. 28,20	Feb. 27,21
EXA Signal Analyzer	KEYSIGHT	N9010A-544	MY54510355	Feb. 28,20	Feb. 27,21
Power Sensor	ANRITSU	MA2411B	1339352	Feb. 28,20	Feb. 27,21

**NOTE:**

1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to CEPREI/CHINA, GRGT/CHINA and NIM/CHINA.
2. The test was performed in RF Oven room.

#### 3.3.3 TEST PROCEDURE


1. Set RBW = 100 kHz.
2. Set the video bandwidth (VBW) ≥ 3 RBW.
3. Detector = Peak.
4. Trace mode = max hold.
5. Sweep = auto couple.
6. Allow the trace to stabilize.
7. Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission.

#### 3.3.4 DEVIATION FROM TEST STANDARD

No deviation.



### 3.3.5 TEST SETUP

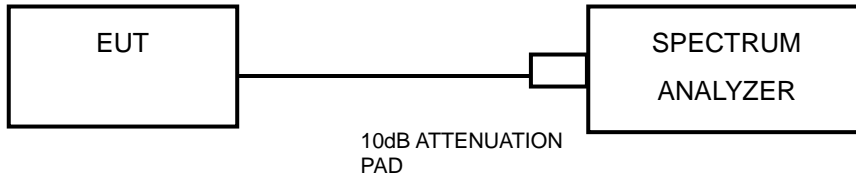

### 3.3.6 EUT OPERATING CONDITIONS


The software provided by client to enable the EUT under transmission condition continuously at lowest, middle and highest channel frequencies individually.



### 3.3.7 TEST RESULTS

#### 802.11b

CHANNEL	CHANNEL FREQUENCY (MHz)	6dB BANDWIDTH (MHz)	MINIMUM LIMIT (MHz)	PASS / FAIL
1	2412	8.09	0.5	PASS
6	2437	9.01	0.5	PASS
11	2462	8.54	0.5	PASS

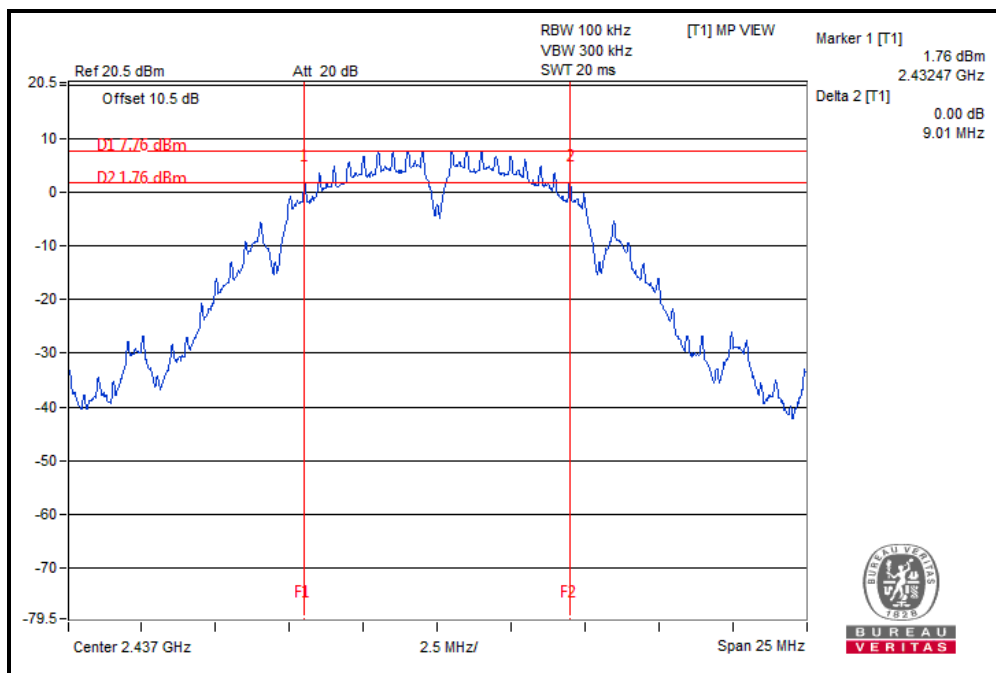




**BUREAU  
VERITAS**

Test Report No.: RF200417W002-2

802.11g

CHANNEL	CHANNEL FREQUENCY (MHz)	6dB BANDWIDTH (MHz)	MINIMUM LIMIT (MHz)	PASS / FAIL
1	2412	16.31	0.5	PASS
6	2437	16.31	0.5	PASS
11	2462	16.04	0.5	PASS

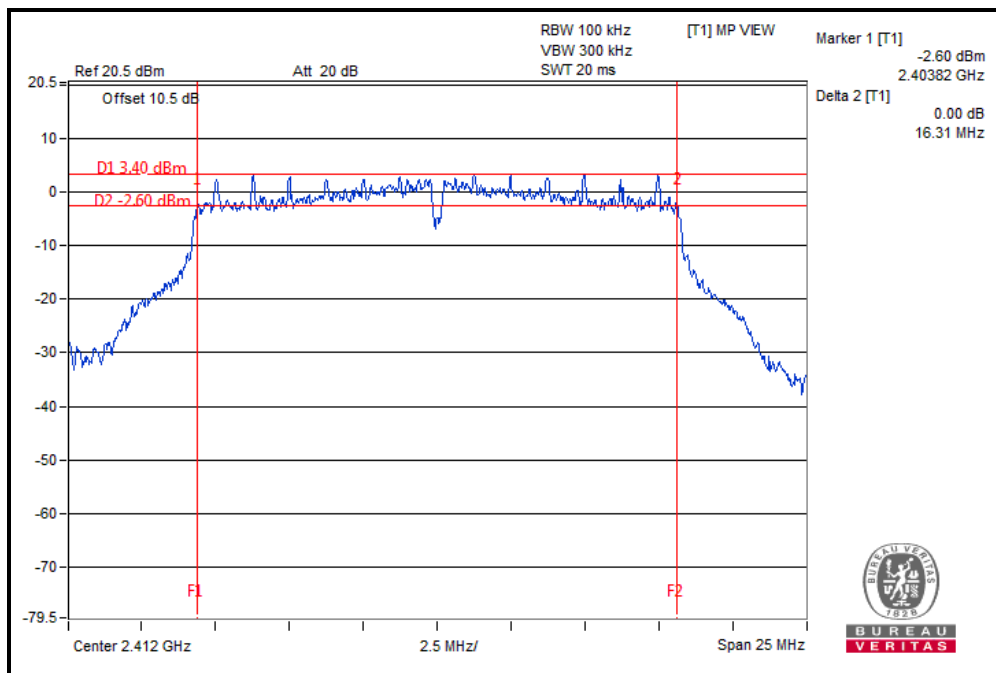




**BUREAU  
VERITAS**

Test Report No.: RF200417W002-2

802.11n (20MHz)

CHANNEL	CHANNEL FREQUENCY (MHz)	6dB BANDWIDTH (MHz)	MINIMUM LIMIT (MHz)	PASS / FAIL
1	2412	17.61	0.5	PASS
6	2437	17.61	0.5	PASS
11	2462	17.57	0.5	PASS

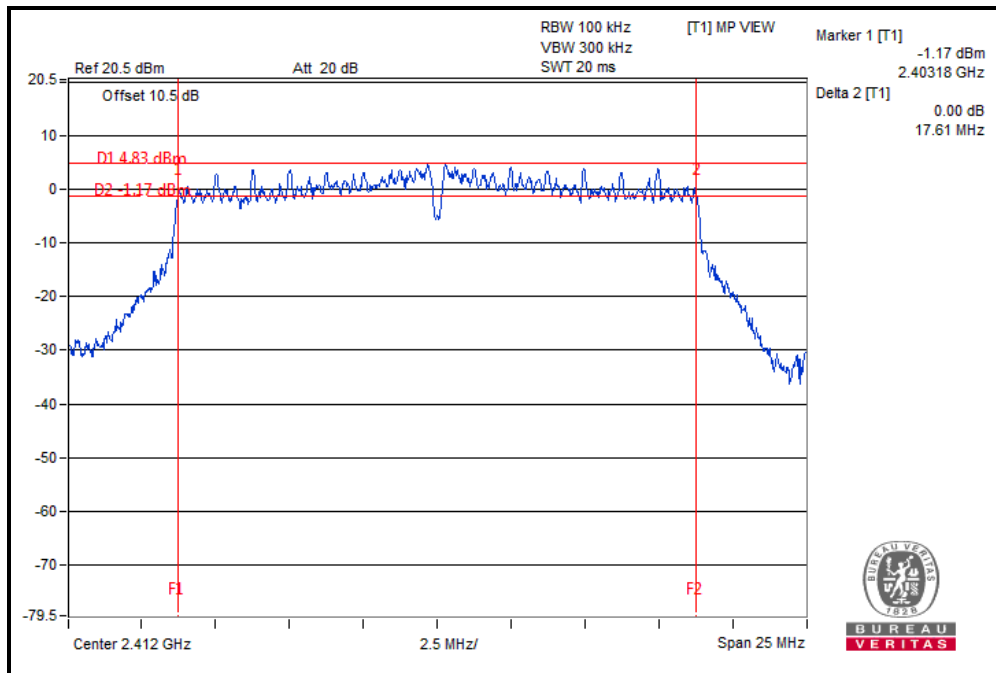






**BT-LE (GFSK)**

CHANNEL	CHANNEL FREQUENCY (MHz)	6dB BANDWIDTH (MHz)	MINIMUM LIMIT (MHz)	PASS / FAIL
0	2402	0.72	0.5	PASS
19	2440	0.72	0.5	PASS
39	2480	0.72	0.5	PASS

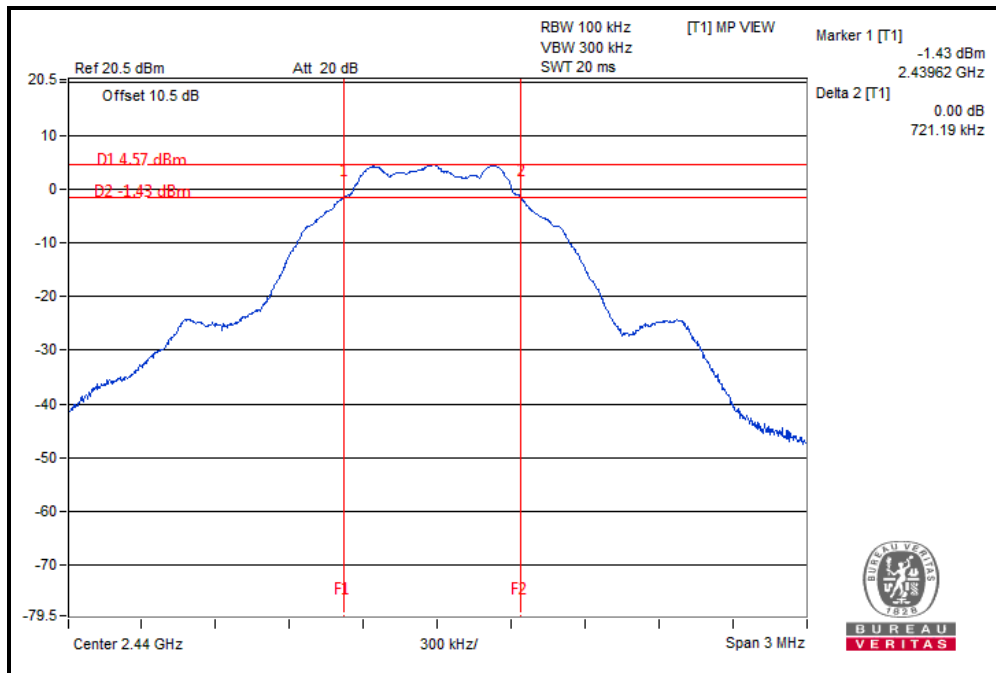




### 3.4 CONDUCTED OUTPUT POWER

#### 3.4.1 LIMITS OF CONDUCTED OUTPUT POWER MEASUREMENT

For systems using digital modulation in the 2400–2483.5 MHz band: 1 Watt (30dBm)

#### 3.4.2 TEST SETUP

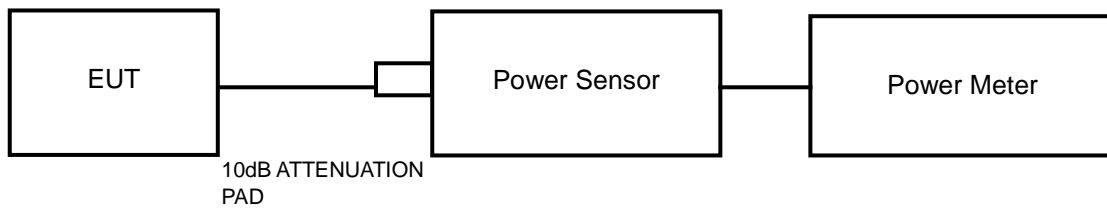

#### 3.4.3 TEST INSTRUMENTS

Refer to section 3.3.2 to get information of above instrument.

#### 3.4.4 TEST PROCEDURES

A peak power sensor was used on the output port of the EUT. A power meter was used to read the response of the peak power sensor. Record the power level.

#### 3.4.5 DEVIATION FROM TEST STANDARD

No deviation.

#### 3.4.6 EUT OPERATING CONDITIONS

The software provided by client to enable the EUT under transmission condition continuously at lowest, middle and highest channel frequencies individually.



### 3.4.7 TEST RESULTS

#### 3.4.7.1 MAXIMUM PEAK OUTPUT POWER

##### 802.11b

CHANNEL	CHANNEL FREQUENCY (MHz)	PEAK POWER (dBm)	PEAK POWER (mW)	PEAK POWER LIMIT(W)	PASS/FAIL
1	2412	17.87	61.235	1	PASS
6	2437	17.86	61.094	1	PASS
11	2462	17.80	60.256	1	PASS

##### 802.11g

CHANNEL	CHANNEL FREQUENCY (MHz)	PEAK POWER (dBm)	PEAK POWER (mW)	PEAK POWER LIMIT(W)	PASS/FAIL
1	2412	23.35	<b>216.272</b>	1	PASS
6	2437	23.17	207.491	1	PASS
11	2462	23.22	209.894	1	PASS

##### 802.11n (20MHz)

CHANNEL	CHANNEL FREQUENCY (MHz)	PEAK POWER (dBm)	PEAK POWER (mW)	PEAK POWER LIMIT(W)	PASS/FAIL
1	2412	22.88	194.089	1	PASS
6	2437	23.07	202.768	1	PASS
11	2462	22.83	191.867	1	PASS

##### BT-LE (GFSK)

CHANNEL	CHANNEL FREQUENCY (MHz)	PEAK POWER (dBm)	PEAK POWER (mW)	PEAK POWER LIMIT(W)	PASS/FAIL
0	2402	4.37	2.735	1	PASS
19	2440	4.59	<b>2.877</b>	1	PASS
39	2480	4.27	2.673	1	PASS



### 3.4.7.2 AVERAGE OUTPUT POWER (FOR REFERENCE)

The average power sensor was used on the output port of the EUT. A power meter was used to read the response of the power sensor. Record the power level.

#### 802.11b

CHANNEL	CHANNEL FREQUENCY (MHz)	AVERAGE POWER (dBm)	PASS/FAIL
1	2412	15.17	N/A
6	2437	15.11	N/A
11	2462	15.15	N/A

#### 802.11g

CHANNEL	CHANNEL FREQUENCY (MHz)	AVERAGE POWER (dBm)	PASS/FAIL
1	2412	14.02	N/A
6	2437	13.85	N/A
11	2462	13.93	N/A

#### 802.11n (20MHz)

CHANNEL	CHANNEL FREQUENCY (MHz)	AVERAGE POWER (dBm)	PASS/FAIL
1	2412	13.28	N/A
6	2437	13.48	N/A
11	2462	13.43	N/A

#### BT-LE (GFSK)

CHANNEL	CHANNEL FREQUENCY (MHz)	AVERAGE POWER (dBm)	PASS/FAIL
0	2402	4.26	N/A
19	2440	4.48	N/A
39	2480	4.18	N/A




### 3.5 POWER SPECTRAL DENSITY MEASUREMENT

#### 3.5.1 LIMITS OF POWER SPECTRAL DENSITY MEASUREMENT

The Maximum of Power Spectral Density Measurement is 8dBm/3KHz.

#### 3.5.2 TEST SETUP



#### 3.5.3 TEST INSTRUMENTS

Refer to section 3.3.2 to get information of above instrument.

#### 3.5.4 TEST PROCEDURE

1. Set the span to 1.5 times the DTS bandwidth
2. Set the RBW = 3 kHz, VBW  $\geq 3 \times$  RBW, Detector = peak.
3. Sweep time = auto couple, Trace mode = max hold, allow trace to fully stabilize.
4. Use the peak marker function to determine the maximum amplitude level.

#### 3.5.5 DEVIATION FROM TEST STANDARD

No deviation.

#### 3.5.6 EUT OPERATING CONDITION


The software provided by client to enable the EUT under transmission condition continuously at lowest, middle and highest channel frequencies individually.



### 3.5.7 TEST RESULTS

#### 802.11b

Channel	FREQ. (MHz)	PSD (dBm/3kHz)	Limit (dBm/3kHz)	PASS /FAIL
1	2412	-6.15	8	PASS
6	2437	-6.33	8	PASS
11	2462	-5.72	8	PASS

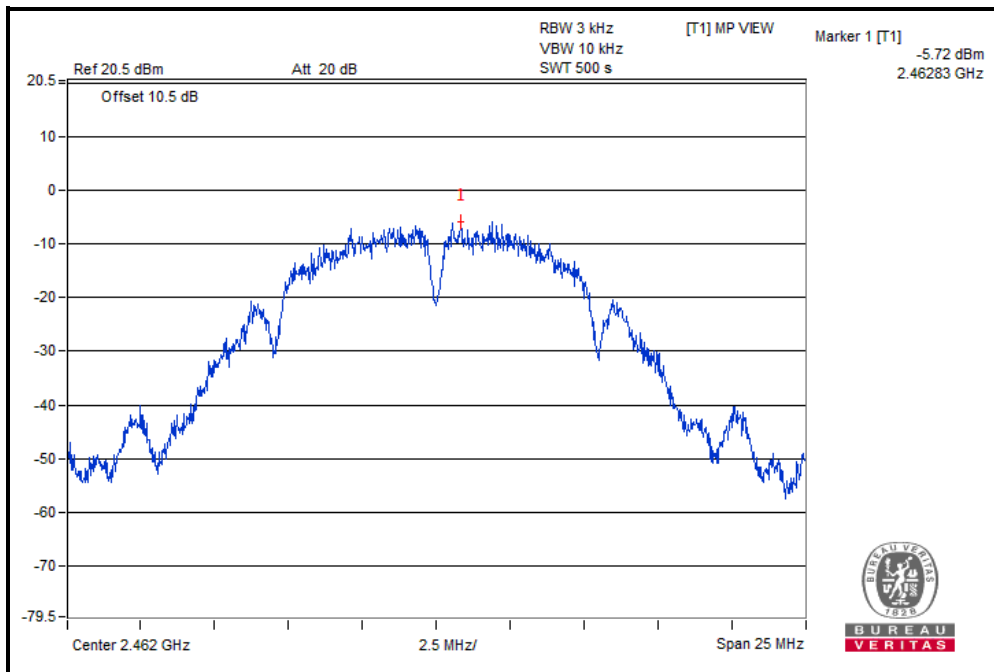




**BUREAU  
VERITAS**

Test Report No.: RF200417W002-2

802.11g

Channel	FREQ. (MHz)	PSD (dBm/3kHz)	Limit (dBm/3kHz)	PASS /FAIL
1	2412	-8.20	8	PASS
6	2437	-8.25	8	PASS
11	2462	-7.40	8	PASS

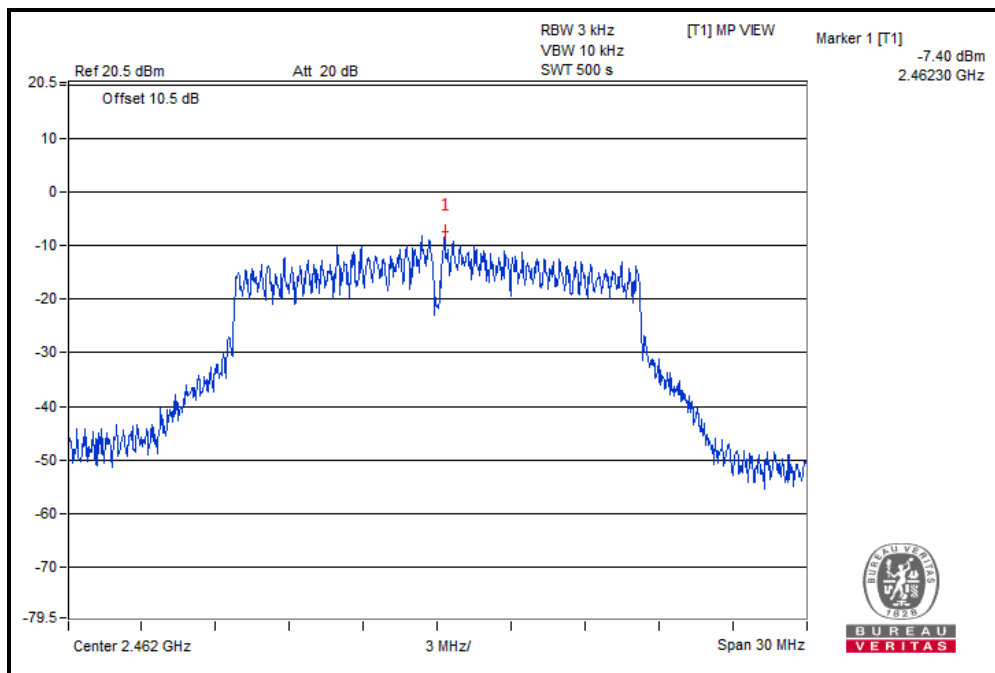




**BUREAU  
VERITAS**

Test Report No.: RF200417W002-2

802.11n (20MHz)

Channel	FREQ. (MHz)	PSD (dBm/3kHz)	Limit (dBm/3kHz)	PASS /FAIL
1	2412	-10.92	8	PASS
6	2437	-9.93	8	PASS
11	2462	-9.87	8	PASS

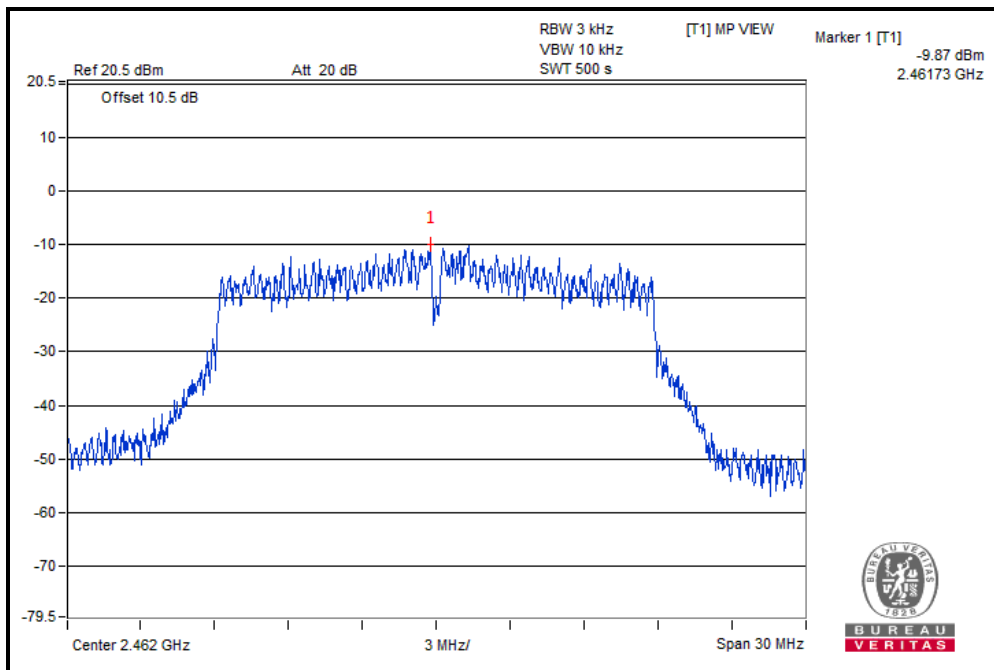






**BUREAU  
VERITAS**

**Test Report No.: RF200417W002-2**

**BT-LE (GFSK)**

Channel	FREQ. (MHz)	PSD (dBm/3kHz)	Limit (dBm/3kHz)	PASS /FAIL
0	2402	-8.08	8	PASS
19	2440	-7.79	8	PASS
39	2480	-8.08	8	PASS

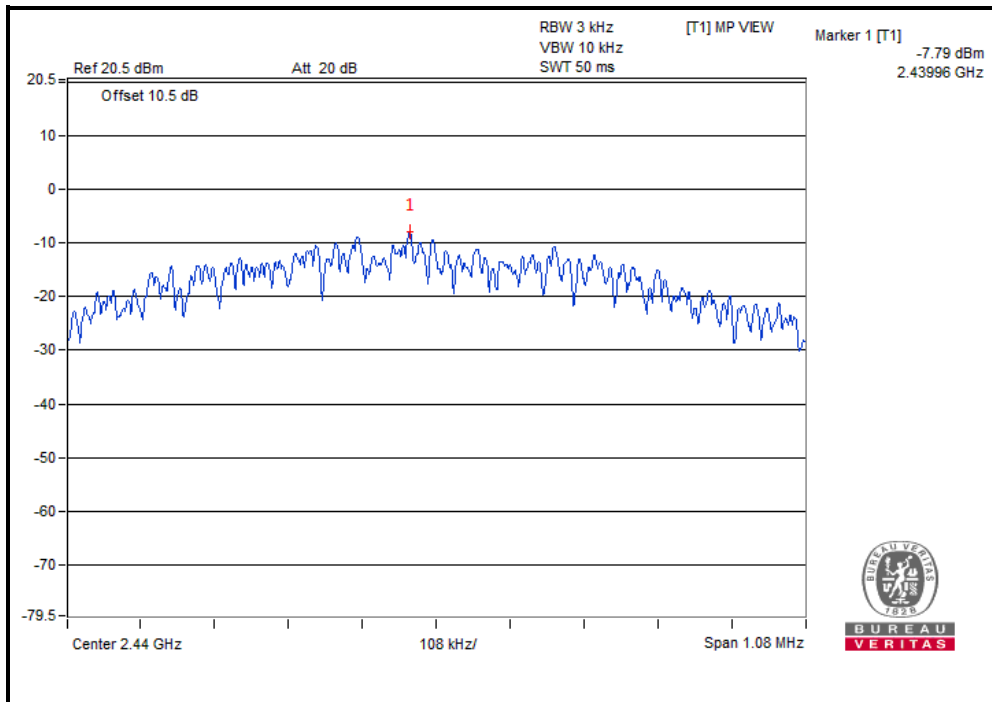




### 3.6 OUT OF BAND EMISSION MEASUREMENT

#### 3.6.1 LIMITS OF OUT OF BAND EMISSION MEASUREMENT

Below  $-20\text{dB}$  of the highest emission level of operating band (in 100kHz Resolution Bandwidth).

#### 3.6.2 TEST SETUP

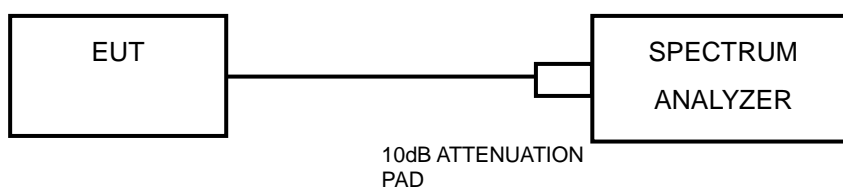

#### 3.6.3 TEST INSTRUMENTS

Refer to section 3.3.2 to get information of above instrument.

#### 3.6.4 TEST PROCEDURE

##### MEASUREMENT PROCEDURE REF

1. Set the RBW = 100 kHz.
2. Set the VBW  $\geq$  300 kHz.
3. Detector = peak.
4. Sweep time = auto couple.
5. Trace mode = max hold.
6. Allow trace to fully stabilize.
7. Use the peak marker function to determine the maximum power level in any 100 kHz band segment within the fundamental EBW.



## MEASUREMENT PROCEDURE OOB

1. Set RBW = 100 kHz.
2. Set VBW  $\geq$  300 kHz.
3. Set span to encompass the spectrum to be examined
4. Detector = peak.
5. Trace Mode = max hold.
6. Sweep = auto couple.

### 3.6.5 DEVIATION FROM TEST STANDARD

No deviation.

### 3.6.6 EUT OPERATING CONDITION

The software provided by client to enable the EUT under transmission condition continuously at lowest, middle and highest channel frequencies individually.

### 3.6.7 TEST RESULTS

The spectrum plots are attached on the following images. D1 line indicates the highest level. D2 line indicates the 20dB offset below D1. It shows compliance to the requirement.





**BUREAU  
VERITAS**



Test Report No.: RF200417W002-2

### 802.11b



#### CH 1

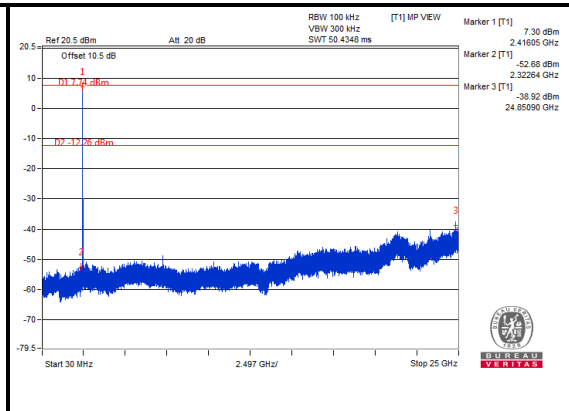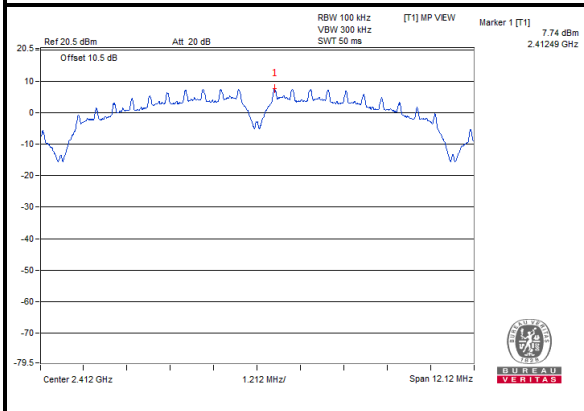

#### CH 6

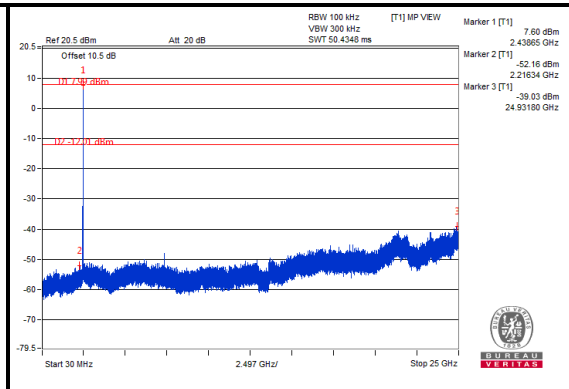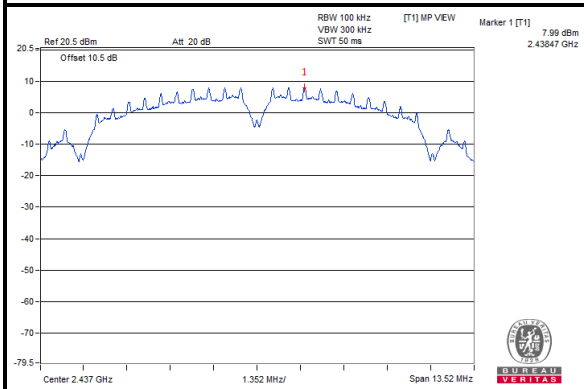

#### CH 11

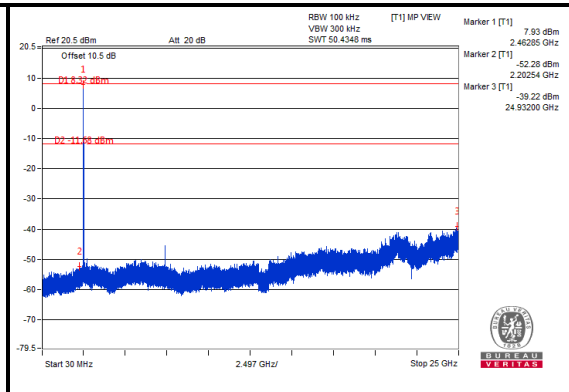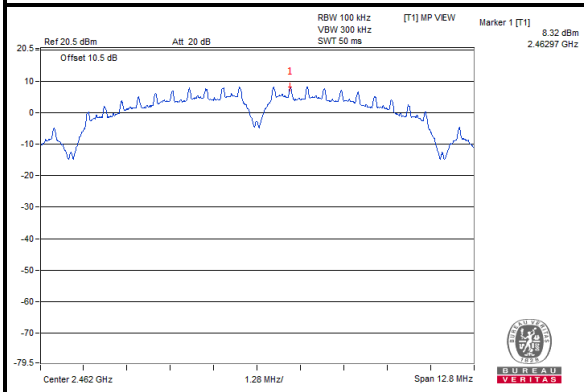





**BUREAU  
VERITAS**

Test Report No.: RF200417W002-2

### CH 1 Band Edge

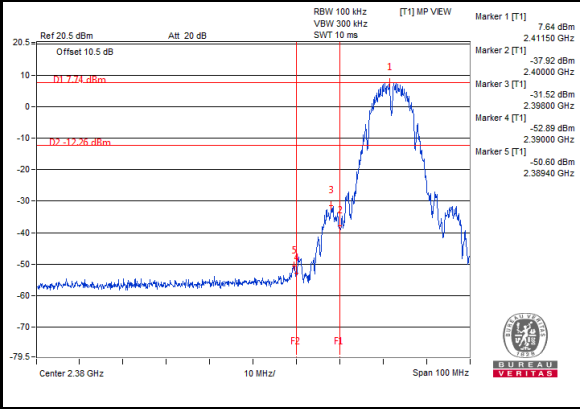

### CH 11 Band Edge

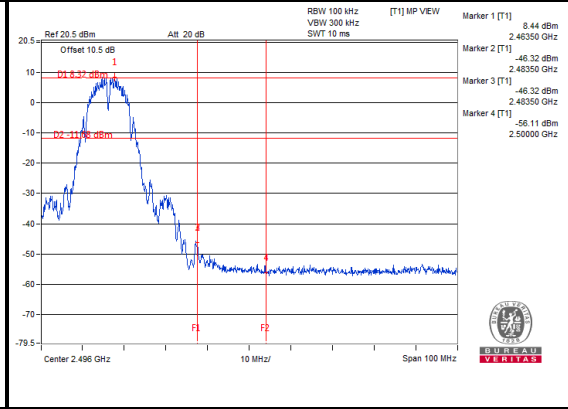




**BUREAU  
VERITAS**


Test Report No.: RF200417W002-2

### 802.11g


#### CH 1

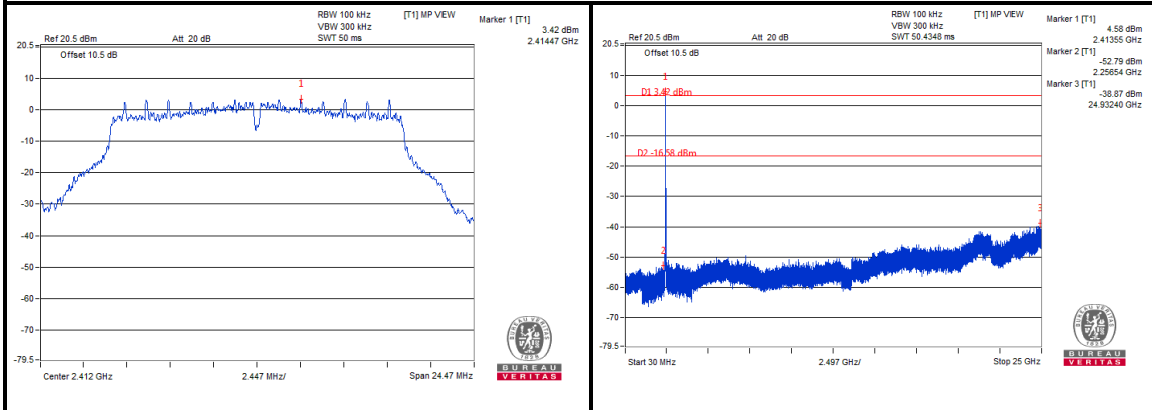

#### CH 6

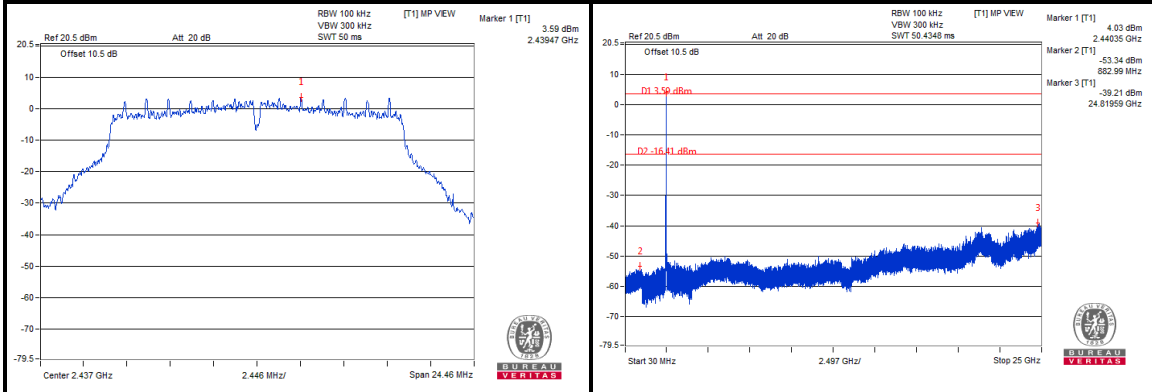

#### CH 11

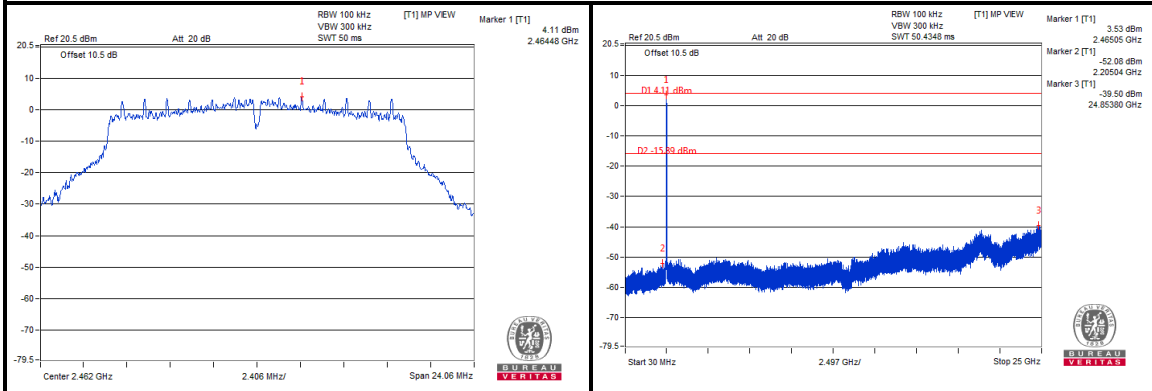





**BUREAU  
VERITAS**

Test Report No.: RF200417W002-2

### CH 1 Band Edge

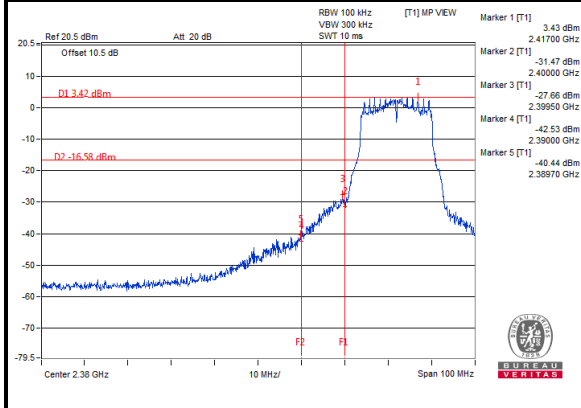

### CH 11 Band Edge

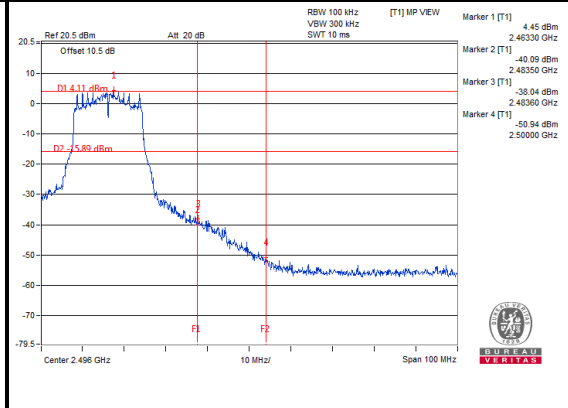





**BUREAU  
VERITAS**



Test Report No.: RF200417W002-2

### 802.11n (20MHz)



#### CH 1

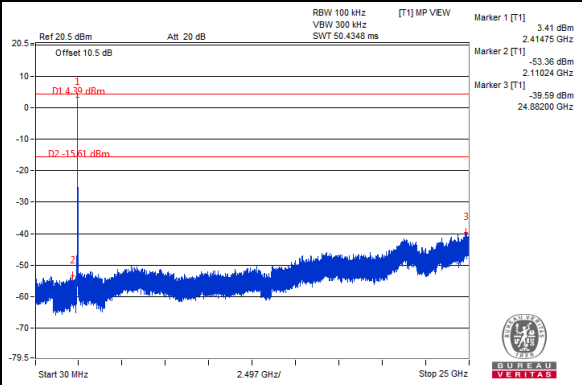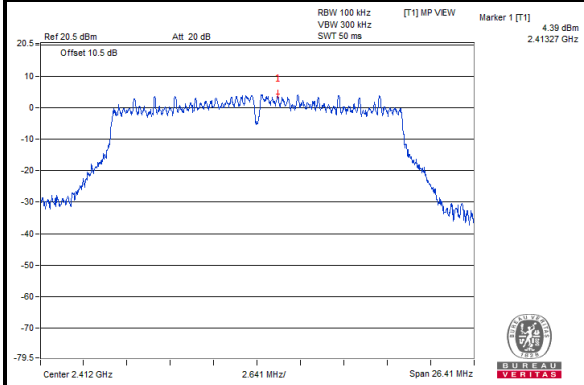

#### CH 6

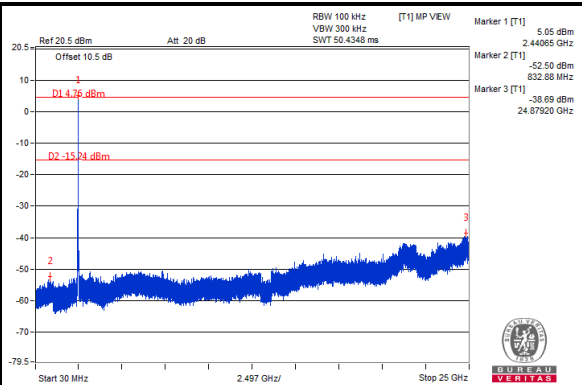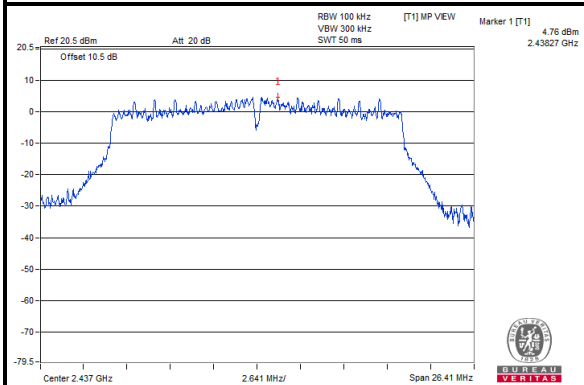

#### CH 11

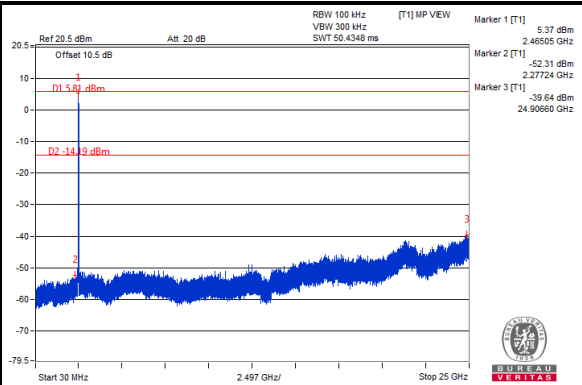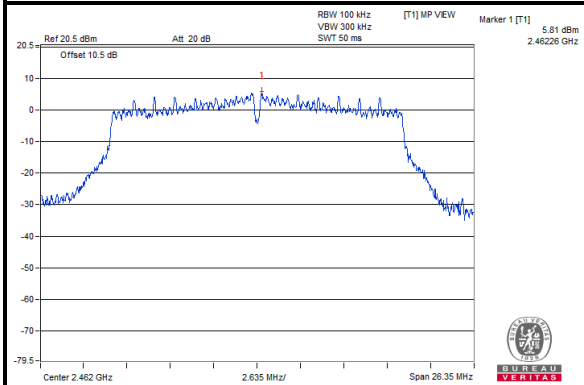







**BUREAU  
VERITAS**

Test Report No.: RF200417W002-2

### CH 1 Band Edge

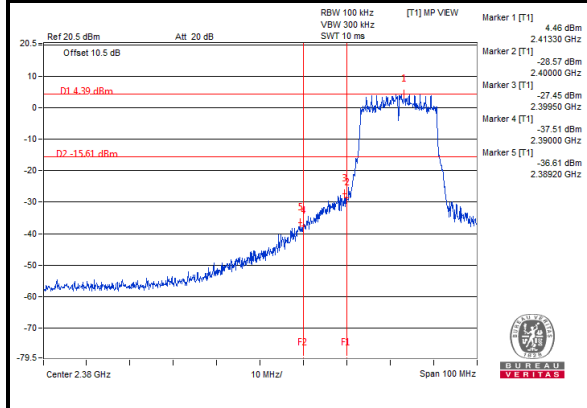

### CH 11 Band Edge

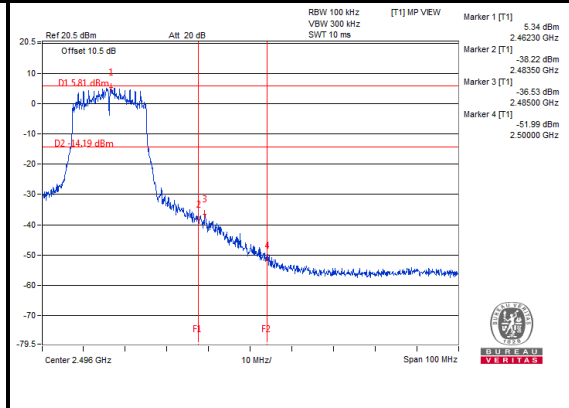





BUREAU VERITAS



Test Report No.: RF200417W002-2

### BT-LE (GFSK)



#### CH 0

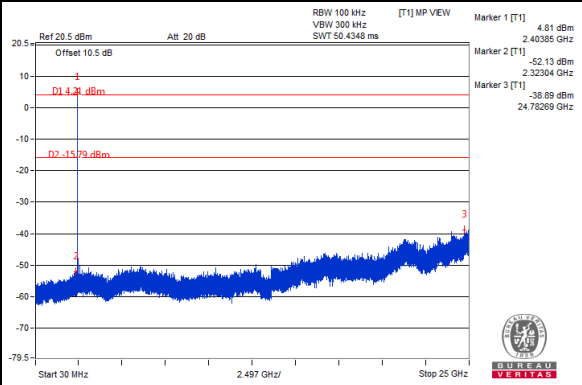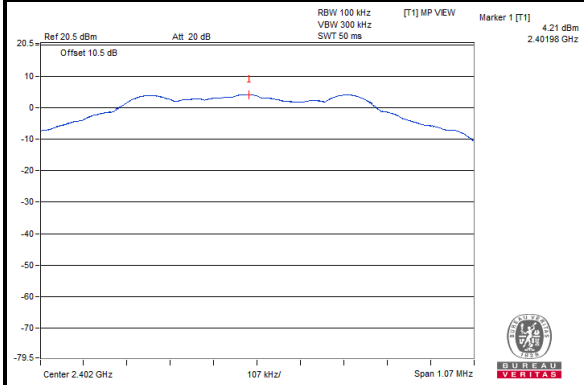

#### CH 19

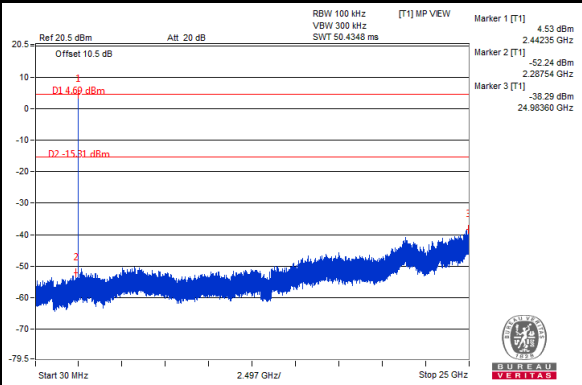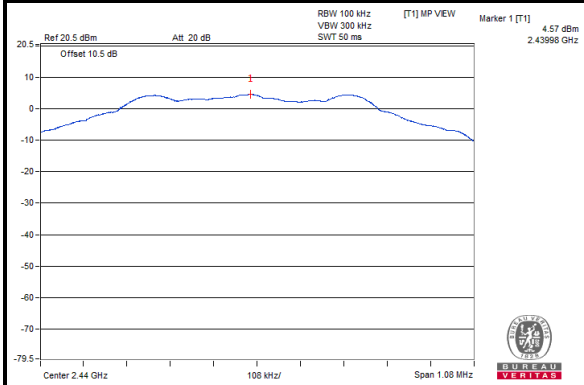


#### CH 39

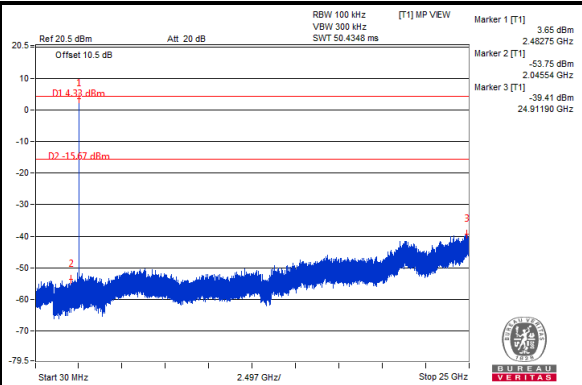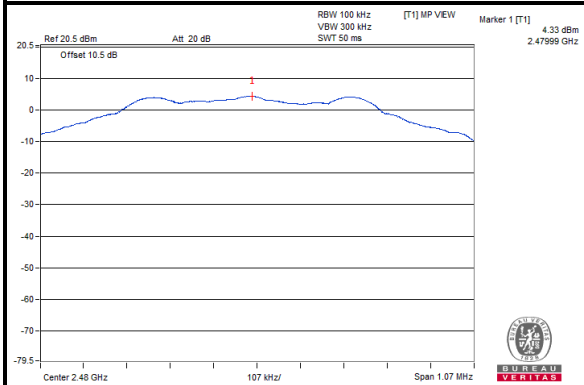



**BUREAU  
VERITAS**

Test Report No.: RF200417W002-2

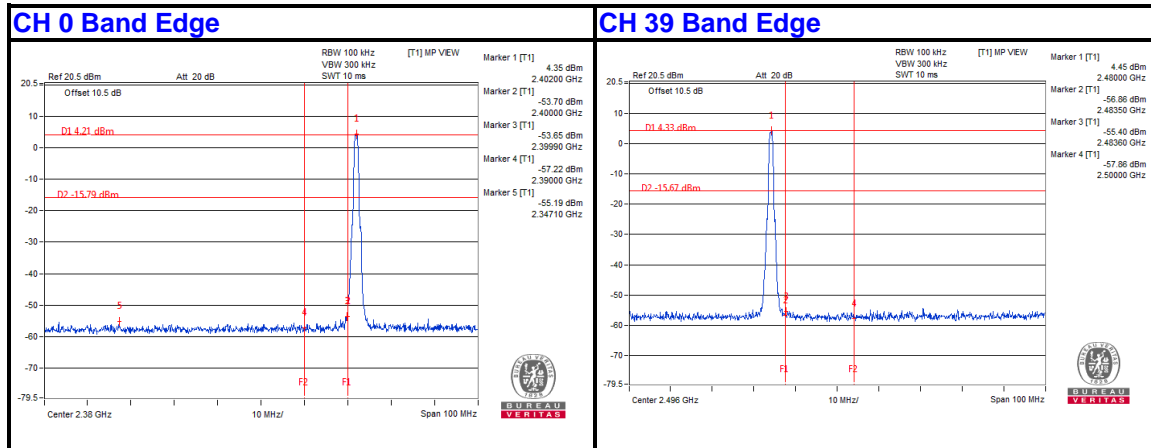



## 4 PHOTOGRAPHS OF THE TEST CONFIGURATION

Please refer to the attached file (Test Setup Photo).



## 5 APPENDIX A - MODIFICATIONS RECORDERS FOR ENGINEERING CHANGES TO THE EUT BY THE LAB

No any modifications are made to the EUT by the lab during the test.

**---END---**