

FCC Test Report

(PART 90S)

Report No.: RF170328C23-9

FCC ID: V65E4750

Test Model: E4750

Received Date: Mar. 28, 2017

Test Date: Apr. 12, 2017 ~ Apr. 21, 2017

Issued Date: May 02, 2017

Applicant: Kyocera Corporation c/o Kyocera International, Inc.

Address: 8611 Balboa Avenue, San Diego, CA 92123

Issued By: Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch

Lab Address: No. 47-2, 14th Ling, Chia Pau Vil., Lin Kou Dist., New Taipei City, Taiwan
(R.O.C)

Test Location (1): No. 19, Hwa Ya 2nd Rd, Wen Hwa Tsuen, Kwei Shan Hsiang, Taoyuan
Hsien 333, Taiwan, R.O.C.

Test Location (2): No.215, Sec. 3, Beixin Rd., Xindian Dist., New Taipei City 231, Taiwan,
R.O.C

This report is for your exclusive use. Any copying or replication of this report to or for any other person or entity, or use of our name or trademark, is permitted only with our prior written permission. This report sets forth our findings solely with respect to the test samples identified herein. The results set forth in this report are not indicative or representative of the quality or characteristics of the lot from which a test sample was taken or any similar or identical product unless specifically and expressly noted. Our report includes all of the tests requested by you and the results thereof based upon the information that you provided to us. You have 60 days from date of issuance of this report to notify us of any material error or omission caused by our negligence, provided, however, that such notice shall be in writing and shall specifically address the issue you wish to raise. A failure to raise such issue within the prescribed time shall constitute your unqualified acceptance of the completeness of this report, the tests conducted and the correctness of the report contents. Unless specific mention, the uncertainty of measurement has been explicitly taken into account to declare the compliance or non-compliance to the specification. The report must not be used by the client to claim product certification, approval, or endorsement by TAF or any government agency

Table of Contents

Release Control Record	3
1 Certificate of Conformity	4
2 Summary of Test Results.....	5
2.1 Measurement Uncertainty.....	5
2.2 Test Site and Instruments	6
3 General Information	8
3.1 General Description of EUT.....	8
3.2 Configuration of System under Test.....	9
3.2.1 Description of Support Units.....	9
3.3 Test Mode Applicability and Tested Channel Detail	10
3.4 EUT Operating Conditions	12
3.5 General Description of Applied Standards.....	12
4 Test Types and Results.....	13
4.1 Output Power Measurement.....	13
4.1.1 Limits of Output Power Measurement	13
4.1.2 Test Procedures.....	13
4.1.3 Test Setup.....	14
4.1.4 Test Results	15
4.2 Frequency Stability Measurement	19
4.2.1 Limits of Frequency Stability Measurement.....	19
4.2.2 Test Procedure	19
4.2.3 Test Setup.....	19
4.2.4 Test Results	20
4.3 Occupied Bandwidth Measurement.....	25
4.3.1 Test Procedure	25
4.3.2 Test Setup.....	25
4.3.3 Test Result	26
4.4 Emission Mask Measurement.....	29
4.4.1 Limits of Band Edge Measurement	29
4.4.2 Test Setup.....	29
4.4.3 Test Procedures.....	29
4.4.4 Test Results	30
4.5 Conducted Spurious Emissions.....	34
4.5.1 Limits of Conducted Spurious Emissions Measurement.....	34
4.5.2 Test Setup.....	34
4.5.3 Test Procedure	34
4.5.4 Test Results	35
4.6 Radiated Emission Measurement.....	39
4.6.1 Limits of Radiated Emission Measurement	39
4.6.2 Test Procedure	39
4.6.3 Deviation from Test Standard	39
4.6.4 Test Setup.....	39
4.6.5 Test Results	40
5 Pictures of Test Arrangements.....	48
Appendix – Information on the Testing Laboratories	49

Release Control Record

Issue No.	Description	Date Issued
RF170328C23-9	Original Release	May 02, 2017

1 Certificate of Conformity

Product: Feature Phone

Brand: KYOCERA

Test Model: E4750

Sample Status: Identical Prototype

Applicant: Kyocera Corporation c/o Kyocera International, Inc.

Test Date: Apr. 12, 2017 ~ Apr. 21, 2017

Standards: FCC Part 90, Subpart S

The above equipment has been tested by **Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch**, and found compliance with the requirement of the above standards. The test record, data evaluation & Equipment Under Test (EUT) configurations represented herein are true and accurate accounts of the measurements of the sample's EMC characteristics under the conditions specified in this report.

Prepared by : Evonne Liu , **Date:** May 02, 2017
Evonne Liu / Specialist

Approved by : David Huang , **Date:** May 02, 2017
David Huang / Project Engineer

2 Summary of Test Results

Applied Standard: FCC Part 90 & Part 2			
FCC Clause	Test Item	Result	Remarks
2.1046 90.635 (b)	Effective Radiated Power	Pass	Meet the requirement of limit.
2.1055 90.213	Frequency Stability	Pass	Meet the requirement of limit.
2.1049 90.209	Occupied Bandwidth (*)	Pass	Meet the requirement of limit.
2.1051 90.209	Emission Masks	Pass	Meet the requirement of limit.
2.1051 90.691	Conducted Spurious Emissions	Pass	Meet the requirement of limit.
2.1053 90.691	Radiated Spurious Emissions	Pass	Meet the requirement of limit. Minimum passing margin is -37.71 dB at 3276 MHz.

2.1 Measurement Uncertainty

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the EUT as specified in CISPR 16-4-2:

Measurement	Frequency	Expanded Uncertainty (k=2) (±)
Conducted Emissions at mains ports	150 kHz ~ 30 MHz	2.44 dB
Radiated Emissions up to 1 GHz	30 MHz ~ 200 MHz	2.0153 dB
	200 MHz ~ 1000 MHz	2.0224 dB
Radiated Emissions above 1 GHz	1 GHz ~ 18 GHz	1.0121 dB
	18 GHz ~ 40 GHz	1.1508 dB

2.2 Test Site and Instruments

Description & Manufacturer	Model No.	Serial No.	Date of Calibration	Due Date of Calibration
Test Receiver Agilent Technologies	N9038A	MY52260177	Jun. 21, 2016	Jun. 20, 2017
Spectrum Analyzer ROHDE & SCHWARZ	FSU43	101261	Dec. 13, 2016	Dec. 12, 2017
BILOG Antenna SCHWARZBECK	VULB9168	9168-472	Dec. 16, 2016	Dec. 15, 2017
HORN Antenna ETS-Lindgren	3117	00143293	Dec. 29, 2016	Dec. 28, 2017
Double Ridge Guide Horn Antenna EMCO	3115	5619	Dec. 27, 2016	Dec. 26, 2017
BILOG Antenna SCHWARZBECK	VULB 9168	9168-153	Dec. 13, 2016	Dec. 12, 2017
Fixed Attenuator Mini-Circuits	BW-N10W5+	NA	Jul. 08, 2016	Jul. 07, 2017
MXG Vector signal generator Agilent	N5182B	MY53050430	Oct. 19, 2016	Oct. 18, 2017
Preamplifier Agilent	310N	187226	Jun. 24, 2016	Jun. 23, 2017
Preamplifier Agilent	83017A	MY39501357	Jun. 24, 2016	Jun. 23, 2017
Power Meter Anritsu	ML2495A	1232002	Sep. 08, 2016	Sep. 07, 2017
Power Sensor Anritsu	MA2411B	1207325	Sep. 08, 2016	Sep. 07, 2017
RF signal cable ETS-LINDGREN	5D-FB	Cable-CH1-01(R FC-SMS-100-SM S-120+RFC-SMS -100-SMS-400)	Jun. 24, 2016	Jun. 23, 2017
RF signal cable ETS-LINDGREN	8D-FB	Cable-CH1-02(R FC-SMS-100-SM S-24)	Jun. 24, 2016	Jun. 23, 2017
Software BV ADT	E3 8.130425b	NA	NA	NA
Antenna Tower MF	NA	NA	NA	NA
Turn Table MF	NA	NA	NA	NA
Antenna Tower & Turn Table Controller MF	MF-7802	NA	NA	NA
Communications Tester-Wireless Agilent	8960 Series 10	MY53201073	Jul. 03, 2015	Jul. 02, 2017
Radio Communication Analyzer Anritsu	MT8820C	6201300640	Aug. 10, 2015	Aug. 09, 2017
Temperature & Humidity Chamber	GTH-120-40-CP-A R	MAA1306-019	Sep. 02, 2016	Sep. 01, 2017
DC Power Supply Topward	33010D	807748	Oct. 25, 2016	Oct. 24, 2018
Digital Multimeter Fluke	87-III	70360742	Jul. 01, 2016	Jun. 30, 2017

- Note: 1. The calibration interval of the above test instruments is 12 / 24 months and the calibrations are traceable to NML/ROC and NIST/USA.
2. The test was performed in HsinTien Chamber 1.
 3. The horn antenna and preamplifier (model: 83017A) are used only for the measurement of emission frequency above 1 GHz if tested.
 4. The FCC Site Registration No. is 149147.
 5. The IC Site Registration No. is IC7450I-1.

3 General Information

3.1 General Description of EUT

Product	Feature Phone	
Brand	KYOCERA	
Test Model	E4750	
Status of EUT	Identical Prototype	
Power Supply Rating	5.0 Vdc (adapter) 3.8 Vdc (Li-ion battery)	
Modulation Type	CDMA	QPSK, OQPSK, HPSK
	LTE	QPSK, 16QAM
Frequency Range	CDMA BC10	817.9 ~ 823.1 MHz
	LTE Band 26 (Channel Bandwidth: 1.4 MHz)	814.7 ~ 823.3 MHz
	LTE Band 26 (Channel Bandwidth: 3 MHz)	815.5 ~ 822.5 MHz
	LTE Band 26 (Channel Bandwidth: 5 MHz)	816.5 ~ 821.5 MHz
	LTE Band 26 (Channel Bandwidth: 10 MHz)	819 MHz
Emission Designator	CDMA BC10	1M27F9W
	LTE Band 26 (Channel Bandwidth: 1.4 MHz)	1M09W7D
	LTE Band 26 (Channel Bandwidth: 3 MHz)	2M70G7D
	LTE Band 26 (Channel Bandwidth: 5 MHz)	4M50W7D
	LTE Band 26 (Channel Bandwidth: 10 MHz)	8M97W7D
Max. ERP Power	CDMA BC10	179.56 mW
	LTE Band 26 (Channel Bandwidth: 1.4 MHz)	201.37 mW
	LTE Band 26 (Channel Bandwidth: 3 MHz)	204.64 mW
	LTE Band 26 (Channel Bandwidth: 5 MHz)	203.70 mW
	LTE Band 26 (Channel Bandwidth: 10 MHz)	199.53 mW
Antenna Type	Fixed Internal Antenna	
Accessory Device	Refer to Note as below	
Data Cable Supplied	Refer to Note as below	

Note:



1. The EUT contains following accessory devices.

Product	Brand	Model	Description
Adapter	KYOCERA	SCP-50ADT	I/P: 100-240 Vac, 50/60 Hz, 0.25 A O/P: 5 Vdc, 1.5 A
Battery	KYOCERA	SCP-71LBPS	3.8 Vdc, 11.02 Wh
USB Cable	KYOCERA	SCP-22SDC	1 m shielded cable w/o core



2. The above EUT information is declared by manufacturer and for more detailed features description, please refer to the manufacturer's specifications or user's manual.

3.2 Configuration of System under Test

<Radiated Emission Test>

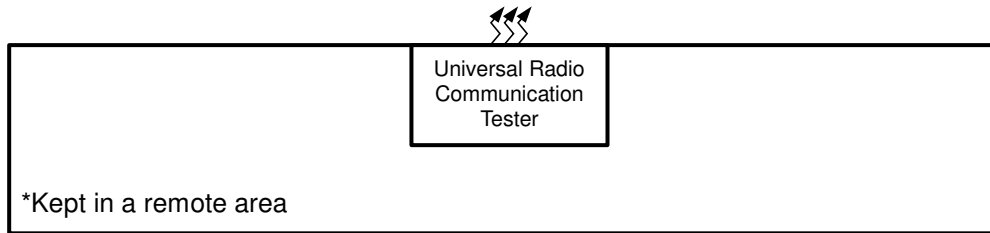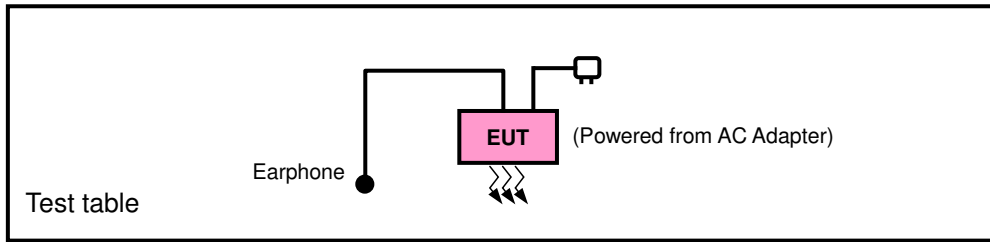

<E.R.P. Test>

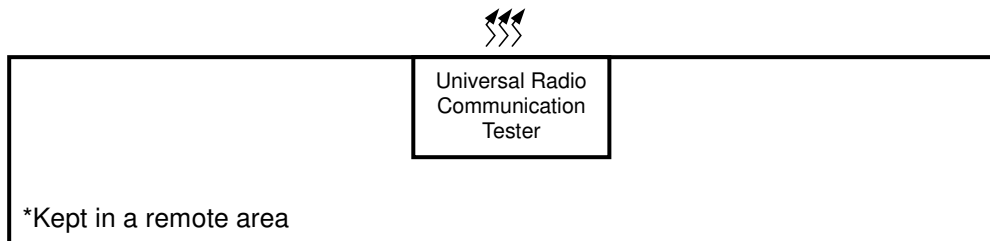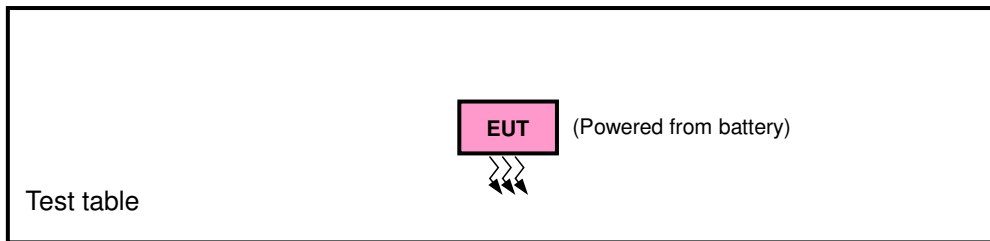

3.2.1 Description of Support Units

The EUT has been tested as an independent unit together with other necessary accessories or support units.

3.3 Test Mode Applicability and Tested Channel Detail

Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates, XYZ axis, and antenna ports

The worst case was found when positioned as the table below. Following channel(s) was (were) selected for the final test as listed below:

Band	ERP	Radiated Emission
CDMA	Y-plane	Y-axis
LTE Band 26	X-plane	Y-axis

CDMA

EUT Configure Mode	Test Item	Available Channel	Tested Channel	Mode
-	ERP	476 to 684	476, 580, 684	1xRTT
-	Frequency Stability	476 to 684	476, 684	1xRTT
-	Occupied Bandwidth	476 to 684	476, 580, 684	1xRTT
-	Emission Mask	476 to 684	476, 580, 684	1xRTT
-	Conducted Emission	476 to 684	476, 580, 684	1xRTT
-	Radiated Emission	476 to 684	476, 580, 684	1xRTT

LTE Band 26

EUT Configure Mode	Test Item	Available Channel	Tested Channel	Channel Bandwidth	Modulation	Mode
-	ERP	26697 to 26783	26697, 26740, 26783	1.4 MHz	QPSK, 16QAM	1 RB / 2 RB Offset
		26705 to 26775	26705, 26740, 26775	3 MHz	QPSK, 16QAM	1 RB / 7 RB Offset
		26715 to 26765	26715, 26740, 26765	5 MHz	QPSK, 16QAM	1 RB / 12 RB Offset
		26740	26740	10 MHz	QPSK, 16QAM	1 RB / 49 RB Offset
-	Frequency Stability	26697 to 26783	26697, 26783	1.4 MHz	QPSK	1 RB / 2 RB Offset
		26705 to 26775	26705, 26775	3 MHz	QPSK	1 RB / 7 RB Offset
		26715 to 26765	26715, 26765	5 MHz	QPSK	1 RB / 12 RB Offset
		26740	26740	10 MHz	QPSK	1 RB / 49 RB Offset
-	Occupied Bandwidth	26697 to 26783	26697, 26740, 26783	1.4 MHz	QPSK, 16QAM	6 RB / 0 RB Offset
		26705 to 26775	26705, 26740, 26775	3 MHz	QPSK, 16QAM	15 RB / 0 RB Offset
		26715 to 26765	26715, 26740, 26765	5 MHz	QPSK, 16QAM	25 RB / 0 RB Offset
		26740	26740	10 MHz	QPSK, 16QAM	50 RB / 0 RB Offset
-	Emission Mask	26697 to 26783	26697, 26740, 26783	1.4 MHz	QPSK, 16QAM	6 RB / 0 RB Offset
		26705 to 26775	26705, 26740, 26775	3 MHz	QPSK, 16QAM	15 RB / 0 RB Offset
		26715 to 26765	26715, 26740, 26765	5 MHz	QPSK, 16QAM	25 RB / 0 RB Offset
		26740	26740	10 MHz	QPSK, 16QAM	50 RB / 0 RB Offset
-	Conducted Emission	26697 to 26783	26697, 26740, 26783	1.4 MHz	QPSK	1 RB / 0 RB Offset
		26705 to 26775	26705, 26740, 26775	3 MHz	QPSK	1 RB / 0 RB Offset
		26715 to 26765	26715, 26740, 26765	5 MHz	QPSK	1 RB / 0 RB Offset
		26740	26740	10 MHz	QPSK	1 RB / 0 RB Offset
-	Radiated Emission	26740	26740	10 MHz	QPSK	1 RB / 49 RB Offset

Note: This device was tested under all bandwidths, RB configurations and modulations. The worst case was found in QPSK modulation.

Test Condition:

Test Item	Environmental Conditions	Input Power	Tested By
ERP	25 deg. C, 65 % RH	3.8 Vdc	Anson Lin
Frequency Stability	25 deg. C, 65 % RH	3.8 Vdc	Anson Lin
Occupied Bandwidth	25 deg. C, 65 % RH	3.8 Vdc	Anson Lin
Band Edge	25 deg. C, 65 % RH	3.8 Vdc	Anson Lin
Peak to Average Ratio	25 deg. C, 65 % RH	3.8 Vdc	Anson Lin
Condcudeted Emission	25 deg. C, 65 % RH	3.8 Vdc	Anson Lin
Radiated Emission	25 deg. C, 65 % RH	120 Vac, 60 Hz	Charles Hsiao

3.4 EUT Operating Conditions

The EUT makes a call to the communication simulator. The communication simulator station system controlled a EUT to export maximum output power under transmission mode and specific channel frequency

3.5 General Description of Applied Standards

The EUT is a RF Product. According to the specifications of the manufacturer, it must comply with the requirements of the following standards:

FCC 47 CFR Part 2

FCC 47 CFR Part 90

ANSI/TIA/EIA-603-D 2010

Note: All test items have been performed and recorded as per the above standards.

4 Test Types and Results

4.1 Output Power Measurement

4.1.1 Limits of Output Power Measurement

Mobile / Portable station are limited to 100 watts e.r.p.

4.1.2 Test Procedures

EIRP / ERP Measurement:


- a. All measurements were done at low, middle and high operational frequency range. RBW and VBW is 5 MHz for CDMA and 10 MHz for LTE mode.
- b. Substitution method is used for E.I.R.P measurement. In the semi-anechoic chamber, EUT placed on the 0.8 m height of Turn Table, rotated the table around 360 degrees to search the maximum radiation power and receiver antenna shall be rotated vertical and horizontal polarization and moved height from 1 m to 4 m to find the maximum polar radiated power. The "Read Value" is the spectrum reading the maximum power value.
- c. The substitution horn antenna is substituted for EUT at the same position and signals generator export the CW signal to the substitution antenna via a tx cable. Rotated the Turn Table and moved receiving antenna to find the maximum radiation power. Adjust output power level of S.G to get a Value of spectrum reading equal to "Read Value" of step b. Record the power level of S.G.
- d. $EIRP = \text{Output power level of S.G} - \text{TX cable loss} + \text{Antenna gain of substitution horn}$. E.R.P power can be calculated form E.I.R.P power by subtracting the gain of dipole, $E.R.P \text{ power} = E.I.P.R \text{ power} - 2.15 \text{ dBi}$.

Conducted Power Measurement:

- a. The EUT was set up for the maximum power with LTE link data modulation and link up with simulator.
- b. Set the EUT to transmit under low, middle and high channel and record the power level shown on simulator.

4.1.3 Test Setup

EIRP / ERP Measurement:

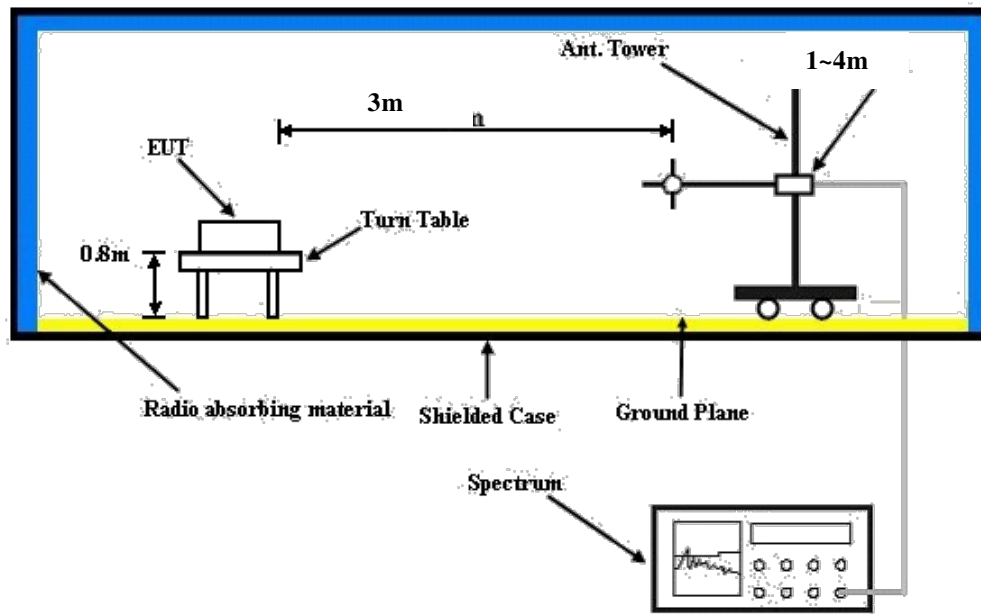

For the actual test configuration, please refer to the attached file (Test Setup Photo).

Conducted Power Measurement:



4.1.4 Test Results

Conducted Output Power (dBm)

Band	CDMA		
Channel	476	580	684
Frequency (MHz)	817.9	820.5	823.1
RC1+SO55	23.11	23.26	23.06
RC3+SO55	23.14	23.27	23.11
RC3+SO32(+ F-SCH)	23.07	23.22	23.03
RC3+SO32(+SCH)	23.02	23.20	22.98
RTAP 153.6	22.96	23.14	22.95
RETAP 4096	22.94	23.10	22.90

Band / BW	RB Size	RB Offset	QPSK			3GPP MPR (dB)	16QAM			3GPP MPR (dB)
			Low Ch 26697	Mid Ch 26740	High Ch 26783		Low Ch 26697	Mid Ch 26740	High Ch 26783	
			814.7 MHz	819.0 MHz	823.3 MHz		814.7 MHz	819.0 MHz	823.3 MHz	
26 / 1.4M	1	0	22.83	22.99	22.89	0	21.82	22.02	21.90	1
	1	2	22.73	22.83	22.64	0	21.78	21.73	21.65	1
	1	5	23.42	23.45	23.35	0	22.38	22.50	22.39	1
	3	0	22.73	21.72	21.61	0	21.77	20.78	20.54	1
	3	1	22.71	21.53	21.48	0	21.73	20.58	20.42	1
	3	3	22.72	21.93	21.85	0	21.72	20.92	20.83	1
	6	0	21.72	21.83	21.74	1	20.72	20.89	20.74	2

Band / BW	RB Size	RB Offset	QPSK			3GPP MPR (dB)	16QAM			3GPP MPR (dB)
			Low Ch 26705	Mid CH 26740	High CH 26775		Low Ch 26705	Mid CH 26740	High CH 26775	
			815.5 MHz	819.0 MHz	822.5 MHz		815.5 MHz	819.0 MHz	822.5 MHz	
26 / 3M	1	0	22.89	23.03	22.94	0	21.91	22.10	21.98	1
	1	7	22.71	22.82	22.70	0	21.71	21.87	21.79	1
	1	14	23.35	23.44	23.39	0	22.39	22.55	22.44	1
	8	0	21.73	21.95	21.76	1	20.74	20.96	20.77	2
	8	3	21.71	21.74	21.66	1	20.72	20.76	20.59	2
	8	7	21.87	22.04	21.95	1	20.84	21.08	20.94	2
	15	0	21.82	21.98	21.89	1	20.79	21.02	20.88	2

Band / BW	RB Size	RB Offset	QPSK			3GPP MPR (dB)	16QAM			3GPP MPR (dB)
			Low Ch 26715	Mid Ch 26740	High Ch 26765		Low Ch 26715	Mid Ch 26740	High Ch 26765	
			816.5 MHz	819.0 MHz	821.5 MHz		816.5 MHz	819.0 MHz	821.5 MHz	
26 / 5M	1	0	22.97	23.11	23.02	0	22.00	22.15	22.05	1
	1	12	22.75	22.92	22.84	0	21.74	21.96	21.85	1
	1	24	23.41	23.52	23.47	0	22.45	22.58	22.51	1
	12	0	21.84	21.97	21.91	1	20.80	20.99	20.88	2
	12	6	21.71	21.84	21.76	1	20.71	20.84	20.73	2
	12	13	22.00	22.13	22.07	1	20.96	21.14	21.07	2
	25	0	21.95	22.10	21.98	1	20.91	21.11	20.99	2

Band / BW	RB Size	RB Offset	QPSK	3GPP MPR (dB)	16QAM	3GPP MPR (dB)
			Mid Ch 26740		Mid Ch 26740	
			819.0 MHz		819.0 MHz	
26 / 10M	1	0	23.07	0	22.08	1
	1	24	22.85	0	21.85	1
	1	49	23.49	0	22.52	1
	25	0	21.98	1	20.94	2
	25	12	21.84	1	20.79	2
	25	25	22.13	1	21.10	2
	50	0	22.09	1	21.06	2

ERP Power (dBm)

CDMA							
Plane	Channel	Frequency (MHz)	LVL (dBm)	Correction Factor (dB)	ERP (dBm)	ERP (mW)	Polarization (H/V)
Y	476	817.9	-6.58	31.208	22.48	176.93	H
	580	820.5	-6.62	31.3	22.53	179.06	
	684	823.1	-6.53	31.222	22.54	179.56	
	476	817.9	-10.82	31.504	18.53	71.35	V
	580	820.5	-10.46	31.117	18.51	70.91	
	684	823.1	-11.14	31.922	18.63	72.98	

LTE Band 26							
Channel Bandwidth: 1.4 MHz / QPSK							
Plane	Channel	Frequency (MHz)	LVL (dBm)	Correction Factor (dB)	ERP (dBm)	ERP (mW)	Polarization (H/V)
X	26697	814.7	-6.05	31.208	23.01	199.89	H
	26740	819.0	-6.11	31.3	23.04	201.37	
	26783	823.3	-6.04	31.222	23.03	201.00	
	26697	814.7	-10.33	31.504	19.02	79.87	V
	26740	819.0	-9.95	31.117	19.02	79.74	
	26783	823.3	-10.66	31.922	19.11	81.51	
Channel Bandwidth: 1.4 MHz / 16QAM							
X	26697	814.7	-7.04	31.208	22.02	159.15	H
	26740	819.0	-7.10	31.3	22.05	160.32	
	26783	823.3	-7.06	31.222	22.01	158.93	
	26697	814.7	-11.17	31.504	18.18	65.83	V
	26740	819.0	-10.89	31.117	18.08	64.22	
	26783	823.3	-11.74	31.922	18.03	63.56	

LTE Band 26							
Channel Bandwidth: 3 MHz / QPSK							
Plane	Channel	Frequency (MHz)	LVL (dBm)	Correction Factor (dB)	ERP (dBm)	ERP (mW)	Polarization (H/V)
X	26705	815.5	-6.05	31.208	23.01	199.89	H
	26740	819.0	-6.04	31.3	23.11	204.64	
	26775	822.5	-6.05	31.222	23.02	200.54	
	26705	815.5	-10.34	31.504	19.01	79.69	V
	26740	819.0	-9.90	31.117	19.07	80.67	
	26775	822.5	-10.74	31.922	19.03	80.02	
Channel Bandwidth: 3 MHz / 16QAM							
X	26705	815.5	-7.03	31.208	22.03	159.51	H
	26740	819.0	-7.14	31.3	22.01	158.85	
	26775	822.5	-7.07	31.222	22.00	158.56	
	26705	815.5	-11.35	31.504	18.00	63.15	V
	26740	819.0	-10.91	31.117	18.06	63.93	
	26775	822.5	-11.68	31.922	18.09	64.45	

LTE Band 26							
Channel Bandwidth: 5 MHz / QPSK							
Plane	Channel	Frequency (MHz)	LVL (dBm)	Correction Factor (dB)	ERP (dBm)	ERP (mW)	Polarization (H/V)
X	26715	816.5	-6.02	31.208	23.04	201.28	H
	26740	819.0	-6.06	31.3	23.09	203.70	
	26765	821.5	-6.01	31.222	23.06	202.40	
	26715	816.5	-10.34	31.504	19.01	79.69	V
	26740	819.0	-9.94	31.117	19.03	79.93	
	26765	821.5	-10.71	31.922	19.06	80.57	
Channel Bandwidth: 5 MHz / 16QAM							
X	26715	816.5	-7.02	31.208	22.04	159.88	H
	26740	819.0	-7.10	31.3	22.05	160.32	
	26765	821.5	-7.06	31.222	22.01	158.93	
	26715	816.5	-11.18	31.504	18.17	65.67	V
	26740	819.0	-10.90	31.117	18.07	64.08	
	26765	821.5	-11.64	31.922	18.13	65.04	

LTE Band 26

Channel Bandwidth: 10 MHz / QPSK

Plane	Channel	Frequency (MHz)	LVL (dBm)	Correction Factor (dB)	ERP (dBm)	ERP (mW)	Polarization (H/V)
X	26740	819.0	-6.15	31.3	23.00	199.53	H
	26740	819.0	-9.87	31.117	19.10	81.23	V

Channel Bandwidth: 10 MHz / 16QAM

X	26740	819.0	-7.12	31.3	22.03	159.59	H
	26740	819.0	-10.96	31.117	18.01	63.20	V

4.2 Frequency Stability Measurement

4.2.1 Limits of Frequency Stability Measurement


1.5 ppm is for base and fixed station. 2.5 ppm is for mobile station.

4.2.2 Test Procedure

- Device is placed at the oven room. The oven room could control the temperatures and humidity. Power warm up is at least 15 min and power applied should perform before recording frequency error.
- EUT is connected the external power supply to control the DC input power. The test voltage range is from minimum to maximum working voltage. Each step shall be record the frequency error rate.
- The temperature range step is 10 degrees in this test items. All temperature levels shall be hold the ± 0.5 °C during the measurement testing. The each temperature step shall be at least 0.5 hours, consider the EUT could be test under the stability condition.

NOTE: The frequency error was recorded frequency error from the communication simulator.

4.2.3 Test Setup

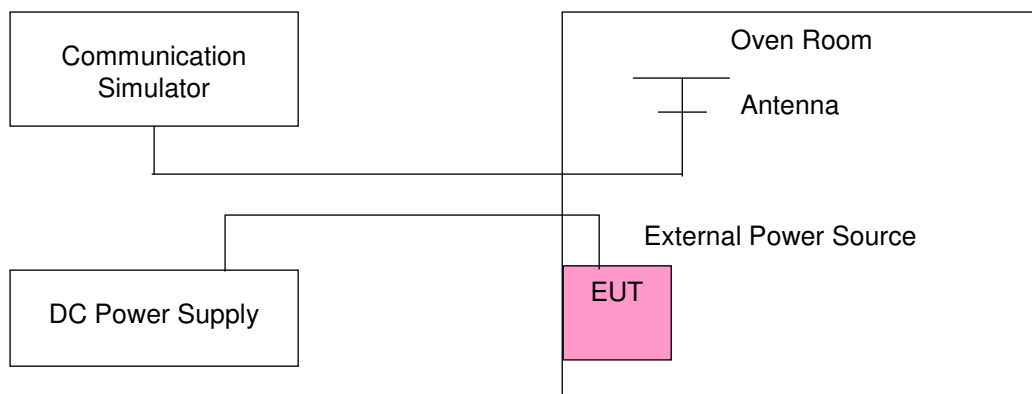

4.2.4 Test Results

Frequency Error vs. Voltage

Voltage (Volts)	CDMA				Limit (ppm)
	Low Channel		High Channel		
	Frequency (MHz)	Frequency Error (ppm)	Frequency (MHz)	Frequency Error (ppm)	
3.8	817.900004	0.004	823.100001	0.001	2.5
3.3	817.900003	0.004	823.100002	0.003	2.5
4.35	817.900003	0.003	823.100003	0.004	2.5

Note: The applicant defined the normal working voltage of the battery is from 3.3 Vdc to 4.35 Vdc.

Frequency Error vs. Temperature

Temp. (°C)	CDMA				Limit (ppm)
	Low Channel		High Channel		
	Frequency (MHz)	Frequency Error (ppm)	Frequency (MHz)	Frequency Error (ppm)	
-30	817.900002	0.002	823.100003	0.003	2.5
-20	817.900004	0.005	823.100003	0.003	2.5
-10	817.900003	0.003	823.100002	0.002	2.5
0	817.900003	0.004	823.100003	0.003	2.5
10	817.900003	0.004	823.100001	0.001	2.5
20	817.899998	-0.003	823.099999	-0.001	2.5
30	817.899999	-0.001	823.099997	-0.003	2.5
40	817.899997	-0.003	823.099997	-0.004	2.5
50	817.899999	-0.001	823.099999	-0.002	2.5
60	817.899997	-0.003	823.099998	-0.002	2.5

Frequency Error vs. Voltage

Voltage (Volts)	LTE Band 26				Limit (ppm)
	Channel Bandwidth: 1.4 MHz				
	Low Channel		High Channel		
	Frequency (MHz)	Frequency Error (ppm)	Frequency (MHz)	Frequency Error (ppm)	
3.8	814.700002	0.002	823.300003	0.003	2.5
3.3	814.700004	0.004	823.300003	0.003	2.5
4.35	814.700002	0.002	823.300002	0.002	2.5

Note: The applicant defined the normal working voltage of the battery is from 3.3 Vdc to 4.35 Vdc.

Frequency Error vs. Temperature

Temp. (°C)	LTE Band 26				Limit (ppm)
	Channel Bandwidth: 1.4 MHz				
	Low Channel		High Channel		
	Frequency (MHz)	Frequency Error (ppm)	Frequency (MHz)	Frequency Error (ppm)	
-30	814.700003	0.004	823.300002	0.003	2.5
-20	814.700001	0.002	823.300002	0.003	2.5
-10	814.700002	0.003	823.300003	0.003	2.5
0	814.700003	0.003	823.300001	0.002	2.5
10	814.700004	0.004	823.300003	0.003	2.5
20	814.699996	-0.005	823.299999	-0.002	2.5
30	814.699999	-0.001	823.299999	-0.002	2.5
40	814.699997	-0.004	823.299999	-0.002	2.5
50	814.699998	-0.003	823.299998	-0.002	2.5
60	814.699997	-0.004	823.299996	-0.005	2.5

Frequency Error vs. Voltage

Voltage (Volts)	LTE Band 26				Limit (ppm)
	Channel Bandwidth: 3 MHz				
	Low Channel		High Channel		
	Frequency (MHz)	Frequency Error (ppm)	Frequency (MHz)	Frequency Error (ppm)	
3.8	815.500001	0.001	822.500002	0.003	2.5
3.3	815.500003	0.004	822.500004	0.004	2.5
4.35	815.500002	0.003	822.500003	0.003	2.5

Note: The applicant defined the normal working voltage of the battery is from 3.3 Vdc to 4.35 Vdc.

Frequency Error vs. Temperature

Temp. (°C)	LTE Band 26				Limit (ppm)
	Channel Bandwidth: 3 MHz				
	Low Channel		High Channel		
	Frequency (MHz)	Frequency Error (ppm)	Frequency (MHz)	Frequency Error (ppm)	
-30	815.500002	0.003	822.500003	0.004	2.5
-20	815.500002	0.003	822.500002	0.002	2.5
-10	815.500001	0.001	822.500001	0.001	2.5
0	815.500004	0.004	822.500003	0.003	2.5
10	815.500004	0.005	822.500003	0.004	2.5
20	815.499996	-0.004	822.499997	-0.003	2.5
30	815.499998	-0.003	822.499996	-0.005	2.5
40	815.499999	-0.001	822.499997	-0.003	2.5
50	815.499998	-0.003	822.499999	-0.001	2.5
60	815.499996	-0.004	822.499997	-0.004	2.5

Frequency Error vs. Voltage

Voltage (Volts)	LTE Band 26				Limit (ppm)
	Channel Bandwidth: 5 MHz				
	Low Channel		High Channel		
	Frequency (MHz)	Frequency Error (ppm)	Frequency (MHz)	Frequency Error (ppm)	
3.8	816.500004	0.005	821.500004	0.005	2.5
3.3	816.500001	0.002	821.500002	0.003	2.5
4.35	816.500001	0.001	821.500002	0.002	2.5

Note: The applicant defined the normal working voltage of the battery is from 3.3 Vdc to 4.35 Vdc.

Frequency Error vs. Temperature

Temp. (°C)	LTE Band 26				Limit (ppm)
	Channel Bandwidth: 5 MHz				
	Low Channel		High Channel		
	Frequency (MHz)	Frequency Error (ppm)	Frequency (MHz)	Frequency Error (ppm)	
-30	816.500002	0.003	821.500002	0.002	2.5
-20	816.500001	0.001	821.500002	0.003	2.5
-10	816.500004	0.004	821.500002	0.002	2.5
0	816.500002	0.002	821.500003	0.004	2.5
10	816.500001	0.002	821.500003	0.004	2.5
20	816.499998	-0.003	821.499998	-0.003	2.5
30	816.499998	-0.002	821.499997	-0.004	2.5
40	816.499997	-0.003	821.499998	-0.002	2.5
50	816.499999	-0.001	821.499997	-0.003	2.5
60	816.499997	-0.004	821.499997	-0.004	2.5

Frequency Error vs. Voltage

Voltage (Volts)	LTE Band 26		Limit (ppm)
	Channel Bandwidth: 10 MHz		
	Low Channel		
	Frequency (MHz)	Frequency Error (ppm)	
3.8	819.000003	0.003	2.5
3.3	819.000002	0.002	2.5
4.35	819.000002	0.003	2.5

Note: The applicant defined the normal working voltage of the battery is from 3.3 Vdc to 4.35 Vdc.

Frequency Error vs. Temperature


Temp. (°C)	LTE Band 26		Limit (ppm)
	Channel Bandwidth: 10 MHz		
	Low Channel		
	Frequency (MHz)	Frequency Error (ppm)	
-30	819.000004	0.004	2.5
-20	819.000002	0.002	2.5
-10	819.000003	0.004	2.5
0	819.000003	0.004	2.5
10	819.000002	0.002	2.5
20	818.999998	-0.003	2.5
30	818.999999	-0.001	2.5
40	818.999999	-0.002	2.5
50	818.999999	-0.001	2.5
60	818.999996	-0.005	2.5

4.3 Occupied Bandwidth Measurement

4.3.1 Test Procedure


The EUT makes a call to the communication simulator. All measurements were done at low, middle and high operational frequency range. The communication simulator station system controlled a EUT to export maximum output power under transmission mode and specific channel frequency. Use OBW measurement function of Spectrum analyzer to measure 99 % occupied bandwidth.

4.3.2 Test Setup

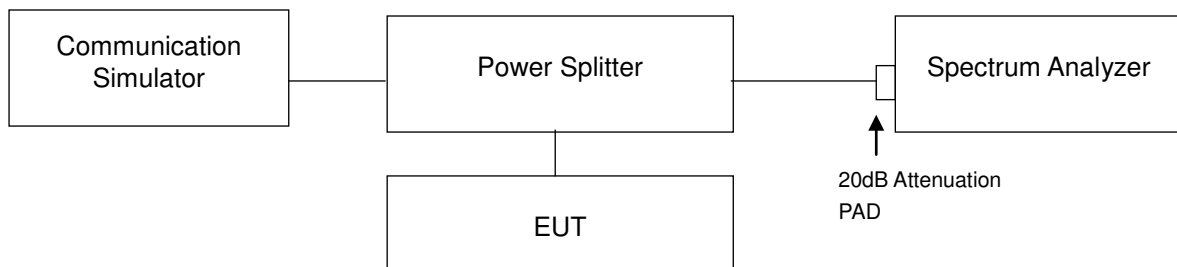



4.3.3 Test Result

CDMA		
Channel	Frequency (MHz)	99 % Occupied Bandwidth (MHz)
476	817.9	1.2746
580	820.5	1.2735
684	823.1	1.2724

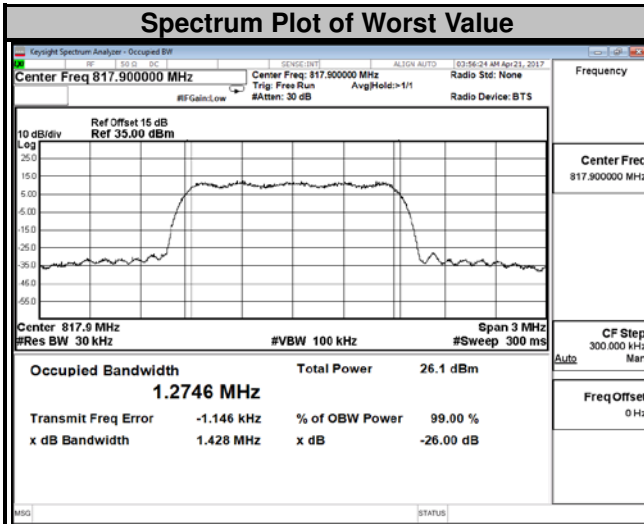


LTE Band 26							
Channel Bandwidth: 1.4 MHz				Channel Bandwidth: 3 MHz			
Channel	Frequency (MHz)	99 % Occupied Bandwidth (MHz)		Channel	Frequency (MHz)	99 % Occupied Bandwidth (MHz)	
		QPSK	16QAM			QPSK	16QAM
26697	814.7	1.0870	1.0907	26705	815.5	2.7011	2.6960
26740	819.0	1.0879	1.0897	26740	819.0	2.7016	2.6971
26783	823.3	1.0873	1.0900	26775	822.5	2.7020	2.6985

Spectrum Plot of Worst Value

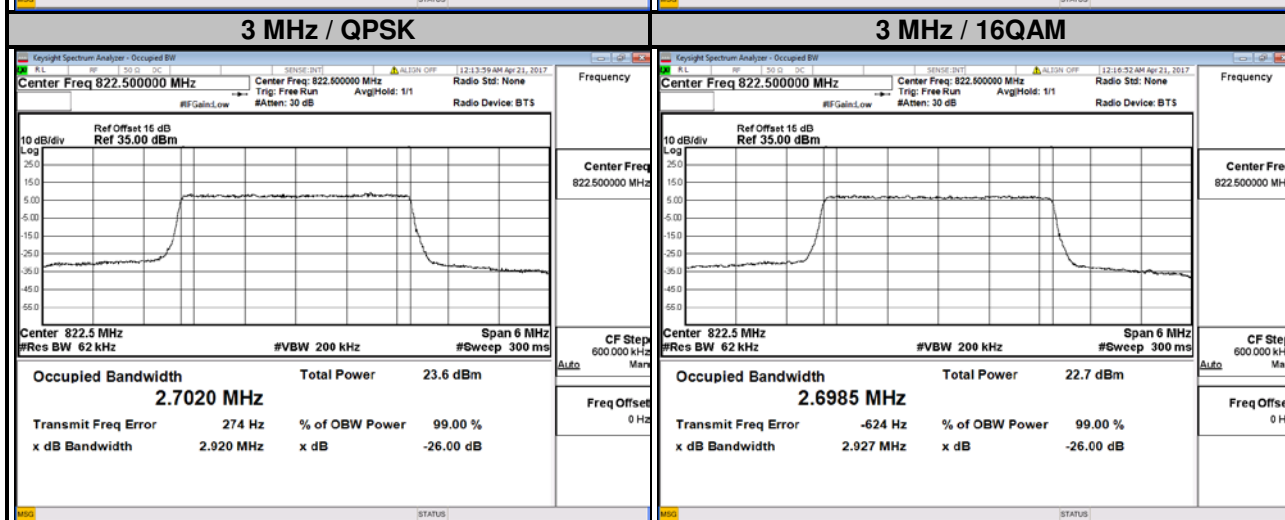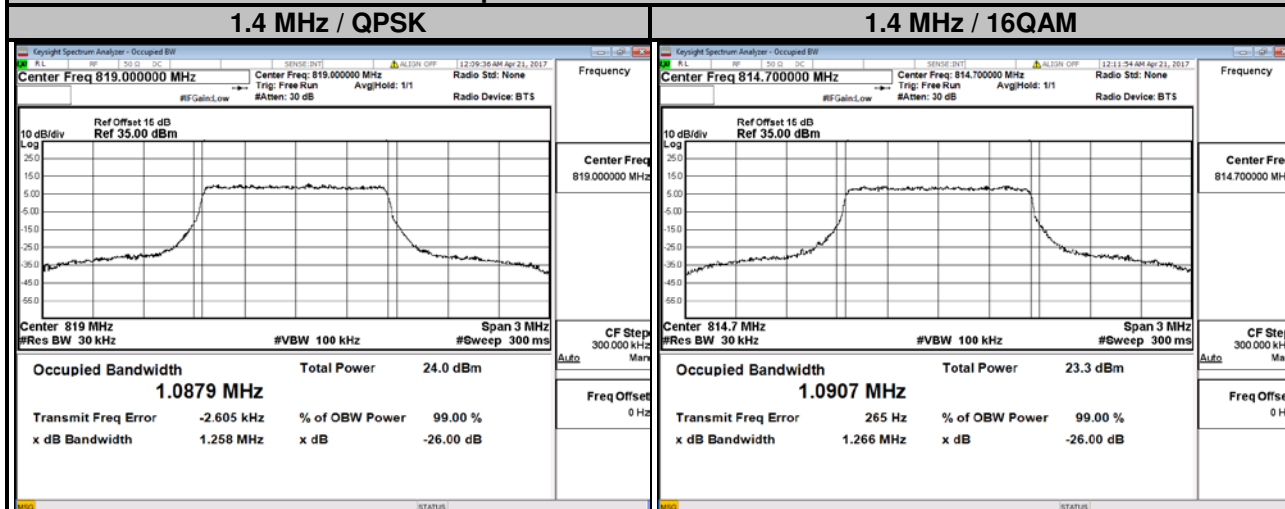

LTE Band 26							
Channel Bandwidth: 5 MHz				Channel Bandwidth: 10 MHz			
Channel	Frequency (MHz)	99 % Occupied Bandwidth (MHz)		Channel	Frequency (MHz)	99 % Occupied Bandwidth (MHz)	
		QPSK	16QAM			QPSK	16QAM
26715	816.5	4.4923	4.4940	26740	819.0	8.9621	8.9656
26740	819.0	4.4945	4.4969				
26765	821.5	4.4945	4.4954				

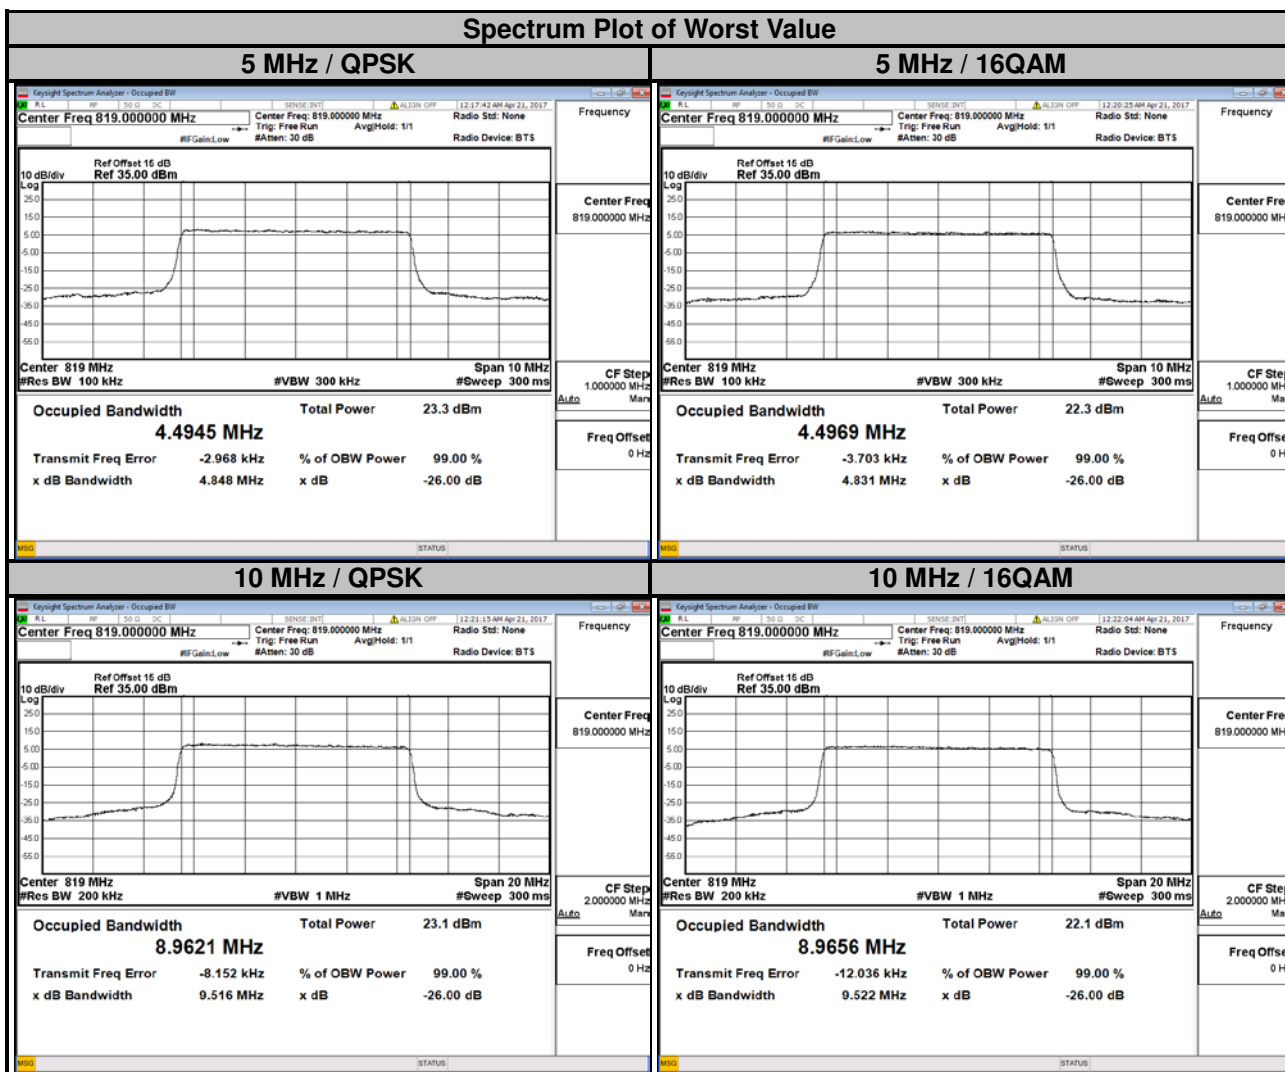


4.4 Emission Mask Measurement

4.4.1 Limits of Band Edge Measurement

According to FCC part 90.691 shall be tested the emission mask. For any frequency removed from the EA licensee's frequency block by up to and including 37.5 kHz, the power of any emission shall be attenuated below the transmitter power (P) in watts by at least $116 \text{ Log}_{10}(f/6.1)$ decibels or $50+10\text{Log}_{10}(P)$ decibels or 80 decibels, whichever is the lesser attenuation, where f is the frequency removed from the center of the outer channel in the block in kilohertz and where f is greater than 12.5 kHz.




4.4.2 Test Setup

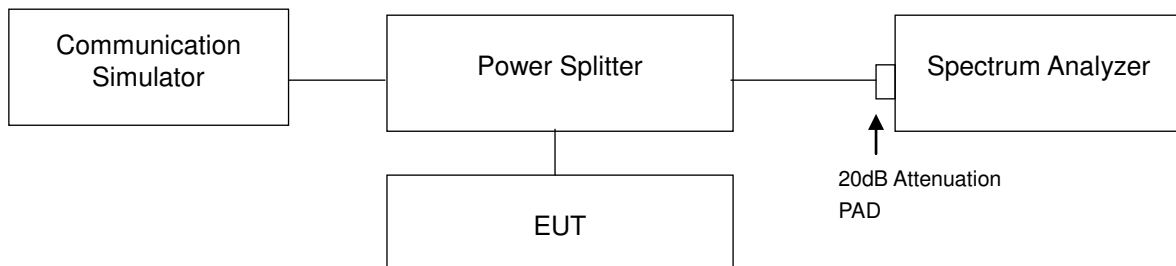

4.4.3 Test Procedures


- The measurement used the power splitter via EUT RF power connector between simulation base station and spectrum analyzer.
- Record the test plot.

4.4.4 Test Results

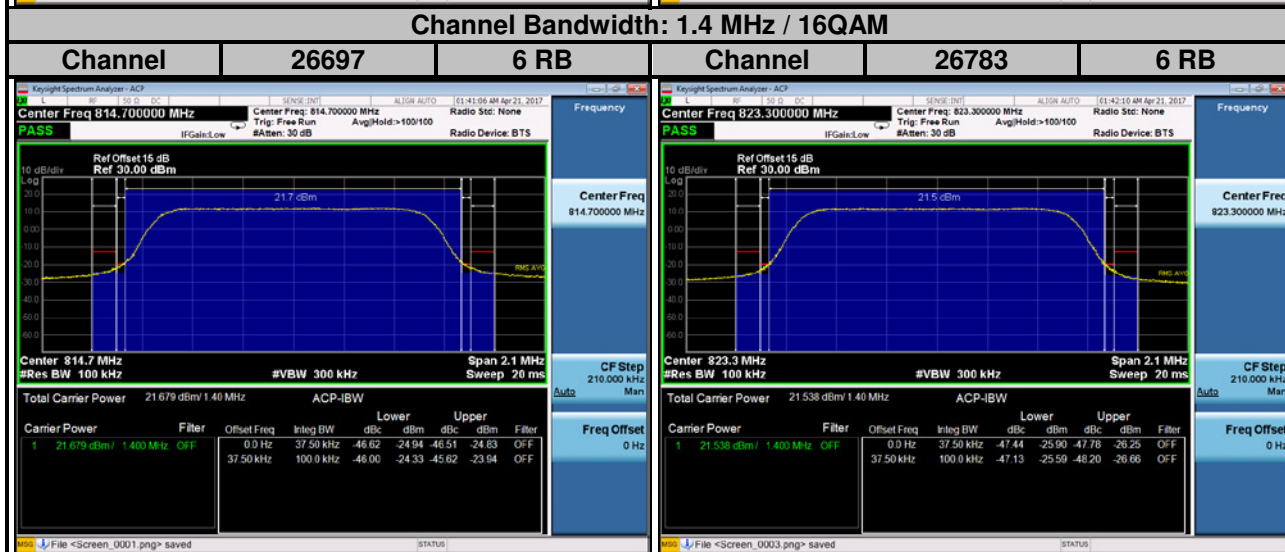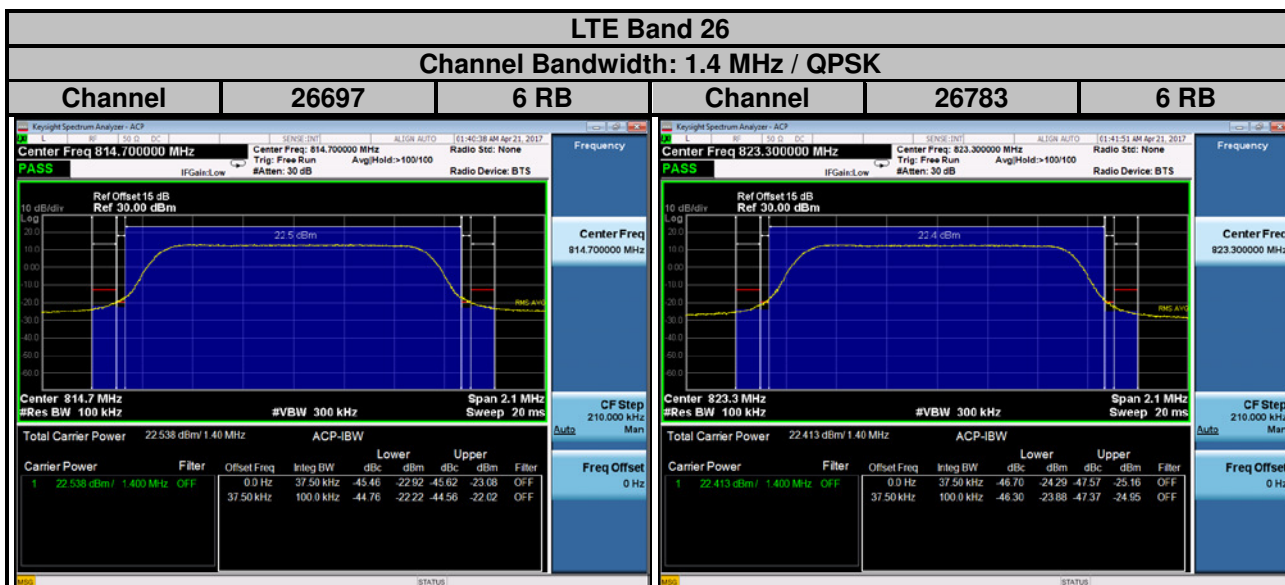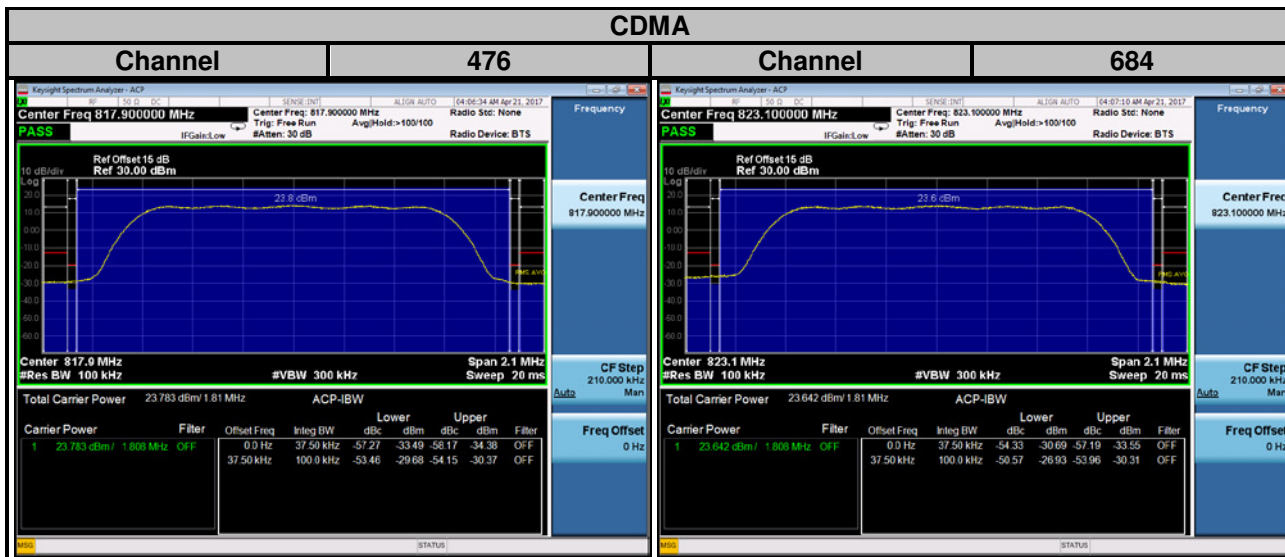


LTE Band 26

Channel Bandwidth: 3 MHz / QPSK

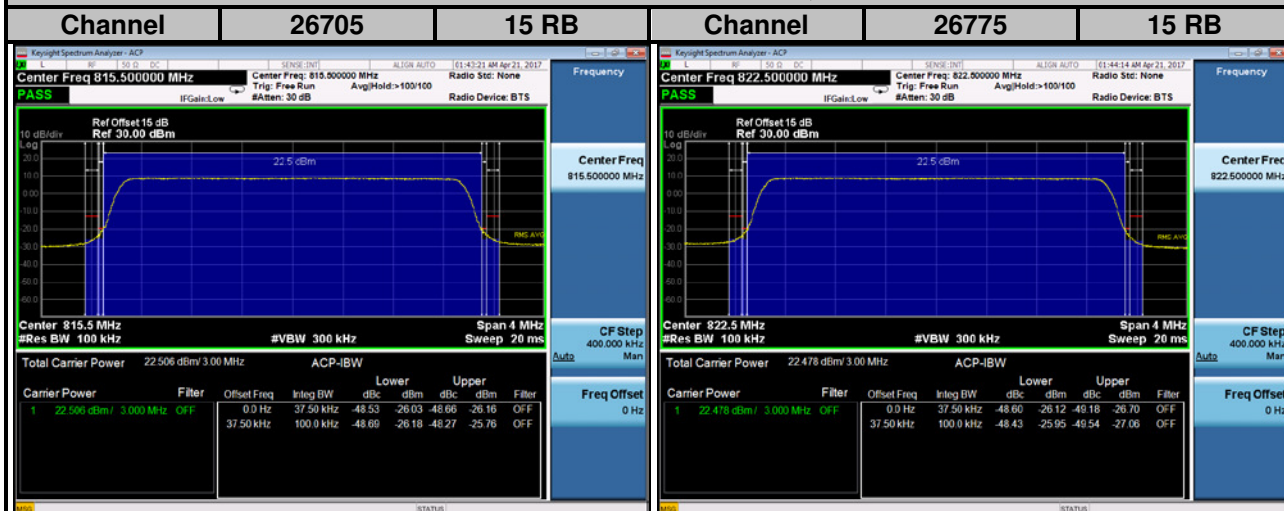

Channel Bandwidth: 3 MHz / 16QAM

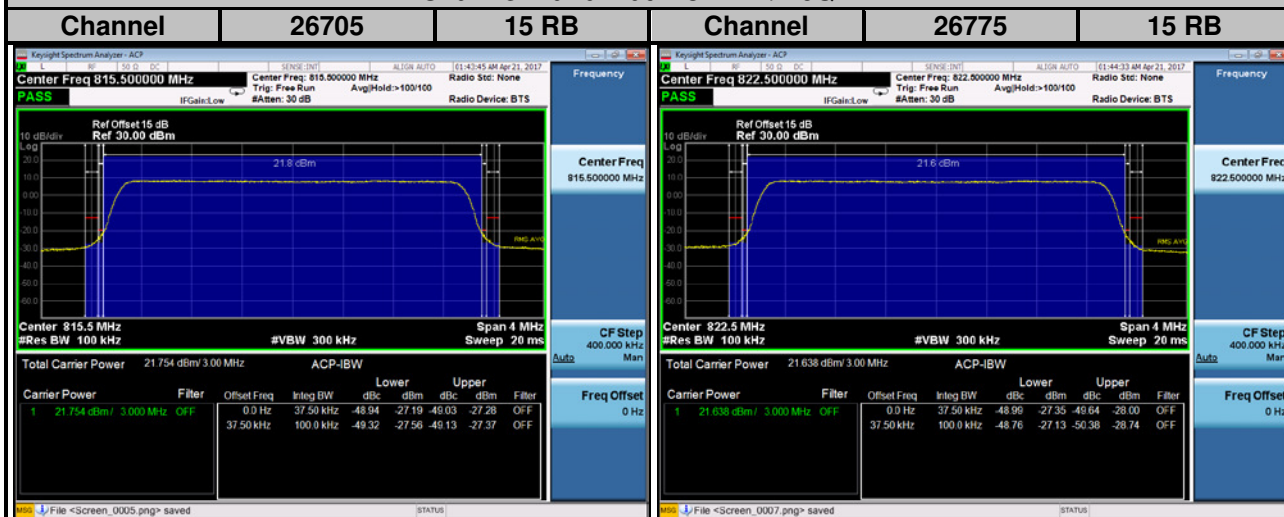

LTE Band 26


Channel Bandwidth: 5 MHz / QPSK



Channel Bandwidth: 5 MHz / 16QAM



LTE Band 26

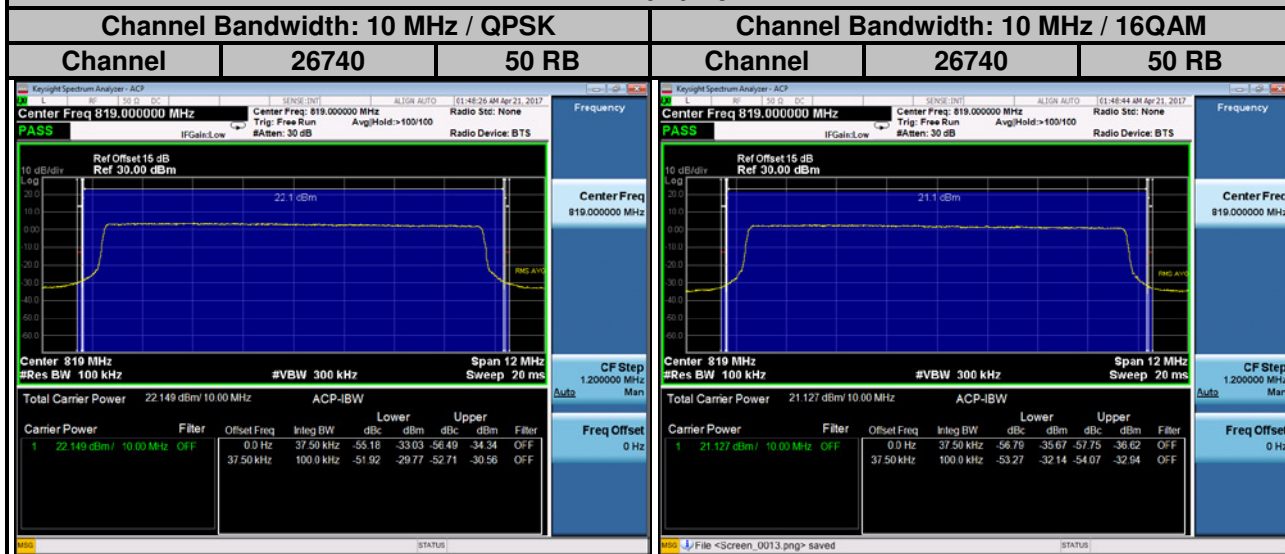


4.5 Conducted Spurious Emissions

4.5.1 Limits of Conducted Spurious Emissions Measurement

The power of any emission outside a licensee's frequency block shall be attenuated below the transmitter power (P) by at least $43 + 10 \log_{10}(P)$ dB. The limit of emission is equal to -13 dBm.


4.5.2 Test Setup

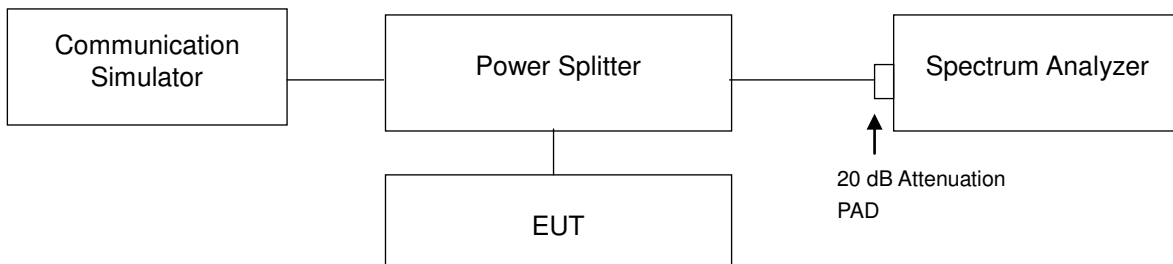

4.5.3 Test Procedure

- The EUT makes a phone call to the communication simulator. All measurements were done at low, middle and high operational frequency range.
- Measuring frequency range is from 30 MHz to 9 GHz. 10 dB attenuation pad is connected with spectrum. RBW=1 MHz and VBW=3 MHz are used for conducted emission measurement.


4.5.4 Test Results

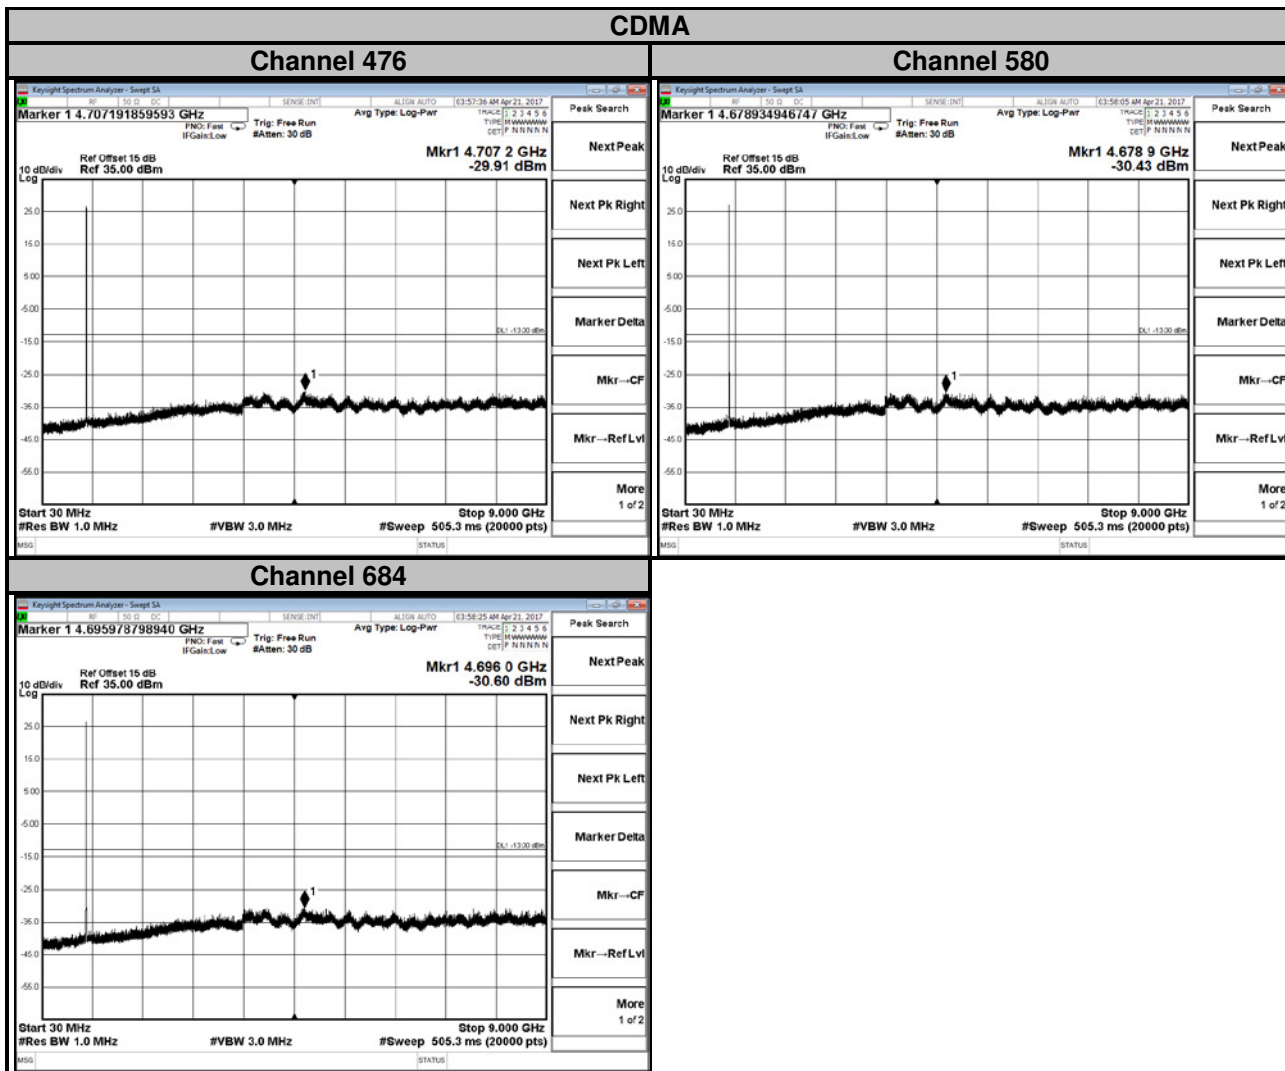


LTE Band 26

Channel Bandwidth: 1.4 MHz


Channel 26697

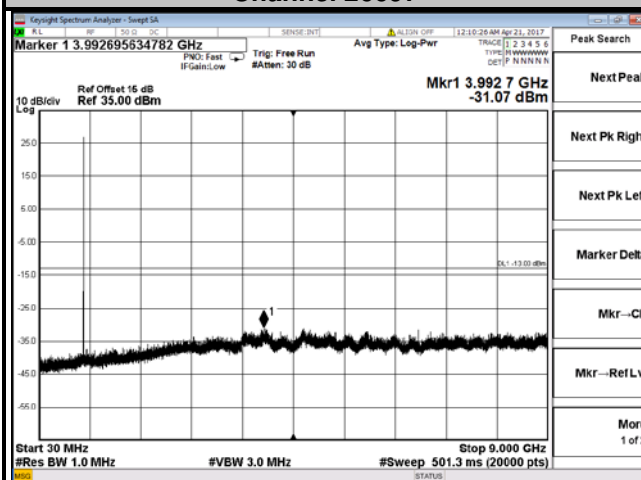

Channel 26740

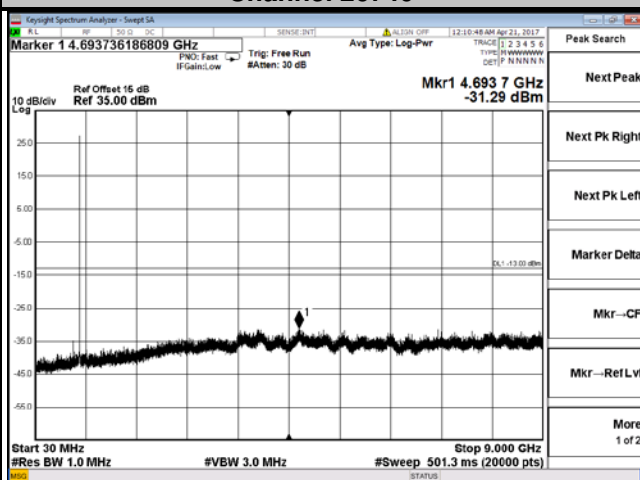

Channel 26783


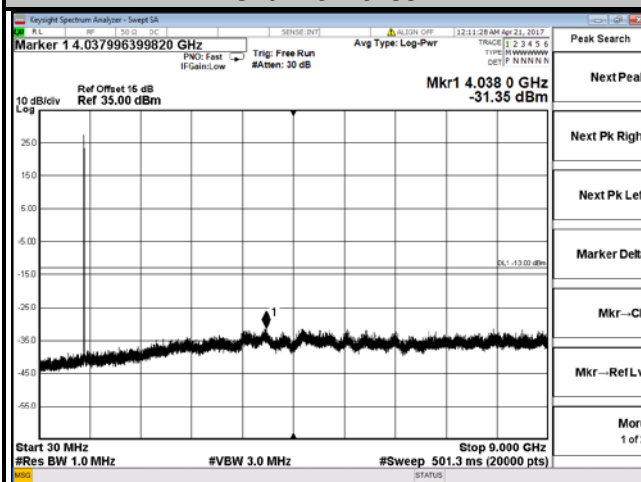


LTE Band 26


Channel Bandwidth: 3 MHz

Channel 26705



Channel 26740

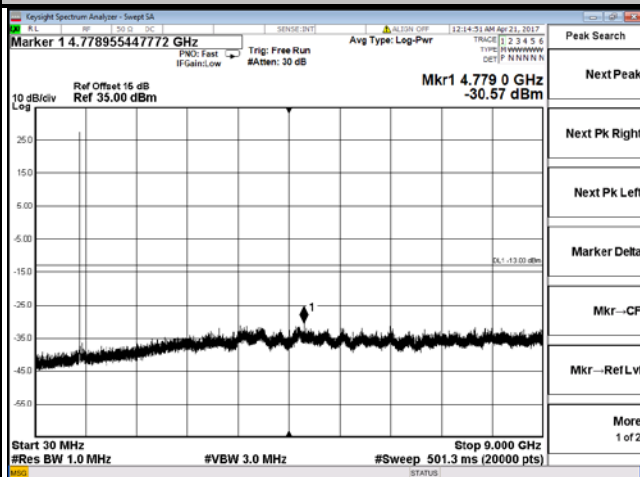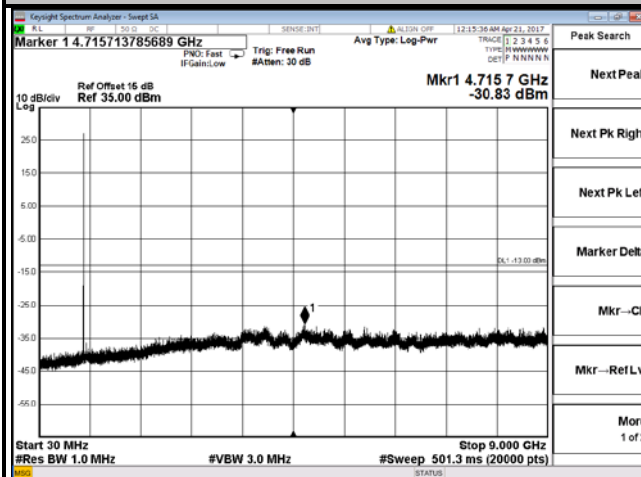


Channel 26775

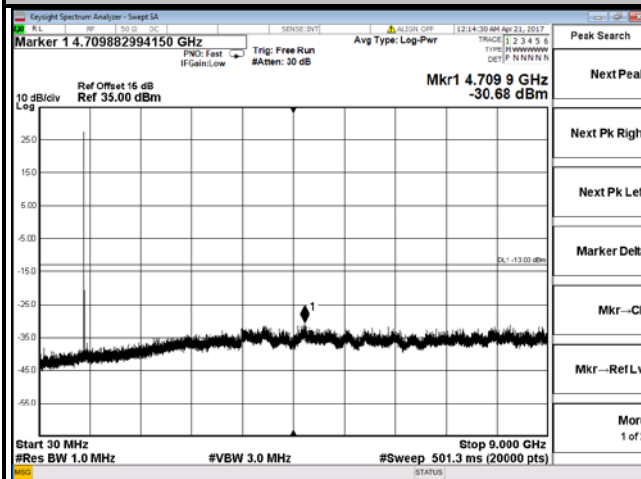

LTE Band 26
Channel Bandwidth: 5 MHz

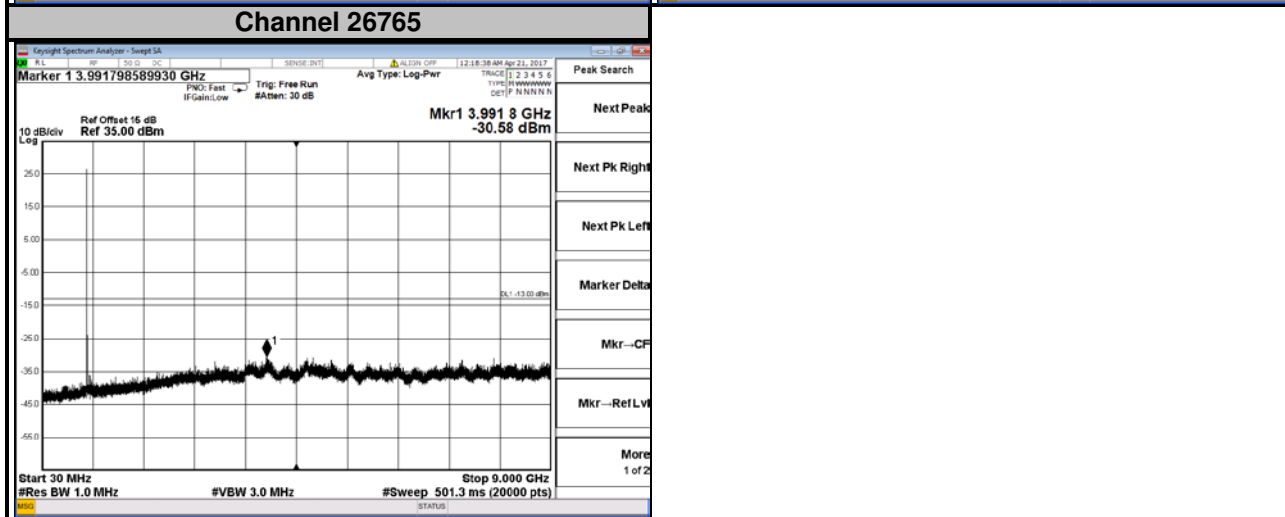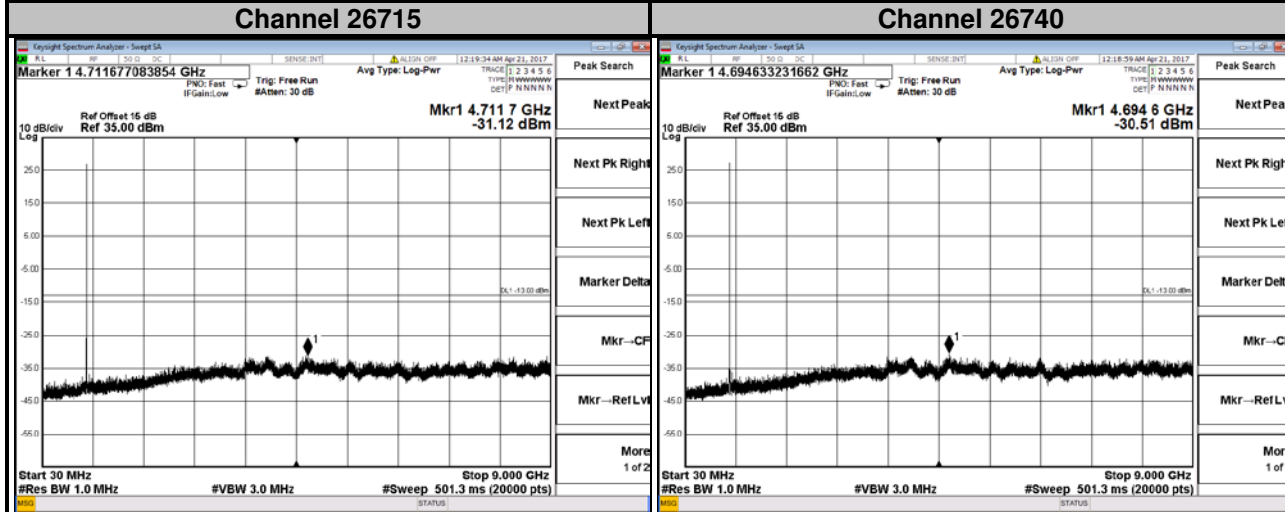

LTE Band 26
Channel Bandwidth: 10 MHz
Channel 26740

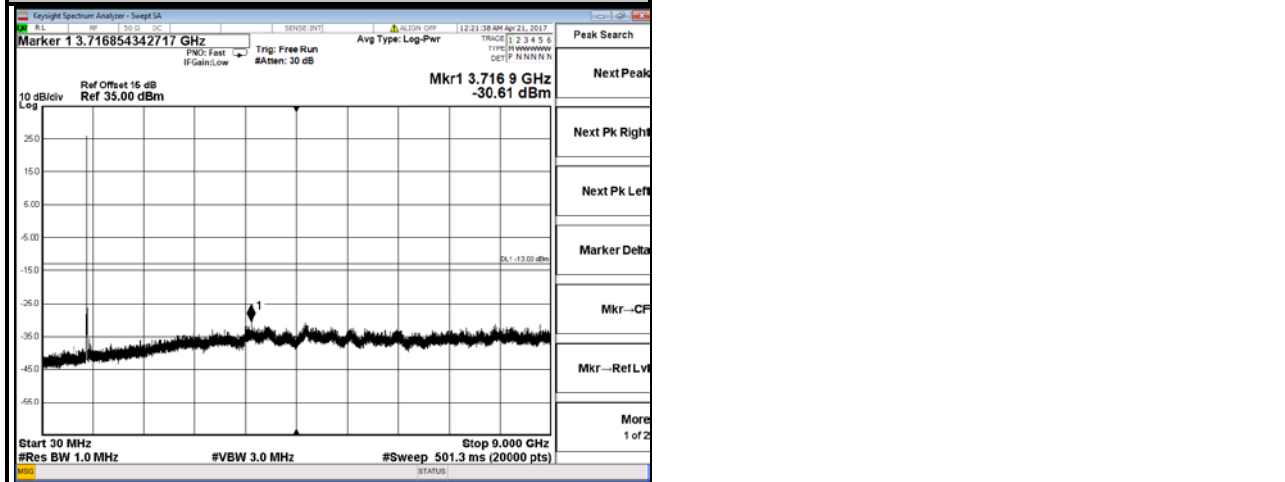

4.6 Radiated Emission Measurement

4.6.1 Limits of Radiated Emission Measurement

The power of any emission outside a licensee's frequency block shall be attenuated below the transmitter power (P) by at least $43 + 10 \log_{10}(P)$ dB. The limit of emission is equal to -13 dBm.

4.6.2 Test Procedure


- Substitution method is used for E.I.R.P measurement. In the semi-anechoic chamber, EUT placed on the 0.8 m height of Turn Table, rotated the table around 360 degrees to search the maximum radiation power and receiver antenna shall be rotated vertical and horizontal polarization and moved height from 1 m to 4 m to find the maximum polar radiated power. The "Read Value" is the spectrum reading the maximum power value.
- The substitution horn antenna is substituted for EUT at the same position and signals generator export the CW signal to the substitution antenna via a TX cable. Rotated the Turn Table and moved receiving antenna to find the maximum radiation power. Adjust output power level of S.G to get a Value of spectrum reading equal to "Read Value" of step a. Record the power level of S.G.
- $EIRP = \text{Output power level of S.G} - \text{TX cable loss} + \text{Antenna gain of substitution horn.}$
- E.R.P power can be calculated form E.I.R.P power by subtracting the gain of dipole, $E.R.P \text{ power} = E.I.P.R \text{ power} - 2.15 \text{ dBi.}$

Note: The resolution bandwidth of spectrum analyzer is 1 MHz and the video bandwidth is 3 MHz.

4.6.3 Deviation from Test Standard

No deviation.

4.6.4 Test Setup

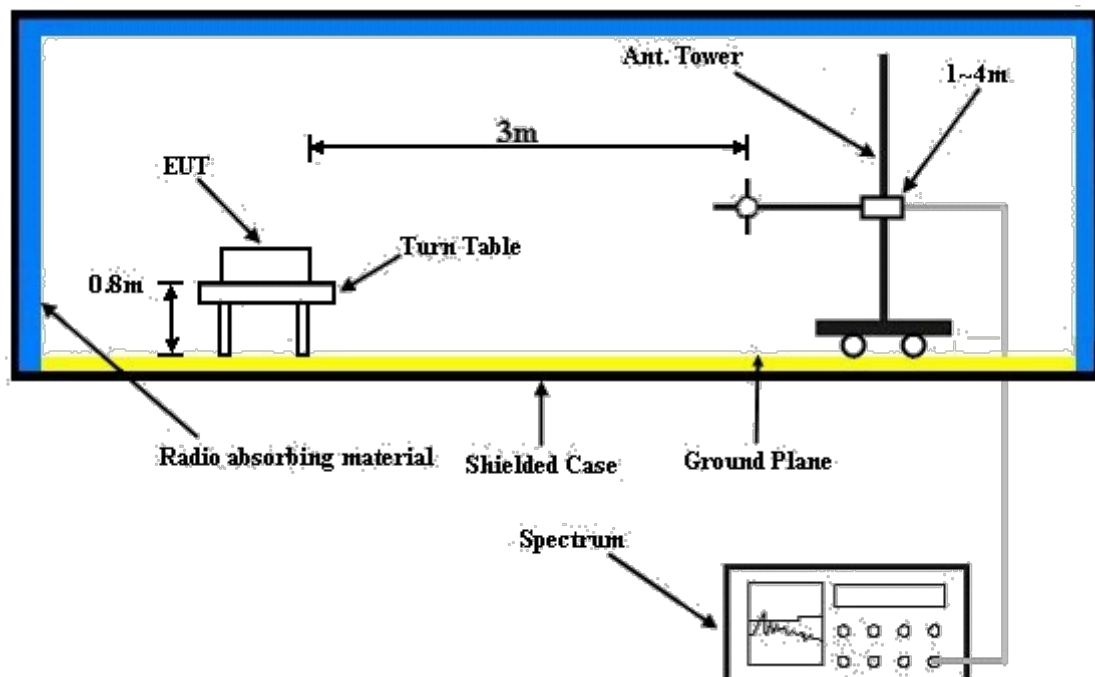

For the actual test configuration, please refer to the attached file (Test Setup Photo).

4.6.5 Test Results

CDMA:
Low Channel




Bureau Veritas Consumer Products Services Ltd., Taoyuan Branch

A D T

Data: 9

Date: 2017-04-12

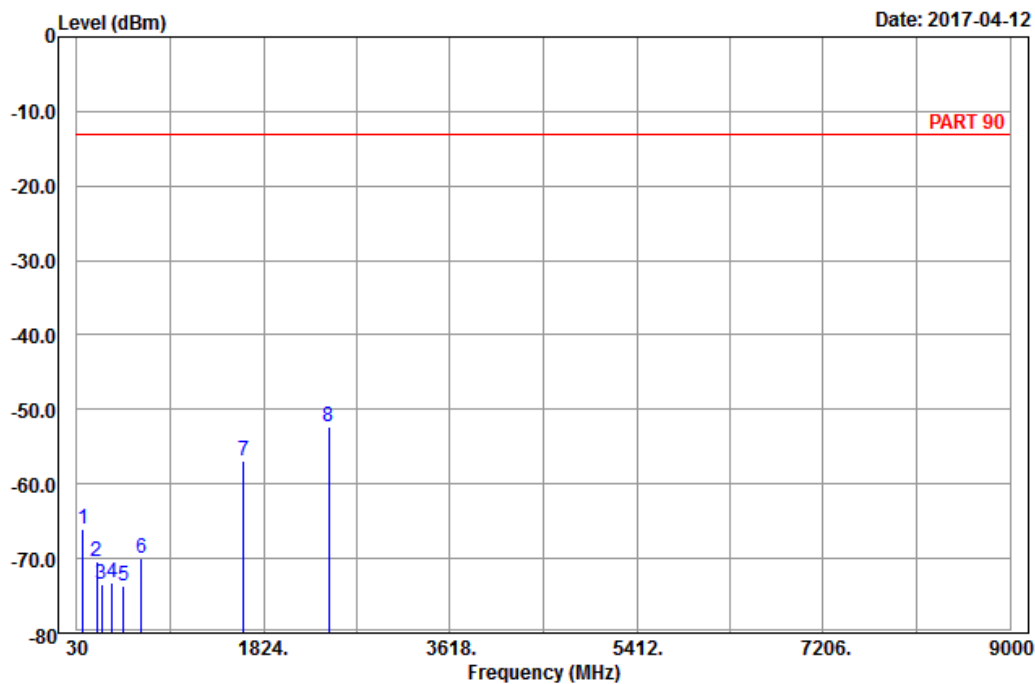

Site : 966 chamber 1
 Condition: PART 90 Horizontal
 Remark : BC 10_Link_CH476
 Tested by: Charles Hsiao


	Freq	Level	Read Level	Limit Line	Over Limit	Factor	Remark
	MHz	dBm	dBm	dBm	dB	dB	
1	85.08	-65.97	-54.75	-13.00	-52.97	-11.22	Peak
2	224.40	-70.48	-64.62	-13.00	-57.48	-5.86	Peak
3	264.09	-73.55	-67.92	-13.00	-60.55	-5.63	Peak
4	368.60	-73.18	-68.78	-13.00	-60.18	-4.40	Peak
5	479.90	-73.60	-68.90	-13.00	-60.60	-4.70	Peak
6	648.60	-69.87	-69.75	-13.00	-56.87	-0.12	Peak
7	1635.80	-56.99	-64.55	-13.00	-43.99	7.56	Peak
8 pp	2453.70	-52.22	-63.24	-13.00	-39.22	11.02	Peak



A D T

Data: 10

Date: 2017-04-12

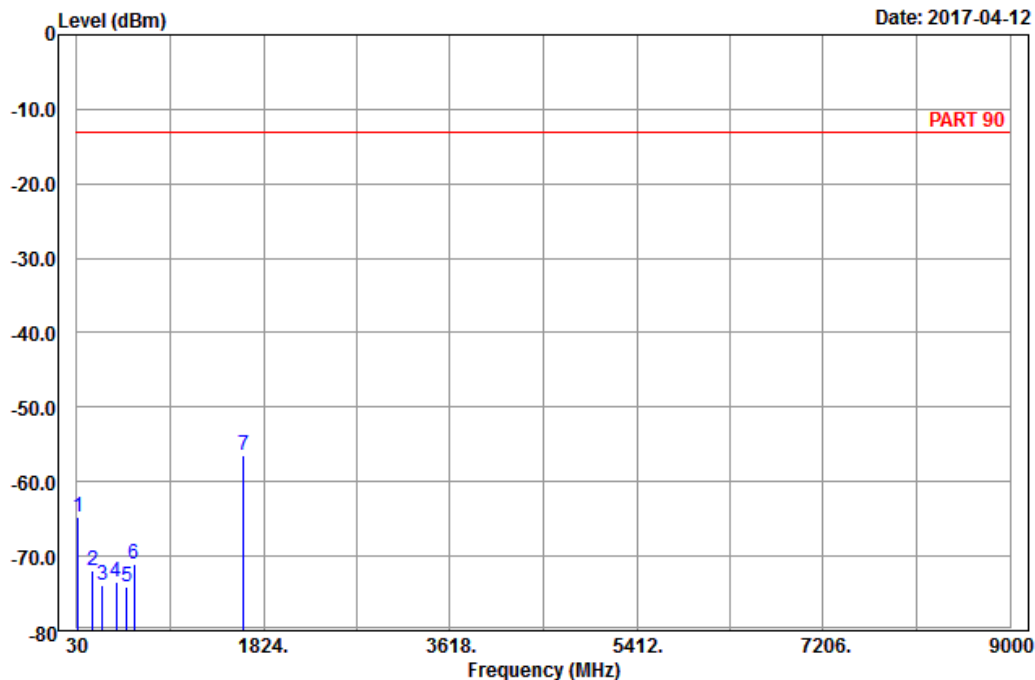

Site : 966 chamber 1
 Condition: PART 90 Vertical
 Remark : BC 10_Link_CH476
 Tested by: Charles Hsiao

	Freq	Level	Read Level	Limit Line	Over Limit	Factor	Remark
	MHz	dBm	dBm	dBm	dB	dB	
1	44.04	-64.82	-53.24	-13.00	-51.82	-11.58	Peak
2	180.66	-72.01	-66.43	-13.00	-59.01	-5.58	Peak
3	276.78	-73.82	-68.07	-13.00	-60.82	-5.75	Peak
4	412.00	-73.57	-70.55	-13.00	-60.57	-3.02	Peak
5	512.10	-74.09	-69.66	-13.00	-61.09	-4.43	Peak
6	578.60	-71.02	-70.56	-13.00	-58.02	-0.46	Peak
7 pp	1635.80	-56.37	-63.93	-13.00	-43.37	7.56	Peak

Middle Channel




Bureau Veritas Consumer Products Services Ltd., Taoyuan Branch

A D T

Data: 5

Date: 2017-04-12

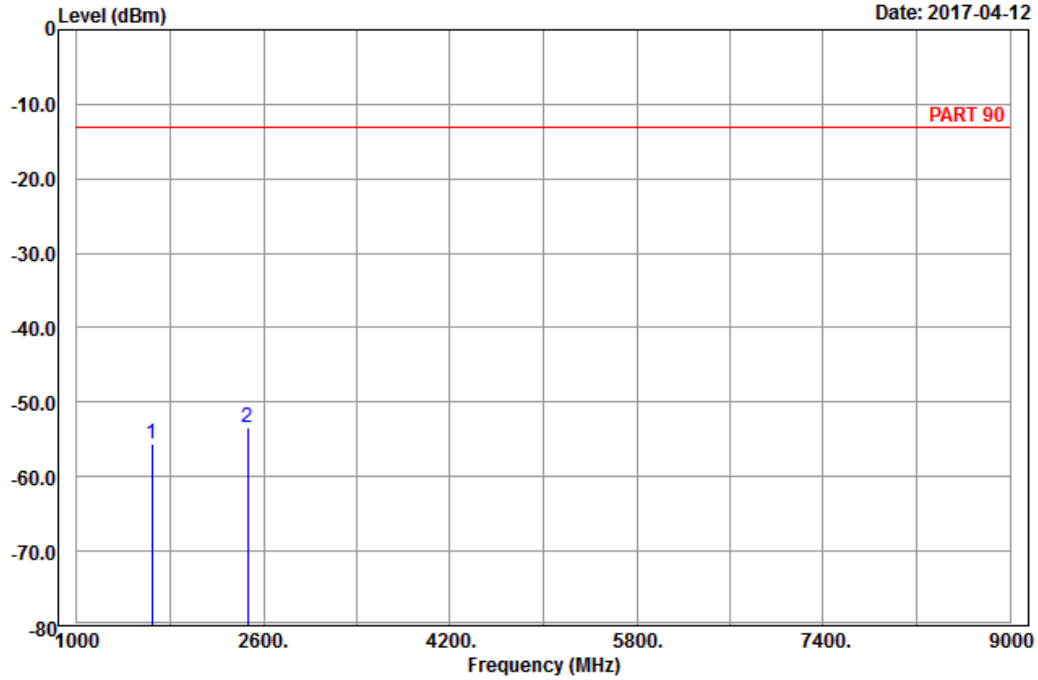

Site : 966 chamber 1
 Condition: PART 90 Horizontal
 Remark : BC 10_Link_CH580
 Tested by: Charles Hsiao

	Freq	Level	Read Level	Limit	Over	Factor	Remark
	MHz	dBm	dBm	dBm	dB	dB	
1	1641.00	-55.57	-63.30	-13.00	-42.57	7.73	Peak
2	2461.50	-53.39	-64.41	-13.00	-40.39	11.02	Peak




Bureau Veritas Consumer Products Services Ltd., Taoyuan Branch

A D T

Data: 6

Date: 2017-04-12

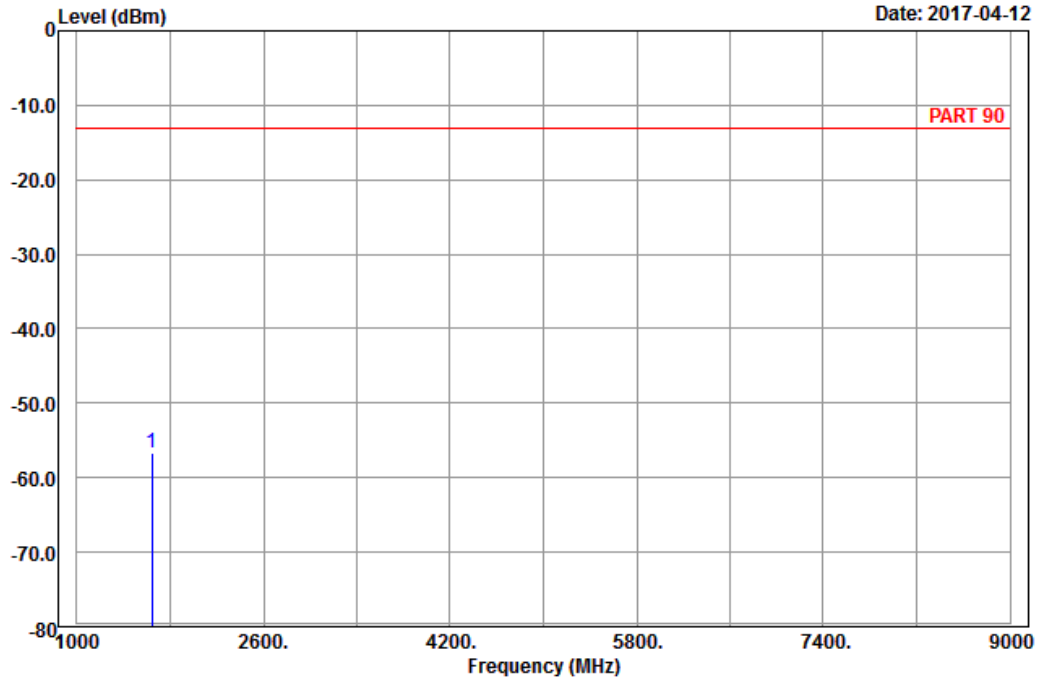

Site : 966 chamber 1
 Condition: PART 90 Vertical
 Remark : BC 10_Link_CH580
 Tested by: Charles Hsiao

Freq	Level	Read Level	Limit Line	Over Limit	Factor	Remark
MHz	dBm	dBm	dBm	dB	dB	
1 pp 1641.00	-56.60	-64.33	-13.00	-43.60	7.73	Peak

High Channel




Bureau Veritas Consumer Products Services Ltd., Taoyuan Branch

A D T

Data: 5

Date: 2017-04-12

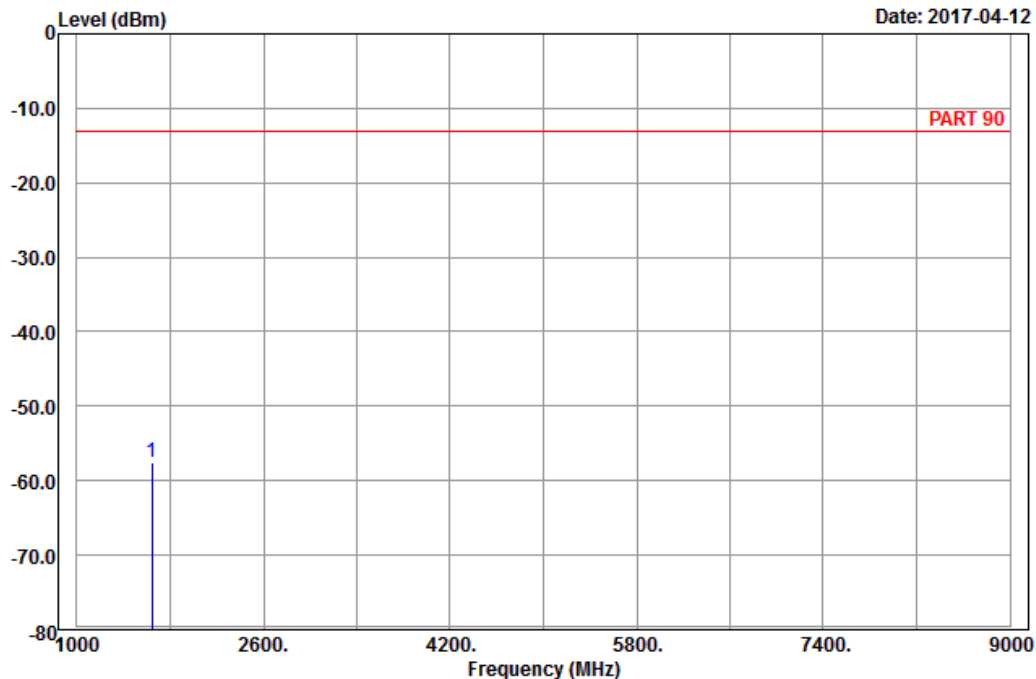

Site : 966 chamber 1
 Condition: PART 90 Horizontal
 Remark : BC 10_Link_CH684
 Tested by: Charles Hsiao

Freq	Level	Read Level	Limit	Over	Factor	Remark
MHz	dBm	dBm	dBm	dB	dB	
1 pp 1646.20	-57.63	-65.36	-13.00	-44.63	7.73	Peak




Bureau Veritas Consumer Products Services Ltd., Taoyuan Branch

A D T

Data: 6

Date: 2017-04-12

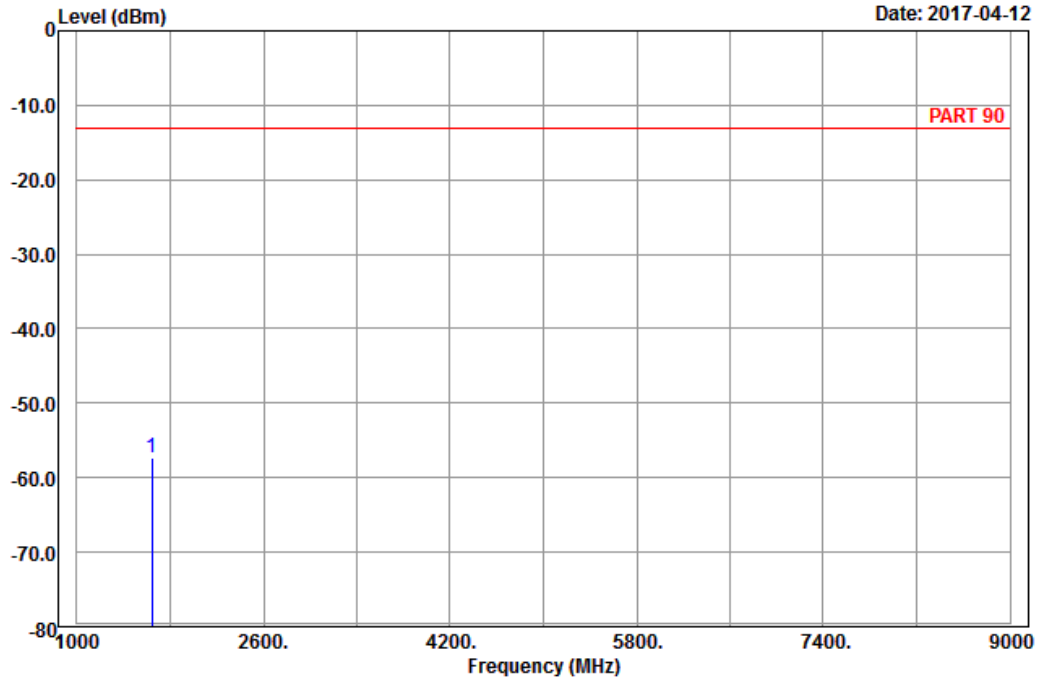

Site : 966 chamber 1
 Condition: PART 90 Vertical
 Remark : BC 10_Link_CH684
 Tested by: Charles Hsiao

Freq	Level	Read Level	Limit Line	Over Limit	Factor	Remark
MHz	dBm	dBm	dBm	dB	dB	
1 pp 1646.20	-57.36	-65.09	-13.00	-44.36	7.73	Peak

LTE Band 26
Channel Bandwidth: 10 MHz / QPSK




Bureau Veritas Consumer Products Services Ltd., Taoyuan Branch

A D T

Data: 9

Date: 2017-04-12

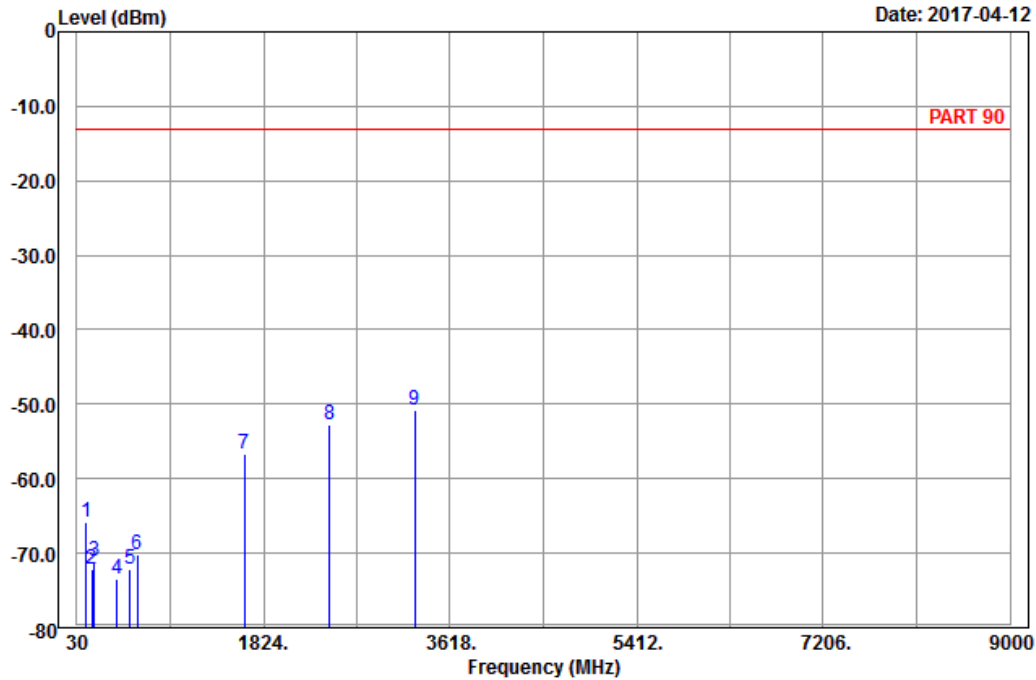

Site : 966 chamber 1
Condition: PART 90 Horizontal
Remark : LTE_Band 26_Link_CH26740
Tested by: Chalres Hsiao


	Read	Limit	Over			
Freq	Level	Level	Line	Limit	Factor	Remark
MHz	dBm	dBm	dBm	dB	dB	
1	118.83	-65.77	-57.45	-13.00	-52.77	-8.32 Peak
2	175.26	-72.09	-66.00	-13.00	-59.09	-6.09 Peak
3	198.48	-70.97	-64.83	-13.00	-57.97	-6.14 Peak
4	416.20	-73.39	-70.29	-13.00	-60.39	-3.10 Peak
5	537.30	-72.13	-69.55	-13.00	-59.13	-2.58 Peak
6	613.60	-70.10	-70.37	-13.00	-57.10	0.27 Peak
7	1638.00	-56.69	-64.25	-13.00	-43.69	7.56 Peak
8	2457.00	-52.77	-63.79	-13.00	-39.77	11.02 Peak
9 pp	3276.00	-50.71	-64.85	-13.00	-37.71	14.14 Peak



A D T

Data: 10

Date: 2017-04-12

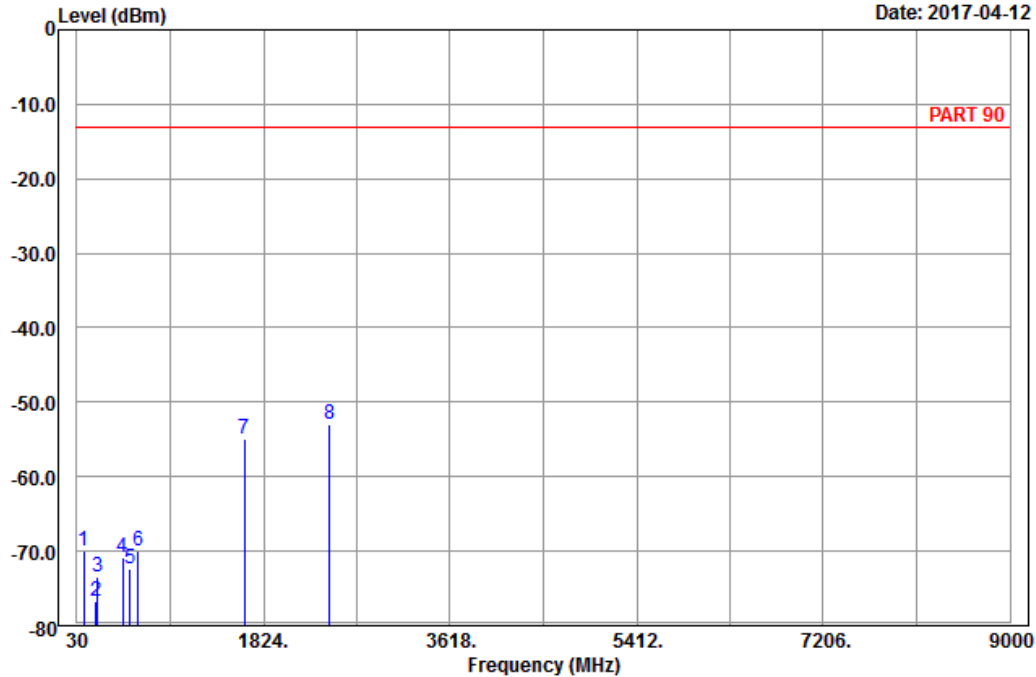

Site : 966 chamber 1
 Condition: PART 90 Vertical
 Remark : LTE_Band 26_Link_CH26740
 Tested by: Chalres Hsiao

	Freq	Level	Read Level	Limit Line	Over Limit	Factor	Remark
	MHz	dBm	dBm	dBm	dB	dB	
1	98.58	-70.00	-59.82	-13.00	-57.00	-10.18	Peak
2	210.63	-76.74	-70.70	-13.00	-63.74	-6.04	Peak
3	227.10	-73.40	-67.58	-13.00	-60.40	-5.82	Peak
4	467.30	-70.90	-66.56	-13.00	-57.90	-4.34	Peak
5	539.40	-72.40	-69.96	-13.00	-59.40	-2.44	Peak
6	617.80	-70.01	-70.24	-13.00	-57.01	0.23	Peak
7	1638.00	-54.92	-62.48	-13.00	-41.92	7.56	Peak
8 pp	2457.00	-52.87	-63.89	-13.00	-39.87	11.02	Peak

5 Pictures of Test Arrangements

Please refer to the attached file (Test Setup Photo).

Appendix – Information on the Testing Laboratories

We, Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch, were founded in 1988 to provide our best service in EMC, Radio, Telecom and Safety consultation. Our laboratories are accredited and approved according to ISO/IEC 17025.

If you have any comments, please feel free to contact us at the following:

Linko EMC/RF Lab

Tel: 886-2-26052180

Fax: 886-2-26051924

Hsin Chu EMC/RF/Telecom Lab

Tel: 886-3-6668565

Fax: 886-3-6668323

Hwa Ya EMC/RF/Safety

Tel: 886-3-3183232

Fax: 886-3-3270892

Email: service.adt@tw.bureauveritas.com

Web Site: www.bureauveritas-adt.com

The address and road map of all our labs can be found in our web site also.

--- END ---