



Applicant:	Kyocera
FCC ID:	V65M9300
Report #:	CT-M9300-1210-R0

RF Emissions Test Report

FCC Part 15.247
(WLAN)

For

Kyocera Corporation
c/o Kyocera Communication Inc.

Product:	Dual-Band CDMA Phone
Model:	M9300

TABLE OF CONTENTS

1 SUMMARY OF TESTING 4

2 EQUIPMENT UNDER TEST INFORMATION..... 4

3 TEST FACILITIES..... 5

4 TEST SETUP 5

5 ANTENNA REQUIREMENTS 6

 5.1 Requirements 6

 5.2 Antenna Information 6

6 6dB Bandwidth 7

 6.1 Test Configuration 7

 6.2 Results and Limits: 7

7 OUTPUT POWER..... 11

 7.1 Test Configuration 11

 7.2 Output Power Results and Limits 11

8 POWER SPECTRAL DENSITY (PSD) 14

 8.1 Test Configuration 14

 8.2 Results and Limits: 14

9 BANDEDGE 17

 9.1 Test Configuration 17

 9.2 Results: Bandedge 17

10 SPURIOUS RF CONDUCTED EMISSIONS..... 20

 10.1 Test Configuration 20

 10.2 Results: Conducted Spurious Emissions..... 20

11 AC POWER LINE CONDUCTED EMISSIONS..... 27

 11.1 Test Configuration & Results..... 27

12 RADIATED EMISSIONS 27

 12.1 Test Configuration & Results..... 27

13 SAR TEST..... 27

 13.1 Test Configuration & Results..... 27

14 TEST EQUIPMENT..... 27

Applicant:	Kyocera
FCC ID:	V65M9300
Report #:	CT-M9300-1210-R0

ATTESTATION

The tested device complies with the requirements in respect of all parameters subject to the test.

The test results and statements relate only to the items tested.

The test equipment used was suitable for the tests performed and within manufacturer's published specifications and operating parameters.

The test methods were consistent with the methods described in the relevant standards.

Product:	Dual-Band CDMA Cellular Phone with Bluetooth & WiFi
Model #:	M9300
FCC ID:	V65M9300
Tested in accordance with:	FCC Part 15.247
Test performed by:	Comptest Services LLC
Test Requested by:	KYOCERA Corporation C/o KYOCERA Communication Inc 8611 Balboa Avenue San Diego, CA92121
Date of Test:	December 9, 2010 – December 13, 2010

Responsible Engineer

Benjamin Nguyen

Benjamin Nguyen
Test Engineer

Reviewed and approved by:



Tammy To
Quality Manager

1 SUMMARY OF TESTING

Section #	Rule Part	Test Description	Verdict
6	FCC § 15.247 a2, IC RSS-210 §A8.2 (1)	6 dB Bandwidth	Pass
7	FCC § 15.247 b3, IC RSS-210 §8.4(4)	Output Power	Pass
8	FCC § 15.247 e, IC RSS-210 §8.2(2)	Power Spectral Density	Pass
9	FCC § 15.247 d, IC RSS-210 §A8.5	Band-edge Compliance of Conducted Emissions	Pass
10	FCC § 15.247 d, IC RSS-210 §A8.5	Spurious RF Conducted Emissions	Pass
11	FCC § 15.107 § 15.207, IC RSS-210 §6.6	AC Power Line Conducted Emissions	Pass
12	FCC § 15.109, § 15.209, IC RSS-210 §A2.9(2)	Spurious Radiated Emissions	Pass
13	FCC § 2.1091/2.1093	SAR Tests	Pass

2 EQUIPMENT UNDER TEST INFORMATION


EUT Serial Number:	9300B185
Type:	<input type="checkbox"/> Prototype, <input checked="" type="checkbox"/> Pre-Production, <input type="checkbox"/> Production
Equipment Category:	Portable
TX Frequency (MHz):	2412 to 2462
Modulation Technology:	DSSS, OFDM
Modulation:	DSSS: CCK, DQPSK, DBPSK OFDM: 64QAM, 16QAM, QPSK, BPSK
Channel Numbers:	11
Mode/Data Rate:	<input checked="" type="checkbox"/> 802.11b: 11/5/2/1 Mbps <input checked="" type="checkbox"/> 802.11g: 54/48/36/24/18/12/9/6 Mbps
Max. Output Power (dBm)	22.82
WLAN Antenna:	Internal
Antenna Gain (dBi):	-1.0 (Peak)

3 TEST FACILITIES

The test sites and measurement facilities used to collect data are located at 10300 Campus Point Drive San Diego, CA 92121, USA

4 TEST SETUP

The WLAN RF output of the equipment under test (EUT) was connected to the input of the spectrum analyzer through a RF cable with a specialized RF connector. The amplitude of the spectrum analyzer is corrected for the cable insertion loss and any other applicable losses. A fully charged battery was used as power supply voltage.

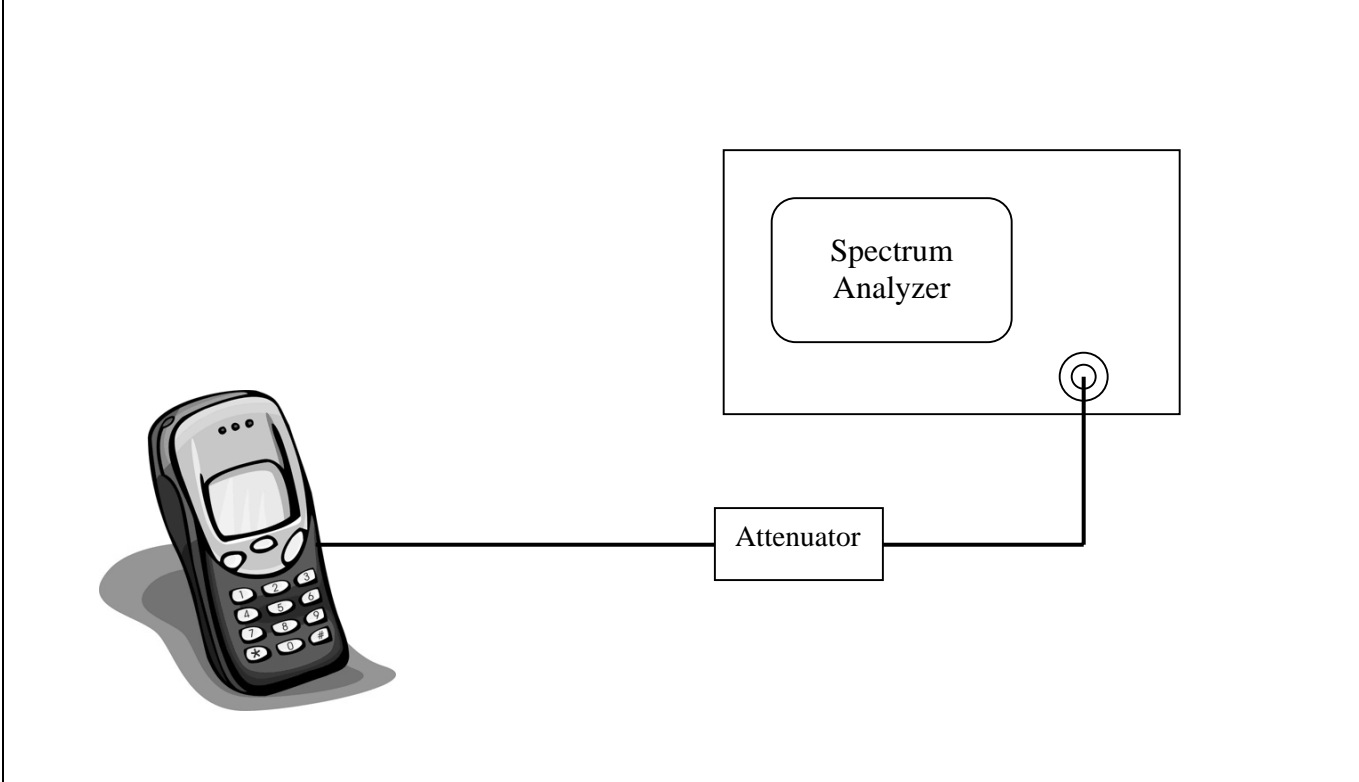

5 ANTENNA REQUIREMENTS

5.1 Requirements

FCC: § 15.203

IC: RSS-210

1) For intentional radiator antenna shall be designed to ensure that no antenna other than that furnished by the responsible party can be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section.

2) According to FCC 47 CFR Section 15.247 (b), if transmitting antennas of directional gain greater than 6 dBi are used, the power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6dBi.

5.2 Antenna Information

- a) The Antennas used in this product are permanently attached
- b) There are no provisions for connection to an external antenna

This phone unit complies with the requirement of 15.203

6 6dB BANDWIDTH

6.1 Test Configuration

FCC:	§ 15.247 a2
IC:	RSS-210 §A8.2 (a)
<p>The RF output port of the EUT was directly connected to the input of the spectrum analyzer with sufficient attenuation. Subsequently, the low, mid and high channels of transmitter were enabled separately to investigate the 6 dB-bandwidth for each channel. A fully charged battery was used as supply voltage.</p> <p>Spectrum Analyzer Parameters: RBW = 100kHz, VBW = 300kHz, Span=20MHz, Sweep Time = Auto</p> <p>Frequencies of Interest: Spectrum was investigated from 2412 MHz – 2462 MHz.</p>	

6.2 Results and Limits:

Figure	802.11 Mode	Frequency	Channel	Measured BW (MHz)
6-1a	b (1M data rate)	2412	1	13.10
6-1b		2437	6	13.15
6-1c		2462	11	13.15
6-2a	b (11M data rate)	2412	1	12.95
6-2b		2437	6	13.10
6-2c		2462	11	13.25
6-3a	g (6M data rate)	2412	1	16.15
6-3b		2437	6	16.55
6-3c		2462	11	16.60

Limit: >= 500kHz



Applicant:	Kyocera
FCC ID:	V65M9300
Report #:	CT-M9300-1210-R0

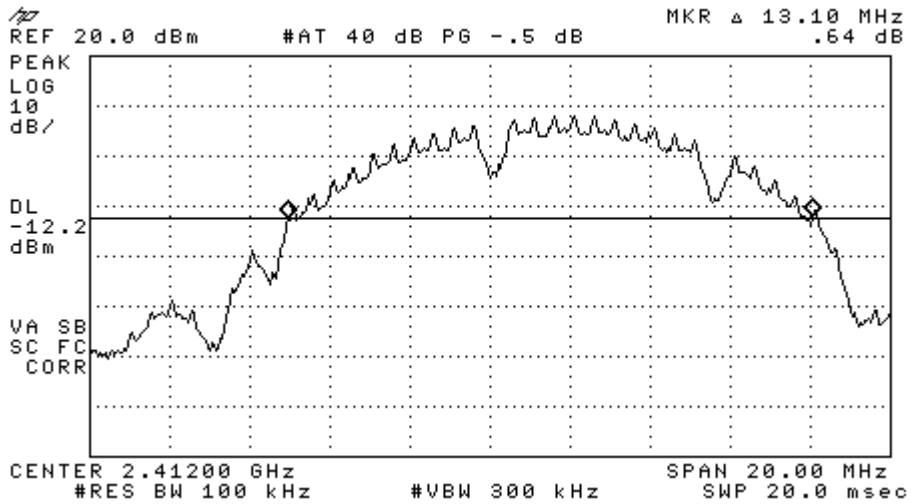


Figure 6-1a: 6 dB Bandwidth, 802.11b 1Mbps, Ch 1.

RL

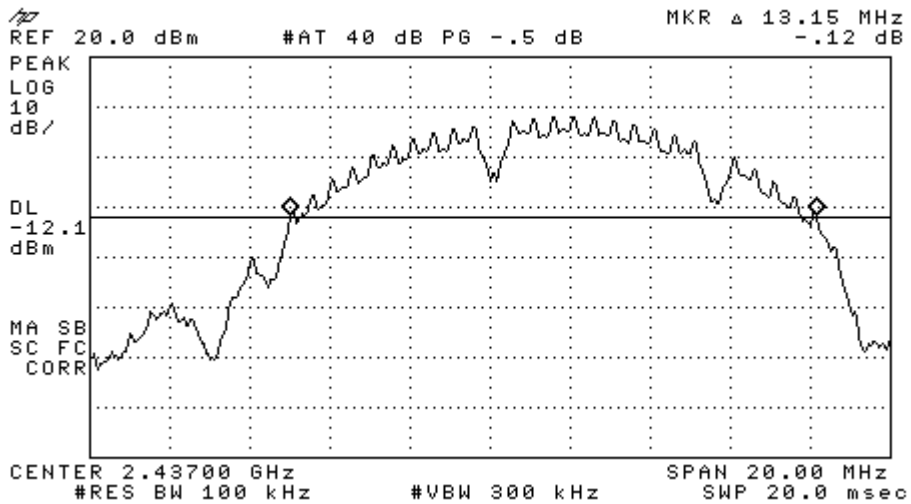


Figure 6-1b: 6 dB Bandwidth, 802.11b 1Mbps, Ch 6.

RL


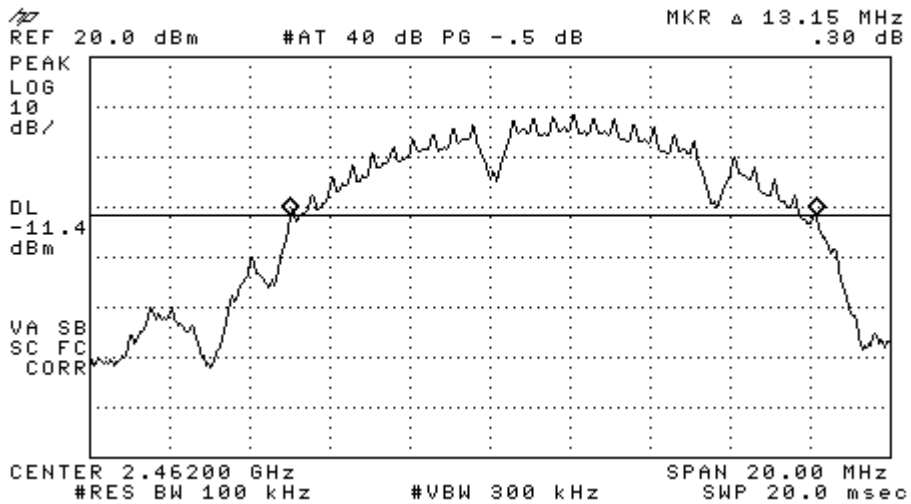


Figure 6-1c: 6 dB Bandwidth, 802.11b 1Mbps, Ch 11.


RL




Applicant:	Kyocera
FCC ID:	V65M9300
Report #:	CT-M9300-1210-R0

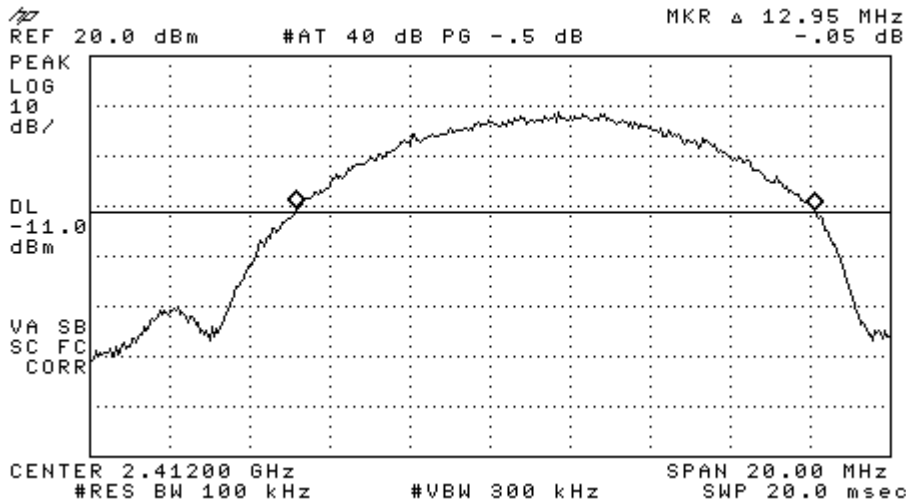

RL

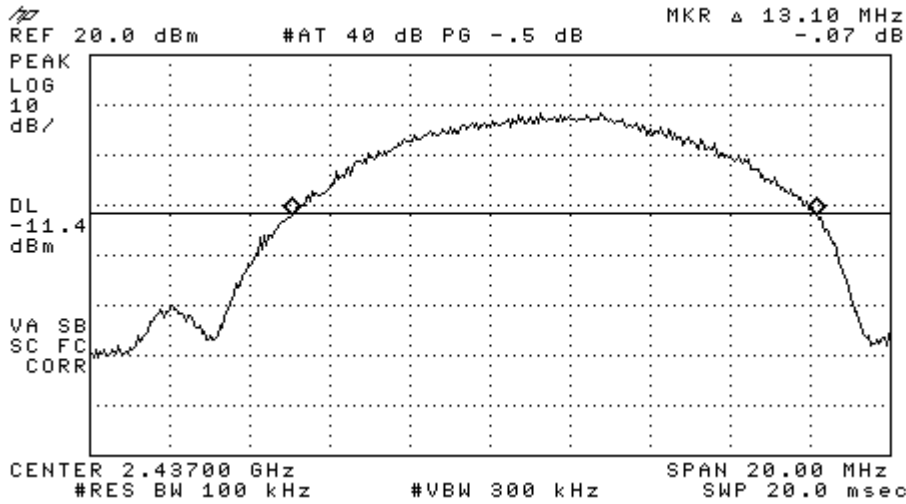

RL

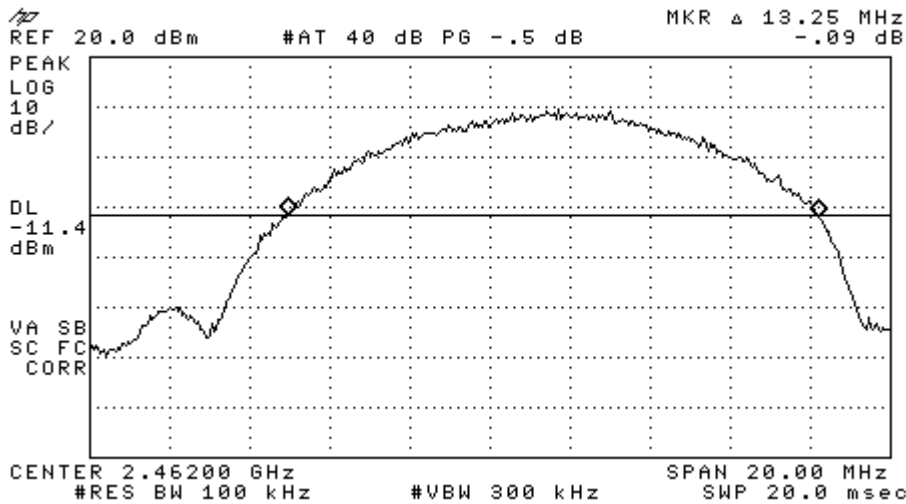

RL



Applicant:	Kyocera
FCC ID:	V65M9300
Report #:	CT-M9300-1210-R0

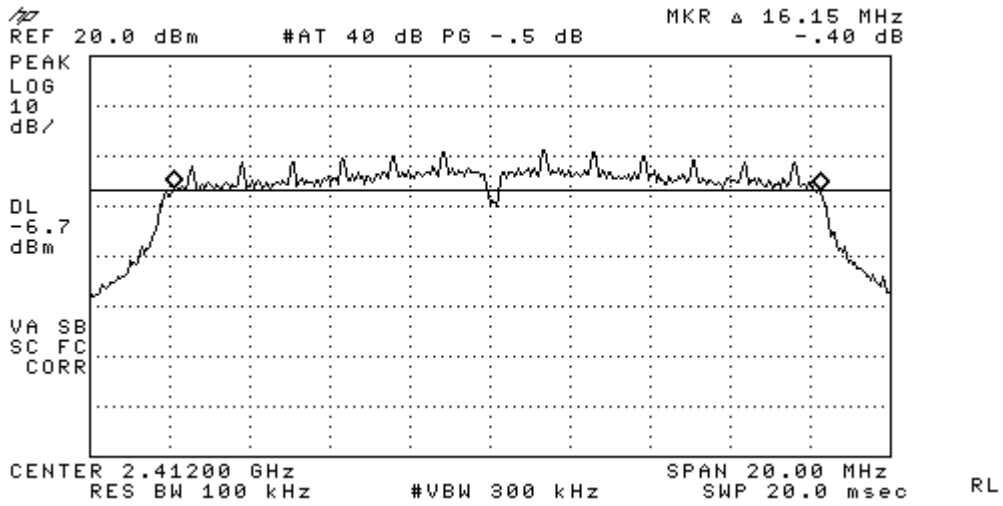


Figure 6-3a: 6 dB Bandwidth, 802.11g, Ch 1.

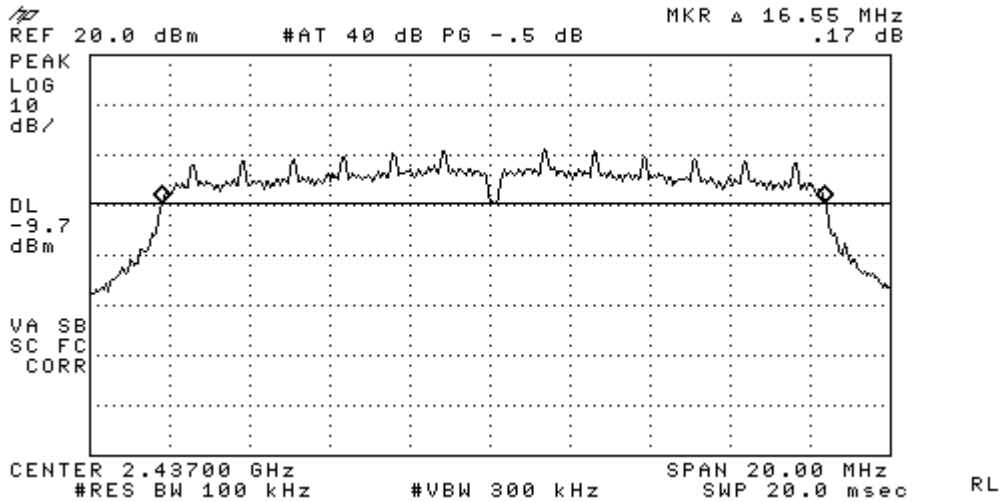


Figure 6-3b: 6 dB Bandwidth, 802.11g, Ch 6.

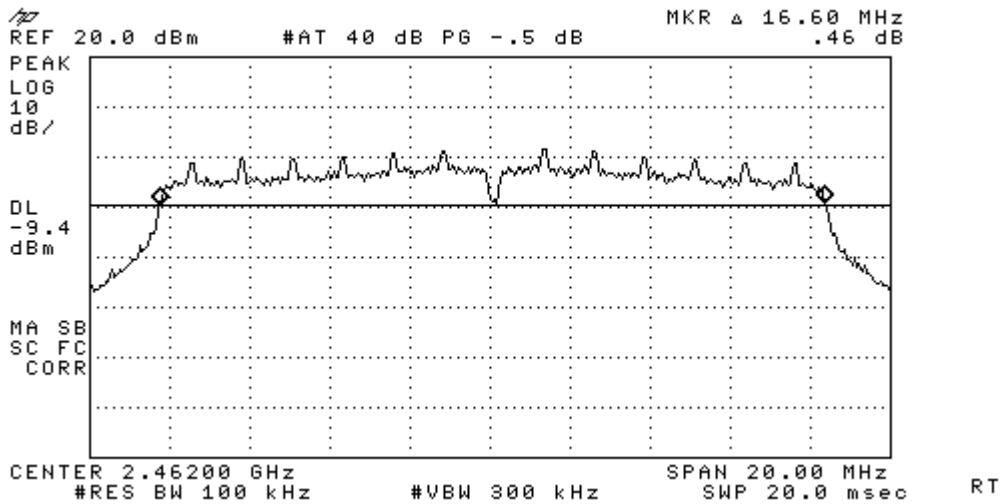


Figure 6-3c: 6 dB Bandwidth, 802.11g, Ch 11.

7 Peak OUTPUT POWER

7.1 Test Configuration

FCC:	§ 15.247 b3
IC:	RSS-210 §8.4(4)
<p>The RF output port of the EUT was directly connected to the input of the spectrum analyzer with sufficient attenuation. Subsequently, the low, mid and high channels of transmitter were enabled separately to investigate the peak output power for each channel. A fully charged battery was used as supply voltage.</p> <p>Spectrum Analyzer Parameters: RBW = 1MHz, VBW = 3MHz, Span=40MHz, Sweep Time = Auto</p> <p>Frequencies of Interest: Spectrum was investigated from 2412 MHz – 2462 MHz.</p>	

7.2 Maximum Peak Output Power Results and Limits

Mode	Data Rate (Mbps)	CONDUCTED POWER (dBm)		
		Ch 01 2412 MHz	Ch 06 2437 MHz	Ch 11 2462 MHz
802.11b	1	19.12	19.1	19.56
	11	22.22	22.23	22.82
802.11g	6	18.56	18.64	19.63
	54	17.18	16.66	18.04
Limit: < 30dBm (1W), for Max. antenna gain =< 6dBi				



Applicant:	Kyocera
FCC ID:	V65M9300
Report #:	CT-M9300-1210-R0

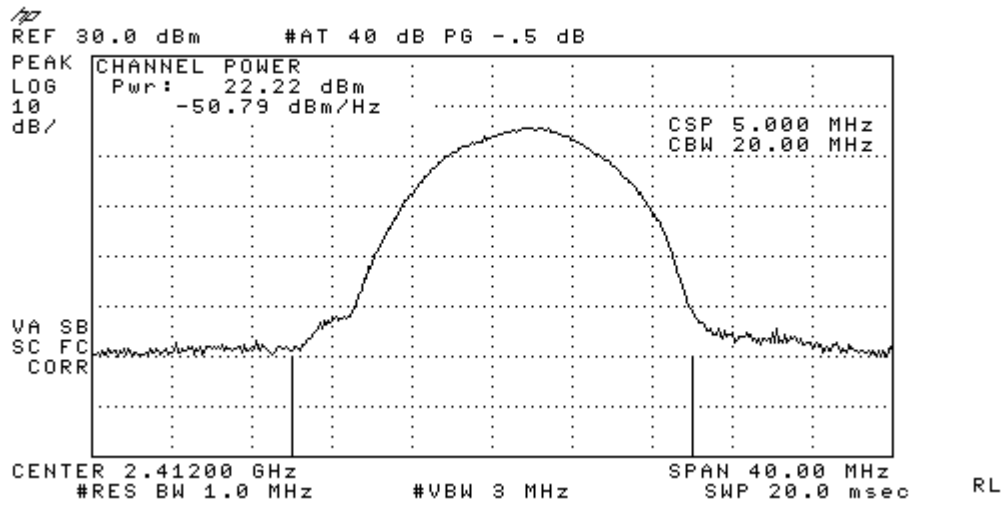


Figure 7-1: Output Power 802.11b, 11Mbps, Ch 1

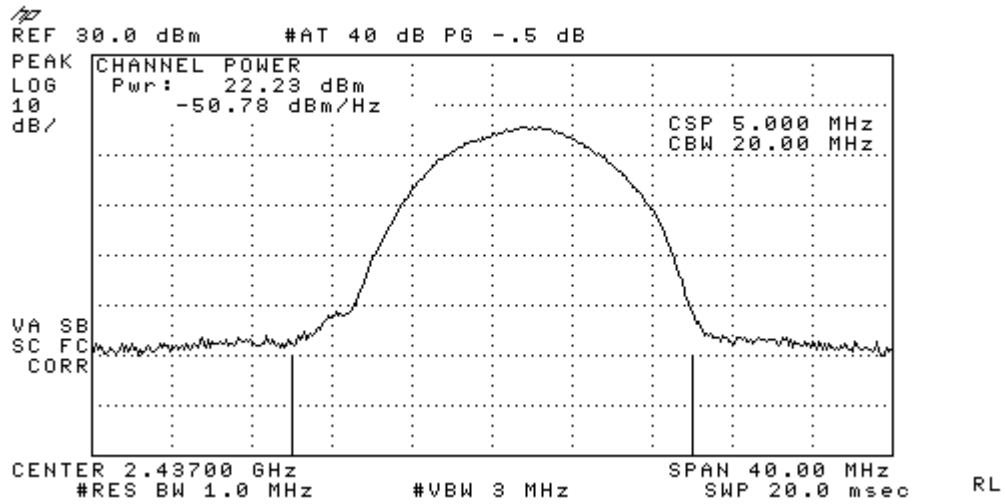


Figure 7-2: Output Power 802.11b, 11Mbps, Ch 6

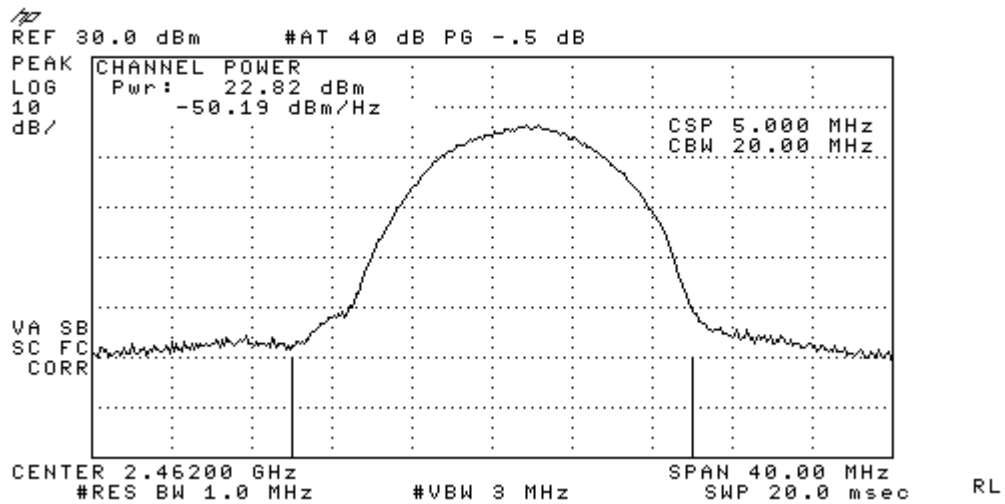


Figure 7-3: Output Power 802.11b, 11Mbps, Ch 11



Applicant:	Kyocera
FCC ID:	V65M9300
Report #:	CT-M9300-1210-R0

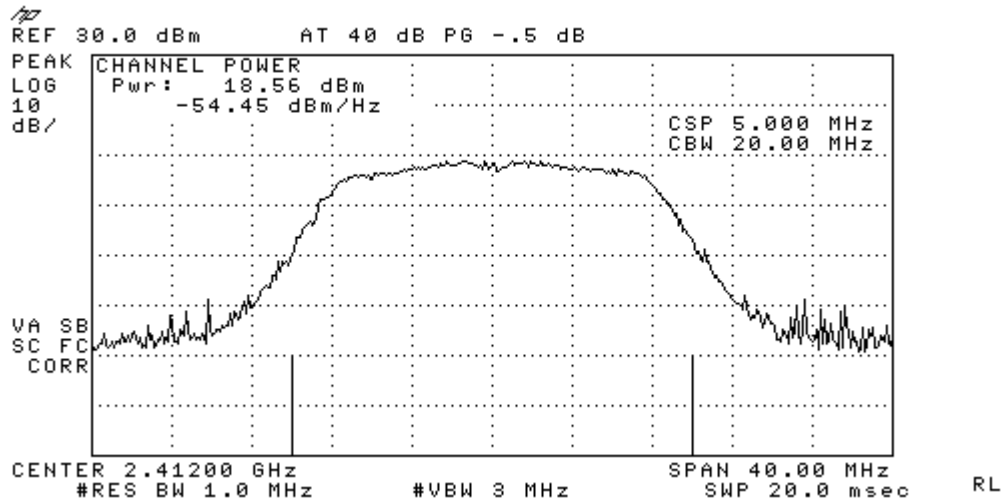


Figure 7-4: Output Power 802.11g, 6Mbps, Ch 1

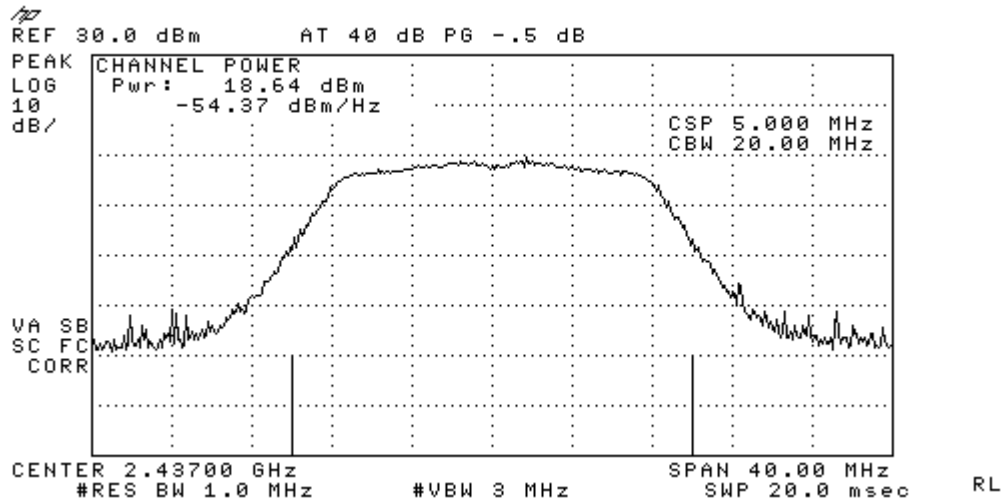


Figure 7-5: Output Power 802.11g, 6Mbps, Ch 6

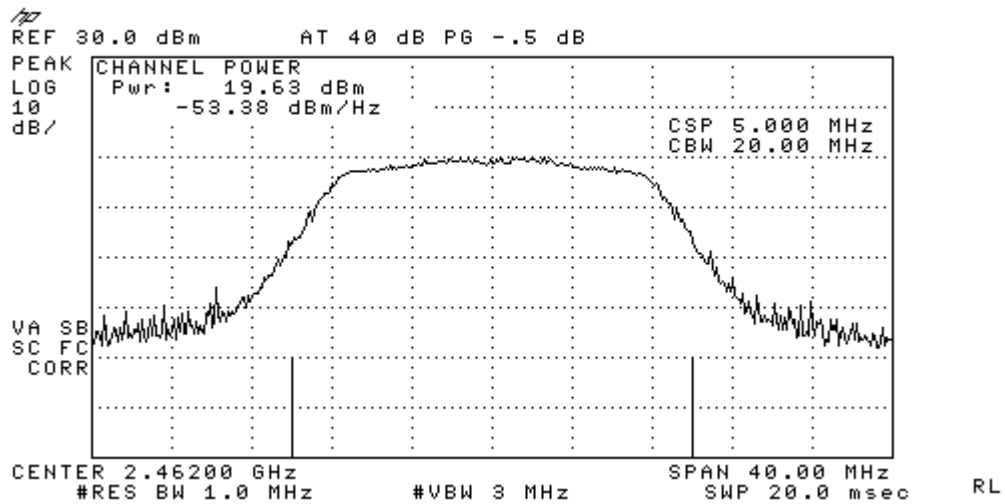


Figure 7-6: Output Power 802.11g, 6 Mbps, Ch 11

8 POWER SPECTRAL DENSITY (PSD)

8.1 Test Configuration

FCC:	§ 15.247 e
IC:	RSS-210 §A8.2(2)
<p>The RF output port of the EUT was directly connected to the input of the spectrum analyzer with sufficient attenuation. Subsequently, the transmitter was set in transmission mode at appropriate frequency. A fully charged battery was used as supply voltage.</p> <p>Spectrum Analyzer Parameters: RBW = 3kHz, VBW = 10kHz, Span=300kHz, Sweep Time = 100sec, DL=8dBm</p> <p>Frequencies of Interest: Spectrum was investigated from 2412 MHz – 2462 MHz.</p>	


8.2 Results and Limits:

Figure	802.11 Mode	Frequency	Channel	Measured PSD (dBm)
8-1a	b	2412	1	-7.07
8-1b		2437	6	-6.93
8-1c		2462	11	-6.13
8-2a	g	2412	1	-19.65
8-2b		2437	6	-20.32
8-2c		2462	11	-19.27

Limit: < 8dBm in any 3 kHz band




Applicant:	Kyocera
FCC ID:	V65M9300
Report #:	CT-M9300-1210-R0

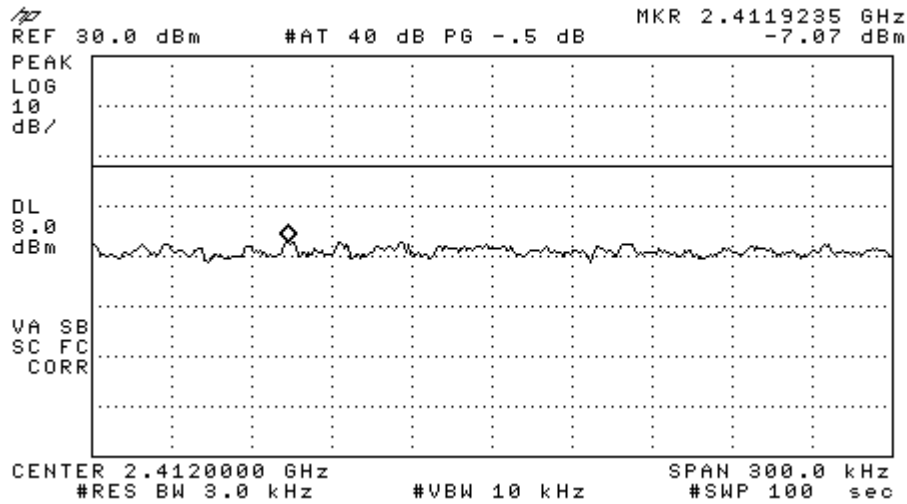


RL

Figure 8-1a: Power Spectral Density, 802.11b, Ch 1.

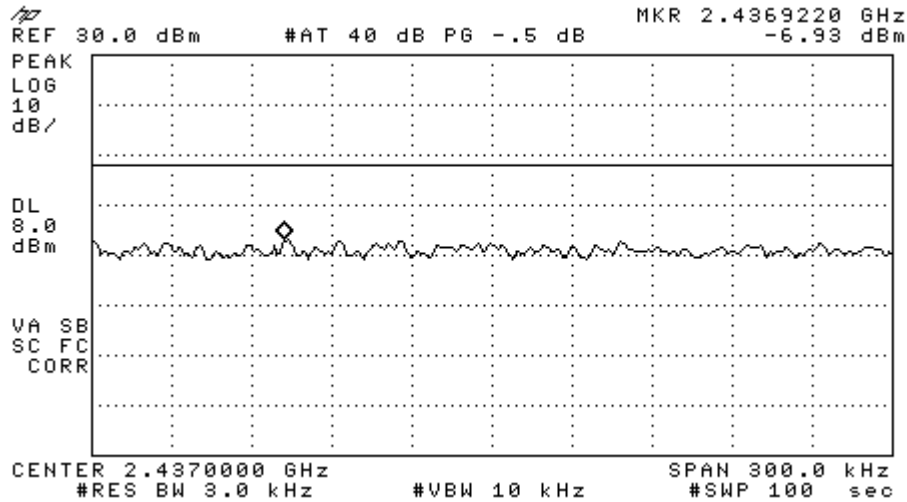

RL

Figure 8-1b: Power Spectral Density, 802.11b, Ch 6.

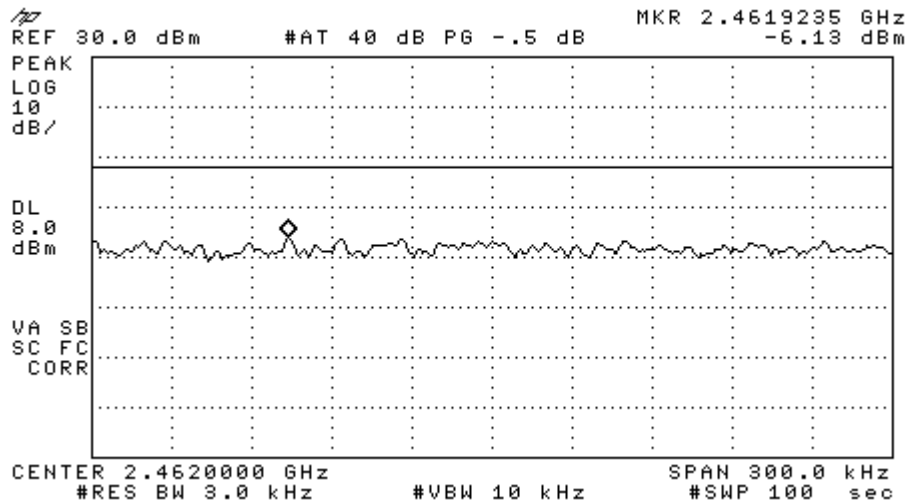

RL

Figure 8-1c: Power Spectral Density, 802.11b, Ch 11.



Applicant:	Kyocera
FCC ID:	V65M9300
Report #:	CT-M9300-1210-R0

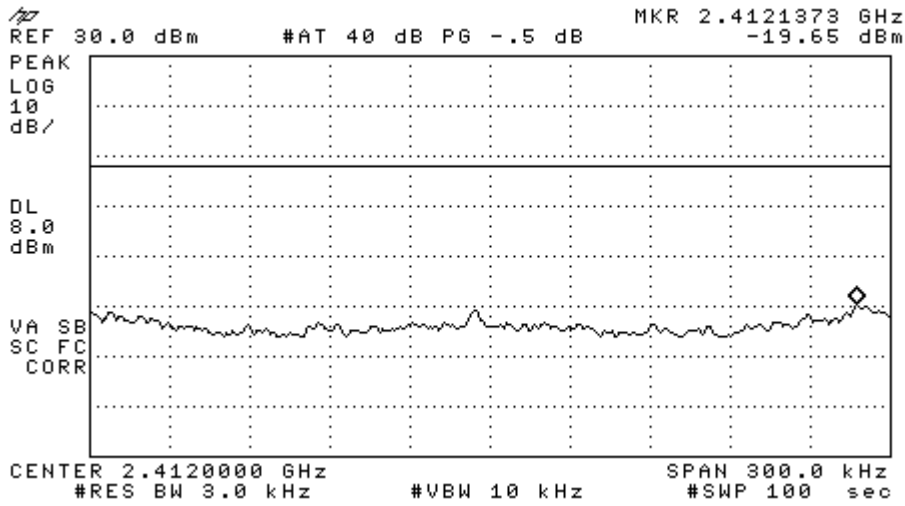


Figure 8-2a: Power Spectral Density, 802.11g, Ch 1.

RL

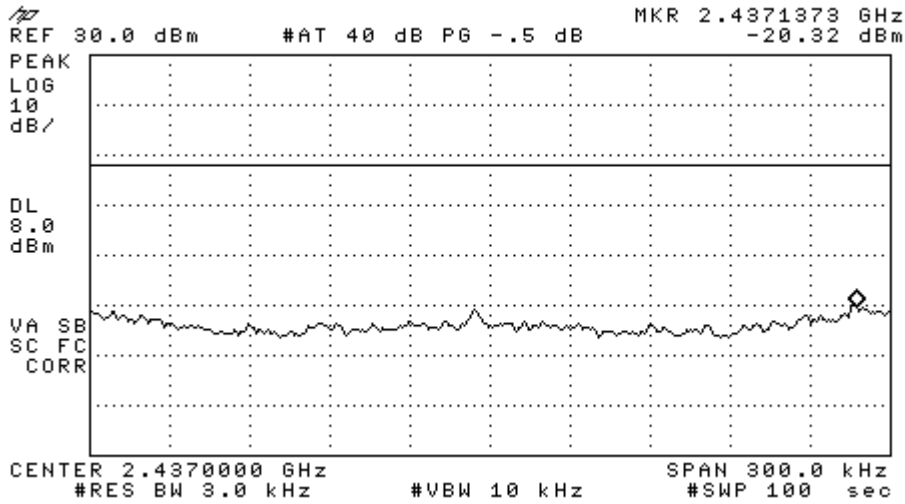


Figure 8-2b: Power Spectral Density, 802.11g, Ch 6.

RL

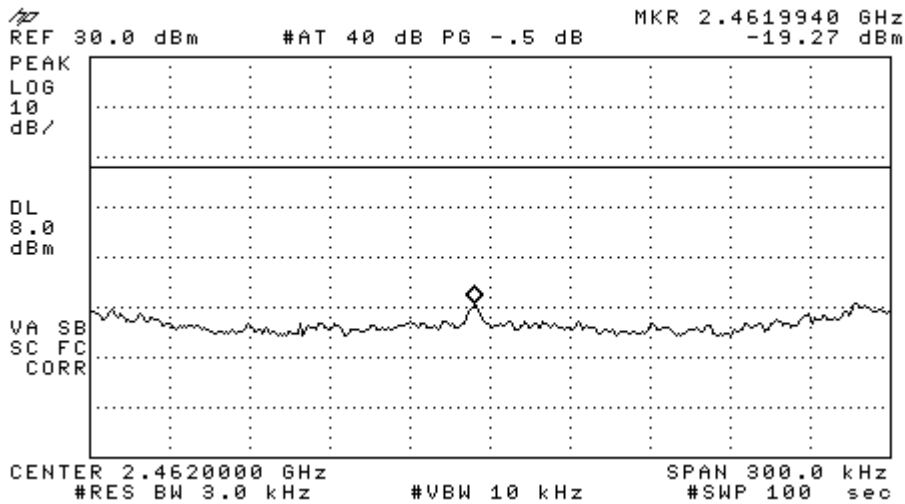


Figure 8-2c: Power Spectral Density, 802.11g, Ch 11.

RL

9 BANDEDGE

9.1 Test Configuration



FCC:	§ 15.247 d
IC:	RSS-210 §A8.5
<p>The RF output port of the EUT was directly connected to the input of the spectrum analyzer with sufficient attenuation. Subsequently, the low and high channels of transmitter were enabled separately to investigate the band-edge compliance of conducted emissions. To ensure the band-edge compliance when the channels are hopping, measurements were also conducted at low and high channels in this mode. A fully charged battery was used as supply voltage.</p> <p>Spectrum Analyzer Parameters: RBW = 100kHz, VBW = 300kHz, Span=50MHz, Sweep Time = Auto, DL=-20dBc CF=2390MHz or 2483.5MHz</p> <p>Frequencies of Interest: Spectrum was investigated from 2412 MHz – 2462 MHz.</p>	

9.2 Results: Bandedge

Figure	802.11 Mode	Frequency	Channel	Plot Description
9-1a	b	2412	1	Low ch band edge
9-1b		2462	11	High ch band edge
9-2a	g	2412	1	Low ch band edge
9-2b		2462	11	High ch band edge



Applicant:	Kyocera
FCC ID:	V65M9300
Report #:	CT-M9300-1210-R0

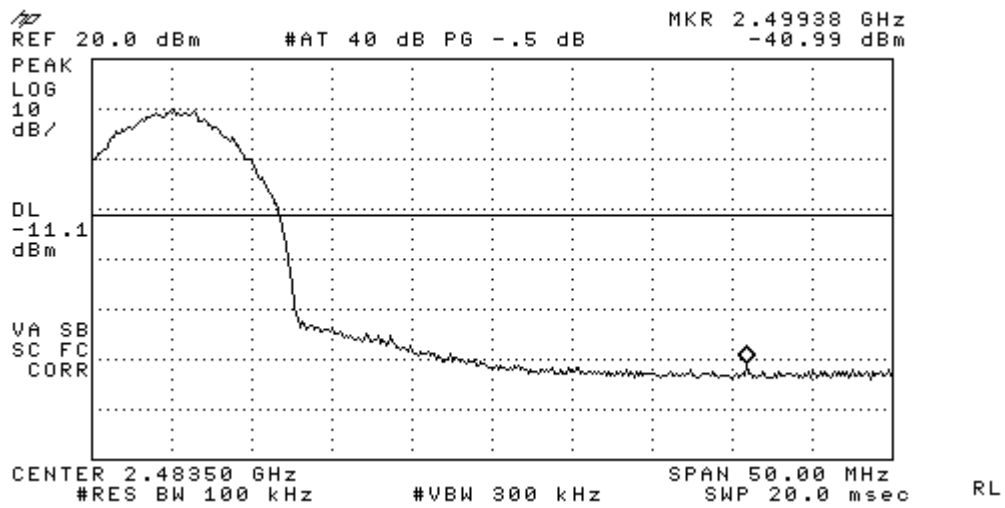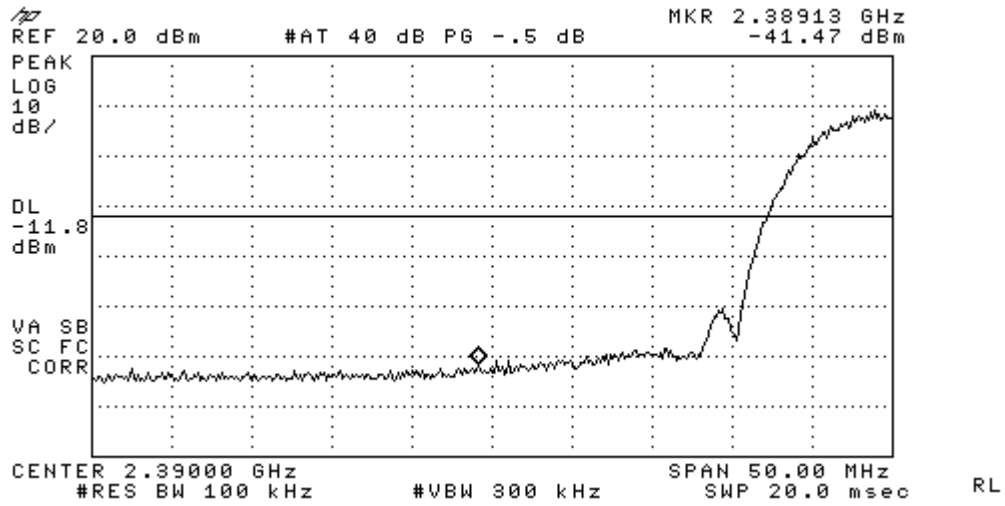



Applicant:	Kyocera
FCC ID:	V65M9300
Report #:	CT-M9300-1210-R0

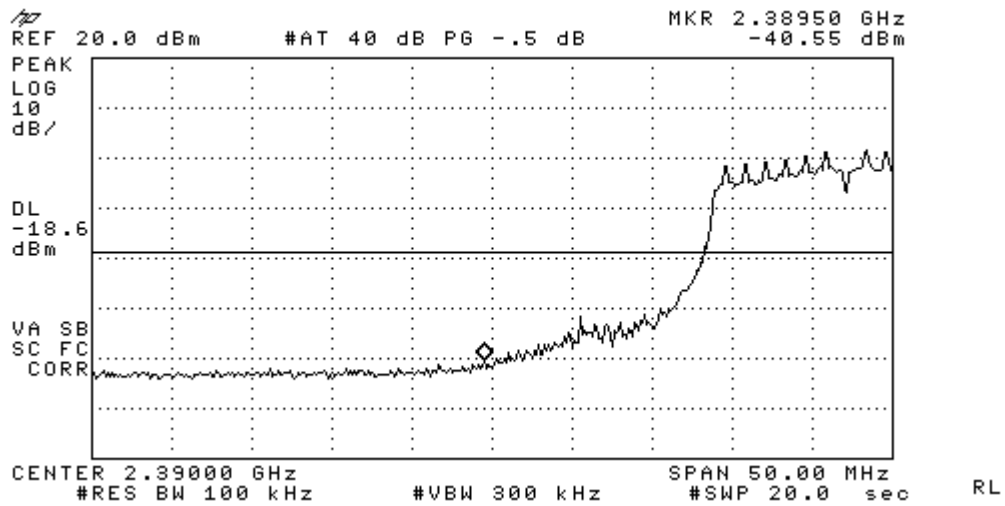


Figure 9-2a: Low band edge, 802.11g, ch1.

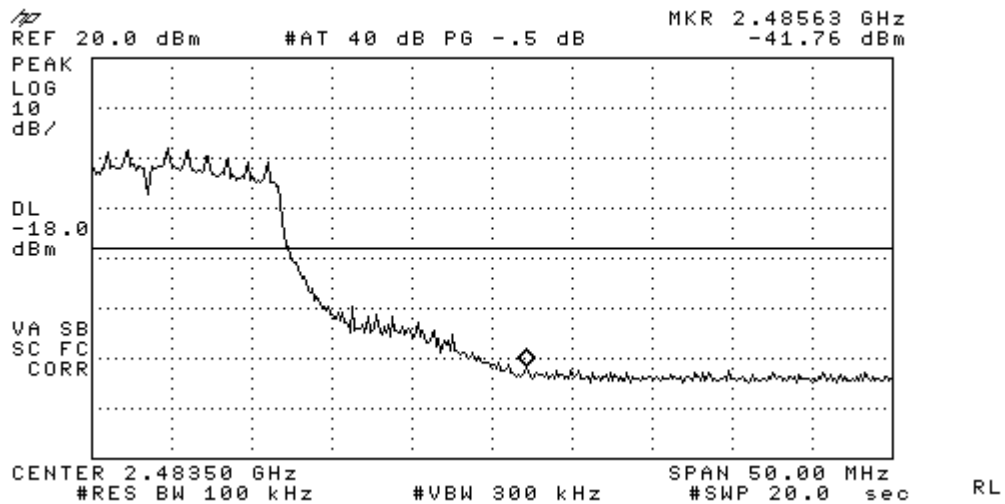


Figure 9-2b: High band edge, 802.11g, ch11.

10 SPURIOUS RF CONDUCTED EMISSIONS

10.1 Test Configuration

FCC:	§ 15.247 d
IC:	RSS-210 §A8.5

The RF output port of the EUT was directly connected to the input of the spectrum analyzer with sufficient attenuation. Subsequently, the low, mid and high channels of Bluetooth transmitter were enabled separately and the frequency spectrum was investigated for any spurious emissions. A fully charged battery was used as supply voltage.

Spectrum Analyzer Parameters:
 RBW = 100kHz, VBW = 300kHz, Sweep Time = Auto, DL=-20dBc

Frequencies of Interest: Spectrum was investigated from 30MHz – 25 GHz.

10.2 Results: Conducted Spurious Emissions

Figure	Channel	Frequency	Channel	Plot Description
10-1a	b	2412	1	Low ch bandedge, 30MHz to 25GHz
10-1b		2437	6	Mid ch bandedge, 30MHz to 25GHz
10-1c		2462	11	High ch bandedge, 30MHz to 25GHz
11-2a	g	2412	1	Low ch bandedge, 30MHz to 25GHz
11-2b		2437	6	Mid ch bandedge, 30MHz to 25GHz
11-2c		2462	11	High ch bandedge, 30MHz to 25GHz

Comments:



Applicant:	Kyocera
FCC ID:	V65M9300
Report #:	CT-M9300-1210-R0

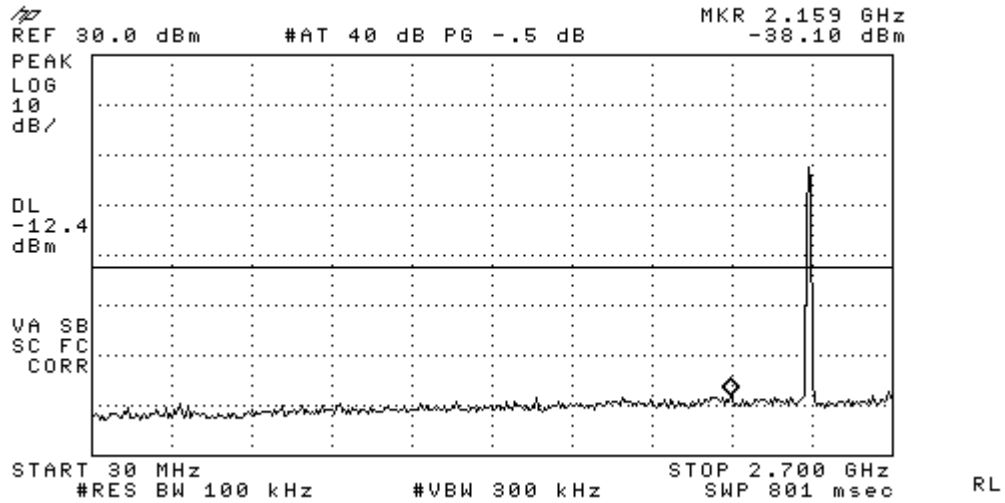


Figure 10-1a1: Conducted Spurious Emissions, 802.11b, Ch 1

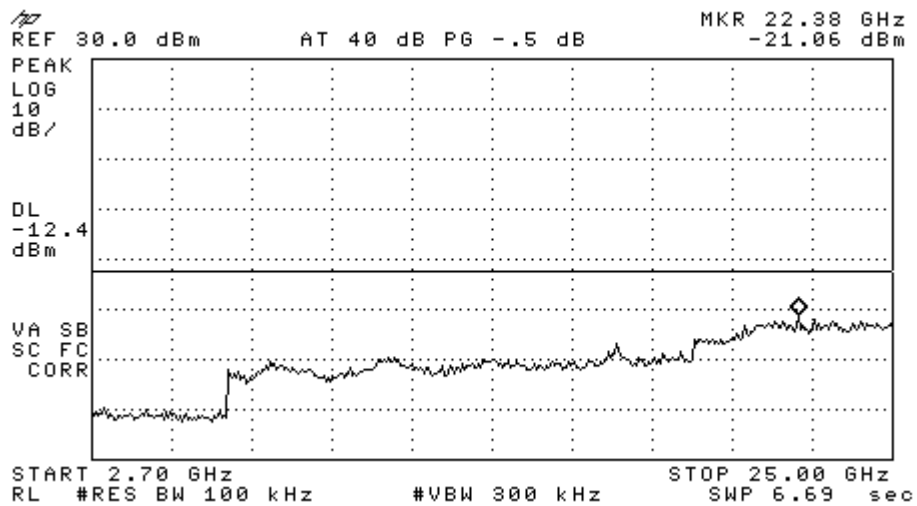


Figure 10-1a2: Conducted Spurious Emissions, 802.11b, Ch 1



Applicant:	Kyocera
FCC ID:	V65M9300
Report #:	CT-M9300-1210-R0

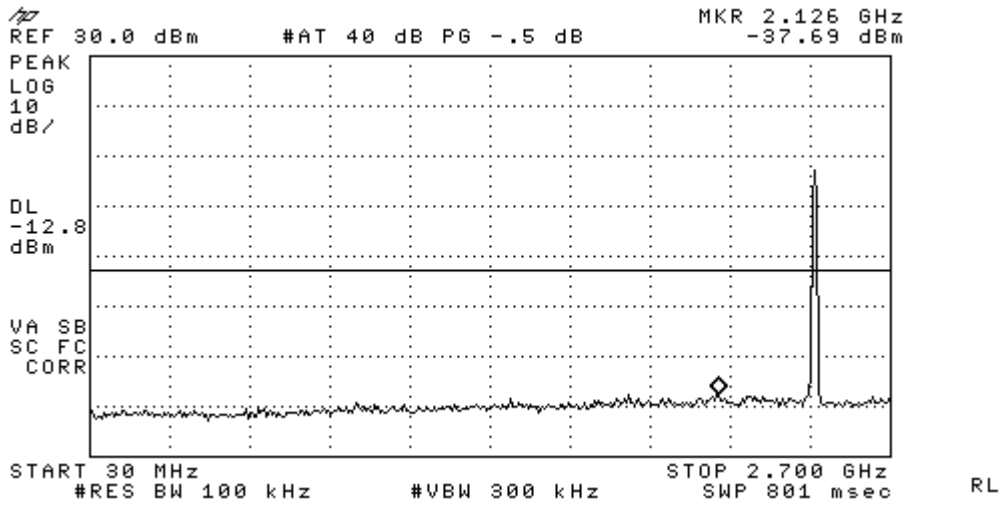


Figure 10-1b1: Conducted Spurious Emissions, 802.11b, Ch 6

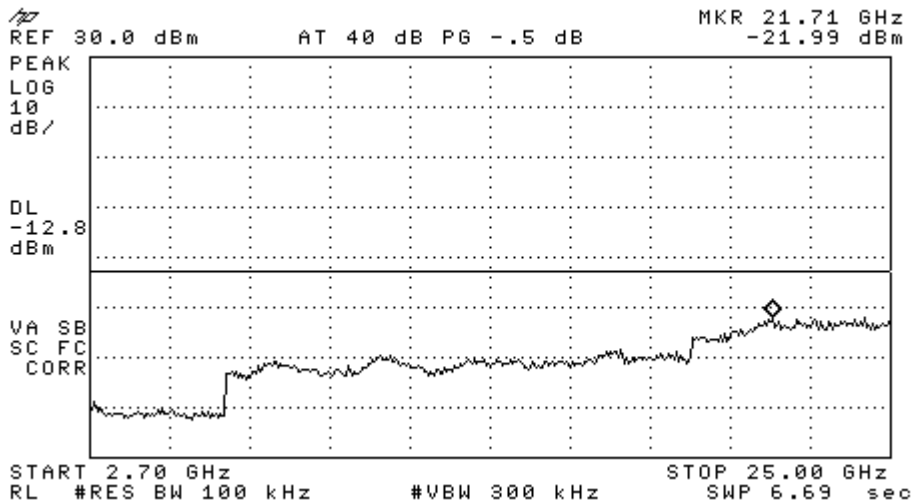


Figure 10-1b2: Conducted Spurious Emissions, 802.11b, Ch 6



Applicant:	Kyocera
FCC ID:	V65M9300
Report #:	CT-M9300-1210-R0

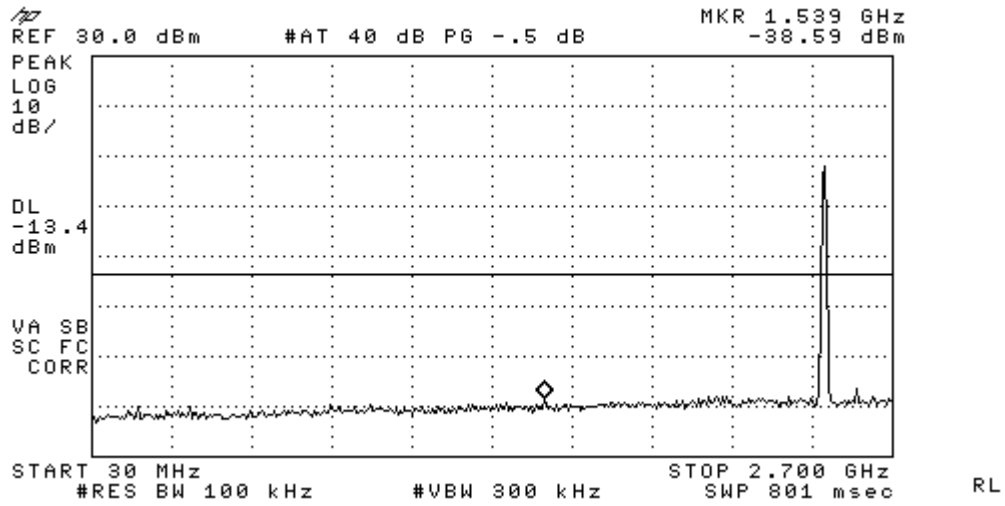


Figure 10-1c1: Conducted Spurious Emissions, 802.11b, Ch 11

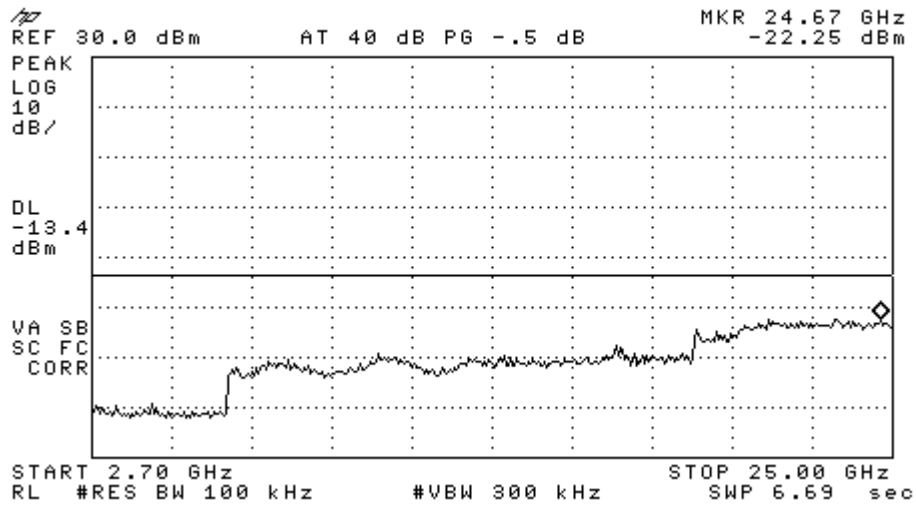


Figure 10-1c2: Conducted Spurious Emissions, 802.11b, Ch 11



Applicant:	Kyocera
FCC ID:	V65M9300
Report #:	CT-M9300-1210-R0

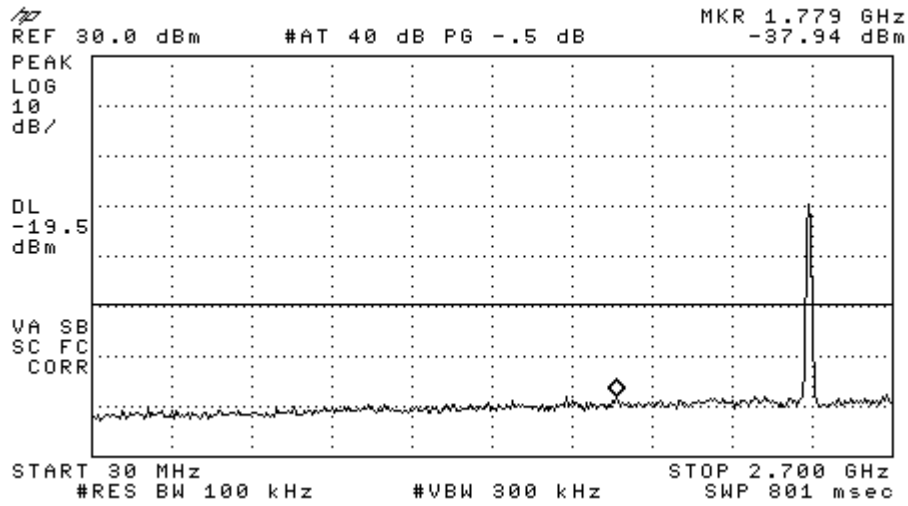


Figure 10-2a1: Conducted Spurious Emissions, 802.11g, Ch 1

RL


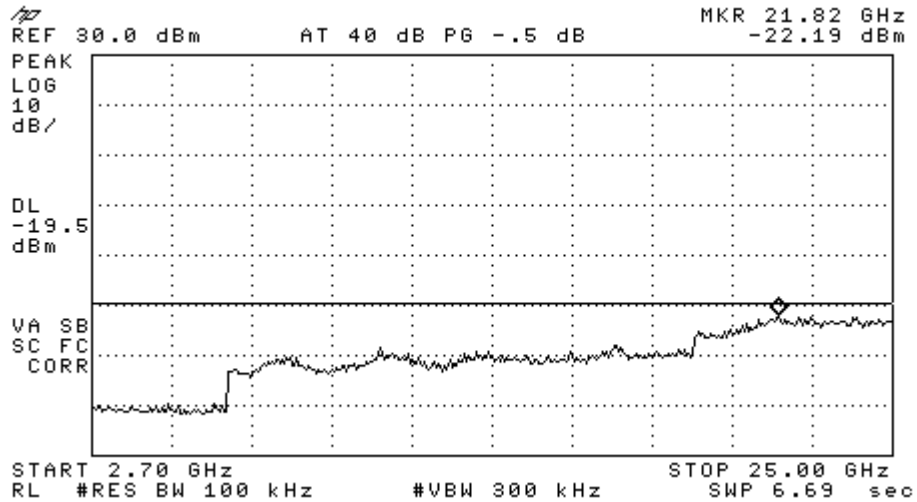


Figure 10-2a2: Conducted Spurious Emissions, 802.11g, Ch 1



Applicant:	Kyocera
FCC ID:	V65M9300
Report #:	CT-M9300-1210-R0

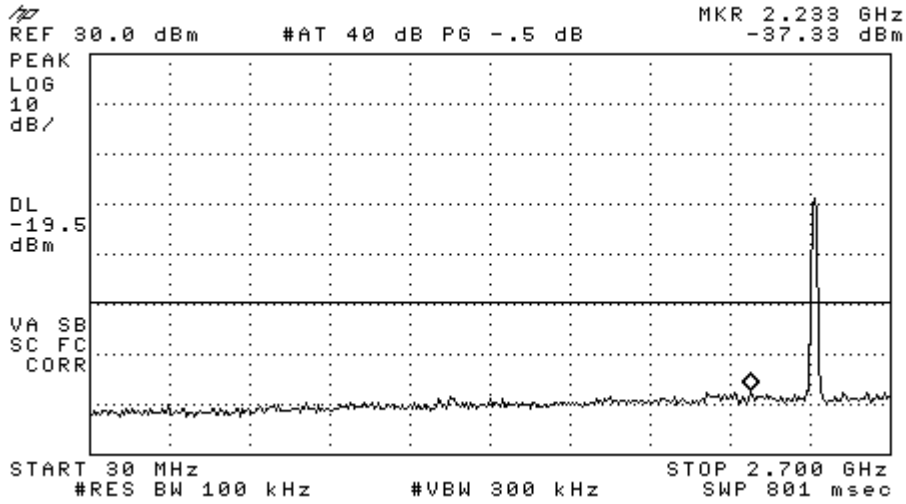

RL

Figure 10-2b1: Conducted Spurious Emissions, 802.11g, Ch 6

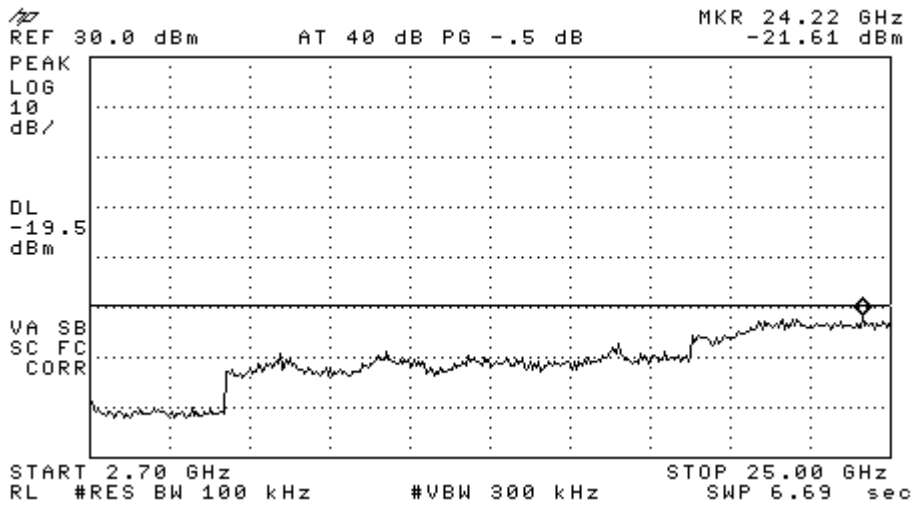


Figure 10-2b2: Conducted Spurious Emissions, 802.11g, Ch 6



Applicant:	Kyocera
FCC ID:	V65M9300
Report #:	CT-M9300-1210-R0

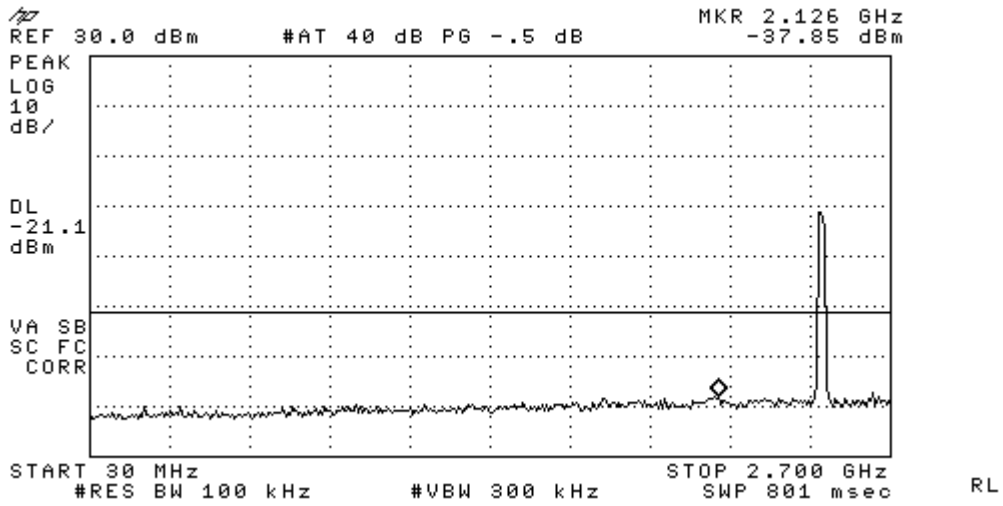


Figure 10-2c1: Conducted Spurious Emissions, 802.11g, Ch 11

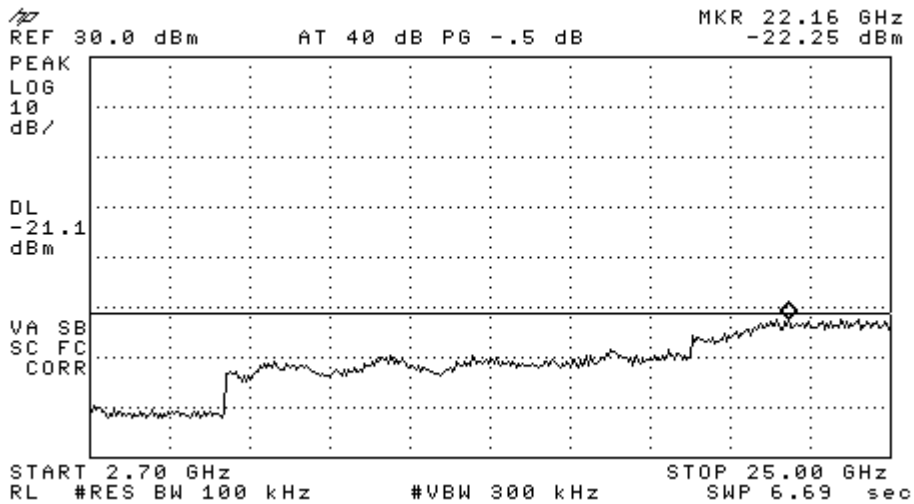


Figure 10-2c2: Conducted Spurious Emissions, 802.11g, Ch 11

Applicant:	Kyocera
FCC ID:	V65M9300
Report #:	CT-M9300-1210-R0

11 AC POWER LINE CONDUCTED EMISSIONS

11.1 Test Configuration & Results

FCC:	§ 15.107 § 15.207
IC:	RSS-210 §6.6
See separate report	

12 RADIATED EMISSIONS

12.1 Test Configuration & Results

FCC:	§ 15.109 § 15.209
IC:	RSS-210 §A2.9 (2)
See separate report	

13 SAR TEST

13.1 Test Configuration & Results

FCC:	§ 2.1091/2.1093
IC:	RSS-102
See separate report	

14 TEST EQUIPMENT

The test equipment utilized to perform the tests documented in this report has been calibrated in accordance with the manufacturer's recommendations and is traceable to recognized national standards.

Description	Manufacturer	Model No.	Serial No.	Cal Due Date
Spectrum Analyzer	Hewlett Packard	8593EM	3710A00203	06/09/12
Spectrum Analyzer	Hewlett Packard	8595E	3911A03899	07/20/11