



Applicant:	Kyocera
FCC ID:	V65SCP-6760
Report #:	CT-6760-22_24-0709-R0

## RF Emissions Test Report

FCC Part 22 and 24

For

Kyocera Corporation  
c/o Kyocera Communication Inc.

Product:	Dual-Band CDMA Phone
Model:	SCP-6760

**TABLE OF CONTENTS**

1 SUMMARY OF TESTING ..... 4

2 EQUIPMENT UNDER TEST INFORMATION..... 4

3 TEST FACILITIES..... 5

4 TEST SETUP ..... 5

    4.1 Test Configuration ..... 6

5 tty compliance ..... 7

6 Conducted RF OUTPUT POWER..... 7

    6.1 Test Configuration ..... 7

    6.2 Test Results..... 7

7 RADIATED RF OUTPUT POWER ..... 8

    7.1 Test Configuration ..... 8

    7.2 Test Results..... 8

8 OCCUPIED BANDWIDTH ..... 9

    8.1 Test Configuration ..... 9

    8.2 Test Result ..... 9

9 Spurious Emissions At Antenna Terminals ..... 12

    9.1 Test Configuration ..... 12

    9.2 Test Result ..... 12

10 Transmitter Radiated Spurious Emissions ..... 19

    10.1 Test Configuration and Result ..... 19

11 Receiver Spurious Emissions ..... 19

    11.1 Receiver Spurious Emissions..... 19

12 Transmitter RF Carrier Frequency Stability..... 20

    12.1 Test Configuration ..... 20

    12.2 Test Result ..... 21

13 Exposure of Humans to RF Fields (SAR) ..... 23

    13.1 Test Configuration and Result ..... 23

14 TEST EQUIPMENT..... 23

Applicant:	Kyocera
FCC ID:	V65SCP-6760
Report #:	CT-6760-22_24-0709-R0

## ATTESTATION

The tested device complies with the requirements in respect of all parameters subject to the test.

The test results and statements relate only to the items tested.

The test equipment used was suitable for the tests performed and within manufacturer's published specifications and operating parameters.

The test methods were consistent with the methods described in the relevant standards.

<b>Product:</b>	Dual-Band CDMA Cellular Phone with Bluetooth
<b>Model #:</b>	SCP-6760
<b>FCC ID:</b>	V65SCP-6760
<b>Tested in accordance with:</b>	FCC Part 22 & 24
<b>Test performed by:</b>	CompTest Services LLC
<b>Test Requested by:</b>	Kyocera Corporation c/o Kyocera Communication Inc 10300 Campus Point Drive San Diego, CA 92121 United States
<b>Date of Test:</b>	July 7 – July 8, 2009

### Responsible Engineer

*Benjamin Nguyen*

---

Benjamin Nguyen  
Test Engineer

### Reviewed and approved by:




---

Tammy To  
Quality Manager

## 1 SUMMARY OF TESTING

Section #	Rule Part	Test Description	Verdict
4	FCC § 2.1046	Conducted Power	Pass
5	FCC § 22.913, 24.232	Radiated Power	Pass
6	FCC § 2.1049, 22.917 (b)(d), 24.238	Occupied Bandwidth	Pass
7	FCC § 2.1051, 22.917(e)(f), 24.238	Spurious Emissions at Antenna Terminals	Pass
8	FCC § 2.1053, 22.91, 24.238	Transmitter Radiated Spurious Emissions	Pass
9	FCC § 15.109	Receiver Spurious Emissions	Pass
10	FCC § 2.1055, 22.355, 24.235	Transmitter RF Carrier Frequency Stability	Pass
11	FCC § 2.1093	Exposure of Humans to RF Fields	Pass

## 2 EQUIPMENT UNDER TEST INFORMATION


<b>EUT Serial Number:</b>	268435457816702552	
<b>Type:</b>	[ ] Prototype, [X] Pre-Production, [ ] Production	
<b>Equipment Category:</b>	Portable	
<b>RF Exposure Environment:</b>	General Population / Uncontrolled	
<b>Antenna:</b>	Internal Antenna	
<b>Detachable Antenna:</b>	No	
<b>External Input:</b>	Audio/Digital Data	
<b>Quantity:</b>	Quantity production is planned	
<b>Multiple Access Scheme:</b>	CDMA	
<b>Emission Designators:</b>	1M25F9W	
<b>FCC Rule Parts:</b>	§22H	§24E
<b>Modes:</b>	800 CDMA	1900 CDMA
<b>TX Frequency (MHz):</b>	824 – 849	1850 - 1910
<b>Max. Output Power (W):</b>	0.513 ERP	0.676 EIRP

### 3 TEST FACILITIES

The test sites and measurement facilities used to collect data are located at 10300 Campus Point Drive San Diego, CA 92121, USA

### 4 TEST SETUP

All CDMA measurements were conducted with a base station simulator to establish a CDMA link with the equipment under test (EUT). To investigate the response of the EUT the main antenna RF output port of the EUT was connected to the input of the spectrum analyzer with a RF cable. The amplitude of the spectrum analyzer is corrected for the cable insertion loss and any other applicable losses. A fully charged battery was used as a power supply voltage, except for the Transmitter RF Carrier Frequency Stability test a dummy battery connected to a power supply was used.

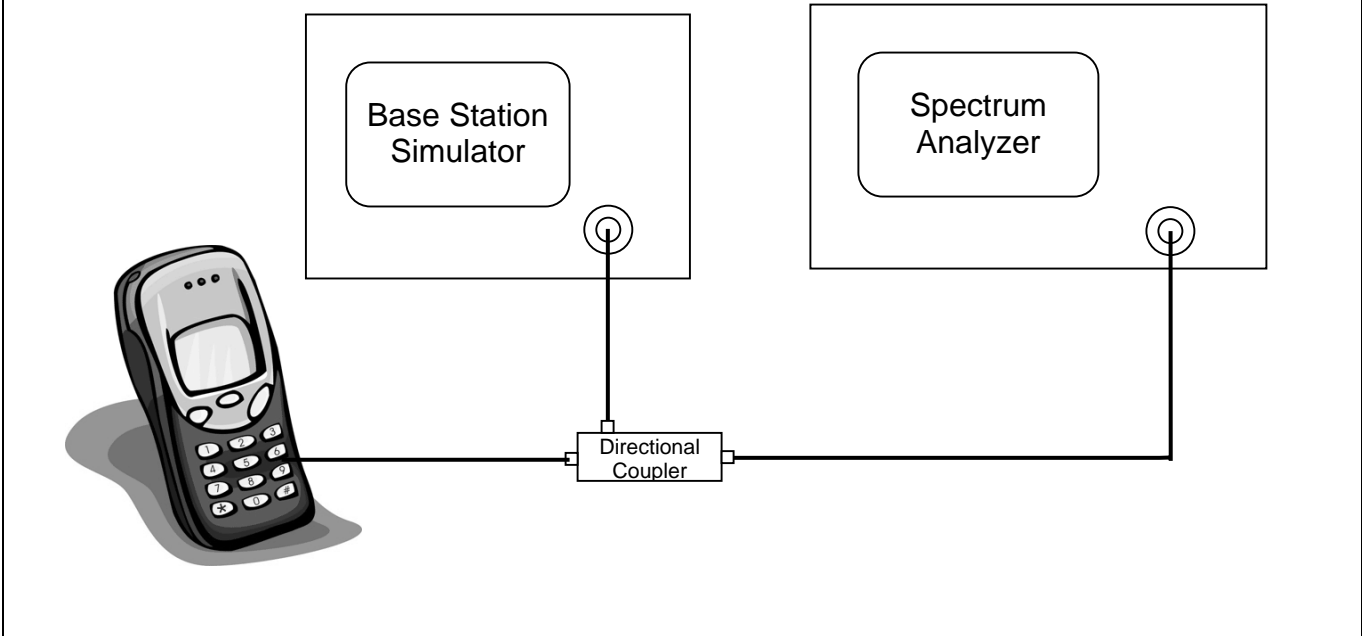

## 4.1 Test Configuration

To justify on the selection of applicable configurations, the EUT was pre-tested under all Radio Configuration and Service Option operation modes to determine the worst-case scenario.

The following configuration was determined and reported as worst-case for all measurements:

Radio Configuration:	<b>RC1</b>
Service Options:	<b>SO55</b>
Data Rate:	<b>Full Rate</b>

CONFIGURATION	CONDUCTED POWER (dBm)					
	CDMA 800			CDMA 1900		
	Ch 1013	Ch 383	Ch 777	Ch 25	Ch 600	Ch 1175
	Peak	Peak	Peak	Peak	Peak	Peak
SO2, RC1 Full Rate	29.35	29.14	29.12	28.70	28.62	28.16
SO2, RC3 Full Rate	29.22	28.95	28.84	28.36	28.50	27.98
SO55, RC1 Full Rate	<b>29.42</b>	<b>29.20</b>	<b>29.12</b>	<b>28.71</b>	<b>28.64</b>	<b>28.17</b>
SO55, RC3 Full Rate	29.30	29.17	29.07	28.64	28.54	28.04
TDSO SO32, RC3 (+SCH) Full Rate	29.26	29.02	28.85	28.45	28.48	28.00
TDSO SO32, RC3 (+F-SCH) Full Rate	29.19	28.99	28.84	28.60	28.57	28.10

CONFIGURATION	CONDUCTED POWER (dBm)					
	CDMA 800			CDMA 1900		
	Ch 1013	Ch 383	Ch 777	Ch 25	Ch 600	Ch 1175
	Avg	Avg	Avg	Avg	Avg	Avg
SO2, RC1 Full Rate	25.03	25.22	24.99	24.50	24.80	24.62
SO2, RC3 Full Rate	25.01	25.21	24.95	24.46	24.78	24.60
SO55, RC1 Full Rate	25.06	25.24	25.00	24.53	24.81	24.62
SO55, RC3 Full Rate	<b>25.12</b>	<b>25.30</b>	<b>25.08</b>	<b>24.66</b>	<b>24.85</b>	<b>24.70</b>
TDSO SO32, RC3 (+SCH) Full Rate	25.05	25.19	25.07	24.52	24.82	24.70
TDSO SO32, RC3 (+F-SCH) Full Rate	25.11	25.30	25.04	24.63	24.85	24.66

## 5 TTY COMPLIANCE

**FCC:** § 255 of the Telecom Act

The EUT has been designed for TTY Compliance with Cellular Compatibility Standard.

## 6 CONDUCTED RF OUTPUT POWER

### 6.1 Test Configuration

**FCC:** § 2.1046

**IC:** RSS132 §4.4; RSS133 §6.4

The EUT was connected to a Universal Power Meter through a RF cable. The cable loss was taken into account for accurate power measurement. The EUT was set at low, mid, high channels and each frequency band to investigate the conducted power.

### 6.2 Test Results

Mode	Frequency (MHz)	Channel	Conducted Power (dBm)
CDMA 800	824.70	1013	25.12
	836.52	383	25.30
	848.31	777	25.08
CDMA 1900	1851.25	25	24.66
	1880	600	24.85
	1908.75	1175	24.70

## 7 RADIATED RF OUTPUT POWER

### 7.1 Test Configuration

**FCC:** § 22.913, § 24.232

**IC:** RSS132 §4.4; RSS133 §6.4

The test was performed in Compliance Certification Service using substitution method. See separated radiated emission report for details.

### 7.2 Test Results

Mode	Frequency (MHz)	Channel	Maximum Radiated Power (dBm)
CDMA 800	824.70	1013	26.4
	836.52	383	27.0
	848.31	777	27.1
CDMA 1900	1851.25	25	26.0
	1880	600	28.3
	1908.75	1175	26.7



## 8 OCCUPIED BANDWIDTH

### 8.1 Test Configuration

<b>FCC:</b>	§ 2.1049, § 22.917(b)(d), § 24.238, § 27.53(g)(1)	
<b>IC:</b>	RSS132 §4.5; RSS133 §6.5	

The RF output of the EUT was connected to the input of the spectrum analyzer (S.A.) with sufficient attenuation. The spectrum with no modulation was recorded.

For Digital: Modulate with full rate all up power control bit.

S.A. Setting	RBW	VBW
Bandwidth Measurement	30KHz	300kHz
Band Edge Measurement	100KHz	100KHz


**Limits:** Bandwidth: N/A  
 Bandedge: -13dBm

### 8.2 Test Result

Figure	Description	Mode	Result
8-1	CDMA @ Ch383	<b>CDMA 800</b>	Pass
8-2	Lower Band Edge @ Ch 1013		Pass
8-3	Upper Band Edge @ Ch 777		Pass
8-4	CDMA @ CH600	<b>CDMA 1900</b>	Pass
8-5	Lower Band Edge @ CH 25		Pass
8-6	Upper Band Edge @ CH 1175		Pass




Applicant:	Kyocera
FCC ID:	V65SCP-6760
Report #:	CT-6760-22_24-0709-R0

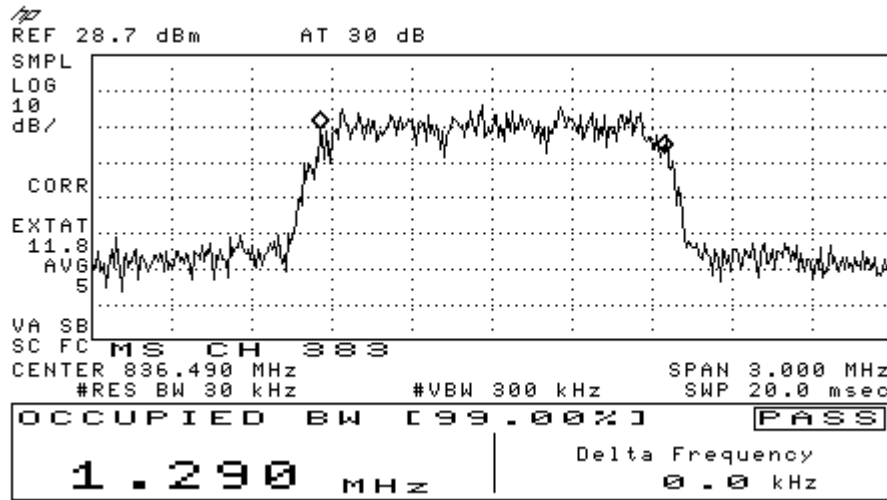


RL

**Figure 8-1 CDMA 800 @ CH 383**

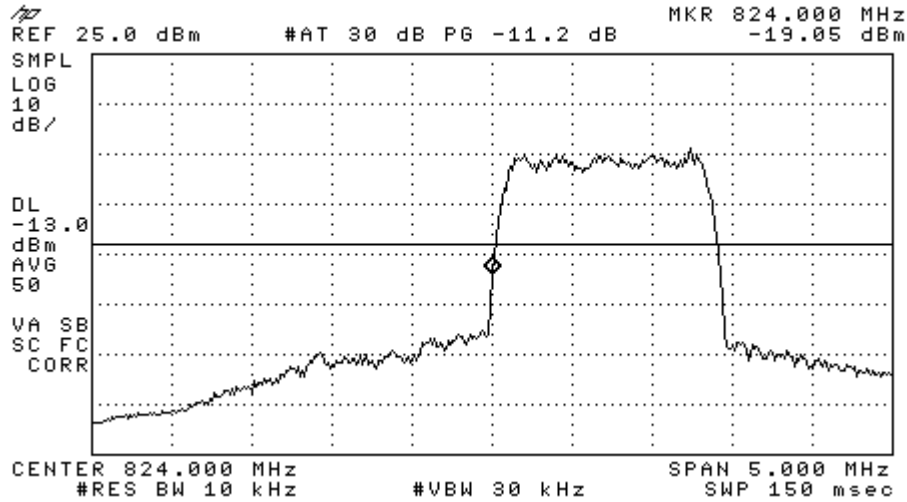

RL

**Figure 8-2 CDMA 800 Lower Band Edge @ CH 1013**

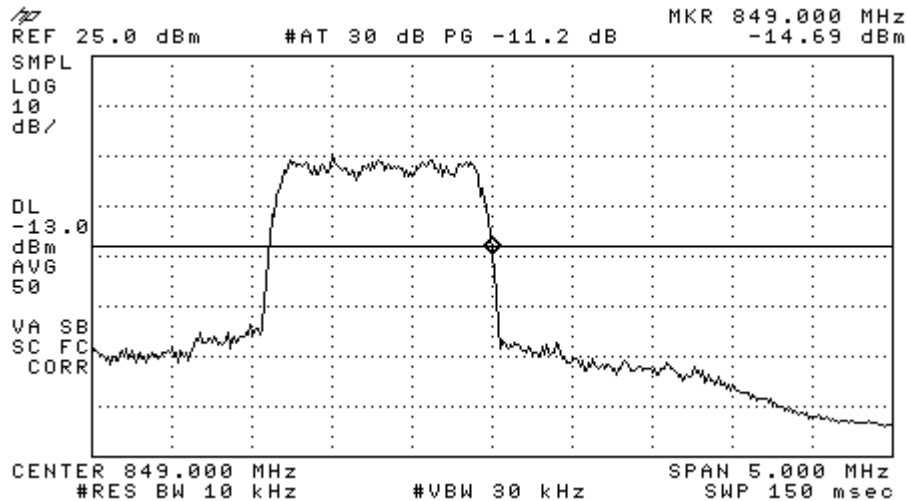


RL

**Figure 8-3 CDMA 800 Lower Band Edge @ CH 777**




Applicant:	Kyocera
FCC ID:	V65SCP-6760
Report #:	CT-6760-22_24-0709-R0

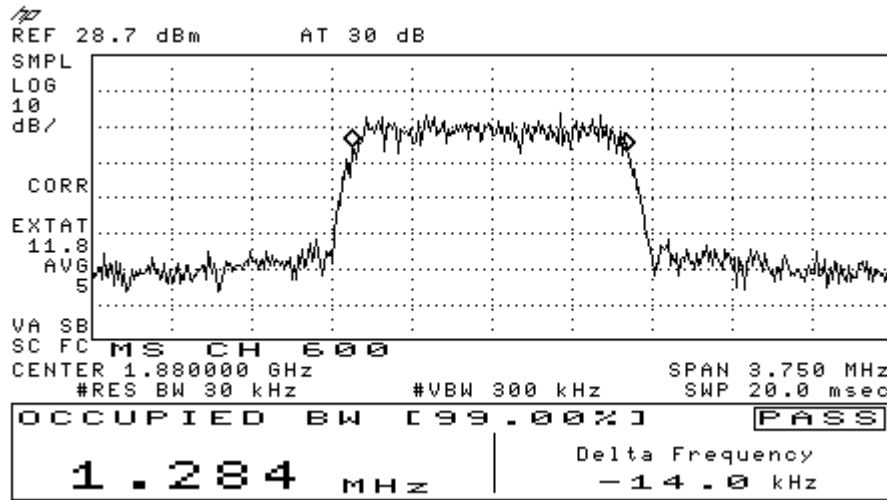


RL

**Figure 8-4 CDMA 1900 @ CH 600**

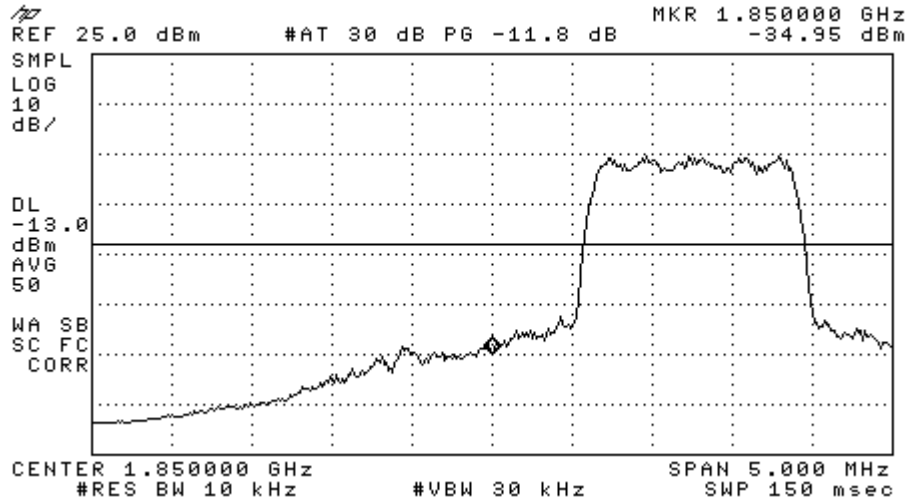

RL

**Figure 8-5 CDMA 1900 Lower Band Edge @ CH 25**

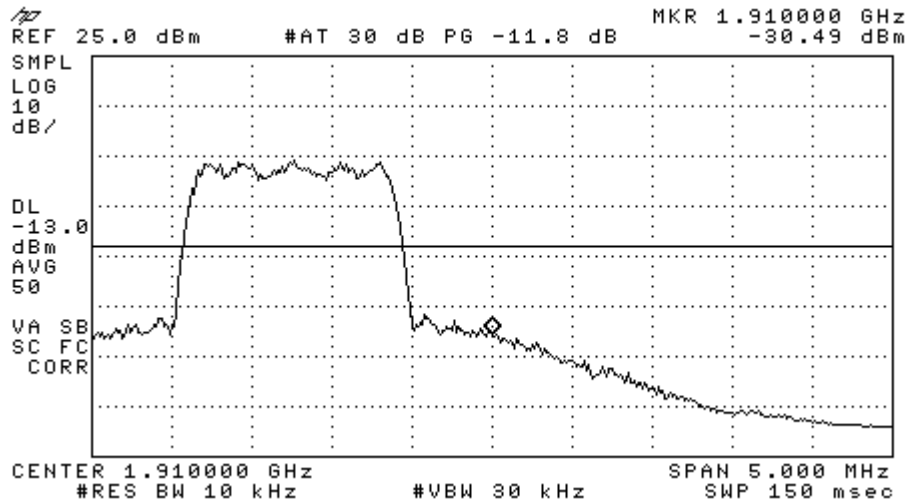

RL

**Figure 8-6 CDMA 1900 Upper Band Edge @ CH 1175**

## 9 SPURIOUS EMISSIONS AT ANTENNA TERMINALS

### 9.1 Test Configuration

**FCC:** § 2.1051, § 22.917(e)(f), § 24.238

**IC:** RSS132 §4.5; RSS133 §6.5

**Measurement Procedures:**

Out of Band: The RF output of the EUT was connected to the input of the spectrum analyzer with sufficient attenuation. The modulating signal was applied accordingly. The frequency spectrum was investigated from the lowest frequency signal generated up to at least the tenth harmonic of the fundamental.

S.A. Setting	RBW	VBW
Spurious Emissions Measurement	1MHz	1MHz


**Limits:** -13dBm

### 9.2 Test Result


Figure	Channel	Plot Description	Result
9-1	1013	CDMA 800 Conducted spurious emissions 9kHz to 10GHz	Pass
9-2	383		Pass
9-3	777		Pass
9-4	25	CDMA 1900 Conducted spurious emissions 9kHz to 20GHz	Pass
9-5	600		Pass
9-6	1175		Pass



Applicant:	Kyocera
FCC ID:	V65SCP-6760
Report #:	CT-6760-22_24-0709-R0

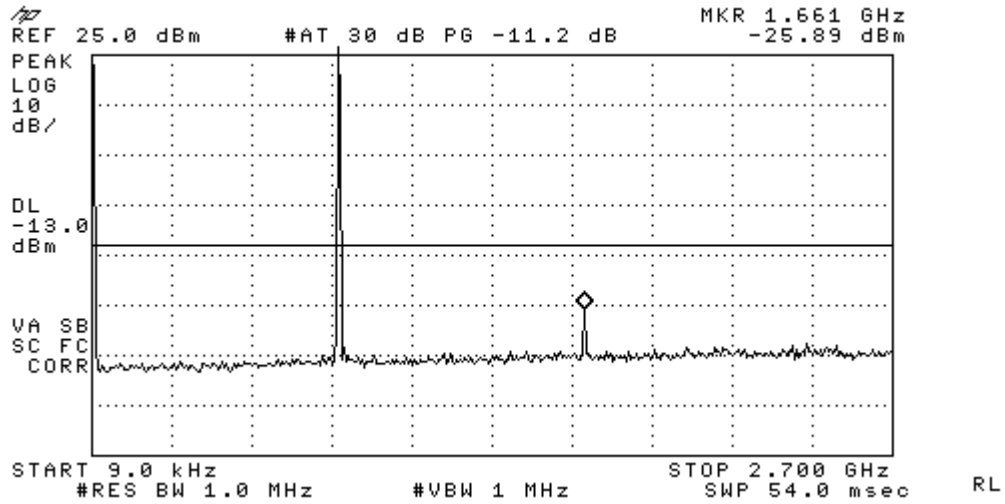


**Figure 9-1a CDMA 800 – Conducted Spurious Emission (CH 1013)**

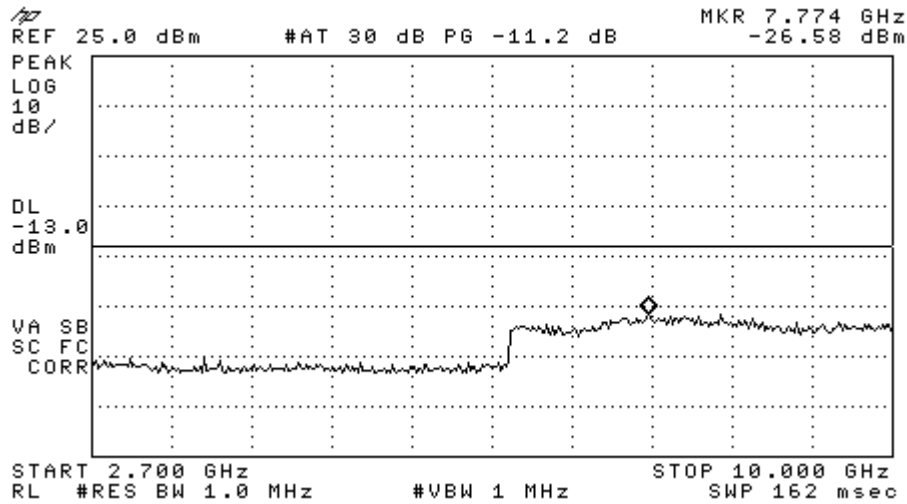


**Figure 9-1b CDMA 800 – Conducted Spurious Emission (CH 1013)**



Applicant:	Kyocera
FCC ID:	V65SCP-6760
Report #:	CT-6760-22_24-0709-R0

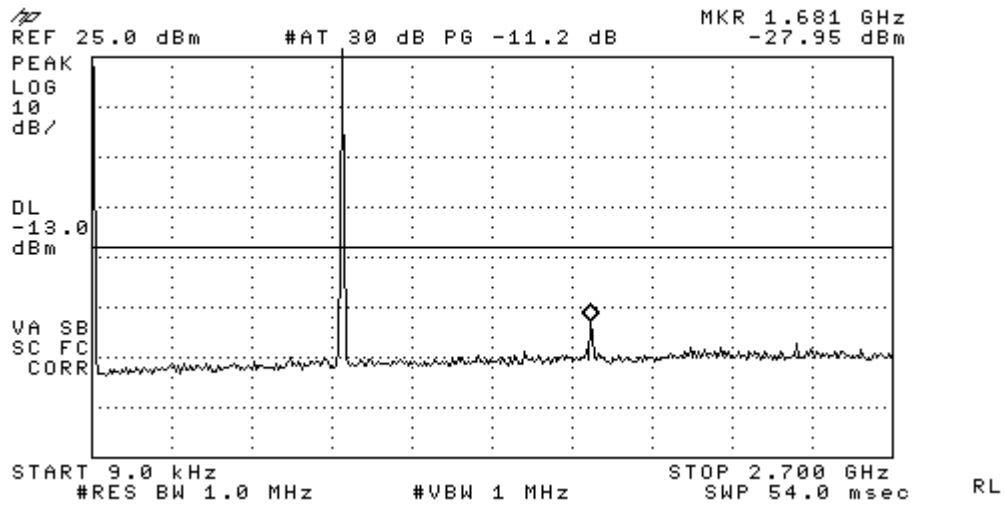


**Figure 9-2a CDMA 800 – Conducted Spurious Emission (CH 383)**

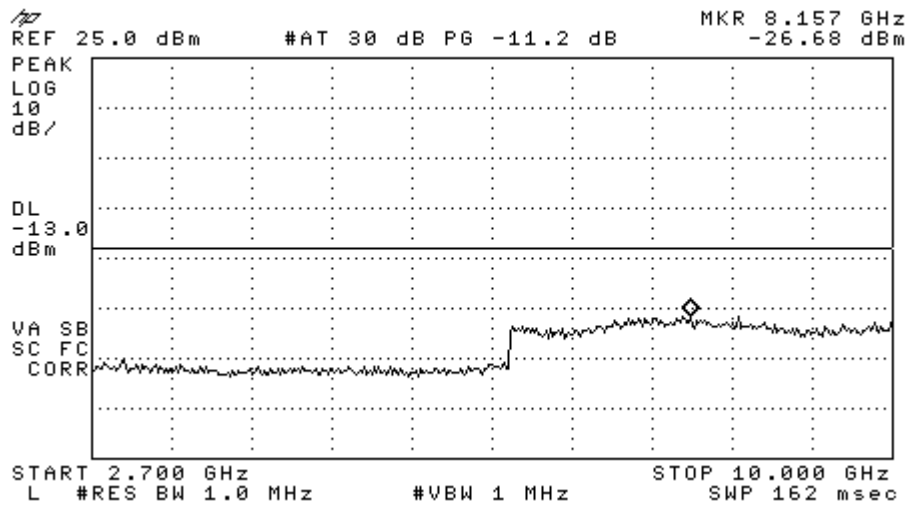


**Figure 9-2b CDMA 800 – Conducted Spurious Emission (CH 383)**



Applicant:	Kyocera
FCC ID:	V65SCP-6760
Report #:	CT-6760-22_24-0709-R0

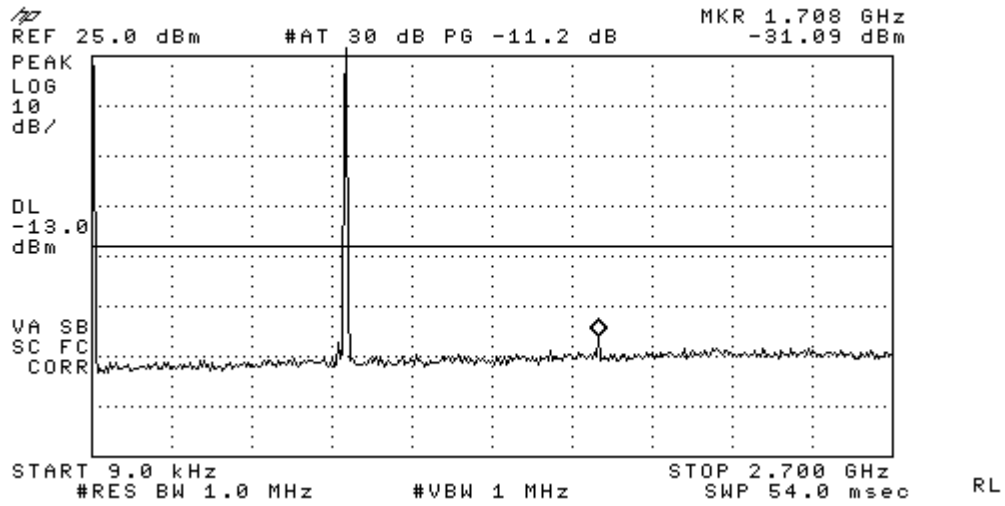


**Figure 9-3a CDMA 800 – Conducted Spurious Emission (CH 777)**

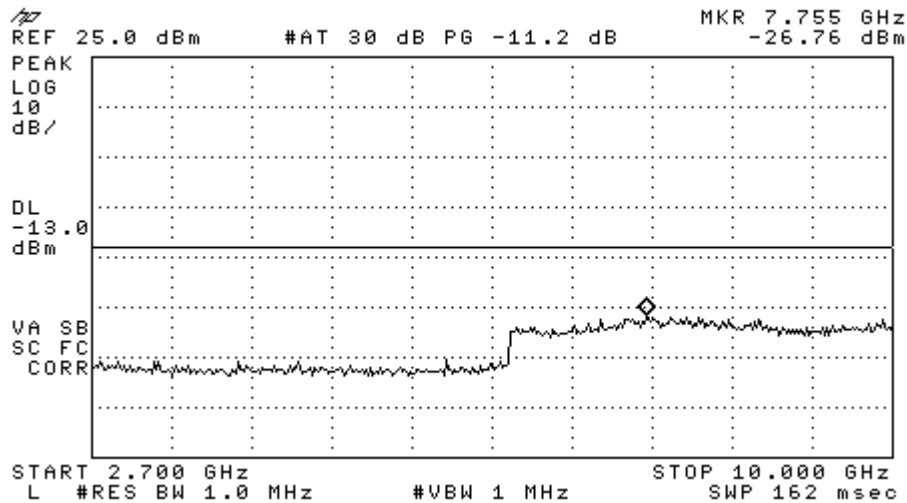


**Figure 9-3b CDMA 800 – Conducted Spurious Emission (CH 777)**



Applicant:	Kyocera
FCC ID:	V65SCP-6760
Report #:	CT-6760-22_24-0709-R0

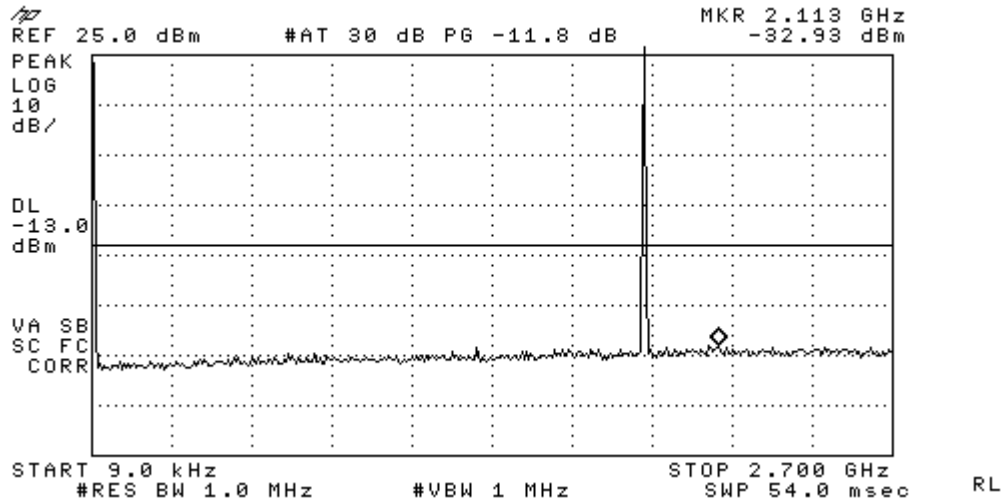

**Figure 9-4a CDMA 1900 - Conducted Spurious Emission (CH 25)**

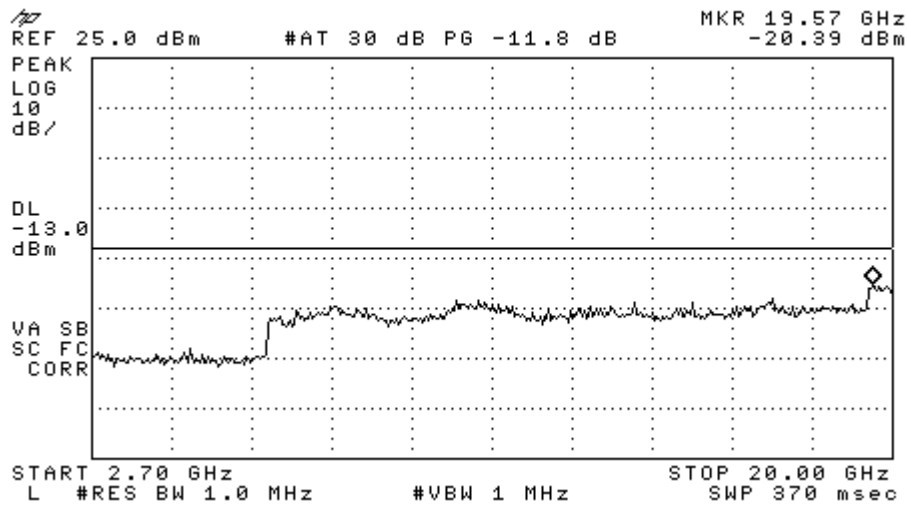


**Figure 9-4b CDMA 1900 - Conducted Spurious Emission (CH 25)**






Applicant:	Kyocera
FCC ID:	V65SCP-6760
Report #:	CT-6760-22_24-0709-R0

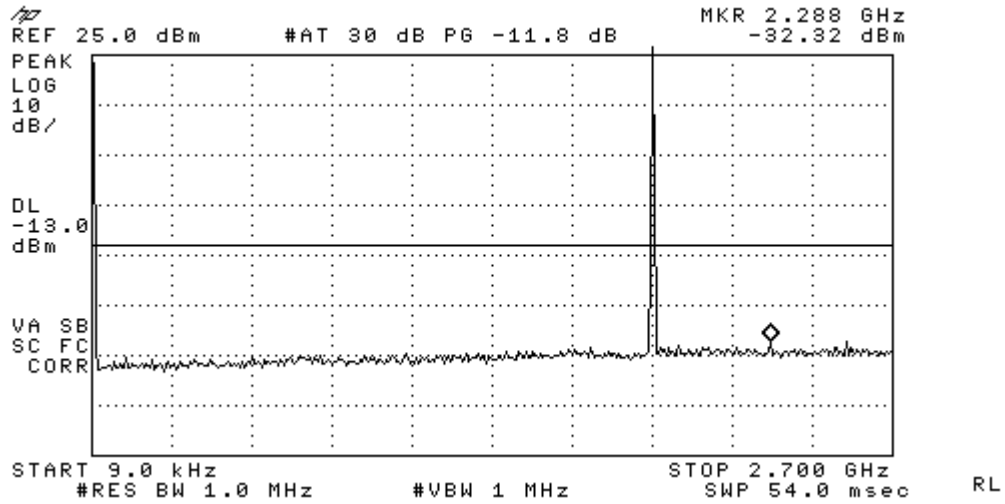


**Figure 9-5a CDMA 1900 - Conducted Spurious Emission (CH 600)**

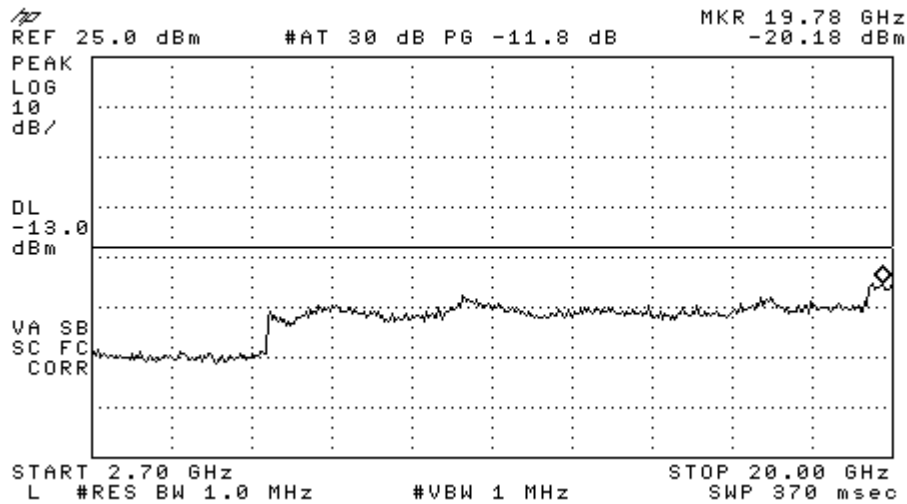


**Figure 9-5b CDMA 1900 - Conducted Spurious Emission (CH 600)**



Applicant:	Kyocera
FCC ID:	V65SCP-6760
Report #:	CT-6760-22_24-0709-R0

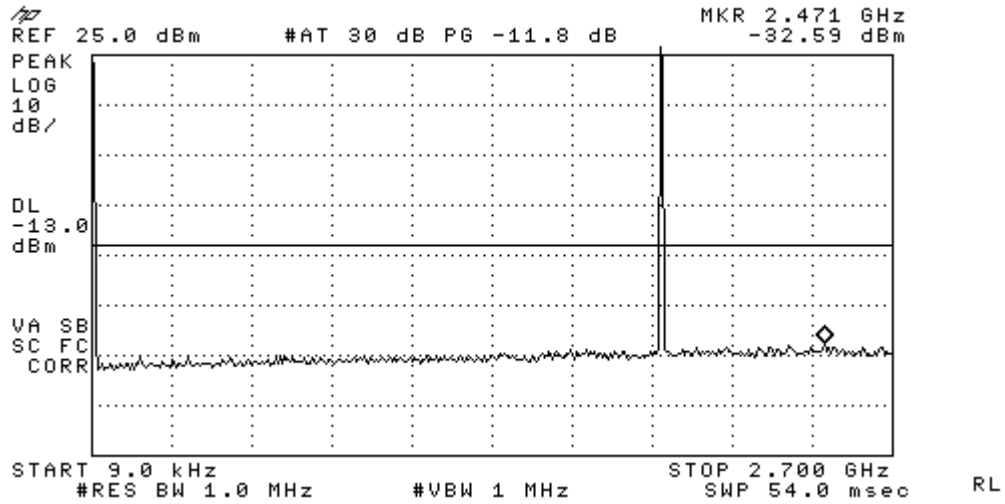

**Figure 9-6a CDMA 1900 - Conducted Spurious Emission (CH 1175)**

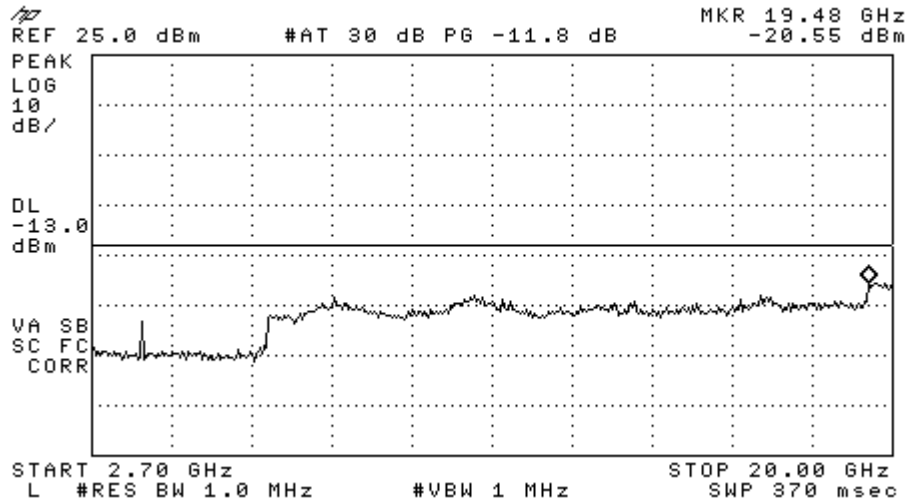

**Figure 9-6b CDMA 1900 - Conducted Spurious Emission (CH 1175)**



Applicant:	Kyocera
FCC ID:	V65SCP-6760
Report #:	CT-6760-22_24-0709-R0

## 10 TRANSMITTER RADIATED SPURIOUS EMISSIONS

### 10.1 Test Configuration and Result

<b>FCC:</b> § 2.1053, § 22.91, § 24.238, §27.53(g)
<b>IC:</b> RSS132 §4.5; RSS133 §6.5
The radiated spurious emission test was performed at Compliance Certification Service. The test report is attached in a separate attachment.

## 11 RECEIVER SPURIOUS EMISSIONS

### 11.1 Receiver Spurious Emissions

<b>FCC:</b> § 15.109
<b>IC:</b> RSS-GEN
The receiver radiated spurious emission test was performed at Compliance Certification Service. The test report is attached in a separate attachment.

## 12 TRANSMITTER RF CARRIER FREQUENCY STABILITY

### 12.1 Test Configuration

**FCC:** § 2.1055, § 22.355, § 24.235, § 27.54

**IC:** RSS132 §4.3; RSS133 §6.3


The EUT was placed in an environmental chamber. The RF output of the EUT was connected to Agilent 8960 Series 10 E5515C. A power supplier was connected as primary voltage supply. Only the mid channel of each frequency band was investigated.

**Limits:**

Tx Frequency	Channel	Limit
836.49 MHz	383	+/- 2.5 ppm (+/- 2091 Hz)
1880 MHz	600	+/- 2.5 ppm (+/-4700 Hz)

## 12.2 Test Result


CDMA 800						
Temperature (°C)	Deviation of Carrier (Hz)			Specification (Hz)		Result
	3.3V (Battery endpoint)	3.7V	4.2V (115%)	Lower limit	Upper limit	
-30		-9.59		-2091	2091	Pass
-20		11.61		-2091	2091	
-10		-8.4		-2091	2091	
0		-10.53		-2091	2091	
10		-13.47		-2091	2091	
20	<b>-7.46</b>	<b>-6.92</b>	<b>-6.93</b>	-2091	2091	
30		-7.47		-2091	2091	
40		-9.65		-2091	2091	
50		-10.68		-2091	2091	
60		-8.05		-2091	2091	

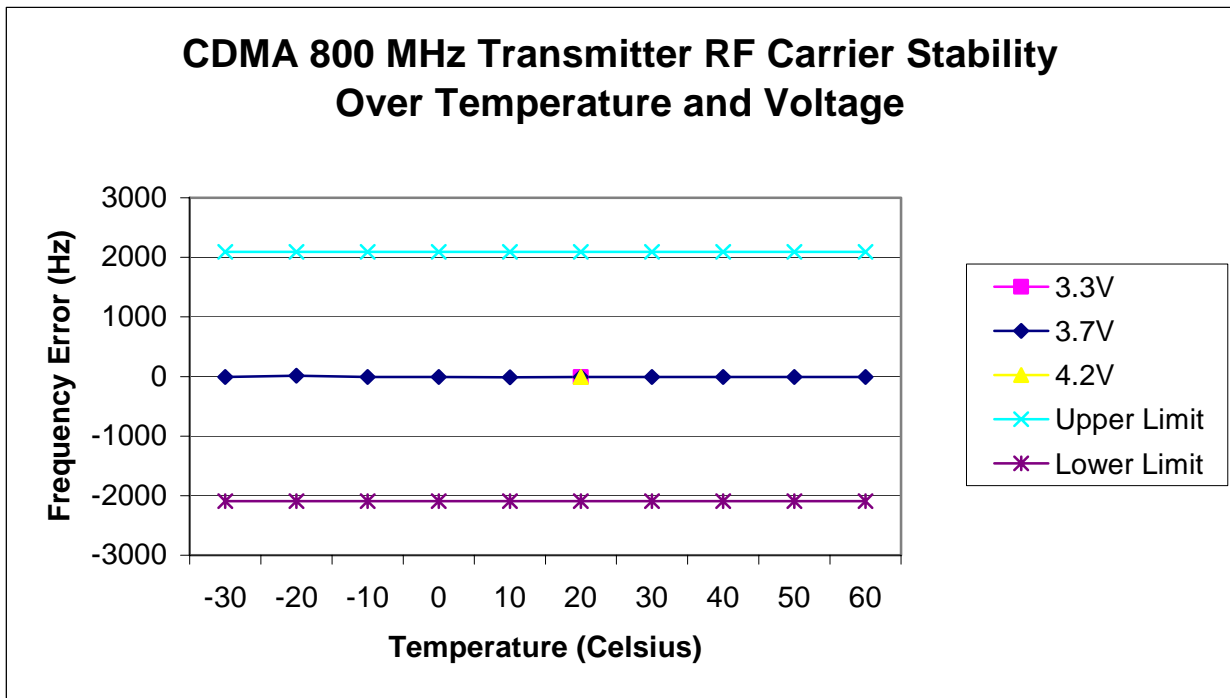



Applicant:	Kyocera
FCC ID:	V65SCP-6760
Report #:	CT-6760-22_24-0709-R0

CDMA 1900						
Temperature (°C)	Deviation of Carrier (Hz)			Specification (Hz)		Result
	3.3V (Battery endpoint)	3.7V	4.2V (115%)	Lower limit	Upper limit	
-30		-10.12		-4700	4700	Pass
-20		-8.96		-4700	4700	
-10		-8.4		-4700	4700	
0		-9.48		-4700	4700	
10		-7.98		-4700	4700	
20	<b>-7.91</b>	<b>-7.2</b>	<b>-8.5</b>	-4700	4700	
30		-8.35		-4700	4700	
40		-8.24		-4700	4700	
50		-10.65		-4700	4700	
60		-10.28		-4700	4700	

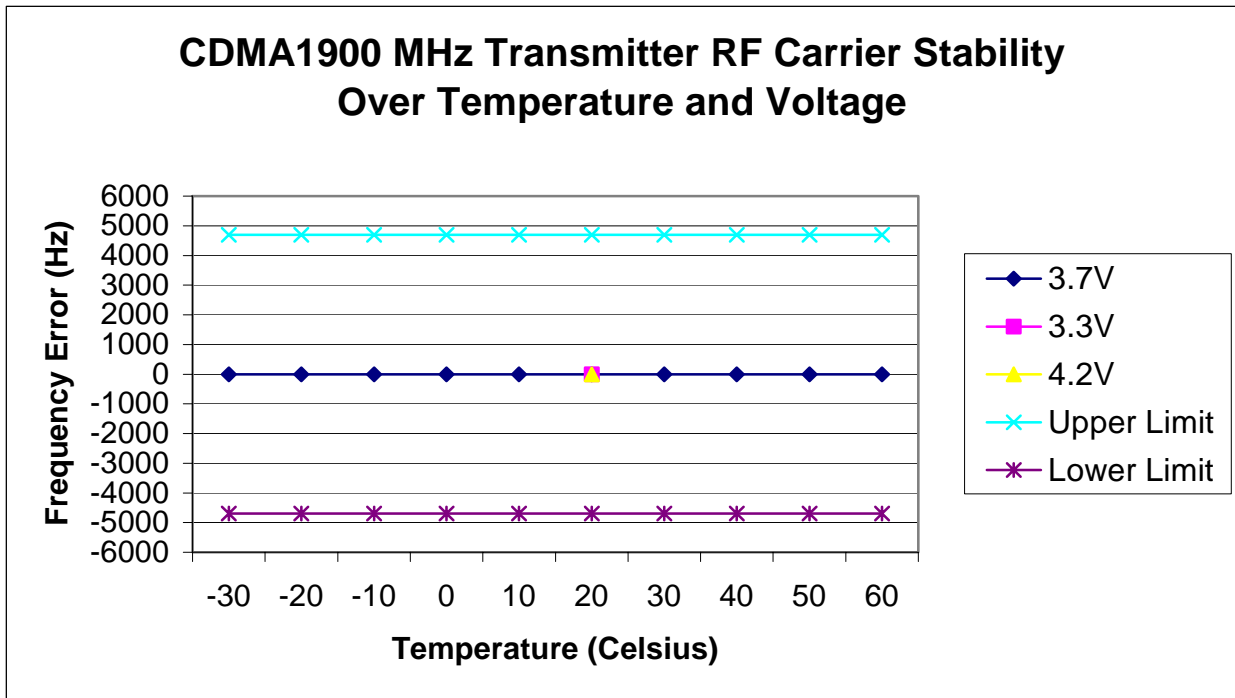

## 13 EXPOSURE OF HUMANS TO RF FIELDS (SAR)

### 13.1 Test Configuration and Result

**FCC: § 2.1093**

**IC: RSS102**

The SAR test report is attached in a separate attachment.

## 14 TEST EQUIPMENT

The test equipment utilized to perform the tests documented in this report has been calibrated in accordance with the manufacturer's recommendations and is traceable to recognized national standards.

Description	Manufacturer	Model No.	Serial No.	Cal Due Date
Power Meter	Giga-tronics	8541C	1831306	07/16/09
Spectrum Analyzer	Hewlett Packard	8593EM	3710A00203	03/04/10
Spectrum Analyzer	Hewlett Packard	8595E	3911A03899	07/19/09
Wireless Communications Test Set	Agilent	8960	US41070147	05/19/10
Temperature Chamber	Test Equity	ZH2-033-033-H/AC	ZZ9622421	04/13/10