

**FCC Part 15C,
Industry Canada
Displaydata
Certification Report**

for


**Electronic Shelf Labels
Model: DD125X (“Chroma 125”)**

FCC ID: VC7120-0213

IC ID: 8910A-1200213



Project Engineer: R. Pennell

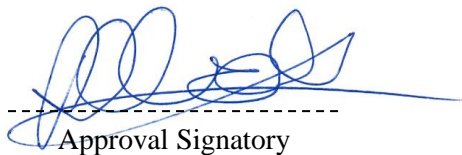

Approval Signatory

Approved signatories: J. A. Jones D. Tiroke A. Coombes

The above named are authorised Eurofins Hursley signatories.

**UKAS Accredited
EU Notified Body
FCC & VCCI Registered
KC Lab ID: EU0184**

Contents

1.0	DECLARATION	3
1.1	FCC PART 15C STATEMENT AND INDUSTRY CANADA (IC) STATEMENT	3
1.2	RELATED SUBMITTAL(S) GRANTS	3
1.3	EUT MANUFACTURER	3
2.0	EUT DESCRIPTION	4
2.1	PRODUCT INFORMATION	4
2.2	PRODUCT OPERATION	4
2.3	SUPPORT EQUIPMENT	4
2.4	EXERCISER PROGRAM	4
3.0	MEASUREMENT PROCEDURE AND INSTRUMENTATION	5
3.1	EMI SITE ADDRESS & TEST DATE	5
3.2	GENERAL OPERATING CONDITIONS	5
3.3	UNCERTAINTY	5
3.4	ENVIRONMENTAL AMBIENT	6
3.5	RADIATED EMISSIONS	7
4.0	TEST DATA	8
4.1	RADIATED EMISSIONS	8
4.1.1	<i>Radiated Emissions (Transmitting); Chroma 27L</i>	8
	THE TABLE FOR TRANSMITTED FREQUENCIES SHOWS TEST RESULTS MEASURED WITH 100KBPS DATA RATES, IN LANDSCAPE ORIENTATION.	8
4.1.2	<i>Radiated Emissions (Idle);</i>	9
4.2	OCCUPIED BANDWIDTH.....	10
4.3	OCCUPIED BANDWIDTH (IC)	10
4.4	OCCUPIED BANDWIDTH (FCC).....	10
4.5	OCCUPIED BANDWIDTH (AS/NZ).....	10
5.0	TEST PLOTS	11
5.1	99% BANDWIDTH PLOTS (IC)	11
5.2	20DB BANDWIDTH PLOT (FCC)	13
5.3	99% BANDWIDTH PLOTS (AS/NZ 4268)	15
5.4	RADIATED EMISSION PLOT, 30 TO 1000 MHZ (TX);- BOTTOM (WORST CASE)	17
5.5	RADIATED EMISSION PLOT, 30 TO 1000 MHZ (IDLE);- BOTTOM (WORST CASE)	18
5.6	RADIATED EMISSIONS PLOT, 1.0 TO 10.0 GHZ (TX); - BOTTOM (WORST CASE)	19
5.7	RADIATED EMISSIONS PLOT, 1.0 TO 10.0 GHZ (IDLE)	20
6.0	PHOTO LOG	21
7.0	FCC DETAILS	24

Document History:

Issue#1: was withdrawn and replaced by Issue#2: updated with editorial correction.

1.0 DECLARATION

1.1 FCC Part 15C Statement and Industry Canada (IC) Statement

The Equipment Under Test (EUT), as described and reported within this document, complies with ISED RSS-Gen Issue 4 November 2014 and IC RSS-210 Issue 9 and the parts 15.109, 15.209 and 15.249 of the CFR 47:2015 FCC rules. The EUT operates at frequencies of 902.5 to 927.5 MHz and complies with part 15C emission requirements.

For emissions outside the 902 - 928MHz band the EUT, as described and reported within this document, complies with the parts 15.207 and 15.209 of the CFR 47 FCC rules in accordance with ANSI C63.10:2013 and ANSI C63.4:2014.

1.2 Related Submittal(s) Grants

This is an application for certification of a DD27X (transmitting at 902.5 to 927.5 MHz), described in this report.

The sections of FCC Part 15 that apply to the EUT are:

- 15.209 General requirements
- 15.249 Operation within the band 902 to 928 MHz
- 15.109 applied to the EUT in receive mode.

Note: The EUT in receiver mode complies with part 15B of the FCC rules for unintentional radiators.

1.3 EUT Manufacturer

Trade name:	Displaydata Limited
Company name:	Displaydata Limited
Company address:	Greenwood House London Road Bracknell Berkshire RG12 2AA United Kingdom
Manufacturing address:	As above.
Company representative:	Mr Oli Bailey E-mail - oli.bailey@Displaydata.com

2.0 EUT DESCRIPTION

2.1 Product Information

EUT:	Electronic Shelf Label
Model:	Model: DD125X (“Chroma 125”)
Serial number:	DD00001253C
Sample build:	Production
FCC ID:	VC7120-0213
IC ID:	8910A-1200213
Power supply:	Battery
Firmware version:	Emissions: 1.0.2.0 Immunity: 1.0.2.0
Lowest Clock frequency:	32.768 kHz
Highest Clock frequency:	24.000 MHz

2.2 Product Operation

The EUT is part of a system for electronic shelf labels to be used within retail outlets such as shops and super markets. The EUT is an electronic shelf edge label that displays product and price information. The EUT is always installed in a horizontal (landscape) position. The EUT contains a radio for receiving and transmitting data to a base unit known as a Dynamic Communicator. The EUT transmits infrequently, typically once a day for a few milliseconds.

2.3 Support Equipment

None to sample submitted.

2.4 Exerciser Program

The EUT was set to transmit continuously at the bottom, middle and top of the 902 to 928MHz radio operating range, this being 902.5, 913.5 and 927.5MHz respectively. The laptop, via the Dynamic Communicator, was used to set the operating frequency of the EUT. Once transmitting the EUT was tested standalone in the semi-anechoic chamber.

All measurements were performed with the EUT operating at 100kbps data rate.

All the tests were performed with the EUT powered with new batteries.

3.0 MEASUREMENT PROCEDURE AND INSTRUMENTATION

3.1 EMI Site Address & Test Date

EMI Company Offices Eurofins Hursley
Trafalgar House, Trafalgar Close, Chandlers Ford, Hampshire

EMI Measurement Site Eurofins Hursley
Hursley Park, Winchester; FCC Registered
UK Designation number: UK0006
Canada Registration Number: 7104A-1

Test Date 22nd to 23rd May and 17th July 2019

Eurofins Hursley References: 1130

3.2 General Operating Conditions

Testing was performed according to the procedures in accordance with ANSI C63.4:2014 and 63.10 2013. Final radiated testing was performed at a EUT to antenna distance of three metres. Instrumentation, including receiver and spectrum analyser bandwidth, comply with the requirements of ANSI C63.2:1996.

3.3 Uncertainty

The following measurement uncertainties have been calculated in accordance with ANSI C63.23, CISPR 16-4-2 and in line with other available guidance to provide a confidence level of 95% (coverage factor, $k = 2$) in the reported measurements:

For radiated emissions below 1 GHz:

3 m measurement distance	30 MHz – 200 MHz	200 MHz – 1 GHz
Vertical polarisation	± 3.7 dB	± 5.1 dB
Horizontal polarisation	± 3.9 dB	± 3.8 dB

For radiated emissions below 1 GHz:

10 m measurement distance	30 MHz – 200 MHz	200 MHz – 1 GHz
Vertical polarisation	± 4.4 dB	± 4.8 dB
Horizontal polarisation	± 4.5dB	± 4.6 dB

For radiated emissions above 1 GHz:

3 m measurement distance	1 GHz – 6 GHz	6 GHz - 18 GHz	18 GHz – 40 GHz
Both polarisations	± 4.5 dB	± 4.4 dB	± 4.3 dB

Band Edge tests	
Conducted (absolute measurements)	± 2.3 dB
Close coupled radiated (relative measurements)	± 0.3 dB

Occupied bandwidth tests	
RBW setting ≤ 100 kHz	± 0.62 %
RBW setting > 100 kHz	± 1.66 %

3.4 Environmental Ambient

Test Type	Temperature	Humidity	Atmospheric Pressure
Radiated	23.5 degrees Celsius	43 % relative	998 millibars

3.5 Radiated Emissions

Initial Scan

A radiated profile scan was taken at a three metre distance on eight azimuths of the system under test in both vertical and horizontal polarities of the antenna in a semi-anechoic chamber. Instrumentation used in the chamber as below:

#ID	CP	Manufacturer	Type	Serial No	Description	Calibration due date
033	1	HP	8593EM	3726U00203	Spectrum analyser	04/12/2019
050	2	HP	8447D	1937A02341	Pre-amplifier (30-1000MHz)	06/10/2019
250	1	HP	8449B	3008A01077	Pre-amplifier (1.0-26.5GHz)	18/09/2019
289	1	Rohde & Schwarz	ESCI 7	100765	CISPR 7GHz Receiver	10/09/2019
466	3	Schwarzbeck	BBHA 9120 571	571	1-10GHz Horn	28/02/2022
651	1	Rohde & Schwarz	ESIB 40 no.2	100262	40GHz receiver	26/07/2019
651	1	Rohde & Schwarz	ESIB 40 no.2	100262	40GHz receiver	26/07/2019
750	1	Global	CISPR16 chamber	1	11 x 7 x 6.2m	10/12/2019
762	3	Schwarzbeck	VULB9162	129	30-7000MHz	07/04/2020
762a	3	Schwarzbeck	DGA 9552N	0	6dB attenuator for #762	07/04/2020

The data obtained from the profile scan was used as a guide for the final measurements. Profiles were measured of the EUT in landscape orientation at 100kbps data rates.

Final Measurements

The system under test was then measured at three metres in the Open Area Test site (OATS) using a receiver. The data obtained from the chamber profile-scan was used to guide the test engineer. Above 30 MHz, each emission from the transmitter was maximised by revolving the system on the turntable and moving the antennae in height and azimuth. The worst-case data is presented in this report. Test instrumentation used was as follows:

#ID	CP	Manufacturer	Type	Serial No	Description	Ext Calibration
033	1	HP	8593EM	3726U00203	Spectrum analyser	04/12/2019
050	2	HP	8447D	1937A02341	Pre-amplifier (30-1000MHz)	06/10/2019
250	1	HP	8449B	3008A01077	Pre-amplifier (1.0-26.5GHz)	18/09/2019
289	1	Rohde & Schwarz	ESCI 7	100765	CISPR 7GHz Receiver	10/09/2019
466	3	Schwarzbeck	BBHA 9120 571	571	1-10GHz Horn	28/02/2022
651	1	Rohde & Schwarz	ESIB 40 no.2	100262	40GHz receiver	26/07/2019
651	1	Rohde & Schwarz	ESIB 40 no.2	100262	40GHz receiver	26/07/2019
750	1	Global	CISPR16 chamber	1	11 x 7 x 6.2m	10/12/2019
762	3	Schwarzbeck	VULB9162	129	30-7000MHz	07/04/2020
762a	3	Schwarzbeck	DGA 9552N	0	6dB attenuator for #762	07/04/2020

CP = Interval period [year] prescribed for external calibrations

Note: 'Calibration due date' means that the instrument is certified with a UKAS or traceable calibration certificate.
'Internal' means internally calibrated using Eurofins Hursley procedures

4.0 TEST DATA

4.1 Radiated Emissions

A search was made of the frequency spectrum from 30 MHz to 10 GHz and the measurements reported are the highest emissions relative to the:

‘FCC CFR 47 Section 15.209 and 15.249 Limits’ at a measuring distance of three metres.

‘ISED RSS-210 issue 8 Annex 2 section 2.9’

Testing was performed with the EUT at the top, bottom and middle transmitter operating frequencies. Below 1 GHz a quasi-peak detector was used (bandwidth 120 kHz), above 1 GHz a peak and average detector was used (bandwidth 1 MHz). The worst-case results from all tests are presented here.

4.1.1 Radiated Emissions (Transmitting); Chroma 27L

RESULTS - 30 MHz to 1000 MHz

Frequency MHz	Receiver amplitude dB μ V	Antenna factor dB	Cable Loss dB	Actual quasi-peak value @ 3m dB μ V/m	Specified limit @ 3m dB μ V/m	Data rate kbps	Channel B,M,T	Orientation Port / Land
901.9500	2.8	21.9	5.0	29.7	46.0	100	B	Landscape
901.9500	11.3	21.9	5.0	38.2	46.0	100	B	Portrait
902.0000	2.8	21.9	5.0	29.7	94.0	100	B	Landscape
902.0000	11.3	21.9	5.0	38.2	94.0	100	B	Portrait
902.5000*	60.2	21.9	5.0	87.1	94.0	100	B	Landscape
902.5000*	60.2	21.9	5.0	87.1	94.0	100	B	Portrait
913.5000*	59.1	21.9	5.0	86.0	94.0	100	M	Landscape
913.5000*	58.8	21.9	5.0	85.7	94.0	100	M	Portrait
927.5000*	56.6	22.0	5.1	83.7	94.0	100	T	Landscape
927.5000*	55.7	22.0	5.1	82.8	94.0	100	T	Portrait
928.0000	5.6	22.0	5.1	32.7	94.0	100	T	Landscape
928.0000	5.2	22.0	5.1	32.3	94.0	100	T	Portrait
928.0500	5.2	22.0	5.1	32.3	46.0	100	T	Landscape
928.0500	4.7	22.0	5.1	31.8	46.0	100	T	Portrait

*Transmitter frequency

Uncertainty of measurements: ± 4.2 dB μ V for a 95% confidence level.

The table for transmitted frequencies shows test results measured with 100kbps data rates, in landscape orientation.

PEAK RESULTS - 1.0 GHz to 10.0 GHz

Frequency MHz	Receiver amplitude dB μ V	Antenna factor dB	Cable loss dB	Pre-amp gain dB	Actual Peak Value @ 3m dB μ V/m	Specified Peak limit @ 3m dB μ V/m	Data Rate Kbps	Channel B,M,T	Orientation Port / Land
2707.50	48.0	33.7	6.1	38.6	49.2	74	100	B	Landscape
2707.50	47.5	33.7	6.1	38.6	48.7	74	100	B	Portrait
2740.48	45.7	33.7	6.1	38.6	46.9	74	100	M	Landscape
2740.60	45.3	33.7	6.1	38.6	46.5	74	100	M	Portrait
No emissions were within 20dB of the limit.									T Landscape
No emissions were within 20dB of the limit.									T Portrait

AVERAGE RESULTS - 1.0 GHz to 10.0 GHz

Frequency MHz	Receiver amplitude dB μ V	Antenna factor dB	Cable loss dB	Pre-amp gain dB	Actual Average Value @ 3m dB μ V/m	Specified Average limit @ 3m dB μ V/m	Data Rate Kbps	Channel B,M,T	Orientation Port / Land
2707.50	45.3	33.7	6.1	38.6	46.5	54	100	B	Landscape
2707.50	44.7	33.7	6.1	38.6	45.9	54	100	B	Portrait
2740.48	41.6	33.7	6.1	38.6	42.8	54	100	M	Landscape
2740.60	40.8	33.7	6.1	38.6	42.0	54	100	M	Portrait
No emissions were within 20dB of the limit.									T Landscape
No emissions were within 20dB of the limit.									T Portrait

4.1.2 Radiated Emissions (Idle);

No emissions were within 20dB of the limit.

Procedure: In accordance with ANSI C63.4:2014

Measurements below 1.0 GHz performed with a quasi-peak detector. Measurements above 1.0 GHz performed with an average and peak detector.

The tables above 1GHz show the test results for the data rate with the highest emission at 100kbps in landscape orientation. The emissions are for the worst case channel

TEST ENGINEER: Richard Pennell

4.2 Occupied Bandwidth

Test instrumentation used was as follows:

#ID	CP	Manufacturer	Type	Serial No	Description	Calibration due date
552	1	Rohde & Schwarz	ESCI7	1166595007	7GHz Receiver	29/06/2020

4.3 Occupied Bandwidth (IC)

RSS-GEN Section 6.6

The output from the measuring antenna was fed into the input of the ESCI7 spectrum analyser/receiver. The bandwidth of the transmitter was measured with an ESCI7 analyser set to 99% Occupied Bandwidth with a sampling detector on max hold. The resolution bandwidth, span and video bandwidth are indicated on the occupied bandwidth plot (modulated) included with this report.

In TX mode with a 100kbps data rate the bandwidth of the modulated transmitter signal was measured.

4.4 Occupied Bandwidth (FCC)

FCC 15.215 (c) / Ansi C63.10 Section 6.9

The output from the measuring antenna was fed into the input of the ESCI7 spectrum analyser/receiver. The bandwidth of the transmitter was measured 20dB down either side of the peak. The ESCI7 analyser was set to sampling detector on max hold. The resolution bandwidth, span and video bandwidth are indicated on the occupied bandwidth plot (modulated) included with this report.

In TX mode with a 100kbps data rate the bandwidth of the modulated transmitter signal was measured.

4.5 Occupied Bandwidth (As/Nz)

AS/NZ 4268 Section 8.3.2

The output from the measuring antenna was fed into the input of the ESCI7 spectrum analyser/receiver. The bandwidth of the transmitter was measured with an ESCI7 analyser set to 99% Occupied Bandwidth with a sampling detector on max hold. The resolution bandwidth, span and video bandwidth are indicated on the occupied bandwidth plot (modulated) included with this report.


In TX mode with a 100kbps data rate the bandwidth of the modulated transmitter signal was measured.

TEST ENGINEER: Richard Pennell

5.0 TEST PLOTS


5.1 99% Bandwidth Plots (IC)

(902.5MHz - Bottom) 99% bandwidth measured as 182kHz

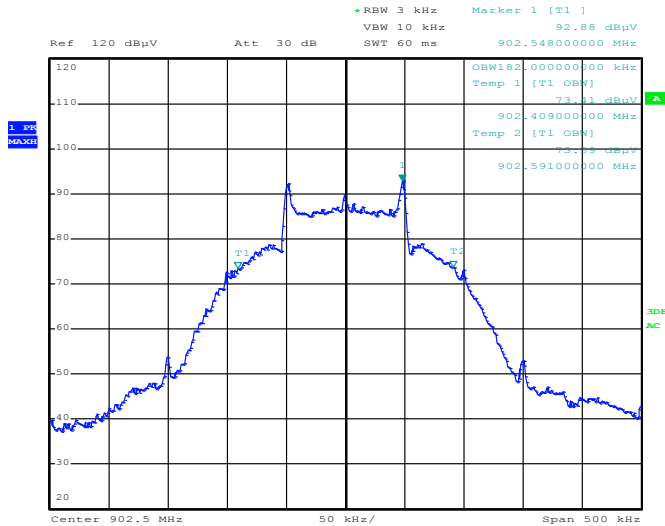


Date: 7.MAR.2003 00:04:20

(913.5MHz - Middle) 99% bandwidth measured as 179kHz

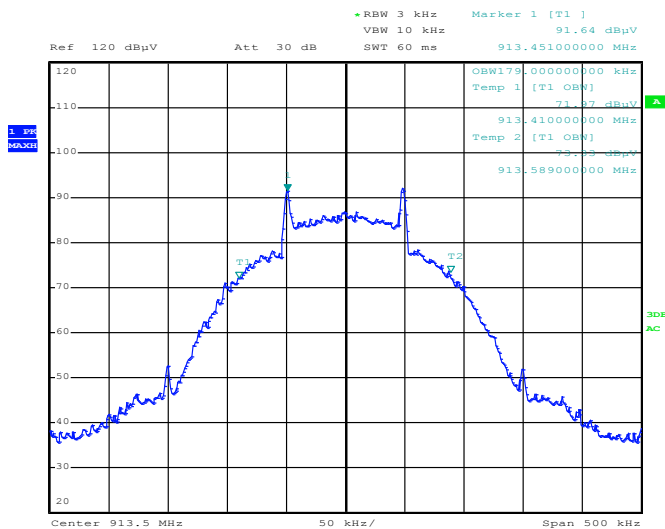

Date: 7.MAR.2003 00:11:35


(927.5MHz -Top) 99% bandwidth measured as 180kHz

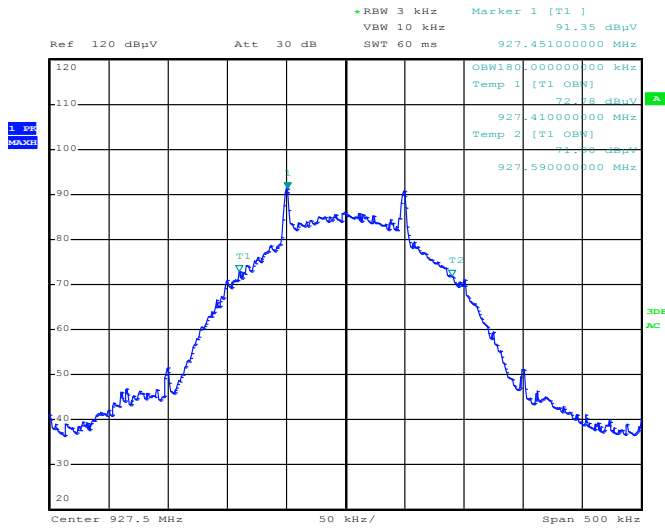

Date: 7.MAR.2003 00:16:30


5.2 20dB Bandwidth Plot (FCC)

(902.5MHz - Bottom) 20dB bandwidth measured as 181kHz

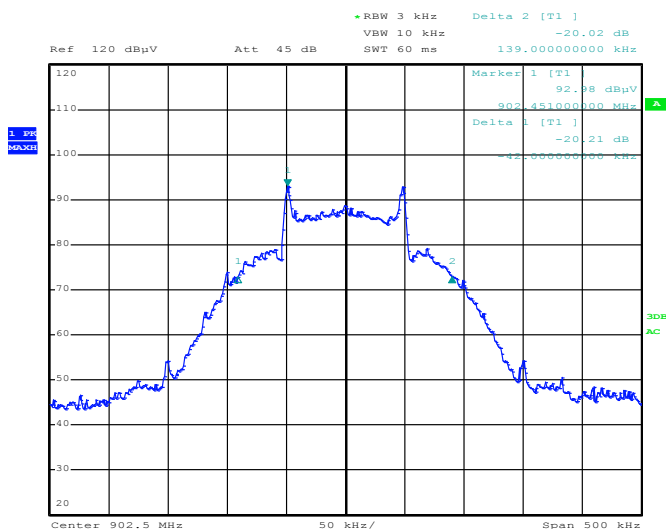


Date: 7.MAR.2003 00:05:41

(913.5MHz - Middle) 20dB bandwidth measured as 182kHz

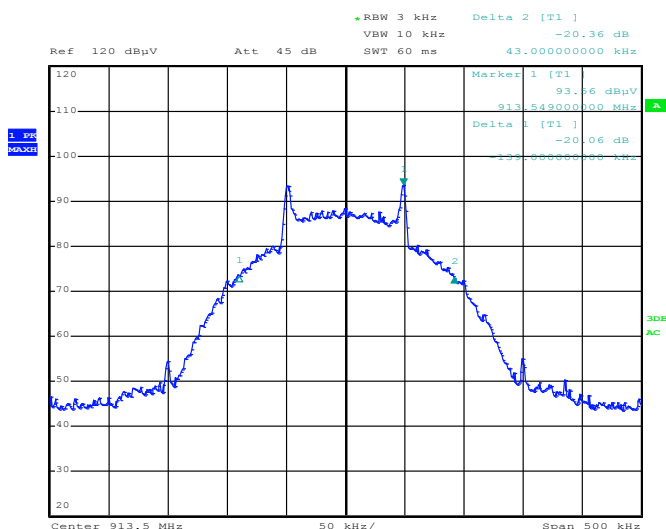

Date: 7.MAR.2003 00:28:00


(927.5MHz -Top) 20dB bandwidth measured as 183kHz

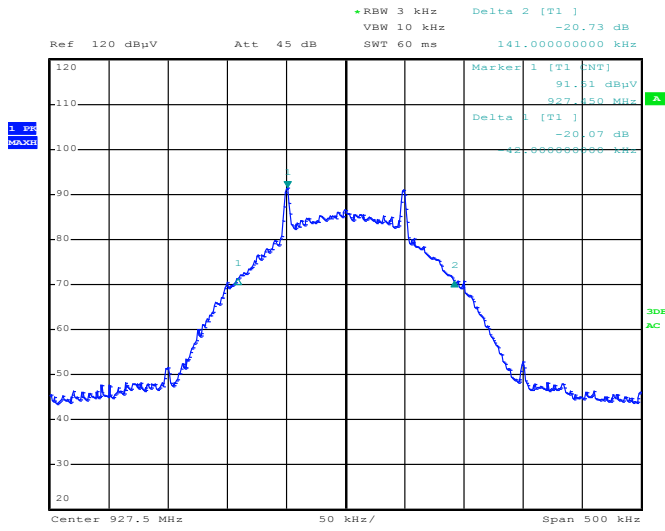

Date: 7.MAR.2003 00:15:41


5.3 99% Bandwidth Plots (AS/NZ 4268)

(902.5MHz - Bottom) 99% bandwidth measured as 179kHz

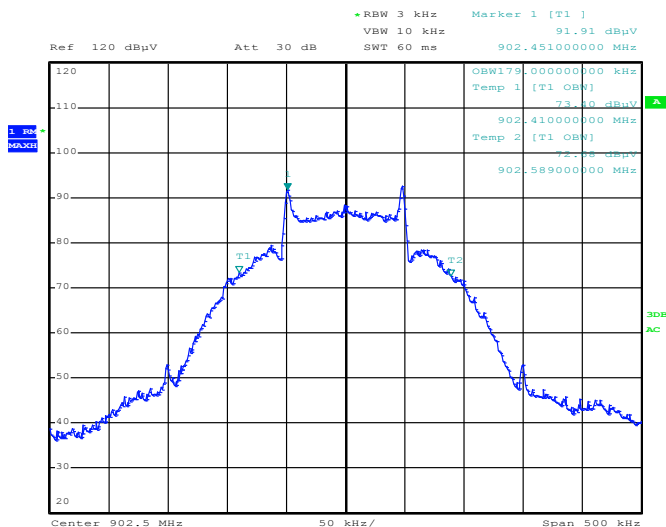


Date: 7.MAR.2003 00:07:58

(913.5MHz - Middle) 99% bandwidth measured as 177kHz

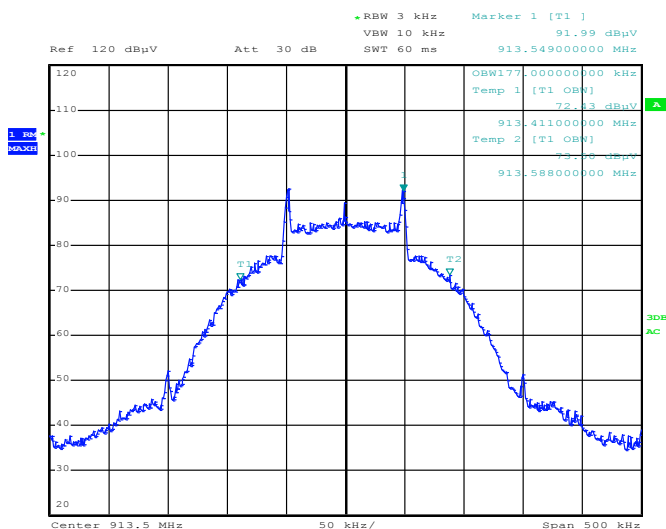


Date: 7.MAR.2003 00:10:47

(927.5MHz -Top) 99% bandwidth measured as 179kHz

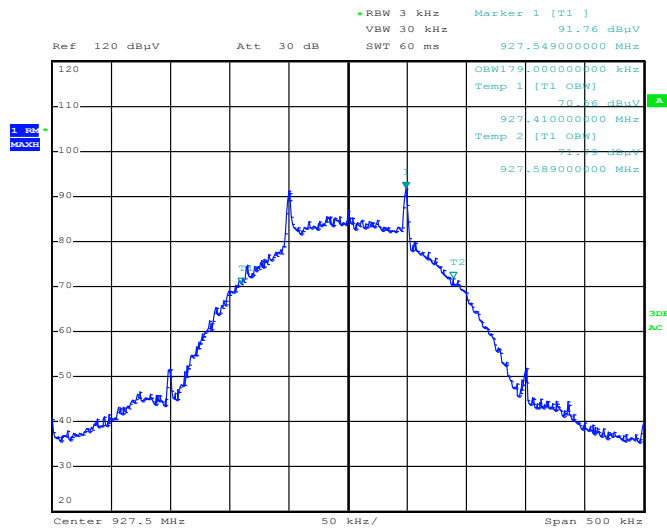


Date: 7.MAR.2003 00:17:29


5.4 Radiated Emission Plot, 30 to 1000 MHz (TX);- Bottom (worst case)

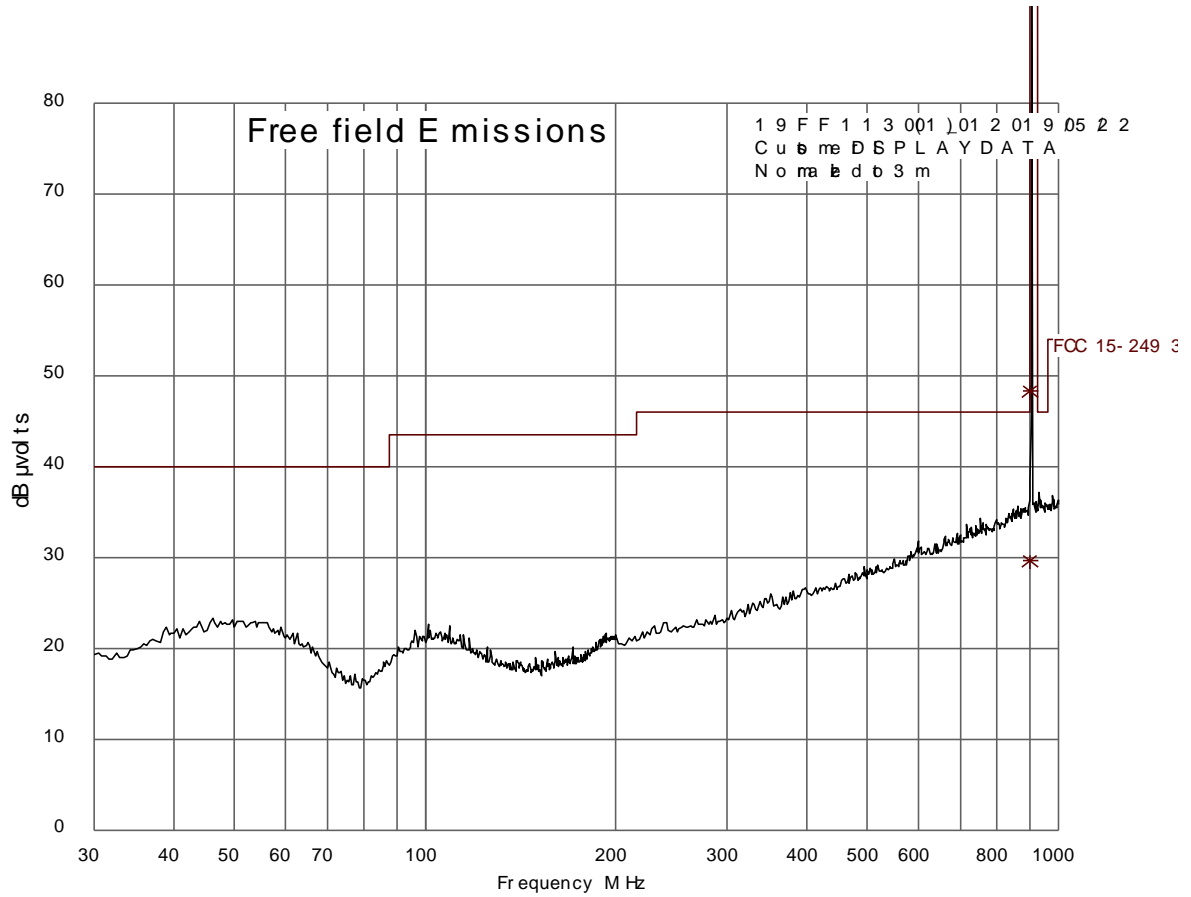


5.5 Radiated Emission Plot, 30 to 1000 MHz (Idle);- Bottom (worst case)

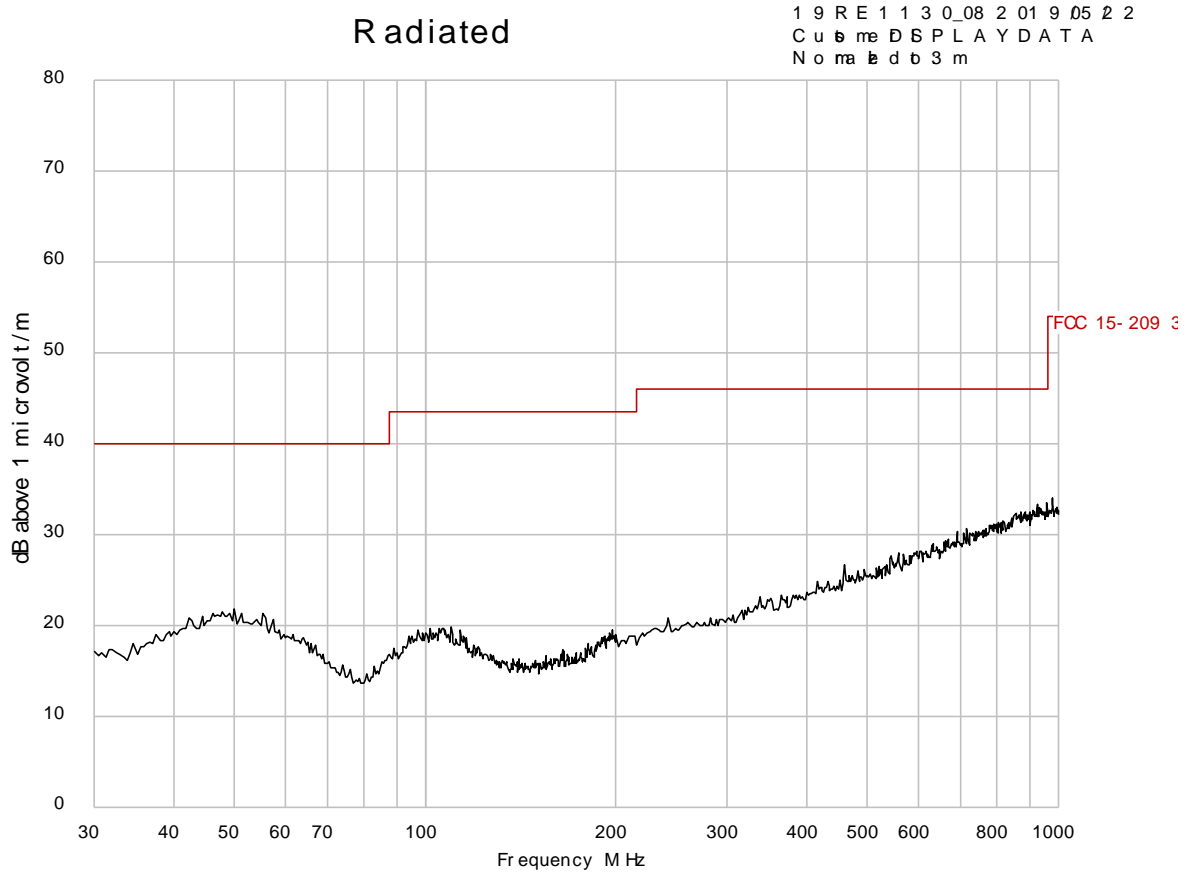

5.6 Radiated Emissions Plot, 1.0 to 10.0 GHz (TX); – Bottom (worst case)

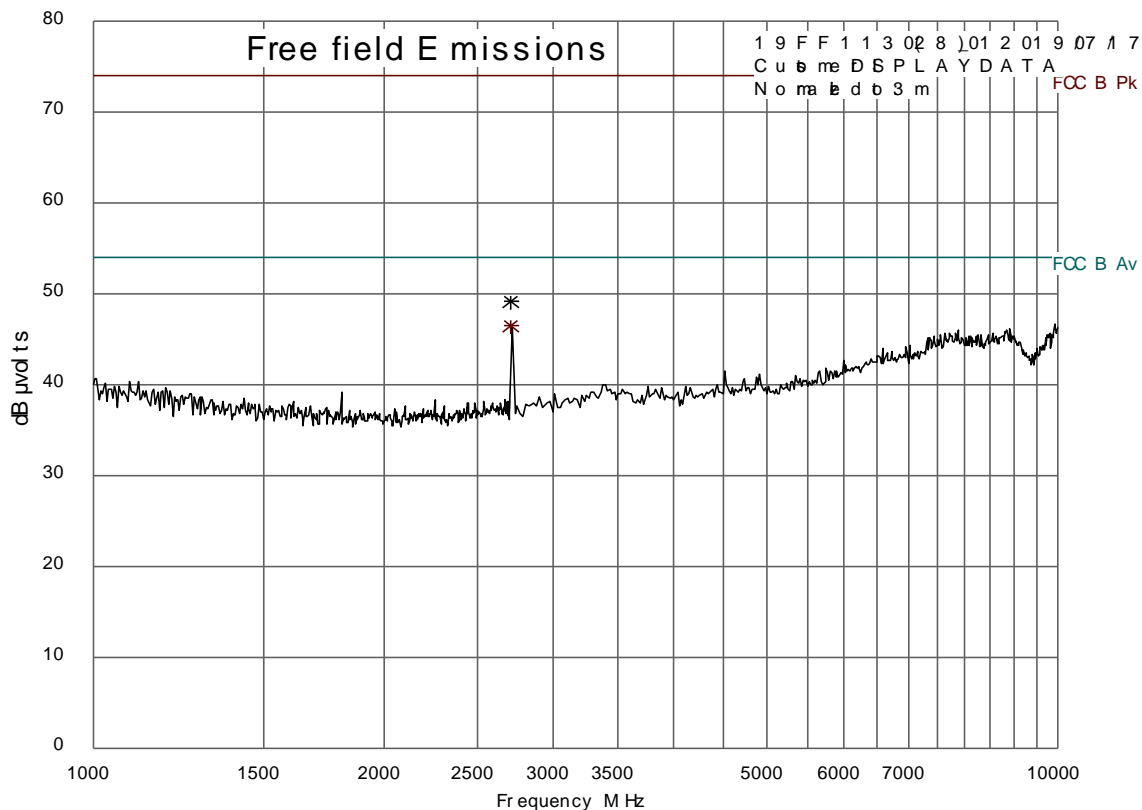

5.7 Radiated Emissions Plot, 1.0 to 10.0 GHz (Idle)

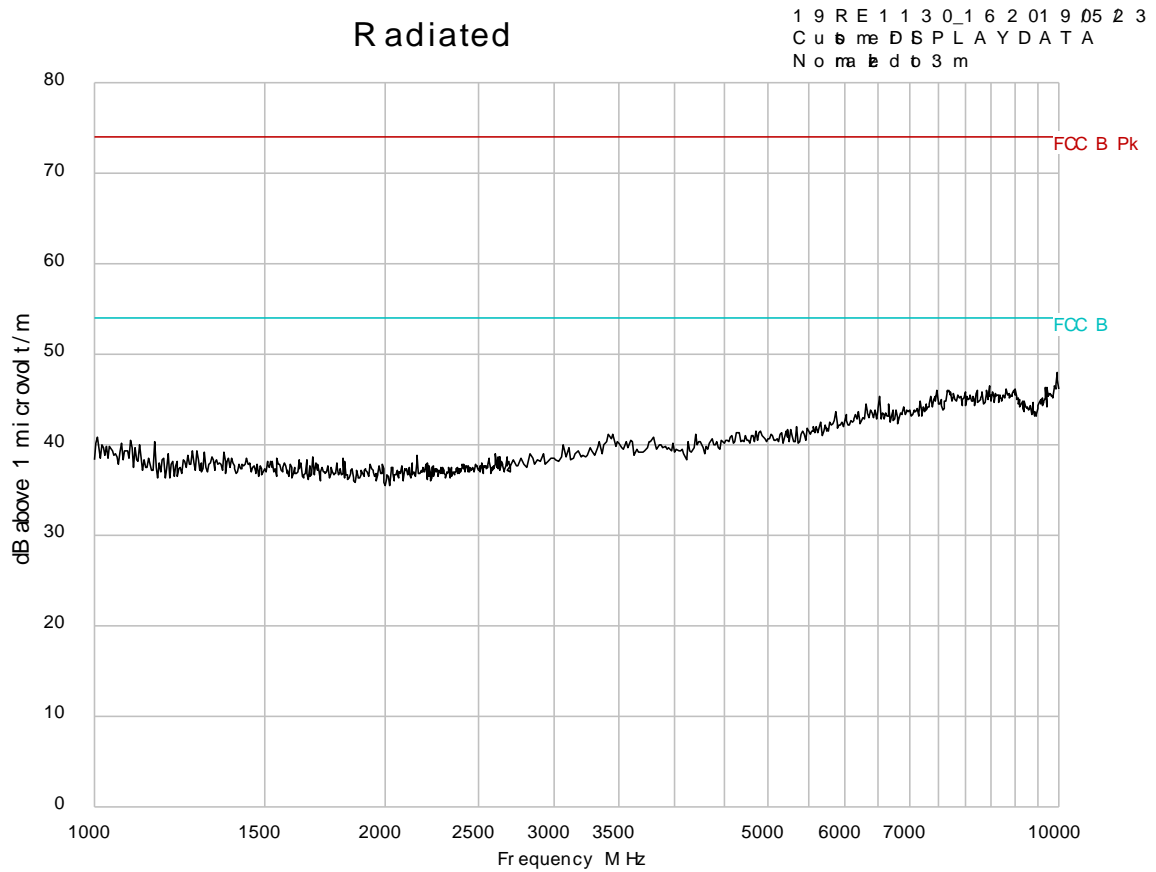

6.0 PHOTO LOG

Emissions:

Radiated emissions, Pre-scan, 30 MHz to 1000 MHz;



Photo Log (continued)

Radiated emissions, Pre-scan, > 1000 MHz;


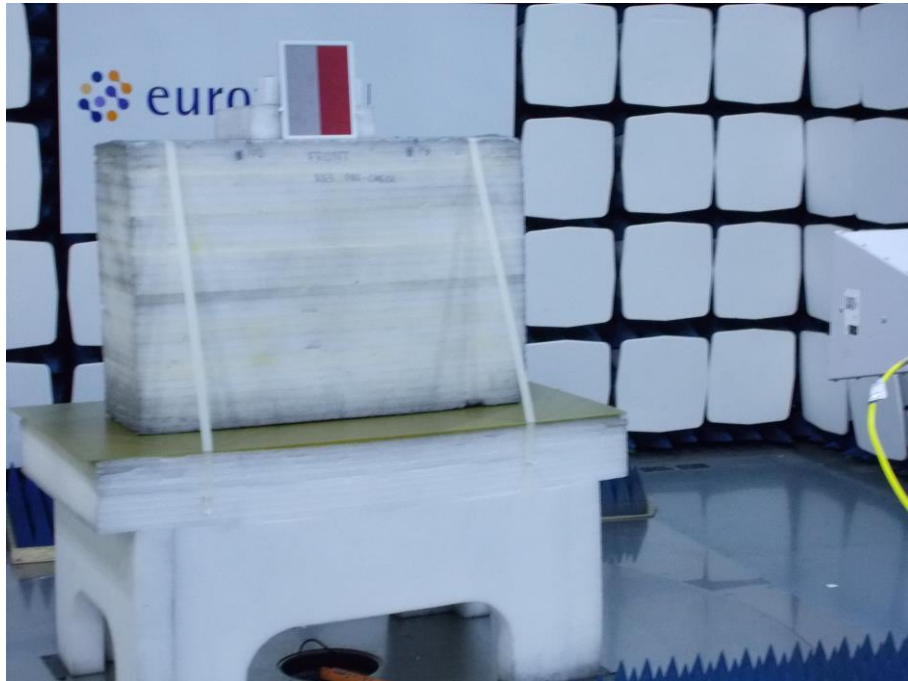


Photo Log (continued)

Occupied Bandwidth ;

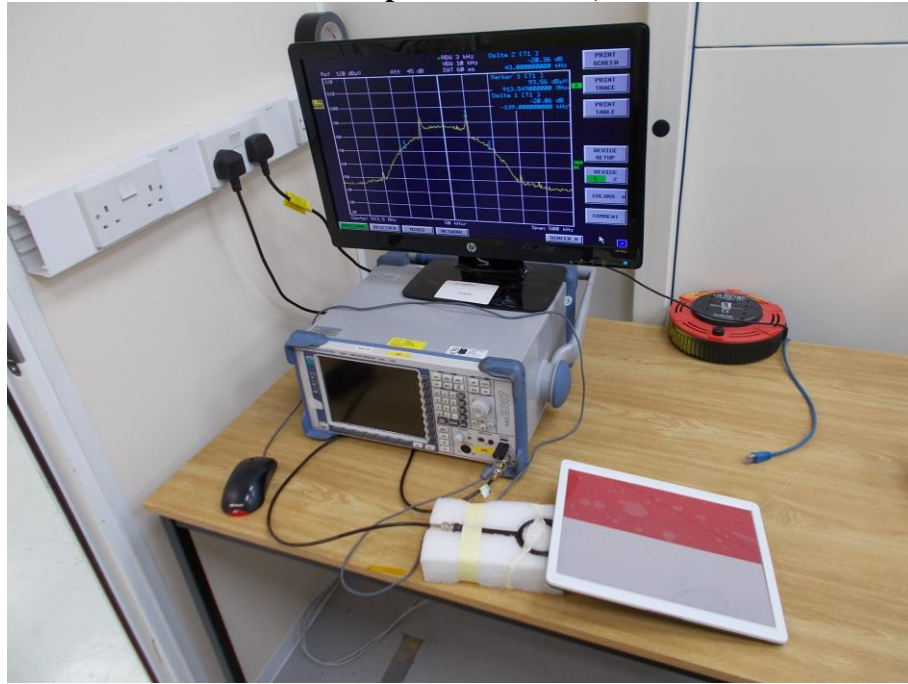

7.0 FCC DETAILS

FEDERAL COMMUNICATIONS COMMISSION

Laboratory Division
7435 Oakland Mills Road
Columbia, MD 21046

February 13, 2006

Hursley EMC Services Ltd.
Unit 16
Brickfield Lane
Chandlers Ford - Hampshire, SO53 4DB
United Kingdom
Attention: R P St John James

Re: Accreditation of Hursley EMC Services Ltd.
Designation Number: UK0006


Dear Sir or Madam:

We have been notified by Department of Trade and Industry (DTI) that Hursley EMC Services Ltd. has been accredited as a Conformity Assessment Body (CAB).

At this time your organization is hereby designated to perform compliance testing on equipment subject to Declaration Of Conformity (DOC) and Certification under Parts 15 and 18 of the Commission's Rules.

This designation will expire upon expiration of the accreditation or notification of withdrawal of designation.

Sincerely,



Thomas Phillips
Electronics Engineer