

EMI TEST REPORT

On Model Name: Microwave Oven

Model Number: XMA34GY Y-S, XMA34GY Y-S1,
XMB34GY Y-S, XMB34GY Y-S1

Brand Name: 

Prepared for Guangdong Midea Microwave and Electrical
Appliances Manufacturing Co., Ltd

FCC ID Number: VG8EMA34GY Y-S

According to


FCC Part 18(2012)


Industrial, Scientific and Medical Equipment

FCC/OST MP-5(1986)


FCC methods of measurements of radio noise emission from
industrial, scientific and medical equipment

Test Report #: GUA-1211-10915-FCC

Tested by:  _____ ECMG
Sewen Guo/Engineer Company Name

Reviewed by:  _____ ECMG
Jawen Yin/Senior Engineer Company Name

QC Manager:  _____ ECMG
Swall Zhang/QC Manager Company Name

Test Report Released by:  _____ January 25th, 2013
Swall Zhang Date

Test Location

Tests performed in a Certified ANSI Semi-Anechoic Chamber and Shielded Room.

Test Site Location : GD WILOT VACUUM ELECTRONIC EMC TEST LABORATORY

*BeiJiao,ShunDe,FoShan,GuangDong,
528311, China*

Tel : (86)-757-26326917

Fax : (86)-757- 22607341

Test Facility

The test facility was recognized, certified, or accredited by the following organizations:

FCC – Registration No.: 910385

GD WILOT VACUUM ELECTRONIC EMC TEST LABORATORY has been registered and fully described in a report filed with the (FCC) Federal Communications Commission. The acceptance letter from the FCC was maintained in our files.

Table of Contents

<i>LIST ATTACHED FILES</i>	1
<i>GOVERNMENT DISCLAIMER NOTICE</i>	2
<i>REPRODUCTION CLAUSE</i>	2
<i>OPINIONS AND INTERPRETATIONS</i>	2
<i>STATEMENT OF MEASUREMENT UNCERTAINTY</i>	2
<i>ADMINISTRATIVE DATA</i>	3
<i>EUT DESCRIPTION</i>	4
<i>EUT MODEL DERIVED</i>	5
<i>TEST SUMMARY</i>	6
<i>LOAD FOR MICROWAVE OVEN</i>	7
<i>EUT EXERCISE SOFTWARE</i>	8
<i>EQUIPMENT MODIFICATION</i>	8
<i>EUT SAMPLE PHOTOS FOR MODEL XMB34GYY-S</i>	9
<i>TEST SYSTEM DETAILS</i>	14
<i>CONFIGURATION OF TESTED SYSTEM</i>	15
<i>ATTACHMENT 1 -RADIATION HAZARD TEST</i>	16
<i>ATTACHMENT 2 - INPUT POWER MEASUREMENT</i>	18
<i>ATTACHMENT 3 - RF OUTPUT POWER MEASUREMENT</i>	21
<i>ATTACHMENT 4 - OPERATING FREQUENCY MEASUREMENT</i>	24
<i>ATTACHMENT 5 - CONDUCTED EMISSION TEST RESULTS</i>	28
<i>ATTACHMENT 6 - RADIATED EMISSION TEST RESULTS</i>	33

List Attached Files

<i>Exhibit Type</i>	<i>File Description</i>	<i>File Name</i>
<i>Test Report</i>	<i>Test Report</i>	<i>VG8EMA34GYY-S _Test Report.pdf</i>
<i>Operation Description</i>	<i>Technical Description</i>	<i>VG8EMA34GYY-S _Operation Description.pdf</i>
<i>External Photos</i>	<i>External Photos</i>	<i>VG8EMA34GYY-S _External Photos</i>
<i>Internal Photos</i>	<i>Internal Photos</i>	<i>VG8EMA34GYY-S _Internal Photos</i>
<i>Block Diagram</i>	<i>Block Diagram</i>	<i>VG8EMA34GYY-S _Block Diagram.pdf</i>
<i>Schematics</i>	<i>Circuit Diagram</i>	<i>VG8EMA34GYY-S _Schematics.pdf</i>
<i>ID Label/Location</i>	<i>Label and Location</i>	<i>VG8EMA34GYY-S _Label & Location.pdf</i>
<i>User Manual</i>	<i>User Manual</i>	<i>VG8EMA34GYY-S _User's Manual.pdf</i>
<i>Test set-up photos</i>	<i>Test set-up photos</i>	<i>VG8EMA34GYY-S _Test Set-up Photos</i>

Government Disclaimer Notice

When government drawing, specification, or other data are used for any purpose other than in connection with a definitely related government procurement operation, the United States Government thereby incurs no responsibility nor any obligation whatsoever; and the fact that the Government may have formulated, furnished, or in any way supplied the said drawing, specifications, or other data, is not to be regarded by implication or otherwise in any manner licensing the holder or any other person or corporation, or conveying any rights or permission to manufacture, use, or sell patented invention that may in any way be related thereto. This report must not be used to claim product endorsement by NVLAP or any agency of the U.S. Government.

Reproduction Clause

Any reproduction of this document must be done in full. No single part of this document may be reproduced without permission from ECMG Electronic Technical Testing Corp (Shenzhen).

Opinions and Interpretations

This test report relates to the abovementioned equipment under test (EUT). Without the permission of ECMG Electronic Technical Testing Corp (Shenzhen) Test Lab this test report is not permitted to be duplicated in extracts. This test report does not entitle to carry any test mark on this or similar products. The manufacturer has sole responsibility of continued compliance of the device.

Statement of Measurement Uncertainty

The data and results referenced in the document are true and accurate. The reader is cautioned that there may be errors within the calibration limits of the equipment and facilities that can account for a nominal measurement error. Furthermore, component and process variability of devices similar to that tested may result in additional deviation.

Administrative Data

Test Sample : *Microwave Oven*

Model Numbers : *XMA34GY-S,XMA34GY-S1, XMB34GY-S, XMB34GY-S1*

Model Tested : *EMA34GTQ-S, EMB34GTQ-S*

Brand Name : 

Receipt Date : *December 17th, 2012*

Date Tested : *December 18th, 2012 to December 29th, 2012*

Applicant : *Guangdong Midea Microwave and Electrical Appliances Manufacturing Co.,Ltd.*

Address : *No.6, Yong An Road, Beijiao, Shunde, Foshan.*

Telephone : *86-757-23306480*

Fax : *86-757-22607341*

Manufacturer : *Guangdong Midea Microwave and Electrical Appliances Manufacturing Co.,Ltd*

Address : *No.6, Yong An Road, Beijiao, Shunde, Foshan.*

Telephone : *86-757-23306480*

Fax : *86-757-22607341*

Factory : *Guangdong Midea Microwave and Electrical Appliances Manufacturing Co.,Ltd*

Address : *No.6, Yong An Road, Beijiao, Shunde, Foshan.*

Telephone : *86-757-23306480*

Fax : *86-757-22607341*

EUT Description

Guangdong Midea Microwave and Electrical Appliances Manufacturing Co.,Ltd., model tested EMA34GTQ-S, EMB34GTQ-S (referred to as the EUT in this report) is a Microwave Oven.

The technical specifications of EUT are as below:

Model Numbers	EMA34GTQ-S
Power Supply	208/230V~60Hz
Rated Input Power (Microwave)	2800W
Rated Output Power (Microwave)	1800W
Frequency	2450 MHz
Magnetron Model	2M248E
Magnetron Manufacturer	TOSHIBA

Model Numbers	EMB34GTQ-S
Power Supply	208/230V~60Hz
Rated Input Power (Microwave)	3200W
Rated Output Power (Microwave)	2100W
Frequency	2450 MHz
Magnetron Model	2M248E
Magnetron Manufacturer	TOSHIBA

NOTE: For more detailed information or features please refer to user's manual of EUT.

EUT Model Derived

XMA(B)34GY-S/S1 model designations as follows:

X=E or A;

M: means microwave mode;

A/B: means output rating, A: 1800Watts, B: 2100Watts;

34: means cavity size, 34 = 34 liters;

G= Design No.;

YY: 0-9 or A-Z, indicate different appearance;

S: means stainless steel Cavity;

S1: means stainless steel Cavity with inner protector plate.

Note 1: *Difference between model EMA34GTQ - S; EMA34GTQ - S1 and EMB34GTQ - S, EMB34GTQ - S1 is only high capacitance, Anything else are the same.*

Note 2: *Pre-scan has been conducted to determine the worst-case model. Model EMA34GTQ - S and EMB34GTQ - S were selected for the final testing.*

Test Summary

The electromagnetic compatibility requirements on model EMA34GTQ-S, EMB34GTQ-S for this test are stated below. All results listed in this report relate exclusively to this above-mentioned model as the equipment under test. This report confers no approval or endorsement upon any other component, host or subsystem used in the test set-up.

Emission Tests				
Specifications	Description	Test Results	Test Point	Remark
FCC Part 18:2012 FCC/OST MP-5:1986 ANSI C63.4-2009	Radiation Hazard Measurement	Passed	Enclosure	Attachment 1
FCC Part 18:2012 FCC/OST MP-5:1986 ANSI C63.4-2009	Input Power Measurement	Passed	AC Input Port	Attachment 2
FCC Part 18:2012 FCC/OST MP-5:1986 ANSI C63.4-2009	RF Output power Measurement	Passed	EUT	Attachment 3
FCC Part 18:2012 FCC/OST MP-5:1986 ANSI C63.4-2009	Operating Frequency Measurement	Passed	EUT	Attachment 4
FCC Part 18:2012 FCC/OST MP-5:1986 ANSI C63.4-2009	Conducted Emission	Passed	AC Input Port	Attachment 5
FCC Part 18:2012 FCC/OST MP-5:1986 ANSI C63.4-2009	Radiated Emission	Passed	Enclosure	Attachment 6

Load for Microwave Oven

For all measurements the energy developed by the oven was absorbed by a dummy load consisting of a quantity of tap water in a beaker. If the oven was provided with a shelf or other utensil support, this support was in its initial normal position. For ovens rated at 1000watts or less power output, the beaker contained quantities of water as listed in the following subparagraphs. For ovens rated at more than 1000watts output, each quantity was increased by 50% for each 500watts or fraction thereof in excess of 1000 watts. Additional beakers were used if necessary.

-Load for power output measurement: 1000 milliliters of water in the beaker located in the center of the oven.

-Load for frequency measurement: 1000 milliliters of water in the beaker located in the center of the oven.

-Load for measurement of radiation on second and third harmonic: Two loads, one of 700 and the other of 300 milliliters, of water are used. Each load is tested both with the beaker located in the center of the oven and with it in the right front corner.

-Load for all other measurements: 700 milliliters of water, with the beaker located in the center of the oven.

Note: *Since rated output power of the EUT is 2100 watts for model EMB34GTQ-S, 1800 watts for model EMA34GTQ-S, so the following load water quantity shall apply:*

-Load for power output measurement: 2100&1800 milliliters of water in the beaker located in the center of the oven.

-Load for frequency measurement: 2100&1800 milliliters of water in the beaker located in the center of the oven.

-Load for measurement of radiation on second and third harmonic: Two loads, one of 1470&1260 and the other of 630&540 milliliters, of water are used. Each load is tested both with the beaker located in the center of the oven and with it in the right front corner.

-Load for all other measurements: 1470&1260 milliliters of water, with the beaker located in the center of the oven.

EUT Exercise Software

No test software support this test.

Equipment Modification

Any modifications installed previous to testing by Guangdong Midea Microwave and Electrical Appliances Manufacturing Co.,Ltd., will be incorporated in each production model sold or leased in United States.

There were no modifications installed by ECMG Electronic Technical Testing Corp (Shenzhen) test personnel.

EUT Sample Photos for Model EMB34GTQ-S




EUT Front View



EUT Back View




Door Opened View

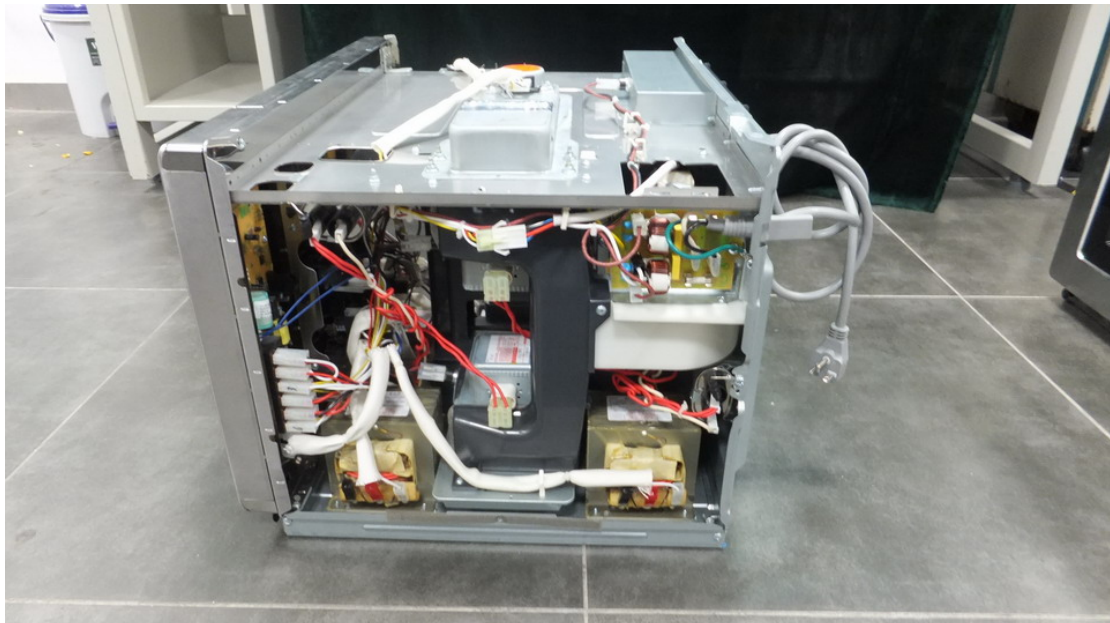


EUT Uncovered View




Magnetron Front View (TOSHIBA/2M248E)

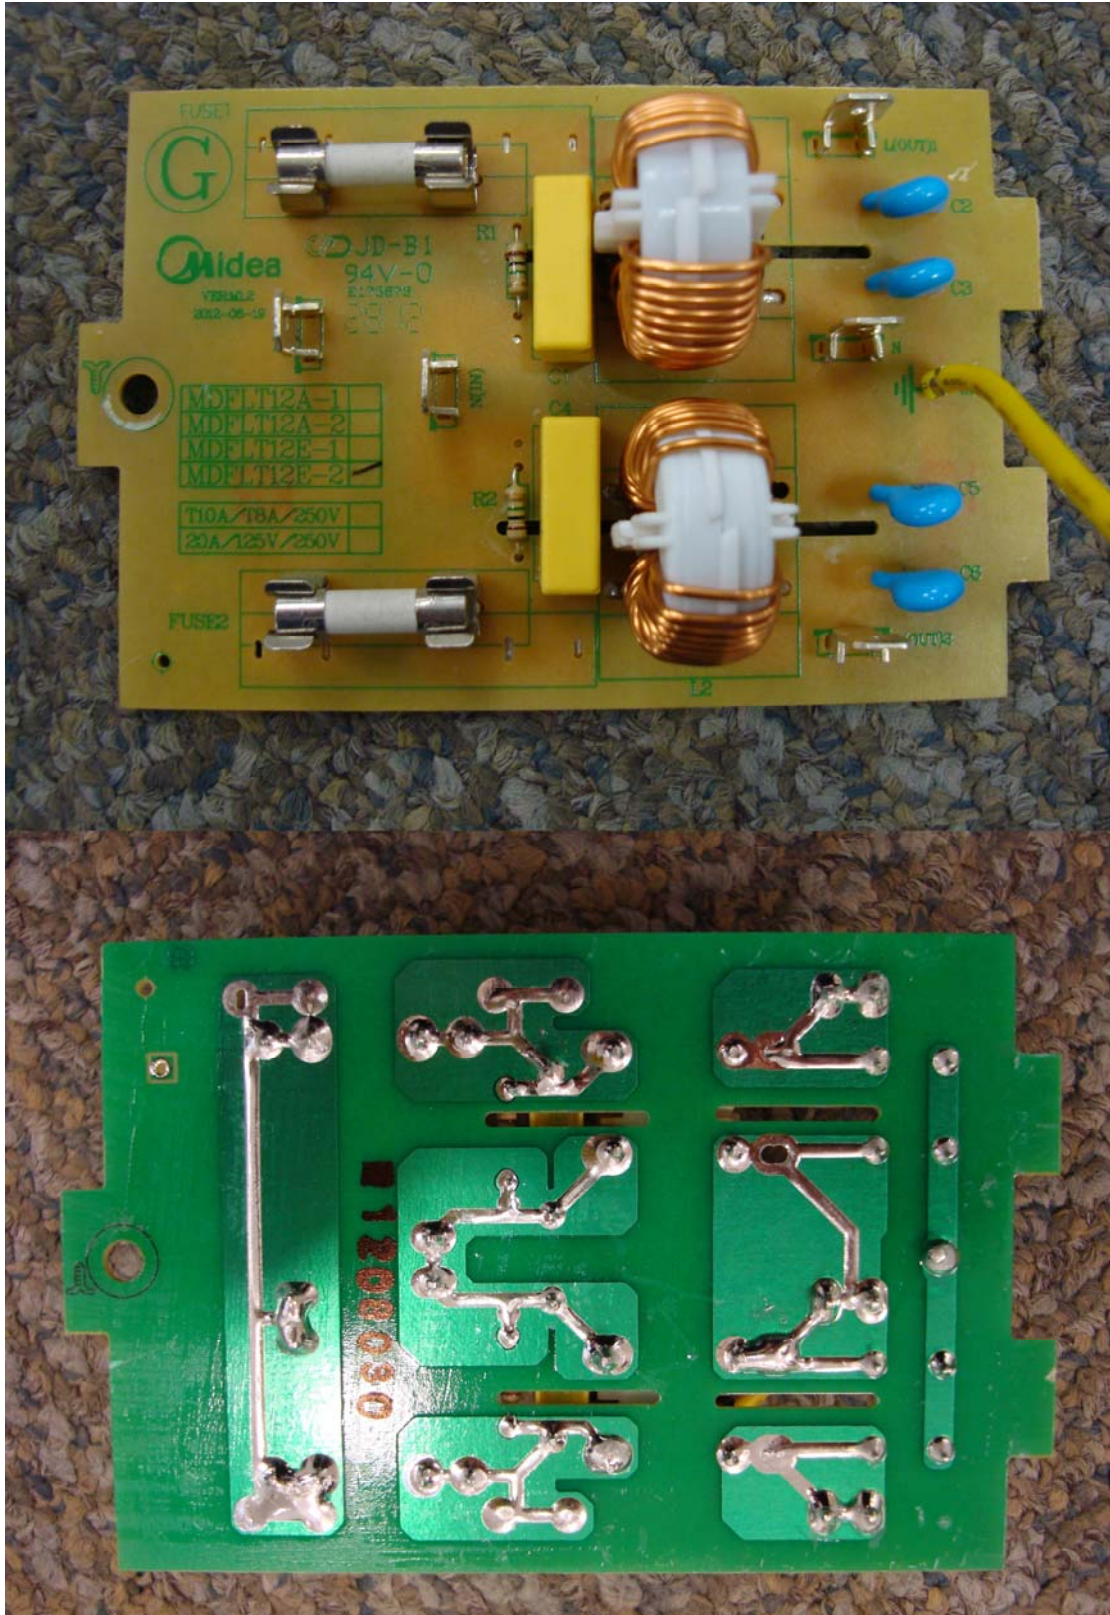

Power Filter Board-top/bottom View

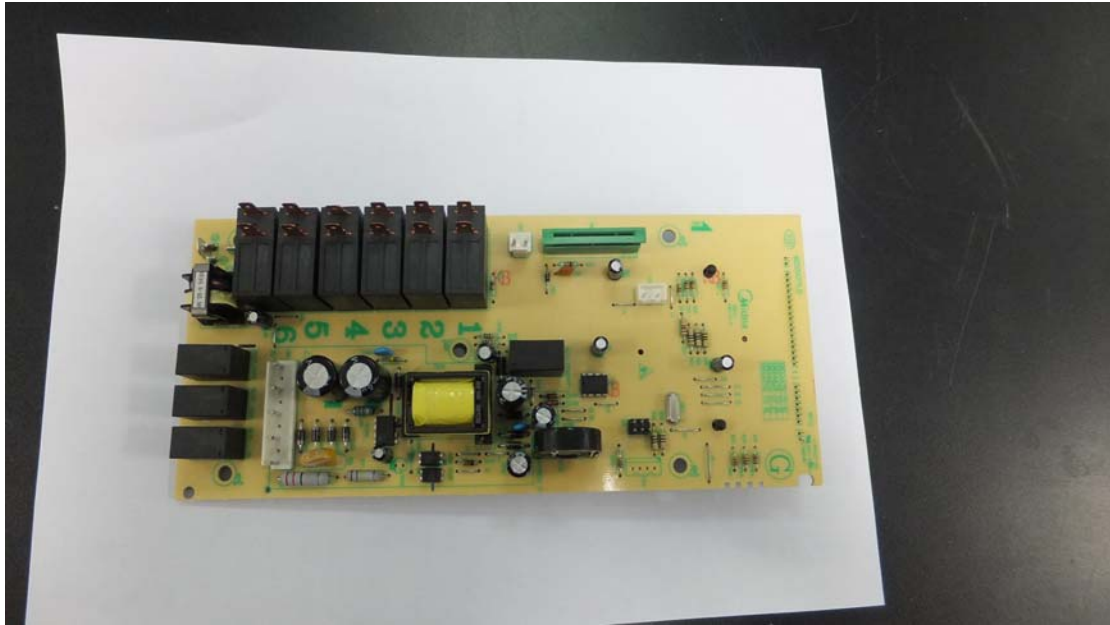

Motherboard - Top View

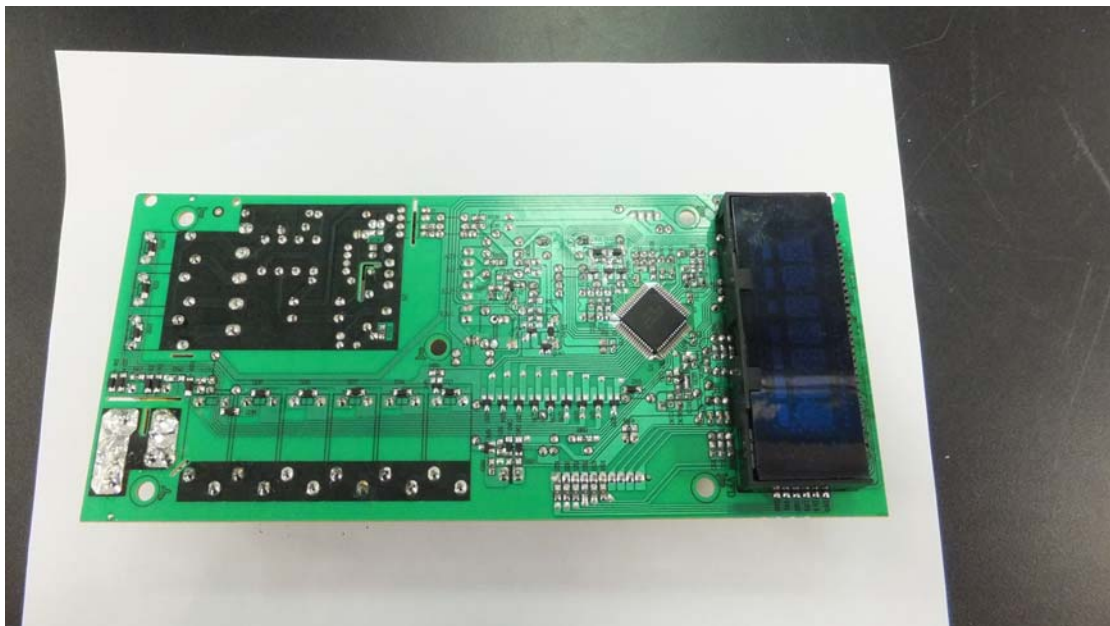

Motherboard -Bottom View


Test System Details

EUT					
Model Number:	XMA34GYY-S,XMA34GYY-S1, XMB34GYY-S, XMB34GYY-S1				
Model Tested:	EMA34GTQ-S, EMB34GTQ-S				
Description:	Microwave Oven				
Input:	AC 208/230V~60Hz				
Manufacturer:	Guangdong Midea Microwave and Electrical Appliances Manufacturing Co., Ltd				
Support Equipment					
Description	Model Number	Serial Number	Manufacturer		
N/A					
Cable Description					
Description	From	To	Length (Meters)	Shielded (Y/N)	Ferrite (Y/N)
Power Cable	EUT	Plug	1.2	N	N
Note:The "EUT" means "Microwave Oven".					

Note:

The EUT has been tested as an independent unit together with other necessary accessories or support units. The above support units or accessories were used to form a representative test configuration during the test tests.

Configuration of Tested System

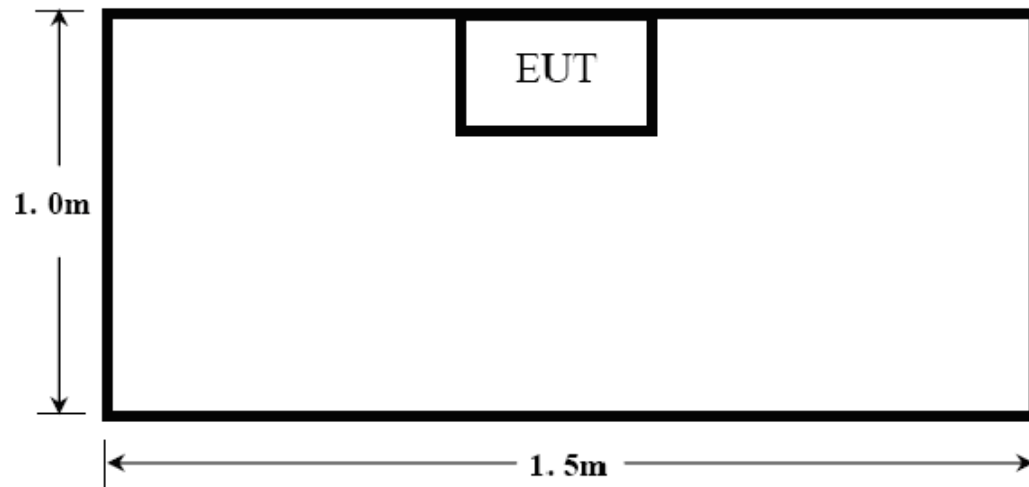

ATTACHMENT 1 –RADIATION HAZARD TEST

CLIENT:	Guangdong Midea Microwave and Electrical Appliances Manufacturing Co., Ltd	TEST STANDERD:	FCC Part 18
MODEL NUMBERS:	XMA34GY-S,XMA34GY-S1,XMB34GY-S,XMB34GY-S1	PRODUCT:	Microwave Oven
MODEL TESTED:	EMA34GTQ-S,EMB34GTQ-S	EUT DESIGNATION:	Commercial
TEMPERATURE:	22°C	HUMIDITY:	51%
ATM PRESSURE:	103kPa	GROUNDING:	Through AC Power Cord
TESTED BY:	Sewen Guo	DATE OF TEST:	December 19 th ,2012
TEST REFERENCE:	ANSI C63.4-2009, FCC/OST MP-5:1986		
TEST PROCEDURE:	The EUT was set-up according to the FCC MP-5 and FCC Part 18 for Radiation Hazard Measurement. The measurement was using a microwave leakage meter to measure the Radiation leakage in the as-received condition with the oven door closed. A 1470&1260 ml water load in a beaker was located in the center of the oven and the Microwave Oven was set to maximum power. While the oven operating, the microwavemeter will check the leakage and then record the maximum leakage.		
TESTED RANGE:	N/A		
TEST VOLTAGE:	AC 208V ~60Hz		
TEST JUSTIFICATION:	Pre-scan has been conducted for all input voltage, the worst-case input voltage 208VAC/60Hz was selected for the final testing.		
RESULTS:	There was no microwave leakage exceeding a power level of 0.23 mW/cm ² for model EMA34GTQ-S, 0.38 mW/cm ² for model EMB34GTQ-S observed at any point 5cm or more from the external surface of the oven. A maximum of 1.0 mW/cm ² is allowed in accordance with the applicable FCC standards. Hence, microwave leakage in the as-received condition with the oven door closed was below the maximum allowed. The test results relate only to the equipment under test provided by client.		
CHANGES OR MODIFICATIONS:	There were no modifications installed by ECMG Electronic Technical Testing Corp (Shenzhen) test personnel.		
M. UNCERTAINTY:	0.0001mW/cm ²		

Test Equipment List:

Test Equipment	Model No.	Manufacturer	Serial No.	Last Cal.	Cal. Interval
Microwave Measurement	HOLADAY	HI-1710A	00122261	2012.08.20	2013.08.21

Note: All testing were performed using internationally recognized standards. All test instruments were calibrated and traceable to the National Institute of Standards and Technology (NIST).

TESTED BY: *Jeney* **ENGINEER** ECMG **COMPANY NAME**

REVIEWED BY: *Janeyan* **SENIOR ENGINEER** ECMG **COMPANY NAME**



Radiation Hazard Test Set-up

ATTACHMENT 2 – INPUT POWER MEASUREMENT

CLIENT:	Guangdong Midea Microwave and Electrical Appliances Manufacturing Co., Ltd.	TEST STANDERD:	FCC Part 18
MODEL NUMBERS:	XMA34GY-S,XMA34GY-S1,XMB34GY-S,XMB34GY-S1	PRODUCT:	Microwave Oven
MODEL TESTED:	EMA34GTQ-S,EMB34GTQ-S	EUT DESIGNATION:	Commercial use
TEMPERATURE:	21°C	HUMIDITY:	69%
ATM PRESSURE:	103.1kPa	GROUNDING:	Through AC Power Cord
TESTED BY:	Sewen Guo	DATE OF TEST:	December 21 th ,2012
TEST REFERENCE:	ANSI C63.4-2009, FCC/OST MP-5:1986		
TEST PROCEDURE:	The EUT was set up according to the FCC MP-5 and FCC Part 18 for input power measurement. The input power and current was measured using a power analyzer. A 1470&1260 ml water load in a beaker was located in the center of the oven and the Microwave Oven was set to maximum power. While the oven is operating, use a voltmeter and an ampmeter to test the AC input voltage and current.		
TESTED RANGE:	N/A		
TEST VOLTAGE:	AC 208/230V~60Hz		
RESULTS :	Based on the measured input power, the EUT was found to be operating within the intended specifications. The test results relate only to the equipment under test provided by client.		
CHANGES OR MODIFICATIONS:	There were no modifications installed by ECMG Electronic Technical Testing Corp (Shenzhen) test personnel.		
M. UNCERTAINTY :	± 5W		

Test Data:

EUT Model: EMA34GTQ-S

Input Voltage (Vac/Hz)	Input Current (amps)	Measured Input Power(watts)	Rated Input Power(watts)
208	14.07	2698	2800
230	12.43	2639	2800


EUT Model: EMB34GTQ-S


Input Voltage (Vac/Hz)	Input Current (amps)	Measured Input Power(watts)	Rated Input Power(watts)
208	15.50	3053	3200
230	13.67	2983	3200

Test Equipments List:

Test Equipment	Manufacturer	Model	Serial No.	Last Cal.	Cal. Due
Power Meter	Ainuo	AN8726C	058704195	10/10/2012	10/11/2013

Note: All testing were performed using internationally recognized standards. All test instruments were calibrated and traceable to the National Institute of Standards and Technology (NIST).

TESTED BY:  **ENGINEER** ECMG
COMPANY NAME

REVIEWED BY:  **SENIOR ENGINEER** ECMG
COMPANY NAME



Input Power Test Set-Up

ATTACHMENT 3 – RF OUTPUT POWER MEASUREMENT

CLIENT:	Guangdong Midea Microwave and Electrical Appliances Manufacturing Co., Ltd.	TEST STANDERD:	FCC Part 18
MODEL NUMBERS:	XMA34GY-S,XMA34GY-S1,XMB34GY-S,XMB34GY-S1	PRODUCT:	Microwave Oven
MODEL TESTED:	EMA34GTQ-S,EMB34GTQ-S	EUT DESIGNATION:	Commercial use
TEMPERATURE:	22°C	HUMIDITY:	60%RH
ATM PRESSURE:	103kPa	GROUNDING:	Through AC Power Cord
TESTED BY:	Sewen Guo	DATE OF TEST:	December 21 th ,2012
TEST REFERENCE:	ANSI C63.4-2009, FCC/OST MP-5:1986		
TEST PROCEDURE:	<p>The EUT was set up according to the FCC MP-5 and FCC Part 18 for RF output power Measurement. The Caloric Method was used to determine maximum RF output power. The initial temperature of the water load was measured. A 2100&1800 ml water load in a beaker was located in the center of the oven. The oven was operated at maximum output power for 120 seconds, the temperature of the water was re-measured.</p> <p>RF Output Power $= (4.2\text{joules/calorie})(\text{volume in milliliters})(\text{temperature rise}) / (\text{time in seconds})$ $= 4.2 \text{ joules/calorie} \times 1800 \times (\text{Final Temp} - \text{Initial Temp}) / 120$ $= 4.2 \text{ joules/calorie} \times 2100 \times (\text{Final Temp} - \text{Initial Temp}) / 120$</p>		
TESTED RANGE:	N/A		
TEST VOLTAGE:	AC 208/230V~60Hz		
RESULTS:	<p>Model EMA34GTQ-S, The worst-case RF Output Power =1656.9 watts. The test results relate only to the equipment under test provided by client.</p> <p>Model EMB34GTQ-S, the worst-case RF Output Power =1911 watts. The test results relate only to the equipment under test provided by client.</p>		
CHANGES OR MODIFICATIONS:	There were no modifications installed by ECMG Electronic Technical Testing Corp (Shenzhen) test personnel.		
M. UNCERTAINTY:	± 0.3°C		

Test Result:**EUT Model: EMA34GTQ-S**

Input Voltage (Vac/Hz)	Quality of Water(ml)	Starting Temperature (°C)	Final Temperature (°C)	Elapsed Time (Seconds)	RF Output Power(watts)
208	1800	20.0	46.3	120S	1656.9
230	1800	20.0	45.2	120S	1587.6


EUT Model: EMB34GTQ-S

Input Voltage (Vac/Hz)	Quality of Water(ml)	Starting Temperature (°C)	Final Temperature (°C)	Elapsed Time (Seconds)	RF Output Power(watts)
208	2100	20.0	46.0	120S	1911
230	2100	20.0	45.7	120S	1889


Test Equipments list:

Test Equipment	Manufacturer	Model	Serial No.	Last Cal.	Cal. Due
Digit Thermometer	Fluke Corporation	Fluke 51 II	87500204	5/21/2012	5/22/2013
Stopwatch	JUNSD	JS-306	080303	8/5/2012	8/6/2013

Note: All testing were performed using internationally recognized standards. All test instruments were calibrated and traceable to the National Institute of Standards and Technology (NIST).

TESTED BY:  **ENGINEER** ECMG
COMPANY NAME

REVIEWED BY:  **SENIOR ENGINEER** ECMG
COMPANY NAME

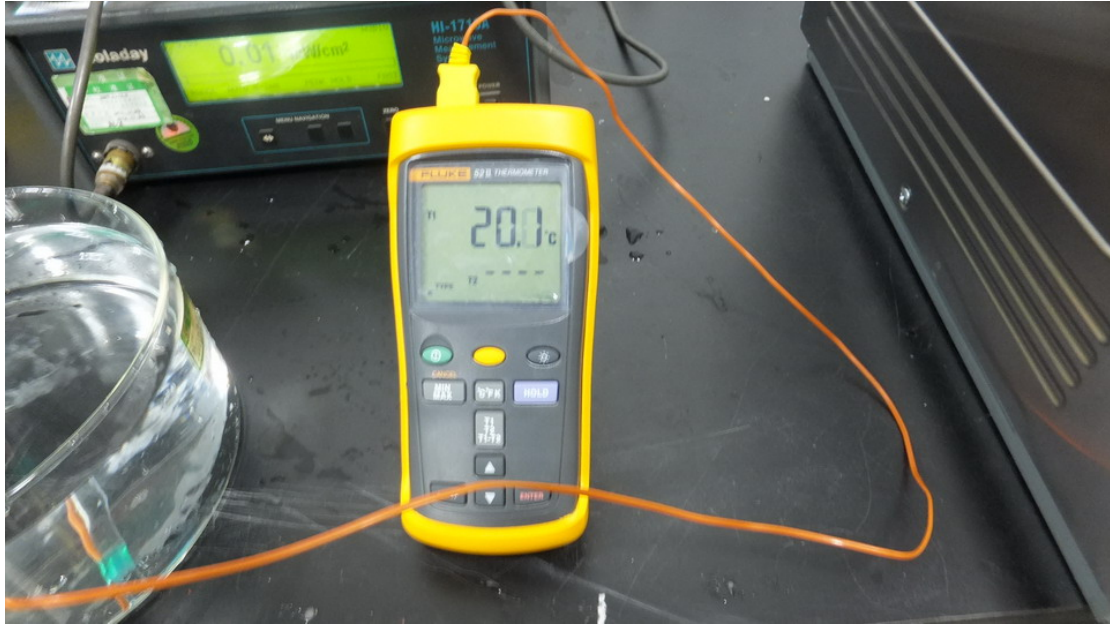

RF Output Power Test Set-Up

ATTACHMENT 4 – OPERATING FREQUENCY MEASUREMENT

CLIENT:	Guangdong Midea Microwave and Electrical Appliances Manufacturing Co., Ltd.	TEST STANDERD:	FCC Part 18
MODEL NUMBERS:	XMA34GYG-S,XMA34GYG-S1,XMB34GYG-S,XMB34GYG-S1	PRODUCT:	Microwave Oven
MODEL TESTED:	EMA34GTQ-S,EMB34GTQ-S	EUT DESIGNATION:	Commercial use
TEMPERATURE:	22°C	HUMIDITY:	60%RH
ATM PRESSURE:	101.1kPa	GROUNDING:	Through AC Power Cord
TESTED BY:	Sewen Guo	DATE OF TEST:	December 29 th ,2012
TEST REFERENCE:	ANSI C63.4-2009, FCC/OST MP-5:1986		
TEST PROCEDURE:	<p>The EUT was set up according to the FCC MP-5 and FCC Part 18 for Operating Frequency Measurement.</p> <p>1) The variation of frequency with time. The operating frequency was measured using a spectrum analyzer. Starting with the EUT at room temperature, a 2100&1800 ml water load in a beaker was located in the center of the oven. Set a spectrum analyzer with antenna at 3 meters distance form the oven and the oven was operated at maximum output power. The fundamental operating frequency was monitored until the water load was reduced to 20 percent of the original load.</p> <p>2) The variation of frequency with Line Voltage. The operating frequency was measured using a spectrum analyzer. The EUT was operated/warmed by at least 10 minutes of use with a 2100&1800ml water load at room temperature at the beginning of the test. Then the operating frequency was monitored as the input voltage was varied between 80 and 125 percent of the nominal rating.</p>		
TEST VOLTAGE:	AC 208 ~60Hz		
TEST JUSTIFICATION:	Pre-scan has been conducted for all input voltage, the worst-case input voltage 208VAC/60Hz was selected for the final testing.		
RESULTS:	Please refer to following pages for details of the variation in operating frequency with time & line voltage measurement. The test results relate only to the equipment under test provided by client.		
CHANGES OR MODIFICATIONS:	There were no modifications installed by ECMG Electronic Technical Testing Corp (Shenzhen) test personnel.		
M. UNCERTAINTY:	Freq. ±10kHz		

EUT Model: EMA34GTQ-S

Variation in Operating Frequency with Time:

<i>Minimum Frequency (MHz)</i>	<i>Maximum Frequency (MHz)</i>
2456.6	2462.2

Variation in Operating Frequency with Line Voltage:

<i>Minimum Frequency (MHz)</i>	<i>Maximum Frequency (MHz)</i>
2457.1	2464.6
<i>Note: Line voltage varied from 166.4Vac to 260Vac.</i>	

EUT Model: EMB34GTQ-S

Variation in Operating Frequency with Time:

<i>Minimum Frequency (MHz)</i>	<i>Maximum Frequency (MHz)</i>
2445.3	2448.6


Variation in Operating Frequency with Line Voltage:


<i>Minimum Frequency (MHz)</i>	<i>Maximum Frequency (MHz)</i>
2449.8	2452.2
<i>Note: Line voltage varied from 166.4Vac to 260Vac.</i>	

Test Equipments List:

Test Equipment	Manufacturer	Model	Serial No.	Last Cal.	Cal. Due
EMI test receiver	R&S	ESIB-26	100174	11/18/2012	11/17/2013
Horn Antenna	R&S	HF906	100311	11/20/2012	11/21/2013

Note: All testing were performed using internationally recognized standards. All test instruments were calibrated and traceable to the National Institute of Standards and Technology (NIST).

TESTED BY:  ECMG
ENGINEER COMPANY NAME

REVIEWED BY:  ECMG
SENIOR ENGINEER COMPANY NAME




Operating Frequency Test Set-up


ATTACHMENT 5 – CONDUCTED EMISSION TEST RESULTS

CLIENT:	Guangdong Midea Microwave and Electrical Appliances Manufacturing Co., Ltd.	TEST STANDERD:	FCC Part 18
MODEL NUMBERS:	XMA34GY-S,XMA34GY-S1,XMB34GY-S,XMB34GY-S1	PRODUCT:	Microwave Oven
MODEL TESTED:	EMA34GTQ-S,EMB34GTQ-S	EUT DESIGNATION:	Commercial
TEMPERATURE:	22°C	HUMIDITY:	64%RH
ATM PRESSURE:	101.1kPa	GROUNDING:	Through AC Power Cord
TESTED BY:	Sewen Guo	DATE OF TEST:	December 29 th ,2012
TEST REFERENCE:	ANSI C63.4-2009, FCC/OST MP-5:1986		
TEST PROCEDURE:	The EUT was set up according to the guideline of ANSI C63.4-2009 & FCC MP-5 for conducted emissions. The measurement was using a AMN on each line and an EMI receiver peak scan was made at the frequency measurement range. The six highest significant peaks were then marked, and these signals were then quasi-peaked and averaged. The frequency range investigated was from 150kHz to 30MHz.		
TESTED RANGE:	150kHz to 30MHz		
TEST JUSTIFICATION:	Pre-scan has been conducted for all input voltage, the worst-case input voltage 208VAC/60Hz was selected for the final testing.		
TEST VOLTAGE:	AC 208~60Hz		
RESULTS:	The EUT meets the requirements of test reference for Conducted Emissions. The test results relate only to the equipment under test provided by client.		
CHANGES OR MODIFICATIONS:	There were no modifications installed by ECMG Electronic Technical Testing Corp (Shenzhen) test personnel.		
M. UNCERTAINTY:	±2.5 dB		

EUT Model: EMA34GTQ-S

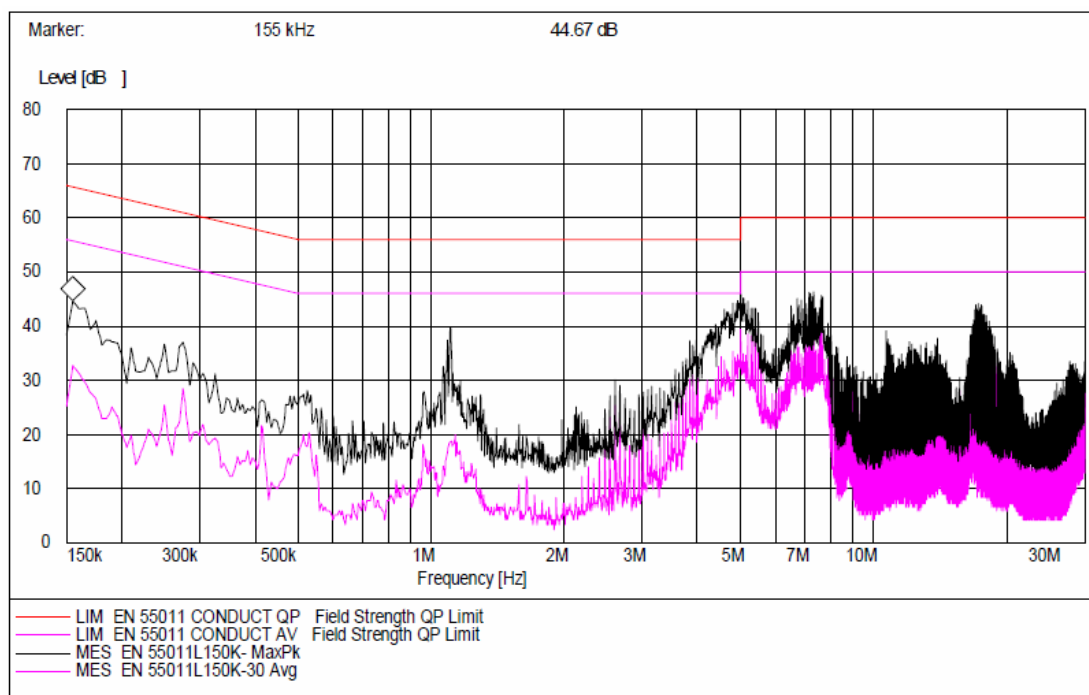


Line L Conducted Emission Graph

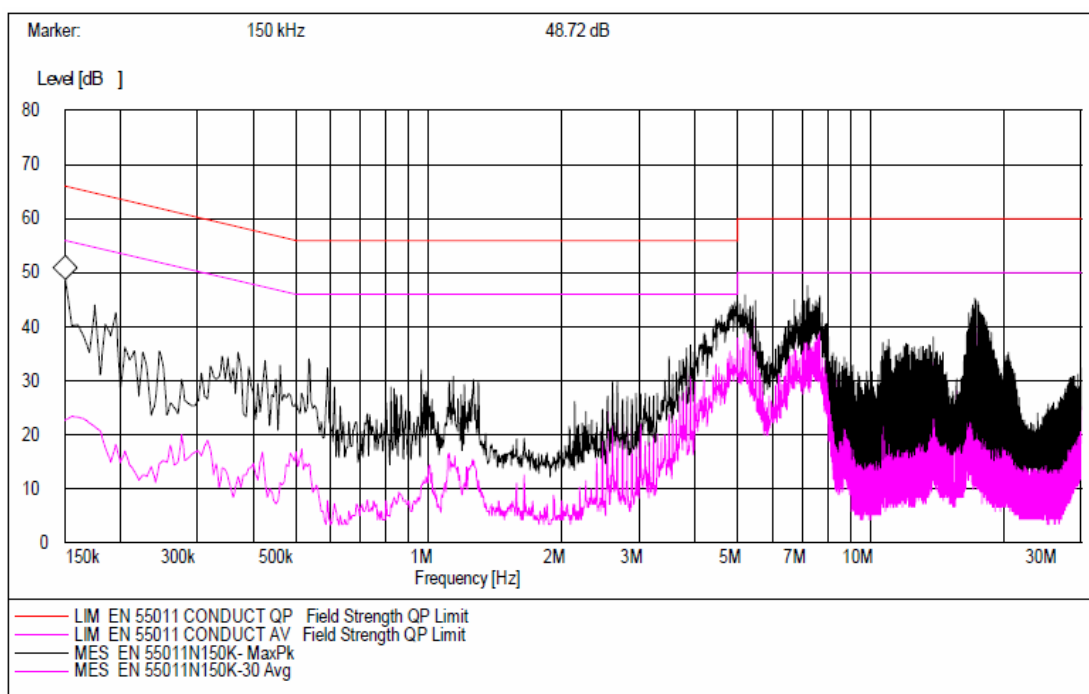


Line N Conducted Emission Graph

EUT Model: EMB34GTQ-S

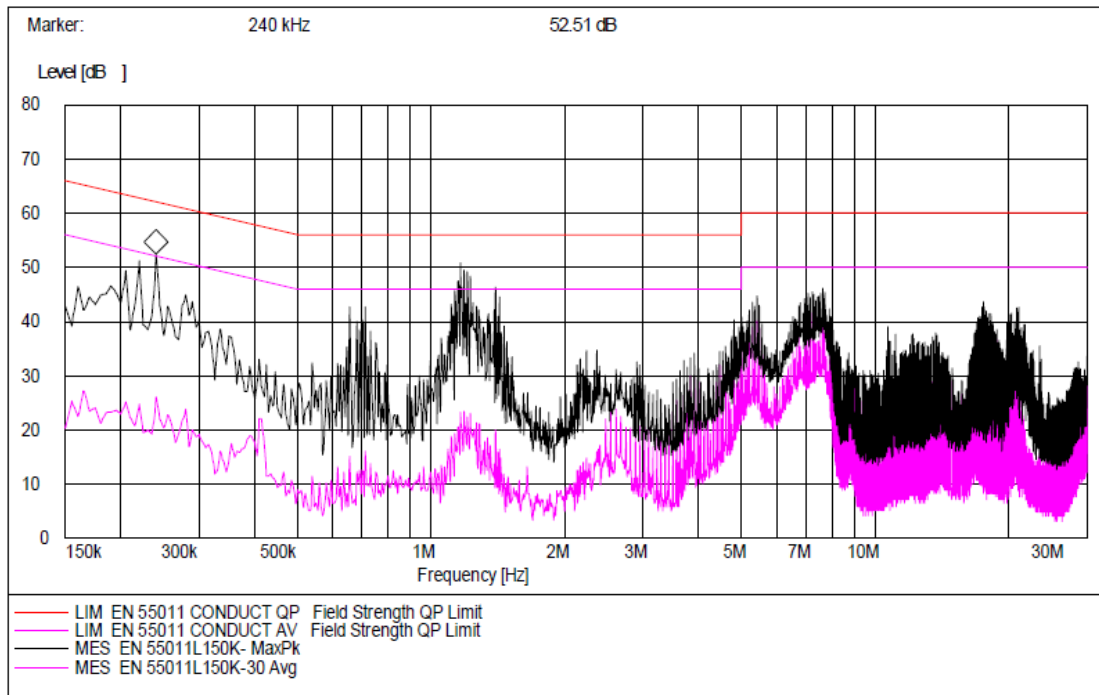

Line L Conducted Emission Graph

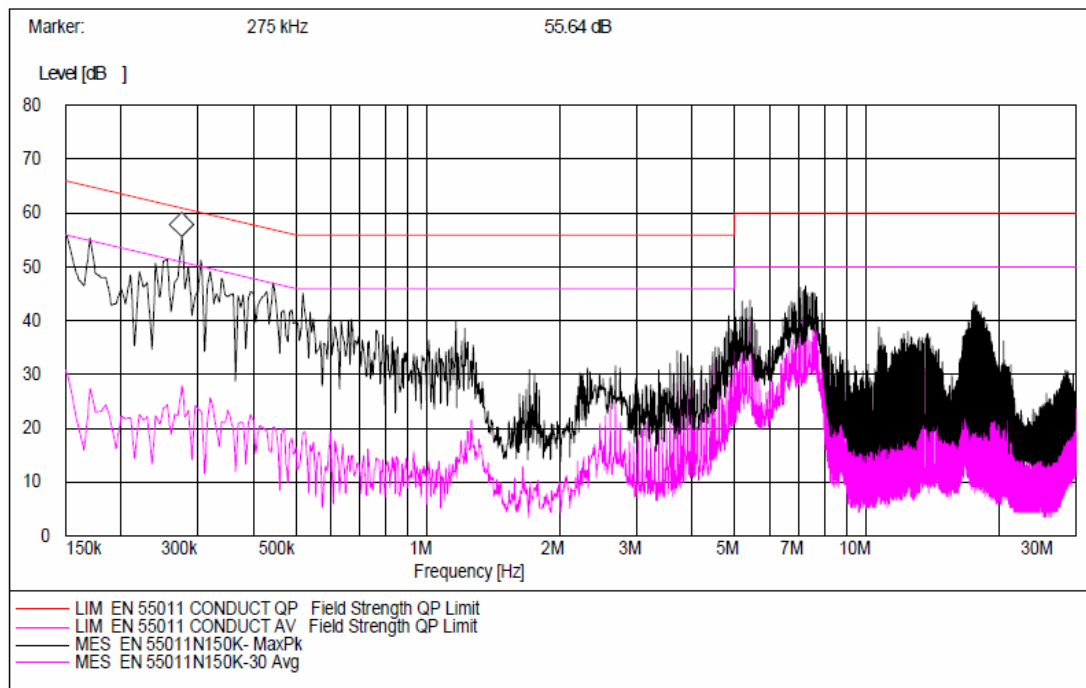

Line N Conducted Emission Graph

Test Data:

Lines (L/N)	Frequency (MHz)	Corrected QP Level (dBuV)	Limits QP (dBuV)	Margin QP (dB)	Frequency (MHz)	Corrected AV Level (dBuV)	Limits AV (dBuV)	Margin QP (dB)
EMA34GTQ-S								
L	0.155	34.5	65.7	-31.2	0.155	22.7	55.7	-33
L	0.170	31.8	65	-33.2	0.170	21.3	55	-33.7
L	1.100	26.3	56	-29.7	1.100	16.5	46	-29.5
N	0.150	31.7	66	-34.3	0.150	20.4	56	-35.6
N	0.175	30.4	64.7	-34.3	0.175	17.9	54.7	-36.8
N	0.190	27.2	64	-36.8	0.190	13.2	54	-40.8
EMB34GTQ-S								
L	0.220	44.1	62.8	-18.7	0.220	20.7	52.8	-32.1
L	0.240	42.3	62.1	-19.8	0.240	19.8	52.1	-32.3
L	1.165	36.2	56	-19.8	1.165	15.8	46	-30.2
N	0.275	43.9	61	-17.1	0.275	22.4	51	-28.6
N	0.305	44.7	60.1	-15.4	0.305	20.4	50.1	-29.7
N	0.445	40.5	57	-16.5	0.445	15.7	47	-31.3
<p>Note :</p> <p>1) All readings are using a bandwidth of 9 kHz, with a 500 ms sweep time. A video filter was not use.</p> <p>2) "QP" means "Quasi-Peak" values, "AV" means "Average" values.</p> <p>3) The other reading are too low against official limits that are not be recorded.</p>								

Test Equipments List:

Test Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Cal. Due
EMI test receiver	R&S	ESIB-26	100174	11/19/2012	11/18/2013
LISN	R&S	ESH2-Z5	100091	11/19/2012	11/18/2013
Transient Limiter	Agilent	11947A	3107A03648	11/19/2012	11/18/2013
Shielding Room	TDK	8m×4m×3m	N/A	04/17/2012	04/16/2013

Note: All testing were performed using internationally recognized standards. All test instruments were calibrated and traceable to the National Institute of Standards and Technology (NIST).

TESTED BY: *Sevensun* ECMG
COMPANY NAME
ENGINEER

REVIEWED BY: *Janemyan* ECMG
COMPANY NAME
SENIOR ENGINEER



Conducted Emission Test Set-up

ATTACHMENT 6 - RADIATED EMISSION TEST RESULTS

CLIENT:	Guangdong Midea Microwave and Electrical Appliances Manufacturing Co.,Ltd.	TEST STANDERD:	FCC Part 18
MODEL NUMBERS:	XMA34GYY-S,XMA34GYY-S1,XMB34GYY-S,XMB34GYY-S1	PRODUCT:	Microwave Oven
MODEL TESTED:	EMA34GTQ-S,EMB34GTQ-S	EUT DESIGNATION:	Commercial
TEMPERATURE:	22°C	HUMIDITY:	63%RH
ATM PRESSURE:	103.0kPa	GROUNDING:	Through AC Power Cord
TESTED BY:	Sewen Guo	DATE OF TEST:	December 29 th ,2012
TEST REFERENCE:	ANSI C63.4-2009, FCC/OST MP-5:1986		
TEST PROCEDURE:	<p>The EUT was set up according to the guidelines of ANSI C63.4-2009& FCC MP-5 for radiated emissions. Microwave Oven was placed on a 1m *1.5m nonconductive table. The top of the table is 1.0 m above the ground. The table is placed on a flush mounted metal turntable. An EMI receiver peak scan was made at the frequency measurement range (pre-scan) in an Anechoic chamber. Signal discrimination was then performed and the significant peaks marked. All data was recorded in Quasi-peak detection mode from 30 MHz to 1GHz and average detector mode above 1GHz.</p> <p>The following data lists the significant emission frequencies, measured levels, correction factors (including cable and antenna correction factors), and the corrected readings against the limits. Explanation of the Correction Factor are given as follows:</p> <p>FS= RA + AF + CF - AG</p> <p>Where: FS = Field Strength</p> <p>RA = Receiver Amplitude</p> <p>AF = Antenna Factor</p> <p>CF = Cable Attenuation Factor</p> <p>AG = Amplifier Gain</p>		
TESTED RANGE:	30MHz to 24.5GHz		
TEST JUSTIFICATION:	Pre-scan has been conducted for all input voltage, the worst-case input voltage 208VAC/60Hz was selected for the final testing.		
TEST VOLTAGE:	AC 208~60Hz		
RESULTS:	The EUT meet the requirements of test reference for radiated emissions. The test results relate only to the equipment under test provided by client.		
CHANGES OR MODIFICATIONS:	There were no modifications installed by ECMG Electronic Technical Testing Corp (Shenzhen) test personnel.		
M. UNCERTAINTY:	± 3.2 dB		

Field strength limits for out-of-band emissions :

For RF output power <500W, Limit at 300m = 27.96dBuV/m

For RF output power >500W, Limit at 300m = 20log [25*SQRT(Power/500)]dBuV/m

EUT Model: EMA34GTQ-S

Test Data :

30MHz - 1GHz						
Frequency [MHz]	Antenna Polarization [V/H]	Corrected Reading [dB μ V/m]	Factor (dB)	Field Strength [dB μ V/m]	Delta, QP [dB]	3 Meters Limits [dB μ V/m]
30.000	V	35	11.2	46.2	-27.0	73.2
74.709	V	33.1	8.8	41.9	-31.3	73.2
140.802	V	8.6	11.8	20.4	-52.8	73.2
30.000	H	31.5	11.2	42.7	-30.5	73.2
31.944	H	12.7	11.2	23.9	-49.3	73.2
228.818	H	11.1	14.6	25.7	-47.5	73.2
Note: 1) All readings are quasi-peak unless stated otherwise, using a bandwidth of 120kHz, with a 60s sweep time. A video filter was not used. 2) Field Strength = Read Level + Factor, Factor = Antenna Factor + Cable Loss - Preamp Factor.						
1GHz - 25GHz						
Frequency [GHz]	Antenna Polarization [V/H]	Corrected Reading [dB μ V/m]	Factor (dB)	Field Strength [dB μ V/m]	Delta, AV [dB]	3 Meters Limits [dB μ V/m]
8.651	V	26.58	22.42	49.0	-24.2	73.2
12.228	V	15.84	33.06	48.9	-24.3	73.2
14.814	V	17.14	35.86	53.0	-20.2	73.2
8.591	H	18.58	22.42	41.0	-32.2	73.2
11.056	H	15.25	29.55	44.8	-28.4	73.2
14.723	H	16.64	35.86	52.5	-20.7	73.2
Note: 1) All readings are average unless stated otherwise, using a bandwidth of 1MHz, with a 60s sweep time. A video filter was not used. 2) Field Strength = Read Level + Factor, Factor = Antenna Factor + Cable Loss - Preamp Factor.						

EUT Model: EMB34GTQ-S


Test Data :


30MHz - 1GHz						
<i>Frequency [MHz]</i>	<i>Antenna Polarization [V/H]</i>	<i>Corrected Reading [dBμV/m]</i>	<i>Factor (dB)</i>	<i>Field Strength [dBμV/m]</i>	<i>Delta, QP [dB]</i>	<i>3 Meters Limits [dBμV/m]</i>
243.828	V	8.3	13.7	22.0	-51.8	73.8
255.491	V	25.3	13.0	38.3	-35.5	73.8
772.565	V	9.3	23.7	33.0	-40.8	73.8
30.000	H	38.2	11.2	49.4	-24.4	73.8
113.587	H	38.4	10.6	49.0	-24.8	73.8
247.715	H	15.8	13.6	29.4	-44.4	73.8
<p><i>Note: 1) All readings are quasi-peak unless stated otherwise, using a bandwidth of 120kHz, with a 60s sweep time. A video filter was not used. 2) Field Strength = Read Level + Factor, Factor = Antenna Factor + Cable Loss - Preamp Factor.</i></p>						
1GHz - 25GHz						
<i>Frequency [GHz]</i>	<i>Antenna Polarization [V/H]</i>	<i>Corrected Reading [dBμV/m]</i>	<i>Factor (dB)</i>	<i>Field Strength [dBμV/m]</i>	<i>Delta, AV [dB]</i>	<i>3 Meters Limits [dBμV/m]</i>
6.758	V	22.39	18.91	41.3	-32.5	73.8
8.591	V	22.28	22.42	44.7	-29.1	73.8
14.723	V	16.44	35.86	52.3	-21.5	73.8
4.924	H	13.55	18.85	32.4	-41.4	73.8
7.389	H	21.8	21.70	43.5	-30.3	73.8
8.441	H	17.08	22.42	39.5	-34.3	73.8
<p><i>Note: 1) All readings are average unless stated otherwise, using a bandwidth of 1MHz, with a 60s sweep time. A video filter was not used. 2) Field Strength = Read Level + Factor, Factor = Antenna Factor + Cable Loss - Preamp Factor.</i></p>						

Test Equipments List:

Test Equipment	Manufacturer	Model	Serial No.	Last Cal.	Cal. Due
EMI test receiver	R&S	ESIB-26	100174	11/19/2012	11/18/2013
Horn Antenna	R&S	HF906	100311	11/21/2012	11/20/2013
Hybrid Log Periodic Antenna	TDK	HLP-3003C	130144	11/21/2012	11/20/2013
Loop Antenna	ETS	ETS-6152	24934	11/21/2012	11/20/2013
Anechoic Chamber	TDK	9m×6 m×5.7m	N/A	04/17/2012	04/16/2013

Note: All testing were performed using internationally recognized standards. All test instruments were calibrated and traceable to the National Institute of Standards and Technology (NIST).

TESTED BY:  ECMG
ENGINEER COMPANY NAME

REVIEWED BY:  ECMG
SENIOR ENGINEER COMPANY NAME



Radiated Emission Test Set-up (30 -1,000MHz)



Radiated Emission Test Set-up (1-25GHz)