

EMI TEST REPORT

On Model Name: Microwave Oven

Model Numbers: XMB17GYY-S, XMA17GYY-S

Brand Name: 

FCC ID Number: VG8EMB17GYY

Prepared for Guangdong Midea Kitchen Appliances
Manufacturing Co.,Ltd.

According to
FCC Part 18(2014)


Industrial, Scientific and Medical Equipment

FCC/OST MP-5(1986)


*FCC methods of measurements of radio noise emission from
industrial, scientific and medical equipment*

Test Report #: GUA-1508-11368-FCC

Prepared by:  _____ ECMG
ViVi Huang/Assistant Company Name

Reviewed by:  _____ ECMG
Jawen Yin/Senior Engineer Company Name

QC Manager:  _____ ECMG
Swall Zhang/QC Manager Company Name

Test Report Released by:  _____ September 28th, 2015
Swall Zhang Date

Test Location

Tests performed in a Certified ANSI Semi-Anechoic Chamber and Shielded Room.

Test Site Location : GD WITOL VACUUM ELECTRONIC EMC TEST LABORATORY

Beijiao, ShunDe, FoShan, GuangDong, 528311, China

Tel : (86)-757-26326917

Fax : (86)-757- 22607341

Test Facility

The test facility was recognized, certified, or accredited by the following organizations:

FCC - Registration No.: 910385

GD WITOL VACUUM ELECTRONIC EMC TEST LABORATORY has been registered and fully described in a report filed with the (FCC) Federal Communications Commission. The acceptance letter from the FCC was maintained in our files

Table of Contents

<i>GOVERNMENT DISCLAIMER NOTICE</i>	2
<i>REPRODUCTION CLAUSE</i>	2
<i>OPINIONS AND INTERPRETATIONS</i>	2
<i>STATEMENT OF MEASUREMENT UNCERTAINTY</i>	2
<i>ADMINISTRATIVE DATA</i>	3
<i>EUT DESCRIPTION</i>	4
<i>EUT MODEL DERIVED</i>	5
<i>TEST SUMMARY</i>	6
<i>LOAD FOR MICROWAVE OVEN</i>	7
<i>EUT EXERCISE SOFTWARE</i>	8
<i>EQUIPMENT MODIFICATION</i>	8
<i>EUT SAMPLE PHOTOS FOR MODEL EMB17G4V-S</i>	9
<i>TEST SYSTEM DETAILS</i>	15
<i>CONFIGURATION OF TESTED SYSTEM</i>	16
<i>ATTACHMENT 1 -RADIATION HAZARD TEST</i>	17
<i>ATTACHMENT 2 - INPUT POWER MEASUREMENT</i>	19
<i>ATTACHMENT 3 - RF OUTPUT POWER MEASUREMENT</i>	22
<i>ATTACHMENT 4 - OPERATING FREQUENCY MEASUREMENT</i>	25
<i>ATTACHMENT 5 - CONDUCTED EMISSION TEST RESULTS</i>	28
<i>ATTACHMENT 6 - RADIATED EMISSION TEST RESULTS</i>	34

List Attached Files

<i>Exhibit Type</i>	<i>File Description</i>	<i>File Name</i>
<i>Test Report</i>	<i>Test Report</i>	<i>VG8EMB17GYY_Test Report.pdf</i>
<i>Operation Description</i>	<i>Technical Description</i>	<i>VG8EMB17GYY_Operation Description.pdf</i>
<i>External Photos</i>	<i>External Photos</i>	<i>VG8EMB17GYY_External Photos.pdf</i>
<i>Internal Photos</i>	<i>Internal Photos</i>	<i>VG8EMB17GYY_Internal Photos.pdf</i>
<i>Block Diagram</i>	<i>Block Diagram</i>	<i>VG8EMB17GYY_Block Diagram.pdf</i>
<i>Schematics</i>	<i>Circuit Diagram</i>	<i>VG8EMB17GYY_Schematics.pdf</i>
<i>ID Label/Location</i>	<i>Label and Location</i>	<i>VG8EMB17GYY_Label & Location.pdf</i>
<i>User Manual</i>	<i>User Manual</i>	<i>VG8EMB17GYY_User's Manual.pdf</i>
<i>Test set-up photos</i>	<i>Test set-up photos</i>	<i>VG8EMB17GYY_Test Set-up Photos</i>

Government Disclaimer Notice

When government drawing, specification, or other data are used for any purpose other than in connection with a definitely related government procurement operation, the United States Government thereby incurs no responsibility nor any obligation whatsoever; and the fact that the Government may have formulated, furnished, or in any way supplied the said drawing, specifications, or other data, is not to be regarded by implication or otherwise in any manner licensing the holder or any other person or corporation, or conveying any rights or permission to manufacture, use, or sell patented invention that may in any way be related thereto. This report must not be used to claim product endorsement by NVLAP or any agency of the U.S. Government.

Reproduction Clause

Any reproduction of this document must be done in full. No single part of this document may be reproduced without permission from ECMG Electronic Technical Testing Corp (Shenzhen).

Opinions and Interpretations

This test report relates to the abovementioned equipment under test (EUT). Without the permission of ECMG Electronic Technical Testing Corp (Shenzhen) Test Lab this test report is not permitted to be duplicated in extracts. This test report does not entitle to carry any test mark on this or similar products. The manufacturer has sole responsibility of continued compliance of the device.

Statement of Measurement Uncertainty

The data and results referenced in the document are true and accurate. The reader is cautioned that there may be errors within the calibration limits of the equipment and facilities that can account for a nominal measurement error. Furthermore, component and process variability of devices similar to that tested may result in additional deviation.

Administrative Data

Test Sample : *Microwave Oven*

Model Numbers : *XMB17GYY-S, XMA17GYY-S*

Model Tested : *EMB17G4V-S, EMA17G4V-S*

Brand Name : 

Receipt Date : *September 19th, 2015*

Date Tested : *September 22th, 2015*

Applicant : *Guangdong Midea Kitchen Appliances Manufacturing Co.,Ltd.*

Address : *No.6, Yong An Road, Beijiao, Shunde, Foshan.*

Telephone : *(86)-757-23606480*

Fax : *(86)-757-22607341*

Manufacturer : *Guangdong Midea Kitchen Appliances Manufacturing Co.,Ltd.*

Address : *No.6, Yong An Road, Beijiao, Shunde, Foshan.*

Telephone : *(86)-757-23606480*

Fax : *(86)-757-22607341*

Factory : *Guangdong Midea Kitchen Appliances Manufacturing Co.,Ltd.*

Address : *No.6, Yong An Road, Beijiao, Shunde, Foshan.*

Telephone : *(86)-757-23606480*

Fax : *(86)-757-22607341*

EUT Description

Guangdong Midea Kitchen Appliances Manufacturing Co.,Ltd. model tested EMB17G4V-S,EMA17G4V-S (referred to as the EUT in this report) is a Microwave Oven.

The technical specifications of EUT are as below:

EMB17G4V-S:

Power Supply	208&230VAC/60Hz
Rated Input Power (Microwave)	3200W
Rated Output Power (Microwave)	2100W
Oven capacity	17L
Frequency	2450 MHz(Class B/Group 2)
Magnetron Model	2M248K
Magnetron Manufacturer	TOSHIBA

EMA17G4V-S:

Power Supply	208&230VAC/60Hz
Rated Input Power (Microwave)	2800W
Rated Output Power (Microwave)	1800W
Oven capacity	17L
Frequency	2450 MHz(Class B/Group 2)
Magnetron Model	2M248K
Magnetron Manufacturer	TOSHIBA

Note 1: Model EMB17G4V-S and EMA17G4V-S are electrically, functionally and constructionally identical. Only high-Voltage capacitance is different.

Note 2: For more detailed information or features please refer to user's manual of EUT.

EUT Model Derived

XMA(B)17GY-S model designations as follow:

X=E or A ;

M: Function: M = Microwave mode

A&B: Output rating A:1800W , B:2100W

17: Cavity Size: 34 = 34 liters

G= Design No

YY: 0-9 or A-Z, indicate different appearance;

S: means stainless steel Cavity

Model EMB17G4V-S and EMA17G4V-S were selected for the final testing.

Test Summary

The electromagnetic compatibility requirements on model EMB17G4V-S,EMA17G4V-S for this test are stated below. all results listed in this report relate exclusively to this above-mentioned model as the equipment under test. this report confers no approval or endorsement upon any other component, host or subsystem used in the test set-up.

Emission Tests				
Specifications	Description	Test Results	Test Point	Remark
FCC Part 18:2014 FCC/OST MP-5:1986 ANSI C63.4-2009	Radiation Hazard Measurement	Passed	Enclosure	Attachment 1
FCC Part 18:2014 FCC/OST MP-5:1986 ANSI C63.4-2009	Input Power Measurement	Passed	AC Input Port	Attachment 2
FCC Part 18:2014 FCC/OST MP-5:1986 ANSI C63.4-2009	RF Output power Measurement	Passed	EUT	Attachment 3
FCC Part 18:2014 FCC/OST MP-5:1986 ANSI C63.4-2009	Operating Frequency Measurement	Passed	EUT	Attachment 4
FCC Part 18:2014 FCC/OST MP-5:1986 ANSI C63.4-2009	Conducted Emission	Passed	AC Input Port	Attachment 5
FCC Part 18:2014 FCC/OST MP-5:1986 ANSI C63.4-2009	Radiated Emission	Passed	Enclosure	Attachment 6

Load for Microwave Oven

For all measurements the energy developed by the oven was absorbed by a dummy load consisting of a quantity of tap water in a beaker. If the oven was provided with a shelf or other utensil support, this support was in its initial normal position. For ovens rated at 1000watts or less power output, the beaker contained quantities of water as listed in the following subparagraphs. For ovens rated at more than 1000watts output, each quantity was increased by 50% for each 500watts or fraction thereof in excess of 1000 watts. Additional beakers were used if necessary.

-Load for power output measurement: 1000 milliliters of water in the beaker located in the center of the oven.

-Load for frequency measurement: 1000 milliliters of water in the beaker located in the center of the oven.

-Load for measurement of radiation on second and third harmonic: Two loads, one of 700 and the other of 300 milliliters, of water are used. Each load is tested both with the beaker located in the center of the oven and with it in the right front corner.

-Load for all other measurements: 700 milliliters of water, with the beaker located in the center of the oven.

Note: *Since rated output power of the EUT is 2100 watts for model EMB17G4V-S, 1800 watts for model EMA17G4V-S, so the following load water quantity shall apply:*

-Load for power output measurement: 2100&1800 milliliters of water in the beaker located in the center of the oven.

-Load for frequency measurement: 2100&1800 milliliters of water in the beaker located in the center of the oven.

-Load for measurement of radiation on second and third harmonic: Two loads, one of 1470&1260 and the other of 630&540 milliliters, of water are used. Each load is tested both with the beaker located in the center of the oven and with it in the right front corner.

-Load for all other measurements: 1470&1260 milliliters of water, with the beaker located in the center of the oven.

EUT Exercise Software

No test software support this test.

Equipment Modification

Any modifications installed previous to testing by Guangdong Midea Kitchen Appliances Manufacturing Co.,Ltd., will be incorporated in each production model sold or leased in United States.

There were no modifications installed by ECMG Electronic Technical Testing Corp (Shenzhen) test personnel.

EUT Sample Photos for Model EMB17G4V-S




EUT Front View



EUT Back View




Door Open View

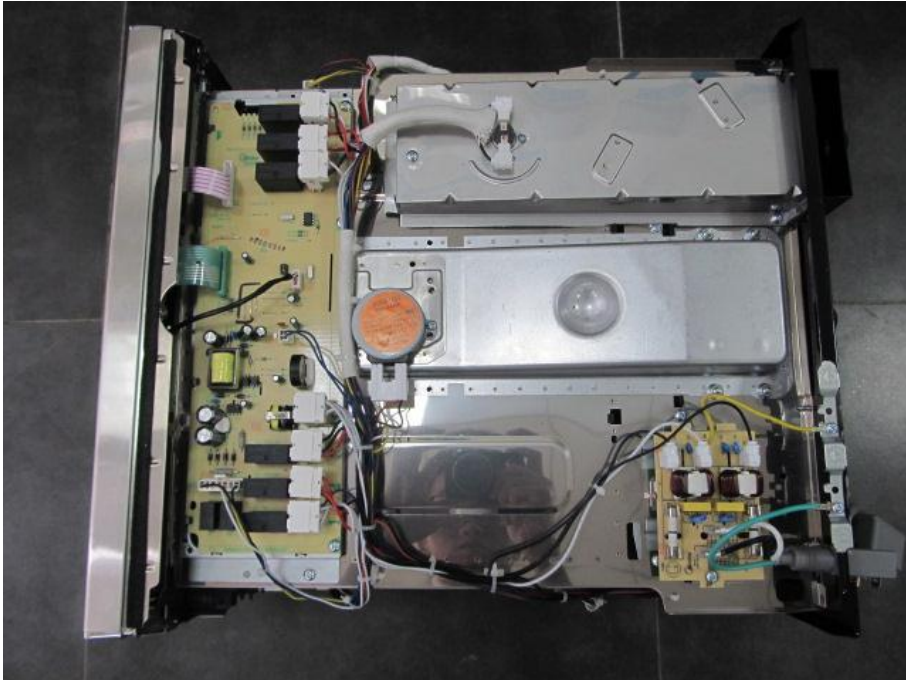

EUT Uncovered View #01




EUT Uncovered View #02

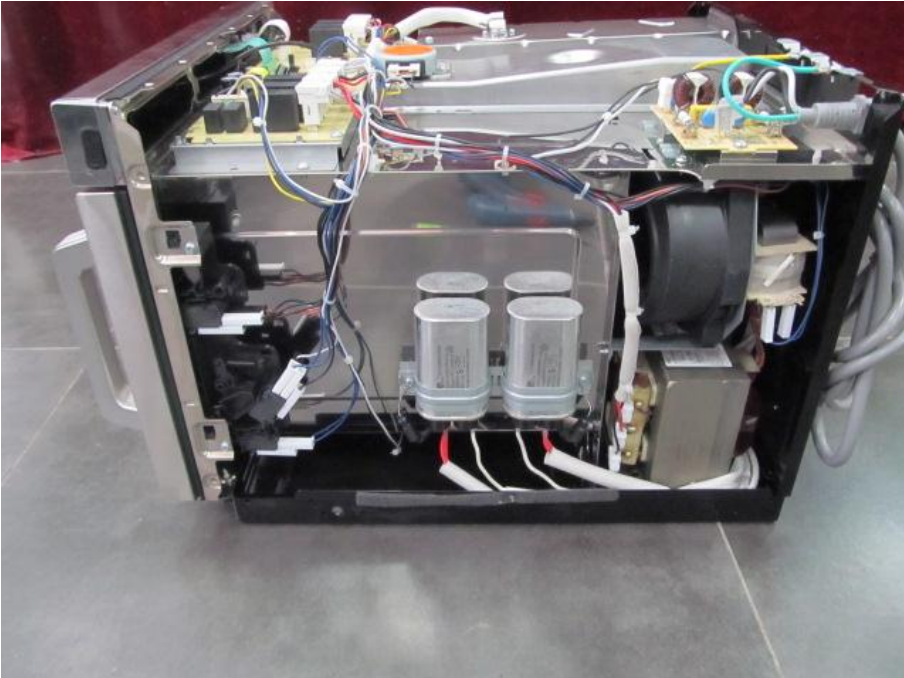


EUT Uncovered View #03




Magnetron Front View

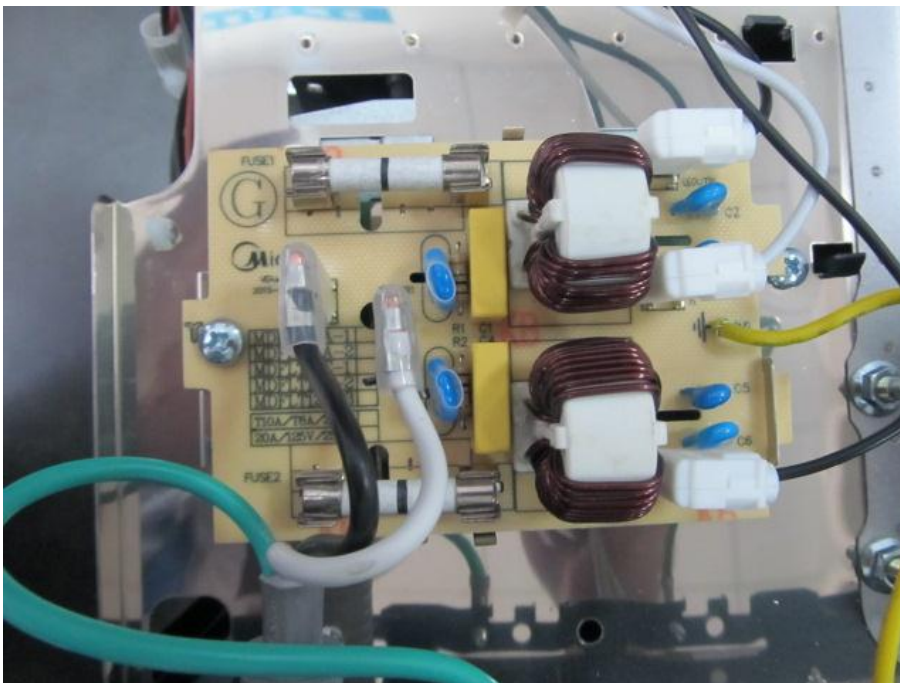


Power Filter Board- Top View

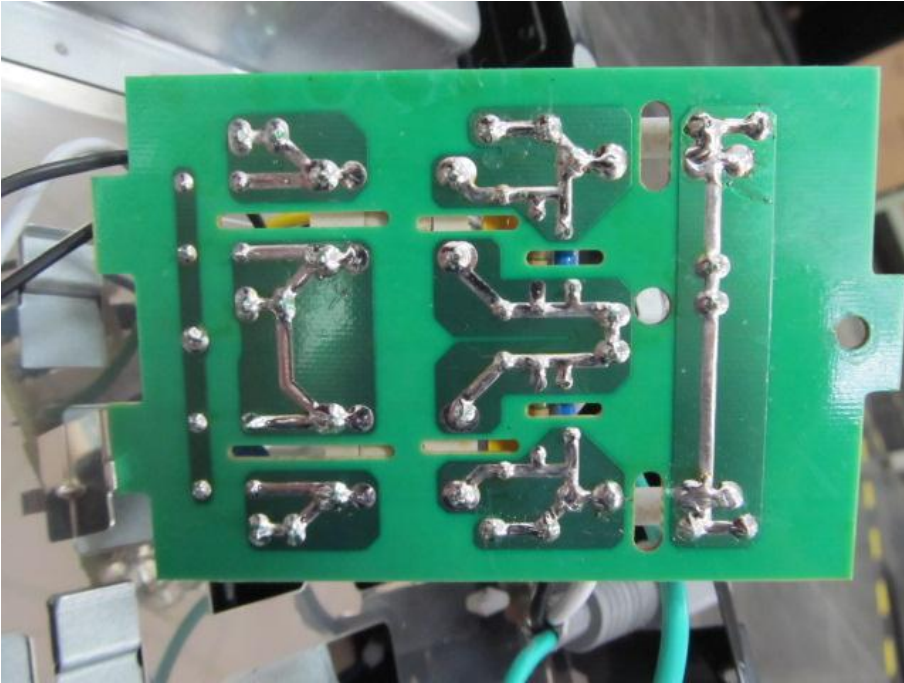

Power Filter Board- Bottom View

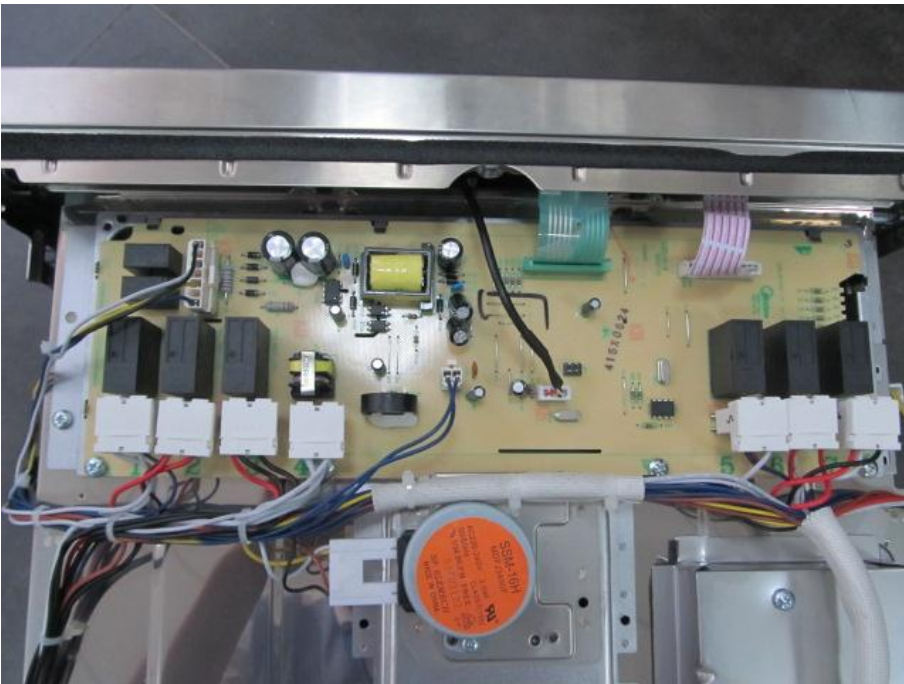

Mother board Top View

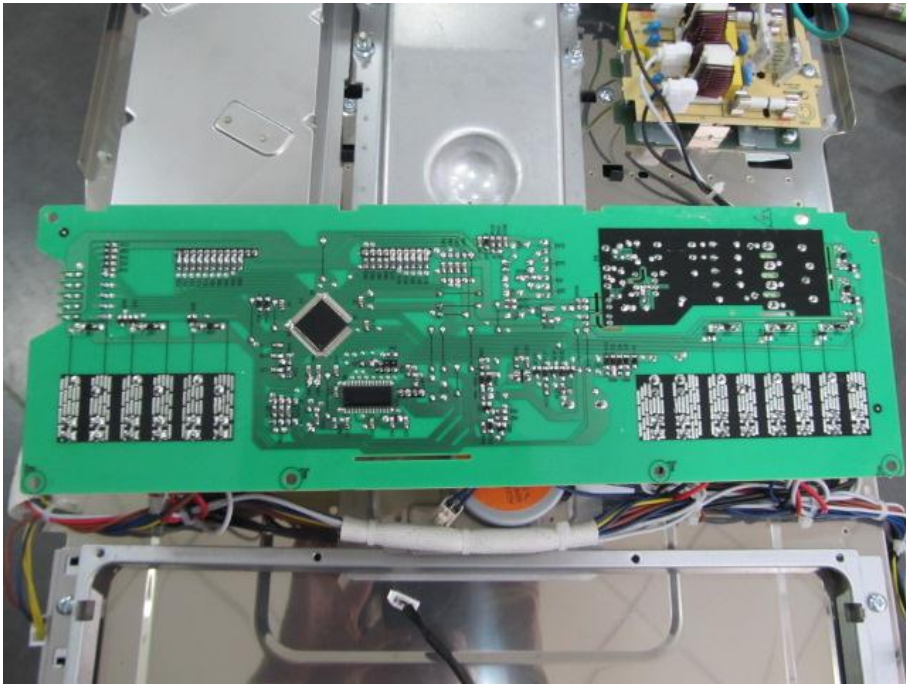

Mother board Bottom View


Test System Details

<i>EUT</i>					
Model Number:	<i>XMB17GYY-S, XMA17GYY-S</i>				
Model Tested:	<i>EMB17G4V-S,EMA17G4V-S</i>				
Description:	<i>Microwave Oven</i>				
Input:	<i>AC 208&230V/60Hz</i>				
Manufacturer:	<i>Guangdong Midea Kitchen Appliances Manufacturing Co.,Ltd.</i>				
<i>Support Equipment</i>					
<i>Description</i>	<i>Model Number</i>	<i>Serial Number</i>	<i>Manufacturer</i>		
<i>N/A</i>					
<i>Cable Description</i>					
<i>Description</i>	<i>From</i>	<i>To</i>	<i>Length (Meters)</i>	<i>Shielded (Y/N)</i>	<i>Ferrite (Y/N)</i>
<i>Power Cable</i>	<i>EUT</i>	<i>Plug</i>	<i>1.2</i>	<i>N</i>	<i>N</i>
<i>Note: The "EUT" means "Microwave Oven".</i>					

Note:

The EUT has been tested as an independent unit together with other necessary accessories or support units. The above support units or accessories were used to form a representative test configuration during the test tests.

Configuration of Tested System

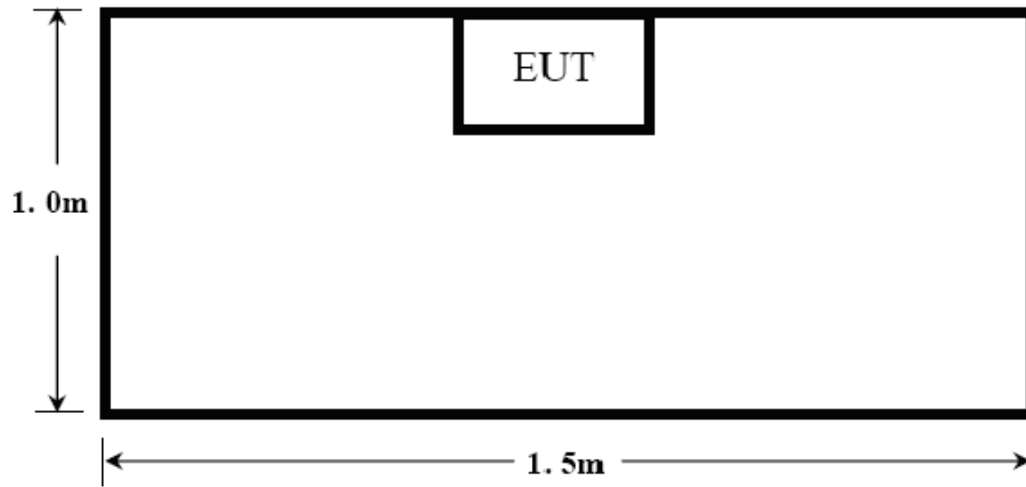

ATTACHMENT 1 -RADIATION HAZARD TEST

CLIENT:	Guangdong Midea Kitchen Appliances Manufacturing Co.,Ltd.	TEST STANDERD:	FCC Part 18
MODEL NUMBERS:	XMB17GYY-S, XMA17GYY-S	PRODUCT:	Microwave Oven
MODEL TESTED:	EMB17G4V-S,EMA17G4V-S	EUT DESIGNATION:	Commercial purpose
TEMPERATURE:	23 °C	HUMIDITY:	51%
ATM PRESSURE:	103kPa	GROUNDING:	Through AC Power Cord
TESTED BY:	Yang Dong mei	DATE OF TEST:	September 22 th , 2015
TEST REFERENCE:	FCC/OST MP-5:1986		
TEST PROCEDURE:	The EUT was set-up according to the FCC MP-5 and FCC Part 18 for Radiation Hazard Measurement. The measurement was using a microwave leakage meter to measure the Radiation leakage in the as-received condition with the oven door closed. A 1470&1260ml water load in a beaker was located in the center of the oven and the Microwave Oven was set to maximum power. While the oven operating, the microwavemeter will check the leakage and then record the maximum leakage.		
TESTED RANGE:	N/A		
TEST MODE:	Pre-scan has been conducted for all input voltage, the worst-case 208VAC/60Hz was selected for the final testing.		
TEST VOLTAGE:	AC 208V/60Hz		
RESULTS:	<p>EUT Model: EMB17G4V-S: There was no microwave leakage exceeding a power level of 0.05 mW/cm² observed at any point 5cm or more from the external surface of the oven.</p> <p>EUT Model: EMA17G4V-S: There was no microwave leakage exceeding a power level of 0.15 mW/cm² observed at any point 5cm or more from the external surface of the oven.</p> <p>A maximum of 1.0 mW/cm² is allowed in accordance with the applicable FCC standards. Hence, microwave leakage in the as-received condition with the oven door closed was below the maximum allowed. The test results relate only to the equipment under test provided by client.</p>		
CHANGES OR MODIFICATIONS:	There were no modifications installed by ECMG Electronic Technical Testing Corp (Shenzhen) test personnel.		
M. UNCERTAINTY:	0.0001 mW/cm ²		

Test Equipment List:

Test Equipment	Manufacturer	Model	Serial No.	Cal. Due Date
Microwave Measurement	HOLADAY	HI-1710A	00022150	2015.11.09

TESTED BY: 杨冬哲
ENGINEER

REVIEWED BY: James Jiao
SENIOR ENGINEER

Radiation Hazard Test Set up:



ATTACHMENT 2 – INPUT POWER MEASUREMENT

CLIENT:	Guangdong Midea Kitchen Appliances Manufacturing Co.,Ltd.	TEST STANDERD:	FCC Part 18
MODEL NUMBERS:	XMB17GYY-S, XMA17GYY-S	PRODUCT:	Microwave Oven
MODEL TESTED:	EMB17G4V-S,EMA17G4V-S	EUT DESIGNATION:	Commercial purpose
TEMPERATURE:	22°C	HUMIDITY:	59%
ATM PRESSURE:	103.1kPa	GROUNDING:	Through AC Power Cord
TESTED BY:	Yang Dong mei	DATE OF TEST:	September 22 th , 2015
TEST REFERENCE:	ANSI C63.4-2009, FCC/OST MP-5:1986		
TEST PROCEDURE:	The EUT was set up according to the FCC MP-5 and FCC Part 18 for input power measurement. The input power and current was measured using a power analyzer. A 1470&1260ml water load in a beaker was located in the center of the oven and the Microwave Oven was set to maximum power. While the oven is operating, use a voltmeter and an ampmeter to test the AC input voltage and current.		
TESTED RANGE:	N/A		
TEST VOLTAGE:	208&230VAC / 60Hz		
RESULTS :	Based on the measured input power, the EUT was found to be operating within the intended specifications. The test results relate only to the equipment under test provided by client.		
CHANGES OR MODIFICATIONS:	There were no modifications installed by ECMG Electronic Technical Testing Corp (Shenzhen) test personnel.		
M. UNCERTAINTY :	± 5W		

Test Data:

EUT Model:EMB17G4V-S

<i>Input voltage (V)</i>	<i>Input Current (A)</i>	<i>Measured Input Power (W)</i>	<i>Rated input Power (W)</i>
208.2	14.79	2997	3200
230.2	14.21	3181	3200


EUT Model:EMA17G4V-S

<i>Input voltage (V)</i>	<i>Input Current (A)</i>	<i>Measured Input Power (W)</i>	<i>Rated input Power (W)</i>
208.2	12.96	2601	2800
230.4	12.60	2768	2800

Test Equipments List:

<i>Test Equipment</i>	<i>Manufacturer</i>	<i>Model</i>	<i>Serial No.</i>	<i>Cal. Due Date</i>
Power Meter	Ainuo	AN8726C	058704200	2016.02.06

TESTED BY:



ENGINEER

REVIEWED BY:



SENIOR ENGINEER

Input Power Test Set up:



ATTACHMENT 3 – RF OUTPUT POWER MEASUREMENT

CLIENT:	Guangdong Midea Kitchen Appliances Manufacturing Co.,Ltd.	TEST STANDERD:	FCC Part 18
MODEL NUMBERS:	XMB17GY-S, XMA17GY-S	PRODUCT:	Microwave Oven
MODEL TESTED:	EMB17G4V-S,EMA17G4V-S	EUT DESIGNATION:	Commercial purpose
TEMPERATURE:	22°C	HUMIDITY:	60%RH
ATM PRESSURE:	103kPa	GROUNDING:	Through AC Power Cord
TESTED BY:	Yang Dong mei	DATE OF TEST:	September 22 th , 2015
TEST REFERENCE:	ANSI C63.4-2009, FCC/OST MP-5:1986		
TEST PROCEDURE:	<p>The EUT was set up according to the FCC MP-5 and FCC Part 18 for RF output power Measurement. The Caloric Method was used to determine maximum RF output power. The initial temperature of the water load was measured. A 2100&1800ml water load in a beaker was located in the center of the oven. The oven was operated at maximum output power for 120 seconds, the temperature of the water was re-measured.</p> <p>RF Output Power $= (4.2 \text{ joules/calorie})(\text{volume in milliliters})(\text{temperature rise}) / (\text{time in seconds})$ $= 4.2 \text{ joules/calorie} \times 2100(1800) \times (\text{Final Temp} - \text{Initial Temp}) / 120$</p>		
TESTED RANGE:	N/A		
TEST VOLTAGE:	208&230VAC / 60Hz		
RESULTS:	<p>EUT Model: EMB17G4V-S: The worst-case RF Output Power is 1830.2 watts in 230VAC,60Hz. The test results relate only to the equipment under test provided by client.</p> <p>EUT Model: EMA17G4V-S: The worst-case RF Output Power is 1600.2 watts in 230VAC,60Hz. The test results relate only to the equipment under test provided by client.</p>		
CHANGES OR MODIFICATIONS:	There were no modifications installed by ECMG Electronic Technical Testing Corp (Shenzhen) test personnel.		
M. UNCERTAINTY:	± 0.3°C		

Test Result:

EUT Model:EMB17G4V-S

Input Voltage (VAC)	Initial Temp (°C)	Final Temp (°C)	Measured Times (s)	Measured output Power (W)
208	20.2	42.6	120s	1646.4
230	20.5	45.4	120s	1830.2

$RF\ Output\ Power\ (W) = 4.2 \times 2100 \times (Final\ Temp - Initial\ Temp) / 120$

EUT Model:EMA17G4V-S

Input Voltage (VAC)	Initial Temp (°C)	Final Temp (°C)	Measured Times (s)	Measured output Power (W)
208	19.7	42.8	120s	1455.3
230	19.9	45.3	120s	1600.2

$RF\ Output\ Power\ (W) = 4.2 \times 1800 \times (Final\ Temp - Initial\ Temp) / 120$

Test Equipments list:

Test Equipment	Manufacturer	Model	Serial No.	Cal. Due Date
Digit Thermometer	Fluke Corporation	Fluke 51 II	87500204	2016.03.26
Stopwatch	CASIO	HS-3	05Q07R	2015.08.06

TESTED BY: 杨冬松
ENGINEER

REVIEWED BY: James Jia
SENIOR ENGINEER

RF-Output Power Test Set up:



ATTACHMENT 4 – OPERATING FREQUENCY MEASUREMENT

CLIENT:	Guangdong Midea Kitchen Appliances Manufacturing Co.,Ltd.	TEST STANDERD:	FCC Part 18
MODEL NUMBERS:	XMB17GY-S, XMA17GY-S	PRODUCT:	Microwave Oven
MODEL TESTED:	EMB17G4V-S,EMA17G4V-S	EUT DESIGNATION:	Commercial purpose
TEMPERATURE:	22°C	HUMIDITY:	60%RH
ATM PRESSURE:	101.1kPa	GROUNDING:	Through AC Power Cord
TESTED BY:	Yang Dong mei	DATE OF TEST:	September 22 th , 2015
TEST REFERENCE:	ANSI C63.4-2009, FCC/OST MP-5:1986		
TEST PROCEDURE:	<p>The EUT was set up according to the FCC MP-5 and FCC Part 18 for Operating Frequency Measurement.</p> <p>1) The variation of frequency with time. The operating frequency was measured using a spectrum analyzer. Starting with the EUT at room temperature, a 2100&1800 ml water load in a beaker was located in the center of the oven. Set a spectrum analyzer with antenna at 3 meters distance form the oven and the oven was operated at maximum output power. The fundamental operating frequency was monitored until the water load was reduced to 20 percent of the original load.</p> <p>2) The variation of frequency with Line Voltage. The operating frequency was measured using a spectrum analyzer. The EUT was operated/warmed by at least 10 minutes of use with a 2100&1800ml water load at room temperature at the beginning of the test. Then the operating frequency was monitored as the input voltage was varied between 80 and 125 percent of the nominal rating.</p>		
TESTED RANGE:	2450 ± 50MHz		
TEST MODE:	Pre-scan has been conducted for all input voltage, the worst-case 208VAC/60Hz was selected for the final testing.		
TEST VOLTAGE:	208VAC / 60Hz		
RESULTS:	Please refer to following pages for details of the variation in operating frequency with time & line voltage measurement. The test results relate only to the equipment under test provided by client.		
CHANGES OR MODIFICATIONS:	There were no modifications installed by ECMG Electronic Technical Testing Corp (Shenzhen) test personnel.		
M. UNCERTAINTY:	Freq. ±10kHz		

EUT Model: EMB17G4V-S:
Variation in Operating Frequency with Time:

<i>Minimum Frequency (MHz)</i>	<i>Maximum Frequency (MHz)</i>
2451.2	2452.8

Variation in Operating Frequency with Line Voltage:

<i>Minimum Frequency (MHz)</i>	<i>Maximum Frequency (MHz)</i>
2450.2	2452.4
<i>Note: Line voltage varied from 166.4Vac to 260Vac.</i>	

EUT Model: EMA17G4V-S:
Variation in Operating Frequency with Time:

<i>Minimum Frequency (MHz)</i>	<i>Maximum Frequency (MHz)</i>
2449.6	2451.8

Variation in Operating Frequency with Line Voltage:

<i>Minimum Frequency (MHz)</i>	<i>Maximum Frequency (MHz)</i>
2448.2	2452.2
<i>Note: Line voltage varied from 166.4Vac to 260Vac.</i>	

Test Equipments List:

Test Equipment	Manufacturer	Model	Serial No.	Last Cal.	Cal. Due
EMI test receiver	R&S	ESIB-26	100174	11/18/2014	11/17/2015
Horn Antenna	R&S	HF906	100311	11/20/2014	11/21/2015

Note: All testing were performed using internationally recognized standards. All test instruments were calibrated and traceable to the National Institute of Standards and Technology (NIST).

TESTED BY: 杨冬松
ENGINEER

REVIEWED BY: James Jiao
SENIOR ENGINEER


Operating Frequency Test Set-up:




ATTACHMENT 5 – CONDUCTED EMISSION TEST RESULTS

CLIENT:	Guangdong Midea Kitchen Appliances Manufacturing Co.,Ltd.	TEST STANDERD:	FCC Part 18
MODEL NUMBERS:	XMB17GY-S, XMA17GY-S	PRODUCT:	Microwave Oven
MODEL TESTED:	EMB17G4V-S,EMA17G4V-S	EUT DESIGNATION:	Commercial purpose
TEMPERATURE:	22°C	HUMIDITY:	60%RH
ATM PRESSURE:	101.1kPa	GROUNDING:	Through AC Power Cord
TESTED BY:	Yang Dong mei	DATE OF TEST:	September 22 th , 2015
TEST REFERENCE:	ANSI C63.4-2009, FCC/OST MP-5:1986		
TEST PROCEDURE:	The EUT was set up according to the guideline of ANSI C63.4-2009 & FCC MP-5 for conducted emissions. The measurement was using a AMN on each line and an EMI receiver peak scan was made at the frequency measurement range. The six highest significant peaks were then marked, and these signals were then quasi-peaked and averaged. The frequency range investigated was from 150kHz to 30MHz.		
TESTED RANGE:	150kHz to 30MHz		
TEST MODE:	Pre-scan has been conducted between EMB17G4V-S and EMA17G4V-S, The worst-case model EMB17G4V-S was selected for the final testing.		
TEST VOLTAGE:	208&230VAC / 60Hz		
RESULTS:	The EUT meets the requirements of test reference for Conducted Emissions.The test results relate only to the equipment under test provided by client.		
CHANGES OR MODIFICATIONS:	There were no modifications installed by ECMG Electronic Technical Testing Corp (Shenzhen) test personnel.		
M. UNCERTAINTY:	±2.5 dB		


Conducted Emission Test Set up:

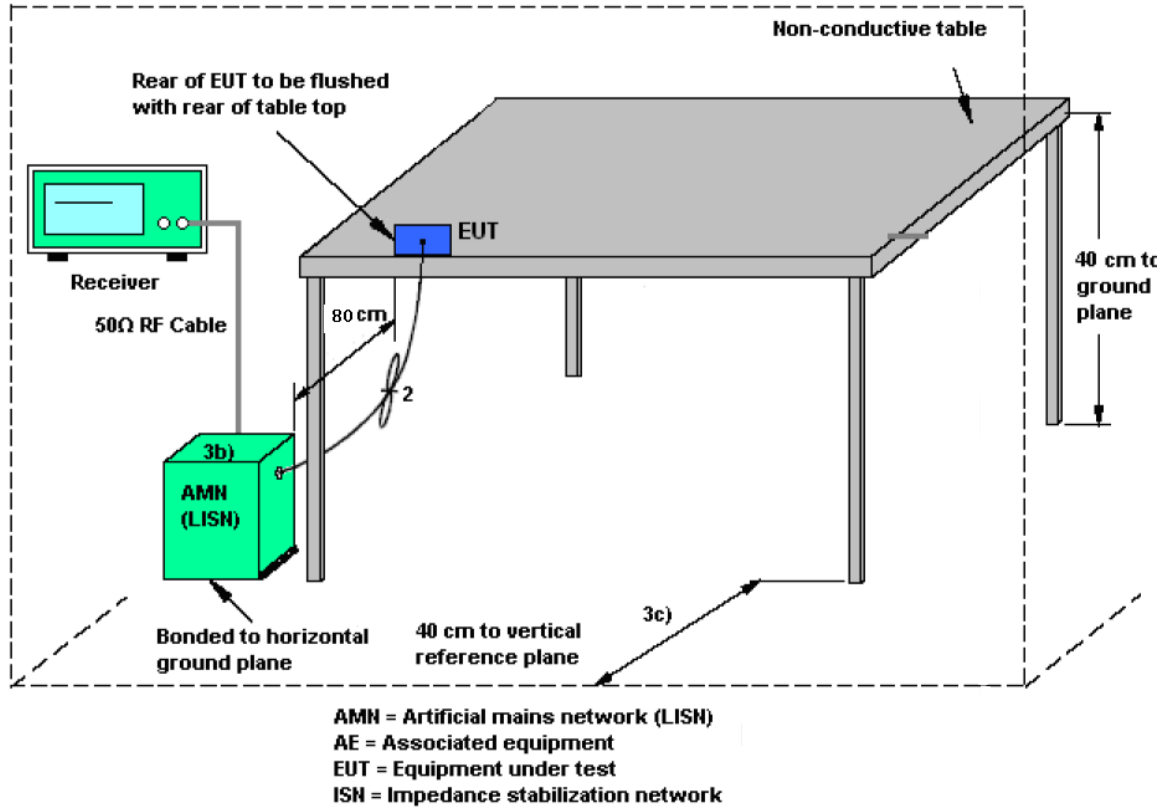


EUT Model: EMB17G4V-S

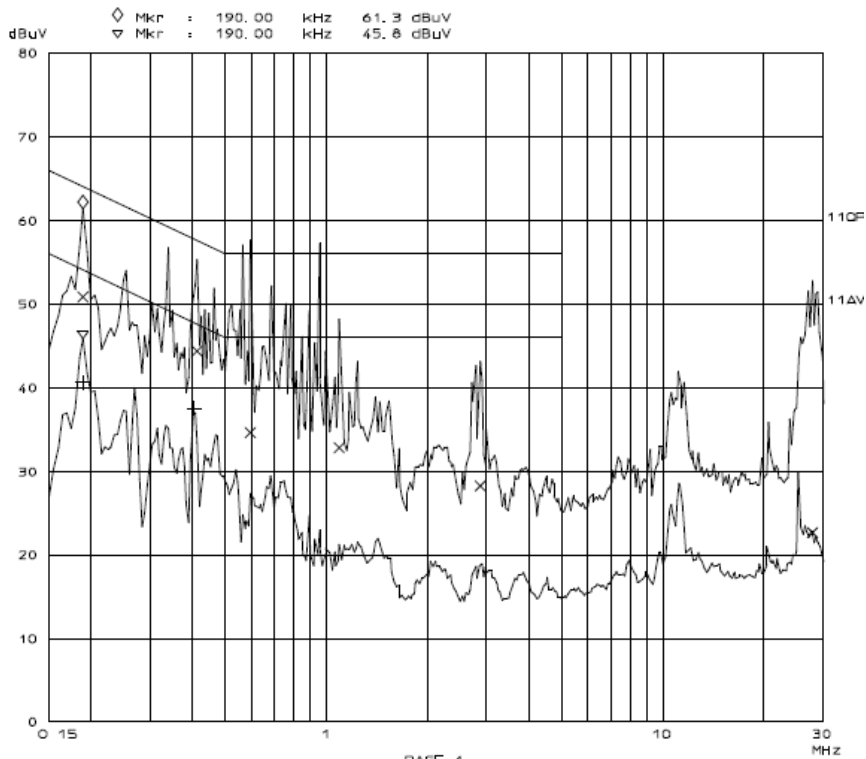


Line L Conducted Emission Graph-208V

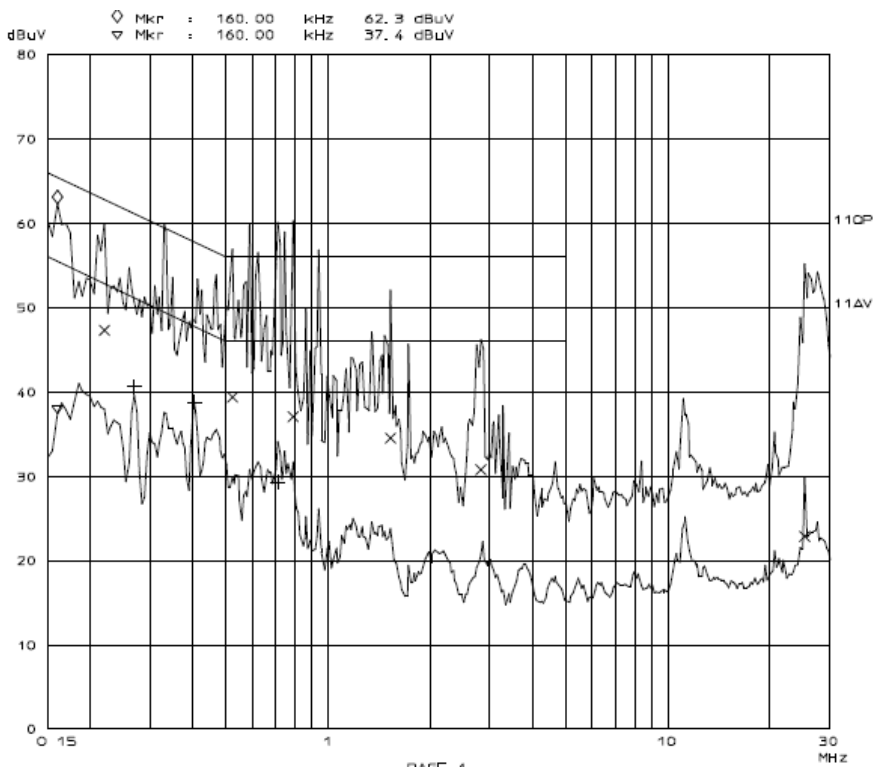

Line N Conducted Emission Graph-208V

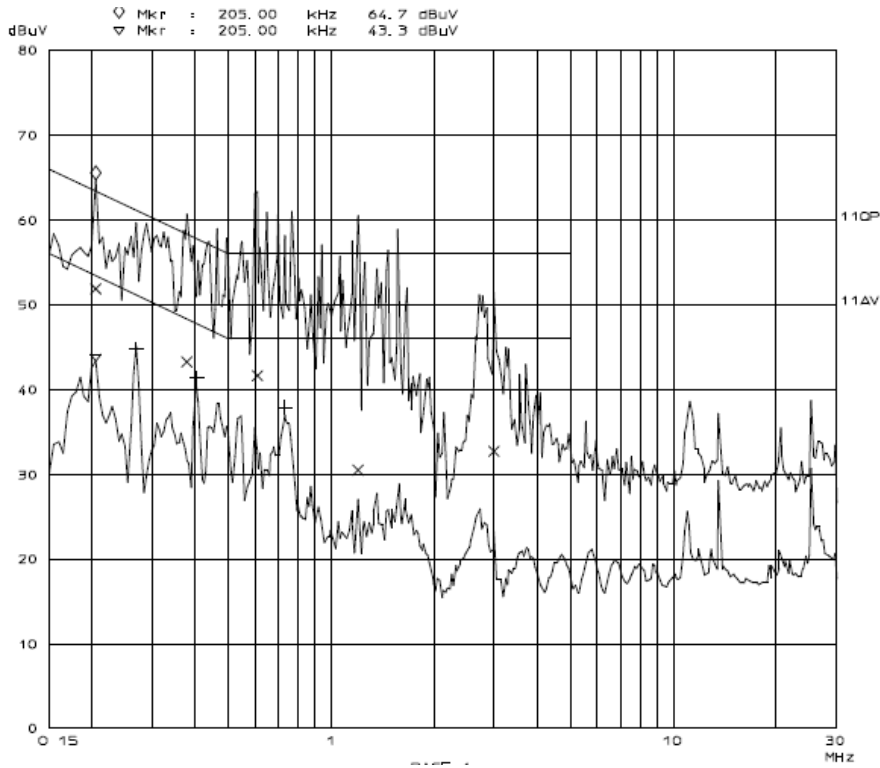

Line L Conducted Emission Graph-230V

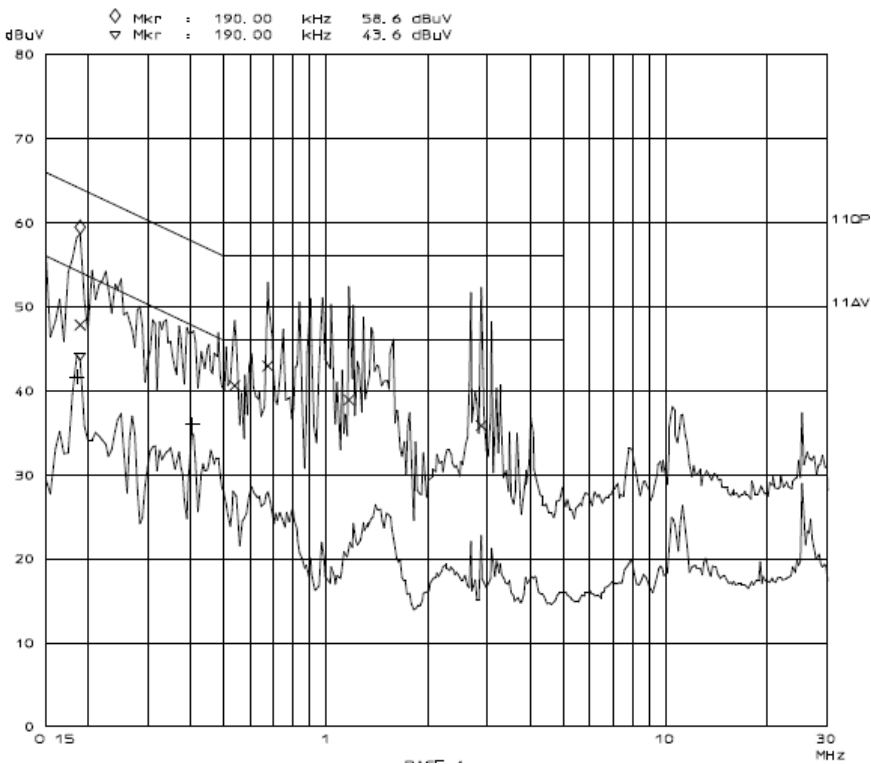

Line N Conducted Emission Graph-230V

Test Data: (208V)

Lines (L/N)	Frequency (MHz)	Corrected QP Level (dBuV)	Limits QP (dBuV)	Margin QP (dB)	Frequency (MHz)	Corrected AV Level (dBuV)	Limits AV (dBuV)	Margin QP (dB)
L	1.095	32.7	56	-23.3	1.095	/	46	/
L	2.870	28.2	56	-27.8	2.870	/	46	/
L	27.940	22.6	60	-37.4	27.940	/	50	/
N	1.530	34.5	56	-21.5	1.530	/	46	/
N	2.820	30.7	56	-25.3	2.820	/	46	/
N	25.315	22.8	60	-37.2	25.315	/	50	/

Note :

- 1) All readings are using a bandwidth of 9 kHz, with a 500 ms sweep time. A video filter was not used.
- 2) "QP" means "Quasi-Peak" values, "AV" means "Average" values.
- 3) The other reading are too low against official limits that are not be recorded.

Test Data: (230V)

Lines (L/N)	Frequency (MHz)	Corrected QP Level (dBuV)	Limits QP (dBuV)	Margin QP (dB)	Frequency (MHz)	Corrected AV Level (dBuV)	Limits AV (dBuV)	Margin QP (dB)
L	0.610	41.6	56	-14.4	0.610	/	46	/
L	1.200	30.5	56	-25.5	1.200	/	46	/
L	2.995	32.6	56	-23.4	2.995	/	46	/
N	0.675	42.9	56	-13.1	0.675	/	46	/
N	1.175	38.8	56	-17.2	1.175	/	46	/
N	2.870	35.8	56	-20.2	2.870	/	46	/

Note :

- 1) All readings are using a bandwidth of 9 kHz, with a 500 ms sweep time. A video filter was not used.
- 2) "QP" means "Quasi-Peak" values, "AV" means "Average" values.
- 3) The other reading are too low against official limits that are not be recorded.

Test Equipments List:

Test Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Cal. Due
EMI test receiver	R&S	ESC30	100267	2015-2-10	2016-02-09
LISN	SCHNANER	NNB42	00003	2015-2-10	2016-02-09
Transient Limiter	Agilent	11947A	3107A03648	11/19/2014	11/18/2015
Shielding Room	TDK	8m×4m×3m	N/A	04/17/2014	04/16/2017

Note: All testing were performed using internationally recognized standards. All test instruments were calibrated and traceable to the National Institute of Standards and Technology (NIST).

TESTED BY: 杨冬松
ENGINEER

REVIEWED BY: James Jiao
SENIOR ENGINEER


Conducted Emission Test Set-up:




ATTACHMENT 6 - RADIATED EMISSION TEST RESULTS

CLIENT:	Guangdong Midea Kitchen Appliances Manufacturing Co.,Ltd.	TEST STANDERD:	FCC Part 18
MODEL NUMBERS:	XMB17GYY-S, XMA17GYY-S	PRODUCT:	Microwave Oven
MODEL TESTED:	EMB17G4V-S, EMA17G4V-S	EUT DESIGNATION:	Commercial purpose
TEMPERATURE:	22°C	HUMIDITY:	63%RH
ATM PRESSURE:	103.0kPa	GROUNDING:	Through AC Power Cord
TESTED BY:	Yang Dong mei	DATE OF TEST:	September 22 , 2015
TEST REFERENCE:	ANSI C63.4-2009, FCC/OST MP-5:1986		
TEST PROCEDURE:	<p>The EUT was set up according to the guidelines of ANSI C63.4-2009& FCC MP-5 for radiated emissions. Microwave Oven was placed on a 1m *1.5m nonconductive table. The top of the table is 1.0 m above the ground. The table is placed on a flush mounted metal turntable. An EMI receiver peak scan was made at the frequency measurement range (pre-scan) in an Anechoic chamber. Signal discrimination was then performed and the significant peaks marked. All data was recorded in Quasi-peak detection mode from 30 MHz to 1GHz and average detector mode above 1GHz.The following data lists the significant emission frequencies, measured levels, correction factors (including cable and antenna correction factors), and the corrected readings against the limits. Explanation of the Correction Factor are given as follows:</p> <p>FS= RA + AF + CF - AG</p> <p>Where: FS = Field Strength</p> <p>RA = Receiver Amplitude</p> <p>AF = Antenna Factor</p> <p>CF = Cable Attenuation Factor</p> <p>AG = Amplifier Gain</p>		
TESTED RANGE:	30MHz to 24.5GHz		
TEST MODE:	Pre-scan has been conducted for all input voltage and between EMB17G4V-S and EMA17G4V-S.The worst-case model EMB17G4V-S at 230VAC/60Hz was selected for the final testing.		
TEST VOLTAGE:	230VAC / 60Hz		
RESULTS:	The EUT meet the requirements of test reference for radiated emissions. The test results relate only to the equipment under test provided by client.		
CHANGES OR MODIFICATIONS:	There were no modifications installed by ECMG Electronic Technical Testing Corp (Shenzhen) test personnel.		
M. UNCERTAINTY:	± 3.2 dB		

For radiated emissions from 30MHz to 1GHz

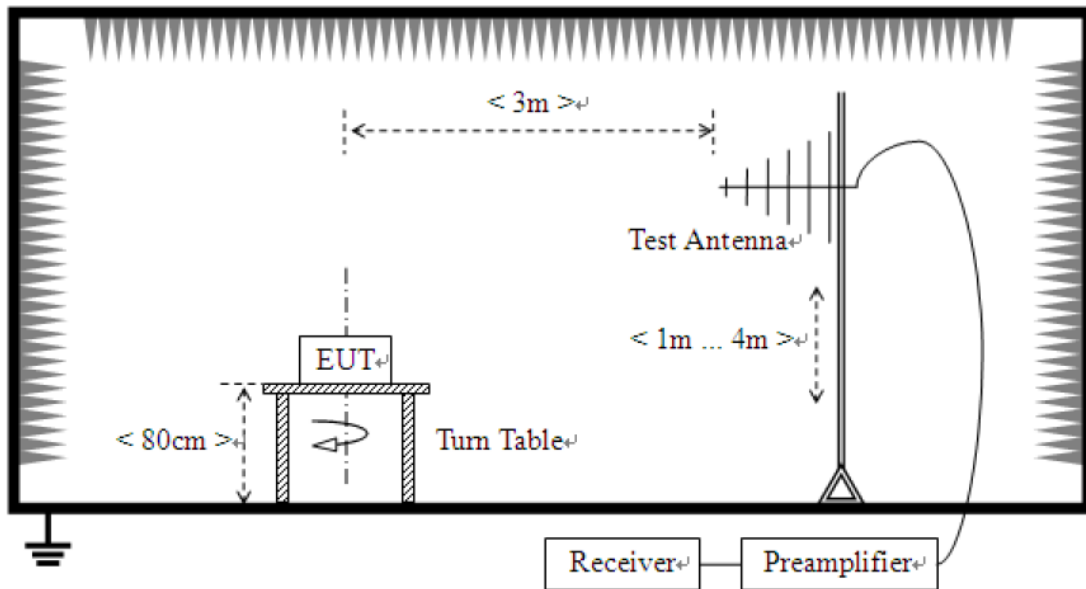

For radiated emissions above 1GHz

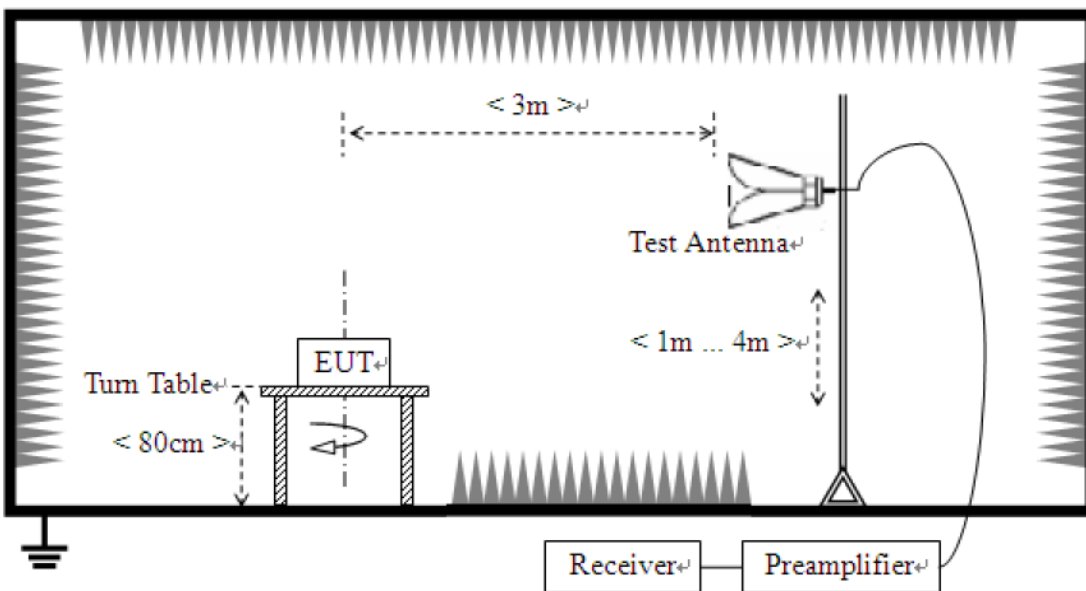

Field strength limits for out-of-band emissions :

For RF output power <500W, Limit at 300m = 27.96dBuV/m

For RF output power >500W, Limit at 300m = 20log [25*SQRT (Power/500)]dBuV/m

Test Data :

30MHz - 1GHz						
Frequency [MHz]	Antenna Polarization [V/H]	Corrected Reading [dBμV/m]	Factor (dB)	Field Strength [dBμV/m]	Delta, QP [dB]	3 Meters Limits [dBμV/m]
247.715	V	18.7	13.4	32.1	-41.5	73.6
359.216	V	15	14.4	29.4	-44.2	73.6
496.533	V	9.8	17.5	27.3	-42.4	73.6
259.378	H	23.3	12.9	36.2	-37.4	73.6
366.293	H	10.9	14.8	25.7	-47.9	73.6
409.058	H	11	16.3	27.3	-46.3	73.6
Note: 1) All readings are quasi-peak unless stated otherwise, using a bandwidth of 120kHz, with a 60s sweep time. A video filter was not used. 2) Field Strength = Read Level + Factor, Factor = Antenna Factor + Cable Loss - Preamp Factor.						
1 - 25GHz						
Frequency [GHz]	Antenna Polarization [V/H]	Corrected Reading [dBμV/m]	Factor (dB)	Field Strength [dBμV/m]	Delta, AV [dB]	3 Meters Limits [dBμV/m]
16.7975	V	12.59	39.71	52.3	-21.3	73.6
9.2825	V	15.88	27.32	43.2	-30.4	73.6
8.6183	V	17.63	24.67	42.3	-31.3	73.6
8.6212	H	16.53	24.67	41.2	-32.4	73.6
14.7835	H	16.06	35.34	51.4	-22.2	73.6
16.7675	H	12.39	39.71	52.1	-21.5	73.6
Note: 1) All readings are average unless stated otherwise, using a bandwidth of 1MHz, with a 60s sweep time. A video filter was not used. 2) Field Strength = Read Level + Factor, Factor = Antenna Factor + Cable Loss - Preamp Factor.						

Test Equipments List:

Test Equipment	Manufacturer	Model	Serial No.	Last Cal.	Cal. Due
EMI Test Receiver	R&S	ESIB-26	100174	11/19/2014	11/18/2015
Horn Antenna	R&S	HF906	100311	11/21/2014	11/20/2015
Hybrid Log Periodic Antenna	TDK	HLP-3003C	130144	11/21/2014	11/20/2015
Loop Antenna	ETS	ETS-6152	24934	11/21/2014	11/20/2015
Anechoic Chamber	TDK	9m×6 m×5.7m	N/A	04/17/2014	04/16/2015

Note: All testing were performed using internationally recognized standards. All test instruments were calibrated and traceable to the National Institute of Standards and Technology (NIST).

TESTED BY: 杨冬松
ENGINEER

REVIEWED BY: James Fio
SENIOR ENGINEER

Radiated Emission Test Set-up (30 -1,000MHz):



Radiated Emission Test Set-up (1-25GHz):



****** End Of Report ******