



Valued Quality. Delivered.

TEST REPORT

Report No.: 14010330HKG-005

Voxx Accessories Corp.

Application
For
Certification
(Original Grant)
(FCC ID: VIX-ARSWP1)

2.4GHz Bluetooth Transceiver

Prepared and Checked by:

Approved by:

Signed On File
Chan Kwan Ho, Alex
Assistant Engineer

Wong Kwok Yeung, Kenneth
Lead Engineer
Date: March 26, 2014

- The test report only allows to be revised within the retention period unless further standard or the requirement was noticed.
- This report is for the exclusive use of Intertek's Client and is provided pursuant to the agreement between Intertek and its Client. Intertek's responsibility and liability are limited to the terms and conditions of the agreement. Intertek assumes no liability to any party, other than to the Client in accordance with the agreement, for any loss, expense or damage occasioned by the use of this report. Only the Client is authorized to permit copying or distribution of this report and then only in its entirety. Any use of the Intertek name or one of its marks for the sale or advertisement of the tested material, product or service must first be approved in writing by Intertek. The observations and test results in this report are relevant only to the sample tested. This report by itself does not imply that the material, product, or service is or has ever been under an Intertek certification program.

Intertek Testing Services Hong Kong Ltd.

2/F., Garment Centre, 576 Castle Peak Road, Kowloon, Hong Kong.

Tel: (852) 2173 8888 Fax: (852) 2785 5487 Website: www.hk.intertek-ettsemko.com

INTERTEK TESTING SERVICES

GENERAL INFORMATION

Voxx Accessories Corp.
BRAND NAME: RCA, AR
MODEL: ARSWP1

FCC ID: VIX-ARSWP1

Grantee:	Voxx Accessories Corp.
Grantee Address:	3502 Woodview Trace, Suite 220, Indianapolis, Indiana 46268, United States.
Contact Person:	Milan Phillabaum
Tel:	(317)-218 7302
Fax:	(317)-569 1307
e-mail:	N/A
Manufacturer 1:	Golden Regent Electronics Industrial Ltd.
Manufacturer Address:	Huanhjinhu Management District, Guangdong Province, China.
Manufacturer 2:	HOSSACK(VIETNAM)CO,LTD
Manufacturer Address:	Plot 226/4, Road 2, AMATA Industrial Park, Dong Nai Province, Viet Nam.
Brand Name:	RCA, AR
Model:	ARSWP1
Type of EUT:	2.4GHz Bluetooth Transceiver
Description of EUT:	Outlet speaker
Serial Number:	N/A
FCC ID:	VIX-ARSWP1
Date of Sample Submitted:	January 08, 2014
Date of Test:	January 08, 2014 to February 24, 2014
Report No.:	14010330HKG-005
Report Date:	March 26, 2014
Environmental Conditions:	Temperature: +10 to 40°C Humidity: 10 to 90%

INTERTEK TESTING SERVICES

SUMMARY OF TEST RESULT

Voxx Accessories Corp.
BRAND NAME:RCA, AR
MODEL: ARSWP1

FCC ID: VIX-ARSWP1

TEST SPECIFICATION	REFERENCE	RESULTS
AC Power Line Conducted Emissions	15.207	Pass
Radiated Emission Radiated Emission on the Bandedge	15.249(a) 15.209	Pass

The equipment under test is found to be complying with the following standards:
FCC Part 15, October 1, 2012 Edition

- Note: 1. The EUT uses a permanently attached antenna which, in accordance to section 15.203, is considered sufficient to comply with the provisions of this section.
2. Pursuant to FCC part 15 Section 15.215(c), the 20 dB bandwidth of the emission was contained within the frequency band designated (mentioned as above) which the EUT operated. The effects, if any, from frequency sweeping, frequency hopping, other modulation techniques and frequency stability over excepted variations in temperature and supply voltage were considered.

INTERTEK TESTING SERVICES

Table of Contents

1.0	<u>General Description</u>	1
1.1	Product Description	1
1.2	Related Submittal(s) Grants.....	1
1.3	Test Methodology	1
1.4	Test Facility	1
2.0	<u>System Test Configuration</u>	2
2.1	Justification.....	2
2.2	EUT Exercising Software.....	2
2.3	Special Accessories	2
2.4	Equipment Modification	2
2.5	Measurement Uncertainty.....	2
2.6	Support Equipment List and Description.....	2
3.0	<u>Emission Results</u>	3
3.1	Field Strength Calculation.....	3
3.2	Radiated Emission Configuration Photograph	4
3.3	Radiated Emission Data	4
3.4	Conducted Emission Configuration Photograph	4
3.5	Conducted Emission Data	4
4.0	<u>Equipment Photographs</u>	11
5.0	<u>Product Labelling</u>	11
6.0	<u>Technical Specifications</u>	11
7.0	<u>Instruction Manual</u>	11
8.0	<u>Miscellaneous Information</u>	12
8.1	Measured Bandwidth.....	12
8.2	Discussion of Pulse Desensitization	15
8.3	Calculation of Average Factor.....	15
8.4	Emissions Test Procedures	16
9.0	<u>Confidentiality Request</u>	17
10.0	<u>Equipment List</u>	18

INTERTEK TESTING SERVICES

1.0 General Description

1.1 Product Description

The Equipment Under Test (EUT) is a 2.4GHz Bluetooth speaker. The Bluetooth portion is operating between 2402MHz and 2480MHz (79 channels with 1MHz channel spacing). The EUT is powered by 120VAC. It has a USB port and AC port for charging corresponding device. When the EUT is switched ON, the light will be flashing. The corresponding Bluetooth device would be searched and connected to the EUT before playing audio. After pairing, the light will stay lit.

Antenna Type: Internal, Integral

For electronic filing, the brief circuit description is saved with filename: descri.pdf.

1.2 Related Submittal(s) Grants

This is a single application for certification of a transceiver.

1.3 Test Methodology

Both AC mains line-conducted and radiated emission measurements were performed according to the procedures in ANSI C63.4 (2009). All radiated measurements were performed in an Open Area Test Site. Preliminary scans were performed in the Open Area Test Site only to determine worst case modes. All radiated tests were performed at an antenna to EUT distance of 3 meters, unless stated otherwise in the “**Justification Section**” of this Application.

1.4 Test Facility

The open area test site and conducted measurement facility used to collect the radiated data is located at Garment Centre, 576 Castle Peak Road, Kowloon, Hong Kong. This test facility and site measurement data have been placed on file with the FCC.

INTERTEK TESTING SERVICES

2.0 **System Test Configuration**

2.1 Justification

The system was configured for testing in a typical fashion (as a customer would normally use it), and in the confines as outlined in ANSI C63.4 (2009).

The device was powered by 120VAC.

For maximizing emissions, the EUT was rotated through 360°, the antenna height was varied from 1 meter to 4 meters above the ground plane, and the antenna polarization was changed. This step by step procedure for maximizing emissions led to the data reported in Exhibit 3.0.

The rear of unit shall be flushed with the rear of the table.

The equipment under test (EUT) was configured for testing in a typical fashion (as a customer would normally use it). The EUT was mounted to a plastic stand if necessary and placed on the wooden turntable, which enabled the engineer to maximize emissions through its placement in the three orthogonal axes.

2.2 EUT Exercising Software

There was no special software to exercise the device. Once the unit is powered up, it transmits the RF signal continuously.

2.3 Special Accessories

There are no special accessories necessary for compliance of this product.

2.4 Equipment Modification

Any modifications installed previous to testing by Voxx Accessories Corp. will be incorporated in each production model sold/leased in the United States.

No modifications were installed by Intertek Testing Services Hong Kong Ltd.

2.5 Measurement Uncertainty

When determining of the test conclusion, the Measurement Uncertainty of test has been considered.

2.6 Support Equipment List and Description

1. iPad Mini (Provided by Intertek)
2. 1500W Light Bulbs (Provided by Intertek)
3. 2.5 ohm resistor (Provided by Intertek)
4. 1m USB cable (Provided by Intertek)

INTERTEK TESTING SERVICES

3.2 Radiated Emission Configuration Photograph

The worst case in radiated emission was found at 4804.000 MHz

For electronic filing, the worst case radiated emission configuration photographs are saved with filename: radiated photos.pdf.

3.3 Radiated Emission Data

The data on the following page lists the significant emission frequencies, the limit and the margin of compliance. Numbers with a minus sign are below the limit.

Judgment: Passed by 5.5 dB

3.4 Conducted Emission Configuration Photograph

The worst case in line-conducted emission was found at 0.528 MHz


For electronic filing, the worst case line-conducted configuration photographs are saved with filename: conducted photo.pdf.

3.5 Conducted Emission Data

For electronic filing, the graph and data table of conducted emission is saved with filename: conducted.pdf.

Judgment: Pass by 5.1 dB

INTERTEK TESTING SERVICES

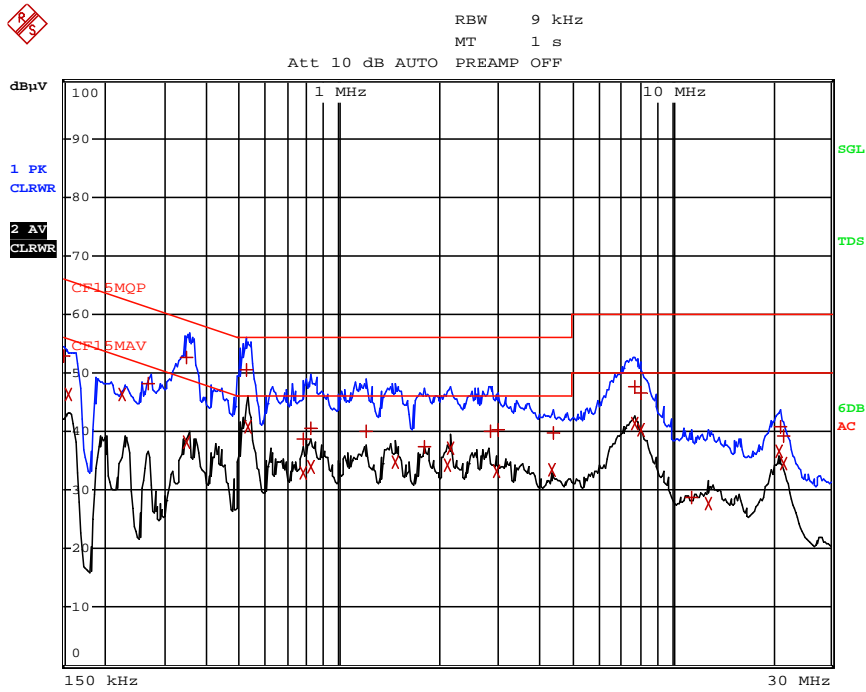

INTERTEK TESTING SERVICES

EDIT PEAK LIST (Final Measurement Results)				
Trace1:	CF15MQP			
Trace2:	CF15MAV			
Trace3:	---			
TRACE	FREQUENCY	LEVEL dBuV		DELTA LIMIT dB
1 Quasi Peak	150 kHz	52.88	N	-13.11
2 CISPR Average	154.5 kHz	46.28	N	-9.47
2 CISPR Average	226.5 kHz	46.31	N	-6.26
1 Quasi Peak	271.5 kHz	48.23	N	-12.83
1 Quasi Peak	352.5 kHz	52.65	L1	-6.25
2 CISPR Average	352.5 kHz	38.08	N	-10.82
1 Quasi Peak	523.5 kHz	50.42	N	-5.57
2 CISPR Average	528 kHz	40.89	N	-5.10
2 CISPR Average	775.5 kHz	33.03	L1	-12.96
1 Quasi Peak	780 kHz	38.67	L1	-17.32
1 Quasi Peak	820.5 kHz	40.44	L1	-15.55
2 CISPR Average	820.5 kHz	34.05	L1	-11.94
1 Quasi Peak	1.2075 MHz	40.06	L1	-15.93
2 CISPR Average	1.4775 MHz	34.74	L1	-11.26
1 Quasi Peak	1.797 MHz	37.46	L1	-18.53
2 CISPR Average	2.1075 MHz	34.31	L1	-11.68
2 CISPR Average	2.166 MHz	37.06	L1	-8.93
1 Quasi Peak	2.841 MHz	39.93	L1	-16.06
2 CISPR Average	2.9715 MHz	33.11	L1	-12.88
1 Quasi Peak	2.9985 MHz	40.22	L1	-15.77

EDIT PEAK LIST (Final Measurement Results)				
Trace1:	CF15MQP			
Trace2:	CF15MAV			
Trace3:	---			
TRACE	FREQUENCY	LEVEL dBuV		DELTA LIMIT dB
2 CISPR Average	4.3665 MHz	33.46	L1	-12.53
1 Quasi Peak	4.4025 MHz	39.75	L1	-16.24
2 CISPR Average	7.719 MHz	41.29	L1	-8.70
1 Quasi Peak	7.7595 MHz	47.76	L1	-12.23
1 Quasi Peak	8.0295 MHz	46.49	L1	-13.50
2 CISPR Average	8.0385 MHz	40.18	L1	-9.81
1 Quasi Peak	11.463 MHz	28.76	L1	-31.23
2 CISPR Average	12.7905 MHz	27.67	L1	-22.32
2 CISPR Average	21.021 MHz	36.63	N	-13.37
1 Quasi Peak	21.066 MHz	40.86	N	-19.13
1 Quasi Peak	21.5745 MHz	39.21	N	-20.78
2 CISPR Average	21.606 MHz	34.55	N	-15.44

INTERTEK TESTING SERVICES

Applicant: Voxx Accessories Corp.

Date of Test: February 24, 2014

Model: ARSWP1

Worst-Case Operating Mode: Transmitting (Bluetooth)

Table 1

Radiated Emissions Pursuant to FCC Part 15 Section 15.249 Requirement

Lowest Channel

Polarization	Frequency (MHz)	Reading (dB μ V)	Pre-Amp Gain (dB)	Antenna Factor (dB)	Net at 3m - Peak (dB μ V/m)	Average Factor (dB)	Calculated at 3m (dB μ V/m)	Average Limit at 3m (dB μ V/m)	Margin (dB)
H	2402.000	105.7	33	29.4	102.1	24	78.1	94.0	-15.9
V	4804.000	66.6	33	34.9	68.5	24	44.5	54.0	-9.5
H	7206.000	43.7	33	37.9	48.6	24	24.6	54.0	-29.4
H	9608.000	42.5	33	40.4	49.9	24	25.9	54.0	-28.1
H	12010.000	42.8	33	40.5	50.3	24	26.3	54.0	-27.7
H	14412.000	45.2	33	40.0	52.2	24	28.2	54.0	-25.8

Polarization	Frequency (MHz)	Reading (dB μ V)	Pre-Amp Gain (dB)	Antenna Factor (dB)	Net at 3m - Peak (dB μ V/m)	Peak Limit at 3m (dB μ V/m)	Margin (dB)
H	2402.000	105.7	33	29.4	102.1	114.0	-11.9
V	4804.000	66.6	33	34.9	68.5	74.0	-5.5
H	7206.000	43.7	33	37.9	48.6	74.0	-25.4
H	9608.000	42.5	33	40.4	49.9	74.0	-24.1
H	12010.000	42.8	33	40.5	50.3	74.0	-23.7
H	14412.000	45.2	33	40.0	52.2	74.0	-21.8

NOTES: 1. Peak Detector Data unless otherwise stated.

2. All measurements were made at 3 meters. Harmonic emissions not detected at the 3-meter distances were measured at 0.3-meter and an inverse proportional extrapolation was performed to compare the signal level to the 3-meter limit. No other harmonic emissions than those reported were detected at a test distance of 0.3-meter.

3. Negative sign in the column shows value below limit.

4. Horn antenna is used for the emission over 1000MHz.

INTERTEK TESTING SERVICES

Applicant: Voxx Accessories Corp.

Date of Test: February 24, 2014

Model: ARSWP1

Worst-Case Operating Mode: Transmitting (Bluetooth)

Table 2

Radiated Emissions Pursuant to FCC Part 15 Section 15.249 Requirement

Middle Channel

Polarization	Frequency (MHz)	Reading (dB μ V)	Pre-Amp Gain (dB)	Antenna Factor (dB)	Net at 3m - Peak (dB μ V/m)	Average Factor (dB)	Calculated at 3m (dB μ V/m)	Average Limit at 3m (dB μ V/m)	Margin (dB)
H	2441.000	106.3	33	29.4	102.7	24	78.7	94.0	-15.3
H	4882.000	61.3	33	34.9	63.2	24	39.2	54.0	-14.8
H	7323.000	42.6	33	37.9	47.5	24	23.5	54.0	-30.5
H	9764.000	41.8	33	40.4	49.2	24	25.2	54.0	-28.8
H	12205.000	42.6	33	40.5	50.1	24	26.1	54.0	-27.9
H	14646.000	46.8	33	38.4	52.2	24	28.2	54.0	-25.8

Polarization	Frequency (MHz)	Reading (dB μ V)	Pre-Amp Gain (dB)	Antenna Factor (dB)	Net at 3m - Peak (dB μ V/m)	Peak Limit at 3m (dB μ V/m)	Margin (dB)
H	2441.000	106.3	33	29.4	102.7	114.0	-11.3
H	4882.000	61.3	33	34.9	63.2	74.0	-10.8
H	7323.000	42.6	33	37.9	47.5	74.0	-26.5
H	9764.000	41.8	33	40.4	49.2	74.0	-24.8
H	12205.000	42.6	33	40.5	50.1	74.0	-23.9
H	14646.000	46.8	33	38.4	52.2	74.0	-21.8

NOTES: 1. Peak Detector Data unless otherwise stated.

2. All measurements were made at 3 meters. Harmonic emissions not detected at the 3-meter distances were measured at 0.3-meter and an inverse proportional extrapolation was performed to compare the signal level to the 3-meter limit. No other harmonic emissions than those reported were detected at a test distance of 0.3-meter.

3. Negative sign in the column shows value below limit.

4. Horn antenna is used for the emission over 1000MHz.

INTERTEK TESTING SERVICES

Applicant: Voxx Accessories Corp.

Date of Test: February 24, 2014

Model: ARSWP1

Worst-Case Operating Mode: Transmitting (Bluetooth)

Table 3

Radiated Emissions Pursuant to FCC Part 15 Section 15.249 Requirement

Highest Channel

Polarization	Frequency (MHz)	Reading (dB μ V)	Pre-Amp Gain (dB)	Antenna Factor (dB)	Net at 3m - Peak (dB μ V/m)	Average Factor (dB)	Calculated at 3m (dB μ V/m)	Average Limit at 3m (dB μ V/m)	Margin (dB)
H	2480.000	105.6	33	29.4	102.0	24	78.0	94.0	-16.0
H	4960.000	59.7	33	34.9	61.6	24	37.6	54.0	-16.4
H	7440.000	42.1	33	37.9	47.0	24	23.0	54.0	-31.0
H	9920.000	41.9	33	40.4	49.3	24	25.3	54.0	-28.7
H	12400.000	42.7	33	40.5	50.2	24	26.2	54.0	-27.8
H	14880.000	46.7	33	38.4	52.1	24	28.1	54.0	-25.9

Polarization	Frequency (MHz)	Reading (dB μ V)	Pre-Amp Gain (dB)	Antenna Factor (dB)	Net at 3m - Peak (dB μ V/m)	Peak Limit at 3m (dB μ V/m)	Margin (dB)
H	2480.000	105.6	33	29.4	102.0	114.0	-12.0
H	4960.000	59.7	33	34.9	61.6	74.0	-12.4
H	7440.000	42.1	33	37.9	47.0	74.0	-27.0
H	9920.000	41.9	33	40.4	49.3	74.0	-24.7
H	12400.000	42.7	33	40.5	50.2	74.0	-23.8
H	14880.000	46.7	33	38.4	52.1	74.0	-21.9

NOTES: 1. Peak Detector Data unless otherwise stated.

2. All measurements were made at 3 meters. Harmonic emissions not detected at the 3-meter distances were measured at 0.3-meter and an inverse proportional extrapolation was performed to compare the signal level to the 3-meter limit. No other harmonic emissions than those reported were detected at a test distance of 0.3-meter.

3. Negative sign in the column shows value below limit.

4. Horn antenna is used for the emission over 1000MHz.

INTERTEK TESTING SERVICES

Applicant: Voxx Accessories Corp.

Date of Test: February 24, 2014

Model: ARSWP1

Worst-Case Operating Mode: Transmitting (Baseband)

Table 4

Radiated Emissions Pursuant to FCC Part 15 Section 15.209 Requirement

Polarization	Frequency (MHz)	Reading (dB μ V)	Pre-amp (dB)	Antenna Factor (dB)	Net at 3m (dB μ V/m)	Limit at 3m (dB μ V/m)	Margin (dB)
V	33.860	40.3	16	10.0	34.3	40.0	-5.7
V	47.960	38.5	16	11.0	33.5	40.0	-6.5
V	60.000	40.2	16	10.0	34.2	40.0	-5.8
H	120.000	37.5	16	14.0	35.5	43.5	-8.0
H	150.000	36.6	16	14.0	34.6	43.5	-8.9
H	180.000	30.8	16	20.0	34.8	43.5	-8.7
H	240.000	33.5	16	19.0	36.5	46.0	-9.5
H	300.000	28.8	16	22.0	34.8	46.0	-11.2

NOTES: 1. Peak Detector Data unless otherwise stated.

2. All measurements were made at 3 meters. Harmonic emissions not detected at the 3-meter distances were measured at 0.3-meter and an inverse proportional extrapolation was performed to compare the signal level to the 3-meter limit. No other harmonic emissions than those reported were detected at a test distance of 0.3-meter.

3. Negative sign in the column shows value below limit.

4. Horn antenna is used for the emission over 1000MHz.

INTERTEK TESTING SERVICES

4.0 **Equipment Photographs**

For electronic filing, the photographs are saved with filename: external photos.pdf and internal photos.pdf.

5.0 **Product Labelling**

For electronics filing, the FCC ID label artwork and the label location are saved with filename: label.pdf.

6.0 **Technical Specifications**

For electronic filing, the block diagram and schematic of the tested EUT are saved with filename: block.pdf and circuit.pdf respectively.

7.0 **Instruction Manual**

For electronic filing, a preliminary copy of the Instruction Manual is saved with filename: manual.pdf.

This manual will be provided to the end-user with each unit sold/leased in the United States.

INTERTEK TESTING SERVICES

8.0 **Miscellaneous Information**



The miscellaneous information includes details of the test procedure and measured bandwidth / calculation of factor such as pulse desensitization and averaging factor (calculation and timing diagram).

8.1 Measured Bandwidth

From the following plots, they show that the fundamental emissions are confined in the specified band (2400MHz to 2483.5MHz). In case of the fundamental emissions are within two standard bandwidths from the bandedge, the delta measurement technique is used for determining bandedge compliance. Standard bandwidth is the bandwidth specified by ANSI C63.4 (2009) for frequency being measured.

Emissions radiated outside of the specified frequency bands, except harmonics, are attenuated by 50dB below the level of the fundamental or to the general radiated emissions limits in Section 15.209, whichever is the lesser attenuation, which meet the requirement of part 15.249(d).

INTERTEK TESTING SERVICES

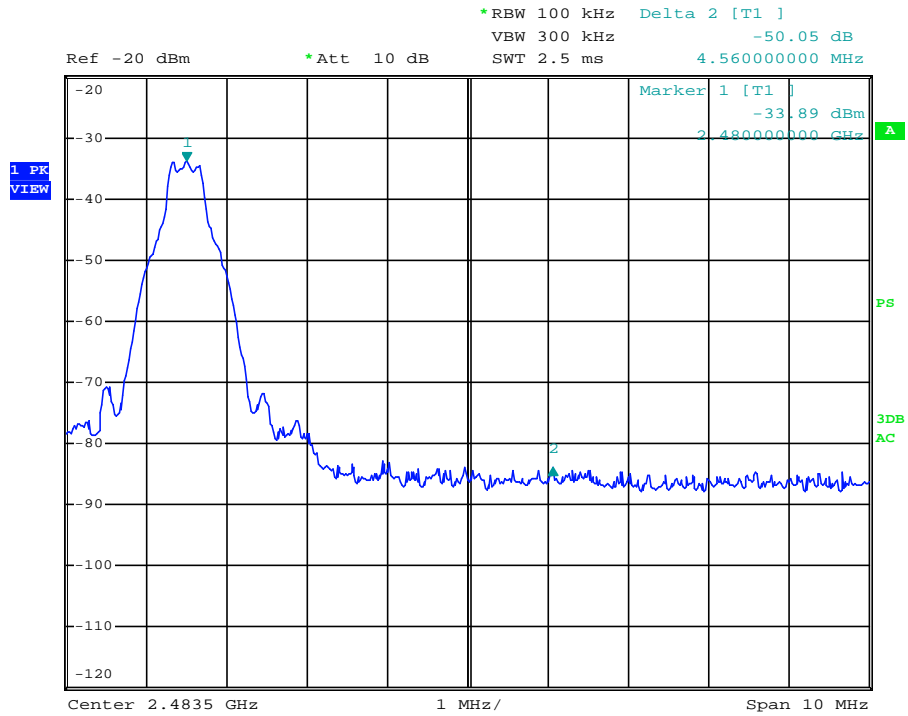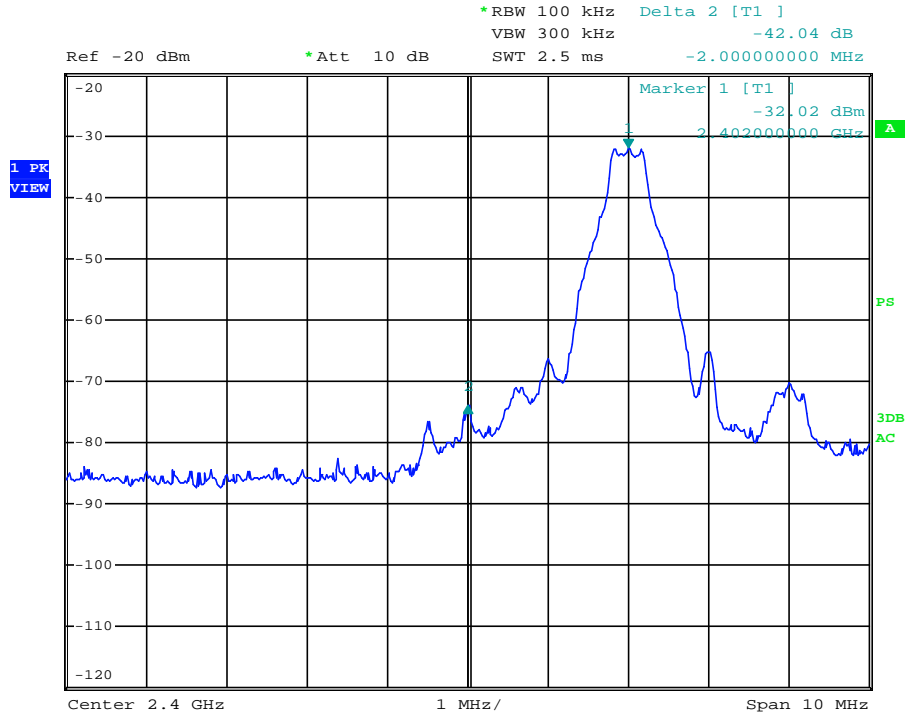

INTERTEK TESTING SERVICES

Peak Measurement

Bandedge compliance is determined by applying marker-delta method, i.e. (Bandedge Plot).

Lower bandedge

Peak Resultant field strength = Fundamental emissions (peak value) – delta from the plot

$$=102.1 \text{ dB}\mu\text{V/m} - 42.0 \text{ dB}$$

$$=60.1 \text{ dB}\mu\text{V/m}$$

Average Resultant field strength = Fundamental emissions (average value) – delta from the plot

$$=78.1 \text{ dB}\mu\text{V/m} - 42.0 \text{ dB}$$

$$=36.1 \text{ dB}\mu\text{V/m}$$

Upper bandedge

Peak Resultant field strength = Fundamental emissions (peak value) – delta from the plot

$$=102.0 \text{ dB}\mu\text{V/m} - 50.1 \text{ dB}$$

$$=51.9 \text{ dB}\mu\text{V/m}$$

Average Resultant field strength = Fundamental emissions (average value) – delta from the plot

$$=78.0 \text{ dB}\mu\text{V/m} - 50.1 \text{ dB}$$

$$=27.9 \text{ dB}\mu\text{V/m}$$

The resultant field strength meets the general radiated emission limit in section 15.209, which does not exceed 74 dB μ V/m (Peak Limit) and 54 dB μ V/m (Average Limit).

INTERTEK TESTING SERVICES

8.2 Discussion of Pulse Desensitization

Pulse desensitivity is not applicable for this device. The effective period (Teff) is approximately 3.125ms for a digital "1" bit which illustrated on technical specification, with a resolution bandwidth (3dB) of 1MHz, so the pulse desensitivity factor is 0dB.

8.3 Calculation of Average Factor

Based on the Bluetooth Specification Version 2.0 / 2.1 + EDR, the transmitter ON time for each timeslot of Bluetooth is 625 μ s. DH5 has the maximum duty cycle, which consists of 5 continuous Tx slots and 1 Rx slot. Therefore one hopset take (5+1) x 625 μ s = 3.75ms. For one period for a pseudo-random hopping through at least 20 RF channels in adaptive mode (worst case), it take: 20 x 3.75ms = 75ms.

The dwell time for DH5 is 5 x 625 μ s = 3.125ms.

For the worst case calculation, there are two transmissions might occur in 100ms.

Therefore,

$$\begin{aligned}\text{Duty Cycle (DC)} &= \text{Maximum On time in } 100\text{ms}/100\text{ms} \\ &= 3.125\text{ms} \times 2/100\text{ms} \\ &= 0.0625\end{aligned}$$

$$\begin{aligned}\text{Average Factor (AF) of Bluetooth in dB} &= 20 \log_{10} (0.0625) \\ &= -24 \text{ dB}\end{aligned}$$

INTERTEK TESTING SERVICES

8.4 Emissions Test Procedures

The following is a description of the test procedure used by Intertek Testing Services Hong Kong Ltd. in the measurements of transmitter operating under the Part 15, Subpart C rules.

The test set-up and procedures described below are designed to meet the requirements of ANSI C63.4 (2009). A typical or an unmodulated CW signal at the operating frequency of the EUT has been supplied to the EUT for all measurements. Such a signal is supplied by a signal generator and an antenna in close proximity to the EUT. The signal level is sufficient to stabilize the local oscillator of the EUT.

The transmitting equipment under test (EUT) is placed on a wooden turntable which is four feet in diameter and approximately one meter in height above the ground plane. During the radiated emissions test, the turntable is rotated and any cables leaving the EUT are manipulated to find the configuration resulting in maximum emissions. The EUT is adjusted through all three orthogonal axis to obtain maximum emission levels. The antenna height and polarization are also varied during the testing to search for maximum signal levels. The height of the antenna is varied from one to four meters.

Detector function for radiated emissions is in peak mode. Average readings, when required, are taken by measuring the duty cycle of the equipment under test and subtracting the corresponding amount in dB from the measured peak readings. A detailed description for the calculation of the average factor can be found in Exhibit 8.3.

The frequency range scanned is from the lowest radio frequency signal generated in the device which is greater than 9 kHz to the tenth harmonic of the highest fundamental frequency or 40 GHz, whichever is lower. For line conducted emissions, the range scanned is 150 kHz to 30 MHz.

INTERTEK TESTING SERVICES

8.4 Emissions Test Procedures (cont'd)

The EUT is warmed up for 15 minutes prior to the test.

AC power to the unit is varied from 85% to 115% nominal and variation in the fundamental emission field strength is recorded. If battery powered, a new, fully charged battery is used.

Conducted measurements were made as described in ANSI C63.4 (2009).

The IF bandwidth used for measurement of radiated signal strength was 100 kHz or greater when frequency is below 1000 MHz. Where pulsed transmissions of short enough pulse duration warrant, a greater bandwidth is selected according to the recommendations of Hewlett Packard Application Note 150-2. A discussion of whether pulse desensitivity is applicable to this unit is included in this report (See Exhibit 8.1). Above 1000 MHz, a resolution bandwidth of 1 MHz is used.

Transmitter measurements are normally conducted at a measurement distance of three meters. However, to assure low enough noise floor in the forbidden bands and above 1 GHz, signals are acquired at a distance of one meter or less. All measurements are extrapolated to three meters using inverse scaling, unless otherwise reported. Measurements taken at a closer distance are so marked.

9.0 **Confidentiality Request**

For electronic filing, a preliminary copy of the confidentiality request is saved with filename: request.pdf.

INTERTEK TESTING SERVICES

10.0 Equipment List

1) Radiated Emissions Test

Equipment	EMI Test Receiver	Biconical Antenna	Log Periodic Antenna
Registration No.	EW-2666	EW-0954	EW-0446
Manufacturer	R&S	EMCO	EMCO
Model No.	ESCI7	3104C	3146
Calibration Date	Jun. 20, 2013	Apr. 30, 2013	Apr. 30, 2013
Calibration Due Date	Jun. 20, 2014	Oct. 30, 2014	Oct. 30, 2014

Equipment	Spectrum Analyzer	Double Ridged Guide Antenna
Registration No.	EW-2253	EW-1133
Manufacturer	R&S	EMCO
Model No.	FSP40	3115
Calibration Date	Apr. 24, 2013	Oct. 05, 2012
Calibration Due Date	Apr. 24, 2014	Apr. 05, 2014

2) Conducted Emissions Test

Equipment	EMI Test Receiver	LISN
Registration No.	EW-2666	EW-2874
Manufacturer	R&S	R&S
Model No.	ESCI7	ENV-216
Calibration Date	Jun. 20, 2013	Oct. 17, 2013
Calibration Due Date	Jun. 20, 2014	Aug. 17, 2014

3) Bandedge Measurement

Equipment	Spectrum Analyzer
Registration No.	EW-2249
Manufacturer	R&S
Model No.	FSP30
Calibration Date	Oct. 28, 2013
Calibration Due Date	Oct. 28, 2014