



CMA Testing and Certification Laboratories

廠商會檢定中心

TEST REPORT

Report No. : AT0031840(5) Date : 29 May 2015

Application No. : LT015146(6)

Applicant : Asian Express Holdings Limited
4F-4, No.669 Jingping Rd., Zhonghe City, TaiPei county 235
Taiwan R.O.C, Taiwan

Client : Asian Express Holdings Limited
Rm804 Sino Centre,582-592 Nathan Road,
Mongkok, Kowloon, Hong Kong.

Sample Description : One(1) item of submitted sample stated to be

Sample Description	Model No.
ATOM 1 Micro Done	PL-1390 / PL-1391 / PL-1392 / PL-1393 / PL-1394 / PL-1395 / PL-1396 / PL-1397 / PL-1398 / PL-1399 / AT-2930 / AT-2931 / AT-2932 / AT-2934 / AT-2935 / AT-2936

Sample registration No. : RT018334-002, RT023431-001

Radio Frequency : 2405MHz – 2475 MHz Transceiver

Radio Frequency : 2 x 1.5V AAA size batteries

No. of submitted sample : Six (6) set(s)

Date Received : 15 Apr 2015, 14 May 2015

Test Period : 04 Apr 2015 to 29 May 2015.

Test Requested : FCC Part 15 Certificate,
Industry Canada Interference Causing Equipment Standard RSS-210

Test Method : 47 CFR Part 15 (10-1-12 Edition), ANSI C63.4 – 2009
Industry Canada RSS-Gen Issue 3

Test Engineer : Mr. LEUNG Shu-kan, Ken

Test Result : See attached sheet(s) from page 2 to 32.

Conclusion : The submitted sample was found to comply with requirement of FCC Part 15
Subpart B and C and Industry Canada RSS-210 Issue 8.

For and on behalf of
CMA Industrial Development Foundation Limited

Authorized Signature : _____

Mr. WONG Lap-pong, Andrew
Manager
Electrical Division

Page 1 of 32

FCC ID: VLE2930-T
IC: 10819B-2930T



CMA Testing and Certification Laboratories

廠商會檢定中心

TEST REPORT

Report No. : AT0031840(5) Date : 29 May 2015

Remark : All sixteen models are the same in circuitry and components; and therefore model PL-1390 was chosen to be the representative of the test sample. The difference between the tested model and the declared model(s) is/are the Model no. and Color

Page 2 of 32

FCC ID: VLE2930-T
IC: 10819B-2930T

This document is issued subject to the latest CMA Testing General Terms and Conditions of Testing and Inspection Services, available on request or accessible at website www.cmatcl.com.
This document shall not be reproduced except in full or with written approval by CMA Testing

CMA Industrial Development Foundation Limited

Room 1302, Yan Hing Centre, 9-13 Wong Chuk Yeung St., Fo Tan, Shatin, N.T., Hong Kong.

Tel: (852) 2698 8198 Fax: (852) 2695 4177 E-mail: info@cmatcl.com Web Site: <http://www.cmatcl.com>



CMA Testing and Certification Laboratories

廠商會檢定中心

TEST REPORT

Report No. : AT0031840(5)

Date : 29 May 2015

Table of Contents

1	General Information	4
1.1	General Description	4
1.2	Location of the test site	5
1.3	List of measuring equipment.....	6
1.4	Measurement Uncertainty.....	7
2	Description of the radiated emission test	8
2.1	Test Procedure	8
2.2	Test Result	9
2.3	Radiated Emission Measurement Data	10
3	Description of the Line-conducted Test	13
3.1	Test Procedure	13
3.2	Test Result	13
3.3	Graph and Table of Conducted Emission Measurement Data	13
4	Photograph	14
4.1	Photographs of the Test Setup for Radiated Emission and Conducted Emission.....	14
4.2	Photographs of the External and Internal Configurations of the EUT.....	14
5	Supplementary document.....	15
5.1	Bandwidth.....	15
6	Appendices.....	16



CMA Testing and Certification Laboratories

廠商會檢定中心

TEST REPORT

Report No. : AT0031840(5)

Date : 29 May 2015

1 General Information

1.1 General Description

The equipment under test (EUT) is a controller for Atom 1 Micro Drone. The EUT is power by 2 x 1.5V AAA size batteries. It operates at 2405MHz – 2475MHz. There are buttons and two joysticks. When the buttons are pressed or joysticks are moved, there are radio signals transmitting to receiver.

The brief circuit description is listed as follows:

- | | |
|---|--|
| - U1 (RF) | and its associated circuit act as 2.4GHz RF module |
| - U1 (main) | and its associated circuit act as MCU |
| - X3 | and its associated circuit act as oscillator |
| - K1, K2, K3, K4, K5, K6,
VR1, VR2, VR3, VR4 | and its associated circuit act as copter control |
| - U2, U3 | and its associated circuit act as power regulator |



CMA Testing and Certification Laboratories

廠商會檢定中心

TEST REPORT

Report No. : AT0031840(5)

Date : 29 May 2015

1.2 Location of the test site

FCC Registered Test Site Number: 552221

Industry Canada Registered Test Site Number: 4093A

Radiated emissions measurements are investigated and taken pursuant to the procedures of ANSI C63.4 – 2009. A Semi-Anechoic Chamber Testing Site is set up for investigation and located at:

Ground Floor, Yan Hing Centre,
9 – 13 Wong Chuk Yeung Street,
Fo Tan, Shatin,
New Territories,
Hong Kong.

Conducted emissions measurements are investigated and also taken pursuant to the procedures of ANSI C63.4 – 2009. A shielded room is located at :

Ground Floor, Yan Hing Centre,
9 – 13 Wong Chuk Yeung Street,
Fo Tan, Shatin,
New Territories,
Hong Kong.



CMA Testing and Certification Laboratories

廠商會檢定中心

TEST REPORT

Report No. : AT0031840(5)

Date : 29 May 2015

1.3 List of measuring equipment

Equipment	Manufacturer	Model No.	Serial No.	Calibration Due Date	Calibration Period
EMI Test Receiver	R&S	ESCI	100152	28 Aug 2015	1 Year
Spectrum Analyzer	R&S	FSV40	100628	02 Feb 2016	1 Year
Broadband Antenna	Schaffner	CBL6112B	2718	19 Feb 2016	2 Years
Loop Antenna	EMCO	6502	00056620	28 Oct 2015	2 Years
Horn Antenna	Schwarzbeck	BBHA 9120D	9120D-531	24 Nov 2016	2 Years
Horn Antenna	Schwarzbeck	BBHA 9170	BBHA9170442	24 Nov 2016	2 Years
Broadband Pre-Amplifier	Schwarzbeck	BBV 9718	9718-119	18 Jun 2015	2 Years
Broadband Pre-Amplifier	Schwarzbeck	BBV 9719	9719-010	17 Jun 2015	2 Years
Coaxial Cable	Schaffner	RG 213/U	N/A	19 Feb 2016	1 Years
Coaxial Cable	Suhner	RG 214/U	N/A	19 Feb 2016	1 Years
Coaxial Cable	Suhner	Sucoflex_104	N/A	24 Nov 2016	2 Years



CMA Testing and Certification Laboratories

廠商會檢定中心

TEST REPORT

Report No. : AT0031840(5)

Date : 29 May 2015

1.4 Measurement Uncertainty

The reported uncertainty is based on a standard uncertainty multiplied by a coverage factor $k=2$, providing a level of confidence of approximately 95%.

Radiated emissions

Frequency	Uncertainty (U_{lab})
30MHz ~ 200MHz (Horizontal)	4.63dB
30MHz ~ 200MHz (Vertical)	4.65dB
200MHz ~ 1000MHz (Horizontal)	4.45dB
200MHz ~ 1000MHz (Vertical)	4.41dB

Conducted emissions

Frequency	Uncertainty (U_{lab})
150kHz~30MHz	2.47dB



CMA Testing and Certification Laboratories

廠商會檢定中心

TEST REPORT

Report No. : AT0031840(5)

Date : 29 May 2015

2 Description of the radiated emission test

2.1 Test Procedure

Radiated emissions measurements are investigated and taken pursuant to the procedures of ANSI C63.4 – 2009.

The equipment under test (EUT) was placed on a non-conductive turntable with dimensions of 1.5m x 1m and 0.8m high above the ground. 3m from the EUT, a broadband antenna mounting on the mast received the signal strength. The turntable was rotated to maximize the emission level. The antenna was then moving along the mast from 1m up to 4m until no more higher value was found. Both horizontal and vertical polarization of the antenna were placed and investigated.

For below 30MHz, a loop antenna with its vertical plane is placed 3m from the EUT and rotated about its vertical axis for maximum response at each azimuth about the EUT. And the centre of the loop shall be 1 m above the ground.

For 30MHz to 1GHz, broadband antenna with its vertical and horizontal plane is placed 3m from the EUT and rotated about its vertical and horizontal axis for maximum response at each azimuth about the EUT. And the reference point of antenna shall be 1 m above the ground.

For above 1GHz, horn antenna with its vertical and horizontal plane is placed 3m from the EUT and rotated about its vertical and horizontal axis for maximum response at each azimuth about the EUT. Preamplifier and High Pass filter was used for measurements. The reference point of antenna shall be 1 m above the ground.

The device was rotated through three orthogonal to determine which attitude and configuration produce the highest emission during measurement for Radiated Emission measurement.



CMA Testing and Certification Laboratories

廠商會檢定中心

TEST REPORT

Report No. : AT0031840(5)

Date : 29 May 2015

2.2 Test Result

Subpart C and RSS-210

Peak Detector data were measured unless otherwise stated.

“#” means emissions appear within the restricted bands shall follow the requirement of RSS-Gen Table 3.

The frequencies from fundamental up to that tenth harmonics were investigated, and emissions more 20dB below limit were not reported. Thus, those highest emissions were presented in next page (section 2.3).

It was found that the EUT meet the FCC and RSS requirement.

Subpart B RSS-Gen:

The emissions meet the requirement of section 15.109 and section 4.10 are based on measurements employing the CISPR quasi-peak detector below 1000MHz and average detector for frequencies above 1000MHz.

“#” means emissions appear within the restricted bands shall follow the requirement of RSS-Gen Table 3.

The frequencies from 30MHz to 1000MHz were investigated, and emissions more 20dB below limit were not reported. Thus, those highest emissions were presented in next page (section 2.3).

It was found that the EUT meet the FCC and RSS requirement.



CMA Testing and Certification Laboratories

廠商會檢定中心

TEST REPORT

Report No. : AT0031840(5)

Date : 29 May 2015

2.3 Radiated Emission Measurement Data

Radiated emission

pursuant to

the requirement of FCC Part 15 subpart C

Environmental conditions:

Parameter	Recorded value	
Ambient temperature:	25	° C
Relative humidity:	70	%

Measurement: Peak RBW: 1MHz VBW: 3MHz Operation Mode: Transmission

Testing frequency range: 9kHz to 25GHz

Channel	Frequency (MHz)	Polarity (H/V)	Reading at 3m (dBμV)	Transducer Factor (dB/m)	Field Strength at 3m (dBμV/m)	Limit at 3m (dBμV/m)	Margin (dB)
Low	2405.254	V	83.4	- 4.1	79.3	114.0	- 34.7
	#4809.846	H	47.1	3.8	50.9	74.0	- 23.1
	#4810.561	V	48.6	3.8	52.4	74.0	- 21.6
Middle	2445.301	H	81.7	- 4.1	77.6	114.0	- 36.4
	#4889.811	H	44.3	3.8	48.1	74.0	- 25.9
	#4890.489	V	46.6	3.8	50.4	74.0	- 23.6
High	2474.699	H	88.8	- 4.3	84.5	114.0	- 29.5
	#4949.934	V	47.8	4.1	51.9	74.0	- 22.1
	#4950.002	H	45.8	4.1	49.9	74.0	- 24.1

Remark: Other emissions more than 20dB below the limit are not reported.

Peak measurement values are lower than average limit, therefore average measurement is not necessary



CMA Testing and Certification Laboratories

廠商會檢定中心

TEST REPORT

Report No. : AT0031840(5)

Date : 29 May 2015

2.3 Radiated Emission Measurement Data (Con't)

Radiated emission

pursuant to

the requirement of FCC Part 15 subpart C

Environmental conditions:

Parameter	Recorded value	
Ambient temperature:	25	° C
Relative humidity:	70	%

Detector: Quasi-peak

RBW: 120kHz

VBW: 300kHz

Testing frequency range: 9kHz to 25GHz

Operation mode: Transmission

Frequency (MHz)	Polarity (H/V)	Reading at 3m (dBμV)	Antenna Factor and Cable Loss (dB/m)	Field Strength at 3m (dBμV/m)	Limit at 3m (dBμV/m)	Margin (dB)
69.685	H	9.7	7.6	17.3	40.0	- 22.7
#110.013	H	11.2	12.2	23.4	43.5	- 20.1
142.707	H	9.4	14.1	23.5	43.5	- 20.0
180.763	H	10.1	11.2	21.3	43.5	- 22.2
197.429	H	10.8	11.2	22.0	43.5	-21.5
#266.851	H	14.5	15.4	29.9	46.0	- 16.1
314.403	H	10.0	16.8	26.8	46.0	- 19.2

Remark: Other emissions more than 20dB below the limit are not reported.



CMA Testing and Certification Laboratories

廠商會檢定中心

TEST REPORT

Report No. : AT0031840(5)

Date : 29 May 2015

2.3 Radiated Emission Measurement Data (Con't)

Radiated emission

pursuant to

the requirement of FCC Part 15 subpart B

Environmental conditions:

Parameter	Recorded value	
Ambient temperature:	25	° C
Relative humidity:	70	%

Detector: Quasi-peak

RBW: 120kHz

VBW: 300kHz

Testing frequency range: 9kHz to 25GHz

Operation mode: Receiving

Frequency (MHz)	Polarity (H/V)	Reading at 3m (dBμV)	Antenna Factor and Cable Loss (dB/m)	Field Strength at 3m (dBμV/m)	Limit at 3m (dBμV/m)	Margin (dB)
68.184	H	9.5	7.6	17.1	40.0	- 22.9
105.281	H	10.3	12.2	22.5	43.5	- 21.0
142.614	H	9.3	14.1	23.4	43.5	- 20.1
198.444	H	10.7	11.2	21.9	43.5	- 21.6
238.370	H	10.3	13.2	23.5	46.0	- 22.5
280.512	H	10.5	15.4	25.9	46.0	- 20.1
377.620	H	10.6	16.8	27.4	46.0	- 18.6

Remark: Other emissions more than 20dB below the limit are not reported.



CMA Testing and Certification Laboratories

廠商會檢定中心

TEST REPORT

Report No. : AT0031840(5)

Date : 29 May 2015

3 Description of the Line-conducted Test

3.1 Test Procedure

Conducted emissions measurements are investigated and also taken pursuant to the procedures of ANSI C63.4 – 2009. The EUT was setup as described in the procedures, and both lines were measured.

3.2 Test Result

No measurement is required as the EUT is a battery-operated product.

3.3 Graph and Table of Conducted Emission Measurement Data

Not Applicable



CMA Testing and Certification Laboratories

廠商會檢定中心

TEST REPORT

Report No. : AT0031840(5)

Date : 29 May 2015

4 Photograph

4.1 Photographs of the Test Setup for Radiated Emission and Conducted Emission

For electronic filing, the photos are saved with filename VLE2930-T TSup.pdf and 10819B-2930T TSup.pdf.

4.2 Photographs of the External and Internal Configurations of the EUT

For electronic filing, the photos are saved with filename VLE2930-T ExPho.pdf, 10819B-2930T ExPho.pdf, VLE2930-T InPho.pdf and 10819B-2930T InPho.pdf.



CMA Testing and Certification Laboratories

廠商會檢定中心

TEST REPORT

Report No. : AT0031840(5)

Date : 29 May 2015

5 Supplementary document

The following document were submitted by applicant, and for electronic filing, the document are saved with the following filenames:

Document	Filename
ID Label/Location	LabelSmp.jpg
Block Diagram	BlkDia.pdf
Schematic Diagram	Schem.pdf
Users Manual	UserMan.pdf
Operational Description	OpDes.pdf

5.1 Bandwidth

The plot saved in TestRpt2.pdf shows the fundamental emission is confined in the specified band. It shows the 20dB bandwidth met the 15.215 requirement for frequency band 2400 to 2483.5 MHz.

The plot saved in TestRpt3.pdf shows the band edge is fulfil 15.209 and RSS-210 A2.9 requirement.



CMA Testing and Certification Laboratories

廠商會檢定中心

TEST REPORT

Report No. : AT0031840(5)

Date : 29 May 2015

6 Appendices

A1	Photos of the set-up of Radiated Emissions	3	pages
A2	Photos of External Configurations	2	pages
A3	Photos of Internal Configurations	3	pages
A4	ID Label/Location	2	pages
A5	Band Edge	2	pages
A6	20dB Bandwidth Plot	2	pages
A7	99% Bandwidth Plot	2	pages



CMA Testing and Certification Laboratories


廠商會檢定中心

TEST REPORT


Report No. : AT0031840(5)

Date : 29 May 2015

A1. Photos of the set-up of Radiated Emissions

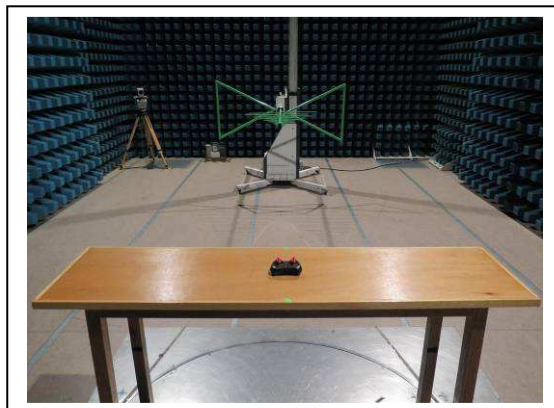

(Front view, 30MHz – 1GHz)

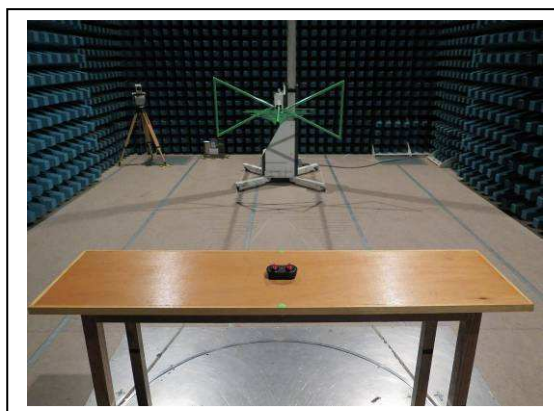

(Back view, 30MHz – 1GHz)

Tested by:

Mr. LEUNG Shu-kan, Ken

Reviewed by:

Mr. WONG Lap-pong, Andrew



CMA Testing and Certification Laboratories

廠商會檢定中心

TEST REPORT

Report No. : AT0031840(5)

Date : 29 May 2015

A1. Photos of the set-up of Radiated Emissions



(Front view, 9kHz – 30MHz)



(Back view, 9kHz – 30MHz)

Tested by:

Mr. LEUNG Shu-kan, Ken

Reviewed by:

Mr. WONG Lap-pong, Andrew



CMA Testing and Certification Laboratories


廠商會檢定中心

TEST REPORT


Report No. : AT0031840(5)

Date : 29 May 2015

A1. Photos of the set-up of Radiated Emissions

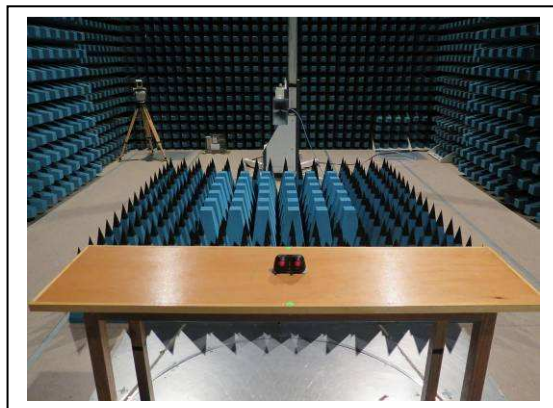

(Front view, 1GHz – 25GHz)

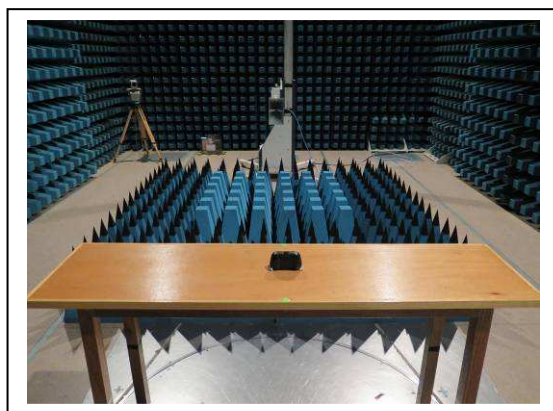

(Back view, above 1GHz – 25GHz)

Tested by:

Mr. LEUNG Shu-kan, Ken

Reviewed by:

Mr. WONG Lap-pong, Andrew

FCC ID: VLE2930-T
IC: 10819B-2930T

Page 19 of 32

This document is issued subject to the latest CMA Testing General Terms and Conditions of Testing and Inspection Services, available on request or accessible at website www.cmatcl.com.
This document shall not be reproduced except in full or with written approval by CMA Testing

CMA Industrial Development Foundation Limited

Room 1302, Yan Hing Centre, 9-13 Wong Chuk Yeung St., Fo Tan, Shatin, N.T., Hong Kong.

Tel: (852) 2698 8198 Fax: (852) 2695 4177 E-mail: info@cmatcl.com Web Site: <http://www.cmatcl.com>



CMA Testing and Certification Laboratories

廠商會檢定中心

TEST REPORT

Report No. : AT0031840(5)

Date : 29 May 2015

A2 Photos of External Configurations



(External Configuration 1)



(External Configuration 2)

Tested by:

Mr. LEUNG Shu-kan, Ken

Reviewed by:

Mr. WONG Lap-pong, Andrew



CMA Testing and Certification Laboratories

廠商會檢定中心

TEST REPORT

Report No. : AT0031840(5)

Date : 29 May 2015

A2 Photos of External Configurations



(External Configuration 3)



(External Configuration 4)

Tested by:

Mr. LEUNG Shu-kan, Ken

Reviewed by:

Mr. WONG Lap-pong, Andrew



CMA Testing and Certification Laboratories


廠商會檢定中心

TEST REPORT


Report No. : AT0031840(5)

Date : 29 May 2015

A3. Photos of Internal Configurations

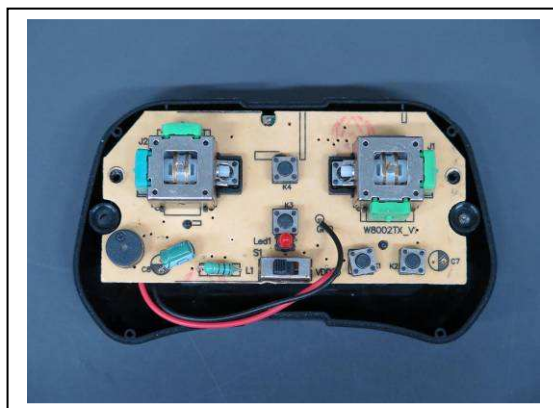

Internal Configuration 1

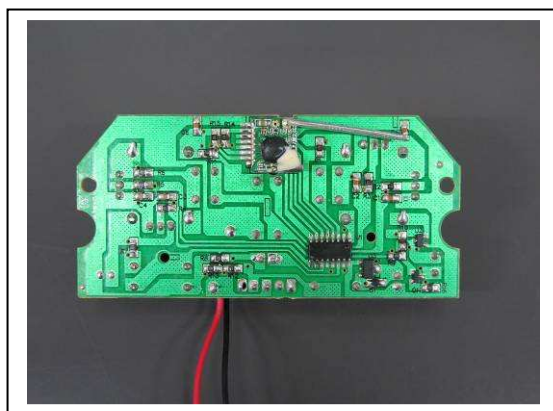

Internal Configuration 2

Tested by:

Mr. LEUNG Shu-kan, Ken

Reviewed by:

Mr. WONG Lap-pong, Andrew



CMA Testing and Certification Laboratories


廠商會檢定中心

TEST REPORT


Report No. : AT0031840(5)

Date : 29 May 2015

A3. Photos of Internal Configurations

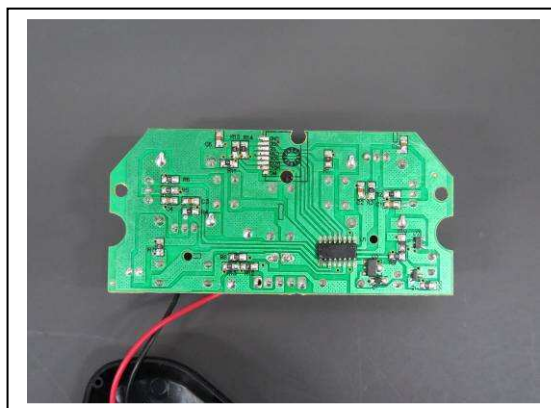

Internal Configuration 3

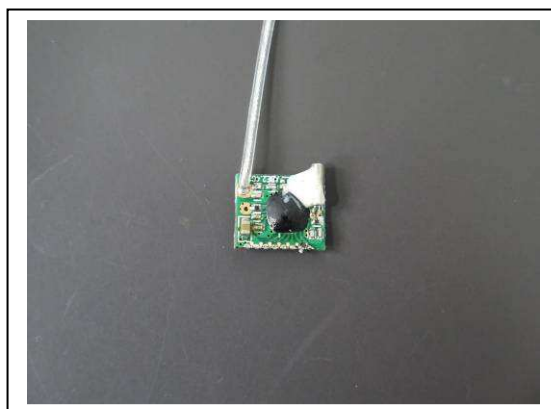

Internal Configuration 4

Tested by:

Mr. LEUNG Shu-kan, Ken

Reviewed by:

Mr. WONG Lap-pong, Andrew



CMA Testing and Certification Laboratories


廠商會檢定中心

TEST REPORT

Report No. : AT0031840(5)

Date : 29 May 2015

A3. Photos of Internal Configurations

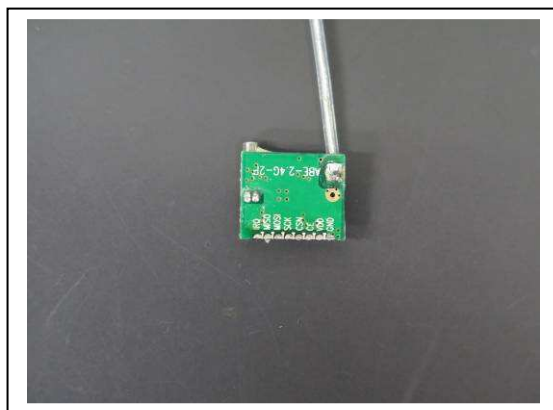

Internal Configuration 5

Tested by:

Mr. LEUNG Shu-kan, Ken

Reviewed by:

Mr. WONG Lap-pong, Andrew



CMA Testing and Certification Laboratories

廠商會檢定中心

TEST REPORT

Report No. : AT0031840(5)

Date : 29 May 2015

A4. ID Label / Location



ID Label 1

Tested by:

Mr. LEUNG Shu-kan, Ken

Reviewed by:

Mr. WONG Lap-pong, Andrew

FCC ID: VLE2930-T
IC: 10819B-2930T



CMA Testing and Certification Laboratories


廠商會檢定中心

TEST REPORT

Report No. : AT0031840(5)

Date : 29 May 2015

A4. ID Label / Location

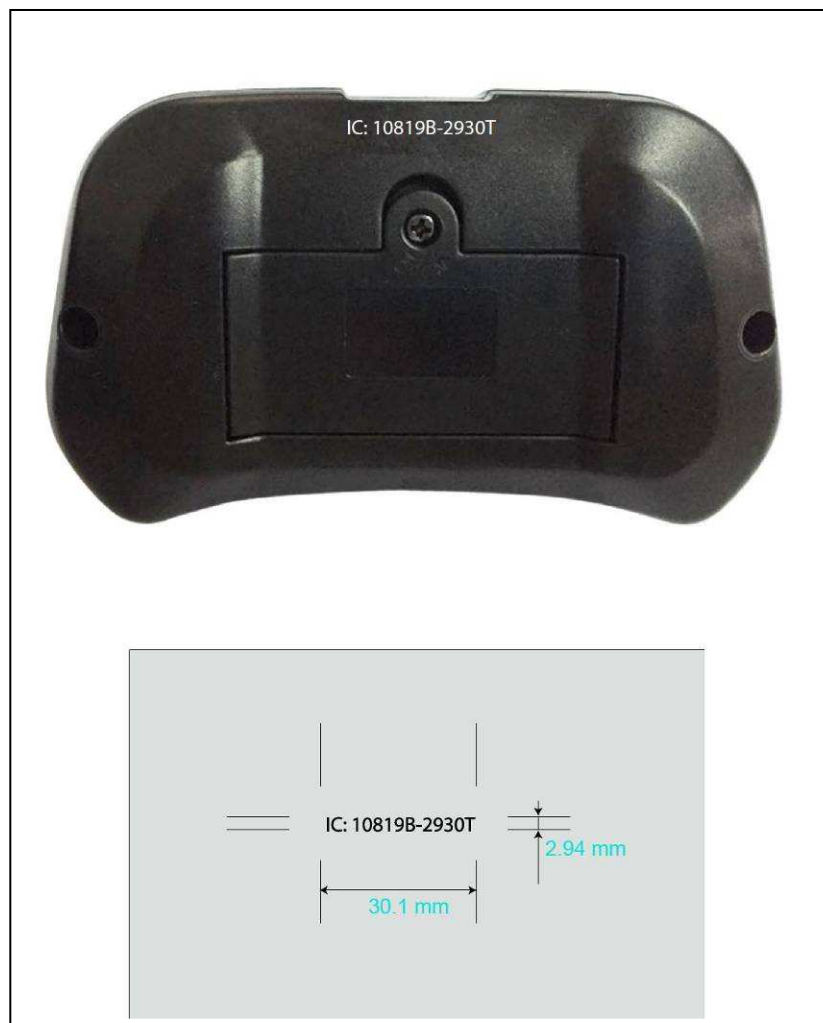

ID Label 2

Tested by:

Mr. LEUNG Shu-kan, Ken

Reviewed by:

Mr. WONG Lap-pong, Andrew



CMA Testing and Certification Laboratories


廠商會檢定中心

TEST REPORT


Report No. : AT0031840(5)

Date : 29 May 2015

A5. Band Edge

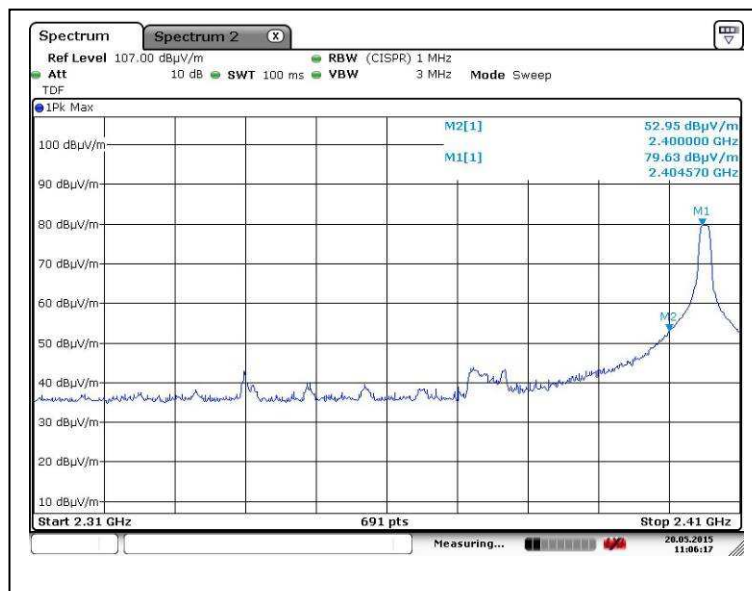

Lower edge (Peak measurement)

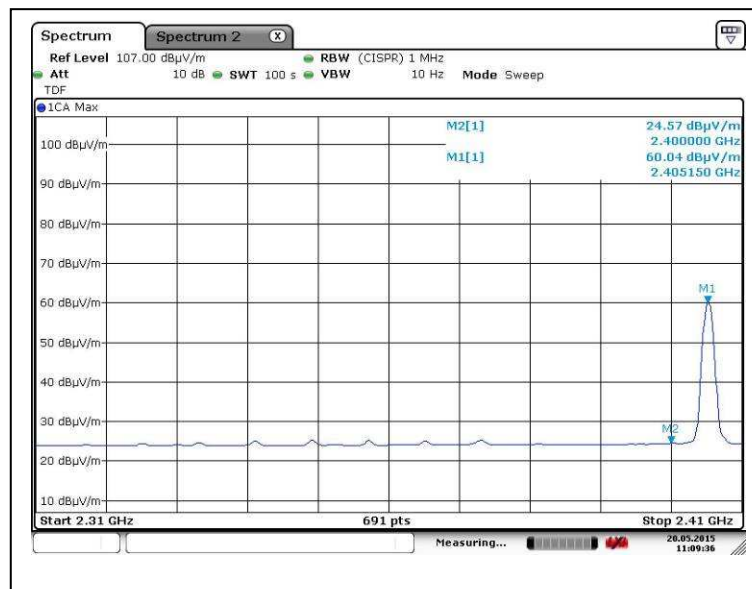

Lower edge (Average measurement)

Tested by:

Mr. LEUNG Shu-kan, Ken

Reviewed by:

Mr. WONG Lap-pong, Andrew

FCC ID: VLE2930-T
IC: 10819B-2930T



CMA Testing and Certification Laboratories


廠商會檢定中心

TEST REPORT


Report No. : AT0031840(5)

Date : 29 May 2015

A5. Band Edge

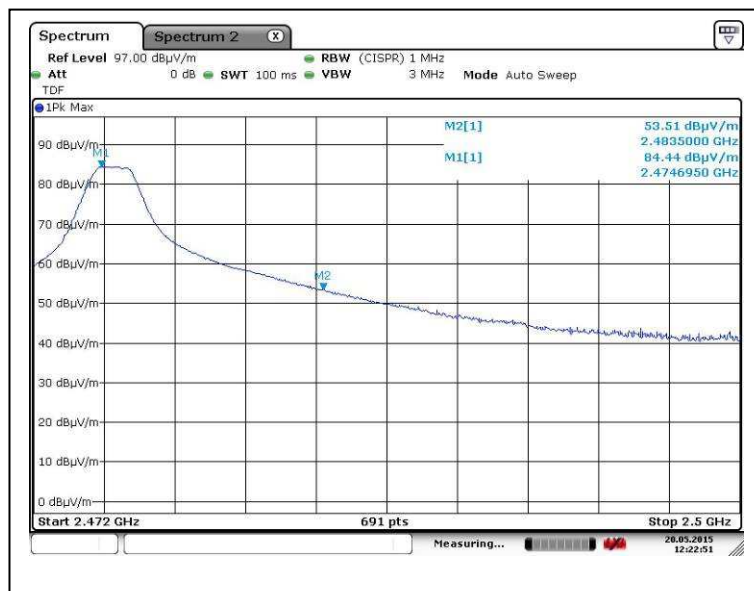

Higher edge (Peak measurement)

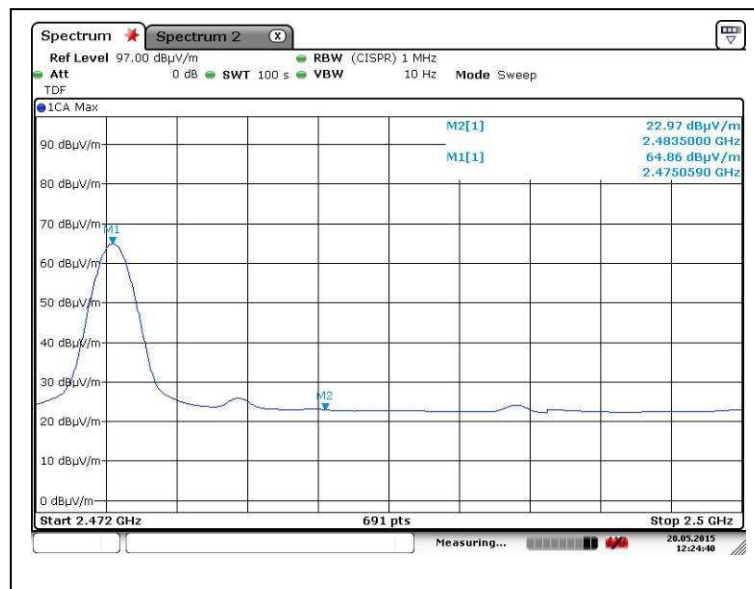

Higher edge (Average measurement)

Tested by:

Ken

Mr. LEUNG Shu-kan, Ken

Reviewed by:

PR

Mr. WONG Lap-pong, Andrew



CMA Testing and Certification Laboratories


廠商會檢定中心

TEST REPORT


Report No. : AT0031840(5)

Date : 29 May 2015

A6. 20dB Bandwidth Plot

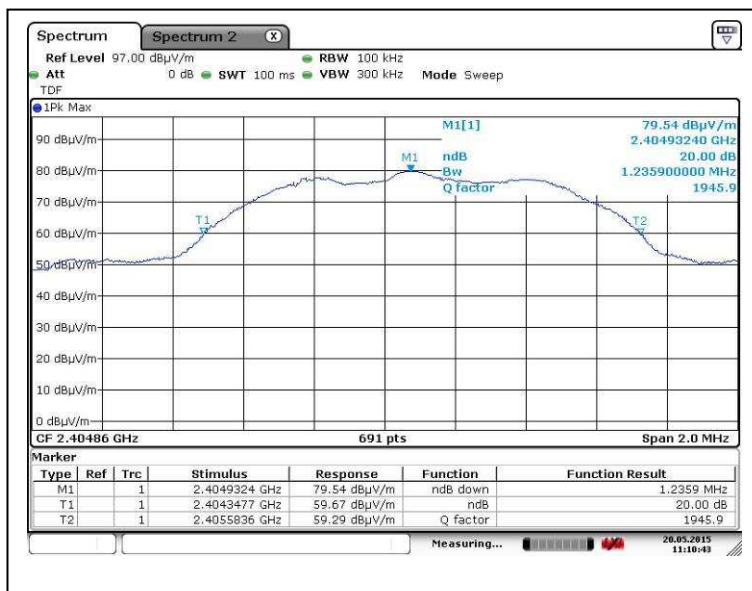

Bandwidth 1 (2405MHz)

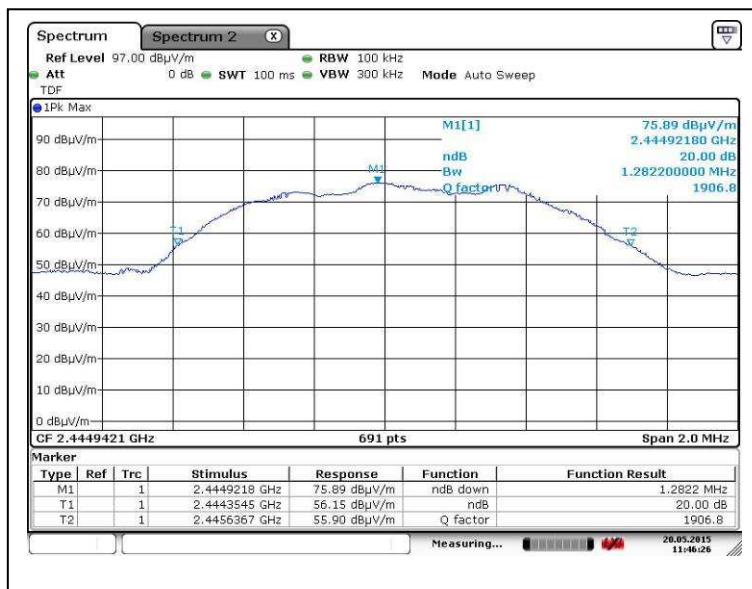

Bandwidth 2 (2445MHz)

Tested by:

Mr. LEUNG Shu-kan, Ken

Reviewed by:

Mr. WONG Lap-pong, Andrew



CMA Testing and Certification Laboratories


廠商會檢定中心

TEST REPORT

Report No. : AT0031840(5)

Date : 29 May 2015

A6. 20dB Bandwidth Plot

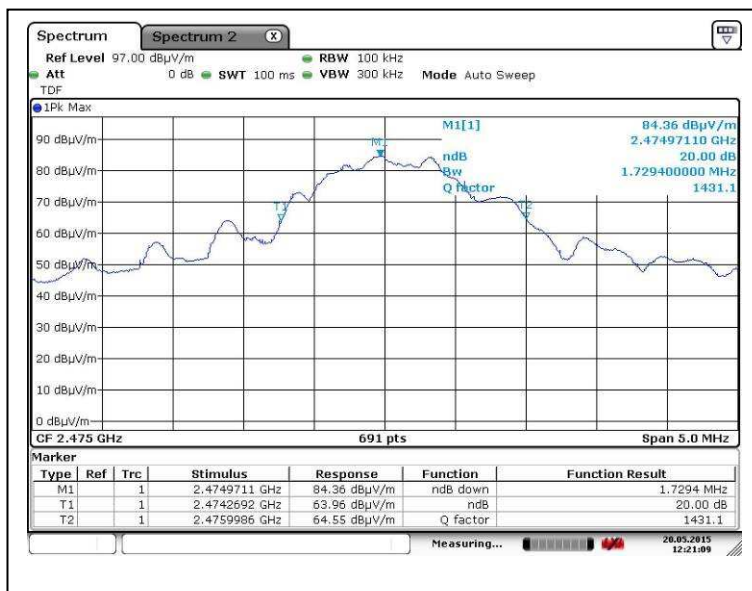

Bandwidth 3 (2475MHz)

Tested by:

Mr. LEUNG Shu-kan, Ken

Reviewed by:

Mr. WONG Lap-pong, Andrew

FCC ID: VLE2930-T
IC: 10819B-2930T

Page 30 of 32

This document is issued subject to the latest CMA Testing General Terms and Conditions of Testing and Inspection Services, available on request or accessible at website www.cmatcl.com.
This document shall not be reproduced except in full or with written approval by CMA Testing

CMA Industrial Development Foundation Limited

Room 1302, Yan Hing Centre, 9-13 Wong Chuk Yeung St., Fo Tan, Shatin, N.T., Hong Kong.

Tel: (852) 2698 8198 Fax: (852) 2695 4177 E-mail: info@cmatcl.com Web Site: <http://www.cmatcl.com>



CMA Testing and Certification Laboratories


廠商會檢定中心

TEST REPORT


Report No. : AT0031840(5)

Date : 29 May 2015

A7. 99% Bandwidth Plot

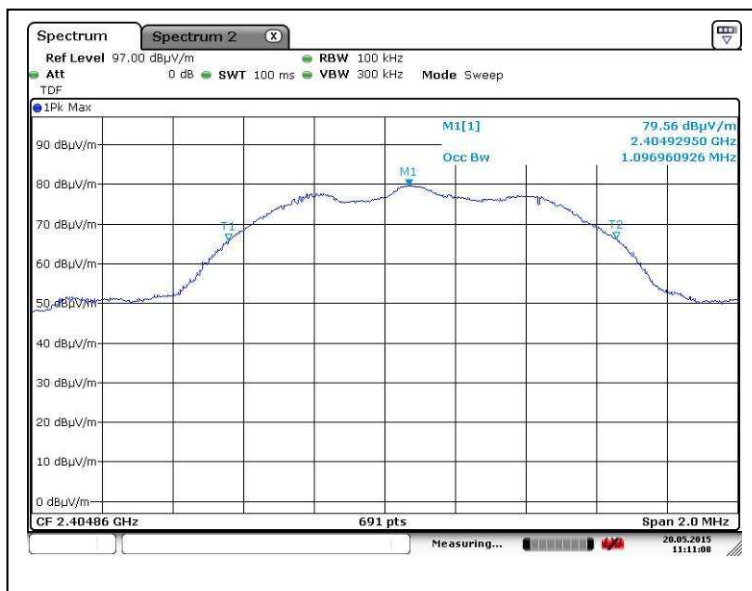

Bandwidth 1 (2405MHz)

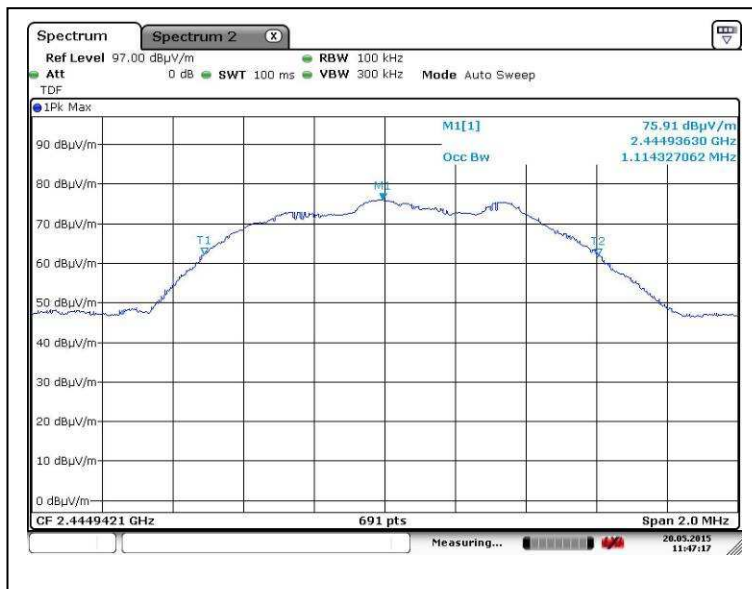

Bandwidth 2 (2445MHz)

Tested by:

Mr. LEUNG Shu-kan, Ken

Reviewed by:

Mr. WONG Lap-pong, Andrew



CMA Testing and Certification Laboratories


廠商會檢定中心

TEST REPORT

Report No. : AT0031840(5)

Date : 29 May 2015

A7. 99% Bandwidth Plot

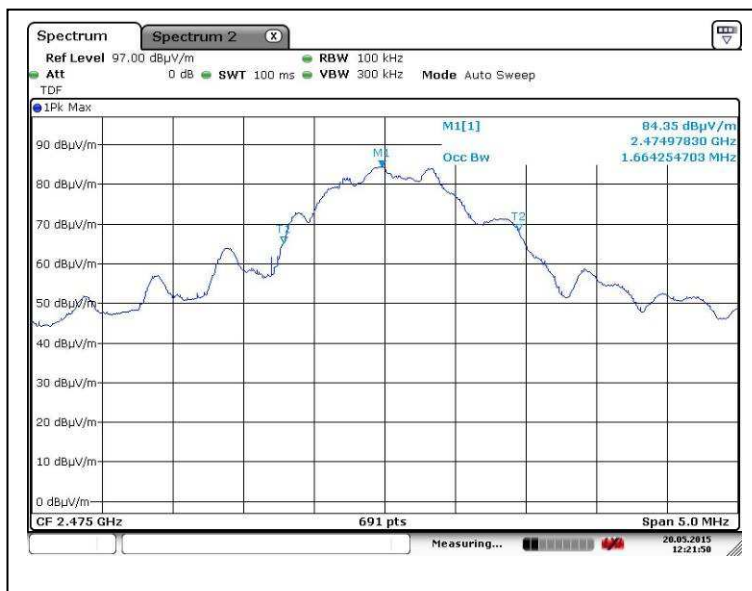

Bandwidth 3 (2475MHz)

***** End of Report *****

Tested by:

Mr. LEUNG Shu-kan, Ken

Reviewed by:

Mr. WONG Lap-pong, Andrew