



TEST REPORT

Date: 2009-06-30

Report No.: 60.870.9.010.01F

Applicant: Binatone Electronics International Limited
Floor 23A, 9 Des Voeux Road West,
Sheung Wan, Hong Kong

Description of Samples: Model name: Digital Baby Monitor
Brand name: Motorola
Model no.: MBP30 (Parent Unit)
FCCID: VLJ-MBP30PU

Date Samples Received: 2009-06-17

Date Tested: 2009-06-19 to 2009-06-25

Investigation Requested: FCC Part 15 Subpart C, Section 15.247

Conclusions: The submitted product COMPLIED with the requirements of Federal Communications Commission [FCC] Rules and Regulations Part 15. The tests were performed in accordance with the standards described above and on Section 2.2 in this Test Report.

Remarks: ----

Checked by:

Approved by:-

A handwritten signature in blue ink, appearing to read 'Prudence Poon'.

A handwritten signature in blue ink, appearing to read 'Victor Kwan'.

Prudence Poon
Project Manager
Telecom department

Victor Kwan
Manager
Telecom department

CONTENT:

| | | |
|-------------------|---|------------------|
| Cover | Page 1 of 32 | |
| Content | Page 2-3 of 32 | |
| <u>1.0</u> | <u>General Details</u> | |
| 1.1 | Test Laboratory | Page 4 of 32 |
| 1.2 | Applicant Details | Page 4 of 32 |
| 1.3 | Equipment Under Test [EUT] | Page 5 of 32 |
| 1.4 | Related Submittal(s) Grants | Page 5 of 32 |
| <u>2.0</u> | <u>Technical Details</u> | |
| 2.1 | Investigations Requested | Page 6 of 32 |
| 2.2 | Test Standards and Results Summary | Page 6 of 32 |
| <u>3.0</u> | <u>Test Methodology</u> | |
| 3.1 | Radiated Emission | Page 7 of 32 |
| 3.2 | Field Strength Calculation | Page 7 of 32 |
| 3.3 | Conducted Emission | Page 7 of 32 |
| <u>4.0</u> | <u>Test Results</u> | |
| 4.1 | Number of Frequency Hopping | Page 8 of 32 |
| 4.2 | 20dB Bandwidth Measurement | Page 9-10 of 32 |
| 4.3 | Hopping Channel Carrier Frequency Separation | Page 11 of 32 |
| 4.4 | Average Time of Occupancy | Page 12-14 of 32 |
| 4.5 | Pseudorandom Hopping Algorithm | Page 15 of 32 |
| 4.6 | Band Edge Measurement | Page 16-17 of 32 |
| 4.7 | Maximum Output Power | Page 18-19 of 32 |
| 4.8 | Out of Band Emissions and Emissions in Restricted Bands | Page 20-24 of 32 |
| 4.9 | Conducted Emission on AC Mains | Page 25-31 of 32 |

5.0 **List of Measurement Equipments**

Appendix A

Photos of Test Setup

Appendix B

External EUT Photos

Appendix C

Internal EUT Photos

1.0 General Details

1.1 Test Laboratory

EMC Laboratory registered by FCC with
FCC Registration Number: 607756

**1.2 Applicant Details
Applicant**

Binatone Electronics International Limited

Floor 23A, 9 Des Voeux Road West,
Sheung Wan, Hong Kong

Manufacturer

Pandachip Ltd.

Unit 210, 2/F (Lakeside 1), Building 15,
No.8 Science Park West Avenue,
Hong Kong Science Park, Phase II,
Shatin, N.T. Hong Kong

1.3 Equipment Under Test [EUT]

Description of EUT

| | |
|---------------------------------------|---|
| Product Description: | Digital Baby Monitor |
| Model No.: | MBP30(Parent Unit) |
| Brand Name: | Motorola |
| FCCID: | VLJ-MBP30PU |
| Rating: | - DC 5.0V,1000mA powered by AC/ DC power adaptor. - DC 3.6V rechargeable battery pack. |
| Antenna Type: | Integral |
| Operated Frequency: | 2407 -2476 MHz |
| No. of Channel: | 16 |
| Accessories and Auxiliary Equipments: | -AC/DC power adaptor. |

General Operation of EUT

The Equipment Under Test (EUT) is a receiver of baby monitor system operated at 2.4GHz, it has monitor to show the picture from its associated transmitter. This EUT is designed for fix used, as it is powered by AC/DC adaptor.

FHSS Operation Principle:

This module is controlled by microchip to generate Pseudorandom Frequency Hopping Sequence, this module support 16 hopping channels. Refer to section 4.5 of this report to have more detail of Pseudorandom Hopping Algorithm.

1.4 Related Submittal(s) Grants

This is a signal application subjected to Certificate Authorization.

2.0 Technical Details

2.1 Investigations Requested

Perform ElectroMagnetic Interference measurement in accordance with FCC 47CFR [Codes of Federal Regulations] Part 15: 2008 and ANSI C63.4: 2003 for FCC Verification

2.2 Test Standards and Results Summary Tables

| Test Condition | Test Requirement | Test Result | |
|--|-----------------------|---|--------------------------|
| | | Pass | N/A |
| Number of Frequency Hopping | Section 15.247 (a1) | <input checked="" type="checkbox"/> | <input type="checkbox"/> |
| 20dB Bandwidth Measurement | Section 15.247 (a1) | <input checked="" type="checkbox"/> | <input type="checkbox"/> |
| Hopping Channel Carrier Frequency Separation | Section 15.247 (a1) | <input checked="" type="checkbox"/> | <input type="checkbox"/> |
| Average Time of Occupancy | Section 15.247 (a1) | <input checked="" type="checkbox"/> | <input type="checkbox"/> |
| Pseudorandom Hopping Algorithm | Section 15.247 (a1) | <input checked="" type="checkbox"/> | <input type="checkbox"/> |
| Band Edge Measurement | Section 15.247 | <input checked="" type="checkbox"/> | <input type="checkbox"/> |
| Maximum Output Power | Section 15.247 (b1) | <input checked="" type="checkbox"/> | <input type="checkbox"/> |
| Out of Band Emission | Section 15.247 (d) | <input checked="" type="checkbox"/> | <input type="checkbox"/> |
| Radiated Emission in Restricted Band | Section 15.247 (d) | <input checked="" type="checkbox"/> | <input type="checkbox"/> |
| Conducted Emission on AC Mains | Section 15.207 | <input checked="" type="checkbox"/> | <input type="checkbox"/> |
| RF Exposure | Section 15.247 (i) | <input checked="" type="checkbox"/> See note 1 | <input type="checkbox"/> |
| Antenna Requirement | Section 15.203 | <input checked="" type="checkbox"/> See note 2 | <input type="checkbox"/> |

Note 1 : Since this EUT is not a portable product it is deemed to fulfill this requirement without conducting SAR measurement.

Note 2 : The EUT uses a permanently attached antenna, which in accordance to Section 15.203, is considered sufficient to comply with the provisions of this section.

Remark: N/A - Not Applicable

3.0 Test Methodology

3.1 Radiated Emission

The sample was placed 0.8m above the ground plane on a standard emission test site *. Measurements in both horizontal and vertical polarities were performed. During the test, each emission was maximized by: having the EUT continuously working, investigated all operating modes, rotated about all 3 axis (X, Y & Z) and considered typical configuration to obtain worst position, manipulating interconnecting cables, rotating turntable, varying antenna height from 1m to 4m in both horizontal and vertical polarizations. The emissions worst-case are shown in Test Results of the following pages.

*On a standard emission test site with a metal ground plane filed with the FCC pursuant to section 2.948 of the FCC rules, with Registration Number: 607756.

3.2 Field Strength Calculation

The field strength at 3 m was established by adding the meter reading of the spectrum analyzer to the factors associated with antenna correction factor, cable loss, preamplifiers and filter attenuation.

The equation is expressed as follow:

$$FS = R + \text{System Factor}$$
$$\text{System Factor} = AF + CF + FA - PA$$

Where FS = Net Field Strength in dBuV/m at 3 meters.

R = Reading of Spectrum Analyzer / Test Receiver in dBuV.

AF = Antenna Factor in dB.

CF = Cable Attenuation Factor in dB.

FA = Filter Attenuation Factor in dB.

PA = Preamplifier Factor in dB.

FA and PA are only be used for the measuring frequency above 1 GHz.

3.3 Conducted Emissions

The test was performed in accordance with ANSI C63.4: 2003, with the following: initial measurements were performed in peak and average detection modes on the live line of personal computer, any emissions recorded within 30dB of the relevant limit lines were re-measured using quasi-peak and average detection on the live and neutral lines with the worst case recorded in the table of results.

4.0 Test Results

4.1 Number of Hopping Frequency

Test Requirement: FCC part 15 section 15.247 (a1)(iii)
 Test Date: 2009-06-24
 Mode of Operation: Communication mode.
 Detector Function: Max Hold

Result: PASS

Measured Result :

Number of Channels = 16


Channel Frequency in sequence:

| | | | | | |
|------------|------------|------------|------------|------------|------------|
| 2407.5MHz, | 2412.0MHz, | 2416.5MHz, | 2421.0MHz, | 2405.5MHz, | 2430.0MHz |
| 2434.5MHz, | 2439.0MHz, | 2443.5MHz, | 2448.0MHz, | 2452.5MHz, | 2457.0MHz, |
| 2461.5MHz, | 2466.0MHz, | 2470.5MHz, | 2475.0MHz, | | |

Limit for Number of Hopping Channel [Section 15.247 (a1)(iii)]

At least 15 non-overlapping channels for 2400-2483.5MHz.

Figure 1 – Result data graph shows the number of operation channels:

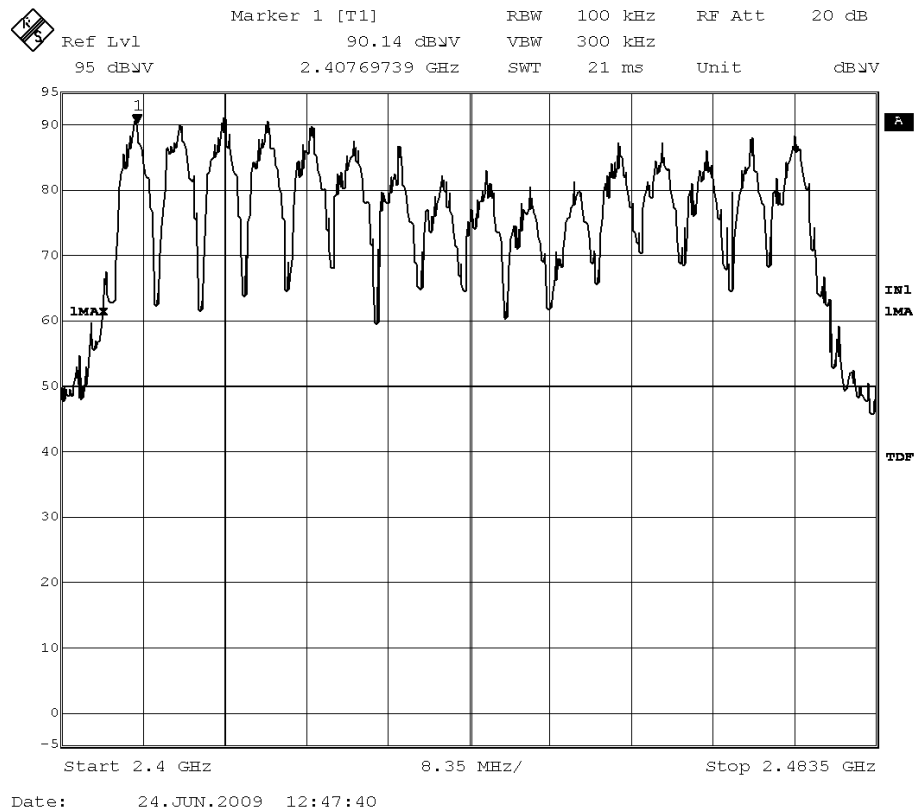

4.2 20dB Bandwidth Measurement

Test Requirement: FCC part 15 section 15.247 (a1)
 Test Date: 2009-06-23
 Mode of Operation: Communication mode.
 Detector Function: Max Hold

Test Setup:

The bandwidth is measured at an amplitude level reduced from the reference level by a specified ratio. The reference level is the level of the highest amplitude signal observed from the transmitter at the fundamental frequency. Once the reference level is established, the equipment is conditioned with typical modulating signal to produce the worst-case (i.e. the widest) bandwidth.

| Channel | Measured Frequency (MHz) | 20dB Bandwidth (MHz) |
|--------------|--------------------------|----------------------|
| Lowest : 1 | 2407.5 | 3.607 |
| Middle: 9 | 2443.6 | 3.907 |
| Highest : 16 | 2475.2 | 4.008 |

This result is used for checking the hopping channel carrier frequencies separation.

Figure 2 – Result data graph shows 20 dB bandwidth, CF = 2.4075GHz, BW = 3.6072MHz

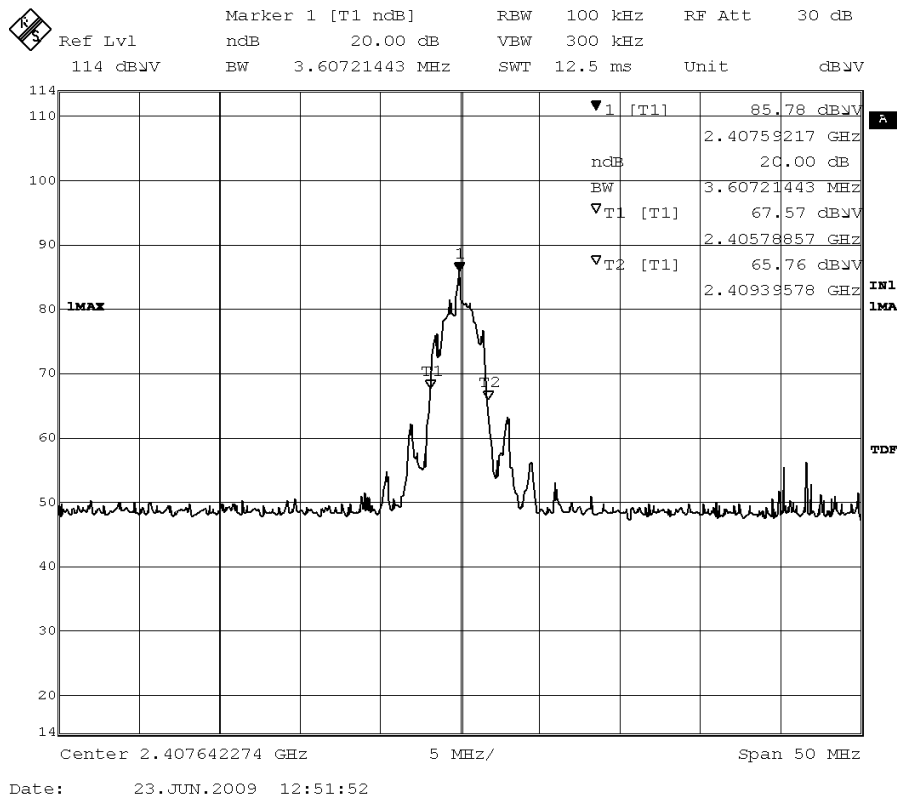


Figure 3 – Result data graph shows 20 dB bandwidth, CF = 2.4436GHz, BW = 3.9078MHz


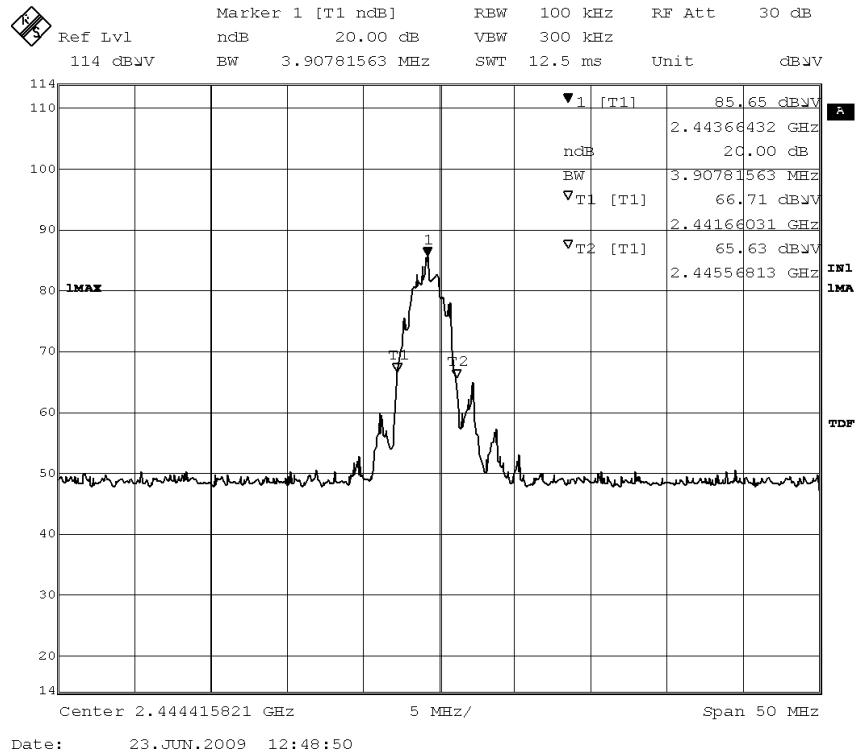


Figure 4 – Result data graph shows 20 dB bandwidth, CF = 2.4752GHz, BW = 4.0080MHz

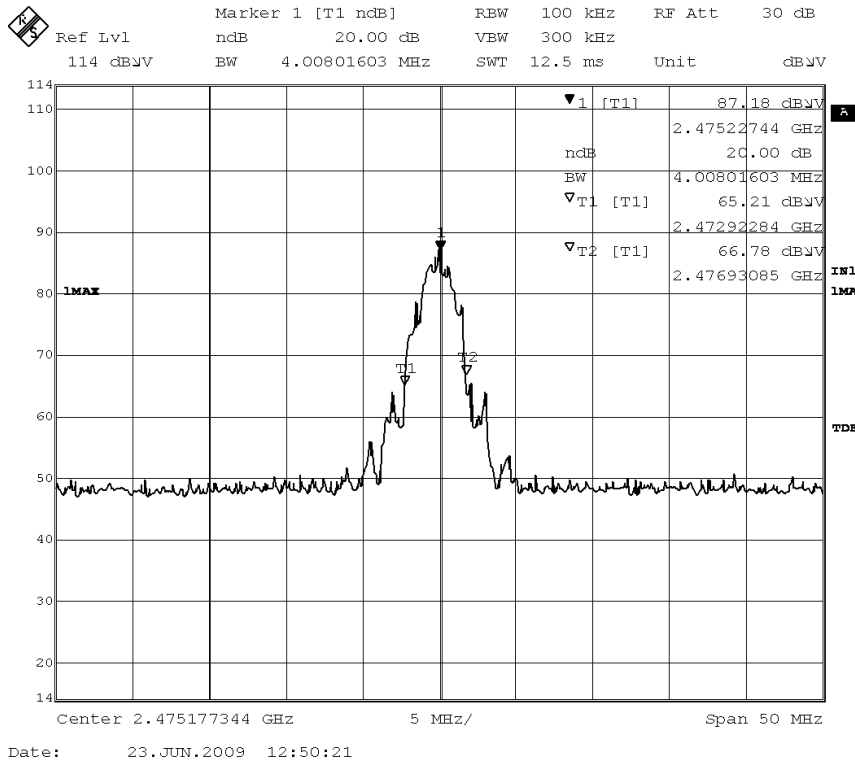

4.3 Hopping Channel Carrier Frequency Separation

Test Requirement: FCC part 15 section 15.247 (a1)
 Test Date: 2009-06-23
 Mode of Operation: Communication mode.
 Detector Function: Max Hold

Result: PASS


Measured Result :

Refer to the delta marker, the frequency separation between two adjacent channels is 4.5226MHz, therefore requirement of channel separated by a minimum of the 20dB bandwidth of the hopping channel is applied. According to the test result shown in section 4.2, the maximum 20dB bandwidth is 4.008MHz, so the hopping channel separation of this EUT is found to comply with the requirement.

Limits for Hopping Channel Separation [Section 15.247 (a1)]:

Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25KHz or the 20dB bandwidth of the hopping channel, whichever is greater. Alternatively, frequency hopping systems operating in the 2400-2483.5MHz band may have hopping channel carrier frequencies that are separated by 25KHz or two-thirds of the 20dB bandwidth of the hopping channel, whichever is greater.

Figure 5 – Result data graph shows the channel separation:

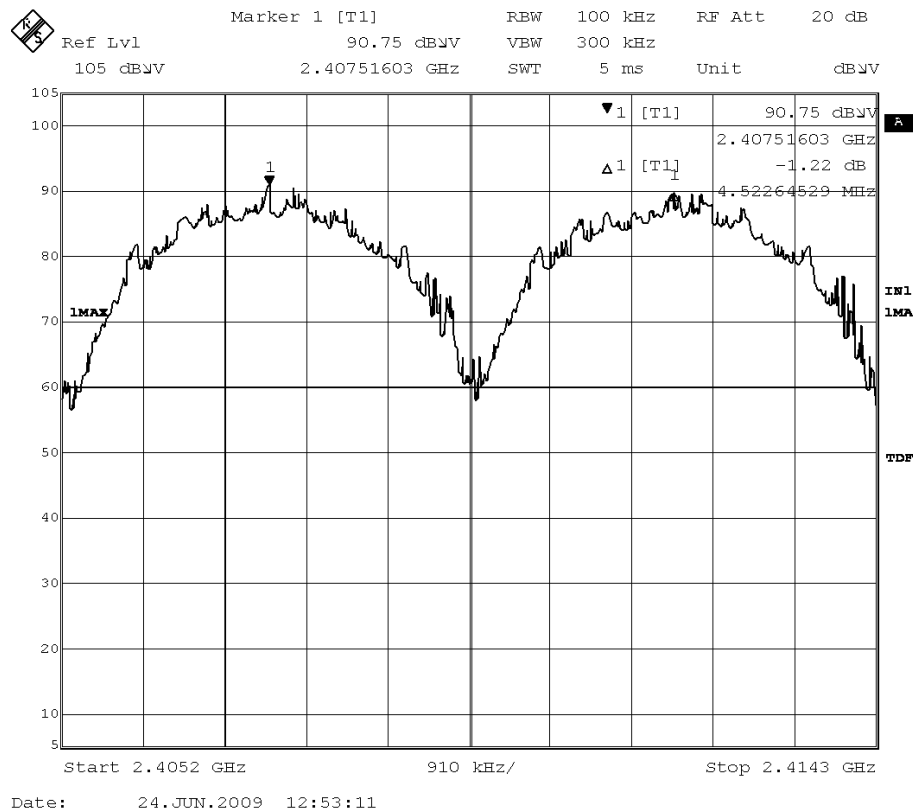

4.4 Average Time of Channel Occupancy

| | |
|--------------------|--------------------------------------|
| Test Requirement: | FCC part 15 section 15.247 (a1)(iii) |
| Test Date: | 2009-06-24 |
| Mode of Operation: | Communication mode. |
| Detector Function: | Zero span, Sweep time 6.4s |

Result : PASS

Measured Result :

Observing time for total 16 hopping channels is $16 \times 0.4s = 6.4s$

Figure 6 and Figure 7 show total $33 \times 4 = 132$ pulse within 6.4s :

Figure 8 shows time of each pulse = 581.1us

Therefore, total transmitting time is $132 \times 581.1us = 76.7ms$. ($<0.4s$)

Limits for Average Time of Occupancy [Section 15.247 (a1)(iii)]:

The average time of occupancy on any channel shall not be greater than 0.4 second within a period of 0.4 seconds multiplied by the number of hopping channels employed.

Figure 6 – Result data graph shows the number of big pulse within 6.4s = 33

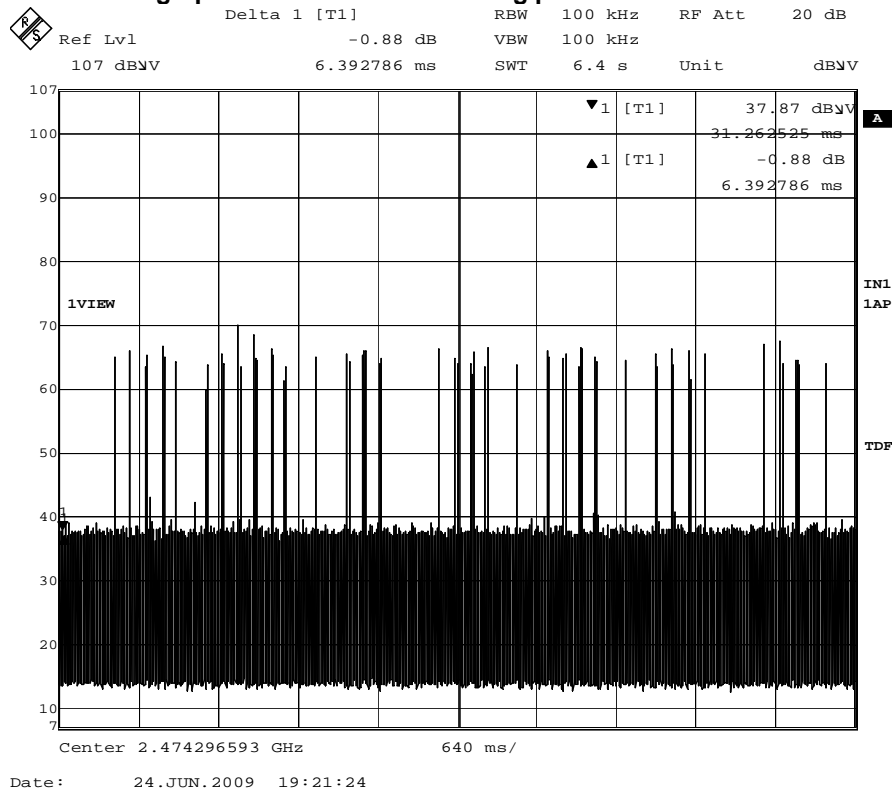


Figure 7— Result data graph zooms into detail, one big pulse is built from 4 pulses.


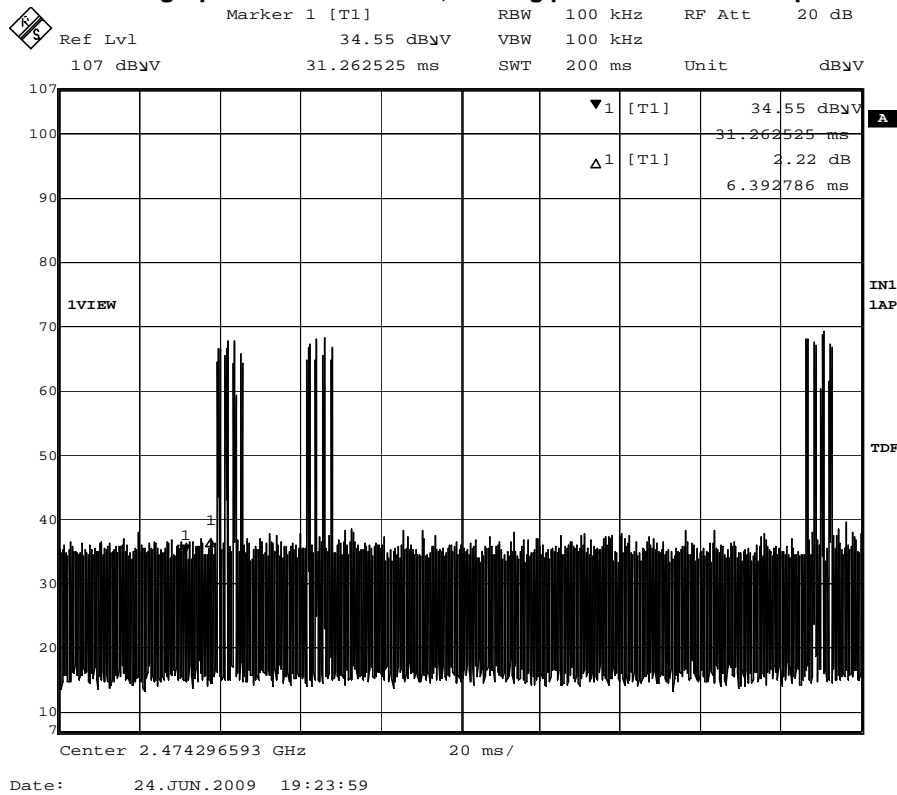


Figure 8 – Result data graph shows the time of each pulse = 581.16us

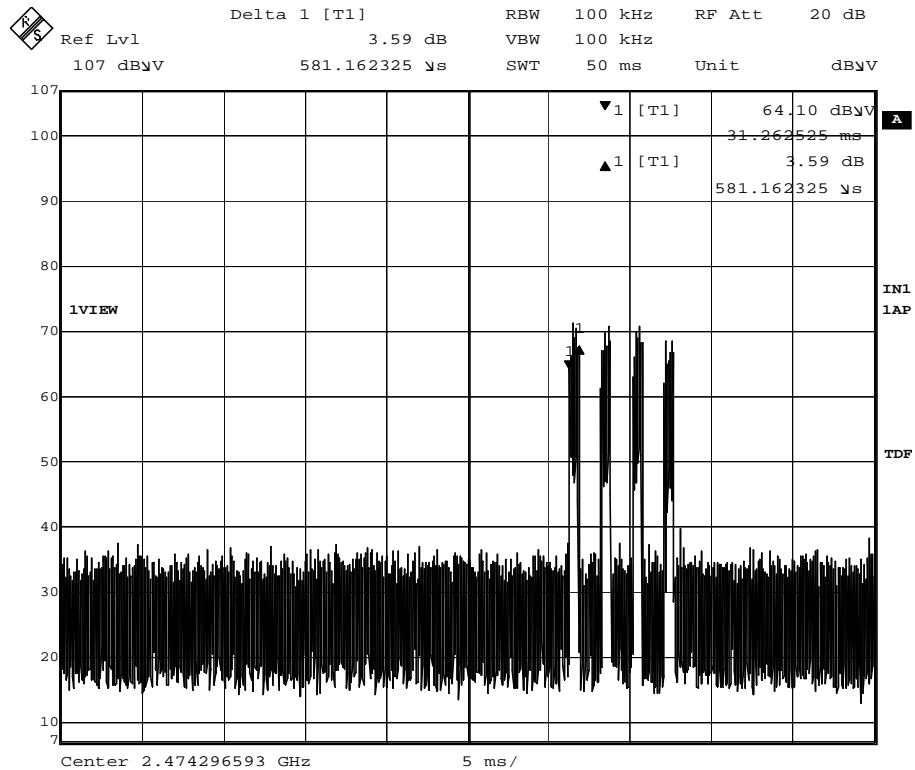

Date: 24.JUN.2009 19:19:13

Report No.: 60.870.9.010.01F

4.5 Pseudorandom Hopping Algorithm

Pseudorandom Frequency Hopping

The embedded FHSS engine uses 16 hopping frequencies. Each channel frequency is selected from a pseudorandom ordered list of hopping frequencies, from 2407MHz to 2476MHz with separating in 4.5MHz apart from each of the channels. A single data frame is transmitted on each frequency location before skipping to the next hopping frequency in the list.

The system will generate a pseudorandom ordered list base on:

- 1/ A 16 bit Random ID (16 bit)
- 2/ A Sequence No. (8 bit)
- 3/ A 16 bit polynomial Randomization

Frequency use is equally used on average.

| Channel | Frequency (MHz) | Channel | Frequency (MHz) |
|---------|-------------------|---------|-------------------|
| 1 | 2407.5 | 9 | 2443.5 |
| 2 | 2412.0 | 10 | 2448.0 |
| 3 | 2416.5 | 11 | 2452.5 |
| 4 | 2421.0 | 12 | 2457.0 |
| 5 | 2425.5 | 13 | 2461.5 |
| 6 | 2430.0 | 14 | 2466.0 |
| 7 | 2434.5 | 15 | 2470.5 |
| 8 | 2439.1 | 16 | 2475.0 |

System Receiver Input Bandwidth

The receiver bandwidth is equal to the receiver bandwidth in the 16 hopping channel mode, which is 4.5MHz. The receiver bandwidth was verified during RF hopping to the relative channel.

Receiver Hopping Capability

The associated receiver has the ability to shift frequencies in synchronization with the transmitted signals, with they start connect with a same channel and then hop to next channel with a same formula among each other.

Requirement for Pseudorandom Hopping Algorithm [Section 15.247 (a1)]:

The channel frequencies shall be selected from a pseudorandom ordered list of hopping frequencies. Each frequency must be used equally on average by the transmitter.

4.6 Band Edge Measurement

Test Requirement: FCC part 15 section 15.247
 Test Date: 2009-06-23
 Mode of Operation: Communication mode.
 Detector Function: Max Hold

Result: PASS

Measured Result :

Refer to the figure 9 and 10, it shows the frequency of lower band edge and upper band edge is 2.407GHz and 2.475GHz separately.

Limits of Band Edge for Carrier Frequencies Operated within the Bands [Section 15.247]:

The carrier frequencies should operate within 2400-2483.5MHz.

Figure 9 – Result data graph shows the frequency of lowest channel.


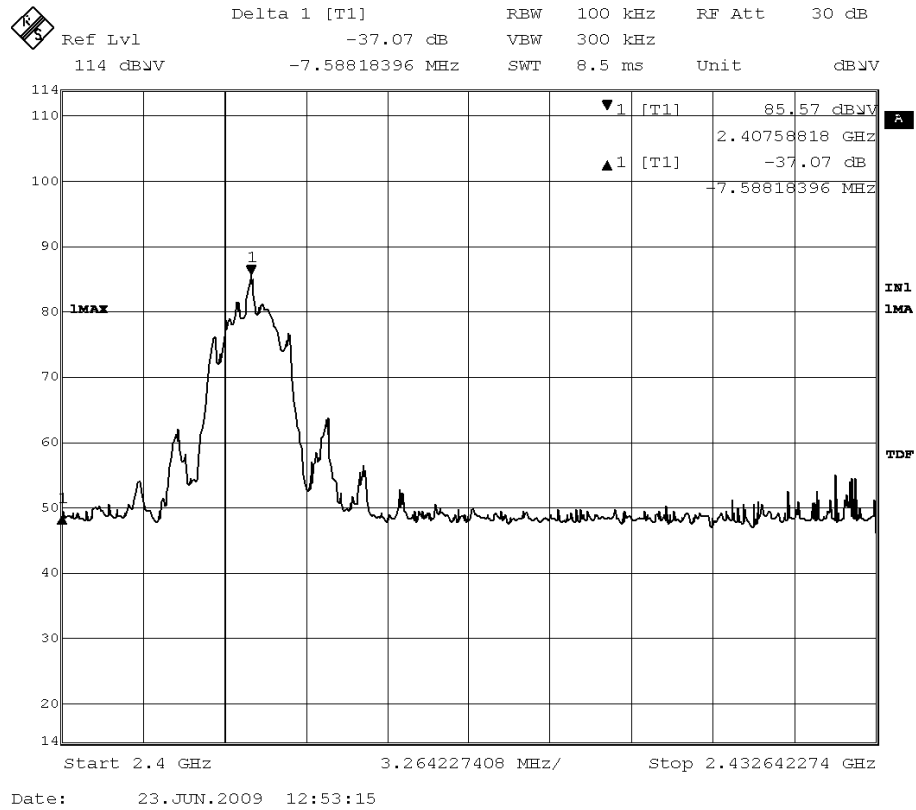


Figure 10 – Result data graph shows the frequency of highest channel.

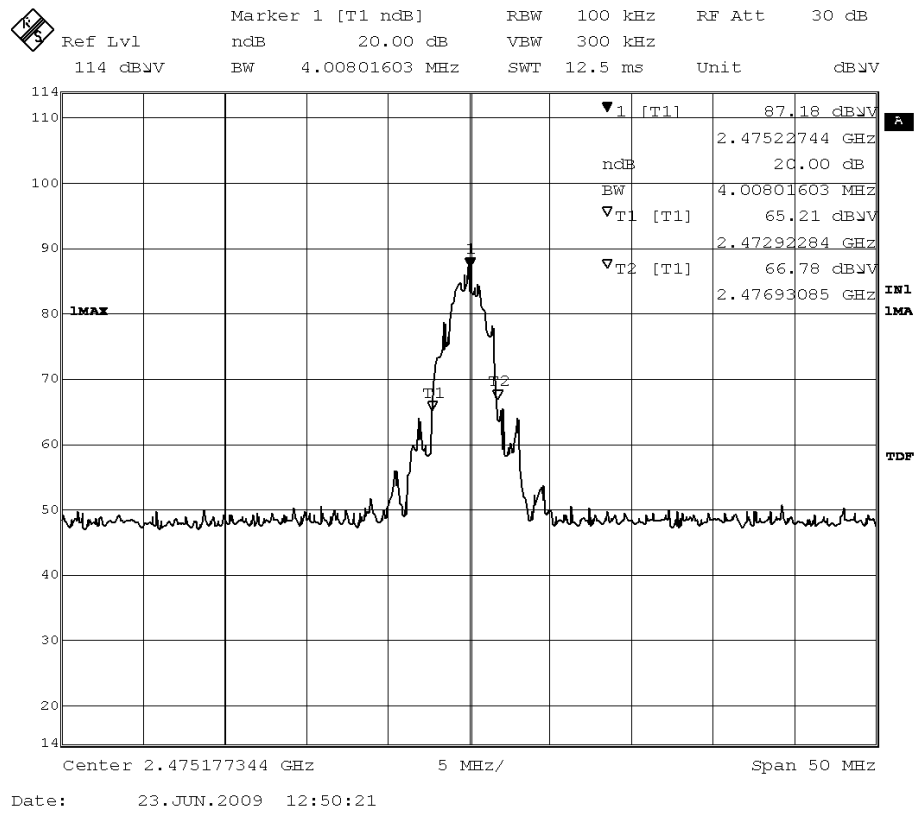


Report No.: 60.870.9.010.01F

4.7 Maximum Output Power

| | |
|--------------------|---------------------------------|
| Test Requirement: | FCC part 15 section 15.247 (a1) |
| Test Method: | ANSI C63.4:2003 |
| Test Date: | 2009-06-23 |
| Mode of Operation: | Communication mode. |
| Detector Function: | Peak |
| Measurement BW: | RBW 5MHz ; VBW 10MHz |

Test Setup:

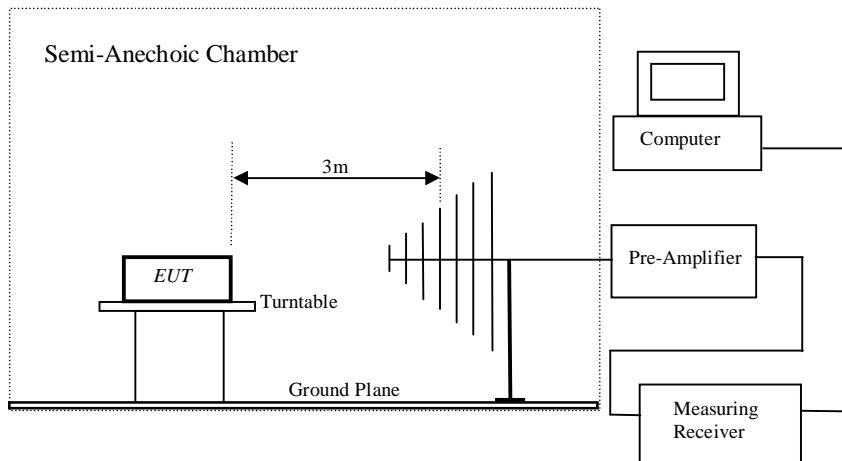

Report No.: 60.870.9.010.01F

Result : PASS

| Frequency (MHz) | Output Power | | Max. Output Power (mW) |
|--------------------------|--------------|-------|---------------------------|
| | (dBuV/m) | (V/m) | |
| Lowest Channel : 2407.9 | 105.1 | 0.179 | 7.71 |
| Middle Channel : 2443.6 | 95.6 | 0.060 | 0.86 |
| Highest Channel : 2475.2 | 94.2 | 0.051 | 0.62 |
| Limit | 117.2 | 0.723 | 125.0 |

Calculate the transmitter's peak power using the following equation:

$$E = \frac{\sqrt{30PG}}{d}$$

Where: E is the measured maximum fundamental field strength in V/m, utilizing a RBW \geq the 20 dB bandwidth of the emission, VBW > RBW, peak detector function. Follow the procedures in C63.4-2003 with respect to maximizing the emission.

G is the numeric gain of the transmitting antenna with reference to an isotropic radiator.
G = 1.258dBi.

d is the distance in meters from which the field strength was measured.

P is the power in watts for which you are solving:

$$P = \frac{(E*d)^2}{30G}$$


Limits for Maximum Output Power [Section 15.247 (a1)(iii)]:

For frequency hopping systems employing at least 75 hopping channels: 1 Watt
For all other frequency hopping systems in the 2400-2483.5 MHz band: 0.125 Watts

4.8 Out of Band Emissions and Emissions in Restricted Bands

| | |
|--------------------|--------------------------------|
| Test Requirement: | FCC part 15 section 15.247 (d) |
| Test Method: | ANSI C63.4:2003 |
| Test Date: | 2009-06-23 |
| Mode of Operation: | Communication mode. |
| Detector Function: | Peak |
| Measurement BW: | RBW 100KHz ; VBW 300KHz |

Test Setup:

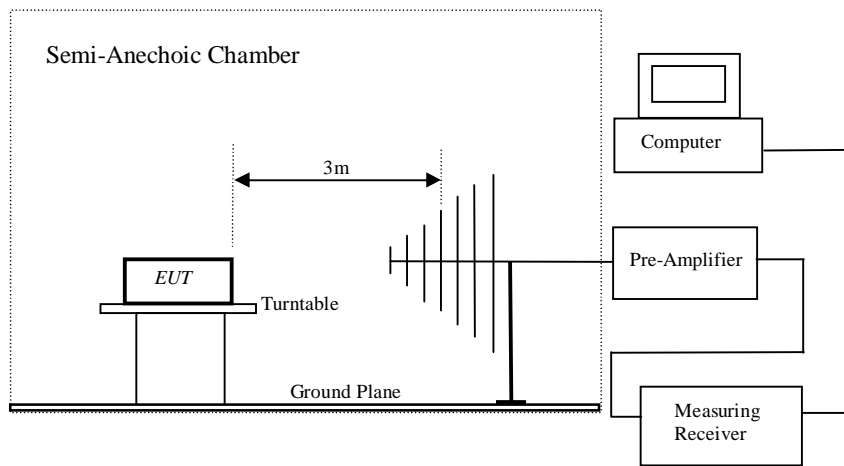

Result : PASS

| Out of Frequency Band Emissions |
|--|
| For out of band emissions that are close to or exceed 20dB attenuation requirement, and emission falls into restricted band, radiated emission was performed in order to show compliance with the general radiated emission requirement. |
| <p>Result Summary:</p> <p>Refer to Figure 11 to 13 for the emission data graph, result shows that the significant emissions detected are with more than 20dB below that in the 100KHz bandwidth within the band that contains the highest level of the desired power.</p> |

Limits for Out of Frequency Band Emission [Section 15.247 (d)]:

In any 100KHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100KHz bandwidth within the band that contains the highest level of the desired power. Attenuation below the general limits specified in Section 15.209(a) is not required.

Report No.: 60.870.9.010.01F

Result : PASS

All Emission and Emissions Fall into Restricted Band were recorded as below :

| Radiated Emissions | | | | | | |
|---------------------|------------------|---------|---------------|----------------------|--------|----------------|
| Emissions Frequency | E-Field Polarity | Reading | System Factor | Field strength at 3m | Limit | Delta to Limit |
| MHz | | dBuV/m | dB | dBuV/m | dBuV/m | dBuV/m |
| Lowest | Ch. | | | | | |
| No | | Peak | | Found | | |
| Middle | Ch. | | | | | |
| No | | Peak | | Found | | |
| Highest | Ch. | | | | | |
| No | | Peak | | Found | | |

Refer to Figure 11 to 13 for the emission data graph from 1Ghz to 18Ghz.

Result Summary:

- 1) Communication mode : All other emissions are more than 20dB below FCC part 15.209 limit.
- 2) No further spurious emissions found between 30 MHz and lowest internal used/generated frequency, and from 30MHz to 1GHz.

- Remarks :**
1. “ * ” Radiated emissions which fall in the restricted bands as defined in Section 15.205(a).
 2. Emission level with more than 20dB below the FCC required limit is not mentioned in table.
 3. Delta to Limit = Field strength (dBμV/m) – Limit (dBμV/m).
 3. Calculated measurement uncertainty: ±5.0dB.

Limit for Radiated Emission Falling in Restricted Bands [Section 15.209]:

| Frequency (MHz) | Field Strength [μV/m] | Field Strength [dBμV/m] |
|-----------------|-----------------------|-------------------------|
| 30-88 | 100 | 40.0 |
| 88-216 | 150 | 43.5 |
| 216-960 | 200 | 46.0 |
| Above 960 | 500 | 54.0 |

Radiated emissions, which fall in the restricted bands, as defined in Section 15.205(a), must also comply with the radiated emission limits specified in Section 15.209.

The emission limits shown in the above table are based on measurement employing a CISPR quasi-peak detector and above 1000MHz are based on measurements employing an average detector.

Figure 11 – Radiated emission data graph of lowest channel.

Report No.: 60.870.9.010.01F

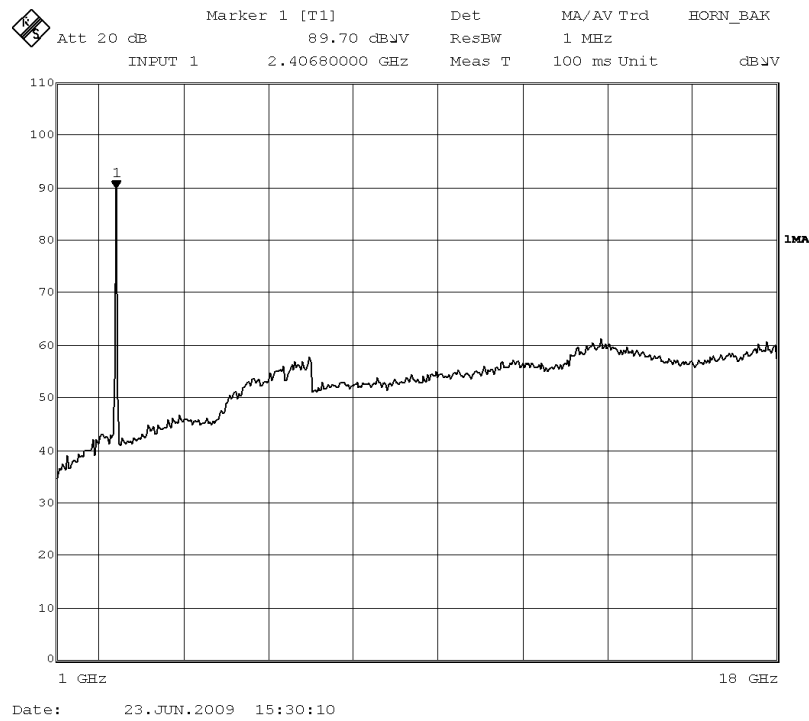


Figure 12 – Radiated emission data graph of middle channel.


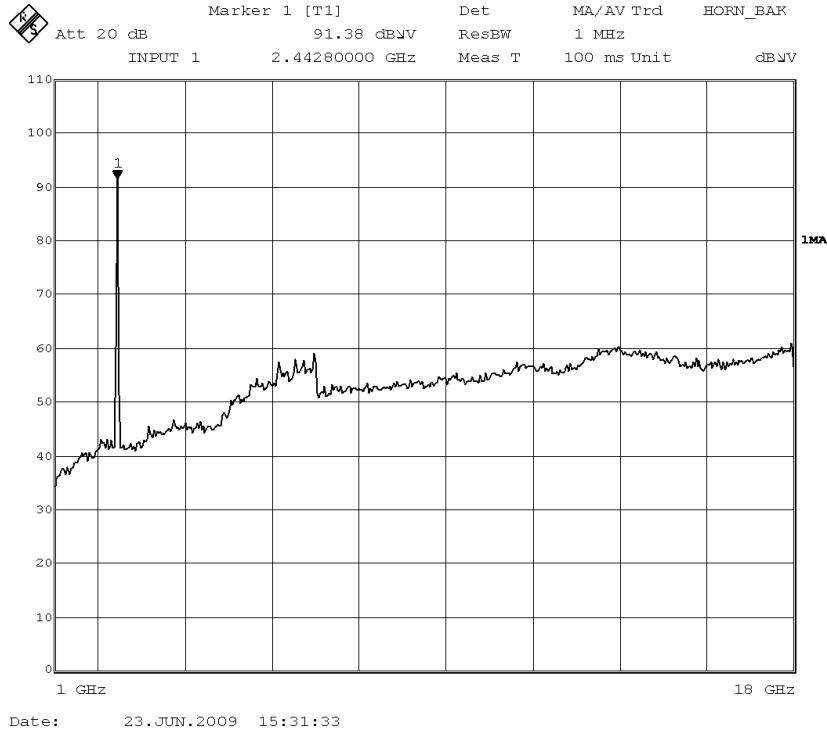


Figure 13 – Radiated emission data graph of highest channel.

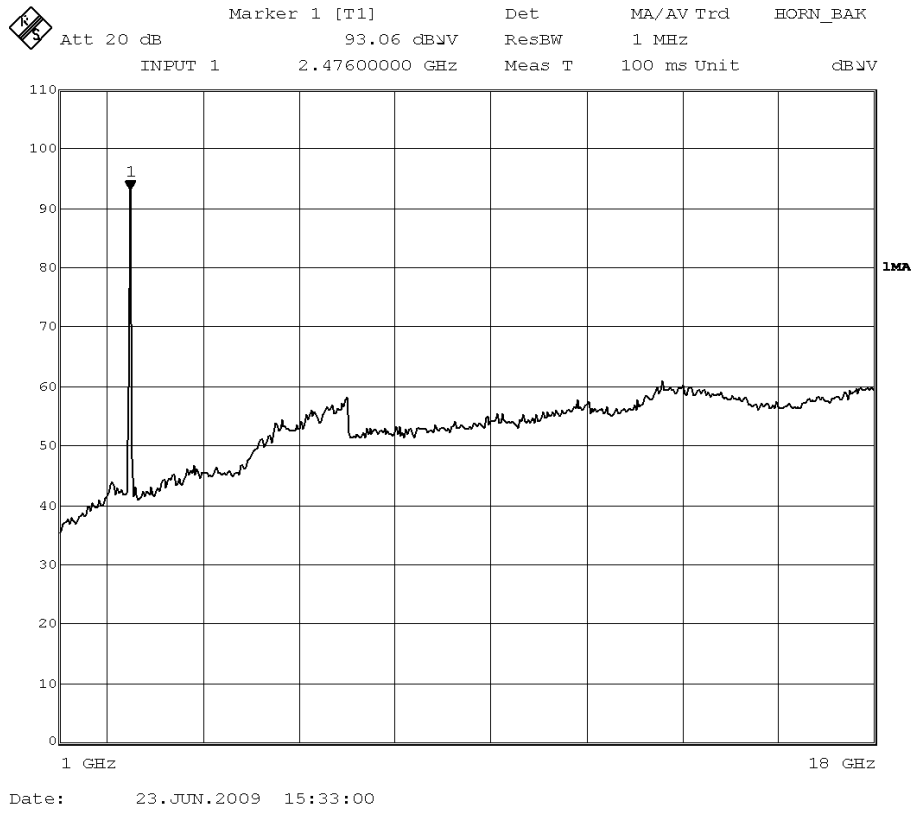

Report No.: 60.870.9.010.01F

4.9 Conducted Emissions (0.15MHz to 30MHz)

Test Requirement: FCC part 15 Section 15.207 Class B
Test Method: ANSI C63.4:2003
Test Date: 2009-06-23
Mode of Operation: Communication mode.
Detector Function: CISPR Quasi Peak
Measurement BW: 100 kHz
Worst Case Channel: 1

Results: PASS

- Refer Figure 14 and 15 for the result data graph .

Limits for Conducted Emission [Section 15.207]:

| Frequency Range [MHz] | Quasi-Peak Limit [dB μ V] | Average Limit [dB μ V] |
|--------------------------|----------------------------------|-------------------------------|
| 0.15-0.5 | 66 to 56* | 56 to 46* |
| 0.5-5.0 | 56 | 46 |
| 5.0-30.0 | 60 | 50 |

* Decreases with the logarithm of the frequency.

Remarks:


Calculated measurement uncertainty: ± 2.8 dB

Figure 14 – Result data graph shows the conducted emission (Live).

| Scan Settings | | | (2 Ranges) | | Receiver Settings | | | | |
|---------------|---------|-------|------------|----------|-------------------|-------|--------|-------|--|
| Frequencies | | Step | IF BW | Detector | M-Time | Atten | Preamp | OpRge | |
| Start | Stop | 5kHz | 9kHz | PK+AV | 20msec | Auto | OFF | 60dB | |
| 150kHz | 1000kHz | 20kHz | 9kHz | PK+AV | 20msec | Auto | OFF | 60dB | |
| 1000kHz | 30MHz | | | | | | | | |

| Transducer | No. | Start | Stop | Name |
|------------|-----|--------|-------|------|
| | 1 | 150kHz | 30MHz | 10dB |

| | | |
|--------------------|-------------|-------------|
| Final Measurement: | Detectors: | X QP / + AV |
| | Meas Time: | 1sec |
| | Subranges: | 25 |
| | Acc Margin: | 30 dB |

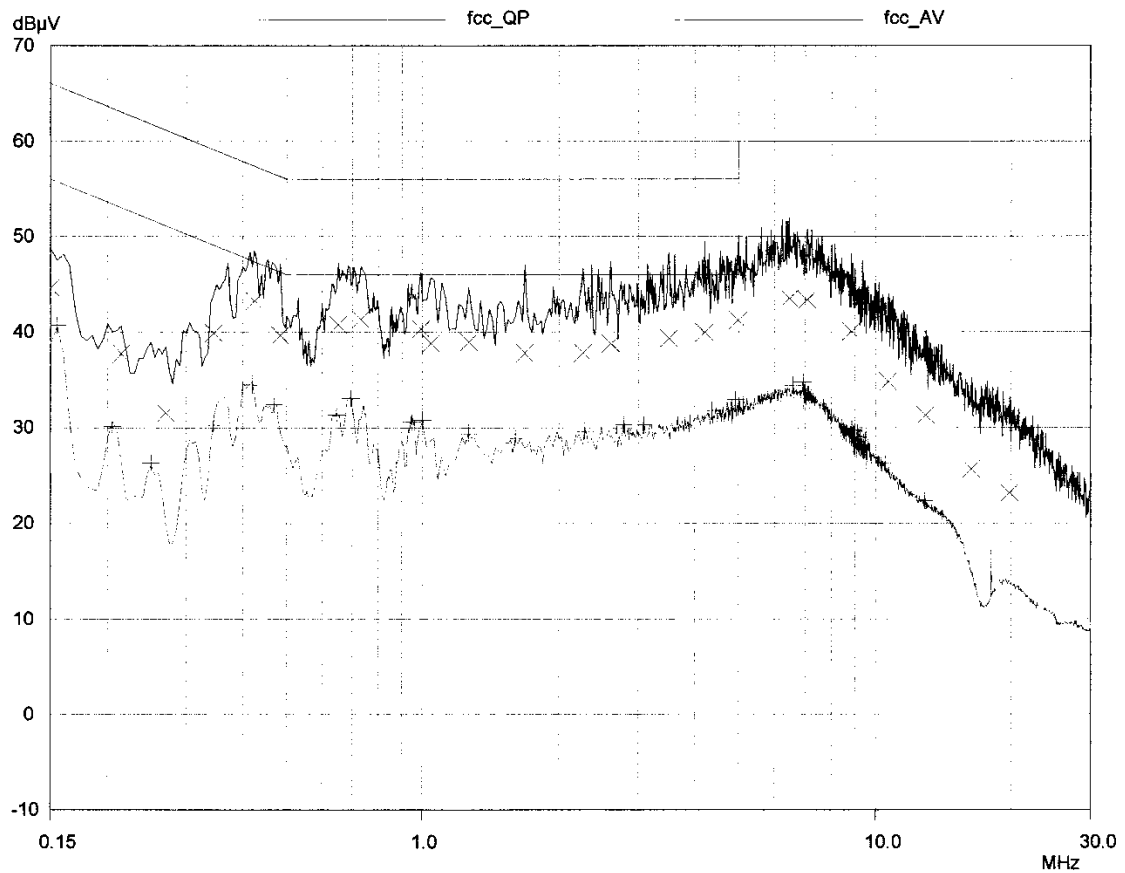

Report No.: 60.870.9.010.01F

| Scan Settings (2 Ranges) | | | Receiver Settings | | | | | |
|--------------------------|---------|-------|-------------------|----------|--------|-------|--------|-------|
| Frequencies | | | IF BW | Detector | M-Time | Atten | Preamp | OpRge |
| Start | Stop | Step | 9kHz | PK+AV | 20msec | Auto | OFF | 60dB |
| 150kHz | 1000kHz | 5kHz | 9kHz | PK+AV | 20msec | Auto | OFF | 60dB |
| 1000kHz | 30MHz | 20kHz | | | | | | |

| Transducer | No. | Start | Stop | Name |
|------------|-----|--------|-------|------|
| | 1 | 150kHz | 30MHz | 10dB |

Final Measurement:
Detectors: X QP / + AV
Meas Time: 1sec
Subranges: 25
Acc Margin: 30 dB

Final Measurement Results

| Frequency MHz | QP Level dBµV | QP Limit dBµV | QP Delta dB |
|------------------|------------------|------------------|----------------|
| 0.15 | 44.61 | 66.00 | 21.39 |
| 0.215 | 37.78 | 63.01 | 25.23 |
| 0.27 | 31.56 | 61.12 | 29.56 |
| 0.345 | 39.91 | 59.08 | 19.17 |
| 0.425 | 43.28 | 57.35 | 14.07 |
| 0.485 | 39.68 | 56.25 | 16.57 |
| 0.65 | 40.78 | 56.00 | 15.22 |
| 0.73 | 41.35 | 56.00 | 14.65 |
| 0.99 | 40.34 | 56.00 | 15.66 |
| 1.04 | 38.83 | 56.00 | 17.17 |
| 1.26 | 38.99 | 56.00 | 17.01 |
| 1.68 | 37.82 | 56.00 | 18.18 |
| 2.26 | 37.81 | 56.00 | 18.19 |
| 2.6 | 38.82 | 56.00 | 17.18 |
| 3.5 | 39.38 | 56.00 | 16.62 |
| 4.2 | 39.96 | 56.00 | 16.04 |
| 4.98 | 41.25 | 56.00 | 14.75 |
| 6.46 | 43.53 | 60.00 | 16.47 |
| 7.06 | 43.36 | 60.00 | 16.64 |
| 8.82 | 40.07 | 60.00 | 19.93 |
| 10.62 | 34.82 | 60.00 | 25.18 |
| 12.86 | 31.28 | 60.00 | 28.72 |
| 16.26 | 25.69 | 60.00 | 34.31 |
| 19.78 | 23.17 | 60.00 | 36.83 |

| Frequency MHz | AV Level dBµV | AV Limit dBµV | AV Delta dB |
|------------------|------------------|------------------|----------------|
| 0.155 | 40.72 | 55.73 | 15.01 |

* limit exceeded

Report No.: 60.870.9.010.01F

| Frequency MHz | AV Level dB μ V | AV Limit dB μ V | AV Delta dB |
|------------------|------------------------|------------------------|----------------|
| 0.205 | 30.14 | 53.41 | 23.27 |
| 0.25 | 26.31 | 51.76 | 25.45 |
| 0.345 | 30.30 | 49.08 | 18.78 |
| 0.42 | 34.52 | 47.45 | 12.93 |
| 0.47 | 32.41 | 46.51 | 14.10 |
| 0.645 | 31.34 | 46.00 | 14.66 |
| 0.695 | 33.07 | 46.00 | 12.93 |
| 0.945 | 30.60 | 46.00 | 15.40 |
| 1.0 | 30.80 | 46.00 | 15.20 |
| 1.26 | 29.39 | 46.00 | 16.61 |
| 1.6 | 28.91 | 46.00 | 17.09 |
| 2.28 | 29.64 | 46.00 | 16.36 |
| 2.78 | 30.34 | 46.00 | 15.66 |
| 3.08 | 30.27 | 46.00 | 15.73 |
| 4.36 | 31.81 | 46.00 | 14.19 |
| 4.92 | 32.98 | 46.00 | 13.02 |
| 6.58 | 34.43 | 50.00 | 15.57 |
| 6.92 | 34.73 | 50.00 | 15.27 |
| 8.88 | 29.72 | 50.00 | 20.28 |
| 10.44 | 26.32 | 50.00 | 23.68 |
| 12.82 | 22.39 | 50.00 | 27.61 |


* limit exceeded

Figure 15 – Result data graph shows the conducted emission (Neutral).

| Scan Settings | | | (2 Ranges) | | Receiver Settings | | | | |
|---------------|---------|-------|------------|----------|-------------------|-------|--------|-------|--|
| Start | Stop | Step | IF BW | Detector | M-Time | Atten | Preamp | OpRge | |
| 150kHz | 1000kHz | 5kHz | 9kHz | PK+AV | 20msec | Auto | OFF | 60dB | |
| 1000kHz | 30MHz | 20kHz | 9kHz | PK+AV | 20msec | Auto | OFF | 60dB | |

| Transducer | No. | Start | Stop | Name |
|------------|-----|--------|-------|------|
| | 1 | 150kHz | 30MHz | 10dB |

| | | |
|--------------------|-------------|-------------|
| Final Measurement: | Detectors: | X QP / + AV |
| | Meas Time: | 1sec |
| | Subranges: | 25 |
| | Acc Margin: | 30 dB |

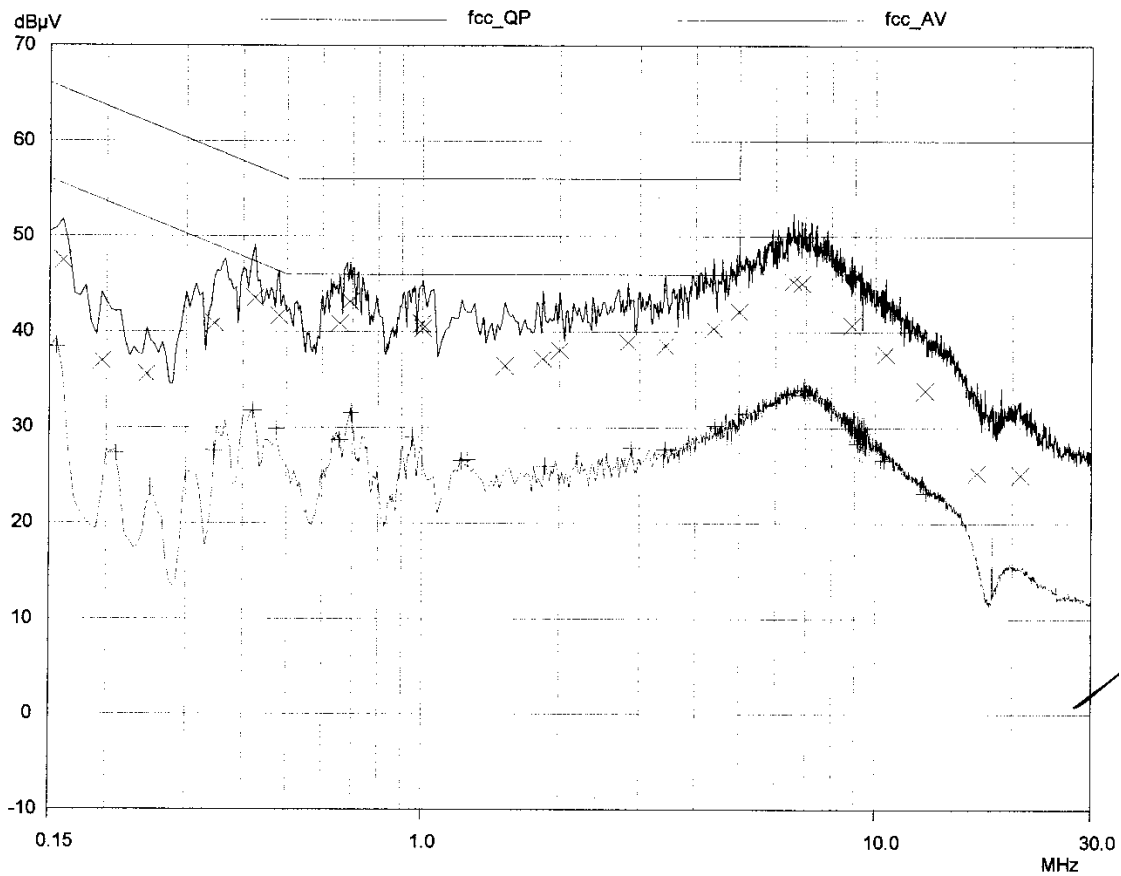

Report No.: 60.870.9.010.01F

| Scan Settings | | | (2 Ranges) | | Receiver Settings | | | | |
|---------------|---------|-------|------------|----------|-------------------|-------|--------|-------|--|
| Frequencies | | | | | | | | | |
| Start | Stop | Step | IF BW | Detector | M-Time | Atten | Preamp | OpRge | |
| 150kHz | 1000kHz | 5kHz | 9kHz | PK+AV | 20msec | Auto | OFF | 60dB | |
| 1000kHz | 30MHz | 20kHz | 9kHz | PK+AV | 20msec | Auto | OFF | 60dB | |

| Transducer | No. | Start | Stop | Name |
|------------|-----|--------|-------|------|
| | 1 | 150kHz | 30MHz | 10dB |

Final Measurement: Detectors: X QP / + AV
 Meas Time: 1sec
 Subranges: 25
 Acc Margin: 30 dB

Final Measurement Results

| Frequency MHz | QP Level dBµV | QP Limit dBµV | QP Delta dB |
|------------------|------------------|------------------|----------------|
| 0.16 | 47.49 | 65.46 | 17.97 |
| 0.195 | 36.95 | 63.82 | 26.87 |
| 0.245 | 35.55 | 61.92 | 26.37 |
| 0.345 | 40.88 | 59.08 | 18.20 |
| 0.425 | 43.54 | 57.35 | 13.81 |
| 0.48 | 41.69 | 56.34 | 14.65 |
| 0.655 | 40.88 | 56.00 | 15.12 |
| 0.69 | 43.16 | 56.00 | 12.84 |
| 0.995 | 40.86 | 56.00 | 15.14 |
| 1.0 | 40.39 | 56.00 | 15.61 |
| 1.52 | 36.45 | 56.00 | 19.55 |
| 1.84 | 37.20 | 56.00 | 18.80 |
| 2.0 | 38.10 | 56.00 | 17.90 |
| 2.82 | 38.90 | 56.00 | 17.10 |
| 3.42 | 38.59 | 56.00 | 17.41 |
| 4.38 | 40.39 | 56.00 | 15.61 |
| 4.98 | 42.15 | 56.00 | 13.85 |
| 6.56 | 45.31 | 60.00 | 14.69 |
| 6.86 | 45.09 | 60.00 | 14.91 |
| 8.84 | 40.72 | 60.00 | 19.28 |
| 10.52 | 37.68 | 60.00 | 22.32 |
| 12.82 | 33.85 | 60.00 | 26.15 |
| 16.7 | 25.25 | 60.00 | 34.75 |
| 20.78 | 25.05 | 60.00 | 34.95 |

Report No.: 60.870.9.010.01F

| Frequency MHz | AV Level dB μ V | AV Limit dB μ V | AV Delta dB |
|------------------|------------------------|------------------------|----------------|
| 0.155 | 38.48 | 55.73 | 17.25 |
| 0.21 | 27.34 | 53.21 | 25.87 |
| 0.25 | 23.74 | 51.76 | 28.02 |
| 0.345 | 27.56 | 49.08 | 21.52 |
| 0.42 | 31.77 | 47.45 | 15.68 |
| 0.475 | 29.89 | 46.43 | 16.54 |
| 0.655 | 28.72 | 46.00 | 17.28 |
| 0.695 | 31.53 | 46.00 | 14.47 |
| 0.95 | 28.97 | 46.00 | 17.03 |
| 1.22 | 26.51 | 46.00 | 19.49 |
| 1.26 | 26.62 | 46.00 | 19.38 |
| 1.86 | 25.98 | 46.00 | 20.02 |
| 2.18 | 27.06 | 46.00 | 18.94 |
| 2.88 | 27.82 | 46.00 | 18.18 |
| 3.42 | 27.70 | 46.00 | 18.30 |
| 4.42 | 30.19 | 46.00 | 15.81 |
| 4.98 | 31.44 | 46.00 | 14.56 |
| 6.38 | 33.51 | 50.00 | 16.49 |
| 6.94 | 33.43 | 50.00 | 16.57 |
| 9.16 | 28.36 | 50.00 | 21.64 |
| 10.42 | 26.58 | 50.00 | 23.42 |
| 12.86 | 23.15 | 50.00 | 26.85 |

* limit exceeded

5.0 List of Measurement Equipment

Radiated Emission

| EQP NO. | DESCRIPTION | MANUFACTURER | MODEL NO. | SERIAL NO. | LAST CAL | DUE CAL |
|---------|---------------------------|--------------|-----------|------------|------------|------------|
| EM020 | HORN ANTENNA | EMCO | 3115 | 4032 | 2006/07/11 | 2009/07/11 |
| EM215 | MULTIDEVICE CONTROLER | EMCO | 2090 | 00024676 | N/A | N/A |
| EM216 | MINI MAST SYSTEM | EMCO | 2075 | 00026842 | N/A | N/A |
| EM217 | ELECTRIC POWERED TURNABLE | EMCO | 2088 | 00029144 | N/A | N/A |
| EM218 | ANECHOIC CHAMBER | ETS-Linggren | FACT-3 | -- | 2008/12/01 | 2011/12/01 |
| EM174 | BICONILOG ANTENNA | EMCO | 3142B | 1671 | 2008/01/24 | 2010/01/24 |
| EM229 | EMI Test Receiver | R&S | ESIB40 | 100248 | 2008/09/08 | 2009/09/08 |
| EM022 | LOOP ANTENNA | EMCO | 6502 | 1189-2424 | 2006/07/26 | 2009/07/26 |

Conducted Emission

| EQP NO. | DESCRIPTION | MANUFACTURER | MODEL NO. | SERIAL NO. | LAST CAL | DUE CAL |
|---------|-------------------|-------------------------------|-----------|-----------------|------------|------------|
| EM197 | LISN | EMCO | 4825/2 | 1193 | 2007/10/30 | 2009/10/30 |
| EM181 | EMI TEST RECEIVER | ROHDE & SCHWARZ | ESIB7 | 100072 | 2009/05/16 | 2010/05/16 |
| EM154 | SHIELDING ROOM | SIEMENS MATSUSHITA COMPONENTS | N/A | 803-740-057-99A | 2009/01/23 | 2010/01/23 |

Remarks:

CM Corrective Maintenance
 N/A Not Applicable or Not Available