

EX3DV4--SN:3825

December 11, 2017

| | | | | | | | | |
|-----------|---|---|--------|--------|-------|------|------|---------|
| 10477-AAC | LTE-TDD (SC-FDMA, 1 RB, 20 MHz, 16-QAM, UL Subframe=2,3,4,7,8,9) | X | 1.43 | 64.62 | 10.56 | 3.23 | 80.0 | ± 9.6 % |
| | | Y | 0.80 | 60.55 | 7.56 | | 80.0 | |
| | | Z | 100.00 | 109.16 | 24.62 | | 80.0 | |
| 10478-AAC | LTE-TDD (SC-FDMA, 1 RB, 20 MHz, 64-QAM, UL Subframe=2,3,4,7,8,9) | X | 0.95 | 60.52 | 8.09 | 3.23 | 80.0 | ± 9.6 % |
| | | Y | 0.77 | 60.00 | 6.66 | | 80.0 | |
| | | Z | 43.52 | 96.79 | 20.82 | | 80.0 | |
| 10479-AAA | LTE-TDD (SC-FDMA, 50% RB, 1.4 MHz, QPSK, UL Subframe=2,3,4,7,8,9) | X | 31.75 | 107.06 | 28.29 | 3.23 | 80.0 | ± 9.6 % |
| | | Y | 100.00 | 125.39 | 32.67 | | 80.0 | |
| | | Z | 100.00 | 127.40 | 34.63 | | 80.0 | |
| 10480-AAA | LTE-TDD (SC-FDMA, 50% RB, 1.4 MHz, 16-QAM, UL Subframe=2,3,4,7,8,9) | X | 11.10 | 85.52 | 19.89 | 3.23 | 80.0 | ± 9.6 % |
| | | Y | 92.68 | 109.34 | 25.34 | | 80.0 | |
| | | Z | 100.00 | 116.37 | 29.53 | | 80.0 | |
| 10481-AAA | LTE-TDD (SC-FDMA, 50% RB, 1.4 MHz, 64-QAM, UL Subframe=2,3,4,7,8,9) | X | 5.85 | 77.06 | 16.75 | 3.23 | 80.0 | ± 9.6 % |
| | | Y | 12.62 | 85.46 | 18.78 | | 80.0 | |
| | | Z | 54.44 | 106.48 | 26.68 | | 80.0 | |
| 10482-AAA | LTE-TDD (SC-FDMA, 50% RB, 3 MHz, QPSK, UL Subframe=2,3,4,7,8,9) | X | 2.03 | 66.32 | 12.82 | 2.23 | 80.0 | ± 9.6 % |
| | | Y | 3.43 | 74.75 | 16.76 | | 80.0 | |
| | | Z | 5.52 | 80.78 | 20.11 | | 80.0 | |
| 10483-AAA | LTE-TDD (SC-FDMA, 50% RB, 3 MHz, 16-QAM, UL Subframe=2,3,4,7,8,9) | X | 2.99 | 68.11 | 13.27 | 2.23 | 80.0 | ± 9.6 % |
| | | Y | 3.50 | 70.93 | 14.37 | | 80.0 | |
| | | Z | 16.18 | 91.59 | 23.27 | | 80.0 | |
| 10484-AAA | LTE-TDD (SC-FDMA, 50% RB, 3 MHz, 64-QAM, UL Subframe=2,3,4,7,8,9) | X | 2.77 | 66.99 | 12.78 | 2.23 | 80.0 | ± 9.6 % |
| | | Y | 3.04 | 69.13 | 13.65 | | 80.0 | |
| | | Z | 11.94 | 87.22 | 21.97 | | 80.0 | |
| 10485-AAC | LTE-TDD (SC-FDMA, 50% RB, 5 MHz, QPSK, UL Subframe=2,3,4,7,8,9) | X | 2.96 | 71.13 | 16.22 | 2.23 | 80.0 | ± 9.6 % |
| | | Y | 4.57 | 79.69 | 20.15 | | 80.0 | |
| | | Z | 5.48 | 81.36 | 21.46 | | 80.0 | |
| 10486-AAC | LTE-TDD (SC-FDMA, 50% RB, 5 MHz, 16-QAM, UL Subframe=2,3,4,7,8,9) | X | 2.64 | 66.58 | 13.57 | 2.23 | 80.0 | ± 9.6 % |
| | | Y | 3.21 | 70.78 | 15.86 | | 80.0 | |
| | | Z | 4.03 | 73.05 | 17.80 | | 80.0 | |
| 10487-AAC | LTE-TDD (SC-FDMA, 50% RB, 5 MHz, 64-QAM, UL Subframe=2,3,4,7,8,9) | X | 2.63 | 66.20 | 13.38 | 2.23 | 80.0 | ± 9.6 % |
| | | Y | 3.11 | 69.98 | 15.50 | | 80.0 | |
| | | Z | 3.93 | 72.31 | 17.49 | | 80.0 | |
| 10488-AAC | LTE-TDD (SC-FDMA, 50% RB, 10 MHz, QPSK, UL Subframe=2,3,4,7,8,9) | X | 3.48 | 71.97 | 17.81 | 2.23 | 80.0 | ± 9.6 % |
| | | Y | 3.96 | 76.06 | 20.07 | | 80.0 | |
| | | Z | 4.73 | 77.37 | 20.80 | | 80.0 | |
| 10489-AAC | LTE-TDD (SC-FDMA, 50% RB, 10 MHz, 16-QAM, UL Subframe=2,3,4,7,8,9) | X | 3.44 | 68.97 | 16.47 | 2.23 | 80.0 | ± 9.6 % |
| | | Y | 3.53 | 70.95 | 17.82 | | 80.0 | |
| | | Z | 3.94 | 71.37 | 18.45 | | 80.0 | |
| 10490-AAC | LTE-TDD (SC-FDMA, 50% RB, 10 MHz, 64-QAM, UL Subframe=2,3,4,7,8,9) | X | 3.52 | 68.82 | 16.41 | 2.23 | 80.0 | ± 9.6 % |
| | | Y | 3.58 | 70.61 | 17.67 | | 80.0 | |
| | | Z | 4.00 | 71.00 | 18.31 | | 80.0 | |
| 10491-AAC | LTE-TDD (SC-FDMA, 50% RB, 15 MHz, QPSK, UL Subframe=2,3,4,7,8,9) | X | 3.73 | 70.76 | 17.64 | 2.23 | 80.0 | ± 9.6 % |
| | | Y | 3.88 | 73.05 | 19.10 | | 80.0 | |
| | | Z | 4.50 | 74.06 | 19.64 | | 80.0 | |
| 10492-AAC | LTE-TDD (SC-FDMA, 50% RB, 15 MHz, 16-QAM, UL Subframe=2,3,4,7,8,9) | X | 3.81 | 68.47 | 16.78 | 2.23 | 80.0 | ± 9.6 % |
| | | Y | 3.73 | 69.43 | 17.62 | | 80.0 | |
| | | Z | 4.13 | 69.84 | 18.11 | | 80.0 | |

EX3DV4- SN:3825

December 11, 2017

| | | | | | | | | |
|-----------|--|---|------|-------|-------|------|------|---------|
| 10493-AAC | LTE-TDD (SC-FDMA, 50% RB, 15 MHz, 64-QAM, UL Subframe=2,3,4,7,8,9) | X | 3.86 | 68.34 | 16.74 | 2.23 | 80.0 | ± 9.6 % |
| | | Y | 3.77 | 69.22 | 17.53 | | 80.0 | |
| | | Z | 4.18 | 69.62 | 18.02 | | 80.0 | |
| 10494-AAC | LTE-TDD (SC-FDMA, 50% RB, 20 MHz, QPSK, UL Subframe=2,3,4,7,8,9) | X | 4.00 | 71.95 | 18.02 | 2.23 | 80.0 | ± 9.6 % |
| | | Y | 4.31 | 74.93 | 19.73 | | 80.0 | |
| | | Z | 5.12 | 76.31 | 20.35 | | 80.0 | |
| 10495-AAC | LTE-TDD (SC-FDMA, 50% RB, 20 MHz, 16-QAM, UL Subframe=2,3,4,7,8,9) | X | 3.84 | 68.75 | 17.01 | 2.23 | 80.0 | ± 9.6 % |
| | | Y | 3.76 | 69.75 | 17.85 | | 80.0 | |
| | | Z | 4.19 | 70.35 | 18.36 | | 80.0 | |
| 10496-AAC | LTE-TDD (SC-FDMA, 50% RB, 20 MHz, 64-QAM, UL Subframe=2,3,4,7,8,9) | X | 3.92 | 68.56 | 16.96 | 2.23 | 80.0 | ± 9.6 % |
| | | Y | 3.82 | 69.40 | 17.73 | | 80.0 | |
| | | Z | 4.24 | 69.91 | 18.20 | | 80.0 | |
| 10497-AAA | LTE-TDD (SC-FDMA, 100% RB, 1.4 MHz, QPSK, UL Subframe=2,3,4,7,8,9) | X | 1.24 | 60.94 | 8.95 | 2.23 | 80.0 | ± 9.6 % |
| | | Y | 1.39 | 63.67 | 10.66 | | 80.0 | |
| | | Z | 3.28 | 73.05 | 16.16 | | 80.0 | |
| 10498-AAA | LTE-TDD (SC-FDMA, 100% RB, 1.4 MHz, 16-QAM, UL Subframe=2,3,4,7,8,9) | X | 1.30 | 60.00 | 7.37 | 2.23 | 80.0 | ± 9.6 % |
| | | Y | 1.16 | 60.00 | 7.53 | | 80.0 | |
| | | Z | 1.78 | 62.88 | 10.64 | | 80.0 | |
| 10499-AAA | LTE-TDD (SC-FDMA, 100% RB, 1.4 MHz, 64-QAM, UL Subframe=2,3,4,7,8,9) | X | 1.32 | 60.00 | 7.22 | 2.23 | 80.0 | ± 9.6 % |
| | | Y | 1.18 | 60.00 | 7.37 | | 80.0 | |
| | | Z | 1.70 | 62.13 | 10.11 | | 80.0 | |
| 10500-AAA | LTE-TDD (SC-FDMA, 100% RB, 3 MHz, QPSK, UL Subframe=2,3,4,7,8,9) | X | 3.17 | 71.49 | 16.88 | 2.23 | 80.0 | ± 9.6 % |
| | | Y | 4.16 | 77.76 | 19.98 | | 80.0 | |
| | | Z | 4.88 | 78.87 | 20.92 | | 80.0 | |
| 10501-AAA | LTE-TDD (SC-FDMA, 100% RB, 3 MHz, 16-QAM, UL Subframe=2,3,4,7,8,9) | X | 3.03 | 67.89 | 14.84 | 2.23 | 80.0 | ± 9.6 % |
| | | Y | 3.45 | 71.35 | 16.82 | | 80.0 | |
| | | Z | 3.99 | 72.36 | 18.05 | | 80.0 | |
| 10502-AAA | LTE-TDD (SC-FDMA, 100% RB, 3 MHz, 64-QAM, UL Subframe=2,3,4,7,8,9) | X | 3.05 | 67.87 | 14.67 | 2.23 | 80.0 | ± 9.6 % |
| | | Y | 3.46 | 70.97 | 16.58 | | 80.0 | |
| | | Z | 4.02 | 72.04 | 17.85 | | 80.0 | |
| 10503-AAC | LTE-TDD (SC-FDMA, 100% RB, 5 MHz, QPSK, UL Subframe=2,3,4,7,8,9) | X | 3.43 | 71.75 | 17.71 | 2.23 | 80.0 | ± 9.6 % |
| | | Y | 3.89 | 75.77 | 19.94 | | 80.0 | |
| | | Z | 4.64 | 77.07 | 20.66 | | 80.0 | |
| 10504-AAC | LTE-TDD (SC-FDMA, 100% RB, 5 MHz, 16-QAM, UL Subframe=2,3,4,7,8,9) | X | 3.42 | 68.85 | 16.40 | 2.23 | 80.0 | ± 9.6 % |
| | | Y | 3.51 | 70.81 | 17.74 | | 80.0 | |
| | | Z | 3.91 | 71.24 | 18.38 | | 80.0 | |
| 10505-AAC | LTE-TDD (SC-FDMA, 100% RB, 5 MHz, 64-QAM, UL Subframe=2,3,4,7,8,9) | X | 3.49 | 68.71 | 16.35 | 2.23 | 80.0 | ± 9.6 % |
| | | Y | 3.56 | 70.49 | 17.60 | | 80.0 | |
| | | Z | 3.97 | 70.88 | 18.24 | | 80.0 | |
| 10506-AAC | LTE-TDD (SC-FDMA, 100% RB, 10 MHz, QPSK, UL Subframe=2,3,4,7,8,9) | X | 3.96 | 71.79 | 17.94 | 2.23 | 80.0 | ± 9.6 % |
| | | Y | 4.27 | 74.73 | 19.64 | | 80.0 | |
| | | Z | 5.06 | 76.10 | 20.25 | | 80.0 | |
| 10507-AAC | LTE-TDD (SC-FDMA, 100% RB, 10 MHz, 16-QAM, UL Subframe=2,3,4,7,8,9) | X | 3.82 | 68.68 | 16.96 | 2.23 | 80.0 | ± 9.6 % |
| | | Y | 3.74 | 69.67 | 17.81 | | 80.0 | |
| | | Z | 4.17 | 70.27 | 18.31 | | 80.0 | |

EX3DV4- SN:3825

December 11, 2017

| | | | | | | | | |
|-----------|---|---|------|-------|-------|------|-------|---------|
| 10508-AAC | LTE-TDD (SC-FDMA, 100% RB, 10 MHz, 64-QAM, UL Subframe=2,3,4,7,8,9) | X | 3.91 | 68.48 | 16.91 | 2.23 | 80.0 | ± 9.6 % |
| | | Y | 3.80 | 69.31 | 17.67 | | 80.0 | |
| | | Z | 4.22 | 69.83 | 18.15 | | 80.0 | |
| 10509-AAC | LTE-TDD (SC-FDMA, 100% RB, 15 MHz, QPSK, UL Subframe=2,3,4,7,8,9) | X | 4.35 | 70.81 | 17.65 | 2.23 | 80.0 | ± 9.6 % |
| | | Y | 4.45 | 72.66 | 18.82 | | 80.0 | |
| | | Z | 5.06 | 73.55 | 19.25 | | 80.0 | |
| 10510-AAC | LTE-TDD (SC-FDMA, 100% RB, 15 MHz, 16-QAM, UL Subframe=2,3,4,7,8,9) | X | 4.31 | 68.43 | 17.08 | 2.23 | 80.0 | ± 9.6 % |
| | | Y | 4.15 | 68.97 | 17.65 | | 80.0 | |
| | | Z | 4.59 | 69.56 | 18.09 | | 80.0 | |
| 10511-AAC | LTE-TDD (SC-FDMA, 100% RB, 15 MHz, 64-QAM, UL Subframe=2,3,4,7,8,9) | X | 4.38 | 68.26 | 17.05 | 2.23 | 80.0 | ± 9.6 % |
| | | Y | 4.20 | 68.70 | 17.57 | | 80.0 | |
| | | Z | 4.62 | 69.20 | 17.98 | | 80.0 | |
| 10512-AAC | LTE-TDD (SC-FDMA, 100% RB, 20 MHz, QPSK, UL Subframe=2,3,4,7,8,9) | X | 4.46 | 71.92 | 17.95 | 2.23 | 80.0 | ± 9.6 % |
| | | Y | 4.77 | 74.58 | 19.44 | | 80.0 | |
| | | Z | 5.58 | 75.93 | 20.01 | | 80.0 | |
| 10513-AAC | LTE-TDD (SC-FDMA, 100% RB, 20 MHz, 16-QAM, UL Subframe=2,3,4,7,8,9) | X | 4.20 | 68.58 | 17.14 | 2.23 | 80.0 | ± 9.6 % |
| | | Y | 4.05 | 69.22 | 17.78 | | 80.0 | |
| | | Z | 4.51 | 69.99 | 18.27 | | 80.0 | |
| 10514-AAC | LTE-TDD (SC-FDMA, 100% RB, 20 MHz, 64-QAM, UL Subframe=2,3,4,7,8,9) | X | 4.23 | 68.26 | 17.06 | 2.23 | 80.0 | ± 9.6 % |
| | | Y | 4.07 | 68.76 | 17.62 | | 80.0 | |
| | | Z | 4.49 | 69.41 | 18.08 | | 80.0 | |
| 10515-AAA | IEEE 802.11b WiFi 2.4 GHz (DSSS, 2 Mbps, 99pc duty cycle) | X | 0.97 | 63.18 | 14.59 | 0.00 | 150.0 | ± 9.6 % |
| | | Y | 0.98 | 65.10 | 16.12 | | 150.0 | |
| | | Z | 0.90 | 63.51 | 15.08 | | 150.0 | |
| 10516-AAA | IEEE 802.11b WiFi 2.4 GHz (DSSS, 5.5 Mbps, 99pc duty cycle) | X | 0.56 | 69.02 | 16.67 | 0.00 | 150.0 | ± 9.6 % |
| | | Y | 2.30 | 98.70 | 29.02 | | 150.0 | |
| | | Z | 0.89 | 80.21 | 20.96 | | 150.0 | |
| 10517-AAA | IEEE 802.11b WiFi 2.4 GHz (DSSS, 11 Mbps, 99pc duty cycle) | X | 0.81 | 64.80 | 15.10 | 0.00 | 150.0 | ± 9.6 % |
| | | Y | 0.89 | 68.93 | 17.84 | | 150.0 | |
| | | Z | 0.78 | 66.25 | 16.06 | | 150.0 | |
| 10518-AAB | IEEE 802.11a/h WiFi 5 GHz (OFDM, 9 Mbps, 99pc duty cycle) | X | 4.36 | 66.86 | 16.17 | 0.00 | 150.0 | ± 9.6 % |
| | | Y | 4.37 | 67.31 | 16.45 | | 150.0 | |
| | | Z | 4.48 | 66.72 | 16.29 | | 150.0 | |
| 10519-AAB | IEEE 802.11a/h WiFi 5 GHz (OFDM, 12 Mbps, 99pc duty cycle) | X | 4.50 | 67.02 | 16.26 | 0.00 | 150.0 | ± 9.6 % |
| | | Y | 4.52 | 67.46 | 16.53 | | 150.0 | |
| | | Z | 4.67 | 66.96 | 16.41 | | 150.0 | |
| 10520-AAB | IEEE 802.11a/h WiFi 5 GHz (OFDM, 18 Mbps, 99pc duty cycle) | X | 4.36 | 66.96 | 16.17 | 0.00 | 150.0 | ± 9.6 % |
| | | Y | 4.38 | 67.43 | 16.46 | | 150.0 | |
| | | Z | 4.52 | 66.92 | 16.34 | | 150.0 | |
| 10521-AAB | IEEE 802.11a/h WiFi 5 GHz (OFDM, 24 Mbps, 99pc duty cycle) | X | 4.29 | 66.93 | 16.15 | 0.00 | 150.0 | ± 9.6 % |
| | | Y | 4.31 | 67.41 | 16.45 | | 150.0 | |
| | | Z | 4.45 | 66.92 | 16.32 | | 150.0 | |
| 10522-AAB | IEEE 802.11a/h WiFi 5 GHz (OFDM, 36 Mbps, 99pc duty cycle) | X | 4.34 | 67.04 | 16.24 | 0.00 | 150.0 | ± 9.6 % |
| | | Y | 4.36 | 67.52 | 16.54 | | 150.0 | |
| | | Z | 4.51 | 67.02 | 16.41 | | 150.0 | |

EX3DV4- SN:3825

December 11, 2017

| | | | | | | | | |
|-----------|--|---|------|-------|-------|------|-------|---------|
| 10523-AAB | IEEE 802.11a/h WiFi 5 GHz (OFDM, 48 Mbps, 99pc duty cycle) | X | 4.27 | 67.05 | 16.17 | 0.00 | 150.0 | ± 9.6 % |
| | | Y | 4.29 | 67.55 | 16.48 | | 150.0 | |
| | | Z | 4.39 | 66.88 | 16.26 | | 150.0 | |
| 10524-AAB | IEEE 802.11a/h WiFi 5 GHz (OFDM, 54 Mbps, 99pc duty cycle) | X | 4.30 | 67.00 | 16.24 | 0.00 | 150.0 | ± 9.6 % |
| | | Y | 4.31 | 67.49 | 16.54 | | 150.0 | |
| | | Z | 4.46 | 66.93 | 16.38 | | 150.0 | |
| 10525-AAB | IEEE 802.11ac WiFi (20MHz, MCS0, 99pc duty cycle) | X | 4.33 | 66.13 | 15.87 | 0.00 | 150.0 | ± 9.6 % |
| | | Y | 4.35 | 66.62 | 16.17 | | 150.0 | |
| | | Z | 4.45 | 65.98 | 15.98 | | 150.0 | |
| 10526-AAB | IEEE 802.11ac WiFi (20MHz, MCS1, 99pc duty cycle) | X | 4.45 | 66.40 | 15.98 | 0.00 | 150.0 | ± 9.6 % |
| | | Y | 4.48 | 66.90 | 16.28 | | 150.0 | |
| | | Z | 4.62 | 66.35 | 16.12 | | 150.0 | |
| 10527-AAB | IEEE 802.11ac WiFi (20MHz, MCS2, 99pc duty cycle) | X | 4.38 | 66.37 | 15.92 | 0.00 | 150.0 | ± 9.6 % |
| | | Y | 4.41 | 66.89 | 16.23 | | 150.0 | |
| | | Z | 4.54 | 66.31 | 16.06 | | 150.0 | |
| 10528-AAB | IEEE 802.11ac WiFi (20MHz, MCS3, 99pc duty cycle) | X | 4.40 | 66.38 | 15.95 | 0.00 | 150.0 | ± 9.6 % |
| | | Y | 4.43 | 66.90 | 16.26 | | 150.0 | |
| | | Z | 4.55 | 66.33 | 16.09 | | 150.0 | |
| 10529-AAB | IEEE 802.11ac WiFi (20MHz, MCS4, 99pc duty cycle) | X | 4.40 | 66.38 | 15.95 | 0.00 | 150.0 | ± 9.6 % |
| | | Y | 4.43 | 66.90 | 16.26 | | 150.0 | |
| | | Z | 4.55 | 66.33 | 16.09 | | 150.0 | |
| 10531-AAB | IEEE 802.11ac WiFi (20MHz, MCS6, 99pc duty cycle) | X | 4.36 | 66.40 | 15.93 | 0.00 | 150.0 | ± 9.6 % |
| | | Y | 4.39 | 66.94 | 16.25 | | 150.0 | |
| | | Z | 4.55 | 66.44 | 16.11 | | 150.0 | |
| 10532-AAB | IEEE 802.11ac WiFi (20MHz, MCS7, 99pc duty cycle) | X | 4.24 | 66.26 | 15.86 | 0.00 | 150.0 | ± 9.6 % |
| | | Y | 4.28 | 66.82 | 16.20 | | 150.0 | |
| | | Z | 4.41 | 66.29 | 16.04 | | 150.0 | |
| 10533-AAB | IEEE 802.11ac WiFi (20MHz, MCS8, 99pc duty cycle) | X | 4.40 | 66.46 | 15.95 | 0.00 | 150.0 | ± 9.6 % |
| | | Y | 4.43 | 66.99 | 16.27 | | 150.0 | |
| | | Z | 4.56 | 66.38 | 16.09 | | 150.0 | |
| 10534-AAB | IEEE 802.11ac WiFi (40MHz, MCS0, 99pc duty cycle) | X | 4.96 | 66.38 | 16.02 | 0.00 | 150.0 | ± 9.6 % |
| | | Y | 4.96 | 66.77 | 16.24 | | 150.0 | |
| | | Z | 5.09 | 66.40 | 16.14 | | 150.0 | |
| 10535-AAB | IEEE 802.11ac WiFi (40MHz, MCS1, 99pc duty cycle) | X | 5.00 | 66.50 | 16.08 | 0.00 | 150.0 | ± 9.6 % |
| | | Y | 5.00 | 66.90 | 16.30 | | 150.0 | |
| | | Z | 5.16 | 66.60 | 16.23 | | 150.0 | |
| 10536-AAB | IEEE 802.11ac WiFi (40MHz, MCS2, 99pc duty cycle) | X | 4.89 | 66.50 | 16.05 | 0.00 | 150.0 | ± 9.6 % |
| | | Y | 4.90 | 66.93 | 16.30 | | 150.0 | |
| | | Z | 5.03 | 66.54 | 16.18 | | 150.0 | |
| 10537-AAB | IEEE 802.11ac WiFi (40MHz, MCS3, 99pc duty cycle) | X | 4.95 | 66.50 | 16.06 | 0.00 | 150.0 | ± 9.6 % |
| | | Y | 4.96 | 66.89 | 16.28 | | 150.0 | |
| | | Z | 5.09 | 66.51 | 16.17 | | 150.0 | |
| 10538-AAB | IEEE 802.11ac WiFi (40MHz, MCS4, 99pc duty cycle) | X | 5.02 | 66.46 | 16.07 | 0.00 | 150.0 | ± 9.6 % |
| | | Y | 5.02 | 66.84 | 16.29 | | 150.0 | |
| | | Z | 5.18 | 66.52 | 16.21 | | 150.0 | |
| 10540-AAB | IEEE 802.11ac WiFi (40MHz, MCS6, 99pc duty cycle) | X | 4.95 | 66.42 | 16.07 | 0.00 | 150.0 | ± 9.6 % |
| | | Y | 4.95 | 66.82 | 16.30 | | 150.0 | |
| | | Z | 5.11 | 66.56 | 16.25 | | 150.0 | |

EX3DV4- SN:3825

December 11, 2017

| | | | | | | | | |
|-----------|--|---|------|-------|-------|------|-------|---------|
| 10541-AAB | IEEE 802.11ac WiFi (40MHz, MCS7, 99pc duty cycle) | X | 4.93 | 66.34 | 16.02 | 0.00 | 150.0 | ± 9.6 % |
| | | Y | 4.94 | 66.74 | 16.24 | | 150.0 | |
| | | Z | 5.08 | 66.40 | 16.16 | | 150.0 | |
| 10542-AAB | IEEE 802.11ac WiFi (40MHz, MCS8, 99pc duty cycle) | X | 5.09 | 66.44 | 16.08 | 0.00 | 150.0 | ± 9.6 % |
| | | Y | 5.09 | 66.81 | 16.29 | | 150.0 | |
| | | Z | 5.23 | 66.47 | 16.21 | | 150.0 | |
| 10543-AAB | IEEE 802.11ac WiFi (40MHz, MCS9, 99pc duty cycle) | X | 5.16 | 66.52 | 16.15 | 0.00 | 150.0 | ± 9.6 % |
| | | Y | 5.15 | 66.85 | 16.34 | | 150.0 | |
| | | Z | 5.31 | 66.51 | 16.25 | | 150.0 | |
| 10544-AAB | IEEE 802.11ac WiFi (80MHz, MCS0, 99pc duty cycle) | X | 5.30 | 66.46 | 16.01 | 0.00 | 150.0 | ± 9.6 % |
| | | Y | 5.30 | 66.81 | 16.20 | | 150.0 | |
| | | Z | 5.40 | 66.49 | 16.12 | | 150.0 | |
| 10545-AAB | IEEE 802.11ac WiFi (80MHz, MCS1, 99pc duty cycle) | X | 5.47 | 66.88 | 16.18 | 0.00 | 150.0 | ± 9.6 % |
| | | Y | 5.46 | 67.20 | 16.35 | | 150.0 | |
| | | Z | 5.61 | 66.95 | 16.30 | | 150.0 | |
| 10546-AAB | IEEE 802.11ac WiFi (80MHz, MCS2, 99pc duty cycle) | X | 5.33 | 66.58 | 16.04 | 0.00 | 150.0 | ± 9.6 % |
| | | Y | 5.33 | 66.94 | 16.24 | | 150.0 | |
| | | Z | 5.47 | 66.71 | 16.19 | | 150.0 | |
| 10547-AAB | IEEE 802.11ac WiFi (80MHz, MCS3, 99pc duty cycle) | X | 5.42 | 66.69 | 16.09 | 0.00 | 150.0 | ± 9.6 % |
| | | Y | 5.40 | 67.02 | 16.27 | | 150.0 | |
| | | Z | 5.54 | 66.75 | 16.20 | | 150.0 | |
| 10548-AAB | IEEE 802.11ac WiFi (80MHz, MCS4, 99pc duty cycle) | X | 5.55 | 67.27 | 16.36 | 0.00 | 150.0 | ± 9.6 % |
| | | Y | 5.54 | 67.62 | 16.54 | | 150.0 | |
| | | Z | 5.84 | 67.84 | 16.71 | | 150.0 | |
| 10550-AAB | IEEE 802.11ac WiFi (80MHz, MCS6, 99pc duty cycle) | X | 5.39 | 66.76 | 16.14 | 0.00 | 150.0 | ± 9.6 % |
| | | Y | 5.37 | 67.07 | 16.31 | | 150.0 | |
| | | Z | 5.50 | 66.74 | 16.22 | | 150.0 | |
| 10551-AAB | IEEE 802.11ac WiFi (80MHz, MCS7, 99pc duty cycle) | X | 5.33 | 66.54 | 16.00 | 0.00 | 150.0 | ± 9.6 % |
| | | Y | 5.33 | 66.91 | 16.20 | | 150.0 | |
| | | Z | 5.50 | 66.77 | 16.19 | | 150.0 | |
| 10552-AAB | IEEE 802.11ac WiFi (80MHz, MCS8, 99pc duty cycle) | X | 5.31 | 66.58 | 16.02 | 0.00 | 150.0 | ± 9.6 % |
| | | Y | 5.31 | 66.95 | 16.22 | | 150.0 | |
| | | Z | 5.41 | 66.55 | 16.10 | | 150.0 | |
| 10553-AAB | IEEE 802.11ac WiFi (80MHz, MCS9, 99pc duty cycle) | X | 5.37 | 66.52 | 16.02 | 0.00 | 150.0 | ± 9.6 % |
| | | Y | 5.36 | 66.88 | 16.21 | | 150.0 | |
| | | Z | 5.49 | 66.59 | 16.14 | | 150.0 | |
| 10554-AAC | IEEE 802.11ac WiFi (160MHz, MCS0, 99pc duty cycle) | X | 5.73 | 66.79 | 16.09 | 0.00 | 150.0 | ± 9.6 % |
| | | Y | 5.71 | 67.11 | 16.25 | | 150.0 | |
| | | Z | 5.81 | 66.85 | 16.20 | | 150.0 | |
| 10555-AAC | IEEE 802.11ac WiFi (160MHz, MCS1, 99pc duty cycle) | X | 5.82 | 67.01 | 16.18 | 0.00 | 150.0 | ± 9.6 % |
| | | Y | 5.80 | 67.33 | 16.35 | | 150.0 | |
| | | Z | 5.95 | 67.17 | 16.34 | | 150.0 | |
| 10556-AAC | IEEE 802.11ac WiFi (160MHz, MCS2, 99pc duty cycle) | X | 5.85 | 67.12 | 16.23 | 0.00 | 150.0 | ± 9.6 % |
| | | Y | 5.83 | 67.42 | 16.38 | | 150.0 | |
| | | Z | 5.97 | 67.22 | 16.36 | | 150.0 | |
| 10557-AAC | IEEE 802.11ac WiFi (160MHz, MCS3, 99pc duty cycle) | X | 5.81 | 66.99 | 16.18 | 0.00 | 150.0 | ± 9.6 % |
| | | Y | 5.80 | 67.32 | 16.35 | | 150.0 | |
| | | Z | 5.93 | 67.11 | 16.32 | | 150.0 | |

EX3DV4- SN:3825

December 11, 2017

| | | | | | | | | |
|-----------|---|---|--------|--------|-------|------|-------|---------|
| 10558-AAC | IEEE 802.11ac WiFi (160MHz, MCS4, 99pc duty cycle) | X | 5.82 | 67.05 | 16.23 | 0.00 | 150.0 | ± 9.6 % |
| | | Y | 5.81 | 67.40 | 16.41 | | 150.0 | |
| | | Z | 5.98 | 67.28 | 16.42 | | 150.0 | |
| 10560-AAC | IEEE 802.11ac WiFi (160MHz, MCS6, 99pc duty cycle) | X | 5.84 | 66.98 | 16.23 | 0.00 | 150.0 | ± 9.6 % |
| | | Y | 5.83 | 67.31 | 16.40 | | 150.0 | |
| | | Z | 5.97 | 67.11 | 16.38 | | 150.0 | |
| 10561-AAC | IEEE 802.11ac WiFi (160MHz, MCS7, 99pc duty cycle) | X | 5.77 | 66.96 | 16.25 | 0.00 | 150.0 | ± 9.6 % |
| | | Y | 5.76 | 67.28 | 16.42 | | 150.0 | |
| | | Z | 5.90 | 67.10 | 16.41 | | 150.0 | |
| 10562-AAC | IEEE 802.11ac WiFi (160MHz, MCS8, 99pc duty cycle) | X | 5.82 | 67.12 | 16.33 | 0.00 | 150.0 | ± 9.6 % |
| | | Y | 5.81 | 67.47 | 16.52 | | 150.0 | |
| | | Z | 6.03 | 67.49 | 16.60 | | 150.0 | |
| 10563-AAC | IEEE 802.11ac WiFi (160MHz, MCS9, 99pc duty cycle) | X | 5.92 | 67.10 | 16.29 | 0.00 | 150.0 | ± 9.6 % |
| | | Y | 5.90 | 67.39 | 16.43 | | 150.0 | |
| | | Z | 6.25 | 67.76 | 16.69 | | 150.0 | |
| 10564-AAA | IEEE 802.11g WiFi 2.4 GHz (DSSS-OFDM, 9 Mbps, 99pc duty cycle) | X | 4.67 | 66.86 | 16.28 | 0.46 | 150.0 | ± 9.6 % |
| | | Y | 4.67 | 67.25 | 16.52 | | 150.0 | |
| | | Z | 4.81 | 66.77 | 16.43 | | 150.0 | |
| 10565-AAA | IEEE 802.11g WiFi 2.4 GHz (DSSS-OFDM, 12 Mbps, 99pc duty cycle) | X | 4.67 | 67.29 | 16.61 | 0.46 | 150.0 | ± 9.6 % |
| | | Y | 4.87 | 67.67 | 16.84 | | 150.0 | |
| | | Z | 5.04 | 67.24 | 16.77 | | 150.0 | |
| 10566-AAA | IEEE 802.11g WiFi 2.4 GHz (DSSS-OFDM, 18 Mbps, 99pc duty cycle) | X | 4.70 | 67.09 | 16.40 | 0.46 | 150.0 | ± 9.6 % |
| | | Y | 4.71 | 67.49 | 16.65 | | 150.0 | |
| | | Z | 4.87 | 67.08 | 16.58 | | 150.0 | |
| 10567-AAA | IEEE 802.11g WiFi 2.4 GHz (DSSS-OFDM, 24 Mbps, 99pc duty cycle) | X | 4.75 | 67.54 | 16.81 | 0.46 | 150.0 | ± 9.6 % |
| | | Y | 4.75 | 67.96 | 17.06 | | 150.0 | |
| | | Z | 4.91 | 67.52 | 16.97 | | 150.0 | |
| 10568-AAA | IEEE 802.11g WiFi 2.4 GHz (DSSS-OFDM, 36 Mbps, 99pc duty cycle) | X | 4.59 | 66.78 | 16.11 | 0.46 | 150.0 | ± 9.6 % |
| | | Y | 4.60 | 67.20 | 16.37 | | 150.0 | |
| | | Z | 4.78 | 66.84 | 16.34 | | 150.0 | |
| 10569-AAA | IEEE 802.11g WiFi 2.4 GHz (DSSS-OFDM, 48 Mbps, 99pc duty cycle) | X | 4.74 | 67.77 | 16.95 | 0.46 | 150.0 | ± 9.6 % |
| | | Y | 4.75 | 68.22 | 17.22 | | 150.0 | |
| | | Z | 4.87 | 67.64 | 17.05 | | 150.0 | |
| 10570-AAA | IEEE 802.11g WiFi 2.4 GHz (DSSS-OFDM, 64 Mbps, 99pc duty cycle) | X | 4.73 | 67.53 | 16.83 | 0.46 | 150.0 | ± 9.6 % |
| | | Y | 4.74 | 67.95 | 17.08 | | 150.0 | |
| | | Z | 4.90 | 67.46 | 16.97 | | 150.0 | |
| 10571-AAA | IEEE 802.11b WiFi 2.4 GHz (DSSS, 1 Mbps, 90pc duty cycle) | X | 1.20 | 64.69 | 15.37 | 0.46 | 130.0 | ± 9.6 % |
| | | Y | 1.16 | 66.04 | 16.68 | | 130.0 | |
| | | Z | 1.14 | 65.30 | 16.23 | | 130.0 | |
| 10572-AAA | IEEE 802.11b WiFi 2.4 GHz (DSSS, 2 Mbps, 90pc duty cycle) | X | 1.22 | 65.28 | 15.73 | 0.46 | 130.0 | ± 9.6 % |
| | | Y | 1.19 | 66.84 | 17.17 | | 130.0 | |
| | | Z | 1.16 | 66.07 | 16.70 | | 130.0 | |
| 10573-AAA | IEEE 802.11b WiFi 2.4 GHz (DSSS, 5.5 Mbps, 90pc duty cycle) | X | 1.91 | 82.64 | 21.58 | 0.46 | 130.0 | ± 9.6 % |
| | | Y | 100.00 | 157.23 | 42.59 | | 130.0 | |
| | | Z | 97.75 | 147.88 | 38.70 | | 130.0 | |
| 10574-AAA | IEEE 802.11b WiFi 2.4 GHz (DSSS, 11 Mbps, 90pc duty cycle) | X | 1.36 | 71.11 | 18.66 | 0.46 | 130.0 | ± 9.6 % |
| | | Y | 1.56 | 76.68 | 22.00 | | 130.0 | |
| | | Z | 1.50 | 75.28 | 21.10 | | 130.0 | |

EX3DV4- SN:3825

December 11, 2017

| | | | | | | | | |
|-----------|---|---|------|-------|-------|------|-------|---------|
| 10575-AAA | IEEE 802.11g WiFi 2.4 GHz (DSSS-OFDM, 6 Mbps, 90pc duty cycle) | X | 4.45 | 66.62 | 16.27 | 0.46 | 130.0 | ± 9.6 % |
| | | Y | 4.45 | 67.01 | 16.54 | | 130.0 | |
| | | Z | 4.60 | 66.61 | 16.52 | | 130.0 | |
| 10576-AAA | IEEE 802.11g WiFi 2.4 GHz (DSSS-OFDM, 9 Mbps, 90pc duty cycle) | X | 4.49 | 66.83 | 16.36 | 0.46 | 130.0 | ± 9.6 % |
| | | Y | 4.48 | 67.24 | 16.64 | | 130.0 | |
| | | Z | 4.63 | 66.79 | 16.60 | | 130.0 | |
| 10577-AAA | IEEE 802.11g WiFi 2.4 GHz (DSSS-OFDM, 12 Mbps, 90pc duty cycle) | X | 4.65 | 67.07 | 16.51 | 0.46 | 130.0 | ± 9.6 % |
| | | Y | 4.65 | 67.47 | 16.78 | | 130.0 | |
| | | Z | 4.83 | 67.08 | 16.77 | | 130.0 | |
| 10578-AAA | IEEE 802.11g WiFi 2.4 GHz (DSSS-OFDM, 18 Mbps, 90pc duty cycle) | X | 4.56 | 67.23 | 16.63 | 0.46 | 130.0 | ± 9.6 % |
| | | Y | 4.56 | 67.66 | 16.92 | | 130.0 | |
| | | Z | 4.74 | 67.26 | 16.89 | | 130.0 | |
| 10579-AAA | IEEE 802.11g WiFi 2.4 GHz (DSSS-OFDM, 24 Mbps, 90pc duty cycle) | X | 4.30 | 66.34 | 15.83 | 0.46 | 130.0 | ± 9.6 % |
| | | Y | 4.30 | 66.77 | 16.12 | | 130.0 | |
| | | Z | 4.49 | 66.48 | 16.14 | | 130.0 | |
| 10580-AAA | IEEE 802.11g WiFi 2.4 GHz (DSSS-OFDM, 36 Mbps, 90pc duty cycle) | X | 4.33 | 66.38 | 15.84 | 0.46 | 130.0 | ± 9.6 % |
| | | Y | 4.33 | 66.81 | 16.13 | | 130.0 | |
| | | Z | 4.54 | 66.52 | 16.17 | | 130.0 | |
| 10581-AAA | IEEE 802.11g WiFi 2.4 GHz (DSSS-OFDM, 48 Mbps, 90pc duty cycle) | X | 4.47 | 67.31 | 16.60 | 0.46 | 130.0 | ± 9.6 % |
| | | Y | 4.48 | 67.76 | 16.90 | | 130.0 | |
| | | Z | 4.63 | 67.33 | 16.84 | | 130.0 | |
| 10582-AAA | IEEE 802.11g WiFi 2.4 GHz (DSSS-OFDM, 54 Mbps, 90pc duty cycle) | X | 4.22 | 66.08 | 15.59 | 0.46 | 130.0 | ± 9.6 % |
| | | Y | 4.22 | 66.50 | 15.88 | | 130.0 | |
| | | Z | 4.43 | 66.23 | 15.92 | | 130.0 | |
| 10583-AAB | IEEE 802.11a/h WiFi 5 GHz (OFDM, 6 Mbps, 90pc duty cycle) | X | 4.45 | 66.62 | 16.27 | 0.46 | 130.0 | ± 9.6 % |
| | | Y | 4.45 | 67.01 | 16.54 | | 130.0 | |
| | | Z | 4.60 | 66.61 | 16.52 | | 130.0 | |
| 10584-AAB | IEEE 802.11a/h WiFi 5 GHz (OFDM, 9 Mbps, 90pc duty cycle) | X | 4.49 | 66.83 | 16.36 | 0.46 | 130.0 | ± 9.6 % |
| | | Y | 4.48 | 67.24 | 16.64 | | 130.0 | |
| | | Z | 4.63 | 66.79 | 16.60 | | 130.0 | |
| 10585-AAB | IEEE 802.11a/h WiFi 5 GHz (OFDM, 12 Mbps, 90pc duty cycle) | X | 4.65 | 67.07 | 16.51 | 0.46 | 130.0 | ± 9.6 % |
| | | Y | 4.65 | 67.47 | 16.78 | | 130.0 | |
| | | Z | 4.83 | 67.08 | 16.77 | | 130.0 | |
| 10586-AAB | IEEE 802.11a/h WiFi 5 GHz (OFDM, 18 Mbps, 90pc duty cycle) | X | 4.56 | 67.23 | 16.63 | 0.46 | 130.0 | ± 9.6 % |
| | | Y | 4.56 | 67.66 | 16.92 | | 130.0 | |
| | | Z | 4.74 | 67.26 | 16.89 | | 130.0 | |
| 10587-AAB | IEEE 802.11a/h WiFi 5 GHz (OFDM, 24 Mbps, 90pc duty cycle) | X | 4.30 | 66.34 | 15.83 | 0.46 | 130.0 | ± 9.6 % |
| | | Y | 4.30 | 66.77 | 16.12 | | 130.0 | |
| | | Z | 4.49 | 66.48 | 16.14 | | 130.0 | |
| 10588-AAB | IEEE 802.11a/h WiFi 5 GHz (OFDM, 36 Mbps, 90pc duty cycle) | X | 4.33 | 66.38 | 15.84 | 0.46 | 130.0 | ± 9.6 % |
| | | Y | 4.33 | 66.81 | 16.13 | | 130.0 | |
| | | Z | 4.54 | 66.52 | 16.17 | | 130.0 | |
| 10589-AAB | IEEE 802.11a/h WiFi 5 GHz (OFDM, 48 Mbps, 90pc duty cycle) | X | 4.47 | 67.31 | 16.60 | 0.46 | 130.0 | ± 9.6 % |
| | | Y | 4.48 | 67.76 | 16.90 | | 130.0 | |
| | | Z | 4.63 | 67.33 | 16.84 | | 130.0 | |
| 10590-AAB | IEEE 802.11a/h WiFi 5 GHz (OFDM, 54 Mbps, 90pc duty cycle) | X | 4.22 | 66.08 | 15.59 | 0.46 | 130.0 | ± 9.6 % |
| | | Y | 4.22 | 66.50 | 15.88 | | 130.0 | |
| | | Z | 4.43 | 66.23 | 15.92 | | 130.0 | |

EX3DV4- SN:3825

December 11, 2017

| | | | | | | | | |
|-----------|---|---|------|-------|-------|------|-------|---------|
| 10591-AAB | IEEE 802.11n (HT Mixed, 20MHz, MCS0, 90pc duty cycle) | X | 4.61 | 66.72 | 16.40 | 0.46 | 130.0 | ± 9.6 % |
| | | Y | 4.60 | 67.08 | 16.65 | | 130.0 | |
| | | Z | 4.75 | 66.67 | 16.63 | | 130.0 | |
| 10592-AAB | IEEE 802.11n (HT Mixed, 20MHz, MCS1, 90pc duty cycle) | X | 4.73 | 67.00 | 16.52 | 0.46 | 130.0 | ± 9.6 % |
| | | Y | 4.73 | 67.38 | 16.78 | | 130.0 | |
| | | Z | 4.91 | 67.01 | 16.76 | | 130.0 | |
| 10593-AAB | IEEE 802.11n (HT Mixed, 20MHz, MCS2, 90pc duty cycle) | X | 4.64 | 66.87 | 16.37 | 0.46 | 130.0 | ± 9.6 % |
| | | Y | 4.64 | 67.26 | 16.63 | | 130.0 | |
| | | Z | 4.83 | 66.91 | 16.63 | | 130.0 | |
| 10594-AAB | IEEE 802.11n (HT Mixed, 20MHz, MCS3, 90pc duty cycle) | X | 4.70 | 67.06 | 16.55 | 0.46 | 130.0 | ± 9.6 % |
| | | Y | 4.70 | 67.45 | 16.81 | | 130.0 | |
| | | Z | 4.89 | 67.10 | 16.80 | | 130.0 | |
| 10595-AAB | IEEE 802.11n (HT Mixed, 20MHz, MCS4, 90pc duty cycle) | X | 4.67 | 67.03 | 16.45 | 0.46 | 130.0 | ± 9.6 % |
| | | Y | 4.67 | 67.43 | 16.72 | | 130.0 | |
| | | Z | 4.85 | 67.05 | 16.89 | | 130.0 | |
| 10596-AAB | IEEE 802.11n (HT Mixed, 20MHz, MCS5, 90pc duty cycle) | X | 4.60 | 66.98 | 16.43 | 0.46 | 130.0 | ± 9.6 % |
| | | Y | 4.60 | 67.39 | 16.71 | | 130.0 | |
| | | Z | 4.79 | 67.04 | 16.69 | | 130.0 | |
| 10597-AAB | IEEE 802.11n (HT Mixed, 20MHz, MCS6, 90pc duty cycle) | X | 4.55 | 66.85 | 16.28 | 0.46 | 130.0 | ± 9.6 % |
| | | Y | 4.55 | 67.26 | 16.56 | | 130.0 | |
| | | Z | 4.74 | 66.94 | 16.57 | | 130.0 | |
| 10598-AAB | IEEE 802.11n (HT Mixed, 20MHz, MCS7, 90pc duty cycle) | X | 4.55 | 67.12 | 16.58 | 0.46 | 130.0 | ± 9.6 % |
| | | Y | 4.55 | 67.54 | 16.86 | | 130.0 | |
| | | Z | 4.72 | 67.21 | 16.86 | | 130.0 | |
| 10599-AAB | IEEE 802.11n (HT Mixed, 40MHz, MCS0, 90pc duty cycle) | X | 5.29 | 67.16 | 16.64 | 0.46 | 130.0 | ± 9.6 % |
| | | Y | 5.26 | 67.42 | 16.81 | | 130.0 | |
| | | Z | 5.44 | 67.22 | 16.84 | | 130.0 | |
| 10600-AAB | IEEE 802.11n (HT Mixed, 40MHz, MCS1, 90pc duty cycle) | X | 5.38 | 67.48 | 16.77 | 0.46 | 130.0 | ± 9.6 % |
| | | Y | 5.34 | 67.70 | 16.92 | | 130.0 | |
| | | Z | 5.59 | 67.71 | 17.05 | | 130.0 | |
| 10601-AAB | IEEE 802.11n (HT Mixed, 40MHz, MCS2, 90pc duty cycle) | X | 5.29 | 67.28 | 16.70 | 0.46 | 130.0 | ± 9.6 % |
| | | Y | 5.26 | 67.55 | 16.87 | | 130.0 | |
| | | Z | 5.46 | 67.41 | 16.92 | | 130.0 | |
| 10602-AAB | IEEE 802.11n (HT Mixed, 40MHz, MCS3, 90pc duty cycle) | X | 5.37 | 67.29 | 16.61 | 0.46 | 130.0 | ± 9.6 % |
| | | Y | 5.34 | 67.55 | 16.78 | | 130.0 | |
| | | Z | 5.56 | 67.45 | 16.85 | | 130.0 | |
| 10603-AAB | IEEE 802.11n (HT Mixed, 40MHz, MCS4, 90pc duty cycle) | X | 5.45 | 67.61 | 16.92 | 0.46 | 130.0 | ± 9.6 % |
| | | Y | 5.42 | 67.88 | 17.09 | | 130.0 | |
| | | Z | 5.64 | 67.75 | 17.14 | | 130.0 | |
| 10604-AAB | IEEE 802.11n (HT Mixed, 40MHz, MCS5, 90pc duty cycle) | X | 5.33 | 67.23 | 16.70 | 0.46 | 130.0 | ± 9.6 % |
| | | Y | 5.31 | 67.53 | 16.89 | | 130.0 | |
| | | Z | 5.44 | 67.19 | 16.85 | | 130.0 | |
| 10605-AAB | IEEE 802.11n (HT Mixed, 40MHz, MCS6, 90pc duty cycle) | X | 5.37 | 67.34 | 16.75 | 0.46 | 130.0 | ± 9.6 % |
| | | Y | 5.34 | 67.62 | 16.93 | | 130.0 | |
| | | Z | 5.57 | 67.57 | 17.03 | | 130.0 | |
| 10606-AAB | IEEE 802.11n (HT Mixed, 40MHz, MCS7, 90pc duty cycle) | X | 5.16 | 66.79 | 16.33 | 0.46 | 130.0 | ± 9.6 % |
| | | Y | 5.12 | 67.05 | 16.50 | | 130.0 | |
| | | Z | 5.29 | 66.82 | 16.51 | | 130.0 | |

EX3DV4- SN:3825

December 11, 2017

| | | | | | | | | |
|-----------|---|---|-------|-------|-------|------|-------|---------|
| 10607-AAB | IEEE 802.11ac WiFi (20MHz, MCS0, 90pc duty cycle) | X | 4.46 | 66.05 | 16.04 | 0.46 | 130.0 | ± 9.6 % |
| | | Y | -4.47 | 66.50 | 16.34 | | 130.0 | |
| | | Z | 4.60 | 66.01 | 16.27 | | 130.0 | |
| 10608-AAB | IEEE 802.11ac WiFi (20MHz, MCS1, 90pc duty cycle) | X | 4.59 | 66.36 | 16.18 | 0.46 | 130.0 | ± 9.6 % |
| | | Y | 4.61 | 66.84 | 16.49 | | 130.0 | |
| | | Z | 4.79 | 66.42 | 16.43 | | 130.0 | |
| 10609-AAB | IEEE 802.11ac WiFi (20MHz, MCS2, 90pc duty cycle) | X | 4.49 | 66.19 | 15.99 | 0.46 | 130.0 | ± 9.6 % |
| | | Y | 4.51 | 66.67 | 16.31 | | 130.0 | |
| | | Z | 4.67 | 66.26 | 16.26 | | 130.0 | |
| 10610-AAB | IEEE 802.11ac WiFi (20MHz, MCS3, 90pc duty cycle) | X | 4.54 | 66.37 | 16.17 | 0.46 | 130.0 | ± 9.6 % |
| | | Y | 4.56 | 66.86 | 16.49 | | 130.0 | |
| | | Z | 4.73 | 66.44 | 16.44 | | 130.0 | |
| 10611-AAB | IEEE 802.11ac WiFi (20MHz, MCS4, 90pc duty cycle) | X | 4.45 | 66.16 | 16.01 | 0.46 | 130.0 | ± 9.6 % |
| | | Y | 4.47 | 66.64 | 16.32 | | 130.0 | |
| | | Z | 4.64 | 66.23 | 16.28 | | 130.0 | |
| 10612-AAB | IEEE 802.11ac WiFi (20MHz, MCS5, 90pc duty cycle) | X | 4.44 | 66.26 | 16.03 | 0.46 | 130.0 | ± 9.6 % |
| | | Y | 4.46 | 66.77 | 16.37 | | 130.0 | |
| | | Z | 4.65 | 66.39 | 16.32 | | 130.0 | |
| 10613-AAB | IEEE 802.11ac WiFi (20MHz, MCS6, 90pc duty cycle) | X | 4.43 | 66.07 | 15.87 | 0.46 | 130.0 | ± 9.6 % |
| | | Y | 4.45 | 66.57 | 16.20 | | 130.0 | |
| | | Z | 4.65 | 66.26 | 16.19 | | 130.0 | |
| 10614-AAB | IEEE 802.11ac WiFi (20MHz, MCS7, 90pc duty cycle) | X | 4.41 | 66.35 | 16.16 | 0.46 | 130.0 | ± 9.6 % |
| | | Y | 4.43 | 66.86 | 16.49 | | 130.0 | |
| | | Z | 4.60 | 66.46 | 16.46 | | 130.0 | |
| 10615-AAB | IEEE 802.11ac WiFi (20MHz, MCS8, 90pc duty cycle) | X | 4.44 | 65.96 | 15.75 | 0.46 | 130.0 | ± 9.6 % |
| | | Y | 4.46 | 66.44 | 16.07 | | 130.0 | |
| | | Z | 4.64 | 66.03 | 16.03 | | 130.0 | |
| 10616-AAB | IEEE 802.11ac WiFi (40MHz, MCS0, 90pc duty cycle) | X | 5.09 | 66.34 | 16.22 | 0.46 | 130.0 | ± 9.6 % |
| | | Y | 5.09 | 66.71 | 16.45 | | 130.0 | |
| | | Z | 5.25 | 66.47 | 16.45 | | 130.0 | |
| 10617-AAB | IEEE 802.11ac WiFi (40MHz, MCS1, 90pc duty cycle) | X | 5.13 | 66.45 | 16.25 | 0.46 | 130.0 | ± 9.6 % |
| | | Y | 5.13 | 66.82 | 16.48 | | 130.0 | |
| | | Z | 5.33 | 66.68 | 16.52 | | 130.0 | |
| 10618-AAB | IEEE 802.11ac WiFi (40MHz, MCS2, 90pc duty cycle) | X | 5.04 | 66.53 | 16.31 | 0.46 | 130.0 | ± 9.6 % |
| | | Y | 5.05 | 66.94 | 16.56 | | 130.0 | |
| | | Z | 5.21 | 66.68 | 16.54 | | 130.0 | |
| 10619-AAB | IEEE 802.11ac WiFi (40MHz, MCS3, 90pc duty cycle) | X | 5.06 | 66.34 | 16.15 | 0.46 | 130.0 | ± 9.6 % |
| | | Y | 5.05 | 66.70 | 16.37 | | 130.0 | |
| | | Z | 5.23 | 66.48 | 16.37 | | 130.0 | |
| 10620-AAB | IEEE 802.11ac WiFi (40MHz, MCS4, 90pc duty cycle) | X | 5.13 | 66.34 | 16.19 | 0.46 | 130.0 | ± 9.6 % |
| | | Y | 5.12 | 66.69 | 16.41 | | 130.0 | |
| | | Z | 5.32 | 66.51 | 16.44 | | 130.0 | |
| 10621-AAB | IEEE 802.11ac WiFi (40MHz, MCS5, 90pc duty cycle) | X | 5.14 | 66.48 | 16.39 | 0.46 | 130.0 | ± 9.6 % |
| | | Y | 5.14 | 66.86 | 16.62 | | 130.0 | |
| | | Z | 5.32 | 66.65 | 16.64 | | 130.0 | |
| 10622-AAB | IEEE 802.11ac WiFi (40MHz, MCS6, 90pc duty cycle) | X | 5.13 | 66.56 | 16.43 | 0.46 | 130.0 | ± 9.6 % |
| | | Y | 5.13 | 66.94 | 16.66 | | 130.0 | |
| | | Z | 5.34 | 66.85 | 16.72 | | 130.0 | |

EX3DV4- SN:3825

December 11, 2017

| | | | | | | | | |
|-----------|--|---|------|-------|-------|------|-------|---------|
| 10623-AAB | IEEE 802.11ac WiFi (40MHz, MCS7, 90pc duty cycle) | X | 5.02 | 66.10 | 16.05 | 0.46 | 130.0 | ± 9.6 % |
| | | Y | 5.01 | 66.48 | 16.28 | | 130.0 | |
| | | Z | 5.20 | 66.31 | 16.33 | | 130.0 | |
| 10624-AAB | IEEE 802.11ac WiFi (40MHz, MCS8, 90pc duty cycle) | X | 5.21 | 66.36 | 16.25 | 0.46 | 130.0 | ± 9.6 % |
| | | Y | 5.21 | 66.72 | 16.46 | | 130.0 | |
| | | Z | 5.40 | 66.52 | 16.49 | | 130.0 | |
| 10625-AAB | IEEE 802.11ac WiFi (40MHz, MCS9, 90pc duty cycle) | X | 5.30 | 66.50 | 16.38 | 0.46 | 130.0 | ± 9.6 % |
| | | Y | 5.30 | 66.88 | 16.61 | | 130.0 | |
| | | Z | 5.79 | 67.59 | 17.07 | | 130.0 | |
| 10626-AAB | IEEE 802.11ac WiFi (80MHz, MCS0, 90pc duty cycle) | X | 5.42 | 66.36 | 16.18 | 0.46 | 130.0 | ± 9.6 % |
| | | Y | 5.41 | 66.71 | 16.38 | | 130.0 | |
| | | Z | 5.55 | 66.50 | 16.39 | | 130.0 | |
| 10627-AAB | IEEE 802.11ac WiFi (80MHz, MCS1, 90pc duty cycle) | X | 5.64 | 66.95 | 16.44 | 0.46 | 130.0 | ± 9.6 % |
| | | Y | 5.62 | 67.25 | 16.62 | | 130.0 | |
| | | Z | 5.81 | 67.15 | 16.67 | | 130.0 | |
| 10628-AAB | IEEE 802.11ac WiFi (80MHz, MCS2, 90pc duty cycle) | X | 5.41 | 66.33 | 16.05 | 0.46 | 130.0 | ± 9.6 % |
| | | Y | 5.40 | 66.67 | 16.26 | | 130.0 | |
| | | Z | 5.58 | 66.60 | 16.33 | | 130.0 | |
| 10629-AAB | IEEE 802.11ac WiFi (80MHz, MCS3, 90pc duty cycle) | X | 5.51 | 66.51 | 16.14 | 0.46 | 130.0 | ± 9.6 % |
| | | Y | 5.49 | 66.80 | 16.32 | | 130.0 | |
| | | Z | 5.67 | 66.68 | 16.36 | | 130.0 | |
| 10630-AAB | IEEE 802.11ac WiFi (80MHz, MCS4, 90pc duty cycle) | X | 5.73 | 67.38 | 16.58 | 0.46 | 130.0 | ± 9.6 % |
| | | Y | 5.71 | 67.68 | 16.76 | | 130.0 | |
| | | Z | 6.18 | 68.42 | 17.22 | | 130.0 | |
| 10631-AAB | IEEE 802.11ac WiFi (80MHz, MCS5, 90pc duty cycle) | X | 5.72 | 67.48 | 16.84 | 0.46 | 130.0 | ± 9.6 % |
| | | Y | 5.72 | 67.84 | 17.04 | | 130.0 | |
| | | Z | 6.03 | 68.07 | 17.26 | | 130.0 | |
| 10632-AAB | IEEE 802.11ac WiFi (80MHz, MCS6, 90pc duty cycle) | X | 5.65 | 67.16 | 16.69 | 0.46 | 130.0 | ± 9.6 % |
| | | Y | 5.62 | 67.43 | 16.85 | | 130.0 | |
| | | Z | 5.78 | 67.21 | 16.85 | | 130.0 | |
| 10633-AAB | IEEE 802.11ac WiFi (80MHz, MCS7, 90pc duty cycle) | X | 5.44 | 66.43 | 16.15 | 0.46 | 130.0 | ± 9.6 % |
| | | Y | 5.44 | 66.80 | 16.36 | | 130.0 | |
| | | Z | 5.64 | 66.75 | 16.43 | | 130.0 | |
| 10634-AAB | IEEE 802.11ac WiFi (80MHz, MCS8, 90pc duty cycle) | X | 5.47 | 66.63 | 16.30 | 0.46 | 130.0 | ± 9.6 % |
| | | Y | 5.47 | 66.99 | 16.51 | | 130.0 | |
| | | Z | 5.63 | 66.79 | 16.52 | | 130.0 | |
| 10635-AAB | IEEE 802.11ac WiFi (80MHz, MCS9, 90pc duty cycle) | X | 5.32 | 65.82 | 15.60 | 0.46 | 130.0 | ± 9.6 % |
| | | Y | 5.31 | 66.16 | 15.81 | | 130.0 | |
| | | Z | 5.50 | 66.07 | 15.88 | | 130.0 | |
| 10636-AAC | IEEE 802.11ac WiFi (160MHz, MCS0, 90pc duty cycle) | X | 5.85 | 66.71 | 16.26 | 0.46 | 130.0 | ± 9.6 % |
| | | Y | 5.83 | 67.02 | 16.43 | | 130.0 | |
| | | Z | 5.97 | 66.87 | 16.47 | | 130.0 | |
| 10637-AAC | IEEE 802.11ac WiFi (160MHz, MCS1, 90pc duty cycle) | X | 5.98 | 67.00 | 16.40 | 0.46 | 130.0 | ± 9.6 % |
| | | Y | 5.94 | 67.30 | 16.56 | | 130.0 | |
| | | Z | 6.14 | 67.29 | 16.66 | | 130.0 | |
| 10638-AAC | IEEE 802.11ac WiFi (160MHz, MCS2, 90pc duty cycle) | X | 5.99 | 67.07 | 16.40 | 0.46 | 130.0 | ± 9.6 % |
| | | Y | 5.97 | 67.37 | 16.57 | | 130.0 | |
| | | Z | 6.13 | 67.25 | 16.62 | | 130.0 | |

EX3DV4- SN:3825

December 11, 2017

| | | | | | | | | | |
|-----------|--|---|--------|--------|-------|-------|-------|---------|--|
| 10639-AAC | IEEE 802.11ac WiFi (160MHz, MCS3, 90pc duty cycle) | X | 5.95 | 66.95 | 16.39 | 0.46 | 130.0 | ± 9.6 % | |
| | | Y | 5.93 | 67.27 | 16.66 | | | 130.0 | |
| | | Z | 6.10 | 67.18 | 16.63 | | | 130.0 | |
| 10640-AAC | IEEE 802.11ac WiFi (160MHz, MCS4, 90pc duty cycle) | X | 5.90 | 66.82 | 16.26 | 0.46 | 130.0 | ± 9.6 % | |
| | | Y | 5.90 | 67.17 | 16.46 | | | 130.0 | |
| | | Z | 6.11 | 67.19 | 16.57 | | | 130.0 | |
| 10641-AAC | IEEE 802.11ac WiFi (160MHz, MCS5, 90pc duty cycle) | X | 6.00 | 66.90 | 16.33 | 0.46 | 130.0 | ± 9.6 % | |
| | | Y | 5.98 | 67.18 | 16.48 | | | 130.0 | |
| | | Z | 6.15 | 67.10 | 16.55 | | | 130.0 | |
| 10642-AAC | IEEE 802.11ac WiFi (160MHz, MCS6, 90pc duty cycle) | X | 6.03 | 67.13 | 16.62 | 0.46 | 130.0 | ± 9.6 % | |
| | | Y | 6.02 | 67.45 | 16.79 | | | 130.0 | |
| | | Z | 6.19 | 67.36 | 16.85 | | | 130.0 | |
| 10643-AAC | IEEE 802.11ac WiFi (160MHz, MCS7, 90pc duty cycle) | X | 5.87 | 66.79 | 16.33 | 0.46 | 130.0 | ± 9.6 % | |
| | | Y | 5.85 | 67.10 | 16.50 | | | 130.0 | |
| | | Z | 6.03 | 67.04 | 16.58 | | | 130.0 | |
| 10644-AAC | IEEE 802.11ac WiFi (160MHz, MCS8, 90pc duty cycle) | X | 5.93 | 66.98 | 16.44 | 0.46 | 130.0 | ± 9.6 % | |
| | | Y | 5.92 | 67.33 | 16.64 | | | 130.0 | |
| | | Z | 6.20 | 67.55 | 16.86 | | | 130.0 | |
| 10645-AAC | IEEE 802.11ac WiFi (160MHz, MCS9, 90pc duty cycle) | X | 6.06 | 67.03 | 16.43 | 0.46 | 130.0 | ± 9.6 % | |
| | | Y | 6.02 | 67.29 | 16.58 | | | 130.0 | |
| | | Z | 6.55 | 68.20 | 17.14 | | | 130.0 | |
| 10646-AAD | LTE-TDD (SC-FDMA, 1 RB, 5 MHz, QPSK, UL Subframe=2,7) | X | 15.24 | 105.08 | 35.49 | 9.30 | 60.0 | ± 9.6 % | |
| | | Y | 16.83 | 110.97 | 38.06 | | | 60.0 | |
| | | Z | 27.11 | 117.66 | 39.81 | | | 60.0 | |
| 10647-AAC | LTE-TDD (SC-FDMA, 1 RB, 20 MHz, QPSK, UL Subframe=2,7) | X | 13.16 | 102.45 | 34.81 | 9.30 | 60.0 | ± 9.6 % | |
| | | Y | 13.61 | 106.78 | 36.93 | | | 60.0 | |
| | | Z | 24.04 | 115.71 | 39.41 | | | 60.0 | |
| 10648-AAA | CDMA2000 (1x Advanced) | X | 0.53 | 62.03 | 8.75 | 0.00 | 150.0 | ± 9.6 % | |
| | | Y | 0.57 | 63.80 | 9.65 | | | 150.0 | |
| | | Z | 0.61 | 63.17 | 9.98 | | | 150.0 | |
| 10652-AAB | LTE-TDD (OFDMA, 5 MHz, E-TM 3.1, Clipping 44%) | X | 3.61 | 67.25 | 16.13 | 2.23 | 80.0 | ± 9.6 % | |
| | | Y | 3.57 | 68.12 | 16.86 | | | 80.0 | |
| | | Z | 3.78 | 67.82 | 17.14 | | | 80.0 | |
| 10653-AAB | LTE-TDD (OFDMA, 10 MHz, E-TM 3.1, Clipping 44%) | X | 4.16 | 66.64 | 16.51 | 2.23 | 80.0 | ± 9.6 % | |
| | | Y | 4.01 | 66.86 | 16.87 | | | 80.0 | |
| | | Z | 4.24 | 66.79 | 17.11 | | | 80.0 | |
| 10654-AAB | LTE-TDD (OFDMA, 15 MHz, E-TM 3.1, Clipping 44%) | X | 4.18 | 66.29 | 16.57 | 2.23 | 80.0 | ± 9.6 % | |
| | | Y | 4.00 | 66.39 | 16.86 | | | 80.0 | |
| | | Z | 4.20 | 66.38 | 17.09 | | | 80.0 | |
| 10655-AAB | LTE-TDD (OFDMA, 20 MHz, E-TM 3.1, Clipping 44%) | X | 4.25 | 66.21 | 16.62 | 2.23 | 80.0 | ± 9.6 % | |
| | | Y | 4.06 | 66.27 | 16.87 | | | 80.0 | |
| | | Z | 4.26 | 66.35 | 17.12 | | | 80.0 | |
| 10658-AAA | Pulse Waveform (200Hz, 10%) | X | 5.94 | 74.67 | 14.96 | 10.00 | 50.0 | ± 9.6 % | |
| | | Y | 9.87 | 81.08 | 17.27 | | | 50.0 | |
| | | Z | 100.00 | 113.83 | 27.98 | | | 50.0 | |
| 10659-AAA | Pulse Waveform (200Hz, 20%) | X | 8.06 | 78.28 | 15.18 | 6.99 | 60.0 | ± 9.6 % | |
| | | Y | 100.00 | 105.08 | 22.24 | | | 60.0 | |
| | | Z | 100.00 | 110.91 | 25.50 | | | 60.0 | |

EX3DV4- SN:3825

December 11, 2017

| | | | | | | | | |
|-----------|-----------------------------|---|--------|--------|-------|------|-------|---------|
| 10660-AAA | Pulse Waveform (200Hz, 40%) | X | 100.00 | 101.18 | 19.93 | 3.98 | 80.0 | ± 9.6 % |
| | | Y | 100.00 | 104.21 | 20.59 | | 80.0 | |
| | | Z | 100.00 | 108.43 | 23.00 | | 80.0 | |
| 10661-AAA | Pulse Waveform (200Hz, 60%) | X | 100.00 | 101.75 | 19.27 | 2.22 | 100.0 | ± 9.6 % |
| | | Y | 100.00 | 105.17 | 19.87 | | 100.0 | |
| | | Z | 100.00 | 105.02 | 20.28 | | 100.0 | |
| 10662-AAA | Pulse Waveform (200Hz, 80%) | X | 100.00 | 105.53 | 19.59 | 0.97 | 120.0 | ± 9.6 % |
| | | Y | 100.00 | 100.75 | 16.69 | | 120.0 | |
| | | Z | 0.21 | 60.00 | 4.27 | | 120.0 | |

[¶] Uncertainty is determined using the max. deviation from linear response applying rectangular distribution and is expressed for the square of the field value.

Dosimetric E-Field Probe Calibration Certificate (EX3DV4, S/N: 3922)

**Calibration Laboratory of
Schmid & Partner
Engineering AG**
Zeughausstrasse 43, 8004 Zurich, Switzerland



S Schweizerischer Kalibrierdienst
C Service suisse d'étalonnage
S Servizio svizzero di taratura
S Swiss Calibration Service

Accredited by the Swiss Accreditation Service (SAS)
The Swiss Accreditation Service is one of the signatories to the EA
Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: **SCS 0108**

Client **UL Japan (Vitec)**

Certificate No: **EX3-3922_Nov17**

CALIBRATION CERTIFICATE

Object **EX3DV4 - SN:3922**

Calibration procedure(s) **QA CAL-01.v9, QA CAL-14.v4, QA CAL-23.v5, QA CAL-25.v6
Calibration procedure for dosimetric E-field probes**

Calibration date: **November 15, 2017**

This calibration certificate documents the traceability to national standards, which realize the physical units of measurements (SI).
The measurements and the uncertainties with confidence probability are given on the following pages and are part of the certificate.

All calibrations have been conducted in the closed laboratory facility: environment temperature (22 ± 3)°C and humidity < 70%.

Calibration Equipment used (M&TE critical for calibration)

| Primary Standards | ID | Cal Date (Certificate No.) | Scheduled Calibration |
|----------------------------|------------------|-----------------------------------|------------------------|
| Power meter NRP | SN: 104778 | 04-Apr-17 (No. 217-02521/02522) | Apr-18 |
| Power sensor NRP-Z91 | SN: 103244 | 04-Apr-17 (No. 217-02521) | Apr-18 |
| Power sensor NRP-Z91 | SN: 103245 | 04-Apr-17 (No. 217-02525) | Apr-18 |
| Reference 20 dB Attenuator | SN: S5277 (20x) | 07-Apr-17 (No. 217-02528) | Apr-18 |
| Reference Probe ES3DV2 | SN: 3013 | 31-Dec-16 (No. ES3-3013_Dec16) | Dec-17 |
| DAE4 | SN: 660 | 7-Dec-16 (No. DAE4-660_Dec16) | Dec-17 |
| Secondary Standards | ID | Check Date (in house) | Scheduled Check |
| Power meter E4419B | SN: GB41293874 | 06-Apr-16 (in house check Jun-16) | In house check: Jun-18 |
| Power sensor E4412A | SN: MY41498087 | 06-Apr-16 (in house check Jun-16) | In house check: Jun-18 |
| Power sensor E4412A | SN: 000110210 | 06-Apr-16 (in house check Jun-16) | In house check: Jun-18 |
| RF generator HP 8648C | SN: US3642U01700 | 04-Aug-99 (in house check Jun-16) | In house check: Jun-18 |
| Network Analyzer HP 8753E | SN: US37390585 | 18-Oct-01 (in house check Oct-17) | In house check: Oct-18 |

| | Name | Function | Signature |
|----------------|----------------|-----------------------|-----------|
| Calibrated by: | Jeton Kastrati | Laboratory Technician | |
| Approved by: | Katja Pokovic | Technical Manager | |

Issued: November 15, 2017

This calibration certificate shall not be reproduced except in full without written approval of the laboratory.

Calibration Laboratory of
Schmid & Partner
Engineering AG
Zeughausstrasse 43, 8004 Zurich, Switzerland



S Schweizerischer Kalibrierdienst
C Service suisse d'étalonnage
S Servizio svizzero di taratura
S Swiss Calibration Service

Accredited by the Swiss Accreditation Service (SAS)
The Swiss Accreditation Service is one of the signatories to the EA
Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: SCS 0108

Glossary:

| | |
|--------------------------|---|
| TSL | tissue simulating liquid |
| NORM _{x,y,z} | sensitivity in free space |
| ConvF | sensitivity in TSL / NORM _{x,y,z} |
| DCP | diode compression point |
| CF | crest factor (1/duty_cycle) of the RF signal |
| A, B, C, D | modulation dependent linearization parameters |
| Polarization ϕ | ϕ rotation around probe axis |
| Polarization ϑ | ϑ rotation around an axis that is in the plane normal to probe axis (at measurement center), i.e., $\vartheta = 0$ is normal to probe axis |
| Connector Angle | information used in DASY system to align probe sensor X to the robot coordinate system |

Calibration is Performed According to the Following Standards:

- IEEE Std 1528-2013, "IEEE Recommended Practice for Determining the Peak Spatial-Averaged Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques", June 2013
- IEC 62209-1, "Measurement procedure for the assessment of Specific Absorption Rate (SAR) from hand-held and body-mounted devices used next to the ear (frequency range of 300 MHz to 6 GHz)", July 2016
- IEC 62209-2, "Procedure to determine the Specific Absorption Rate (SAR) for wireless communication devices used in close proximity to the human body (frequency range of 30 MHz to 6 GHz)", March 2010
- KDB 865864, "SAR Measurement Requirements for 100 MHz to 6 GHz"

Methods Applied and Interpretation of Parameters:

- NORM_{x,y,z}**: Assessed for E-field polarization $\vartheta = 0$ ($f \leq 900$ MHz in TEM-cell; $f > 1800$ MHz: R22 waveguide). NORM_{x,y,z} are only intermediate values, i.e., the uncertainties of NORM_{x,y,z} does not affect the E²-field uncertainty inside TSL (see below ConvF).
- NORM(f)_{x,y,z} = NORM_{x,y,z} * frequency_response** (see Frequency Response Chart). This linearization is implemented in DASY4 software versions later than 4.2. The uncertainty of the frequency response is included in the stated uncertainty of ConvF.
- DCP_{x,y,z}**: DCP are numerical linearization parameters assessed based on the data of power sweep with CW signal (no uncertainty required). DCP does not depend on frequency nor media.
- PAR**: PAR is the Peak to Average Ratio that is not calibrated but determined based on the signal characteristics
- A_{x,y,z}; B_{x,y,z}; C_{x,y,z}; D_{x,y,z}; VR_{x,y,z}**: A, B, C, D are numerical linearization parameters assessed based on the data of power sweep for specific modulation signal. The parameters do not depend on frequency nor media. VR is the maximum calibration range expressed in RMS voltage across the diode.
- ConvF and Boundary Effect Parameters**: Assessed in flat phantom using E-field (or Temperature Transfer Standard for $f \leq 800$ MHz) and inside waveguide using analytical field distributions based on power measurements for $f > 800$ MHz. The same setups are used for assessment of the parameters applied for boundary compensation (alpha, depth) of which typical uncertainty values are given. These parameters are used in DASY4 software to improve probe accuracy close to the boundary. The sensitivity in TSL corresponds to NORM_{x,y,z} * ConvF whereby the uncertainty corresponds to that given for ConvF. A frequency dependent ConvF is used in DASY version 4.4 and higher which allows extending the validity from ± 50 MHz to ± 100 MHz.
- Spherical isotropy (3D deviation from isotropy)**: in a field of low gradients realized using a flat phantom exposed by a patch antenna.
- Sensor Offset**: The sensor offset corresponds to the offset of virtual measurement center from the probe tip (on probe axis). No tolerance required.
- Connector Angle**: The angle is assessed using the information gained by determining the NORM_x (no uncertainty required).

EX3DV4 – SN:3922

November 15, 2017

Probe EX3DV4

SN:3922

Manufactured: March 8, 2013
Calibrated: November 15, 2017

Calibrated for DASY/EASY Systems
(Note: non-compatible with DASY2 system!)

EX3DV4- SN:3922

November 15, 2017

DASY/EASY - Parameters of Probe: EX3DV4 - SN:3922

Basic Calibration Parameters

| | Sensor X | Sensor Y | Sensor Z | Unc (k=2) |
|---|----------|----------|----------|---------------|
| Norm ($\mu\text{V}/(\text{V}/\text{m})^2$) ^A | 0.64 | 0.56 | 0.59 | $\pm 10.1 \%$ |
| DCP (mV) ^B | 97.5 | 100.2 | 99.5 | |

Modulation Calibration Parameters

| UID | Communication System Name | | A dB | B dB $\sqrt{\mu\text{V}}$ | C | D dB | VR mV | Unc ^E (k=2) |
|-----|---------------------------|---|---------|------------------------------|-----|---------|----------|---------------------------|
| 0 | CW | X | 0.0 | 0.0 | 1.0 | 0.00 | 138.9 | $\pm 3.3 \%$ |
| | | Y | 0.0 | 0.0 | 1.0 | | 156.7 | |
| | | Z | 0.0 | 0.0 | 1.0 | | 150.2 | |

Note: For details on UID parameters see Appendix.

Sensor Model Parameters

| | C1 fF | C2 fF | α V ⁻¹ | T1 ms.V ⁻² | T2 ms.V ⁻¹ | T3 ms | T4 V ⁻² | T5 V ⁻¹ | T6 |
|---|----------|----------|-----------------------------|--------------------------|--------------------------|----------|-----------------------|-----------------------|-------|
| X | 52.39 | 393.1 | 35.88 | 23.89 | 0.589 | 5.1 | 0.252 | 0.526 | 1.011 |
| Y | 35.86 | 267.6 | 35.63 | 13.74 | 0.000 | 5.1 | 0.550 | 0.302 | 1.008 |
| Z | 51.43 | 386.8 | 35.82 | 22.06 | 0.49 | 5.1 | 0.521 | 0.493 | 1.011 |

The reported uncertainty of measurement is stated as the standard uncertainty of measurement multiplied by the coverage factor k=2, which for a normal distribution corresponds to a coverage probability of approximately 95%.

^A The uncertainties of Norm X,Y,Z do not affect the E²-field uncertainty inside TSL (see Pages 5 and 6).

^B Numerical linearization parameter: uncertainty not required.

^E Uncertainty is determined using the max. deviation from linear response applying rectangular distribution and is expressed for the square of the field value.

EX3DV4- SN:3922

November 15, 2017

DASY/EASY - Parameters of Probe: EX3DV4 - SN:3922

Calibration Parameter Determined in Head Tissue Simulating Media

| f (MHz) ^C | Relative Permittivity ^F | Conductivity (S/m) ^F | ConvF X | ConvF Y | ConvF Z | Alpha ^G | Depth ^G (mm) | Unc (k=2) |
|----------------------|------------------------------------|---------------------------------|---------|---------|---------|--------------------|-------------------------|-----------|
| 2300 | 39.5 | 1.67 | 7.97 | 7.97 | 7.97 | 0.32 | 0.86 | ± 12.0 % |
| 2450 | 39.2 | 1.80 | 7.49 | 7.49 | 7.49 | 0.44 | 0.83 | ± 12.0 % |
| 5200 | 36.0 | 4.66 | 5.61 | 5.61 | 5.61 | 0.35 | 1.80 | ± 13.1 % |
| 5250 | 35.9 | 4.71 | 5.57 | 5.57 | 5.57 | 0.35 | 1.80 | ± 13.1 % |
| 5300 | 35.9 | 4.76 | 5.46 | 5.46 | 5.46 | 0.35 | 1.80 | ± 13.1 % |
| 5500 | 35.6 | 4.96 | 5.05 | 5.05 | 5.05 | 0.40 | 1.80 | ± 13.1 % |
| 5600 | 35.5 | 5.07 | 4.85 | 4.85 | 4.85 | 0.40 | 1.80 | ± 13.1 % |
| 5750 | 35.4 | 5.22 | 5.15 | 5.15 | 5.15 | 0.40 | 1.80 | ± 13.1 % |
| 5800 | 35.3 | 5.27 | 5.10 | 5.10 | 5.10 | 0.40 | 1.80 | ± 13.1 % |

^C Frequency validity above 300 MHz of ± 100 MHz only applies for DASY v4.4 and higher (see Page 2), else it is restricted to ± 50 MHz. The uncertainty is the RSS of the ConvF uncertainty at calibration frequency and the uncertainty for the indicated frequency band. Frequency validity below 300 MHz is ± 10, 25, 40, 50 and 70 MHz for ConvF assessments at 30, 64, 128, 150 and 220 MHz respectively. Above 5 GHz frequency validity can be extended to ± 110 MHz.

^F At frequencies below 3 GHz, the validity of tissue parameters (ϵ and σ) can be relaxed to ± 10% if liquid compensation formula is applied to measured SAR values. At frequencies above 3 GHz, the validity of tissue parameters (ϵ and σ) is restricted to ± 5%. The uncertainty is the RSS of the ConvF uncertainty for indicated target tissue parameters.

^G Alpha/Depth are determined during calibration. SPEAG warrants that the remaining deviation due to the boundary effect after compensation is always less than ± 1% for frequencies below 3 GHz and below ± 2% for frequencies between 3-6 GHz at any distance larger than half the probe tip diameter from the boundary.

EX3DV4- SN:3922

November 15, 2017

DASY/EASY - Parameters of Probe: EX3DV4 - SN:3922

Calibration Parameter Determined in Body Tissue Simulating Media

| f (MHz) ^C | Relative Permittivity ^F | Conductivity (S/m) ^F | ConvF X | ConvF Y | ConvF Z | Alpha ^G | Depth ^G (mm) | Unc (k=2) |
|----------------------|------------------------------------|---------------------------------|---------|---------|---------|--------------------|-------------------------|-----------|
| 835 | 55.2 | 0.97 | 10.27 | 10.27 | 10.27 | 0.50 | 0.84 | ± 12.0 % |
| 1900 | 53.3 | 1.52 | 8.07 | 8.07 | 8.07 | 0.43 | 0.82 | ± 12.0 % |
| 2300 | 52.9 | 1.81 | 7.92 | 7.92 | 7.92 | 0.36 | 0.83 | ± 12.0 % |
| 2450 | 52.7 | 1.95 | 7.68 | 7.68 | 7.68 | 0.33 | 0.86 | ± 12.0 % |
| 5250 | 48.9 | 5.36 | 5.05 | 5.05 | 5.05 | 0.35 | 1.90 | ± 13.1 % |
| 5600 | 48.5 | 5.77 | 4.29 | 4.29 | 4.29 | 0.45 | 1.90 | ± 13.1 % |
| 5750 | 48.3 | 5.94 | 4.46 | 4.46 | 4.46 | 0.45 | 1.90 | ± 13.1 % |

^C Frequency validity above 300 MHz of ± 100 MHz only applies for DASY v4.4 and higher (see Page 2), else it is restricted to ± 50 MHz. The uncertainty is the RSS of the ConvF uncertainty at calibration frequency and the uncertainty for the indicated frequency band. Frequency validity below 300 MHz is ± 10, 25, 40, 50 and 70 MHz for ConvF assessments at 30, 64, 128, 150 and 220 MHz respectively. Above 5 GHz frequency validity can be extended to ± 110 MHz.


^F At frequencies below 3 GHz, the validity of tissue parameters (ϵ and σ) can be relaxed to ± 10% if liquid compensation formula is applied to measured SAR values. At frequencies above 3 GHz, the validity of tissue parameters (ϵ and σ) is restricted to ± 5%. The uncertainty is the RSS of the ConvF uncertainty for indicated target tissue parameters.

^G Alpha/Depth are determined during calibration. SPEAG warrants that the remaining deviation due to the boundary effect after compensation is always less than ± 1% for frequencies below 3 GHz and below ± 2% for frequencies between 3-6 GHz at any distance larger than half the probe tip diameter from the boundary.

EX3DV4- SN:3922

November 15, 2017

Frequency Response of E-Field (TEM-Cell: ifi110 EXX, Waveguide: R22)


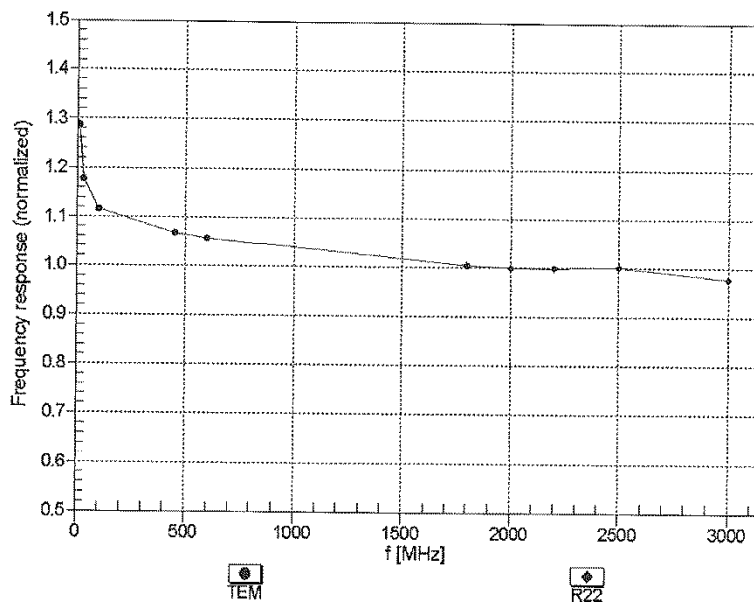


Uncertainty of Frequency Response of E-field: $\pm 6.3\%$ ($k=2$)

EX3DV4--SN:3922

November 15, 2017

Receiving Pattern (ϕ), $\theta = 0^\circ$

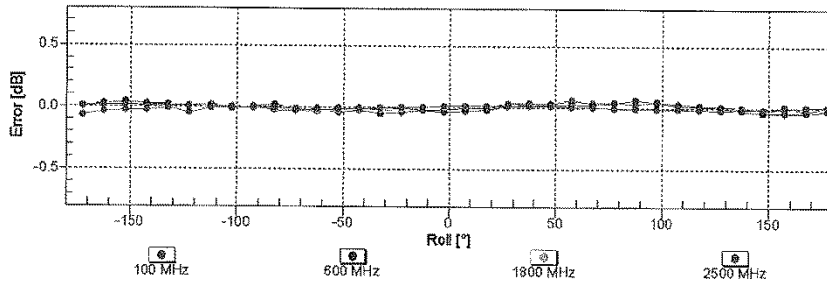
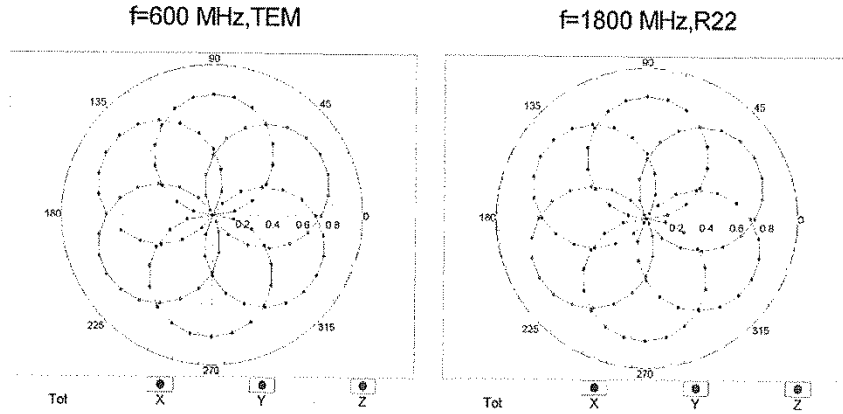


Uncertainty of Axial Isotropy Assessment: $\pm 0.5\%$ (k=2)

EX3DV4-SN:3922

November 15, 2017

Dynamic Range f(SAR_{head})
 (TEM cell, f_{eval}= 1900 MHz)

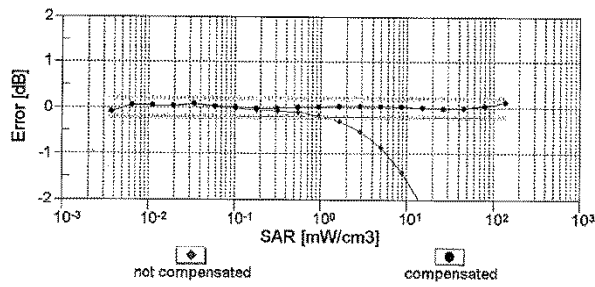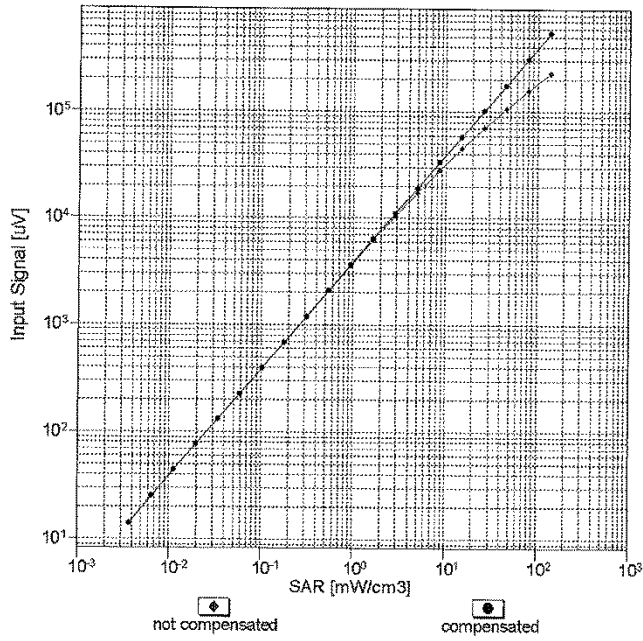


Uncertainty of Linearity Assessment: ± 0.6% (k=2)



EX3DV4-SN:3922

November 15, 2017

Conversion Factor Assessment

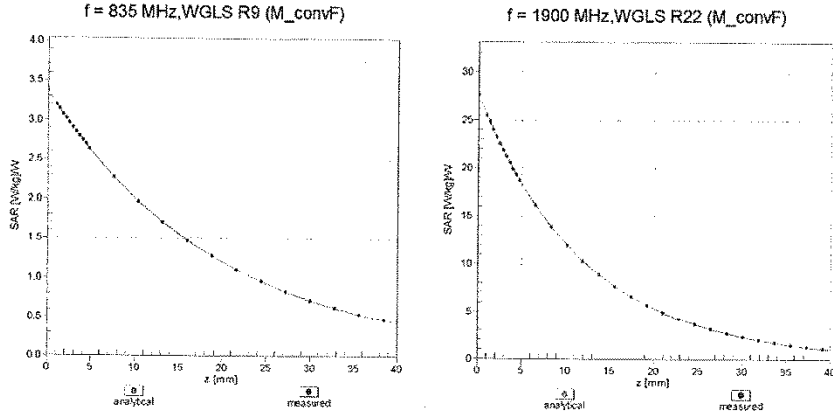

Deviation from Isotropy in Liquid Error (ϕ, θ), f = 900 MHz

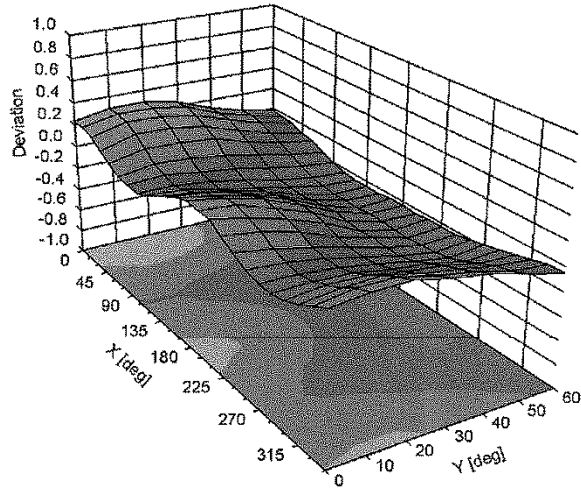

EX3DV4-- SN:3922

November 15, 2017

DASY/EASY - Parameters of Probe: EX3DV4 - SN:3922

Other Probe Parameters

| | |
|---|------------|
| Sensor Arrangement | Triangular |
| Connector Angle (°) | 107.5 |
| Mechanical Surface Detection Mode | enabled |
| Optical Surface Detection Mode | disabled |
| Probe Overall Length | 337 mm |
| Probe Body Diameter | 10 mm |
| Tip Length | 9 mm |
| Tip Diameter | 2.5 mm |
| Probe Tip to Sensor X Calibration Point | 1 mm |
| Probe Tip to Sensor Y Calibration Point | 1 mm |
| Probe Tip to Sensor Z Calibration Point | 1 mm |
| Recommended Measurement Distance from Surface | 1.4 mm |

EX3DV4- SN:3922

November 15, 2017

Appendix: Modulation Calibration Parameters

| UID | Communication System Name | | A dB | B dB μ V | C | D dB | VR mV | Max Unc ^E (k=2) |
|---------------|---|---|---------|-----------------|-------|---------|----------|----------------------------------|
| 0 | CW | X | 0.00 | 0.00 | 1.00 | 0.00 | 138.9 | ± 3.3 % |
| | | Y | 0.00 | 0.00 | 1.00 | | 156.7 | |
| | | Z | 0.00 | 0.00 | 1.00 | | 150.2 | |
| 10010- CAA | SAR Validation (Square, 100ms, 10ms) | X | 10.22 | 82.63 | 17.60 | 10.00 | 20.0 | ± 9.6 % |
| | | Y | 2.16 | 66.68 | 10.08 | | 20.0 | |
| | | Z | 4.90 | 74.46 | 14.49 | | 20.0 | |
| 10011- CAB | UMTS-FDD (WCDMA) | X | 1.00 | 66.46 | 14.75 | 0.00 | 150.0 | ± 9.6 % |
| | | Y | 1.04 | 68.80 | 15.85 | | 150.0 | |
| | | Z | 0.87 | 63.70 | 12.66 | | 150.0 | |
| 10012- CAB | IEEE 802.11b WiFi 2.4 GHz (DSSS, 1 Mbps) | X | 1.22 | 64.08 | 15.31 | 0.41 | 150.0 | ± 9.6 % |
| | | Y | 1.16 | 64.51 | 16.70 | | 150.0 | |
| | | Z | 1.15 | 62.70 | 14.01 | | 150.0 | |
| 10013- CAB | IEEE 802.11g WiFi 2.4 GHz (DSSS-OFDM, 6 Mbps) | X | 4.97 | 66.75 | 17.19 | 1.46 | 150.0 | ± 9.6 % |
| | | Y | 4.73 | 67.05 | 17.30 | | 150.0 | |
| | | Z | 4.91 | 66.44 | 16.86 | | 150.0 | |
| 10021- DAC | GSM-FDD (TDMA, GMSK) | X | 100.00 | 117.75 | 29.60 | 9.39 | 50.0 | ± 9.6 % |
| | | Y | 100.00 | 114.38 | 26.81 | | 50.0 | |
| | | Z | 100.00 | 116.87 | 28.94 | | 50.0 | |
| 10023- DAC | GPRS-FDD (TDMA, GMSK, TN 0) | X | 100.00 | 117.53 | 29.54 | 9.57 | 50.0 | ± 9.6 % |
| | | Y | 100.00 | 113.42 | 26.41 | | 50.0 | |
| | | Z | 100.00 | 116.65 | 28.87 | | 50.0 | |
| 10024- DAC | GPRS-FDD (TDMA, GMSK, TN 0-1) | X | 100.00 | 115.80 | 27.84 | 6.56 | 60.0 | ± 9.6 % |
| | | Y | 100.00 | 116.45 | 26.88 | | 60.0 | |
| | | Z | 100.00 | 114.31 | 26.94 | | 60.0 | |
| 10025- DAC | EDGE-FDD (TDMA, 8PSK, TN 0) | X | 6.40 | 82.36 | 32.51 | 12.57 | 50.0 | ± 9.6 % |
| | | Y | 12.81 | 114.09 | 48.03 | | 50.0 | |
| | | Z | 5.39 | 77.56 | 30.20 | | 50.0 | |
| 10026- DAC | EDGE-FDD (TDMA, 8PSK, TN 0-1) | X | 18.99 | 108.74 | 38.49 | 9.56 | 60.0 | ± 9.6 % |
| | | Y | 11.32 | 102.88 | 38.36 | | 60.0 | |
| | | Z | 14.13 | 101.58 | 36.03 | | 60.0 | |
| 10027- DAC | GPRS-FDD (TDMA, GMSK, TN 0-1-2) | X | 100.00 | 115.92 | 27.20 | 4.80 | 80.0 | ± 9.6 % |
| | | Y | 100.00 | 120.51 | 27.95 | | 80.0 | |
| | | Z | 100.00 | 113.62 | 25.95 | | 80.0 | |
| 10028- DAC | GPRS-FDD (TDMA, GMSK, TN 0-1-2-3) | X | 100.00 | 117.17 | 27.09 | 3.55 | 100.0 | ± 9.6 % |
| | | Y | 100.00 | 126.29 | 29.71 | | 100.0 | |
| | | Z | 100.00 | 113.65 | 25.34 | | 100.0 | |
| 10029- DAC | EDGE-FDD (TDMA, 8PSK, TN 0-1-2) | X | 10.01 | 92.59 | 31.63 | 7.80 | 80.0 | ± 9.6 % |
| | | Y | 5.95 | 85.21 | 30.10 | | 80.0 | |
| | | Z | 8.19 | 88.00 | 29.77 | | 80.0 | |
| 10030- CAA | IEEE 802.15.1 Bluetooth (GFSK, DH1) | X | 100.00 | 114.35 | 26.78 | 5.30 | 70.0 | ± 9.6 % |
| | | Y | 100.00 | 115.18 | 25.91 | | 70.0 | |
| | | Z | 100.00 | 112.41 | 25.69 | | 70.0 | |
| 10031- CAA | IEEE 802.15.1 Bluetooth (GFSK, DH3) | X | 100.00 | 117.60 | 25.92 | 1.88 | 100.0 | ± 9.6 % |
| | | Y | 100.00 | 125.73 | 27.92 | | 100.0 | |
| | | Z | 100.00 | 110.37 | 22.69 | | 100.0 | |

EX3DV4- SN:3922

November 15, 2017

| | | | | | | | | |
|-----------|---|---|---------|--------|-------|-------|-------|---------|
| 10032-CAA | IEEE 802.15.1 Bluetooth (GFSK, DH5) | X | 100.00 | 122.85 | 27.11 | 1.17 | 100.0 | ± 9.6 % |
| | | Y | 100.00 | 140.20 | 32.41 | | 100.0 | |
| | | Z | 100.00 | 110.46 | 21.87 | | 100.0 | |
| 10033-CAA | IEEE 802.15.1 Bluetooth (PI/4-DQPSK, DH1) | X | 100.00 | 128.60 | 34.99 | 5.30 | 70.0 | ± 9.6 % |
| | | Y | 100.00 | 128.81 | 34.01 | | 70.0 | |
| | | Z | 37.13 | 112.00 | 30.59 | | 70.0 | |
| 10034-CAA | IEEE 802.15.1 Bluetooth (PI/4-DQPSK, DH3) | X | 7.99 | 90.28 | 23.14 | 1.88 | 100.0 | ± 9.6 % |
| | | Y | 30.82 | 107.13 | 26.05 | | 100.0 | |
| | | Z | 3.26 | 76.76 | 18.03 | | 100.0 | |
| 10035-CAA | IEEE 802.15.1 Bluetooth (PI/4-DQPSK, DH5) | X | 3.43 | 79.39 | 19.22 | 1.17 | 100.0 | ± 9.6 % |
| | | Y | 5.34 | 85.34 | 19.62 | | 100.0 | |
| | | Z | 1.95 | 70.85 | 15.34 | | 100.0 | |
| 10036-CAA | IEEE 802.15.1 Bluetooth (8-DPSK, DH1) | X | 100.00 | 128.98 | 35.17 | 5.30 | 70.0 | ± 9.6 % |
| | | Y | 100.00 | 129.40 | 34.27 | | 70.0 | |
| | | Z | 71.70 | 122.79 | 33.35 | | 70.0 | |
| 10037-CAA | IEEE 802.15.1 Bluetooth (8-DPSK, DH3) | X | 7.27 | 88.99 | 22.70 | 1.88 | 100.0 | ± 9.6 % |
| | | Y | 18.21 | 100.58 | 24.40 | | 100.0 | |
| | | Z | 3.09 | 76.13 | 17.76 | | 100.0 | |
| 10038-CAA | IEEE 802.15.1 Bluetooth (8-DPSK, DH5) | X | 3.51 | 80.00 | 19.55 | 1.17 | 100.0 | ± 9.6 % |
| | | Y | 5.56 | 86.30 | 20.09 | | 100.0 | |
| | | Z | 1.96 | 71.12 | 15.55 | | 100.0 | |
| 10039-CAB | CDMA2000 (1xRTT, RC1) | X | 1.76 | 70.90 | 15.48 | 0.00 | 150.0 | ± 9.6 % |
| | | Y | 1.46 | 70.33 | 13.57 | | 150.0 | |
| | | Z | 1.29 | 66.18 | 12.76 | | 150.0 | |
| 10042-CAB | IS-54 / IS-136 FDD (TDMA/FDM, PI/4-DQPSK, Halfrate) | X | 100.00 | 113.36 | 26.88 | 7.78 | 50.0 | ± 9.6 % |
| | | Y | 100.00 | 110.28 | 24.34 | | 50.0 | |
| | | Z | 100.00 | 112.04 | 26.05 | | 50.0 | |
| 10044-CAA | IS-91/EIA/TIA-553 FDD (FDMA, FM) | X | 0.00 | 96.52 | 4.05 | 0.00 | 150.0 | ± 9.6 % |
| | | Y | 0.00 | 110.36 | 5.41 | | 150.0 | |
| | | Z | 0.02 | 107.42 | 7.74 | | 150.0 | |
| 10048-CAA | DECT (TDD, TDMA/FDM, GFSK, Full Slot, 24) | X | 100.00 | 120.47 | 31.99 | 13.80 | 25.0 | ± 9.6 % |
| | | Y | 100.00 | 110.06 | 26.00 | | 25.0 | |
| | | Z | 100.00 | 119.90 | 31.42 | | 25.0 | |
| 10049-CAA | DECT (TDD, TDMA/FDM, GFSK, Double Slot, 12) | X | 100.00 | 117.30 | 29.67 | 10.79 | 40.0 | ± 9.6 % |
| | | Y | 1374.02 | 140.45 | 31.34 | | 40.0 | |
| | | Z | 100.00 | 116.43 | 29.00 | | 40.0 | |
| 10058-CAA | UMTS-TDD (TD-SCDMA, 1.28 Mcps) | X | 100.00 | 125.96 | 34.92 | 9.03 | 50.0 | ± 9.6 % |
| | | Y | 100.00 | 125.07 | 33.36 | | 50.0 | |
| | | Z | 100.00 | 125.75 | 34.63 | | 50.0 | |
| 10058-DAC | EDGE-FDD (TDMA, 8PSK, TN 0-1-2-3) | X | 6.96 | 84.61 | 27.79 | 6.55 | 100.0 | ± 9.6 % |
| | | Y | 4.48 | 78.52 | 26.30 | | 100.0 | |
| | | Z | 5.96 | 81.17 | 26.23 | | 100.0 | |
| 10059-CAB | IEEE 802.11b WiFi 2.4 GHz (DSSS, 2 Mbps) | X | 1.31 | 65.73 | 16.21 | 0.61 | 110.0 | ± 9.6 % |
| | | Y | 1.21 | 65.92 | 16.54 | | 110.0 | |
| | | Z | 1.21 | 63.90 | 14.69 | | 110.0 | |
| 10060-CAB | IEEE 802.11b WiFi 2.4 GHz (DSSS, 5.5 Mbps) | X | 100.00 | 134.97 | 34.84 | 1.30 | 110.0 | ± 9.6 % |
| | | Y | 100.00 | 144.62 | 38.35 | | 110.0 | |
| | | Z | 5.26 | 89.72 | 22.60 | | 110.0 | |

EX3DV4-- SN:3922

November 15, 2017

| | | | | | | | | |
|-----------|--|---|------|-------|-------|------|-------|---------|
| 10061-CAB | IEEE 802.11b WiFi 2.4 GHz (DSSS, 11 Mbps) | X | 7.25 | 94.27 | 26.93 | 2.04 | 110.0 | ± 9.6 % |
| | | Y | 5.44 | 94.48 | 27.93 | | 110.0 | |
| | | Z | 3.47 | 81.01 | 21.88 | | 110.0 | |
| 10062-CAB | IEEE 802.11a/h WiFi 5 GHz (OFDM, 6 Mbps) | X | 4.75 | 66.65 | 16.54 | 0.49 | 100.0 | ± 9.6 % |
| | | Y | 4.51 | 66.93 | 16.63 | | 100.0 | |
| | | Z | 4.68 | 66.30 | 16.18 | | 100.0 | |
| 10063-CAB | IEEE 802.11a/h WiFi 5 GHz (OFDM, 9 Mbps) | X | 4.78 | 66.78 | 16.66 | 0.72 | 100.0 | ± 9.6 % |
| | | Y | 4.53 | 67.06 | 16.76 | | 100.0 | |
| | | Z | 4.70 | 66.42 | 16.30 | | 100.0 | |
| 10064-CAB | IEEE 802.11a/h WiFi 5 GHz (OFDM, 12 Mbps) | X | 5.08 | 67.08 | 16.91 | 0.86 | 100.0 | ± 9.6 % |
| | | Y | 4.78 | 67.26 | 16.96 | | 100.0 | |
| | | Z | 5.01 | 66.74 | 16.58 | | 100.0 | |
| 10065-CAB | IEEE 802.11a/h WiFi 5 GHz (OFDM, 18 Mbps) | X | 4.96 | 67.04 | 17.06 | 1.21 | 100.0 | ± 9.6 % |
| | | Y | 4.66 | 67.16 | 17.09 | | 100.0 | |
| | | Z | 4.89 | 66.69 | 16.71 | | 100.0 | |
| 10066-CAB | IEEE 802.11a/h WiFi 5 GHz (OFDM, 24 Mbps) | X | 4.99 | 67.10 | 17.25 | 1.46 | 100.0 | ± 9.6 % |
| | | Y | 4.67 | 67.18 | 17.27 | | 100.0 | |
| | | Z | 4.92 | 66.75 | 16.91 | | 100.0 | |
| 10067-CAB | IEEE 802.11a/h WiFi 5 GHz (OFDM, 36 Mbps) | X | 5.29 | 67.24 | 17.70 | 2.04 | 100.0 | ± 9.6 % |
| | | Y | 4.97 | 67.49 | 17.80 | | 100.0 | |
| | | Z | 5.22 | 66.94 | 17.39 | | 100.0 | |
| 10068-CAB | IEEE 802.11a/h WiFi 5 GHz (OFDM, 48 Mbps) | X | 5.37 | 67.42 | 18.00 | 2.55 | 100.0 | ± 9.6 % |
| | | Y | 5.00 | 67.43 | 17.99 | | 100.0 | |
| | | Z | 5.29 | 67.10 | 17.68 | | 100.0 | |
| 10069-CAB | IEEE 802.11a/h WiFi 5 GHz (OFDM, 54 Mbps) | X | 5.44 | 67.37 | 18.17 | 2.67 | 100.0 | ± 9.6 % |
| | | Y | 5.07 | 67.46 | 18.19 | | 100.0 | |
| | | Z | 5.37 | 67.07 | 17.87 | | 100.0 | |
| 10071-CAB | IEEE 802.11g WiFi 2.4 GHz (DSSS/OFDM, 9 Mbps) | X | 5.08 | 66.89 | 17.54 | 1.99 | 100.0 | ± 9.6 % |
| | | Y | 4.83 | 67.15 | 17.64 | | 100.0 | |
| | | Z | 5.02 | 66.59 | 17.22 | | 100.0 | |
| 10072-CAB | IEEE 802.11g WiFi 2.4 GHz (DSSS/OFDM, 12 Mbps) | X | 5.09 | 67.31 | 17.81 | 2.30 | 100.0 | ± 9.6 % |
| | | Y | 4.80 | 67.45 | 17.88 | | 100.0 | |
| | | Z | 5.02 | 66.97 | 17.47 | | 100.0 | |
| 10073-CAB | IEEE 802.11g WiFi 2.4 GHz (DSSS/OFDM, 18 Mbps) | X | 5.17 | 67.53 | 18.18 | 2.83 | 100.0 | ± 9.6 % |
| | | Y | 4.87 | 67.68 | 18.27 | | 100.0 | |
| | | Z | 5.09 | 67.18 | 17.84 | | 100.0 | |
| 10074-CAB | IEEE 802.11g WiFi 2.4 GHz (DSSS/OFDM, 24 Mbps) | X | 5.16 | 67.47 | 18.37 | 3.30 | 100.0 | ± 9.6 % |
| | | Y | 4.87 | 67.63 | 18.45 | | 100.0 | |
| | | Z | 5.08 | 67.11 | 18.03 | | 100.0 | |
| 10075-CAB | IEEE 802.11g WiFi 2.4 GHz (DSSS/OFDM, 36 Mbps) | X | 5.22 | 67.70 | 18.76 | 3.82 | 90.0 | ± 9.6 % |
| | | Y | 4.89 | 67.67 | 18.74 | | 90.0 | |
| | | Z | 5.14 | 67.33 | 18.42 | | 90.0 | |
| 10076-CAB | IEEE 802.11g WiFi 2.4 GHz (DSSS/OFDM, 48 Mbps) | X | 5.22 | 67.45 | 18.86 | 4.15 | 90.0 | ± 9.6 % |
| | | Y | 4.92 | 67.52 | 18.92 | | 90.0 | |
| | | Z | 5.14 | 67.09 | 18.53 | | 90.0 | |
| 10077-CAB | IEEE 802.11g WiFi 2.4 GHz (DSSS/OFDM, 54 Mbps) | X | 5.24 | 67.51 | 18.95 | 4.30 | 90.0 | ± 9.6 % |
| | | Y | 4.95 | 67.62 | 19.04 | | 90.0 | |
| | | Z | 5.16 | 67.15 | 18.62 | | 90.0 | |

EX3DV4- SN:3922

November 15, 2017

| | | | | | | | | |
|-----------|---|---|--------|--------|-------|------|-------|---------|
| 10081-CAB | CDMA2000 (1xRTT, RC3) | X | 0.84 | 65.40 | 12.52 | 0.00 | 150.0 | ± 9.6 % |
| | | Y | 0.65 | 64.57 | 10.44 | | 150.0 | |
| | | Z | 0.70 | 62.59 | 10.41 | | 150.0 | |
| 10082-CAB | IS-54 / IS-136 FDD (TDMA/FDM, PI/4-DQPSK, Fullrate) | X | 1.00 | 60.00 | 5.34 | 4.77 | 80.0 | ± 9.6 % |
| | | Y | 0.65 | 60.00 | 4.11 | | 80.0 | |
| | | Z | 0.94 | 60.00 | 5.13 | | 80.0 | |
| 10090-DAC | GPRS-FDD (TDMA, GMSK, TN 0-4) | X | 100.00 | 115.85 | 27.88 | 6.56 | 60.0 | ± 9.6 % |
| | | Y | 100.00 | 116.50 | 26.92 | | 60.0 | |
| | | Z | 100.00 | 114.37 | 26.98 | | 60.0 | |
| 10097-CAB | UMTS-FDD (HSDPA) | X | 1.80 | 67.04 | 15.39 | 0.00 | 150.0 | ± 9.6 % |
| | | Y | 1.85 | 68.99 | 15.97 | | 150.0 | |
| | | Z | 1.64 | 65.18 | 14.00 | | 150.0 | |
| 10098-CAB | UMTS-FDD (HSUPA, Subtest 2) | X | 1.76 | 66.99 | 15.35 | 0.00 | 150.0 | ± 9.6 % |
| | | Y | 1.81 | 68.96 | 15.96 | | 150.0 | |
| | | Z | 1.60 | 65.10 | 13.94 | | 150.0 | |
| 10099-DAC | EDGE-FDD (TDMA, 8PSK, TN 0-4) | X | 19.16 | 108.92 | 38.55 | 9.56 | 60.0 | ± 9.6 % |
| | | Y | 11.50 | 103.26 | 38.49 | | 60.0 | |
| | | Z | 14.26 | 101.76 | 36.08 | | 60.0 | |
| 10100-CAD | LTE-FDD (SC-FDMA, 100% RB, 20 MHz, QPSK) | X | 3.12 | 69.96 | 16.46 | 0.00 | 150.0 | ± 9.6 % |
| | | Y | 3.02 | 70.58 | 16.94 | | 150.0 | |
| | | Z | 2.84 | 68.15 | 15.30 | | 150.0 | |
| 10101-CAD | LTE-FDD (SC-FDMA, 100% RB, 20 MHz, 16-QAM) | X | 3.26 | 67.34 | 15.80 | 0.00 | 150.0 | ± 9.6 % |
| | | Y | 3.11 | 67.60 | 16.01 | | 150.0 | |
| | | Z | 3.13 | 66.43 | 15.09 | | 150.0 | |
| 10102-CAD | LTE-FDD (SC-FDMA, 100% RB, 20 MHz, 64-QAM) | X | 3.37 | 67.32 | 15.90 | 0.00 | 150.0 | ± 9.6 % |
| | | Y | 3.21 | 67.57 | 16.09 | | 150.0 | |
| | | Z | 3.24 | 66.46 | 15.22 | | 150.0 | |
| 10103-CAD | LTE-TDD (SC-FDMA, 100% RB, 20 MHz, QPSK) | X | 8.33 | 79.69 | 22.08 | 3.98 | 65.0 | ± 9.6 % |
| | | Y | 6.84 | 79.07 | 22.31 | | 65.0 | |
| | | Z | 7.34 | 77.47 | 21.06 | | 65.0 | |
| 10104-CAD | LTE-TDD (SC-FDMA, 100% RB, 20 MHz, 16-QAM) | X | 7.64 | 76.60 | 21.68 | 3.98 | 65.0 | ± 9.6 % |
| | | Y | 6.15 | 74.98 | 21.35 | | 65.0 | |
| | | Z | 7.10 | 75.26 | 20.98 | | 65.0 | |
| 10105-CAD | LTE-TDD (SC-FDMA, 100% RB, 20 MHz, 64-QAM) | X | 7.36 | 75.84 | 21.68 | 3.98 | 65.0 | ± 9.6 % |
| | | Y | 5.92 | 74.03 | 21.23 | | 65.0 | |
| | | Z | 6.77 | 74.27 | 20.87 | | 65.0 | |
| 10108-CAE | LTE-FDD (SC-FDMA, 100% RB, 10 MHz, QPSK) | X | 2.74 | 69.16 | 16.27 | 0.00 | 150.0 | ± 9.6 % |
| | | Y | 2.61 | 69.95 | 16.79 | | 150.0 | |
| | | Z | 2.49 | 67.37 | 15.08 | | 150.0 | |
| 10109-CAE | LTE-FDD (SC-FDMA, 100% RB, 10 MHz, 16-QAM) | X | 2.92 | 67.14 | 15.70 | 0.00 | 150.0 | ± 9.6 % |
| | | Y | 2.76 | 67.60 | 15.89 | | 150.0 | |
| | | Z | 2.78 | 66.11 | 14.90 | | 150.0 | |
| 10110-CAE | LTE-FDD (SC-FDMA, 100% RB, 5 MHz, QPSK) | X | 2.23 | 68.18 | 15.87 | 0.00 | 150.0 | ± 9.6 % |
| | | Y | 2.10 | 69.29 | 16.34 | | 150.0 | |
| | | Z | 2.02 | 66.33 | 14.57 | | 150.0 | |
| 10111-CAE | LTE-FDD (SC-FDMA, 100% RB, 5 MHz, 16-QAM) | X | 2.63 | 67.80 | 15.96 | 0.00 | 150.0 | ± 9.6 % |
| | | Y | 2.51 | 68.87 | 16.15 | | 150.0 | |
| | | Z | 2.45 | 66.39 | 14.92 | | 150.0 | |

EX3DV4-SN:3922

November 15, 2017

| | | | | | | | | |
|-----------|--|---|------|-------|-------|------|-------|---------|
| 10112-CAE | LTE-FDD (SC-FDMA, 100% RB, 10 MHz, 64-QAM) | X | 3.05 | 67.14 | 15.76 | 0.00 | 150.0 | ± 9.6 % |
| | | Y | 2.88 | 67.64 | 15.95 | | 150.0 | |
| | | Z | 2.91 | 66.18 | 15.00 | | 150.0 | |
| 10113-CAE | LTE-FDD (SC-FDMA, 100% RB, 5 MHz, 64-QAM) | X | 2.78 | 67.94 | 16.10 | 0.00 | 150.0 | ± 9.6 % |
| | | Y | 2.65 | 69.02 | 16.27 | | 150.0 | |
| | | Z | 2.60 | 66.61 | 15.11 | | 150.0 | |
| 10114-CAB | IEEE 802.11n (HT Greenfield, 13.5 Mbps, BPSK) | X | 5.16 | 67.08 | 16.36 | 0.00 | 150.0 | ± 9.6 % |
| | | Y | 4.94 | 67.18 | 16.47 | | 150.0 | |
| | | Z | 5.09 | 66.75 | 16.02 | | 150.0 | |
| 10115-CAB | IEEE 802.11n (HT Greenfield, 81 Mbps, 16-QAM) | X | 5.49 | 67.32 | 16.49 | 0.00 | 150.0 | ± 9.6 % |
| | | Y | 5.19 | 67.25 | 16.50 | | 150.0 | |
| | | Z | 5.41 | 66.99 | 16.16 | | 150.0 | |
| 10116-CAB | IEEE 802.11n (HT Greenfield, 135 Mbps, 64-QAM) | X | 5.27 | 67.31 | 16.40 | 0.00 | 150.0 | ± 9.6 % |
| | | Y | 5.03 | 67.38 | 16.49 | | 150.0 | |
| | | Z | 5.19 | 66.96 | 16.06 | | 150.0 | |
| 10117-CAB | IEEE 802.11n (HT Mixed, 13.5 Mbps, BPSK) | X | 5.14 | 67.00 | 16.33 | 0.00 | 150.0 | ± 9.6 % |
| | | Y | 4.94 | 67.14 | 16.46 | | 150.0 | |
| | | Z | 5.06 | 66.66 | 16.00 | | 150.0 | |
| 10118-CAB | IEEE 802.11n (HT Mixed, 81 Mbps, 16-QAM) | X | 5.56 | 67.51 | 16.58 | 0.00 | 150.0 | ± 9.6 % |
| | | Y | 5.26 | 67.44 | 16.60 | | 150.0 | |
| | | Z | 5.49 | 67.17 | 16.26 | | 150.0 | |
| 10119-CAB | IEEE 802.11n (HT Mixed, 135 Mbps, 64-QAM) | X | 5.24 | 67.24 | 16.37 | 0.00 | 150.0 | ± 9.6 % |
| | | Y | 5.02 | 67.37 | 16.50 | | 150.0 | |
| | | Z | 5.16 | 66.89 | 16.04 | | 150.0 | |
| 10140-CAD | LTE-FDD (SC-FDMA, 100% RB, 15 MHz, 16-QAM) | X | 3.41 | 67.32 | 15.83 | 0.00 | 150.0 | ± 9.6 % |
| | | Y | 3.24 | 67.60 | 16.01 | | 150.0 | |
| | | Z | 3.28 | 66.48 | 15.15 | | 150.0 | |
| 10141-CAD | LTE-FDD (SC-FDMA, 100% RB, 15 MHz, 64-QAM) | X | 3.53 | 67.42 | 16.00 | 0.00 | 150.0 | ± 9.6 % |
| | | Y | 3.36 | 67.74 | 16.19 | | 150.0 | |
| | | Z | 3.40 | 66.61 | 15.35 | | 150.0 | |
| 10142-CAD | LTE-FDD (SC-FDMA, 100% RB, 3 MHz, QPSK) | X | 2.00 | 68.09 | 15.56 | 0.00 | 150.0 | ± 9.6 % |
| | | Y | 1.87 | 69.35 | 15.72 | | 150.0 | |
| | | Z | 1.78 | 65.96 | 14.09 | | 150.0 | |
| 10143-CAD | LTE-FDD (SC-FDMA, 100% RB, 3 MHz, 16-QAM) | X | 2.48 | 68.45 | 15.72 | 0.00 | 150.0 | ± 9.6 % |
| | | Y | 2.33 | 69.45 | 15.38 | | 150.0 | |
| | | Z | 2.25 | 66.57 | 14.42 | | 150.0 | |
| 10144-CAD | LTE-FDD (SC-FDMA, 100% RB, 3 MHz, 64-QAM) | X | 2.28 | 66.39 | 14.23 | 0.00 | 150.0 | ± 9.6 % |
| | | Y | 1.98 | 66.31 | 13.31 | | 150.0 | |
| | | Z | 2.12 | 65.05 | 13.21 | | 150.0 | |
| 10145-CAE | LTE-FDD (SC-FDMA, 100% RB, 1.4 MHz, QPSK) | X | 1.30 | 65.44 | 12.36 | 0.00 | 150.0 | ± 9.6 % |
| | | Y | 0.79 | 61.72 | 8.33 | | 150.0 | |
| | | Z | 1.12 | 63.18 | 10.71 | | 150.0 | |
| 10146-CAE | LTE-FDD (SC-FDMA, 100% RB, 1.4 MHz, 16-QAM) | X | 2.64 | 70.08 | 14.27 | 0.00 | 150.0 | ± 9.6 % |
| | | Y | 1.12 | 61.74 | 7.81 | | 150.0 | |
| | | Z | 2.13 | 66.87 | 12.42 | | 150.0 | |
| 10147-CAE | LTE-FDD (SC-FDMA, 100% RB, 1.4 MHz, 64-QAM) | X | 3.51 | 73.94 | 16.07 | 0.00 | 150.0 | ± 9.6 % |
| | | Y | 1.20 | 62.39 | 8.26 | | 150.0 | |
| | | Z | 2.49 | 68.91 | 13.52 | | 150.0 | |

EX3DV4-- SN:3922

November 15, 2017

| | | | | | | | | |
|-----------|--|---|------|-------|-------|------|-------|---------|
| 10149-CAD | LTE-FDD (SC-FDMA, 50% RB, 20 MHz, 16-QAM) | X | 2.93 | 67.20 | 15.74 | 0.00 | 150.0 | ± 9.6 % |
| | | Y | 2.77 | 67.66 | 15.94 | | 150.0 | |
| | | Z | 2.79 | 66.16 | 14.94 | | 150.0 | |
| 10150-CAD | LTE-FDD (SC-FDMA, 50% RB, 20 MHz, 64-QAM) | X | 3.06 | 67.19 | 15.80 | 0.00 | 150.0 | ± 9.6 % |
| | | Y | 2.89 | 67.70 | 16.00 | | 150.0 | |
| | | Z | 2.92 | 66.22 | 15.04 | | 150.0 | |
| 10151-CAD | LTE-TDD (SC-FDMA, 50% RB, 20 MHz, QPSK) | X | 9.10 | 82.72 | 23.34 | 3.98 | 65.0 | ± 9.6 % |
| | | Y | 7.77 | 83.35 | 24.03 | | 65.0 | |
| | | Z | 7.87 | 80.11 | 22.17 | | 65.0 | |
| 10152-CAD | LTE-TDD (SC-FDMA, 50% RB, 20 MHz, 16-QAM) | X | 7.25 | 76.84 | 21.53 | 3.98 | 65.0 | ± 9.6 % |
| | | Y | 5.77 | 75.38 | 21.12 | | 65.0 | |
| | | Z | 6.65 | 75.29 | 20.73 | | 65.0 | |
| 10153-CAD | LTE-TDD (SC-FDMA, 50% RB, 20 MHz, 64-QAM) | X | 7.68 | 77.84 | 22.31 | 3.98 | 65.0 | ± 9.6 % |
| | | Y | 6.19 | 76.52 | 21.97 | | 65.0 | |
| | | Z | 7.06 | 76.27 | 21.51 | | 65.0 | |
| 10154-CAE | LTE-FDD (SC-FDMA, 50% RB, 10 MHz, QPSK) | X | 2.27 | 68.60 | 16.13 | 0.00 | 150.0 | ± 9.6 % |
| | | Y | 2.14 | 69.66 | 16.57 | | 150.0 | |
| | | Z | 2.05 | 66.63 | 14.78 | | 150.0 | |
| 10155-CAE | LTE-FDD (SC-FDMA, 50% RB, 10 MHz, 16-QAM) | X | 2.63 | 67.80 | 15.97 | 0.00 | 150.0 | ± 9.6 % |
| | | Y | 2.51 | 68.91 | 16.18 | | 150.0 | |
| | | Z | 2.45 | 66.40 | 14.93 | | 150.0 | |
| 10156-CAE | LTE-FDD (SC-FDMA, 50% RB, 5 MHz, QPSK) | X | 1.85 | 68.17 | 15.39 | 0.00 | 150.0 | ± 9.6 % |
| | | Y | 1.69 | 69.14 | 15.17 | | 150.0 | |
| | | Z | 1.62 | 65.76 | 13.75 | | 150.0 | |
| 10157-CAE | LTE-FDD (SC-FDMA, 50% RB, 5 MHz, 16-QAM) | X | 2.12 | 66.91 | 14.29 | 0.00 | 150.0 | ± 9.6 % |
| | | Y | 1.79 | 66.54 | 13.00 | | 150.0 | |
| | | Z | 1.92 | 65.19 | 13.05 | | 150.0 | |
| 10158-CAE | LTE-FDD (SC-FDMA, 50% RB, 10 MHz, 64-QAM) | X | 2.79 | 68.00 | 16.14 | 0.00 | 150.0 | ± 9.6 % |
| | | Y | 2.66 | 69.10 | 16.32 | | 150.0 | |
| | | Z | 2.61 | 66.65 | 15.15 | | 150.0 | |
| 10159-CAE | LTE-FDD (SC-FDMA, 50% RB, 5 MHz, 64-QAM) | X | 2.23 | 67.39 | 14.59 | 0.00 | 150.0 | ± 9.6 % |
| | | Y | 1.87 | 66.87 | 13.20 | | 150.0 | |
| | | Z | 2.01 | 65.56 | 13.30 | | 150.0 | |
| 10160-CAD | LTE-FDD (SC-FDMA, 50% RB, 15 MHz, QPSK) | X | 2.74 | 68.23 | 16.07 | 0.00 | 150.0 | ± 9.6 % |
| | | Y | 2.64 | 69.20 | 16.55 | | 150.0 | |
| | | Z | 2.55 | 66.80 | 15.05 | | 150.0 | |
| 10161-CAD | LTE-FDD (SC-FDMA, 50% RB, 15 MHz, 16-QAM) | X | 2.95 | 67.11 | 15.74 | 0.00 | 150.0 | ± 9.6 % |
| | | Y | 2.78 | 67.68 | 15.88 | | 150.0 | |
| | | Z | 2.81 | 66.11 | 14.94 | | 150.0 | |
| 10162-CAD | LTE-FDD (SC-FDMA, 50% RB, 15 MHz, 64-QAM) | X | 3.06 | 67.24 | 15.84 | 0.00 | 150.0 | ± 9.6 % |
| | | Y | 2.89 | 67.90 | 16.02 | | 150.0 | |
| | | Z | 2.92 | 66.26 | 15.07 | | 150.0 | |
| 10166-CAE | LTE-FDD (SC-FDMA, 50% RB, 1.4 MHz, QPSK) | X | 3.70 | 69.58 | 19.27 | 3.01 | 150.0 | ± 9.6 % |
| | | Y | 3.28 | 69.68 | 19.46 | | 150.0 | |
| | | Z | 3.63 | 69.00 | 18.75 | | 150.0 | |
| 10167-CAE | LTE-FDD (SC-FDMA, 50% RB, 1.4 MHz, 16-QAM) | X | 4.55 | 72.43 | 19.74 | 3.01 | 150.0 | ± 9.6 % |
| | | Y | 3.95 | 72.87 | 20.04 | | 150.0 | |
| | | Z | 4.44 | 71.75 | 19.18 | | 150.0 | |

EX3DV4--SN:3922

November 15, 2017

| | | | | | | | | |
|-----------|--|---|-------|--------|-------|------|-------|---------|
| 10168-CAE | LTE-FDD (SC-FDMA, 50% RB, 1.4 MHz, 64-QAM) | X | 5.04 | 74.67 | 21.06 | 3.01 | 150.0 | ± 9.6 % |
| | | Y | 4.45 | 75.52 | 21.56 | | 150.0 | |
| | | Z | 4.90 | 73.87 | 20.45 | | 150.0 | |
| 10169-CAD | LTE-FDD (SC-FDMA, 1 RB, 20 MHz, QPSK) | X | 3.13 | 69.42 | 19.23 | 3.01 | 150.0 | ± 9.6 % |
| | | Y | 2.65 | 68.12 | 18.80 | | 150.0 | |
| | | Z | 3.07 | 68.78 | 18.63 | | 150.0 | |
| 10170-CAD | LTE-FDD (SC-FDMA, 1 RB, 20 MHz, 16-QAM) | X | 4.32 | 75.44 | 21.61 | 3.01 | 150.0 | ± 9.6 % |
| | | Y | 3.45 | 73.89 | 21.21 | | 150.0 | |
| | | Z | 4.18 | 74.42 | 20.85 | | 150.0 | |
| 10171-AAD | LTE-FDD (SC-FDMA, 1 RB, 20 MHz, 64-QAM) | X | 3.55 | 71.24 | 18.84 | 3.01 | 150.0 | ± 9.6 % |
| | | Y | 2.88 | 70.12 | 18.52 | | 150.0 | |
| | | Z | 3.46 | 70.45 | 18.18 | | 150.0 | |
| 10172-CAD | LTE-TDD (SC-FDMA, 1 RB, 20 MHz, QPSK) | X | 22.91 | 110.27 | 34.84 | 6.02 | 65.0 | ± 9.6 % |
| | | Y | 8.26 | 96.77 | 32.08 | | 65.0 | |
| | | Z | 13.81 | 99.89 | 31.52 | | 65.0 | |
| 10173-CAD | LTE-TDD (SC-FDMA, 1 RB, 20 MHz, 16-QAM) | X | 55.63 | 121.17 | 35.70 | 6.02 | 65.0 | ± 9.6 % |
| | | Y | 30.82 | 118.44 | 36.12 | | 65.0 | |
| | | Z | 32.47 | 110.93 | 32.74 | | 65.0 | |
| 10174-CAD | LTE-TDD (SC-FDMA, 1 RB, 20 MHz, 64-QAM) | X | 39.54 | 113.02 | 32.93 | 6.02 | 65.0 | ± 9.6 % |
| | | Y | 23.05 | 110.98 | 33.34 | | 65.0 | |
| | | Z | 23.65 | 103.70 | 30.13 | | 65.0 | |
| 10175-CAE | LTE-FDD (SC-FDMA, 1 RB, 10 MHz, QPSK) | X | 3.09 | 69.10 | 18.97 | 3.01 | 150.0 | ± 9.6 % |
| | | Y | 2.62 | 67.88 | 18.58 | | 150.0 | |
| | | Z | 3.03 | 68.48 | 18.39 | | 150.0 | |
| 10176-CAE | LTE-FDD (SC-FDMA, 1 RB, 10 MHz, 16-QAM) | X | 4.33 | 75.46 | 21.62 | 3.01 | 150.0 | ± 9.6 % |
| | | Y | 3.46 | 73.91 | 21.22 | | 150.0 | |
| | | Z | 4.19 | 74.44 | 20.86 | | 150.0 | |
| 10177-CAG | LTE-FDD (SC-FDMA, 1 RB, 5 MHz, QPSK) | X | 3.12 | 69.26 | 19.08 | 3.01 | 150.0 | ± 9.6 % |
| | | Y | 2.64 | 67.99 | 18.65 | | 150.0 | |
| | | Z | 3.06 | 68.63 | 18.48 | | 150.0 | |
| 10178-CAE | LTE-FDD (SC-FDMA, 1 RB, 5 MHz, 16-QAM) | X | 4.28 | 75.20 | 21.48 | 3.01 | 150.0 | ± 9.6 % |
| | | Y | 3.44 | 73.78 | 21.14 | | 150.0 | |
| | | Z | 4.14 | 74.21 | 20.73 | | 150.0 | |
| 10179-CAE | LTE-FDD (SC-FDMA, 1 RB, 10 MHz, 64-QAM) | X | 3.90 | 73.22 | 20.10 | 3.01 | 150.0 | ± 9.6 % |
| | | Y | 3.15 | 71.97 | 19.77 | | 150.0 | |
| | | Z | 3.78 | 72.29 | 19.37 | | 150.0 | |
| 10180-CAE | LTE-FDD (SC-FDMA, 1 RB, 5 MHz, 64-QAM) | X | 3.54 | 71.16 | 18.79 | 3.01 | 150.0 | ± 9.6 % |
| | | Y | 2.88 | 70.08 | 18.49 | | 150.0 | |
| | | Z | 3.45 | 70.38 | 18.13 | | 150.0 | |
| 10181-CAD | LTE-FDD (SC-FDMA, 1 RB, 15 MHz, QPSK) | X | 3.11 | 69.24 | 19.07 | 3.01 | 150.0 | ± 9.6 % |
| | | Y | 2.63 | 67.97 | 18.65 | | 150.0 | |
| | | Z | 3.05 | 68.81 | 18.48 | | 150.0 | |
| 10182-CAD | LTE-FDD (SC-FDMA, 1 RB, 15 MHz, 16-QAM) | X | 4.27 | 75.18 | 21.47 | 3.01 | 150.0 | ± 9.6 % |
| | | Y | 3.43 | 73.75 | 21.13 | | 150.0 | |
| | | Z | 4.14 | 74.19 | 20.72 | | 150.0 | |
| 10183-AAC | LTE-FDD (SC-FDMA, 1 RB, 15 MHz, 64-QAM) | X | 3.53 | 71.14 | 18.78 | 3.01 | 150.0 | ± 9.6 % |
| | | Y | 2.88 | 70.06 | 18.48 | | 150.0 | |
| | | Z | 3.44 | 70.36 | 18.12 | | 150.0 | |

EX3DV4- SN:3922

November 15, 2017

| | | | | | | | | |
|-----------|---|---|------|-------|-------|------|-------|---------|
| 10184-CAD | LTE-FDD (SC-FDMA, 1 RB, 3 MHz, QPSK) | X | 3.12 | 69.29 | 19.09 | 3.01 | 150.0 | ± 9.6 % |
| | | Y | 2.84 | 68.01 | 18.67 | | 150.0 | |
| | | Z | 3.06 | 68.65 | 18.50 | | 150.0 | |
| 10185-CAD | LTE-FDD (SC-FDMA, 1 RB, 3 MHz, 16-QAM) | X | 4.29 | 75.25 | 21.51 | 3.01 | 150.0 | ± 9.6 % |
| | | Y | 3.45 | 73.82 | 21.16 | | 150.0 | |
| | | Z | 4.16 | 74.26 | 20.76 | | 150.0 | |
| 10186-AAD | LTE-FDD (SC-FDMA, 1 RB, 3 MHz, 64-QAM) | X | 3.55 | 71.20 | 18.81 | 3.01 | 150.0 | ± 9.6 % |
| | | Y | 2.89 | 70.12 | 18.52 | | 150.0 | |
| | | Z | 3.46 | 70.42 | 18.15 | | 150.0 | |
| 10187-CAE | LTE-FDD (SC-FDMA, 1 RB, 1.4 MHz, QPSK) | X | 3.13 | 69.33 | 19.15 | 3.01 | 150.0 | ± 9.6 % |
| | | Y | 2.65 | 68.08 | 18.74 | | 150.0 | |
| | | Z | 3.07 | 68.70 | 18.55 | | 150.0 | |
| 10188-CAE | LTE-FDD (SC-FDMA, 1 RB, 1.4 MHz, 16-QAM) | X | 4.44 | 75.95 | 21.90 | 3.01 | 150.0 | ± 9.6 % |
| | | Y | 3.54 | 74.36 | 21.49 | | 150.0 | |
| | | Z | 4.29 | 74.91 | 21.13 | | 150.0 | |
| 10189-AAE | LTE-FDD (SC-FDMA, 1 RB, 1.4 MHz, 64-QAM) | X | 3.63 | 71.64 | 19.09 | 3.01 | 150.0 | ± 9.6 % |
| | | Y | 2.95 | 70.50 | 18.77 | | 150.0 | |
| | | Z | 3.53 | 70.83 | 18.42 | | 150.0 | |
| 10193-CAB | IEEE 802.11n (HT Greenfield, 6.5 Mbps, BPSK) | X | 4.57 | 66.49 | 16.08 | 0.00 | 150.0 | ± 9.6 % |
| | | Y | 4.36 | 66.85 | 16.18 | | 150.0 | |
| | | Z | 4.49 | 66.12 | 15.71 | | 150.0 | |
| 10194-CAB | IEEE 802.11n (HT Greenfield, 39 Mbps, 16-QAM) | X | 4.74 | 66.82 | 16.20 | 0.00 | 150.0 | ± 9.6 % |
| | | Y | 4.50 | 67.09 | 16.31 | | 150.0 | |
| | | Z | 4.67 | 66.44 | 15.83 | | 150.0 | |
| 10195-CAB | IEEE 802.11n (HT Greenfield, 65 Mbps, 64-QAM) | X | 4.79 | 66.85 | 16.22 | 0.00 | 150.0 | ± 9.6 % |
| | | Y | 4.53 | 67.11 | 16.33 | | 150.0 | |
| | | Z | 4.71 | 66.47 | 15.85 | | 150.0 | |
| 10196-CAB | IEEE 802.11n (HT Mixed, 6.5 Mbps, BPSK) | X | 4.57 | 66.56 | 16.11 | 0.00 | 150.0 | ± 9.6 % |
| | | Y | 4.34 | 66.85 | 16.17 | | 150.0 | |
| | | Z | 4.50 | 66.18 | 15.73 | | 150.0 | |
| 10197-CAB | IEEE 802.11n (HT Mixed, 39 Mbps, 16-QAM) | X | 4.76 | 66.84 | 16.21 | 0.00 | 150.0 | ± 9.6 % |
| | | Y | 4.51 | 67.10 | 16.32 | | 150.0 | |
| | | Z | 4.68 | 66.46 | 15.84 | | 150.0 | |
| 10198-CAB | IEEE 802.11n (HT Mixed, 65 Mbps, 64-QAM) | X | 4.79 | 66.86 | 16.23 | 0.00 | 150.0 | ± 9.6 % |
| | | Y | 4.53 | 67.11 | 16.33 | | 150.0 | |
| | | Z | 4.71 | 66.49 | 15.86 | | 150.0 | |
| 10219-CAB | IEEE 802.11n (HT Mixed, 7.2 Mbps, BPSK) | X | 4.52 | 66.57 | 16.07 | 0.00 | 150.0 | ± 9.6 % |
| | | Y | 4.29 | 66.89 | 16.14 | | 150.0 | |
| | | Z | 4.45 | 66.18 | 15.68 | | 150.0 | |
| 10220-CAB | IEEE 802.11n (HT Mixed, 43.3 Mbps, 16-QAM) | X | 4.75 | 66.82 | 16.21 | 0.00 | 150.0 | ± 9.6 % |
| | | Y | 4.50 | 67.06 | 16.31 | | 150.0 | |
| | | Z | 4.68 | 66.44 | 15.84 | | 150.0 | |
| 10221-CAB | IEEE 802.11n (HT Mixed, 72.2 Mbps, 64-QAM) | X | 4.80 | 66.80 | 16.22 | 0.00 | 150.0 | ± 9.6 % |
| | | Y | 4.54 | 67.05 | 16.32 | | 150.0 | |
| | | Z | 4.72 | 66.43 | 15.85 | | 150.0 | |
| 10222-CAB | IEEE 802.11n (HT Mixed, 15 Mbps, BPSK) | X | 5.11 | 67.01 | 16.33 | 0.00 | 150.0 | ± 9.6 % |
| | | Y | 4.91 | 67.12 | 16.44 | | 150.0 | |
| | | Z | 5.04 | 66.66 | 15.99 | | 150.0 | |

EX3DV4--SN:3922

November 15, 2017

| | | | | | | | | |
|-----------|---|---|-------|--------|-------|------|-------|---------|
| 10223-CAB | IEEE 802.11n (HT Mixed, 90 Mbps, 16-QAM) | X | 5.42 | 67.19 | 16.44 | 0.00 | 150.0 | ± 9.6 % |
| | | Y | 5.17 | 67.31 | 16.55 | | 150.0 | |
| | | Z | 5.35 | 66.87 | 16.13 | | 150.0 | |
| 10224-CAB | IEEE 802.11n (HT Mixed, 150 Mbps, 64-QAM) | X | 5.16 | 67.12 | 16.31 | 0.00 | 150.0 | ± 9.6 % |
| | | Y | 4.95 | 67.23 | 16.43 | | 150.0 | |
| | | Z | 5.08 | 66.77 | 15.97 | | 150.0 | |
| 10225-CAB | UMTS-FDD (HSPA+) | X | 2.83 | 65.90 | 15.26 | 0.00 | 150.0 | ± 9.6 % |
| | | Y | 2.64 | 66.43 | 15.06 | | 150.0 | |
| | | Z | 2.73 | 65.11 | 14.56 | | 150.0 | |
| 10226-CAA | LTE-TDD (SC-FDMA, 1 RB, 1.4 MHz, 16-QAM) | X | 63.57 | 123.88 | 36.49 | 6.02 | 65.0 | ± 9.6 % |
| | | Y | 35.48 | 121.38 | 37.00 | | 65.0 | |
| | | Z | 36.12 | 113.06 | 33.42 | | 65.0 | |
| 10227-CAA | LTE-TDD (SC-FDMA, 1 RB, 1.4 MHz, 64-QAM) | X | 51.61 | 117.88 | 34.29 | 6.02 | 65.0 | ± 9.6 % |
| | | Y | 38.44 | 120.37 | 35.86 | | 65.0 | |
| | | Z | 31.38 | 108.65 | 31.57 | | 65.0 | |
| 10228-CAA | LTE-TDD (SC-FDMA, 1 RB, 1.4 MHz, QPSK) | X | 28.51 | 115.16 | 36.33 | 6.02 | 65.0 | ± 9.6 % |
| | | Y | 9.53 | 100.12 | 33.25 | | 65.0 | |
| | | Z | 17.50 | 104.98 | 33.15 | | 65.0 | |
| 10229-CAB | LTE-TDD (SC-FDMA, 1 RB, 3 MHz, 16-QAM) | X | 56.02 | 121.29 | 35.74 | 6.02 | 65.0 | ± 9.6 % |
| | | Y | 31.08 | 118.56 | 36.15 | | 65.0 | |
| | | Z | 32.73 | 111.05 | 32.78 | | 65.0 | |
| 10230-CAB | LTE-TDD (SC-FDMA, 1 RB, 3 MHz, 64-QAM) | X | 46.07 | 115.69 | 33.64 | 6.02 | 65.0 | ± 9.6 % |
| | | Y | 32.82 | 117.30 | 34.98 | | 65.0 | |
| | | Z | 28.59 | 106.87 | 31.00 | | 65.0 | |
| 10231-CAB | LTE-TDD (SC-FDMA, 1 RB, 3 MHz, QPSK) | X | 26.24 | 113.32 | 35.73 | 6.02 | 65.0 | ± 9.6 % |
| | | Y | 9.00 | 98.78 | 32.73 | | 65.0 | |
| | | Z | 16.41 | 103.56 | 32.64 | | 65.0 | |
| 10232-CAD | LTE-TDD (SC-FDMA, 1 RB, 5 MHz, 16-QAM) | X | 56.00 | 121.29 | 35.74 | 6.02 | 65.0 | ± 9.6 % |
| | | Y | 31.03 | 118.56 | 36.15 | | 65.0 | |
| | | Z | 32.69 | 111.04 | 32.78 | | 65.0 | |
| 10233-CAD | LTE-TDD (SC-FDMA, 1 RB, 5 MHz, 64-QAM) | X | 45.99 | 115.67 | 33.63 | 6.02 | 65.0 | ± 9.6 % |
| | | Y | 32.61 | 117.20 | 34.96 | | 65.0 | |
| | | Z | 28.53 | 106.85 | 30.99 | | 65.0 | |
| 10234-CAD | LTE-TDD (SC-FDMA, 1 RB, 5 MHz, QPSK) | X | 24.41 | 111.60 | 35.12 | 6.02 | 65.0 | ± 9.6 % |
| | | Y | 8.65 | 97.77 | 32.27 | | 65.0 | |
| | | Z | 15.51 | 102.25 | 32.12 | | 65.0 | |
| 10235-CAD | LTE-TDD (SC-FDMA, 1 RB, 10 MHz, 16-QAM) | X | 56.25 | 121.39 | 35.77 | 6.02 | 65.0 | ± 9.6 % |
| | | Y | 31.20 | 118.68 | 36.19 | | 65.0 | |
| | | Z | 32.77 | 111.11 | 32.80 | | 65.0 | |
| 10236-CAD | LTE-TDD (SC-FDMA, 1 RB, 10 MHz, 64-QAM) | X | 46.86 | 115.97 | 33.70 | 6.02 | 65.0 | ± 9.6 % |
| | | Y | 33.64 | 117.72 | 35.08 | | 65.0 | |
| | | Z | 28.97 | 107.08 | 31.05 | | 65.0 | |
| 10237-CAD | LTE-TDD (SC-FDMA, 1 RB, 10 MHz, QPSK) | X | 26.45 | 113.52 | 35.78 | 6.02 | 65.0 | ± 9.6 % |
| | | Y | 9.02 | 98.88 | 32.77 | | 65.0 | |
| | | Z | 16.48 | 103.69 | 32.68 | | 65.0 | |
| 10238-CAD | LTE-TDD (SC-FDMA, 1 RB, 15 MHz, 16-QAM) | X | 55.98 | 121.30 | 35.74 | 6.02 | 65.0 | ± 9.6 % |
| | | Y | 30.98 | 118.55 | 36.15 | | 65.0 | |
| | | Z | 32.64 | 111.03 | 32.77 | | 65.0 | |

EX3DV4- SN:3922

November 15, 2017

| | | | | | | | | |
|-----------|--|---|-------|--------|-------|------|------|---------|
| 10239-CAD | LTE-TDD (SC-FDMA, 1 RB, 15 MHz, 64-QAM) | X | 45.90 | 115.66 | 33.63 | 6.02 | 65.0 | ± 9.6 % |
| | | Y | 32.42 | 117.13 | 34.95 | | 65.0 | |
| | | Z | 28.45 | 106.82 | 30.99 | | 65.0 | |
| 10240-CAD | LTE-TDD (SC-FDMA, 1 RB, 15 MHz, QPSK) | X | 26.33 | 113.44 | 35.76 | 6.02 | 65.0 | ± 9.6 % |
| | | Y | 9.00 | 98.85 | 32.76 | | 65.0 | |
| | | Z | 16.42 | 103.62 | 32.66 | | 65.0 | |
| 10241-CAA | LTE-TDD (SC-FDMA, 50% RB, 1.4 MHz, 16-QAM) | X | 10.07 | 84.89 | 27.17 | 6.98 | 65.0 | ± 9.6 % |
| | | Y | 8.48 | 85.82 | 27.97 | | 65.0 | |
| | | Z | 9.42 | 83.49 | 26.49 | | 65.0 | |
| 10242-CAA | LTE-TDD (SC-FDMA, 50% RB, 1.4 MHz, 64-QAM) | X | 9.62 | 83.89 | 26.70 | 6.98 | 65.0 | ± 9.6 % |
| | | Y | 8.07 | 84.80 | 27.50 | | 65.0 | |
| | | Z | 8.78 | 81.98 | 25.82 | | 65.0 | |
| 10243-CAA | LTE-TDD (SC-FDMA, 50% RB, 1.4 MHz, QPSK) | X | 7.49 | 79.90 | 26.00 | 6.98 | 65.0 | ± 9.6 % |
| | | Y | 6.06 | 79.30 | 26.24 | | 65.0 | |
| | | Z | 6.89 | 78.08 | 25.09 | | 65.0 | |
| 10244-CAB | LTE-TDD (SC-FDMA, 50% RB, 3 MHz, 16-QAM) | X | 9.99 | 83.65 | 22.16 | 3.98 | 65.0 | ± 9.6 % |
| | | Y | 5.92 | 76.90 | 18.09 | | 65.0 | |
| | | Z | 8.32 | 80.61 | 20.83 | | 65.0 | |
| 10245-CAB | LTE-TDD (SC-FDMA, 50% RB, 3 MHz, 64-QAM) | X | 9.55 | 82.63 | 21.73 | 3.98 | 65.0 | ± 9.6 % |
| | | Y | 5.48 | 75.50 | 17.46 | | 65.0 | |
| | | Z | 8.04 | 79.78 | 20.46 | | 65.0 | |
| 10246-CAB | LTE-TDD (SC-FDMA, 50% RB, 3 MHz, QPSK) | X | 10.75 | 87.85 | 23.54 | 3.98 | 65.0 | ± 9.6 % |
| | | Y | 7.46 | 84.12 | 21.21 | | 65.0 | |
| | | Z | 7.49 | 81.97 | 21.23 | | 65.0 | |
| 10247-CAD | LTE-TDD (SC-FDMA, 50% RB, 5 MHz, 16-QAM) | X | 7.05 | 78.53 | 20.82 | 3.98 | 65.0 | ± 9.6 % |
| | | Y | 5.10 | 75.52 | 18.72 | | 65.0 | |
| | | Z | 6.05 | 75.99 | 19.59 | | 65.0 | |
| 10248-CAD | LTE-TDD (SC-FDMA, 50% RB, 5 MHz, 64-QAM) | X | 6.88 | 77.62 | 20.43 | 3.98 | 65.0 | ± 9.6 % |
| | | Y | 4.87 | 74.30 | 18.18 | | 65.0 | |
| | | Z | 6.00 | 75.32 | 19.29 | | 65.0 | |
| 10249-CAD | LTE-TDD (SC-FDMA, 50% RB, 5 MHz, QPSK) | X | 12.17 | 90.46 | 25.25 | 3.98 | 65.0 | ± 9.6 % |
| | | Y | 11.28 | 92.21 | 25.40 | | 65.0 | |
| | | Z | 8.74 | 84.78 | 23.07 | | 65.0 | |
| 10250-CAD | LTE-TDD (SC-FDMA, 50% RB, 10 MHz, 16-QAM) | X | 7.83 | 80.37 | 23.01 | 3.98 | 65.0 | ± 9.6 % |
| | | Y | 6.20 | 79.06 | 22.43 | | 65.0 | |
| | | Z | 6.92 | 78.10 | 21.92 | | 65.0 | |
| 10251-CAD | LTE-TDD (SC-FDMA, 50% RB, 10 MHz, 64-QAM) | X | 7.19 | 77.51 | 21.51 | 3.98 | 65.0 | ± 9.6 % |
| | | Y | 5.63 | 75.97 | 20.72 | | 65.0 | |
| | | Z | 6.50 | 75.72 | 20.60 | | 65.0 | |
| 10252-CAD | LTE-TDD (SC-FDMA, 50% RB, 10 MHz, QPSK) | X | 10.60 | 87.58 | 25.11 | 3.98 | 65.0 | ± 9.6 % |
| | | Y | 9.46 | 89.47 | 26.06 | | 65.0 | |
| | | Z | 8.47 | 83.54 | 23.47 | | 65.0 | |
| 10253-CAD | LTE-TDD (SC-FDMA, 50% RB, 15 MHz, 16-QAM) | X | 7.03 | 76.14 | 21.26 | 3.98 | 65.0 | ± 9.6 % |
| | | Y | 5.67 | 74.89 | 20.81 | | 65.0 | |
| | | Z | 6.47 | 74.67 | 20.48 | | 65.0 | |
| 10254-CAD | LTE-TDD (SC-FDMA, 50% RB, 15 MHz, 64-QAM) | X | 7.44 | 77.09 | 21.97 | 3.98 | 65.0 | ± 9.6 % |
| | | Y | 6.03 | 75.88 | 21.53 | | 65.0 | |
| | | Z | 6.86 | 75.60 | 21.19 | | 65.0 | |

EX3DV4--SN:3922

November 15, 2017

| | | | | | | | | |
|-----------|---|---|-------|-------|-------|------|------|---------|
| 10255-CAD | LTE-TDD (SC-FDMA, 50% RB, 15 MHz, QPSK) | X | 8.54 | 81.84 | 23.25 | 3.98 | 65.0 | ± 9.6 % |
| | | Y | 7.24 | 82.29 | 23.80 | | 65.0 | |
| | | Z | 7.45 | 79.36 | 22.12 | | 65.0 | |
| 10256-CAA | LTE-TDD (SC-FDMA, 100% RB, 1.4 MHz, 16-QAM) | X | 8.24 | 79.99 | 19.83 | 3.98 | 65.0 | ± 9.6 % |
| | | Y | 3.52 | 69.17 | 13.46 | | 65.0 | |
| | | Z | 6.74 | 76.91 | 18.43 | | 65.0 | |
| 10257-CAA | LTE-TDD (SC-FDMA, 100% RB, 1.4 MHz, 64-QAM) | X | 7.70 | 78.55 | 19.18 | 3.98 | 65.0 | ± 9.6 % |
| | | Y | 3.29 | 67.96 | 12.77 | | 65.0 | |
| | | Z | 6.41 | 75.78 | 17.88 | | 65.0 | |
| 10258-CAA | LTE-TDD (SC-FDMA, 100% RB, 1.4 MHz, QPSK) | X | 8.06 | 82.58 | 20.92 | 3.98 | 65.0 | ± 9.6 % |
| | | Y | 3.74 | 73.03 | 15.71 | | 65.0 | |
| | | Z | 5.75 | 77.43 | 18.76 | | 65.0 | |
| 10259-CAB | LTE-TDD (SC-FDMA, 100% RB, 3 MHz, 16-QAM) | X | 7.35 | 79.15 | 21.58 | 3.98 | 65.0 | ± 9.6 % |
| | | Y | 5.61 | 77.14 | 20.18 | | 65.0 | |
| | | Z | 6.39 | 76.75 | 20.41 | | 65.0 | |
| 10260-CAB | LTE-TDD (SC-FDMA, 100% RB, 3 MHz, 64-QAM) | X | 7.30 | 78.71 | 21.41 | 3.98 | 65.0 | ± 9.6 % |
| | | Y | 5.54 | 76.53 | 19.91 | | 65.0 | |
| | | Z | 6.40 | 76.43 | 20.30 | | 65.0 | |
| 10261-CAB | LTE-TDD (SC-FDMA, 100% RB, 3 MHz, QPSK) | X | 10.52 | 87.84 | 24.75 | 3.98 | 65.0 | ± 9.6 % |
| | | Y | 9.43 | 89.34 | 25.09 | | 65.0 | |
| | | Z | 8.09 | 83.22 | 22.89 | | 65.0 | |
| 10262-CAD | LTE-TDD (SC-FDMA, 100% RB, 5 MHz, 16-QAM) | X | 7.81 | 80.31 | 22.96 | 3.98 | 65.0 | ± 9.6 % |
| | | Y | 6.18 | 78.97 | 22.37 | | 65.0 | |
| | | Z | 6.91 | 78.04 | 21.88 | | 65.0 | |
| 10263-CAD | LTE-TDD (SC-FDMA, 100% RB, 5 MHz, 64-QAM) | X | 7.18 | 77.49 | 21.51 | 3.98 | 65.0 | ± 9.6 % |
| | | Y | 5.62 | 75.94 | 20.71 | | 65.0 | |
| | | Z | 6.49 | 75.70 | 20.59 | | 65.0 | |
| 10264-CAD | LTE-TDD (SC-FDMA, 100% RB, 5 MHz, QPSK) | X | 10.47 | 87.33 | 25.00 | 3.98 | 65.0 | ± 9.6 % |
| | | Y | 9.30 | 89.13 | 25.91 | | 65.0 | |
| | | Z | 8.38 | 83.33 | 23.37 | | 65.0 | |
| 10265-CAD | LTE-TDD (SC-FDMA, 100% RB, 10 MHz, 16-QAM) | X | 7.24 | 76.84 | 21.54 | 3.98 | 65.0 | ± 9.6 % |
| | | Y | 5.77 | 75.38 | 21.12 | | 65.0 | |
| | | Z | 6.64 | 75.29 | 20.73 | | 65.0 | |
| 10266-CAD | LTE-TDD (SC-FDMA, 100% RB, 10 MHz, 64-QAM) | X | 7.68 | 77.82 | 22.30 | 3.98 | 65.0 | ± 9.6 % |
| | | Y | 6.19 | 76.50 | 21.96 | | 65.0 | |
| | | Z | 7.06 | 76.26 | 21.50 | | 65.0 | |
| 10267-CAD | LTE-TDD (SC-FDMA, 100% RB, 10 MHz, QPSK) | X | 9.08 | 82.67 | 23.32 | 3.98 | 65.0 | ± 9.6 % |
| | | Y | 7.74 | 83.27 | 24.00 | | 65.0 | |
| | | Z | 7.85 | 80.06 | 22.15 | | 65.0 | |
| 10268-CAD | LTE-TDD (SC-FDMA, 100% RB, 15 MHz, 16-QAM) | X | 7.73 | 76.25 | 21.66 | 3.98 | 65.0 | ± 9.6 % |
| | | Y | 6.29 | 74.83 | 21.35 | | 65.0 | |
| | | Z | 7.22 | 75.02 | 21.00 | | 65.0 | |
| 10269-CAD | LTE-TDD (SC-FDMA, 100% RB, 15 MHz, 64-QAM) | X | 7.63 | 75.72 | 21.50 | 3.98 | 65.0 | ± 9.6 % |
| | | Y | 6.26 | 74.33 | 21.17 | | 65.0 | |
| | | Z | 7.17 | 74.56 | 20.87 | | 65.0 | |
| 10270-CAD | LTE-TDD (SC-FDMA, 100% RB, 15 MHz, QPSK) | X | 8.16 | 78.72 | 21.94 | 3.98 | 65.0 | ± 9.6 % |
| | | Y | 6.83 | 78.36 | 22.23 | | 65.0 | |
| | | Z | 7.42 | 77.03 | 21.11 | | 65.0 | |

EX3DV4- SN:3922

November 15, 2017

| | | | | | | | | |
|-----------|--|---|-------|--------|-------|------|-------|---------|
| 10274-CAB | UMTS-FDD (HSUPA, Subtest 5, 3GPP Rel8.10) | X | 2.59 | 66.15 | 15.11 | 0.00 | 150.0 | ± 9.6 % |
| | | Y | 2.50 | 67.14 | 15.17 | | 150.0 | |
| | | Z | 2.47 | 65.19 | 14.30 | | 150.0 | |
| 10275-CAB | UMTS-FDD (HSUPA, Subtest 5, 3GPP Rel8.4) | X | 1.59 | 67.24 | 15.20 | 0.00 | 150.0 | ± 9.6 % |
| | | Y | 1.59 | 68.96 | 15.86 | | 150.0 | |
| | | Z | 1.41 | 65.03 | 13.61 | | 150.0 | |
| 10277-CAA | PHS (QPSK) | X | 2.88 | 63.88 | 9.19 | 9.03 | 50.0 | ± 9.6 % |
| | | Y | 1.50 | 60.00 | 5.26 | | 50.0 | |
| | | Z | 2.57 | 63.07 | 8.53 | | 50.0 | |
| 10278-CAA | PHS (QPSK, BW 884MHz, Rolloff 0.5) | X | 13.64 | 88.52 | 22.50 | 9.03 | 50.0 | ± 9.6 % |
| | | Y | 3.82 | 70.53 | 13.60 | | 50.0 | |
| | | Z | 9.48 | 83.22 | 20.46 | | 50.0 | |
| 10279-CAA | PHS (QPSK, BW 884MHz, Rolloff 0.38) | X | 13.81 | 88.65 | 22.60 | 9.03 | 50.0 | ± 9.6 % |
| | | Y | 3.97 | 70.94 | 13.86 | | 50.0 | |
| | | Z | 9.68 | 83.45 | 20.60 | | 50.0 | |
| 10290-AAB | CDMA2000, RC1, SO55, Full Rate | X | 1.45 | 68.11 | 13.95 | 0.00 | 150.0 | ± 9.6 % |
| | | Y | 1.04 | 66.23 | 11.42 | | 150.0 | |
| | | Z | 1.16 | 64.74 | 11.79 | | 150.0 | |
| 10291-AAB | CDMA2000, RC3, SO55, Full Rate | X | 0.83 | 65.20 | 12.40 | 0.00 | 150.0 | ± 9.6 % |
| | | Y | 0.64 | 64.34 | 10.30 | | 150.0 | |
| | | Z | 0.69 | 62.48 | 10.33 | | 150.0 | |
| 10292-AAB | CDMA2000, RC3, SO32, Full Rate | X | 1.00 | 68.65 | 14.50 | 0.00 | 150.0 | ± 9.6 % |
| | | Y | 1.04 | 70.68 | 13.62 | | 150.0 | |
| | | Z | 0.74 | 63.90 | 11.44 | | 150.0 | |
| 10293-AAB | CDMA2000, RC3, SO3, Full Rate | X | 1.42 | 73.67 | 17.19 | 0.00 | 150.0 | ± 9.6 % |
| | | Y | 4.51 | 88.63 | 20.36 | | 150.0 | |
| | | Z | 0.87 | 65.86 | 12.87 | | 150.0 | |
| 10295-AAB | CDMA2000, RC1, SO3, 1/8th Rate 25 fr. | X | 13.04 | 92.10 | 27.12 | 9.03 | 50.0 | ± 9.6 % |
| | | Y | 89.47 | 123.70 | 34.18 | | 50.0 | |
| | | Z | 10.40 | 88.04 | 25.54 | | 50.0 | |
| 10297-AAC | LTE-FDD (SC-FDMA, 50% RB, 20 MHz, QPSK) | X | 2.75 | 69.26 | 16.34 | 0.00 | 150.0 | ± 9.6 % |
| | | Y | 2.62 | 70.06 | 16.86 | | 150.0 | |
| | | Z | 2.50 | 67.45 | 15.14 | | 150.0 | |
| 10298-AAC | LTE-FDD (SC-FDMA, 50% RB, 3 MHz, QPSK) | X | 1.59 | 67.33 | 14.16 | 0.00 | 150.0 | ± 9.6 % |
| | | Y | 1.21 | 65.83 | 12.02 | | 150.0 | |
| | | Z | 1.36 | 64.73 | 12.38 | | 150.0 | |
| 10299-AAC | LTE-FDD (SC-FDMA, 50% RB, 3 MHz, 16-QAM) | X | 3.25 | 72.49 | 16.21 | 0.00 | 150.0 | ± 9.6 % |
| | | Y | 1.86 | 66.60 | 11.67 | | 150.0 | |
| | | Z | 2.67 | 69.25 | 14.40 | | 150.0 | |
| 10300-AAC | LTE-FDD (SC-FDMA, 50% RB, 3 MHz, 64-QAM) | X | 2.29 | 66.76 | 12.86 | 0.00 | 150.0 | ± 9.6 % |
| | | Y | 1.34 | 62.41 | 8.77 | | 150.0 | |
| | | Z | 2.09 | 65.32 | 11.82 | | 150.0 | |
| 10301-AAA | IEEE 802.16e WiMAX (29:18, 5ms, 10MHz, QPSK, PUSC) | X | 4.98 | 65.86 | 17.65 | 4.17 | 50.0 | ± 9.6 % |
| | | Y | 4.63 | 66.36 | 17.72 | | 50.0 | |
| | | Z | 4.82 | 65.17 | 17.13 | | 50.0 | |
| 10302-AAA | IEEE 802.16e WiMAX (29:18, 5ms, 10MHz, QPSK, PUSC, 3 CTRL symbols) | X | 5.45 | 66.44 | 18.35 | 4.96 | 50.0 | ± 9.6 % |
| | | Y | 5.06 | 66.66 | 18.26 | | 50.0 | |
| | | Z | 5.34 | 65.98 | 17.96 | | 50.0 | |

EX3DV4--SN:3922

November 15, 2017

| | | | | | | | | |
|-----------|---|---|-------|--------|-------|-------|-------|---------|
| 10303-AAA | IEEE 802.16e WiMAX (31:15, 5ms, 10MHz, 64QAM, PUSC) | X | 5.22 | 66.18 | 18.24 | 4.96 | 50.0 | ± 9.6 % |
| | | Y | 4.81 | 66.31 | 18.06 | | 50.0 | |
| | | Z | 5.11 | 65.69 | 17.82 | | 50.0 | |
| 10304-AAA | IEEE 802.16e WiMAX (29:18, 5ms, 10MHz, 64QAM, PUSC) | X | 5.00 | 65.94 | 17.66 | 4.17 | 50.0 | ± 9.6 % |
| | | Y | 4.64 | 66.23 | 17.57 | | 50.0 | |
| | | Z | 4.89 | 65.44 | 17.24 | | 50.0 | |
| 10305-AAA | IEEE 802.16e WiMAX (31:15, 10ms, 10MHz, 64QAM, PUSC, 15 symbols) | X | 4.85 | 68.97 | 20.43 | 6.02 | 35.0 | ± 9.6 % |
| | | Y | 4.24 | 68.22 | 19.36 | | 35.0 | |
| | | Z | 4.63 | 67.91 | 19.70 | | 35.0 | |
| 10306-AAA | IEEE 802.16e WiMAX (29:18, 10ms, 10MHz, 64QAM, PUSC, 18 symbols) | X | 5.05 | 67.46 | 19.74 | 6.02 | 35.0 | ± 9.6 % |
| | | Y | 4.55 | 67.22 | 19.12 | | 35.0 | |
| | | Z | 4.90 | 66.76 | 19.19 | | 35.0 | |
| 10307-AAA | IEEE 802.16e WiMAX (29:18, 10ms, 10MHz, QPSK, PUSC, 18 symbols) | X | 4.98 | 67.80 | 19.78 | 6.02 | 35.0 | ± 9.6 % |
| | | Y | 4.43 | 67.25 | 19.02 | | 35.0 | |
| | | Z | 4.82 | 67.00 | 19.19 | | 35.0 | |
| 10308-AAA | IEEE 802.16e WiMAX (29:18, 10ms, 10MHz, 16QAM, PUSC) | X | 4.97 | 68.02 | 19.93 | 6.02 | 35.0 | ± 9.6 % |
| | | Y | 4.41 | 67.51 | 19.19 | | 35.0 | |
| | | Z | 4.79 | 67.20 | 19.32 | | 35.0 | |
| 10309-AAA | IEEE 802.16e WiMAX (29:18, 10ms, 10MHz, 16QAM, AMC 2x3, 18 symbols) | X | 5.12 | 67.73 | 19.90 | 6.02 | 35.0 | ± 9.6 % |
| | | Y | 4.57 | 67.33 | 19.23 | | 35.0 | |
| | | Z | 4.97 | 67.01 | 19.35 | | 35.0 | |
| 10310-AAA | IEEE 802.16e WiMAX (29:18, 10ms, 10MHz, QPSK, AMC 2x3, 18 symbols) | X | 5.01 | 67.57 | 19.73 | 6.02 | 35.0 | ± 9.6 % |
| | | Y | 4.50 | 67.29 | 19.11 | | 35.0 | |
| | | Z | 4.85 | 66.84 | 19.17 | | 35.0 | |
| 10311-AAC | LTE-FDD (SC-FDMA, 100% RB, 15 MHz, QPSK) | X | 3.10 | 68.61 | 16.02 | 0.00 | 150.0 | ± 9.6 % |
| | | Y | 2.98 | 69.21 | 16.47 | | 150.0 | |
| | | Z | 2.83 | 66.90 | 14.91 | | 150.0 | |
| 10313-AAA | iDEN 1:3 | X | 9.28 | 84.22 | 20.34 | 6.99 | 70.0 | ± 9.6 % |
| | | Y | 9.97 | 89.26 | 22.12 | | 70.0 | |
| | | Z | 5.73 | 77.83 | 17.93 | | 70.0 | |
| 10314-AAA | iDEN 1:6 | X | 20.75 | 102.60 | 29.12 | 10.00 | 30.0 | ± 9.6 % |
| | | Y | 21.78 | 109.37 | 31.63 | | 30.0 | |
| | | Z | 8.22 | 87.81 | 24.52 | | 30.0 | |
| 10315-AAB | IEEE 802.11b WiFi 2.4 GHz (DSSS, 1 Mbps, 96pc duty cycle) | X | 1.11 | 63.72 | 15.07 | 0.17 | 150.0 | ± 9.6 % |
| | | Y | 1.07 | 64.37 | 15.57 | | 150.0 | |
| | | Z | 1.04 | 62.32 | 13.71 | | 150.0 | |
| 10316-AAB | IEEE 802.11g WiFi 2.4 GHz (ERP-OFDM, 6 Mbps, 96pc duty cycle) | X | 4.64 | 66.61 | 16.27 | 0.17 | 150.0 | ± 9.6 % |
| | | Y | 4.40 | 66.89 | 16.37 | | 150.0 | |
| | | Z | 4.57 | 66.24 | 15.90 | | 150.0 | |
| 10317-AAB | IEEE 802.11a WiFi 5 GHz (OFDM, 6 Mbps, 96pc duty cycle) | X | 4.64 | 66.61 | 16.27 | 0.17 | 150.0 | ± 9.6 % |
| | | Y | 4.40 | 66.89 | 16.37 | | 150.0 | |
| | | Z | 4.57 | 66.24 | 15.90 | | 150.0 | |
| 10400-AAC | IEEE 802.11ac WiFi (20MHz, 64-QAM, 99pc duty cycle) | X | 4.74 | 66.87 | 16.19 | 0.00 | 150.0 | ± 9.6 % |
| | | Y | 4.46 | 67.12 | 16.30 | | 150.0 | |
| | | Z | 4.66 | 66.49 | 15.82 | | 150.0 | |
| 10401-AAC | IEEE 802.11ac WiFi (40MHz, 64-QAM, 99pc duty cycle) | X | 5.42 | 67.04 | 16.34 | 0.00 | 150.0 | ± 9.6 % |
| | | Y | 5.12 | 66.91 | 16.31 | | 150.0 | |
| | | Z | 5.35 | 66.74 | 16.04 | | 150.0 | |

EX3DV4- SN:3922

November 15, 2017

| | | | | | | | | |
|-----------|--|---|--------|--------|-------|------|-------|---------|
| 10402-AAC | IEEE 802.11ac WiFi (80MHz, 64-QAM, 99pc duty cycle) | X | 5.69 | 67.43 | 16.39 | 0.00 | 150.0 | ± 9.6 % |
| | | Y | 5.46 | 67.44 | 16.46 | | 150.0 | |
| | | Z | 5.61 | 67.12 | 16.09 | | 150.0 | |
| 10403-AAB | CDMA2000 (1xEV-DO, Rev. 0) | X | 1.45 | 68.11 | 13.95 | 0.00 | 115.0 | ± 9.6 % |
| | | Y | 1.04 | 66.23 | 11.42 | | 115.0 | |
| | | Z | 1.16 | 64.74 | 11.79 | | 115.0 | |
| 10404-AAB | CDMA2000 (1xEV-DO, Rev. A) | X | 1.45 | 68.11 | 13.95 | 0.00 | 115.0 | ± 9.6 % |
| | | Y | 1.04 | 66.23 | 11.42 | | 115.0 | |
| | | Z | 1.16 | 64.74 | 11.79 | | 115.0 | |
| 10406-AAB | CDMA2000, RC3, SO32, SCH0, Full Rate | X | 93.39 | 124.85 | 32.36 | 0.00 | 100.0 | ± 9.6 % |
| | | Y | 100.00 | 121.95 | 29.73 | | 100.0 | |
| | | Z | 15.83 | 96.62 | 24.47 | | 100.0 | |
| 10410-AAC | LTE-TDD (SC-FDMA, 1 RB, 10 MHz, QPSK, UL Subframe=2,3,4,7,8,9) | X | 100.00 | 125.09 | 32.32 | 3.23 | 80.0 | ± 9.6 % |
| | | Y | 100.00 | 132.61 | 34.49 | | 80.0 | |
| | | Z | 100.00 | 123.35 | 31.39 | | 80.0 | |
| 10415-AAA | IEEE 802.11b WiFi 2.4 GHz (DSSS, 1 Mbps, 99pc duty cycle) | X | 1.01 | 62.61 | 14.33 | 0.00 | 150.0 | ± 9.6 % |
| | | Y | 0.99 | 63.47 | 14.91 | | 150.0 | |
| | | Z | 0.96 | 61.45 | 13.07 | | 150.0 | |
| 10416-AAA | IEEE 802.11g WiFi 2.4 GHz (ERP-OFDM, 6 Mbps, 99pc duty cycle) | X | 4.57 | 66.53 | 16.14 | 0.00 | 150.0 | ± 9.6 % |
| | | Y | 4.35 | 66.84 | 16.25 | | 150.0 | |
| | | Z | 4.50 | 66.15 | 15.77 | | 150.0 | |
| 10417-AAA | IEEE 802.11a/h WiFi 5 GHz (OFDM, 6 Mbps, 99pc duty cycle) | X | 4.57 | 66.53 | 16.14 | 0.00 | 150.0 | ± 9.6 % |
| | | Y | 4.35 | 66.84 | 16.25 | | 150.0 | |
| | | Z | 4.50 | 66.15 | 15.77 | | 150.0 | |
| 10418-AAA | IEEE 802.11g WiFi 2.4 GHz (DSSS-OFDM, 6 Mbps, 99pc duty cycle, Long preamble) | X | 4.56 | 66.67 | 16.15 | 0.00 | 150.0 | ± 9.6 % |
| | | Y | 4.35 | 67.06 | 16.31 | | 150.0 | |
| | | Z | 4.48 | 66.28 | 15.77 | | 150.0 | |
| 10419-AAA | IEEE 802.11g WiFi 2.4 GHz (DSSS-OFDM, 6 Mbps, 99pc duty cycle, Short preamble) | X | 4.58 | 66.63 | 16.16 | 0.00 | 150.0 | ± 9.6 % |
| | | Y | 4.36 | 66.98 | 16.29 | | 150.0 | |
| | | Z | 4.50 | 66.25 | 15.78 | | 150.0 | |
| 10422-AAA | IEEE 802.11n (HT Greenfield, 7.2 Mbps, BPSK) | X | 4.70 | 66.64 | 16.17 | 0.00 | 150.0 | ± 9.6 % |
| | | Y | 4.47 | 66.95 | 16.30 | | 150.0 | |
| | | Z | 4.63 | 66.27 | 15.81 | | 150.0 | |
| 10423-AAA | IEEE 802.11n (HT Greenfield, 43.3 Mbps, 16-QAM) | X | 4.88 | 66.97 | 16.30 | 0.00 | 150.0 | ± 9.6 % |
| | | Y | 4.59 | 67.21 | 16.39 | | 150.0 | |
| | | Z | 4.80 | 66.60 | 15.93 | | 150.0 | |
| 10424-AAA | IEEE 802.11n (HT Greenfield, 72.2 Mbps, 64-QAM) | X | 4.79 | 66.92 | 16.27 | 0.00 | 150.0 | ± 9.6 % |
| | | Y | 4.53 | 67.17 | 16.37 | | 150.0 | |
| | | Z | 4.71 | 66.54 | 15.90 | | 150.0 | |
| 10425-AAA | IEEE 802.11n (HT Greenfield, 15 Mbps, BPSK) | X | 5.38 | 67.25 | 16.44 | 0.00 | 150.0 | ± 9.6 % |
| | | Y | 5.14 | 67.33 | 16.54 | | 150.0 | |
| | | Z | 5.31 | 66.92 | 16.12 | | 150.0 | |
| 10426-AAA | IEEE 802.11n (HT Greenfield, 90 Mbps, 16-QAM) | X | 5.39 | 67.25 | 16.44 | 0.00 | 150.0 | ± 9.6 % |
| | | Y | 5.16 | 67.42 | 16.58 | | 150.0 | |
| | | Z | 5.31 | 66.92 | 16.12 | | 150.0 | |

EX3DV4- SN:3922

November 15, 2017

| | | | | | | | | |
|-----------|--|---|--------|--------|-------|------|-------|---------|
| 10427-AAA | IEEE 802.11n (HT Greenfield, 150 Mbps, 64-QAM) | X | 5.40 | 67.24 | 16.44 | 0.00 | 150.0 | ± 9.6 % |
| | | Y | 5.12 | 67.21 | 16.47 | | 150.0 | |
| | | Z | 5.33 | 66.92 | 16.12 | | 150.0 | |
| 10430-AAB | LTE-FDD (OFDMA, 5 MHz, E-TM 3.1) | X | 4.28 | 70.44 | 18.07 | 0.00 | 150.0 | ± 9.6 % |
| | | Y | 4.14 | 71.87 | 18.16 | | 150.0 | |
| | | Z | 4.07 | 69.38 | 17.29 | | 150.0 | |
| 10431-AAB | LTE-FDD (OFDMA, 10 MHz, E-TM 3.1) | X | 4.26 | 67.04 | 16.14 | 0.00 | 150.0 | ± 9.6 % |
| | | Y | 3.97 | 67.47 | 16.15 | | 150.0 | |
| | | Z | 4.16 | 66.54 | 15.88 | | 150.0 | |
| 10432-AAB | LTE-FDD (OFDMA, 15 MHz, E-TM 3.1) | X | 4.56 | 66.94 | 16.21 | 0.00 | 150.0 | ± 9.6 % |
| | | Y | 4.29 | 67.28 | 16.30 | | 150.0 | |
| | | Z | 4.47 | 66.52 | 15.81 | | 150.0 | |
| 10433-AAB | LTE-FDD (OFDMA, 20 MHz, E-TM 3.1) | X | 4.81 | 66.95 | 16.29 | 0.00 | 150.0 | ± 9.6 % |
| | | Y | 4.54 | 67.20 | 16.39 | | 150.0 | |
| | | Z | 4.73 | 66.57 | 15.92 | | 150.0 | |
| 10434-AAA | W-CDMA (BS Test Model 1, 64 DPCH) | X | 4.37 | 71.26 | 18.05 | 0.00 | 150.0 | ± 9.6 % |
| | | Y | 4.23 | 72.71 | 17.94 | | 150.0 | |
| | | Z | 4.10 | 69.95 | 17.16 | | 150.0 | |
| 10435-AAC | LTE-TDD (SC-FDMA, 1 RB, 20 MHz, QPSK, UL Subframe=2,3,4,7,8,9) | X | 100.00 | 124.88 | 32.22 | 3.23 | 80.0 | ± 9.6 % |
| | | Y | 100.00 | 132.33 | 34.36 | | 80.0 | |
| | | Z | 100.00 | 123.15 | 31.29 | | 80.0 | |
| 10447-AAB | LTE-FDD (OFDMA, 5 MHz, E-TM 3.1, Clipping 44%) | X | 3.55 | 67.01 | 15.50 | 0.00 | 150.0 | ± 9.6 % |
| | | Y | 3.22 | 67.33 | 15.04 | | 150.0 | |
| | | Z | 3.42 | 66.26 | 14.87 | | 150.0 | |
| 10448-AAB | LTE-FDD (OFDMA, 10 MHz, E-TM 3.1, Clipping 44%) | X | 4.09 | 66.82 | 16.00 | 0.00 | 150.0 | ± 9.6 % |
| | | Y | 3.84 | 67.27 | 16.03 | | 150.0 | |
| | | Z | 4.00 | 66.30 | 15.52 | | 150.0 | |
| 10449-AAB | LTE-FDD (OFDMA, 15 MHz, E-TM 3.1, Clipping 44%) | X | 4.36 | 66.77 | 16.11 | 0.00 | 150.0 | ± 9.6 % |
| | | Y | 4.13 | 67.11 | 16.20 | | 150.0 | |
| | | Z | 4.28 | 66.32 | 15.69 | | 150.0 | |
| 10450-AAB | LTE-FDD (OFDMA, 20 MHz, E-TM 3.1, Clipping 44%) | X | 4.56 | 66.71 | 16.14 | 0.00 | 150.0 | ± 9.6 % |
| | | Y | 4.34 | 66.98 | 16.25 | | 150.0 | |
| | | Z | 4.48 | 66.31 | 15.75 | | 150.0 | |
| 10451-AAA | W-CDMA (BS Test Model 1, 64 DPCH, Clipping 44%) | X | 3.45 | 67.20 | 15.16 | 0.00 | 150.0 | ± 9.6 % |
| | | Y | 3.02 | 67.10 | 14.30 | | 150.0 | |
| | | Z | 3.30 | 66.32 | 14.46 | | 150.0 | |
| 10456-AAA | IEEE 802.11ac WiFi (160MHz, 64-QAM, 99pc duty cycle) | X | 6.24 | 67.82 | 16.61 | 0.00 | 150.0 | ± 9.6 % |
| | | Y | 6.06 | 67.84 | 16.69 | | 150.0 | |
| | | Z | 6.17 | 67.55 | 16.33 | | 150.0 | |
| 10457-AAA | UMTS-FDD (DC-HSDPA) | X | 3.81 | 65.16 | 15.84 | 0.00 | 150.0 | ± 9.6 % |
| | | Y | 3.70 | 65.58 | 15.98 | | 150.0 | |
| | | Z | 3.75 | 64.81 | 15.45 | | 150.0 | |
| 10458-AAB | CDMA2000 (1xEV-DO, Rev. B, 2 carriers) | X | 4.00 | 70.43 | 17.44 | 0.00 | 150.0 | ± 9.6 % |
| | | Y | 3.69 | 71.08 | 16.66 | | 150.0 | |
| | | Z | 3.75 | 69.12 | 16.52 | | 150.0 | |
| 10459-AAA | CDMA2000 (1xEV-DO, Rev. B, 3 carriers) | X | 5.12 | 68.09 | 18.07 | 0.00 | 150.0 | ± 9.6 % |
| | | Y | 4.73 | 68.62 | 17.62 | | 150.0 | |
| | | Z | 4.97 | 67.45 | 17.56 | | 150.0 | |

EX3DV4- SN:3922

November 15, 2017

| | | | | | | | | |
|-----------|---|---|--------|--------|-------|------|-------|---------|
| 10460-AAA | UMTS-FDD (WCDMA, AMR) | X | 0.86 | 66.87 | 15.37 | 0.00 | 150.0 | ± 9.6 % |
| | | Y | 0.95 | 70.33 | 17.05 | | 150.0 | |
| | | Z | 0.72 | 63.56 | 12.85 | | 150.0 | |
| 10461-AAA | LTE-TDD (SC-FDMA, 1 RB, 1.4 MHz, QPSK, UL Subframe=2,3,4,7,8,9) | X | 100.00 | 130.48 | 34.84 | 3.29 | 80.0 | ± 9.6 % |
| | | Y | 100.00 | 140.16 | 37.94 | | 80.0 | |
| | | Z | 100.00 | 127.51 | 33.38 | | 80.0 | |
| 10462-AAA | LTE-TDD (SC-FDMA, 1 RB, 1.4 MHz, 16-QAM, UL Subframe=2,3,4,7,8,9) | X | 100.00 | 112.24 | 26.23 | 3.23 | 80.0 | ± 9.6 % |
| | | Y | 100.00 | 110.13 | 24.11 | | 80.0 | |
| | | Z | 67.10 | 104.99 | 23.84 | | 80.0 | |
| 10463-AAA | LTE-TDD (SC-FDMA, 1 RB, 1.4 MHz, 64-QAM, UL Subframe=2,3,4,7,8,9) | X | 100.00 | 108.27 | 24.36 | 3.23 | 80.0 | ± 9.6 % |
| | | Y | 6.18 | 79.22 | 15.32 | | 80.0 | |
| | | Z | 7.19 | 79.40 | 16.50 | | 80.0 | |
| 10464-AAA | LTE-TDD (SC-FDMA, 1 RB, 3 MHz, QPSK, UL Subframe=2,3,4,7,8,9) | X | 100.00 | 128.35 | 33.68 | 3.23 | 80.0 | ± 9.6 % |
| | | Y | 100.00 | 137.42 | 36.46 | | 80.0 | |
| | | Z | 100.00 | 125.21 | 32.15 | | 80.0 | |
| 10465-AAA | LTE-TDD (SC-FDMA, 1 RB, 3 MHz, 16-QAM, UL Subframe=2,3,4,7,8,9) | X | 100.00 | 111.56 | 25.90 | 3.23 | 80.0 | ± 9.6 % |
| | | Y | 100.00 | 109.13 | 23.66 | | 80.0 | |
| | | Z | 21.07 | 92.23 | 20.67 | | 80.0 | |
| 10466-AAA | LTE-TDD (SC-FDMA, 1 RB, 3 MHz, 64-QAM, UL Subframe=2,3,4,7,8,9) | X | 100.00 | 107.63 | 24.06 | 3.23 | 80.0 | ± 9.6 % |
| | | Y | 2.43 | 70.85 | 12.64 | | 80.0 | |
| | | Z | 4.66 | 74.87 | 14.99 | | 80.0 | |
| 10467-AAC | LTE-TDD (SC-FDMA, 1 RB, 5 MHz, QPSK, UL Subframe=2,3,4,7,8,9) | X | 100.00 | 128.63 | 33.81 | 3.23 | 80.0 | ± 9.6 % |
| | | Y | 100.00 | 137.88 | 36.66 | | 80.0 | |
| | | Z | 100.00 | 125.47 | 32.26 | | 80.0 | |
| 10468-AAC | LTE-TDD (SC-FDMA, 1 RB, 5 MHz, 16-QAM, UL Subframe=2,3,4,7,8,9) | X | 100.00 | 111.77 | 26.00 | 3.23 | 80.0 | ± 9.6 % |
| | | Y | 100.00 | 109.52 | 23.83 | | 80.0 | |
| | | Z | 27.11 | 95.03 | 21.41 | | 80.0 | |
| 10469-AAC | LTE-TDD (SC-FDMA, 1 RB, 5 MHz, 64-QAM, UL Subframe=2,3,4,7,8,9) | X | 100.00 | 107.65 | 24.07 | 3.23 | 80.0 | ± 9.6 % |
| | | Y | 2.53 | 71.21 | 12.76 | | 80.0 | |
| | | Z | 4.72 | 75.01 | 15.04 | | 80.0 | |
| 10470-AAC | LTE-TDD (SC-FDMA, 1 RB, 10 MHz, QPSK, UL Subframe=2,3,4,7,8,9) | X | 100.00 | 128.68 | 33.82 | 3.23 | 80.0 | ± 9.6 % |
| | | Y | 100.00 | 137.95 | 36.68 | | 80.0 | |
| | | Z | 100.00 | 125.51 | 32.27 | | 80.0 | |
| 10471-AAC | LTE-TDD (SC-FDMA, 1 RB, 10 MHz, 16-QAM, UL Subframe=2,3,4,7,8,9) | X | 100.00 | 111.71 | 25.97 | 3.23 | 80.0 | ± 9.6 % |
| | | Y | 100.00 | 109.41 | 23.78 | | 80.0 | |
| | | Z | 26.88 | 94.90 | 21.36 | | 80.0 | |
| 10472-AAC | LTE-TDD (SC-FDMA, 1 RB, 10 MHz, 64-QAM, UL Subframe=2,3,4,7,8,9) | X | 100.00 | 107.59 | 24.03 | 3.23 | 80.0 | ± 9.6 % |
| | | Y | 2.45 | 70.92 | 12.65 | | 80.0 | |
| | | Z | 4.68 | 74.91 | 14.99 | | 80.0 | |
| 10473-AAC | LTE-TDD (SC-FDMA, 1 RB, 15 MHz, QPSK, UL Subframe=2,3,4,7,8,9) | X | 100.00 | 128.64 | 33.80 | 3.23 | 80.0 | ± 9.6 % |
| | | Y | 100.00 | 137.92 | 36.66 | | 80.0 | |
| | | Z | 100.00 | 125.47 | 32.26 | | 80.0 | |
| 10474-AAC | LTE-TDD (SC-FDMA, 1 RB, 15 MHz, 16-QAM, UL Subframe=2,3,4,7,8,9) | X | 100.00 | 111.72 | 25.97 | 3.23 | 80.0 | ± 9.6 % |
| | | Y | 100.00 | 109.42 | 23.78 | | 80.0 | |
| | | Z | 26.23 | 94.65 | 21.30 | | 80.0 | |
| 10475-AAC | LTE-TDD (SC-FDMA, 1 RB, 15 MHz, 64-QAM, UL Subframe=2,3,4,7,8,9) | X | 100.00 | 107.61 | 24.04 | 3.23 | 80.0 | ± 9.6 % |
| | | Y | 2.42 | 70.81 | 12.61 | | 80.0 | |
| | | Z | 4.63 | 74.81 | 14.96 | | 80.0 | |

EX3DV4- SN:3922

November 15, 2017

| | | | | | | | | |
|-----------|---|---|--------|--------|-------|------|------|---------|
| 10477-AAC | LTE-TDD (SC-FDMA, 1 RB, 20 MHz, 16-QAM, UL Subframe=2,3,4,7,8,9) | X | 100.00 | 111.52 | 25.87 | 3.23 | 80.0 | ± 9.6 % |
| | | Y | 100.00 | 109.08 | 23.63 | | 80.0 | |
| | | Z | 21.80 | 92.57 | 20.74 | | 80.0 | |
| 10478-AAC | LTE-TDD (SC-FDMA, 1 RB, 20 MHz, 64-QAM, UL Subframe=2,3,4,7,8,9) | X | 100.00 | 107.54 | 24.01 | 3.23 | 80.0 | ± 9.6 % |
| | | Y | 2.34 | 70.48 | 12.48 | | 80.0 | |
| | | Z | 4.57 | 74.66 | 14.90 | | 80.0 | |
| 10479-AAA | LTE-TDD (SC-FDMA, 50% RB, 1.4 MHz, QPSK, UL Subframe=2,3,4,7,8,9) | X | 21.05 | 102.62 | 28.79 | 3.23 | 80.0 | ± 9.6 % |
| | | Y | 100.00 | 130.18 | 35.05 | | 80.0 | |
| | | Z | 8.79 | 88.04 | 24.08 | | 80.0 | |
| 10480-AAA | LTE-TDD (SC-FDMA, 50% RB, 1.4 MHz, 16-QAM, UL Subframe=2,3,4,7,8,9) | X | 31.10 | 101.37 | 26.40 | 3.23 | 80.0 | ± 9.6 % |
| | | Y | 100.00 | 115.77 | 28.24 | | 80.0 | |
| | | Z | 10.81 | 85.97 | 21.62 | | 80.0 | |
| 10481-AAA | LTE-TDD (SC-FDMA, 50% RB, 1.4 MHz, 64-QAM, UL Subframe=2,3,4,7,8,9) | X | 23.43 | 96.25 | 24.59 | 3.23 | 80.0 | ± 9.6 % |
| | | Y | 100.00 | 112.73 | 26.77 | | 80.0 | |
| | | Z | 8.90 | 82.56 | 20.16 | | 80.0 | |
| 10482-AAA | LTE-TDD (SC-FDMA, 50% RB, 3 MHz, QPSK, UL Subframe=2,3,4,7,8,9) | X | 4.87 | 78.15 | 19.61 | 2.23 | 80.0 | ± 9.6 % |
| | | Y | 4.24 | 77.89 | 18.18 | | 80.0 | |
| | | Z | 2.92 | 70.65 | 16.24 | | 80.0 | |
| 10483-AAA | LTE-TDD (SC-FDMA, 50% RB, 3 MHz, 16-QAM, UL Subframe=2,3,4,7,8,9) | X | 10.85 | 86.14 | 22.05 | 2.23 | 80.0 | ± 9.6 % |
| | | Y | 5.65 | 77.21 | 17.13 | | 80.0 | |
| | | Z | 5.95 | 77.30 | 18.74 | | 80.0 | |
| 10484-AAA | LTE-TDD (SC-FDMA, 50% RB, 3 MHz, 64-QAM, UL Subframe=2,3,4,7,8,9) | X | 9.22 | 83.60 | 21.23 | 2.23 | 80.0 | ± 9.6 % |
| | | Y | 4.45 | 74.14 | 16.03 | | 80.0 | |
| | | Z | 5.48 | 75.91 | 18.23 | | 80.0 | |
| 10485-AAC | LTE-TDD (SC-FDMA, 50% RB, 5 MHz, QPSK, UL Subframe=2,3,4,7,8,9) | X | 4.88 | 78.37 | 20.46 | 2.23 | 80.0 | ± 9.6 % |
| | | Y | 4.98 | 81.42 | 21.09 | | 80.0 | |
| | | Z | 3.27 | 71.98 | 17.62 | | 80.0 | |
| 10486-AAC | LTE-TDD (SC-FDMA, 50% RB, 5 MHz, 16-QAM, UL Subframe=2,3,4,7,8,9) | X | 4.14 | 72.53 | 17.76 | 2.23 | 80.0 | ± 9.6 % |
| | | Y | 3.42 | 71.82 | 16.50 | | 80.0 | |
| | | Z | 3.25 | 68.80 | 15.87 | | 80.0 | |
| 10487-AAC | LTE-TDD (SC-FDMA, 50% RB, 5 MHz, 64-QAM, UL Subframe=2,3,4,7,8,9) | X | 4.09 | 71.98 | 17.52 | 2.23 | 80.0 | ± 9.6 % |
| | | Y | 3.30 | 70.93 | 16.10 | | 80.0 | |
| | | Z | 3.27 | 68.50 | 15.73 | | 80.0 | |
| 10488-AAC | LTE-TDD (SC-FDMA, 50% RB, 10 MHz, QPSK, UL Subframe=2,3,4,7,8,9) | X | 4.71 | 76.07 | 20.18 | 2.23 | 80.0 | ± 9.6 % |
| | | Y | 4.06 | 76.75 | 20.65 | | 80.0 | |
| | | Z | 3.64 | 71.70 | 18.11 | | 80.0 | |
| 10489-AAC | LTE-TDD (SC-FDMA, 50% RB, 10 MHz, 16-QAM, UL Subframe=2,3,4,7,8,9) | X | 4.12 | 71.10 | 18.27 | 2.23 | 80.0 | ± 9.6 % |
| | | Y | 3.59 | 71.27 | 18.18 | | 80.0 | |
| | | Z | 3.59 | 68.70 | 16.94 | | 80.0 | |
| 10490-AAC | LTE-TDD (SC-FDMA, 50% RB, 10 MHz, 64-QAM, UL Subframe=2,3,4,7,8,9) | X | 4.20 | 70.81 | 18.16 | 2.23 | 80.0 | ± 9.6 % |
| | | Y | 3.64 | 70.93 | 18.02 | | 80.0 | |
| | | Z | 3.69 | 68.59 | 16.91 | | 80.0 | |
| 10491-AAC | LTE-TDD (SC-FDMA, 50% RB, 15 MHz, QPSK, UL Subframe=2,3,4,7,8,9) | X | 4.67 | 73.62 | 19.32 | 2.23 | 80.0 | ± 9.6 % |
| | | Y | 3.94 | 73.47 | 19.55 | | 80.0 | |
| | | Z | 3.91 | 70.58 | 17.78 | | 80.0 | |
| 10492-AAC | LTE-TDD (SC-FDMA, 50% RB, 15 MHz, 16-QAM, UL Subframe=2,3,4,7,8,9) | X | 4.37 | 69.92 | 18.03 | 2.23 | 80.0 | ± 9.6 % |
| | | Y | 3.77 | 69.63 | 17.93 | | 80.0 | |
| | | Z | 3.96 | 68.18 | 17.01 | | 80.0 | |

EX3DV4- SN:3922

November 15, 2017

| | | | | | | | | |
|-----------|--|---|------|-------|-------|------|------|---------|
| 10493-AAC | LTE-TDD (SC-FDMA, 50% RB, 15 MHz, 64-QAM, UL Subframe=2,3,4,7,8,9) | X | 4.43 | 69.73 | 17.96 | 2.23 | 80.0 | ± 9.6 % |
| | | Y | 3.81 | 69.42 | 17.83 | | 80.0 | |
| | | Z | 4.03 | 68.08 | 16.99 | | 80.0 | |
| 10494-AAC | LTE-TDD (SC-FDMA, 50% RB, 20 MHz, QPSK, UL Subframe=2,3,4,7,8,9) | X | 5.23 | 75.62 | 19.94 | 2.23 | 80.0 | ± 9.6 % |
| | | Y | 4.39 | 75.38 | 20.21 | | 80.0 | |
| | | Z | 4.21 | 71.94 | 18.18 | | 80.0 | |
| 10495-AAC | LTE-TDD (SC-FDMA, 50% RB, 20 MHz, 16-QAM, UL Subframe=2,3,4,7,8,9) | X | 4.43 | 70.42 | 18.26 | 2.23 | 80.0 | ± 9.6 % |
| | | Y | 3.80 | 69.92 | 18.16 | | 80.0 | |
| | | Z | 3.99 | 68.56 | 17.19 | | 80.0 | |
| 10496-AAC | LTE-TDD (SC-FDMA, 50% RB, 20 MHz, 64-QAM, UL Subframe=2,3,4,7,8,9) | X | 4.49 | 70.03 | 18.13 | 2.23 | 80.0 | ± 9.6 % |
| | | Y | 3.85 | 69.57 | 18.02 | | 80.0 | |
| | | Z | 4.08 | 68.33 | 17.13 | | 80.0 | |
| 10497-AAA | LTE-TDD (SC-FDMA, 100% RB, 1.4 MHz, QPSK, UL Subframe=2,3,4,7,8,9) | X | 3.69 | 73.99 | 17.05 | 2.23 | 80.0 | ± 9.6 % |
| | | Y | 1.69 | 65.87 | 11.88 | | 80.0 | |
| | | Z | 2.22 | 67.13 | 13.87 | | 80.0 | |
| 10498-AAA | LTE-TDD (SC-FDMA, 100% RB, 1.4 MHz, 16-QAM, UL Subframe=2,3,4,7,8,9) | X | 2.44 | 65.88 | 12.63 | 2.23 | 80.0 | ± 9.6 % |
| | | Y | 1.16 | 60.00 | 7.66 | | 80.0 | |
| | | Z | 1.89 | 62.82 | 10.87 | | 80.0 | |
| 10499-AAA | LTE-TDD (SC-FDMA, 100% RB, 1.4 MHz, 64-QAM, UL Subframe=2,3,4,7,8,9) | X | 2.33 | 65.07 | 12.12 | 2.23 | 80.0 | ± 9.6 % |
| | | Y | 1.18 | 60.00 | 7.48 | | 80.0 | |
| | | Z | 1.85 | 62.36 | 10.50 | | 80.0 | |
| 10500-AAA | LTE-TDD (SC-FDMA, 100% RB, 3 MHz, QPSK, UL Subframe=2,3,4,7,8,9) | X | 4.64 | 76.82 | 20.15 | 2.23 | 80.0 | ± 9.6 % |
| | | Y | 4.39 | 78.97 | 20.75 | | 80.0 | |
| | | Z | 3.37 | 71.60 | 17.73 | | 80.0 | |
| 10501-AAA | LTE-TDD (SC-FDMA, 100% RB, 3 MHz, 16-QAM, UL Subframe=2,3,4,7,8,9) | X | 4.12 | 71.88 | 17.92 | 2.23 | 80.0 | ± 9.6 % |
| | | Y | 3.59 | 72.06 | 17.33 | | 80.0 | |
| | | Z | 3.41 | 68.79 | 16.30 | | 80.0 | |
| 10502-AAA | LTE-TDD (SC-FDMA, 100% RB, 3 MHz, 64-QAM, UL Subframe=2,3,4,7,8,9) | X | 4.17 | 71.65 | 17.77 | 2.23 | 80.0 | ± 9.6 % |
| | | Y | 3.59 | 71.67 | 17.07 | | 80.0 | |
| | | Z | 3.47 | 68.69 | 16.20 | | 80.0 | |
| 10503-AAC | LTE-TDD (SC-FDMA, 100% RB, 5 MHz, QPSK, UL Subframe=2,3,4,7,8,9) | X | 4.65 | 75.83 | 20.08 | 2.23 | 80.0 | ± 9.6 % |
| | | Y | 4.00 | 76.48 | 20.53 | | 80.0 | |
| | | Z | 3.60 | 71.52 | 18.02 | | 80.0 | |
| 10504-AAC | LTE-TDD (SC-FDMA, 100% RB, 5 MHz, 16-QAM, UL Subframe=2,3,4,7,8,9) | X | 4.10 | 71.00 | 18.21 | 2.23 | 80.0 | ± 9.6 % |
| | | Y | 3.56 | 71.15 | 18.11 | | 80.0 | |
| | | Z | 3.57 | 68.61 | 16.89 | | 80.0 | |
| 10505-AAC | LTE-TDD (SC-FDMA, 100% RB, 5 MHz, 64-QAM, UL Subframe=2,3,4,7,8,9) | X | 4.17 | 70.71 | 18.10 | 2.23 | 80.0 | ± 9.6 % |
| | | Y | 3.61 | 70.82 | 17.96 | | 80.0 | |
| | | Z | 3.67 | 68.49 | 16.86 | | 80.0 | |
| 10506-AAC | LTE-TDD (SC-FDMA, 100% RB, 10 MHz, QPSK, UL Subframe=2,3,4,7,8,9) | X | 5.18 | 75.44 | 19.86 | 2.23 | 80.0 | ± 9.6 % |
| | | Y | 4.34 | 75.20 | 20.13 | | 80.0 | |
| | | Z | 4.16 | 71.80 | 18.11 | | 80.0 | |
| 10507-AAC | LTE-TDD (SC-FDMA, 100% RB, 10 MHz, 16-QAM, UL Subframe=2,3,4,7,8,9) | X | 4.42 | 70.36 | 18.22 | 2.23 | 80.0 | ± 9.6 % |
| | | Y | 3.78 | 69.86 | 18.12 | | 80.0 | |
| | | Z | 3.98 | 68.50 | 17.15 | | 80.0 | |

EX3DV4- SN:3922

November 15, 2017

| | | | | | | | | |
|-----------|---|---|------|-------|-------|------|-------|---------|
| 10508-AAC | LTE-TDD (SC-FDMA, 100% RB, 10 MHz, 64-QAM, UL Subframe=2,3,4,7,8,9) | X | 4.47 | 69.96 | 18.08 | 2.23 | 80.0 | ± 9.6 % |
| | | Y | 3.84 | 69.49 | 17.97 | | 80.0 | |
| | | Z | 4.06 | 68.27 | 17.09 | | 80.0 | |
| 10509-AAC | LTE-TDD (SC-FDMA, 100% RB, 15 MHz, QPSK, UL Subframe=2,3,4,7,8,9) | X | 5.29 | 73.44 | 19.06 | 2.23 | 80.0 | ± 9.6 % |
| | | Y | 4.51 | 72.94 | 19.20 | | 80.0 | |
| | | Z | 4.55 | 70.83 | 17.74 | | 80.0 | |
| 10510-AAC | LTE-TDD (SC-FDMA, 100% RB, 15 MHz, 16-QAM, UL Subframe=2,3,4,7,8,9) | X | 4.86 | 69.84 | 18.07 | 2.23 | 80.0 | ± 9.6 % |
| | | Y | 4.19 | 69.10 | 17.93 | | 80.0 | |
| | | Z | 4.49 | 68.38 | 17.21 | | 80.0 | |
| 10511-AAC | LTE-TDD (SC-FDMA, 100% RB, 15 MHz, 64-QAM, UL Subframe=2,3,4,7,8,9) | X | 4.89 | 69.51 | 17.97 | 2.23 | 80.0 | ± 9.6 % |
| | | Y | 4.24 | 68.83 | 17.84 | | 80.0 | |
| | | Z | 4.54 | 68.15 | 17.16 | | 80.0 | |
| 10512-AAC | LTE-TDD (SC-FDMA, 100% RB, 20 MHz, QPSK, UL Subframe=2,3,4,7,8,9) | X | 5.76 | 75.57 | 19.74 | 2.23 | 80.0 | ± 9.6 % |
| | | Y | 4.84 | 74.92 | 19.86 | | 80.0 | |
| | | Z | 4.72 | 72.21 | 18.14 | | 80.0 | |
| 10513-AAC | LTE-TDD (SC-FDMA, 100% RB, 20 MHz, 16-QAM, UL Subframe=2,3,4,7,8,9) | X | 4.78 | 70.25 | 18.23 | 2.23 | 80.0 | ± 9.6 % |
| | | Y | 4.09 | 69.35 | 18.06 | | 80.0 | |
| | | Z | 4.37 | 68.63 | 17.29 | | 80.0 | |
| 10514-AAC | LTE-TDD (SC-FDMA, 100% RB, 20 MHz, 64-QAM, UL Subframe=2,3,4,7,8,9) | X | 4.76 | 69.71 | 18.06 | 2.23 | 80.0 | ± 9.6 % |
| | | Y | 4.10 | 68.87 | 17.89 | | 80.0 | |
| | | Z | 4.39 | 68.24 | 17.19 | | 80.0 | |
| 10515-AAA | IEEE 802.11b WiFi 2.4 GHz (DSSS, 2 Mbps, 99pc duty cycle) | X | 0.97 | 62.76 | 14.36 | 0.00 | 150.0 | ± 9.6 % |
| | | Y | 0.95 | 63.70 | 14.99 | | 150.0 | |
| | | Z | 0.92 | 61.51 | 13.03 | | 150.0 | |
| 10516-AAA | IEEE 802.11b WiFi 2.4 GHz (DSSS, 5.5 Mbps, 99pc duty cycle) | X | 0.54 | 67.78 | 15.81 | 0.00 | 150.0 | ± 9.6 % |
| | | Y | 0.74 | 75.39 | 19.60 | | 150.0 | |
| | | Z | 0.42 | 62.99 | 12.11 | | 150.0 | |
| 10517-AAA | IEEE 802.11b WiFi 2.4 GHz (DSSS, 11 Mbps, 99pc duty cycle) | X | 0.81 | 64.33 | 14.78 | 0.00 | 150.0 | ± 9.6 % |
| | | Y | 0.81 | 65.99 | 15.86 | | 150.0 | |
| | | Z | 0.73 | 62.24 | 12.86 | | 150.0 | |
| 10518-AAA | IEEE 802.11a/h WiFi 5 GHz (OFDM, 9 Mbps, 99pc duty cycle) | X | 4.56 | 66.60 | 16.12 | 0.00 | 150.0 | ± 9.6 % |
| | | Y | 4.34 | 66.95 | 16.24 | | 150.0 | |
| | | Z | 4.49 | 66.22 | 15.74 | | 150.0 | |
| 10519-AAA | IEEE 802.11a/h WiFi 5 GHz (OFDM, 12 Mbps, 99pc duty cycle) | X | 4.76 | 66.85 | 16.24 | 0.00 | 150.0 | ± 9.6 % |
| | | Y | 4.49 | 67.11 | 16.33 | | 150.0 | |
| | | Z | 4.68 | 66.47 | 15.87 | | 150.0 | |
| 10520-AAA | IEEE 802.11a/h WiFi 5 GHz (OFDM, 18 Mbps, 99pc duty cycle) | X | 4.61 | 66.81 | 16.16 | 0.00 | 150.0 | ± 9.6 % |
| | | Y | 4.34 | 67.05 | 16.25 | | 150.0 | |
| | | Z | 4.52 | 66.41 | 15.77 | | 150.0 | |
| 10521-AAA | IEEE 802.11a/h WiFi 5 GHz (OFDM, 24 Mbps, 99pc duty cycle) | X | 4.54 | 66.81 | 16.15 | 0.00 | 150.0 | ± 9.6 % |
| | | Y | 4.28 | 67.02 | 16.23 | | 150.0 | |
| | | Z | 4.46 | 66.39 | 15.75 | | 150.0 | |
| 10522-AAA | IEEE 802.11a/h WiFi 5 GHz (OFDM, 36 Mbps, 99pc duty cycle) | X | 4.60 | 66.87 | 16.22 | 0.00 | 150.0 | ± 9.6 % |
| | | Y | 4.33 | 67.14 | 16.32 | | 150.0 | |
| | | Z | 4.51 | 66.46 | 15.83 | | 150.0 | |

Certificate No: EX3-3922_Nov17

Page 30 of 38

EX3DV4- SN:3922

November 15, 2017

| | | | | | | | | |
|-----------|--|---|------|-------|-------|------|-------|---------|
| 10523-AAA | IEEE 802.11a/h WiFi 5 GHz (OFDM, 48 Mbps, 99pc duty cycle) | X | 4.47 | 66.74 | 16.07 | 0.00 | 150.0 | ± 9.6 % |
| | | Y | 4.26 | 67.16 | 16.26 | | 150.0 | |
| | | Z | 4.39 | 66.32 | 15.67 | | 150.0 | |
| 10524-AAA | IEEE 802.11a/h WiFi 5 GHz (OFDM, 54 Mbps, 99pc duty cycle) | X | 4.54 | 66.79 | 16.19 | 0.00 | 150.0 | ± 9.6 % |
| | | Y | 4.28 | 67.11 | 16.32 | | 150.0 | |
| | | Z | 4.46 | 66.38 | 15.80 | | 150.0 | |
| 10525-AAA | IEEE 802.11ac WiFi (20MHz, MCS0, 99pc duty cycle) | X | 4.52 | 65.84 | 15.78 | 0.00 | 150.0 | ± 9.6 % |
| | | Y | 4.32 | 66.22 | 15.94 | | 150.0 | |
| | | Z | 4.43 | 65.43 | 15.39 | | 150.0 | |
| 10526-AAA | IEEE 802.11ac WiFi (20MHz, MCS1, 99pc duty cycle) | X | 4.69 | 66.22 | 15.93 | 0.00 | 150.0 | ± 9.6 % |
| | | Y | 4.44 | 66.50 | 16.06 | | 150.0 | |
| | | Z | 4.60 | 65.79 | 15.53 | | 150.0 | |
| 10527-AAA | IEEE 802.11ac WiFi (20MHz, MCS2, 99pc duty cycle) | X | 4.61 | 66.18 | 15.87 | 0.00 | 150.0 | ± 9.6 % |
| | | Y | 4.37 | 66.47 | 16.00 | | 150.0 | |
| | | Z | 4.52 | 65.74 | 15.47 | | 150.0 | |
| 10528-AAA | IEEE 802.11ac WiFi (20MHz, MCS3, 99pc duty cycle) | X | 4.63 | 66.19 | 15.90 | 0.00 | 150.0 | ± 9.6 % |
| | | Y | 4.38 | 66.49 | 16.03 | | 150.0 | |
| | | Z | 4.54 | 65.76 | 15.50 | | 150.0 | |
| 10529-AAA | IEEE 802.11ac WiFi (20MHz, MCS4, 99pc duty cycle) | X | 4.63 | 66.19 | 15.90 | 0.00 | 150.0 | ± 9.6 % |
| | | Y | 4.38 | 66.49 | 16.03 | | 150.0 | |
| | | Z | 4.54 | 65.76 | 15.50 | | 150.0 | |
| 10531-AAA | IEEE 802.11ac WiFi (20MHz, MCS6, 99pc duty cycle) | X | 4.63 | 66.31 | 15.92 | 0.00 | 150.0 | ± 9.6 % |
| | | Y | 4.35 | 66.51 | 16.01 | | 150.0 | |
| | | Z | 4.53 | 65.85 | 15.50 | | 150.0 | |
| 10532-AAA | IEEE 802.11ac WiFi (20MHz, MCS7, 99pc duty cycle) | X | 4.48 | 66.16 | 15.85 | 0.00 | 150.0 | ± 9.6 % |
| | | Y | 4.23 | 66.37 | 15.94 | | 150.0 | |
| | | Z | 4.39 | 65.69 | 15.43 | | 150.0 | |
| 10533-AAA | IEEE 802.11ac WiFi (20MHz, MCS8, 99pc duty cycle) | X | 4.64 | 66.23 | 15.89 | 0.00 | 150.0 | ± 9.6 % |
| | | Y | 4.39 | 66.57 | 16.04 | | 150.0 | |
| | | Z | 4.55 | 65.79 | 15.49 | | 150.0 | |
| 10534-AAA | IEEE 802.11ac WiFi (40MHz, MCS0, 99pc duty cycle) | X | 5.16 | 66.33 | 15.97 | 0.00 | 150.0 | ± 9.6 % |
| | | Y | 4.94 | 66.44 | 16.08 | | 150.0 | |
| | | Z | 5.08 | 65.97 | 15.63 | | 150.0 | |
| 10535-AAA | IEEE 802.11ac WiFi (40MHz, MCS1, 99pc duty cycle) | X | 5.22 | 66.49 | 16.04 | 0.00 | 150.0 | ± 9.6 % |
| | | Y | 4.98 | 66.67 | 16.14 | | 150.0 | |
| | | Z | 5.14 | 66.12 | 15.69 | | 150.0 | |
| 10536-AAA | IEEE 802.11ac WiFi (40MHz, MCS2, 99pc duty cycle) | X | 5.09 | 66.45 | 16.00 | 0.00 | 150.0 | ± 9.6 % |
| | | Y | 4.87 | 66.58 | 16.12 | | 150.0 | |
| | | Z | 5.01 | 66.06 | 15.64 | | 150.0 | |
| 10537-AAA | IEEE 802.11ac WiFi (40MHz, MCS3, 99pc duty cycle) | X | 5.15 | 66.42 | 15.99 | 0.00 | 150.0 | ± 9.6 % |
| | | Y | 4.94 | 66.57 | 16.12 | | 150.0 | |
| | | Z | 5.07 | 66.05 | 15.64 | | 150.0 | |
| 10538-AAA | IEEE 802.11ac WiFi (40MHz, MCS4, 99pc duty cycle) | X | 5.25 | 66.46 | 16.05 | 0.00 | 150.0 | ± 9.6 % |
| | | Y | 5.00 | 66.53 | 16.14 | | 150.0 | |
| | | Z | 5.16 | 66.09 | 15.71 | | 150.0 | |
| 10540-AAA | IEEE 802.11ac WiFi (40MHz, MCS6, 99pc duty cycle) | X | 5.17 | 66.45 | 16.06 | 0.00 | 150.0 | ± 9.6 % |
| | | Y | 4.93 | 66.49 | 16.14 | | 150.0 | |
| | | Z | 5.09 | 66.08 | 15.71 | | 150.0 | |

EX3DV4-- SN:3922

November 15, 2017

| | | | | | | | | |
|-----------|--|---|------|-------|-------|------|-------|---------|
| 10541-AAA | IEEE 802.11ac WiFi (40MHz, MCS7, 99pc duty cycle) | X | 5.15 | 66.33 | 16.00 | 0.00 | 150.0 | ± 9.6 % |
| | | Y | 4.91 | 66.41 | 16.08 | | 150.0 | |
| | | Z | 5.07 | 65.97 | 15.65 | | 150.0 | |
| 10542-AAA | IEEE 802.11ac WiFi (40MHz, MCS8, 99pc duty cycle) | X | 5.30 | 66.40 | 16.05 | 0.00 | 150.0 | ± 9.6 % |
| | | Y | 5.07 | 66.50 | 16.14 | | 150.0 | |
| | | Z | 5.22 | 66.06 | 15.71 | | 150.0 | |
| 10543-AAA | IEEE 802.11ac WiFi (40MHz, MCS9, 99pc duty cycle) | X | 5.38 | 66.44 | 16.08 | 0.00 | 150.0 | ± 9.6 % |
| | | Y | 5.14 | 66.58 | 16.21 | | 150.0 | |
| | | Z | 5.30 | 66.10 | 15.76 | | 150.0 | |
| 10544-AAA | IEEE 802.11ac WiFi (80MHz, MCS0, 99pc duty cycle) | X | 5.46 | 66.46 | 15.97 | 0.00 | 150.0 | ± 9.6 % |
| | | Y | 5.26 | 66.51 | 16.06 | | 150.0 | |
| | | Z | 5.38 | 66.12 | 15.65 | | 150.0 | |
| 10545-AAA | IEEE 802.11ac WiFi (80MHz, MCS1, 99pc duty cycle) | X | 5.65 | 66.85 | 16.12 | 0.00 | 150.0 | ± 9.6 % |
| | | Y | 5.46 | 66.95 | 16.24 | | 150.0 | |
| | | Z | 5.57 | 66.50 | 15.79 | | 150.0 | |
| 10546-AAA | IEEE 802.11ac WiFi (80MHz, MCS2, 99pc duty cycle) | X | 5.53 | 66.68 | 16.05 | 0.00 | 150.0 | ± 9.6 % |
| | | Y | 5.31 | 66.63 | 16.09 | | 150.0 | |
| | | Z | 5.45 | 66.33 | 15.72 | | 150.0 | |
| 10547-AAA | IEEE 802.11ac WiFi (80MHz, MCS3, 99pc duty cycle) | X | 5.61 | 66.72 | 16.06 | 0.00 | 150.0 | ± 9.6 % |
| | | Y | 5.39 | 66.75 | 16.15 | | 150.0 | |
| | | Z | 5.52 | 66.37 | 15.73 | | 150.0 | |
| 10548-AAA | IEEE 802.11ac WiFi (80MHz, MCS4, 99pc duty cycle) | X | 5.85 | 67.61 | 16.48 | 0.00 | 150.0 | ± 9.6 % |
| | | Y | 5.53 | 67.36 | 16.43 | | 150.0 | |
| | | Z | 5.74 | 67.19 | 16.11 | | 150.0 | |
| 10550-AAA | IEEE 802.11ac WiFi (80MHz, MCS6, 99pc duty cycle) | X | 5.56 | 66.68 | 16.05 | 0.00 | 150.0 | ± 9.6 % |
| | | Y | 5.37 | 66.83 | 16.21 | | 150.0 | |
| | | Z | 5.47 | 66.33 | 15.73 | | 150.0 | |
| 10551-AAA | IEEE 802.11ac WiFi (80MHz, MCS7, 99pc duty cycle) | X | 5.56 | 66.73 | 16.04 | 0.00 | 150.0 | ± 9.6 % |
| | | Y | 5.31 | 66.60 | 16.05 | | 150.0 | |
| | | Z | 5.48 | 66.38 | 15.72 | | 150.0 | |
| 10552-AAA | IEEE 802.11ac WiFi (80MHz, MCS8, 99pc duty cycle) | X | 5.48 | 66.53 | 15.95 | 0.00 | 150.0 | ± 9.6 % |
| | | Y | 5.29 | 66.63 | 16.07 | | 150.0 | |
| | | Z | 5.40 | 66.19 | 15.63 | | 150.0 | |
| 10553-AAA | IEEE 802.11ac WiFi (80MHz, MCS9, 99pc duty cycle) | X | 5.57 | 66.58 | 16.01 | 0.00 | 150.0 | ± 9.6 % |
| | | Y | 5.34 | 66.57 | 16.07 | | 150.0 | |
| | | Z | 5.49 | 66.24 | 15.69 | | 150.0 | |
| 10554-AAB | IEEE 802.11ac WiFi (160MHz, MCS0, 99pc duty cycle) | X | 5.86 | 66.83 | 16.07 | 0.00 | 150.0 | ± 9.6 % |
| | | Y | 5.70 | 66.84 | 16.14 | | 150.0 | |
| | | Z | 5.79 | 66.51 | 15.76 | | 150.0 | |
| 10555-AAB | IEEE 802.11ac WiFi (160MHz, MCS1, 99pc duty cycle) | X | 5.99 | 67.12 | 16.19 | 0.00 | 150.0 | ± 9.6 % |
| | | Y | 5.79 | 67.06 | 16.23 | | 150.0 | |
| | | Z | 5.91 | 66.79 | 15.88 | | 150.0 | |
| 10556-AAB | IEEE 802.11ac WiFi (160MHz, MCS2, 99pc duty cycle) | X | 6.01 | 67.16 | 16.20 | 0.00 | 150.0 | ± 9.6 % |
| | | Y | 5.83 | 67.17 | 16.28 | | 150.0 | |
| | | Z | 5.93 | 66.83 | 15.90 | | 150.0 | |
| 10557-AAB | IEEE 802.11ac WiFi (160MHz, MCS3, 99pc duty cycle) | X | 5.98 | 67.09 | 16.19 | 0.00 | 150.0 | ± 9.6 % |
| | | Y | 5.79 | 67.04 | 16.23 | | 150.0 | |
| | | Z | 5.90 | 66.76 | 15.88 | | 150.0 | |

EX3DV4- SN:3922

November 15, 2017

| | | | | | | | | |
|-----------|---|---|------|--------|-------|------|-------|---------|
| 10558-AAB | IEEE 802.11ac WiFi (160MHz, MCS4, 99pc duty cycle) | X | 6.03 | 67.25 | 16.28 | 0.00 | 150.0 | ± 9.6 % |
| | | Y | 5.80 | 67.10 | 16.28 | | 150.0 | |
| | | Z | 5.95 | 66.91 | 15.97 | | 150.0 | |
| 10560-AAB | IEEE 802.11ac WiFi (160MHz, MCS6, 99pc duty cycle) | X | 6.03 | 67.11 | 16.25 | 0.00 | 150.0 | ± 9.6 % |
| | | Y | 5.82 | 67.03 | 16.28 | | 150.0 | |
| | | Z | 5.95 | 66.79 | 15.95 | | 150.0 | |
| 10561-AAB | IEEE 802.11ac WiFi (160MHz, MCS7, 99pc duty cycle) | X | 5.95 | 67.06 | 16.26 | 0.00 | 150.0 | ± 9.6 % |
| | | Y | 5.75 | 67.02 | 16.31 | | 150.0 | |
| | | Z | 5.87 | 66.74 | 15.96 | | 150.0 | |
| 10562-AAB | IEEE 802.11ac WiFi (160MHz, MCS8, 99pc duty cycle) | X | 6.08 | 67.46 | 16.46 | 0.00 | 150.0 | ± 9.6 % |
| | | Y | 5.80 | 67.18 | 16.39 | | 150.0 | |
| | | Z | 5.99 | 67.10 | 16.14 | | 150.0 | |
| 10563-AAB | IEEE 802.11ac WiFi (160MHz, MCS9, 99pc duty cycle) | X | 6.37 | 67.91 | 16.64 | 0.00 | 150.0 | ± 9.6 % |
| | | Y | 5.90 | 67.15 | 16.34 | | 150.0 | |
| | | Z | 6.25 | 67.49 | 16.29 | | 150.0 | |
| 10564-AAA | IEEE 802.11g WiFi 2.4 GHz (DSSS-OFDM, 9 Mbps, 99pc duty cycle) | X | 4.89 | 66.71 | 16.30 | 0.46 | 150.0 | ± 9.6 % |
| | | Y | 4.66 | 66.99 | 16.40 | | 150.0 | |
| | | Z | 4.82 | 66.37 | 15.96 | | 150.0 | |
| 10565-AAA | IEEE 802.11g WiFi 2.4 GHz (DSSS-OFDM, 12 Mbps, 99pc duty cycle) | X | 5.13 | 67.16 | 16.62 | 0.46 | 150.0 | ± 9.6 % |
| | | Y | 4.85 | 67.38 | 16.70 | | 150.0 | |
| | | Z | 5.06 | 66.82 | 16.28 | | 150.0 | |
| 10566-AAA | IEEE 802.11g WiFi 2.4 GHz (DSSS-OFDM, 18 Mbps, 99pc duty cycle) | X | 4.96 | 67.01 | 16.44 | 0.46 | 150.0 | ± 9.6 % |
| | | Y | 4.69 | 67.21 | 16.51 | | 150.0 | |
| | | Z | 4.89 | 66.65 | 16.09 | | 150.0 | |
| 10567-AAA | IEEE 802.11g WiFi 2.4 GHz (DSSS-OFDM, 24 Mbps, 99pc duty cycle) | X | 4.99 | 67.40 | 16.79 | 0.46 | 150.0 | ± 9.6 % |
| | | Y | 4.72 | 67.59 | 16.87 | | 150.0 | |
| | | Z | 4.91 | 67.01 | 16.42 | | 150.0 | |
| 10568-AAA | IEEE 802.11g WiFi 2.4 GHz (DSSS-OFDM, 36 Mbps, 99pc duty cycle) | X | 4.88 | 66.78 | 16.21 | 0.46 | 150.0 | ± 9.6 % |
| | | Y | 4.59 | 66.97 | 16.28 | | 150.0 | |
| | | Z | 4.80 | 66.43 | 15.86 | | 150.0 | |
| 10569-AAA | IEEE 802.11g WiFi 2.4 GHz (DSSS-OFDM, 48 Mbps, 99pc duty cycle) | X | 4.94 | 67.48 | 16.84 | 0.46 | 150.0 | ± 9.6 % |
| | | Y | 4.72 | 67.83 | 17.02 | | 150.0 | |
| | | Z | 4.86 | 67.08 | 16.47 | | 150.0 | |
| 10570-AAA | IEEE 802.11g WiFi 2.4 GHz (DSSS-OFDM, 54 Mbps, 99pc duty cycle) | X | 4.98 | 67.32 | 16.77 | 0.46 | 150.0 | ± 9.6 % |
| | | Y | 4.71 | 67.60 | 16.90 | | 150.0 | |
| | | Z | 4.90 | 66.95 | 16.41 | | 150.0 | |
| 10571-AAA | IEEE 802.11b WiFi 2.4 GHz (DSSS, 1 Mbps, 90pc duty cycle) | X | 1.22 | 64.72 | 15.64 | 0.46 | 130.0 | ± 9.6 % |
| | | Y | 1.15 | 65.06 | 16.01 | | 130.0 | |
| | | Z | 1.14 | 63.13 | 14.22 | | 130.0 | |
| 10572-AAA | IEEE 802.11b WiFi 2.4 GHz (DSSS, 2 Mbps, 90pc duty cycle) | X | 1.24 | 65.31 | 16.00 | 0.46 | 130.0 | ± 9.6 % |
| | | Y | 1.16 | 65.69 | 16.41 | | 130.0 | |
| | | Z | 1.15 | 63.54 | 14.48 | | 130.0 | |
| 10573-AAA | IEEE 802.11b WiFi 2.4 GHz (DSSS, 5.5 Mbps, 90pc duty cycle) | X | 2.25 | 85.40 | 22.87 | 0.46 | 130.0 | ± 9.6 % |
| | | Y | 6.32 | 106.96 | 30.28 | | 130.0 | |
| | | Z | 0.93 | 70.33 | 16.00 | | 130.0 | |
| 10574-AAA | IEEE 802.11b WiFi 2.4 GHz (DSSS, 11 Mbps, 90pc duty cycle) | X | 1.38 | 71.07 | 18.84 | 0.46 | 130.0 | ± 9.6 % |
| | | Y | 1.33 | 72.52 | 19.89 | | 130.0 | |
| | | Z | 1.13 | 66.91 | 16.12 | | 130.0 | |

EX3DV4- SN:3922

November 15, 2017

| | | | | | | | | |
|-----------|---|---|------|-------|-------|------|-------|---------|
| 10575-AAA | IEEE 802.11g WiFi 2.4 GHz (DSSS-OFDM, 6 Mbps, 90pc duty cycle) | X | 4.69 | 66.54 | 16.38 | 0.46 | 130.0 | ± 9.6 % |
| | | Y | 4.45 | 66.81 | 16.47 | | 130.0 | |
| | | Z | 4.62 | 66.19 | 16.03 | | 130.0 | |
| 10576-AAA | IEEE 802.11g WiFi 2.4 GHz (DSSS-OFDM, 9 Mbps, 90pc duty cycle) | X | 4.72 | 66.70 | 16.45 | 0.46 | 130.0 | ± 9.6 % |
| | | Y | 4.48 | 67.01 | 16.55 | | 130.0 | |
| | | Z | 4.64 | 66.34 | 16.08 | | 130.0 | |
| 10577-AAA | IEEE 802.11g WiFi 2.4 GHz (DSSS-OFDM, 12 Mbps, 90pc duty cycle) | X | 4.93 | 67.00 | 16.62 | 0.46 | 130.0 | ± 9.6 % |
| | | Y | 4.64 | 67.23 | 16.69 | | 130.0 | |
| | | Z | 4.85 | 66.64 | 16.26 | | 130.0 | |
| 10578-AAA | IEEE 802.11g WiFi 2.4 GHz (DSSS-OFDM, 18 Mbps, 90pc duty cycle) | X | 4.82 | 67.16 | 16.72 | 0.46 | 130.0 | ± 9.6 % |
| | | Y | 4.55 | 67.37 | 16.79 | | 130.0 | |
| | | Z | 4.74 | 66.77 | 16.34 | | 130.0 | |
| 10579-AAA | IEEE 802.11g WiFi 2.4 GHz (DSSS-OFDM, 24 Mbps, 90pc duty cycle) | X | 4.59 | 66.46 | 16.04 | 0.46 | 130.0 | ± 9.6 % |
| | | Y | 4.31 | 66.60 | 16.08 | | 130.0 | |
| | | Z | 4.51 | 66.09 | 15.67 | | 130.0 | |
| 10580-AAA | IEEE 802.11g WiFi 2.4 GHz (DSSS-OFDM, 36 Mbps, 90pc duty cycle) | X | 4.64 | 66.48 | 16.06 | 0.46 | 130.0 | ± 9.6 % |
| | | Y | 4.34 | 66.67 | 16.11 | | 130.0 | |
| | | Z | 4.56 | 66.12 | 15.70 | | 130.0 | |
| 10581-AAA | IEEE 802.11g WiFi 2.4 GHz (DSSS-OFDM, 48 Mbps, 90pc duty cycle) | X | 4.72 | 67.20 | 16.66 | 0.46 | 130.0 | ± 9.6 % |
| | | Y | 4.46 | 67.48 | 16.79 | | 130.0 | |
| | | Z | 4.64 | 66.79 | 16.27 | | 130.0 | |
| 10582-AAA | IEEE 802.11g WiFi 2.4 GHz (DSSS-OFDM, 54 Mbps, 90pc duty cycle) | X | 4.54 | 66.22 | 15.83 | 0.46 | 130.0 | ± 9.6 % |
| | | Y | 4.24 | 66.38 | 15.88 | | 130.0 | |
| | | Z | 4.46 | 65.66 | 15.47 | | 130.0 | |
| 10583-AAA | IEEE 802.11a/h WiFi 5 GHz (OFDM, 6 Mbps, 90pc duty cycle) | X | 4.69 | 66.54 | 16.38 | 0.46 | 130.0 | ± 9.6 % |
| | | Y | 4.45 | 66.81 | 16.47 | | 130.0 | |
| | | Z | 4.62 | 66.19 | 16.03 | | 130.0 | |
| 10584-AAA | IEEE 802.11a/h WiFi 5 GHz (OFDM, 9 Mbps, 90pc duty cycle) | X | 4.72 | 66.70 | 16.45 | 0.46 | 130.0 | ± 9.6 % |
| | | Y | 4.48 | 67.01 | 16.55 | | 130.0 | |
| | | Z | 4.64 | 66.34 | 16.08 | | 130.0 | |
| 10585-AAA | IEEE 802.11a/h WiFi 5 GHz (OFDM, 12 Mbps, 90pc duty cycle) | X | 4.93 | 67.00 | 16.62 | 0.46 | 130.0 | ± 9.6 % |
| | | Y | 4.64 | 67.23 | 16.69 | | 130.0 | |
| | | Z | 4.85 | 66.64 | 16.26 | | 130.0 | |
| 10586-AAA | IEEE 802.11a/h WiFi 5 GHz (OFDM, 18 Mbps, 90pc duty cycle) | X | 4.82 | 67.16 | 16.72 | 0.46 | 130.0 | ± 9.6 % |
| | | Y | 4.55 | 67.37 | 16.79 | | 130.0 | |
| | | Z | 4.74 | 66.77 | 16.34 | | 130.0 | |
| 10587-AAA | IEEE 802.11a/h WiFi 5 GHz (OFDM, 24 Mbps, 90pc duty cycle) | X | 4.59 | 66.46 | 16.04 | 0.46 | 130.0 | ± 9.6 % |
| | | Y | 4.31 | 66.60 | 16.08 | | 130.0 | |
| | | Z | 4.51 | 66.09 | 15.67 | | 130.0 | |
| 10588-AAA | IEEE 802.11a/h WiFi 5 GHz (OFDM, 36 Mbps, 90pc duty cycle) | X | 4.64 | 66.48 | 16.06 | 0.46 | 130.0 | ± 9.6 % |
| | | Y | 4.34 | 66.67 | 16.11 | | 130.0 | |
| | | Z | 4.56 | 66.12 | 15.70 | | 130.0 | |
| 10589-AAA | IEEE 802.11a/h WiFi 5 GHz (OFDM, 48 Mbps, 90pc duty cycle) | X | 4.72 | 67.20 | 16.66 | 0.46 | 130.0 | ± 9.6 % |
| | | Y | 4.46 | 67.48 | 16.79 | | 130.0 | |
| | | Z | 4.64 | 66.79 | 16.27 | | 130.0 | |
| 10590-AAA | IEEE 802.11a/h WiFi 5 GHz (OFDM, 54 Mbps, 90pc duty cycle) | X | 4.54 | 66.22 | 15.83 | 0.46 | 130.0 | ± 9.6 % |
| | | Y | 4.24 | 66.38 | 15.88 | | 130.0 | |
| | | Z | 4.46 | 65.66 | 15.47 | | 130.0 | |

EX3DV4--SN:3922

November 15, 2017

| | | | | | | | | |
|-----------|---|---|------|-------|-------|------|-------|---------|
| 10591-AAA | IEEE 802.11n (HT Mixed, 20MHz, MCS0, 90pc duty cycle) | X | 4.84 | 66.60 | 16.48 | 0.46 | 130.0 | ± 9.6 % |
| | | Y | 4.61 | 66.88 | 16.58 | | 130.0 | |
| | | Z | 4.78 | 66.27 | 16.14 | | 130.0 | |
| 10592-AAA | IEEE 802.11n (HT Mixed, 20MHz, MCS1, 90pc duty cycle) | X | 5.00 | 66.94 | 16.61 | 0.46 | 130.0 | ± 9.6 % |
| | | Y | 4.72 | 67.17 | 16.70 | | 130.0 | |
| | | Z | 4.93 | 66.60 | 16.27 | | 130.0 | |
| 10593-AAA | IEEE 802.11n (HT Mixed, 20MHz, MCS2, 90pc duty cycle) | X | 4.92 | 66.86 | 16.50 | 0.46 | 130.0 | ± 9.6 % |
| | | Y | 4.64 | 67.05 | 16.57 | | 130.0 | |
| | | Z | 4.85 | 66.51 | 16.15 | | 130.0 | |
| 10594-AAA | IEEE 802.11n (HT Mixed, 20MHz, MCS3, 90pc duty cycle) | X | 4.98 | 67.02 | 16.65 | 0.46 | 130.0 | ± 9.6 % |
| | | Y | 4.70 | 67.22 | 16.73 | | 130.0 | |
| | | Z | 4.90 | 66.67 | 16.30 | | 130.0 | |
| 10595-AAA | IEEE 802.11n (HT Mixed, 20MHz, MCS4, 90pc duty cycle) | X | 4.95 | 66.98 | 16.55 | 0.46 | 130.0 | ± 9.6 % |
| | | Y | 4.67 | 67.21 | 16.65 | | 130.0 | |
| | | Z | 4.87 | 66.62 | 16.20 | | 130.0 | |
| 10596-AAA | IEEE 802.11n (HT Mixed, 20MHz, MCS5, 90pc duty cycle) | X | 4.88 | 66.97 | 16.55 | 0.46 | 130.0 | ± 9.6 % |
| | | Y | 4.60 | 67.18 | 16.64 | | 130.0 | |
| | | Z | 4.81 | 66.61 | 16.19 | | 130.0 | |
| 10597-AAA | IEEE 802.11n (HT Mixed, 20MHz, MCS6, 90pc duty cycle) | X | 4.83 | 66.88 | 16.44 | 0.46 | 130.0 | ± 9.6 % |
| | | Y | 4.55 | 67.05 | 16.50 | | 130.0 | |
| | | Z | 4.76 | 66.51 | 16.08 | | 130.0 | |
| 10598-AAA | IEEE 802.11n (HT Mixed, 20MHz, MCS7, 90pc duty cycle) | X | 4.82 | 67.12 | 16.70 | 0.46 | 130.0 | ± 9.6 % |
| | | Y | 4.54 | 67.27 | 16.75 | | 130.0 | |
| | | Z | 4.73 | 66.73 | 16.32 | | 130.0 | |
| 10599-AAA | IEEE 802.11n (HT Mixed, 40MHz, MCS0, 90pc duty cycle) | X | 5.50 | 67.15 | 16.68 | 0.46 | 130.0 | ± 9.6 % |
| | | Y | 5.28 | 67.31 | 16.81 | | 130.0 | |
| | | Z | 5.44 | 66.86 | 16.38 | | 130.0 | |
| 10600-AAA | IEEE 802.11n (HT Mixed, 40MHz, MCS1, 90pc duty cycle) | X | 5.64 | 67.56 | 16.86 | 0.46 | 130.0 | ± 9.6 % |
| | | Y | 5.38 | 67.66 | 16.96 | | 130.0 | |
| | | Z | 5.56 | 67.23 | 16.54 | | 130.0 | |
| 10601-AAA | IEEE 802.11n (HT Mixed, 40MHz, MCS2, 90pc duty cycle) | X | 5.53 | 67.32 | 16.75 | 0.46 | 130.0 | ± 9.6 % |
| | | Y | 5.29 | 67.45 | 16.87 | | 130.0 | |
| | | Z | 5.46 | 67.01 | 16.44 | | 130.0 | |
| 10602-AAA | IEEE 802.11n (HT Mixed, 40MHz, MCS3, 90pc duty cycle) | X | 5.62 | 67.31 | 16.67 | 0.46 | 130.0 | ± 9.6 % |
| | | Y | 5.38 | 67.49 | 16.81 | | 130.0 | |
| | | Z | 5.55 | 67.02 | 16.37 | | 130.0 | |
| 10603-AAA | IEEE 802.11n (HT Mixed, 40MHz, MCS4, 90pc duty cycle) | X | 5.71 | 67.66 | 16.97 | 0.46 | 130.0 | ± 9.6 % |
| | | Y | 5.45 | 67.77 | 17.09 | | 130.0 | |
| | | Z | 5.64 | 67.34 | 16.66 | | 130.0 | |
| 10604-AAA | IEEE 802.11n (HT Mixed, 40MHz, MCS5, 90pc duty cycle) | X | 5.51 | 67.11 | 16.68 | 0.46 | 130.0 | ± 9.6 % |
| | | Y | 5.33 | 67.40 | 16.88 | | 130.0 | |
| | | Z | 5.44 | 66.82 | 16.39 | | 130.0 | |
| 10605-AAA | IEEE 802.11n (HT Mixed, 40MHz, MCS6, 90pc duty cycle) | X | 5.62 | 67.42 | 16.84 | 0.46 | 130.0 | ± 9.6 % |
| | | Y | 5.37 | 67.54 | 16.95 | | 130.0 | |
| | | Z | 5.55 | 67.12 | 16.53 | | 130.0 | |
| 10606-AAA | IEEE 802.11n (HT Mixed, 40MHz, MCS7, 90pc duty cycle) | X | 5.39 | 66.86 | 16.42 | 0.46 | 130.0 | ± 9.6 % |
| | | Y | 5.16 | 66.99 | 16.54 | | 130.0 | |
| | | Z | 5.32 | 66.55 | 16.12 | | 130.0 | |

EX3DV4- SN:3922

November 15, 2017

| | | | | | | | | |
|-----------|---|---|------|-------|-------|------|-------|---------|
| 10607-AAA | IEEE 802.11ac WiFi (20MHz, MCS0, 90pc duty cycle) | X | 4.68 | 65.91 | 16.10 | 0.46 | 130.0 | ± 9.6 % |
| | | Y | 4.46 | 66.25 | 16.24 | | 130.0 | |
| | | Z | 4.60 | 65.53 | 15.73 | | 130.0 | |
| 10608-AAA | IEEE 802.11ac WiFi (20MHz, MCS1, 90pc duty cycle) | X | 4.87 | 66.32 | 16.26 | 0.46 | 130.0 | ± 9.6 % |
| | | Y | 4.60 | 66.58 | 16.39 | | 130.0 | |
| | | Z | 4.78 | 65.92 | 15.89 | | 130.0 | |
| 10609-AAA | IEEE 802.11ac WiFi (20MHz, MCS2, 90pc duty cycle) | X | 4.76 | 66.17 | 16.11 | 0.46 | 130.0 | ± 9.6 % |
| | | Y | 4.50 | 66.43 | 16.22 | | 130.0 | |
| | | Z | 4.67 | 65.77 | 15.73 | | 130.0 | |
| 10610-AAA | IEEE 802.11ac WiFi (20MHz, MCS3, 90pc duty cycle) | X | 4.81 | 66.33 | 16.27 | 0.46 | 130.0 | ± 9.6 % |
| | | Y | 4.55 | 66.59 | 16.38 | | 130.0 | |
| | | Z | 4.72 | 65.92 | 15.89 | | 130.0 | |
| 10611-AAA | IEEE 802.11ac WiFi (20MHz, MCS4, 90pc duty cycle) | X | 4.73 | 66.14 | 16.12 | 0.46 | 130.0 | ± 9.6 % |
| | | Y | 4.46 | 66.39 | 16.23 | | 130.0 | |
| | | Z | 4.64 | 65.73 | 15.74 | | 130.0 | |
| 10612-AAA | IEEE 802.11ac WiFi (20MHz, MCS5, 90pc duty cycle) | X | 4.74 | 66.29 | 16.16 | 0.46 | 130.0 | ± 9.6 % |
| | | Y | 4.45 | 66.53 | 16.28 | | 130.0 | |
| | | Z | 4.65 | 65.87 | 15.77 | | 130.0 | |
| 10613-AAA | IEEE 802.11ac WiFi (20MHz, MCS6, 90pc duty cycle) | X | 4.74 | 66.18 | 16.05 | 0.46 | 130.0 | ± 9.6 % |
| | | Y | 4.45 | 66.34 | 16.12 | | 130.0 | |
| | | Z | 4.65 | 65.77 | 15.67 | | 130.0 | |
| 10614-AAA | IEEE 802.11ac WiFi (20MHz, MCS7, 90pc duty cycle) | X | 4.68 | 66.37 | 16.28 | 0.46 | 130.0 | ± 9.6 % |
| | | Y | 4.41 | 66.56 | 16.36 | | 130.0 | |
| | | Z | 4.59 | 65.93 | 15.88 | | 130.0 | |
| 10615-AAA | IEEE 802.11ac WiFi (20MHz, MCS8, 90pc duty cycle) | X | 4.73 | 65.97 | 15.90 | 0.46 | 130.0 | ± 9.6 % |
| | | Y | 4.46 | 66.25 | 16.01 | | 130.0 | |
| | | Z | 4.64 | 65.58 | 15.53 | | 130.0 | |
| 10616-AAA | IEEE 802.11ac WiFi (40MHz, MCS0, 90pc duty cycle) | X | 5.33 | 66.42 | 16.30 | 0.46 | 130.0 | ± 9.6 % |
| | | Y | 5.09 | 66.51 | 16.39 | | 130.0 | |
| | | Z | 5.25 | 66.08 | 15.97 | | 130.0 | |
| 10617-AAA | IEEE 802.11ac WiFi (40MHz, MCS1, 90pc duty cycle) | X | 5.39 | 66.56 | 16.34 | 0.46 | 130.0 | ± 9.6 % |
| | | Y | 5.13 | 66.64 | 16.44 | | 130.0 | |
| | | Z | 5.31 | 66.22 | 16.01 | | 130.0 | |
| 10618-AAA | IEEE 802.11ac WiFi (40MHz, MCS2, 90pc duty cycle) | X | 5.28 | 66.59 | 16.37 | 0.46 | 130.0 | ± 9.6 % |
| | | Y | 5.05 | 66.71 | 16.49 | | 130.0 | |
| | | Z | 5.19 | 66.23 | 16.03 | | 130.0 | |
| 10619-AAA | IEEE 802.11ac WiFi (40MHz, MCS3, 90pc duty cycle) | X | 5.30 | 66.41 | 16.22 | 0.46 | 130.0 | ± 9.6 % |
| | | Y | 5.07 | 66.54 | 16.34 | | 130.0 | |
| | | Z | 5.22 | 66.06 | 15.88 | | 130.0 | |
| 10620-AAA | IEEE 802.11ac WiFi (40MHz, MCS4, 90pc duty cycle) | X | 5.39 | 66.47 | 16.30 | 0.46 | 130.0 | ± 9.6 % |
| | | Y | 5.14 | 66.53 | 16.38 | | 130.0 | |
| | | Z | 5.32 | 66.13 | 15.97 | | 130.0 | |
| 10621-AAA | IEEE 802.11ac WiFi (40MHz, MCS5, 90pc duty cycle) | X | 5.39 | 66.57 | 16.46 | 0.46 | 130.0 | ± 9.6 % |
| | | Y | 5.14 | 66.62 | 16.54 | | 130.0 | |
| | | Z | 5.31 | 66.23 | 16.14 | | 130.0 | |
| 10622-AAA | IEEE 802.11ac WiFi (40MHz, MCS6, 90pc duty cycle) | X | 5.39 | 66.72 | 16.53 | 0.46 | 130.0 | ± 9.6 % |
| | | Y | 5.13 | 66.72 | 16.59 | | 130.0 | |
| | | Z | 5.31 | 66.37 | 16.19 | | 130.0 | |

EX3DV4--SN:3922

November 15, 2017

| | | | | | | | | |
|-----------|--|---|------|-------|-------|------|-------|---------|
| 10623-AAA | IEEE 802.11ac WiFi (40MHz, MCS7, 90pc duty cycle) | X | 5.27 | 66.26 | 16.18 | 0.46 | 130.0 | ± 9.6 % |
| | | Y | 5.02 | 66.29 | 16.24 | | 130.0 | |
| | | Z | 5.20 | 65.93 | 15.86 | | 130.0 | |
| 10624-AAA | IEEE 802.11ac WiFi (40MHz, MCS8, 90pc duty cycle) | X | 5.47 | 66.46 | 16.34 | 0.46 | 130.0 | ± 9.6 % |
| | | Y | 5.22 | 66.54 | 16.42 | | 130.0 | |
| | | Z | 5.39 | 66.14 | 16.03 | | 130.0 | |
| 10625-AAA | IEEE 802.11ac WiFi (40MHz, MCS9, 90pc duty cycle) | X | 5.84 | 67.45 | 16.88 | 0.46 | 130.0 | ± 9.6 % |
| | | Y | 5.30 | 66.66 | 16.55 | | 130.0 | |
| | | Z | 5.75 | 67.07 | 16.54 | | 130.0 | |
| 10626-AAA | IEEE 802.11ac WiFi (80MHz, MCS0, 90pc duty cycle) | X | 5.61 | 66.48 | 16.25 | 0.46 | 130.0 | ± 9.6 % |
| | | Y | 5.42 | 66.52 | 16.34 | | 130.0 | |
| | | Z | 5.54 | 66.18 | 15.95 | | 130.0 | |
| 10627-AAA | IEEE 802.11ac WiFi (80MHz, MCS1, 90pc duty cycle) | X | 5.85 | 67.01 | 16.48 | 0.46 | 130.0 | ± 9.6 % |
| | | Y | 5.65 | 67.12 | 16.61 | | 130.0 | |
| | | Z | 5.77 | 66.68 | 16.17 | | 130.0 | |
| 10628-AAA | IEEE 802.11ac WiFi (80MHz, MCS2, 90pc duty cycle) | X | 5.65 | 66.59 | 16.21 | 0.46 | 130.0 | ± 9.6 % |
| | | Y | 5.42 | 66.51 | 16.24 | | 130.0 | |
| | | Z | 5.58 | 66.27 | 15.90 | | 130.0 | |
| 10629-AAA | IEEE 802.11ac WiFi (80MHz, MCS3, 90pc duty cycle) | X | 5.74 | 66.69 | 16.24 | 0.46 | 130.0 | ± 9.6 % |
| | | Y | 5.52 | 66.70 | 16.33 | | 130.0 | |
| | | Z | 5.66 | 66.36 | 15.94 | | 130.0 | |
| 10630-AAA | IEEE 802.11ac WiFi (80MHz, MCS4, 90pc duty cycle) | X | 6.17 | 68.13 | 16.97 | 0.46 | 130.0 | ± 9.6 % |
| | | Y | 5.75 | 67.80 | 16.79 | | 130.0 | |
| | | Z | 6.05 | 67.69 | 16.60 | | 130.0 | |
| 10631-AAA | IEEE 802.11ac WiFi (80MHz, MCS5, 90pc duty cycle) | X | 6.08 | 67.96 | 17.07 | 0.46 | 130.0 | ± 9.6 % |
| | | Y | 5.72 | 67.60 | 16.96 | | 130.0 | |
| | | Z | 5.97 | 67.56 | 16.72 | | 130.0 | |
| 10632-AAA | IEEE 802.11ac WiFi (80MHz, MCS6, 90pc duty cycle) | X | 5.82 | 67.08 | 16.65 | 0.46 | 130.0 | ± 9.6 % |
| | | Y | 5.65 | 67.28 | 16.83 | | 130.0 | |
| | | Z | 5.74 | 66.75 | 16.33 | | 130.0 | |
| 10633-AAA | IEEE 802.11ac WiFi (80MHz, MCS7, 90pc duty cycle) | X | 5.72 | 66.76 | 16.32 | 0.46 | 130.0 | ± 9.6 % |
| | | Y | 5.45 | 66.59 | 16.31 | | 130.0 | |
| | | Z | 5.64 | 66.44 | 16.01 | | 130.0 | |
| 10634-AAA | IEEE 802.11ac WiFi (80MHz, MCS8, 90pc duty cycle) | X | 5.70 | 66.79 | 16.39 | 0.46 | 130.0 | ± 9.6 % |
| | | Y | 5.47 | 66.77 | 16.45 | | 130.0 | |
| | | Z | 5.63 | 66.46 | 16.08 | | 130.0 | |
| 10635-AAA | IEEE 802.11ac WiFi (80MHz, MCS9, 90pc duty cycle) | X | 5.59 | 66.14 | 15.80 | 0.46 | 130.0 | ± 9.6 % |
| | | Y | 5.34 | 66.06 | 15.83 | | 130.0 | |
| | | Z | 5.52 | 65.85 | 15.51 | | 130.0 | |
| 10636-AAB | IEEE 802.11ac WiFi (160MHz, MCS0, 90pc duty cycle) | X | 6.02 | 66.86 | 16.35 | 0.46 | 130.0 | ± 9.6 % |
| | | Y | 5.86 | 66.86 | 16.41 | | 130.0 | |
| | | Z | 5.95 | 66.56 | 16.06 | | 130.0 | |
| 10637-AAB | IEEE 802.11ac WiFi (160MHz, MCS1, 90pc duty cycle) | X | 6.17 | 67.22 | 16.51 | 0.46 | 130.0 | ± 9.6 % |
| | | Y | 5.97 | 67.16 | 16.55 | | 130.0 | |
| | | Z | 6.10 | 66.91 | 16.22 | | 130.0 | |
| 10638-AAB | IEEE 802.11ac WiFi (160MHz, MCS2, 90pc duty cycle) | X | 6.18 | 67.20 | 16.48 | 0.46 | 130.0 | ± 9.6 % |
| | | Y | 6.00 | 67.24 | 16.57 | | 130.0 | |
| | | Z | 6.10 | 66.90 | 16.19 | | 130.0 | |

EX3DV4- SN:3922

November 15, 2017

| | | | | | | | | |
|-----------|--|---|-------|--------|-------|------|-------|---------|
| 10639-AAB | IEEE 802.11ac WiFi (160MHz, MCS3, 90pc duty cycle) | X | 6.16 | 67.17 | 16.51 | 0.46 | 130.0 | ± 9.6 % |
| | | Y | 5.95 | 67.10 | 16.54 | | 130.0 | |
| | | Z | 6.08 | 66.87 | 16.22 | | 130.0 | |
| 10640-AAB | IEEE 802.11ac WiFi (160MHz, MCS4, 90pc duty cycle) | X | 6.17 | 67.19 | 16.46 | 0.46 | 130.0 | ± 9.6 % |
| | | Y | 5.92 | 67.01 | 16.44 | | 130.0 | |
| | | Z | 6.09 | 66.88 | 16.17 | | 130.0 | |
| 10641-AAB | IEEE 802.11ac WiFi (160MHz, MCS5, 90pc duty cycle) | X | 6.20 | 67.05 | 16.41 | 0.46 | 130.0 | ± 9.6 % |
| | | Y | 6.01 | 67.09 | 16.50 | | 130.0 | |
| | | Z | 6.13 | 66.77 | 16.13 | | 130.0 | |
| 10642-AAB | IEEE 802.11ac WiFi (160MHz, MCS6, 90pc duty cycle) | X | 6.25 | 67.34 | 16.72 | 0.46 | 130.0 | ± 9.6 % |
| | | Y | 6.03 | 67.26 | 16.75 | | 130.0 | |
| | | Z | 6.18 | 67.04 | 16.43 | | 130.0 | |
| 10643-AAB | IEEE 802.11ac WiFi (160MHz, MCS7, 90pc duty cycle) | X | 6.08 | 67.01 | 16.45 | 0.46 | 130.0 | ± 9.6 % |
| | | Y | 5.88 | 66.98 | 16.51 | | 130.0 | |
| | | Z | 6.01 | 66.71 | 16.17 | | 130.0 | |
| 10644-AAB | IEEE 802.11ac WiFi (160MHz, MCS8, 90pc duty cycle) | X | 6.26 | 67.55 | 16.75 | 0.46 | 130.0 | ± 9.6 % |
| | | Y | 5.94 | 67.16 | 16.62 | | 130.0 | |
| | | Z | 6.17 | 67.22 | 16.44 | | 130.0 | |
| 10645-AAB | IEEE 802.11ac WiFi (160MHz, MCS9, 90pc duty cycle) | X | 6.68 | 68.35 | 17.09 | 0.46 | 130.0 | ± 9.6 % |
| | | Y | 6.07 | 67.21 | 16.61 | | 130.0 | |
| | | Z | 6.55 | 67.93 | 16.75 | | 130.0 | |
| 10646-AAD | LTE-TDD (SC-FDMA, 1 RB, 5 MHz, QPSK, UL Subframe=2,7) | X | 50.85 | 132.52 | 44.24 | 9.30 | 60.0 | ± 9.6 % |
| | | Y | 20.70 | 121.95 | 43.56 | | 60.0 | |
| | | Z | 29.84 | 120.12 | 40.73 | | 60.0 | |
| 10647-AAC | LTE-TDD (SC-FDMA, 1 RB, 20 MHz, QPSK, UL Subframe=2,7) | X | 42.76 | 129.31 | 43.55 | 9.30 | 60.0 | ± 9.6 % |
| | | Y | 15.62 | 115.37 | 41.74 | | 60.0 | |
| | | Z | 25.56 | 117.23 | 40.05 | | 60.0 | |
| 10648-AAA | CDMA2000 (1x Advanced) | X | 0.70 | 63.25 | 10.84 | 0.00 | 150.0 | ± 9.6 % |
| | | Y | 0.49 | 61.73 | 8.31 | | 150.0 | |
| | | Z | 0.62 | 61.44 | 9.27 | | 150.0 | |
| 10652-AAB | LTE-TDD (OFDMA, 5 MHz, E-TM 3.1, Clipping 44%) | X | 3.96 | 67.79 | 17.06 | 2.23 | 80.0 | ± 9.6 % |
| | | Y | 3.56 | 66.00 | 16.93 | | 80.0 | |
| | | Z | 3.68 | 66.46 | 16.20 | | 80.0 | |
| 10653-AAB | LTE-TDD (OFDMA, 10 MHz, E-TM 3.1, Clipping 44%) | X | 4.44 | 66.99 | 17.10 | 2.23 | 80.0 | ± 9.6 % |
| | | Y | 4.02 | 66.80 | 16.97 | | 80.0 | |
| | | Z | 4.23 | 66.09 | 16.47 | | 80.0 | |
| 10654-AAB | LTE-TDD (OFDMA, 15 MHz, E-TM 3.1, Clipping 44%) | X | 4.40 | 66.63 | 17.09 | 2.23 | 80.0 | ± 9.6 % |
| | | Y | 4.01 | 66.32 | 16.96 | | 80.0 | |
| | | Z | 4.21 | 65.79 | 16.49 | | 80.0 | |
| 10655-AAB | LTE-TDD (OFDMA, 20 MHz, E-TM 3.1, Clipping 44%) | X | 4.45 | 66.63 | 17.12 | 2.23 | 80.0 | ± 9.6 % |
| | | Y | 4.08 | 66.20 | 16.98 | | 80.0 | |
| | | Z | 4.27 | 65.81 | 16.53 | | 80.0 | |

^E Uncertainty is determined using the max. deviation from linear response applying rectangular distribution and is expressed for the square of the field value.

System check uncertainty

The uncertainty budget has been determined for the DASY5 measurement system according to the SPEAG documents and is given in the following Table.

Repeatability Budget for System Check

<0.3 – 3GHz range Body>

| Error Description | Uncertainty value ± % | Probability distribution | divisor | (ci) lg | Standard (lg) | vi or v _{eff} |
|--|-----------------------|--------------------------|---------|---------|---------------|------------------------|
| Measurement System | | | | | | |
| Probe calibration | ± 1.8 | Normal | 1 | 1 | ± 1.8 | ∞ |
| Axial isotropy of the probe | ± 0.0 | Rectangular | √3 | 1 | ± 0.0 | ∞ |
| Spherical isotropy of the probe | ± 0.0 | Rectangular | √3 | 1 | ± 0.0 | ∞ |
| Boundary effects | ± 0.0 | Rectangular | √3 | 1 | ± 0.0 | ∞ |
| Probe linearity | ± 0.0 | Rectangular | √3 | 1 | ± 0.0 | ∞ |
| Detection limit | ± 0.0 | Rectangular | √3 | 1 | ± 0.0 | ∞ |
| Modulation response | ± 0.0 | Rectangular | √3 | 1 | ± 0.0 | ∞ |
| Readout electronics | ± 0.0 | Normal | 1 | 1 | ± 0.0 | ∞ |
| Response time | ± 0.0 | Rectangular | √3 | 1 | ± 0.0 | ∞ |
| Integration time | ± 0.0 | Rectangular | √3 | 1 | ± 0.0 | ∞ |
| RF ambient Noise | ± 0.0 | Rectangular | √3 | 1 | ± 0.0 | ∞ |
| RF ambient Reflections | ± 0.0 | Rectangular | √3 | 1 | ± 0.0 | ∞ |
| Probe Positioner | ± 0.4 | Rectangular | √3 | 1 | ± 0.2 | ∞ |
| Probe positioning | ± 2.9 | Rectangular | √3 | 1 | ± 1.7 | ∞ |
| Max.SAR Eval. | ± 0.0 | Rectangular | √3 | 1 | ± 0.0 | ∞ |
| Test Sample Related | | | | | | |
| Deviation of wxp.dipole | ± 0.0 | Rectangular | √3 | 1 | ± 0.0 | ∞ |
| Dipole Axis to Liquid Distance | ± 2.0 | Rectangular | √3 | 1 | ± 1.2 | ∞ |
| Input power and SAR drift meas. | ± 3.4 | Rectangular | √3 | 1 | ± 2.0 | ∞ |
| Phantom and Setup | | | | | | |
| Phantom uncertainty | ± 4.0 | Rectangular | √3 | 1 | ± 2.3 | ∞ |
| Algorithm for correcting SAR for deviations in permittivity and conductivity | ± 1.9 | Rectangular | √3 | 1 | ± 1.1 | ∞ |
| Liquid conductivity (meas.) | ± 5.0 | Normal | 1 | 0.78 | + 3.9 | ∞ |
| Liquid permittivity (meas.) | ± 5.0 | Normal | 1 | 0.26 | - 1.3 | ∞ |
| Liquid conductivity - temp.unc (below 2deg.C.) | ± 1.7 | Rectangular | √3 | 0.78 | ± 0.8 | ∞ |
| Liquid permittivity - temp.unc (below 2deg.C.) | ± 0.3 | Rectangular | √3 | 0.23 | ± 0.0 | ∞ |
| Combined Standard Uncertainty | | | | | ± 5.945 | |
| Expanded Uncertainty (k=2) | | | | | ± 11.9 | |

<3 – 6GHz range Body>

| Error Description | Uncertainty value ± % | Probability distribution | divisor | (ci) lg | Standard (1g) | vi or v _{eff} |
|--|-----------------------|--------------------------|---------|---------|---------------|------------------------|
| Measurement System | | | | | | |
| Probe calibration | ± 1.8 | Normal | 1 | 1 | ± 1.8 | ∞ |
| Axial isotropy of the probe | ± 0.0 | Rectangular | √3 | 1 | ± 0.0 | ∞ |
| Spherical isotropy of the probe | ± 0.0 | Rectangular | √3 | 1 | ± 0.0 | ∞ |
| Boundary effects | ± 0.0 | Rectangular | √3 | 1 | ± 0.0 | ∞ |
| Probe linearity | ± 0.0 | Rectangular | √3 | 1 | ± 0.0 | ∞ |
| Detection limit | ± 0.0 | Rectangular | √3 | 1 | ± 0.0 | ∞ |
| Modulation response | ± 0.0 | Rectangular | √3 | 1 | ± 0.0 | ∞ |
| Readout electronics | ± 0.0 | Normal | 1 | 1 | ± 0.0 | ∞ |
| Response time | ± 0.0 | Rectangular | √3 | 1 | ± 0.0 | ∞ |
| Integration time | ± 0.0 | Rectangular | √3 | 1 | ± 0.0 | ∞ |
| RF ambient Noise | ± 0.0 | Rectangular | √3 | 1 | ± 0.0 | ∞ |
| RF ambient Reflections | ± 0.0 | Rectangular | √3 | 1 | ± 0.0 | ∞ |
| Probe Positioner | ± 0.8 | Rectangular | √3 | 1 | ± 0.5 | ∞ |
| Probe positioning | ± 6.7 | Rectangular | √3 | 1 | ± 3.9 | ∞ |
| Max.SAR Eval. | ± 0.0 | Rectangular | √3 | 1 | ± 0.0 | ∞ |
| Test Sample Related | | | | | | |
| Deviation of wxp.dipole | ± 0.0 | Rectangular | √3 | 1 | ± 0.0 | ∞ |
| Dipole Axis to Liquid Distance | ± 2.0 | Rectangular | √3 | 1 | ± 1.2 | ∞ |
| Input power and SAR drift meas. | ± 3.4 | Rectangular | √3 | 1 | ± 2.0 | ∞ |
| Phantom and Setup | | | | | | |
| Phantom uncertainty | ± 4.0 | Rectangular | √3 | 1 | ± 2.3 | ∞ |
| Algorithm for correcting SAR for deviations in permittivity and conductivity | ± 1.9 | Rectangular | √3 | 1 | ± 1.1 | ∞ |
| Liquid conductivity (meas.) | ± 5.0 | Normal | 1 | 0.78 | + 3.9 | ∞ |
| Liquid permittivity (meas.) | ± 5.0 | Normal | 1 | 0.26 | - 1.3 | ∞ |
| Liquid conductivity - temp.unc (below 2deg.C.) | ± 1.7 | Rectangular | √3 | 0.78 | ± 0.8 | ∞ |
| Liquid permittivity - temp.unc (below 2deg.C.) | ± 0.3 | Rectangular | √3 | 0.23 | ± 0.0 | ∞ |
| Combined Standard Uncertainty | | | | | ± 6.906 | |
| Expanded Uncertainty (k=2) | | | | | ± 13.8 | |