




FCC Test Report

Equipment : Mobile Phone
Brand Name : Xi
Model No. : F-06E
FCC ID : VQK-F06E
Standard : 47 CFR FCC Part 15.247
Operating Band : 2400 MHz – 2483.5 MHz
FCC Classification : DTS
Applicant : FUJITSU LIMITED
Manufacturer : 1-1, Kamikodanaka 4-chome, Nakahara-ku, Kawasaki 211-8588, Japan

The product sample received on Mar. 10, 2013 and completely tested on Mar. 29, 2013. We, SPORTON, would like to declare that the tested sample has been evaluated in accordance with the procedures given in ANSI C63.10-2009 and shown compliance with the applicable technical standards.

The test results in this report apply exclusively to the tested model / sample. Without written approval of SPORTON INTERNATIONAL INC., the test report shall not be reproduced except in full.

Reviewed by:


Wayne Hsu / Assistant Manager



Testing Laboratory
1190



Table of Contents

1	GENERAL DESCRIPTION	5
1.1	Information.....	5
1.2	Accessories and Support Equipment	7
1.3	Testing Applied Standards	7
1.4	Testing Location Information	8
1.5	Measurement Uncertainty	8
2	TEST CONFIGURATION OF EUT.....	9
2.1	The Worst Case Modulation Configuration	9
2.2	Test Channel Frequencies Configuration.....	9
2.3	The Worst Case Power Setting Parameter	9
2.4	The Worst Case Measurement Configuration.....	10
2.5	Test Setup Diagram	11
3	TRANSMITTER TEST RESULT	12
3.1	AC Power-line Conducted Emissions	12
3.2	6dB Bandwidth	15
3.3	RF Output Power.....	17
3.4	Power Spectral Density	20
3.5	Transmitter Radiated Bandedge Emissions	22
3.6	Transmitter Radiated Unwanted Emissions	25
4	TEST EQUIPMENT AND CALIBRATION DATA.....	36
APPENDIX A. TEST PHOTOS		A1
APPENDIX B. PHOTOGRAPHS OF EUT		B1



Summary of Test Result

Conformance Test Specifications					
Report Clause	Ref. Std. Clause	Description	Measured	Limit	Result
1.1.2	15.203	Antenna Requirement	Antenna connector mechanism complied	FCC 15.203	Complied
3.1	15.207	AC Power-line Conducted Emissions	[dBuV]:1.930MHz 33.05 (Margin 12.95dB) - AV 39.05 (Margin 16.95dB) - QP	FCC 15.207	Complied
3.2	15.247(a)	6dB Bandwidth	LE:678.26 kHz	≥500kHz	Complied
3.3	15.247(b)	RF Output Power (Maximum Peak Conducted Output Power)	Power [dBm] LE:-0.08	Power [dBm] LE:30	Complied
3.4	15.247(d)	Power Spectral Density	PSD [dBm/3kHz] LE: -15.99	PSD [dBm/3kHz]: 8	Complied
3.5	15.247(c)	Transmitter Radiated Bandedge Emissions	Restricted Bands [dBuV/m at 3m]:2483.53MHz 42.55 (Margin 31.45dB) - PK 27.62 (Margin 26.38dB) - AV	Non-Restricted Bands: > 20 dBc Restricted Bands: FCC 15.209	Complied
3.6	15.247(c)	Transmitter Radiated Unwanted Emissions	Restricted Bands [dBuV/m at 3m]:30.25MHz 25.25 (Margin 14.75dB) -PK	Non-Restricted Bands: > 20 dBc Restricted Bands: FCC 15.209	Complied



Revision History



1 General Description

1.1 Information

1.1.1 RF General Information

RF General Information					
Frequency Range (MHz)	Bluetooth Version	Ch. Frequency (MHz)	Channel Number	RF Output Power (dBm)	Co-location
2400-2483.5	v4.0 LE	2402-2480	0-39 [40]	-0.08	YES

Note 1: Bluetooth LE (Low Energy) using GFSK modulation for DTS digital modulation.
Note 2: RF output power specifies that Maximum Peak Conducted Output Power.
Note 3: Co-location, Co-location is generally defined as simultaneously transmitting (co-transmitting) antennas within 20 cm of each other. (EUT has simultaneously co-transmitting that operating BT and WWAN.)

1.1.2 Antenna Information

Antenna Category	
<input checked="" type="checkbox"/>	Integral antenna (antenna permanently attached)
<input type="checkbox"/>	<input checked="" type="checkbox"/> Temporary RF connector provided
<input type="checkbox"/>	<input type="checkbox"/> No temporary RF connector provided Transmit chains bypass antenna and soldered temporary RF connector provided for connected measurement. In case of conducted measurements the transmitter shall be connected to the measuring equipment via a suitable attenuator and correct for all losses in the RF path.
<input type="checkbox"/>	External antenna (dedicated antennas)
<input type="checkbox"/>	<input type="checkbox"/> RF connector provided <input type="checkbox"/> Unique antenna connector. (e.g., MMCX, U.FL, IPX, and RP-SMA, RP-N type...) <input type="checkbox"/> Standard antenna connector. (e.g., SMA, N, BNC, and TNC type...)

Antenna General Information						
No.	EUT Model	Ant. Cat.	Ant. Type	Ant. Brand/Model	Ant. Connector	Gain (dBi)
1	-	Integral	$\lambda/4$ Monopole	-	-	-8.5



1.1.3 Type of EUT

Identify EUT	
EUT Serial Number	N/A
IMEI No.	355250050011164 / 355250050008145
Presentation of Equipment	<input type="checkbox"/> Production ; <input checked="" type="checkbox"/> Pre-Production ; <input type="checkbox"/> Prototype
Type of EUT	
<input checked="" type="checkbox"/> Stand-alone	
<input type="checkbox"/> Combined (EUT where the radio part is fully integrated within another device) Combined Equipment - Brand Name / Model No.: ...	
<input type="checkbox"/> Plug-in radio (EUT intended for a variety of host systems) Host System - Brand Name / Model No.: ...	
<input type="checkbox"/> Other:	

1.1.4 Test Signal Duty Cycle

Operated Mode for Worst Duty Cycle	
<input type="checkbox"/> Operated normally mode for worst duty cycle	
<input checked="" type="checkbox"/> Operated test mode for worst duty cycle	
Test Signal Duty Cycle (x)	Power Duty Factor [dB] – (10 log 1/x)
<input checked="" type="checkbox"/> 66.20% - test mode single channel - LE	1.79

1.1.5 EUT Operational Condition

Supply Voltage	<input checked="" type="checkbox"/> AC mains	<input checked="" type="checkbox"/> DC	
Type of DC Source	<input type="checkbox"/> Internal DC supply	<input checked="" type="checkbox"/> External DC adapter	<input checked="" type="checkbox"/> Battery



1.2 Accessories and Support Equipment

Accessories				
No.	Equipment	Brand Name	Model Name	Spec.
1	Cradle	Fujitsu limited	CA50601-1791	5.0Vdc, 1.5A
2	Battery	Fujitsu limited	CA54310-0046	3.8V, 3,020mA Li-ion

Support Equipment AC Line Conducted Emission Radiated Below / Above 1GHz Test				
No.	Equipment	Brand Name	Model Name	Spec.
1	AC Adapter (provided by client)	NTT docomo	AC Adaptor 04	I/P:100-240Vac, 50~60Hz O/P:5Vdc, 1800mA Power cord: 1m non-shielded cable w/ 2 cores.
2	Earphone	Apple	MD827FE/A	-

1.3 Testing Applied Standards

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

- ♦ 47 CFR FCC Part 15
- ♦ ANSI C63.10-2009
- ♦ FCC KDB 558074
- ♦ FCC KDB 412172



1.4 Testing Location Information

Testing Location				
<input checked="" type="checkbox"/>	HWA YA	ADD : No. 52, Hwa Ya 1st Rd., Hwa Ya Technology Park, Kwei-Shan Hsiang, Tao Yuan Hsien, Taiwan, R.O.C	TEL : 886-3-327-3456	FAX : 886-3-327-0973
Test Condition		Test Site No.	Test Engineer	Test Environment
RF Conducted		TH01-HY	Ian Du	23°C / 63%
AC Conduction		CO04-HY	Bill Hsiao	23°C / 51%
Radiated Emission		03CH05-HY	Daniel Hsu	25°C / 65%
				11-Mar-13

1.5 Measurement Uncertainty

ISO/IEC 17025 requires that an estimate of the measurement uncertainties associated with the emissions test results be included in the report. The measurement uncertainties given below are based on a 95% confidence level (based on a coverage factor (k=2)

Measurement Uncertainty			
Test Item	Uncertainty	Limit	
AC power-line conducted emissions	±2.26 dB	N/A	
Emission bandwidth, 6dB bandwidth	±1.42 %	N/A	
RF output power, conducted	±0.63 dB	N/A	
Power density, conducted	±0.81 dB	N/A	
Unwanted emissions, conducted	30 – 1000 MHz	±0.51 dB	N/A
	1 – 18 GHz	±0.67 dB	N/A
	18 – 40 GHz	±0.83 dB	N/A
	40 – 200 GHz	N/A	N/A
All emissions, radiated	30 – 1000 MHz	±2.56 dB	N/A
	1 – 18 GHz	±3.59 dB	N/A
	18 – 40 GHz	±3.82 dB	N/A
	40 – 200 GHz	N/A	N/A
Temperature	±0.8 °C	N/A	
Humidity	±3 %	N/A	
DC and low frequency voltages	±3 %	N/A	
Time	±1.42 %	N/A	
Duty Cycle	±1.42 %	N/A	



2 Test Configuration of EUT

2.1 The Worst Case Modulation Configuration

Worst Modulation Used for Conformance Testing				
Bluetooth Version	Transmit Chains (N _{TX})	Data Rate	Modulation Mode	RF Output Power (dBm)
v4.0 LE	1	1 Mbps	LE-1Mbps	-0.08

Note 1: Bluetooth LE (Low Energy) using GFSK modulation for DTS digital modulation.
Note 2: Modulation modes consist below configuration:
DSSS LE-1Mbps: GFSK (1Mbps)
Note 3: RF output power specifies that Maximum Peak Conducted Output Power.

2.2 Test Channel Frequencies Configuration

Test Channel Frequencies Configuration	
Bluetooth Mode	Test Channel Frequencies (MHz)
LE	2402-(F1), 2440-(F2), 2480-(F3)

2.3 The Worst Case Power Setting Parameter

The Worst Case Power Setting Parameter			
Test Software Version	UwTerminal v6.3		
Modulation Mode	2402 MHz	2440 MHz	2480 MHz
LE,1Mbps	Default	Default	Default



2.4 The Worst Case Measurement Configuration

The Worst Case Mode for Following Conformance Tests	
Tests Item	AC power-line conducted emissions
Condition	AC power-line conducted measurement for line and neutral Test Voltage: 120Vac / 60Hz
Operating Mode	Operating Mode Description
1	AC power & Radio link (BT)
2	AC power with cradle & Radio link (BT)

For operating mode 1 is the worst case and it was record in this test report.


The Worst Case Mode for Following Conformance Tests	
Tests Item	RF Output Power, Power Spectral Density, 6 dB Bandwidth
Test Condition	Conducted measurement at transmit chains
Modulation Mode	LE-1Mbps

The Worst Case Mode for Following Conformance Tests							
Tests Item	Transmitter Radiated Unwanted Emissions Transmitter Radiated Bandedge Emissions						
Test Condition	Radiated measurement						
User Position	<input type="checkbox"/> EUT will be placed in fixed position. <input type="checkbox"/> EUT will be placed in mobile position and operating multiple positions. EUT shall be performed two orthogonal planes. The worst planes is X. <input checked="" type="checkbox"/> EUT will be a hand-held or body-worn battery-powered devices and operating multiple positions. EUT shall be performed two or three orthogonal planes. The worst plane is X.						
Pretesting Mode < 1GHz	<input checked="" type="checkbox"/> 1. AC power & Radio link (BT) <input checked="" type="checkbox"/> 2. AC power with cradle & Radio link (BT)						
Orthogonal Planes of EUT	<table><thead><tr><th>X Plane</th><th>Y Plane</th><th>Z Plane</th></tr></thead><tbody><tr><td></td><td></td><td></td></tr></tbody></table>	X Plane	Y Plane	Z Plane			
X Plane	Y Plane	Z Plane					


For operating mode 1 is the worst case and it was record in this test report.

2.5 Test Setup Diagram


Test Setup Diagram – AC Line Conducted Emission Test

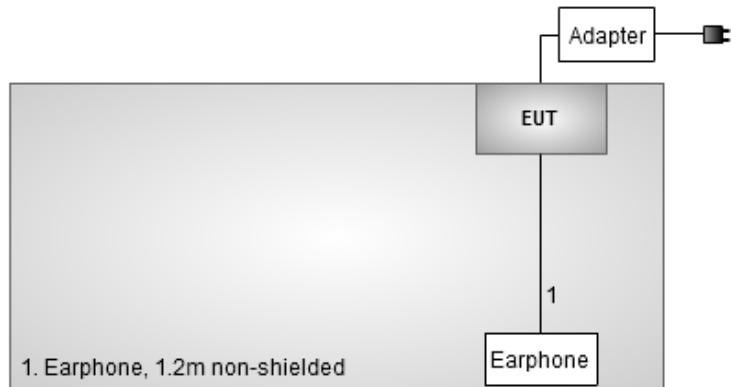

Test Setup Diagram - Radiated Below 1GHz Test

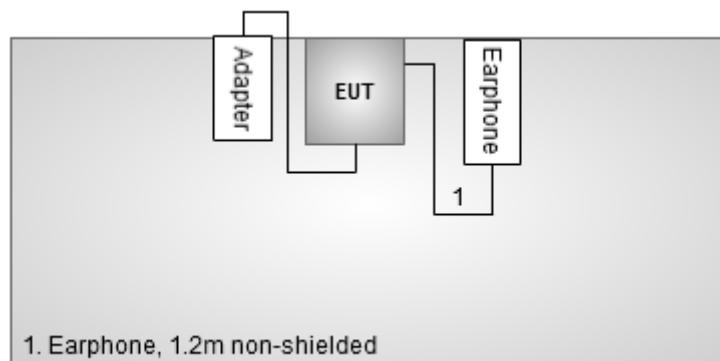

Test Setup Diagram - Radiated Above 1GHz Test

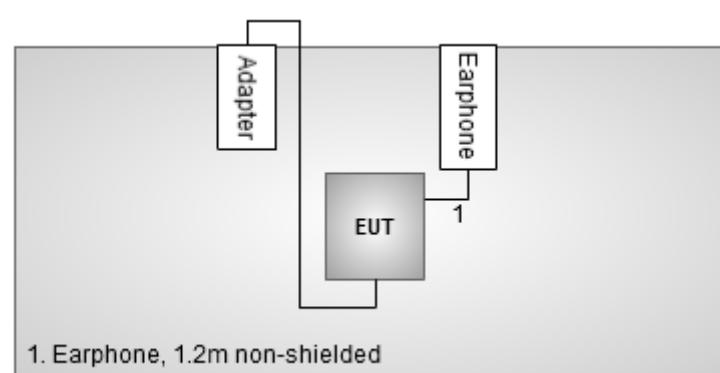

3 Transmitter Test Result

3.1 AC Power-line Conducted Emissions

3.1.1 AC Power-line Conducted Emissions Limit

AC Power-line Conducted Emissions Limit		
Frequency Emission (MHz)	Quasi-Peak	Average
0.15-0.5	66 - 56 *	56 - 46 *
0.5-5	56	46
5-30	60	50

Note 1: * Decreases with the logarithm of the frequency.


3.1.2 Measuring Instruments

Refer a test equipment and calibration data table in this test report.

3.1.3 Test Procedures

Test Method
<input checked="" type="checkbox"/> Refer as ANSI C63.10-2009, clause 6.2 for AC power-line conducted emissions.

3.1.4 Test Setup

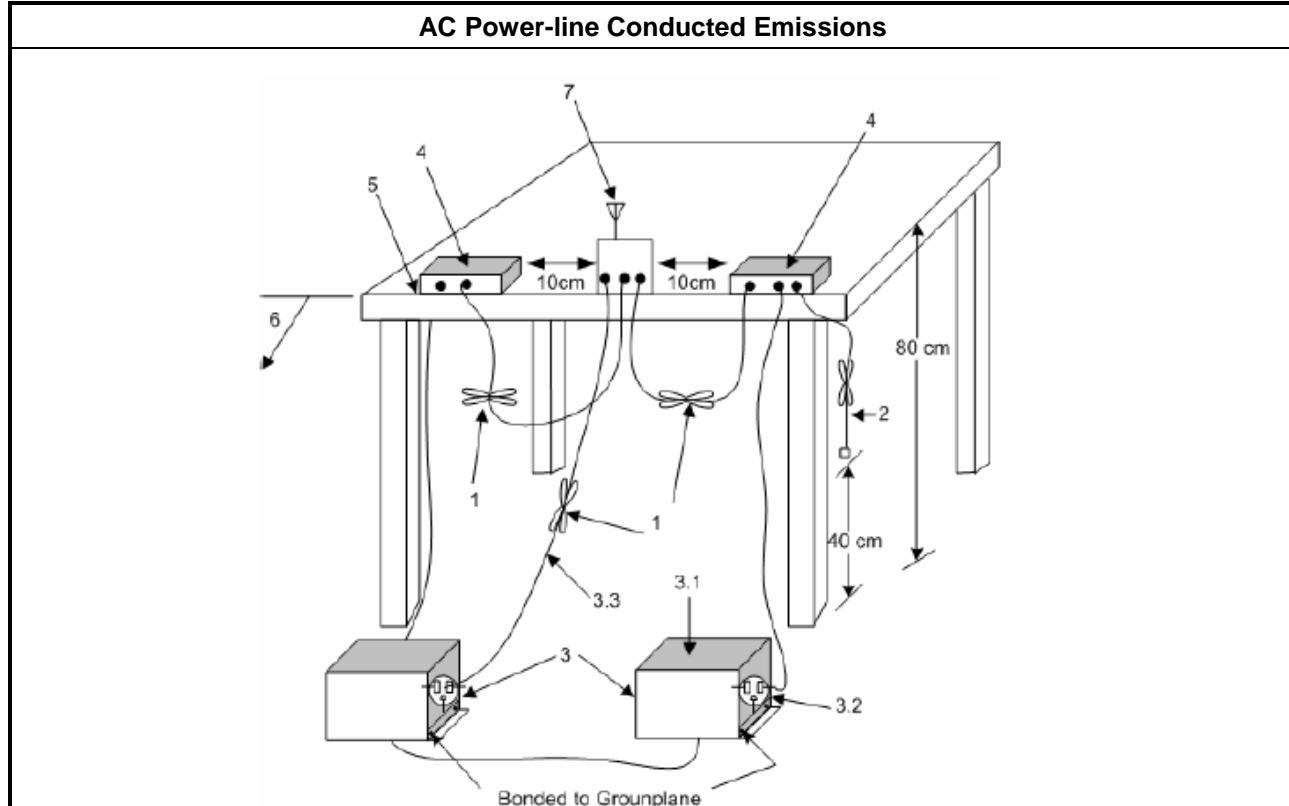




3.1.5 Test Result of AC Power-line Conducted Emissions

AC Power-line Conducted Emissions Result										
Operating Mode	1	Power Phase		Neutral						
Operating Function	AC power & Radio link (BT)									
Date: 2013-03-29										
Level (dBuV)	80	40	0	0.15	0.2	0.5	1	2		
Frequency (MHz)	30	20	10	5	2	1	0.5	0.15		
Freq	Level	Over Limit	Limit Line	Read Level	LISN Factor	Cable Loss	dB	Remark		
MHz	dBuV	dB	dBuV	dBuV						
1	0.2094380	43.59	-19.64	63.23	43.17	0.11	0.31	QP		
2	0.2094380	36.40	-16.83	53.23	35.98	0.11	0.31	Average		
3	1.110	36.40	-19.60	56.00	35.97	0.11	0.32	QP		
4	1.110	25.00	-21.00	46.00	24.57	0.11	0.32	Average		
5	1.590	39.57	-16.43	56.00	39.08	0.12	0.37	QP		
6	1.590	32.76	-13.24	46.00	32.27	0.12	0.37	Average		
7	1.990	38.27	-17.73	56.00	37.74	0.13	0.40	QP		
8	1.990	29.79	-16.21	46.00	29.26	0.13	0.40	Average		
9	2.790	37.95	-18.05	56.00	37.46	0.14	0.35	QP		
10	2.790	32.65	-13.35	46.00	32.16	0.14	0.35	Average		
11	3.070	36.97	-19.03	56.00	36.49	0.14	0.34	QP		
12	3.070	31.55	-14.45	46.00	31.07	0.14	0.34	Average		
13	4.220	37.13	-18.87	56.00	36.68	0.15	0.30	QP		
14	4.220	26.95	-19.05	46.00	26.50	0.15	0.30	Average		
15	12.720	31.64	-28.36	60.00	31.02	0.26	0.36	QP		
16	12.720	25.73	-24.27	50.00	25.11	0.26	0.36	Average		

Note 1: ">20dB" means emission levels that exceed the level of 20 dB below the applicable limit.

Note 2: "N/F" means Nothing Found emissions (No emissions were detected.)

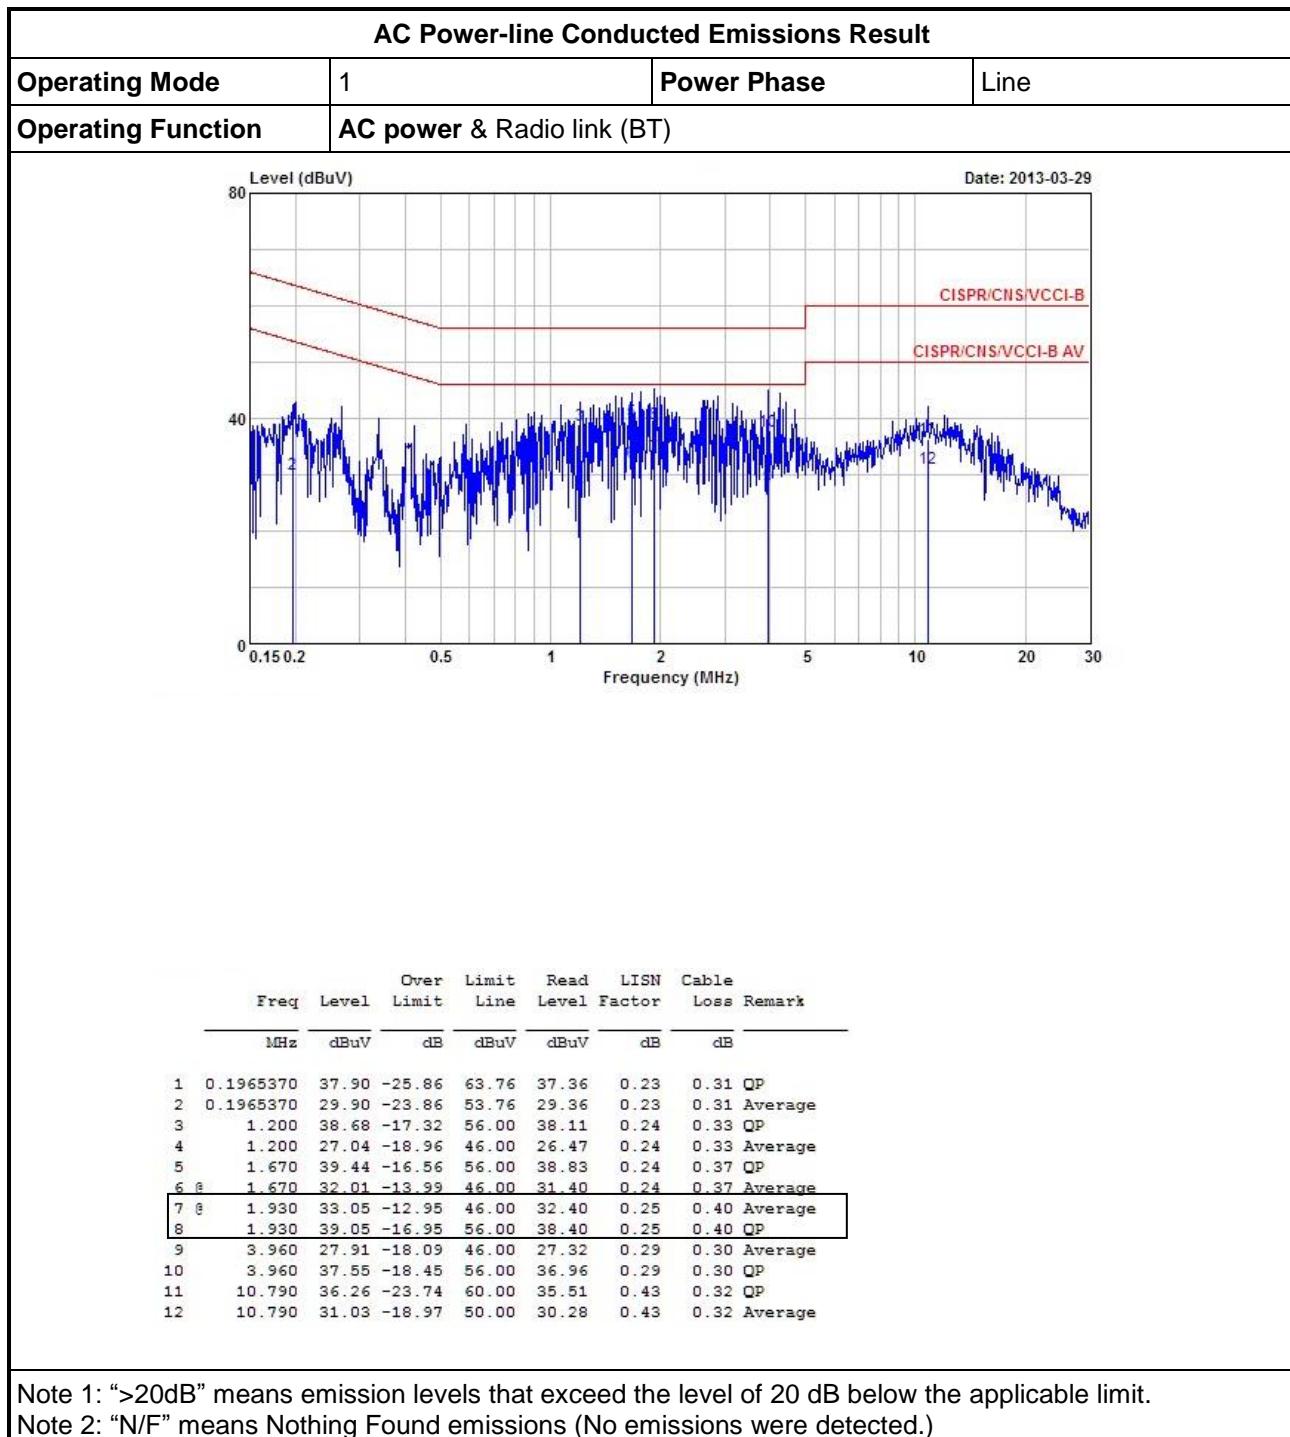

Note 1: ">20dB" means emission levels that exceed the level of 20 dB below the applicable limit.

Note 2: "N/F" means Nothing Found emissions (No emissions were detected.)

3.2 6dB Bandwidth

3.2.1 6dB Bandwidth Limit

6dB Bandwidth Limit
Systems using digital modulation techniques:
<input checked="" type="checkbox"/> 6 dB bandwidth \geq 500 kHz.


3.2.2 Measuring Instruments

Refer a test equipment and calibration data table in this test report.

3.2.3 Test Procedures


Test Method
<input checked="" type="checkbox"/> For the emission bandwidth shall be measured using one of the options below:
<input checked="" type="checkbox"/> Refer as FCC KDB 558074, clause 7.1 Option 1 for 6 dB bandwidth measurement.
<input type="checkbox"/> Refer as FCC KDB 558074, clause 7.2 Option 2 for 6 dB bandwidth measurement.
<input type="checkbox"/> Refer as ANSI C63.10, clause 6.9.1 for occupied bandwidth testing.
<input checked="" type="checkbox"/> For conducted measurement.
<input checked="" type="checkbox"/> The EUT supports single transmit chain and measurements performed on this transmit chain.
<input type="checkbox"/> The EUT supports diversity transmitting and the results on transmit chain port 1 is the worst case.

3.2.4 Test Setup

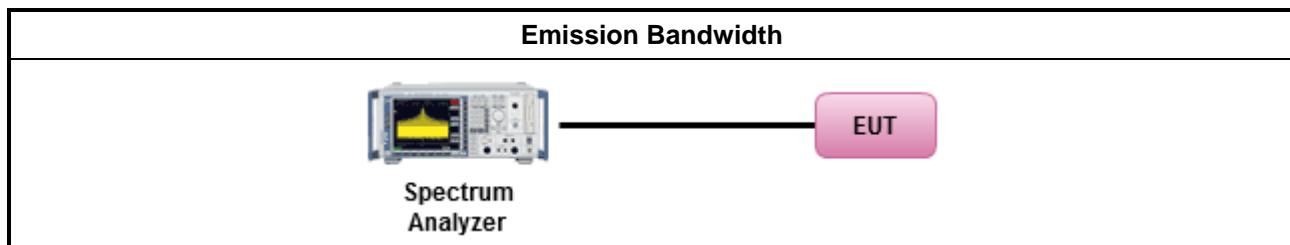

3.2.5 Test Result of Emission Bandwidth

Emission Bandwidth Result			
Modulation Mode	Freq. (MHz)	99% Bandwidth (kHz)	6dB Bandwidth (kHz)
LE-1Mbps	2402	1.081	665.22
LE-1Mbps	2440	1.081	669.57
LE-1Mbps	2480	1.081	678.26
Limit		N/A	≥ 500 kHz
Result			Complied

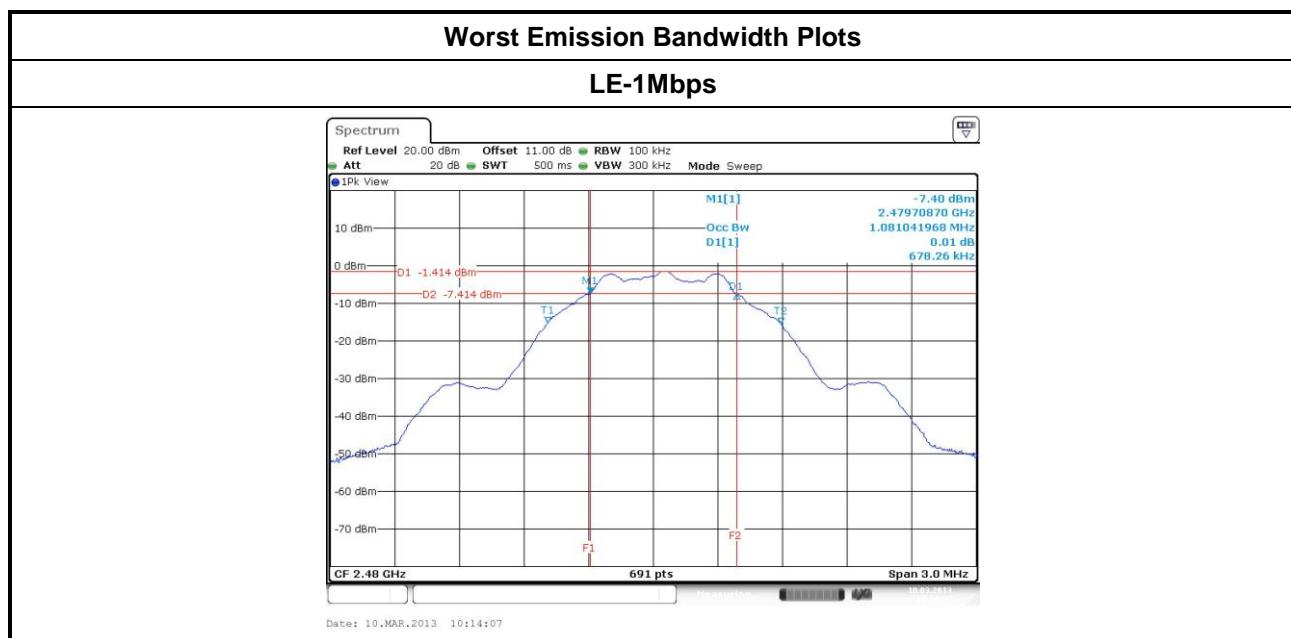



3.3 RF Output Power

3.3.1 RF Output Power Limit

RF Output Power Limit for Digital Modulation Systems	
Maximum Peak Conducted Output Power or Maximum Conducted Output Power Limit	
<input checked="" type="checkbox"/> 2400-2483.5 MHz Band:	
	<input checked="" type="checkbox"/> If $G_{TX} \leq 6$ dBi, then $P_{Out} \leq 30$ dBm (1 W)
	<input type="checkbox"/> Point-to-multipoint systems (P2M): If $G_{TX} > 6$ dBi, then $P_{Out} = 30 - (G_{TX} - 6)$ dBm
e.i.r.p. Power Limit:	
<input checked="" type="checkbox"/> 2400-2483.5 MHz Band	
	<input checked="" type="checkbox"/> Point-to-multipoint systems (P2M): $P_{eirp} \leq 36$ dBm (4 W)
P_{out} = maximum peak conducted output power or maximum conducted output power in dBm, G_{TX} = the maximum transmitting antenna directional gain in dBi. P_{eirp} = e.i.r.p. Power in dBm.	


3.3.2 Measuring Instruments

Refer a test equipment and calibration data table in this test report.

3.3.3 Test Procedures

Test Method	
<input checked="" type="checkbox"/> Maximum Peak Conducted Output Power	
<input checked="" type="checkbox"/>	Refer as ANSI C63.10, clause 6.10.2.1 a) for peak power meter.
<input type="checkbox"/>	Refer as ANSI C63.10, clause 6.10.2.1 a) for spectrum analyzer - (RBW \geq EBW).
<input checked="" type="checkbox"/> Refer as FCC KDB 558074, clause 2 for conducted measurement.	
<input checked="" type="checkbox"/>	The EUT supports single transmit chain and measurements performed on this transmit chain.
<input type="checkbox"/>	The EUT supports diversity transmitting and the results on transmit chain port 1 is the worst case.

3.3.4 Test Setup

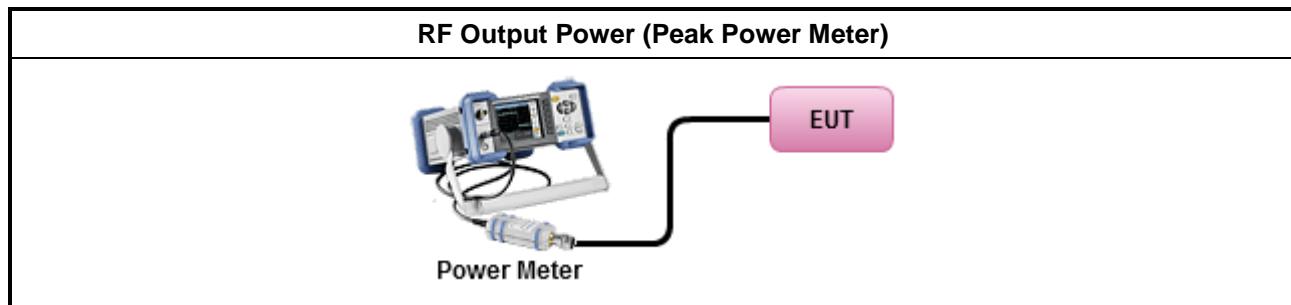



3.3.5 Test Result of Maximum Peak Conducted Output Power

Maximum Peak Conducted Output Power Result						
Condition		RF Output Power (dBm)				
Modulation Mode	Freq. (MHz)	RF Output Power	Power Limit	Antenna Gain (dBi)	EIRP Power	EIRP Limit
LE-1Mbps	2402	-0.08	30	-8.5	-8.58	36
LE-1Mbps	2440	-0.26	30	-8.5	-8.76	36
LE-1Mbps	2480	-0.55	30	-8.5	-9.05	36
Result		Complied				

3.4 Power Spectral Density

3.4.1 Power Spectral Density Limit

Power Spectral Density Limit
<input checked="" type="checkbox"/> Power Spectral Density (PSD) $\leq 8 \text{ dBm/3kHz}$


3.4.2 Measuring Instruments

Refer a test equipment and calibration data table in this test report.

3.4.3 Test Procedures

Test Method
<input checked="" type="checkbox"/> Power spectral density procedures that the same method as used to determine the conducted output power shall be used to determine the power spectral density. In addition, the use of a peak PSD procedure will always result in a "worst-case" measured level for comparison to the limit. Therefore, whenever the DTS bandwidth exceeds 500 kHz, it is acceptable to utilize the peak PSD procedure to demonstrate compliance to the PSD limit, regardless of how the fundamental output power was measured. For the power spectral density shall be measured using below options:
<input checked="" type="checkbox"/> Refer as FCC KDB 558074, clause 9.1 Option 1 - (RBW $\geq 3\text{kHz}$; sweep=auto, detector=peak).
<input type="checkbox"/> Refer as FCC KDB 558074, clause 9.2 Option 2 - (RBW $\geq 3\text{kHz}$; sweep=auto, average=100).
<input type="checkbox"/> Refer as FCC KDB 558074, clause 9.3 Option 3 - (RBW $\geq 3\text{kHz}$; slow sweep speed).
<input type="checkbox"/> Refer as FCC KDB 558074, clause 9.4 Alternative 1 (average PSD; Add 10log (1/duty cycle)).
<input type="checkbox"/> RBW $>3\text{kHz}$, add the bandwidth correction factor (BWCF) adjusting in PSD per 3kHz.
<input checked="" type="checkbox"/> Refer as FCC KDB 558074, clause 2 for conducted measurement.
<input checked="" type="checkbox"/> The EUT supports single transmit chain and measurements performed on this transmit chain.
<input type="checkbox"/> The EUT supports diversity transmitting and the results on transmit chain port 1 is the worst case.


3.4.4 Test Setup

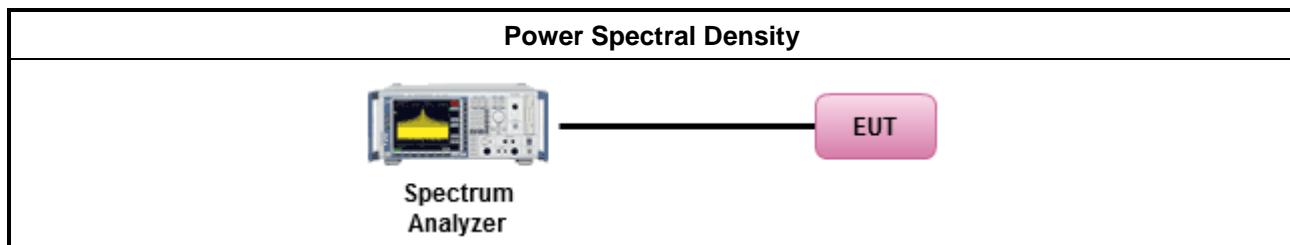

3.4.5 Test Result of Power Spectral Density


Power Spectral Density Result (dBm/3kHz)			
Modulation Mode	Freq. (MHz)	PSD	PSD Limit
LE-1Mbps	2402	-15.99	8
LE-1Mbps	2440	-16.21	8
LE-1Mbps	2480	-16.55	8
Result		Complied	

Note 1: PSD [dBm/3kHz] = PSD [dBm/100kHz] + BWFC [-15.2 dB]

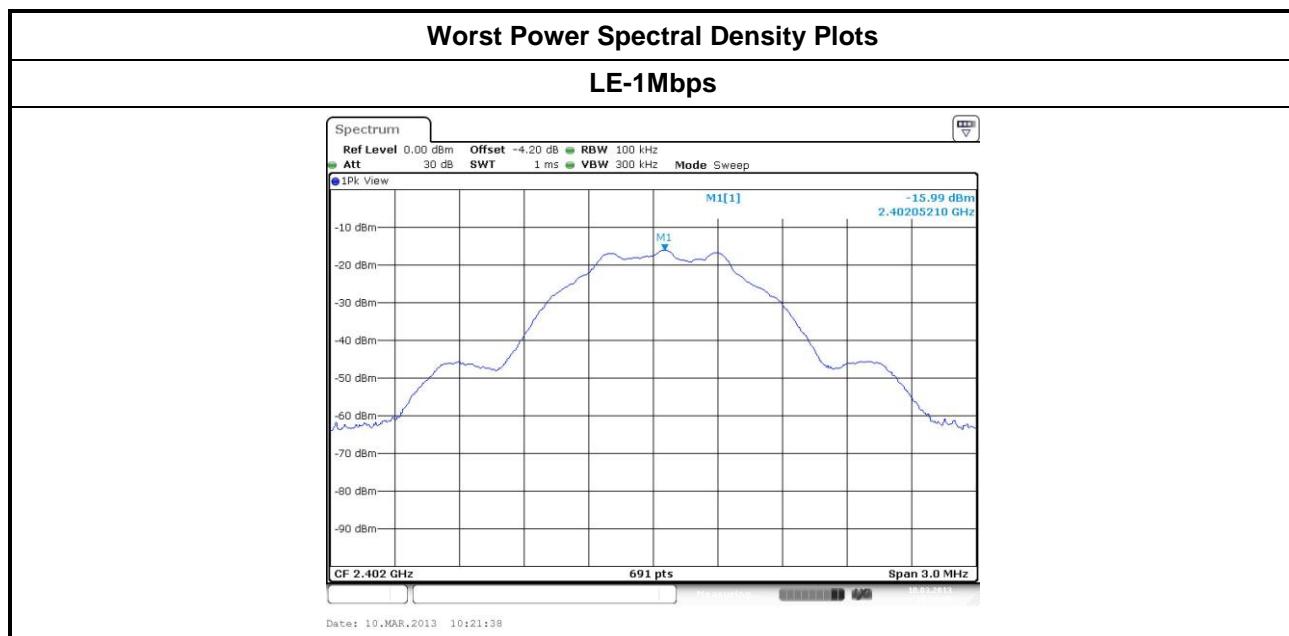

3.5 Transmitter Radiated Bandedge Emissions

3.5.1 Transmitter Radiated Bandedge Emissions Limit

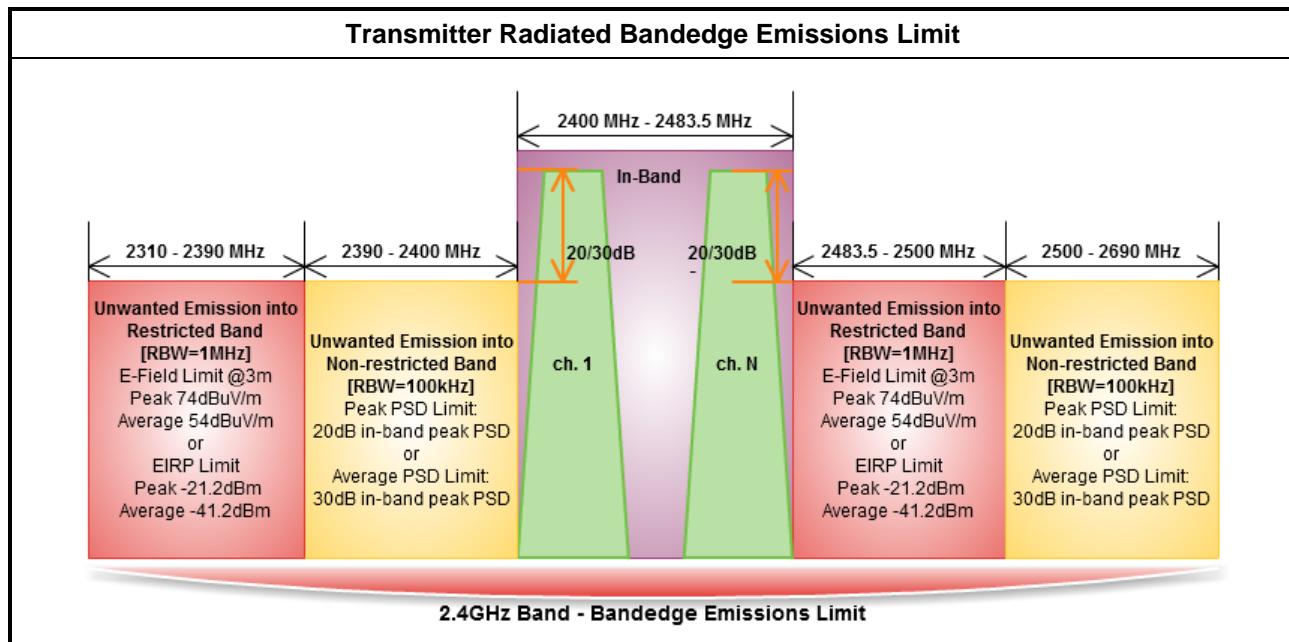


3.5.2 Measuring Instruments

Refer a test equipment and calibration data table in this test report.

3.5.3 Test Procedures

Test Method – General Information	
<input checked="" type="checkbox"/>	The average emission levels shall be measured in [duty cycle \geq 98 or duty factor].
<input checked="" type="checkbox"/>	Refer as ANSI C63.10, clause 6.9.2.2 bandedge testing shall be performed at the lowest frequency channel and highest frequency channel within the allowed operating band.
<input checked="" type="checkbox"/>	For the transmitter unwanted emissions shall be measured using following options below:
<input checked="" type="checkbox"/>	For unwanted emissions into non-restricted bands. Peak conducted output power measured within any 100 kHz outside the authorized frequency band shall be attenuated by at least 20 dB relative to the maximum measured in-band peak PSD level.
<input checked="" type="checkbox"/>	For unwanted emissions into restricted bands.
	<input checked="" type="checkbox"/> Refer as ANSI C63.10, clause 4.2.3.2.3 (Reduced VBW). $VBW \geq 1/T$, where T is pulse time.
	<input type="checkbox"/> Refer as ANSI C63.10, clause 4.2.3.2.4 average value of pulsed emissions.
	<input checked="" type="checkbox"/> Refer as ANSI C63.10, clause 4.2.3.2.2 measurement procedure peak limit.
<input checked="" type="checkbox"/>	For the transmitter bandedge emissions shall be measured using following options below:
	<input checked="" type="checkbox"/> Refer as ANSI C63.10, clause 6.9.2 for band-edge testing.
	<input type="checkbox"/> Refer as ANSI C63.10, clause 6.9.3 for marker-delta method for band-edge measurements.
	<input checked="" type="checkbox"/> Refer as ANSI C63.10, clause 7.7.9 for band-edge testing into non-restricted bands.
<input checked="" type="checkbox"/>	For radiated measurement, refer as FCC KDB 558074, clause 10.2.1.
<input type="checkbox"/>	For conducted measurement, refer as FCC KDB 558074, clause 10.2.2.

3.5.4 Test Setup

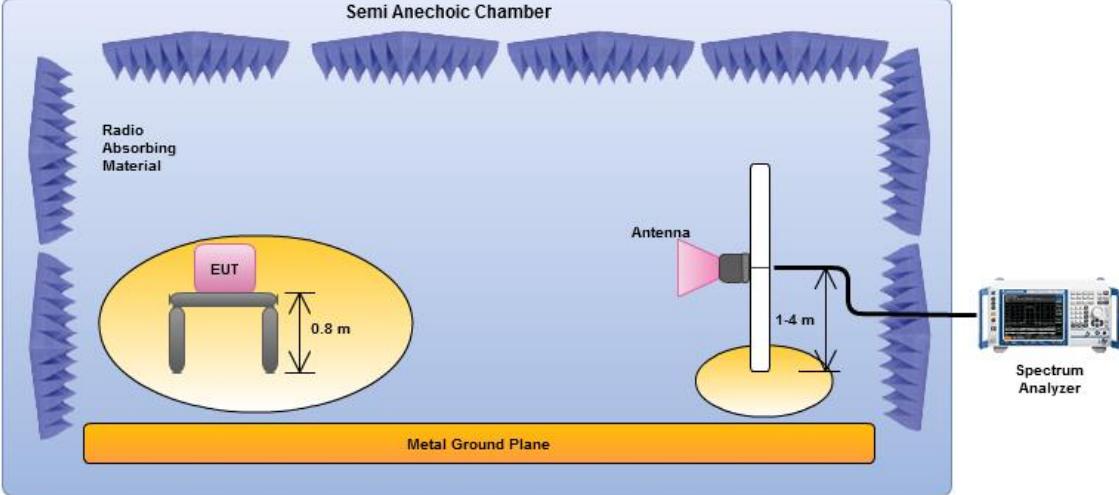Transmitter Radiated Bandedge Emissions	
	
Electric field tests shall be performed in transmitter bandedge emissions using a calibrated horn antenna.	



3.5.5 Test Result of Transmitter Radiated Bandedge Emissions

Transmitter Radiated Bandedge Emissions Result								
Modulation	LE-1Mbps		Non-restricted Band Emissions					
Non-restricted Band (MHz)	Test Ch. Freq. (MHz)	In-band PSD [i] (dBuV/100kHz)	NBE Freq. (MHz)	Out-band PSD [o] (dBuV/100kHz)	[i] – [o] (dB)	Limit (dB)	Level Type	Pol. note 1
2390-2400	2402	91.03	2399.97	33.47	57.56	20	PK	V
2500~2690	2480	90.92	2508.70	29.70	61.22	20	PK	V
Low Bandedge				Up Bandedge				

Note 1: Measurement worst emissions of receive antenna polarization: V (Vertical)

Transmitter Radiated Bandedge Emissions Result								
Modulation	LE-1Mbps		Restricted Band Emissions					
Restricted Band (MHz)	Test Ch. Freq. (MHz)	In-band PSD [i] (dBuV/1MHz)	RBE Freq. (MHz)	Measure Distance (m)	Out-Band Level (dBuV/m)	Limit (dBuV/m)	Level Type	Pol. note 1
2310-2390	2402	91.54	2363.11	3	40.07	74	PK	V
2310-2390	2402	90.33	2374.13	3	26.76	54	AV	V
2483.5-2500	2480	91.36	2483.53	3	42.55	74	PK	V
2483.5-2500	2480	90.30	2483.53	3	27.62	54	AV	V

Note 1: Measurement worst emissions of receive antenna polarization: V (Vertical).
Note 2: Average emission setting: RBW=1MHz; VBW \geq 1/T, where T is "Pulse On Time", e.g., LE VBW \geq 1/625us, VBW=3kHz.



3.6 Transmitter Radiated Unwanted Emissions

3.6.1 Transmitter Radiated Unwanted Emissions Limit

Restricted Band Emissions Limit			
Frequency Range (MHz)	Field Strength (uV/m)	Field Strength (dBuV/m)	Measure Distance (m)
0.009~0.490	2400/F(kHz)	48.5 - 13.8	300
0.490~1.705	24000/F(kHz)	33.8 - 23	30
1.705~30.0	30	29	30
30~88	100	40	3
88~216	150	43.5	3
216~960	200	46	3
Above 960	500	54	3

Note 1: Test distance for frequencies at or above 30 MHz, measurements may be performed at a distance other than the limit distance provided they are not performed in the near field and the emissions to be measured can be detected by the measurement equipment. When performing measurements at a distance other than that specified, the results shall be extrapolated to the specified distance using an extrapolation factor of 20 dB/decade (inverse of linear distance for field-strength measurements, inverse of linear distance-squared for power-density measurements).

Note 2: Test distance for frequencies at below 30 MHz, measurements may be performed at a distance closer than the EUT limit distance; however, an attempt should be made to avoid making measurements in the near field. When performing measurements below 30 MHz at a closer distance than the limit distance, the results shall be extrapolated to the specified distance by either making measurements at a minimum of two or more distances on at least one radial to determine the proper extrapolation factor or by using the square of an inverse linear distance extrapolation factor (40 dB/decade). The test report shall specify the extrapolation method used to determine compliance of the EUT.

Un-restricted Band Emissions Limit	
RF output power procedure	Limit (dB)
Peak output power procedure	20
Average output power procedure	30

Note 1: If the peak output power procedure is used to measure the fundamental emission power to demonstrate compliance to requirements, then the peak conducted output power measured within any 100 kHz outside the authorized frequency band shall be attenuated by at least 20 dB relative to the maximum measured in-band peak PSD level.

Note 2: If the average output power procedure is used to measure the fundamental emission power to demonstrate compliance to requirements, then the power in any 100 kHz outside of the authorized frequency band shall be attenuated by at least 30 dB relative to the maximum measured in-band average PSD level.

3.6.2 Measuring Instruments

Refer a test equipment and calibration data table in this test report.




3.6.3 Test Procedures

Test Method – General Information	
<input checked="" type="checkbox"/>	Measurements may be performed at a distance other than the limit distance provided they are not performed in the near field and the emissions to be measured can be detected by the measurement equipment. When performing measurements at a distance other than that specified, the results shall be extrapolated to the specified distance using an extrapolation factor of 20 dB/decade (inverse of linear distance for field-strength measurements, inverse of linear distance-squared for power-density measurements).
<input type="checkbox"/>	Measurements in the frequency range 10 GHz - 18GHz are typically made at a closer distance 1m, because the instrumentation noise floor is typically close to the radiated emission limit.
<input type="checkbox"/>	Measurements in the frequency range above 18 GHz - 25GHz are typically made at a closer distance 0.5m, because the instrumentation noise floor is typically close to the radiated emission limit.
<input type="checkbox"/>	The average emission levels shall be measured in [duty cycle \geq 98 or duty factor].
<input checked="" type="checkbox"/>	For the transmitter unwanted emissions shall be measured using following options below:
<input checked="" type="checkbox"/>	For unwanted emissions into non-restricted bands. Peak conducted output power measured within any 100 kHz outside the authorized frequency band shall be attenuated by at least 20 dB relative to the maximum measured in-band peak PSD level.
<input checked="" type="checkbox"/>	For unwanted emissions into restricted bands.
	<input checked="" type="checkbox"/> Refer as ANSI C63.10, clause 4.2.3.2.3 (Reduced VBW). $VBW \geq 1/T$, where T is pulse time.
	<input type="checkbox"/> Refer as ANSI C63.10, clause 4.2.3.2.4 average value of pulsed emissions.
	<input checked="" type="checkbox"/> Refer as ANSI C63.10, clause 4.2.3.2.2 measurement procedure peak limit.
<input checked="" type="checkbox"/>	For radiated measurement.
	<input checked="" type="checkbox"/> Refer as ANSI C63.10, clause 6.4 for radiated emissions from below 30 MHz.
	<input checked="" type="checkbox"/> Refer as ANSI C63.10, clause 6.5 for radiated emissions from 30 MHz to 1000 MHz.
	<input checked="" type="checkbox"/> Refer as ANSI C63.10, clause 6.6 for radiated emissions from above 1 GHz.

3.6.4 Test Setup

Transmitter Radiated Unwanted Emissions

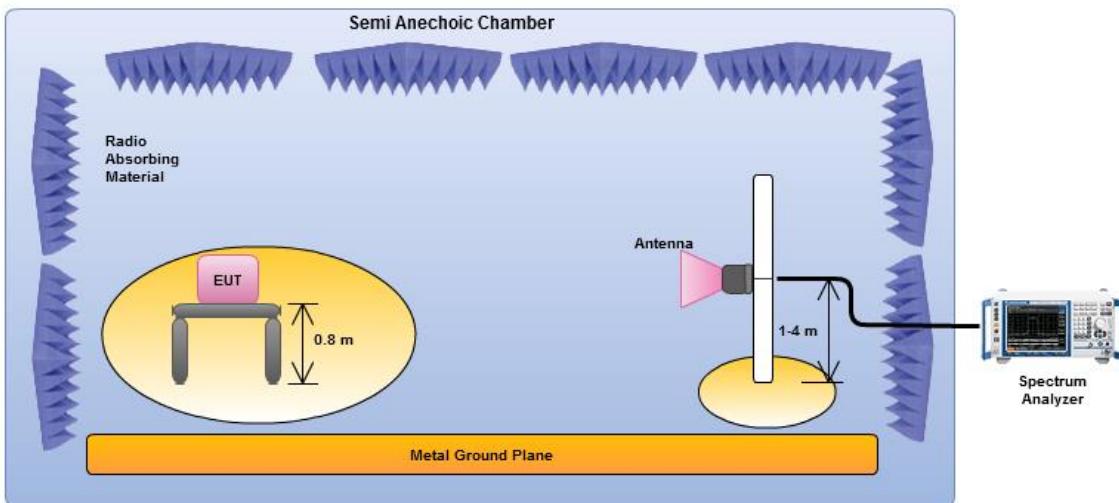


Magnetic field tests shall be performed in the frequency range of 9 kHz to 30 MHz using a calibrated loop antenna. Electric field tests shall be performed in the frequency range of 30 MHz to 1000 MHz using a calibrated bi-log antenna and the frequency range of 1 GHz to 40 GHz using a calibrated horn antenna.

3.6.5 Transmitter Radiated Unwanted Emissions (Below 30MHz)

All amplitude of spurious emissions that are attenuated by more than 20 dB below the permissible value has no need to be reported.




3.6.6 Transmitter Radiated Unwanted Emissions (Below 1GHz)

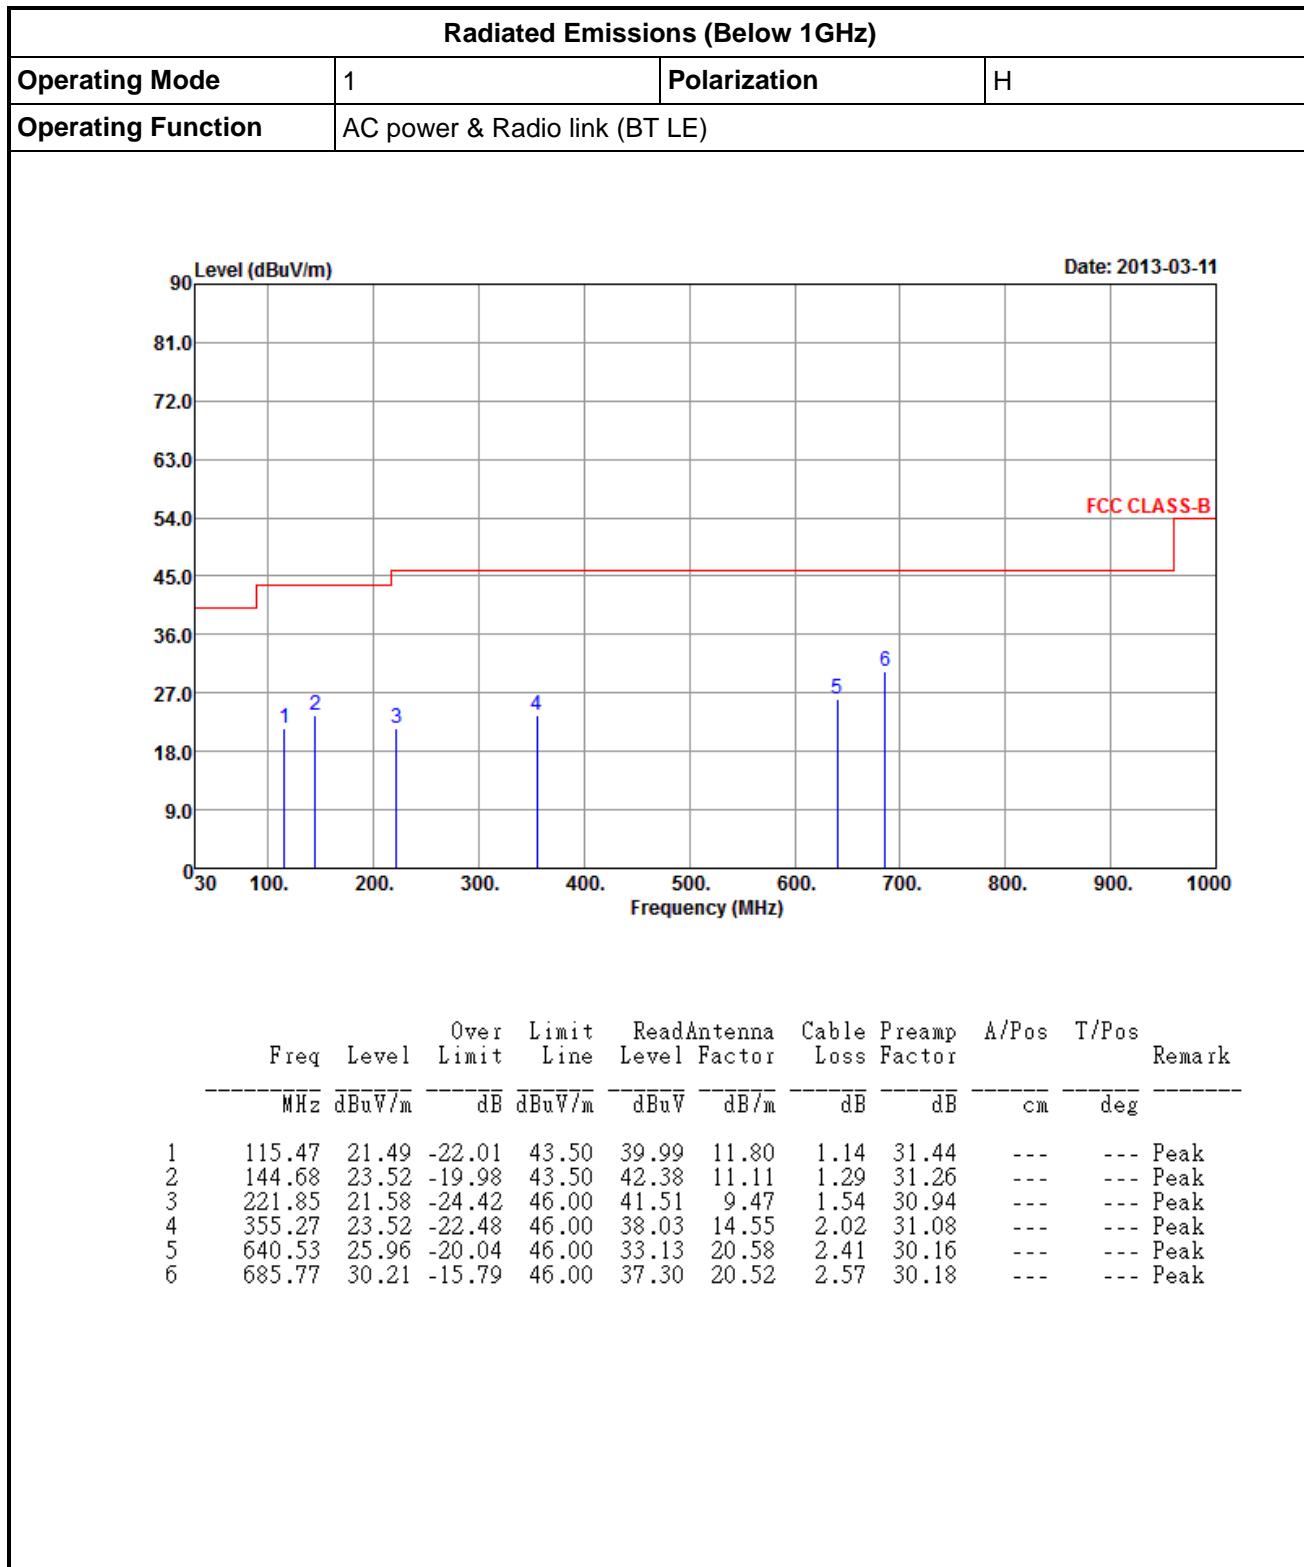

Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.

Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)

Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)

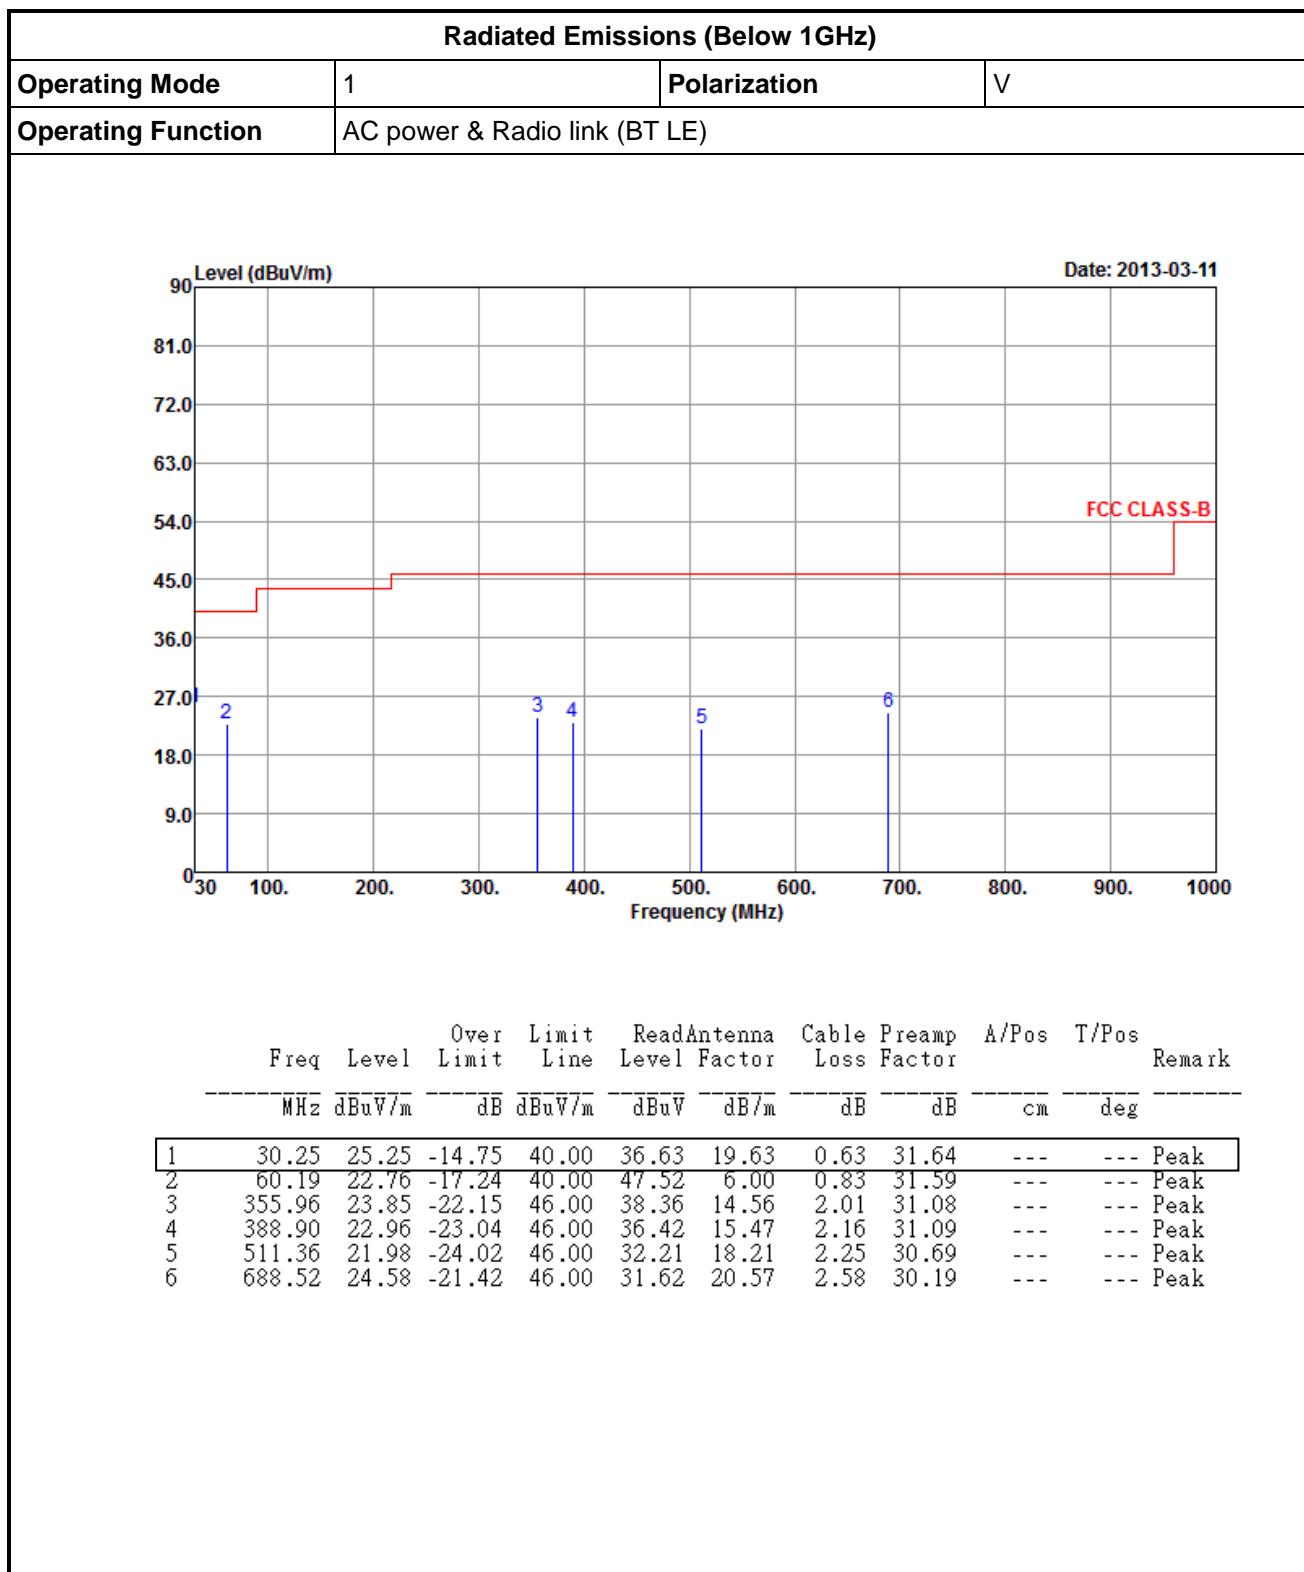

Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.

Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)

Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)




3.6.7 Transmitter Radiated Unwanted Emissions (Above 1GHz)


Transmitter Radiated Unwanted Emissions (Above 1GHz)													
Modulation Mode	LE-1Mbps			Test Freq. (FX)	F1								
Operating Mode	1			Polarization	H								
Level (dB _{BuV/m})													
Date: 2013-03-11													
FCC CLASS-B													
FCC CLASS-B (AVG)													
Frequency (MHz)													
0 1000 4000 5000 6000 7000 8000 10000 12000 14000 16000 18000 20000 22000 25000													
110 99.0 88.0 77.0 66.0 55.0 44.0 33.0 22.0 11.0 0													
0 1000 4000 5000 6000 7000 8000 10000 12000 14000 16000 18000 20000 22000 25000													
Level (dB _{BuV/m})													
Frequency (MHz)													
1050.00 26.53 -27.47 54.00 33.73 27.91 2.95 38.06 --- --- Average													
1050.00 37.68 -36.32 74.00 44.88 27.91 2.95 38.06 --- --- Peak													
4804.00 32.16 -21.84 54.00 26.36 34.26 6.50 34.96 --- --- Average													
4804.00 44.42 -29.58 74.00 38.62 34.26 6.50 34.96 --- --- Peak													
7206.00 36.95 -17.05 54.00 27.65 36.06 8.22 34.98 --- --- Average													
7206.00 49.30 -24.70 74.00 40.00 36.06 8.22 34.98 --- --- Peak													
Over Limit Line ReadAntenna Cable Preamp A/Pos T/Pos Remark													
Freq MHz Level dB dB _{BuV/m} Limit dB dB _{BuV/m} Line dB dB _{BuV} ReadAntenna dB dB Cable dB Preamp dB cm deg													
1 1050.00 26.53 -27.47 54.00 33.73 27.91 2.95 38.06 --- --- Average													
2 1050.00 37.68 -36.32 74.00 44.88 27.91 2.95 38.06 --- --- Peak													
3 4804.00 32.16 -21.84 54.00 26.36 34.26 6.50 34.96 --- --- Average													
4 4804.00 44.42 -29.58 74.00 38.62 34.26 6.50 34.96 --- --- Peak													
5 7206.00 36.95 -17.05 54.00 27.65 36.06 8.22 34.98 --- --- Average													
6 7206.00 49.30 -24.70 74.00 40.00 36.06 8.22 34.98 --- --- Peak													
Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.													
Note 2: Measurement receive antenna polarization: H (Horizontal), V (Vertical)													
Note 3: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.													
Note 4: For un-restricted bands, unwanted emissions shall be attenuated by at least 20 dB relative to the maximum measured in-band level.													
Note 5: Average emission setting: RBW=1MHz; VBW \geq 1/T, where T is "Pulse On Time", e.g., LE VBW \geq 1/625us, VBW=3kHz.													



Transmitter Radiated Unwanted Emissions (Above 1GHz)										
Modulation Mode		LE-1Mbps			Test Freq. (FX)		F1			
Operating Mode		1			Polarization		V			
Date: 2013-03-11										
1	1050.00	26.82	-27.18	54.00	36.97	27.91	0.00	38.06	---	--- Average
2	1050.00	38.11	-35.89	74.00	48.26	27.91	0.00	38.06	---	--- Peak
3	4804.00	32.89	-21.11	54.00	33.59	34.26	0.00	34.96	---	--- Average
4	4804.00	45.27	-28.73	74.00	45.97	34.26	0.00	34.96	---	--- Peak
5	7206.00	36.97	-17.03	54.00	35.89	36.06	0.00	34.98	---	--- Average
6	7206.00	48.89	-25.11	74.00	47.81	36.06	0.00	34.98	---	--- Peak

Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.
 Note 2: Measurement receive antenna polarization: H (Horizontal), V (Vertical)
 Note 3: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.
 Note 4: For un-restricted bands, unwanted emissions shall be attenuated by at least 20 dB relative to the maximum measured in-band level.
 Note 5: Average emission setting: RBW=1MHz; VBW $\geq 1/T$, where T is "Pulse On Time", e.g., LE VBW $\geq 1/625\mu s$, VBW=3kHz.

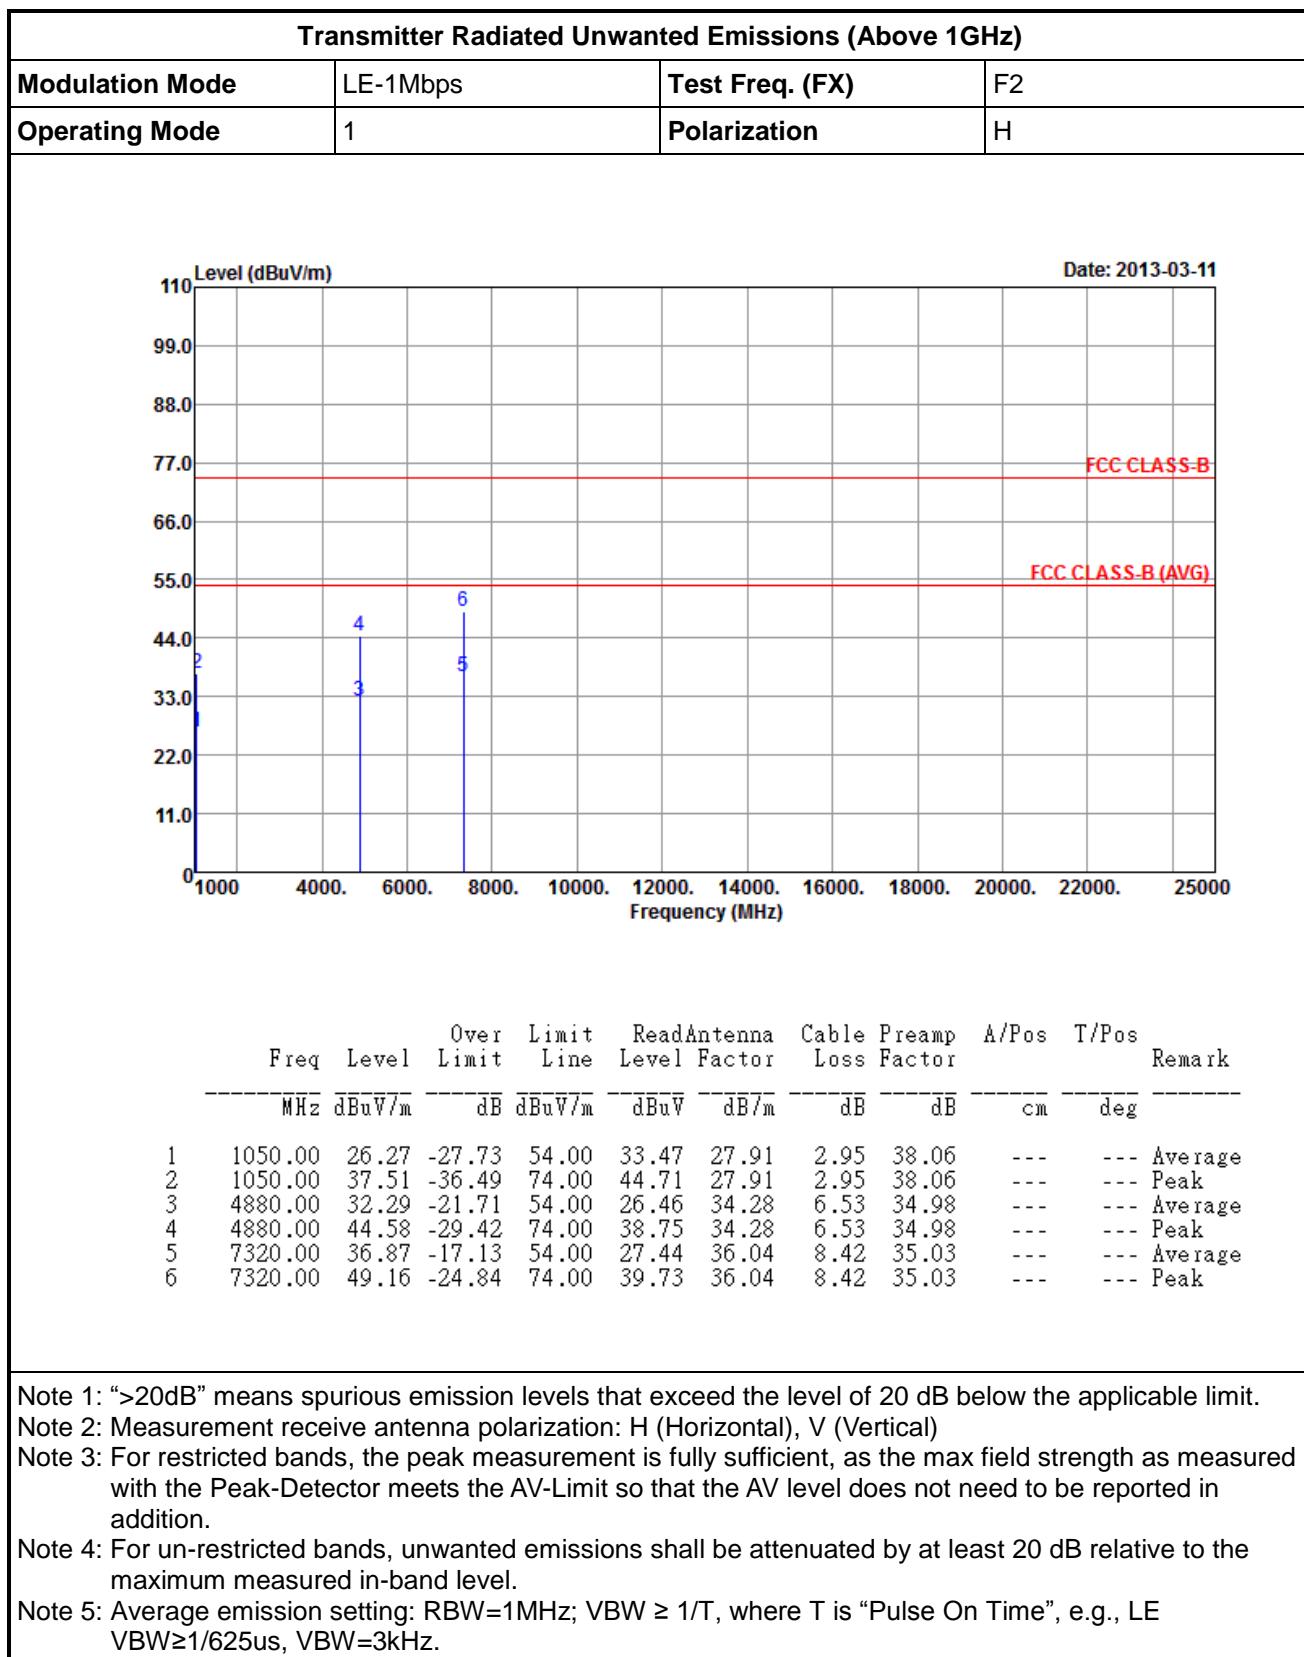


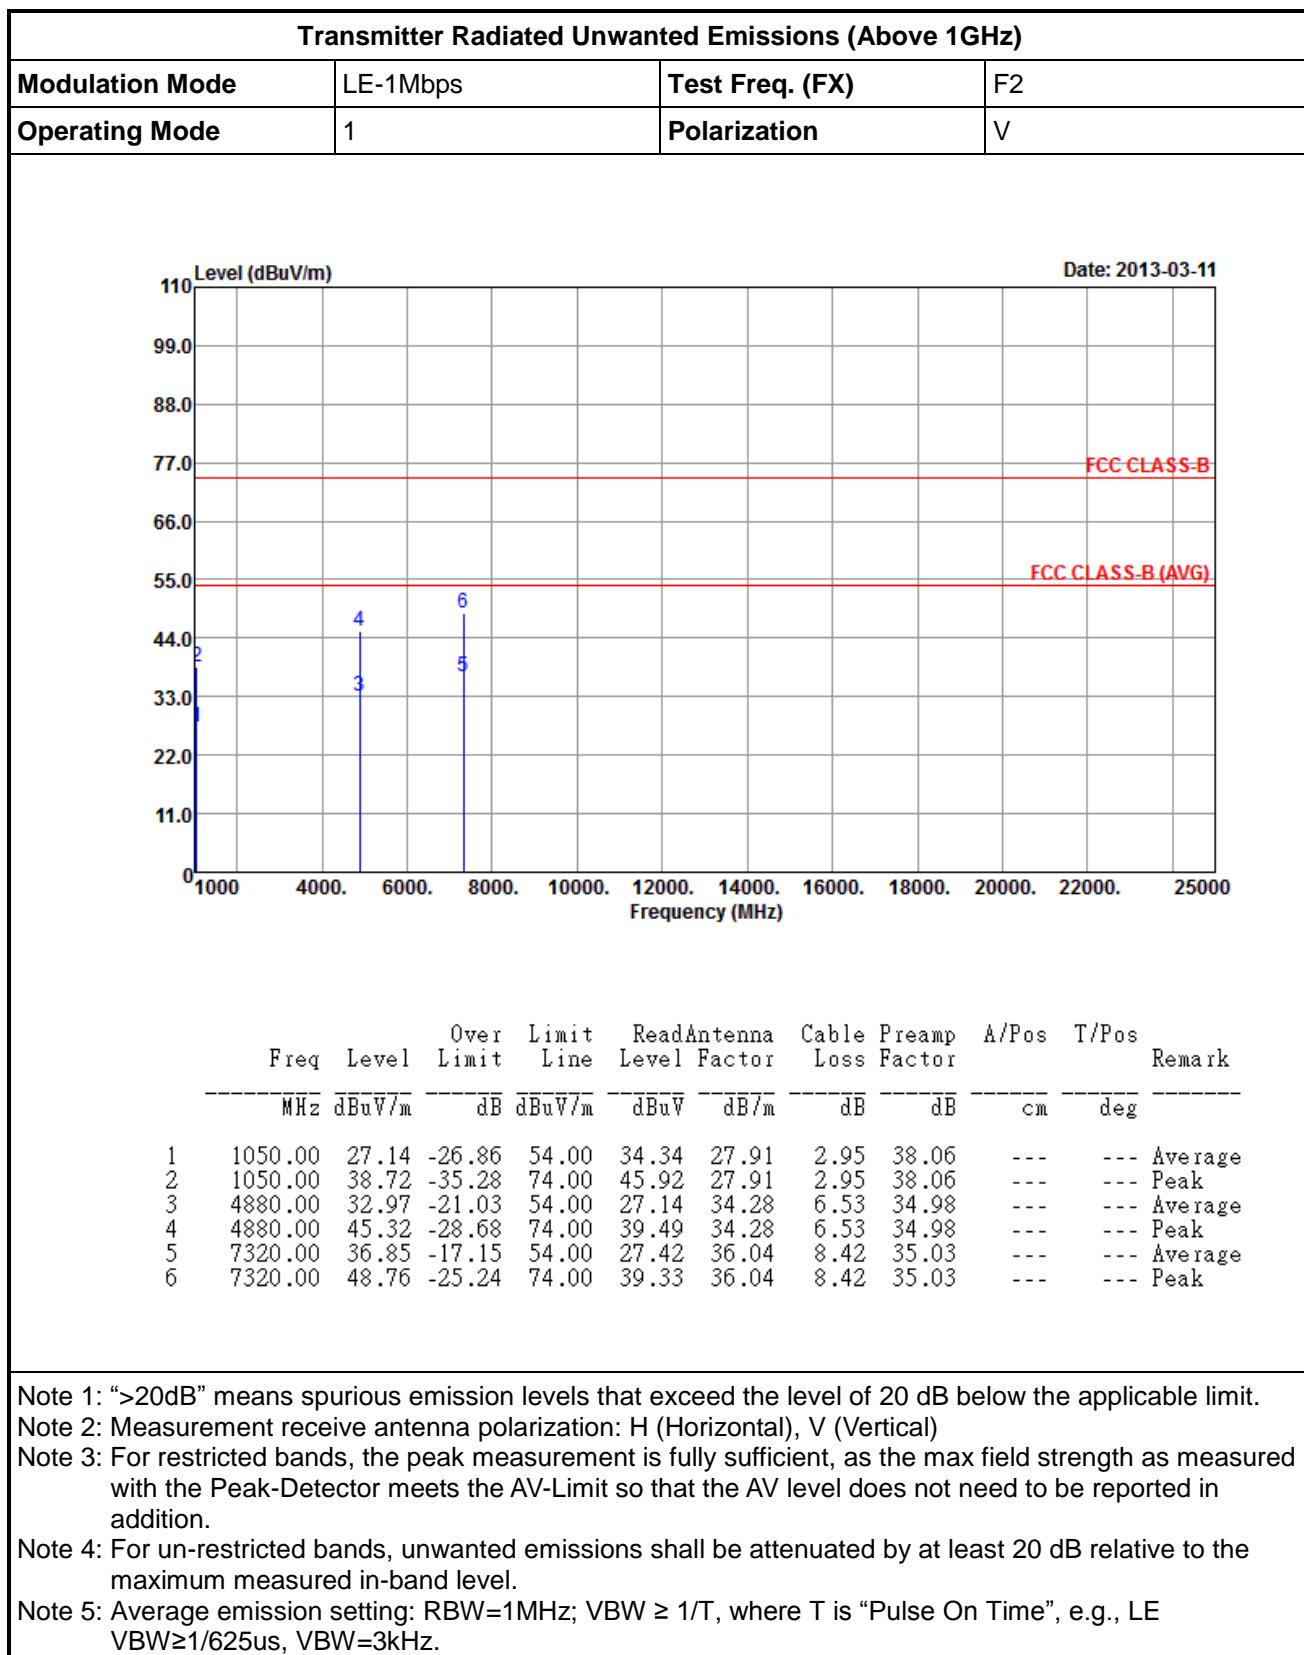



Transmitter Radiated Unwanted Emissions (Above 1GHz)

Modulation Mode	LE-1Mbps	Test Freq. (FX)	F3
Operating Mode	1	Polarization	H

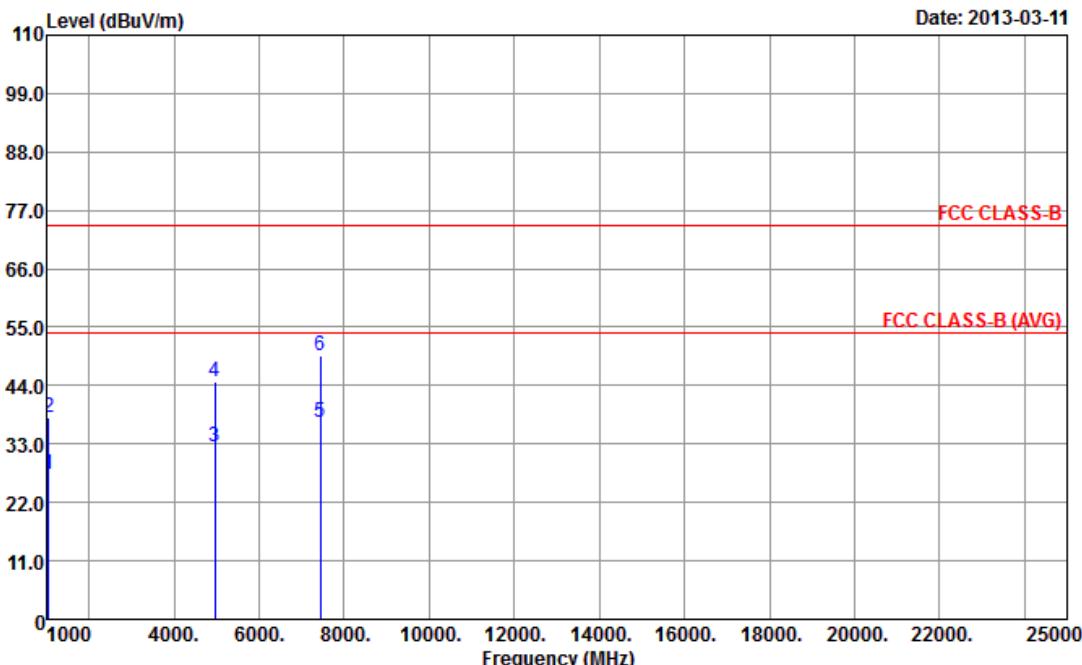

	Freq	Level	Over Limit	Line	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg
1	1050.00	27.33	-26.67	54.00	34.53	27.91	2.95	38.06	---	Average
2	1050.00	37.92	-36.08	74.00	45.12	27.91	2.95	38.06	---	Peak
3	4960.00	32.53	-21.47	54.00	26.66	34.29	6.57	34.99	---	Average
4	4960.00	44.68	-29.32	74.00	38.81	34.29	6.57	34.99	---	Peak
5	7440.00	37.02	-16.98	54.00	27.43	36.01	8.66	35.08	---	Average
6	7440.00	49.51	-24.49	74.00	39.92	36.01	8.66	35.08	---	Peak


Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.

Note 2: Measurement receive antenna polarization: H (Horizontal), V (Vertical)

Note 3: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.

Note 4: For un-restricted bands, unwanted emissions shall be attenuated by at least 20 dB relative to the maximum measured in-band level.

Note 5: Average emission setting: RBW=1MHz; VBW $\geq 1/T$, where T is "Pulse On Time", e.g., LE VBW $\geq 1/625\mu s$, VBW=3kHz.

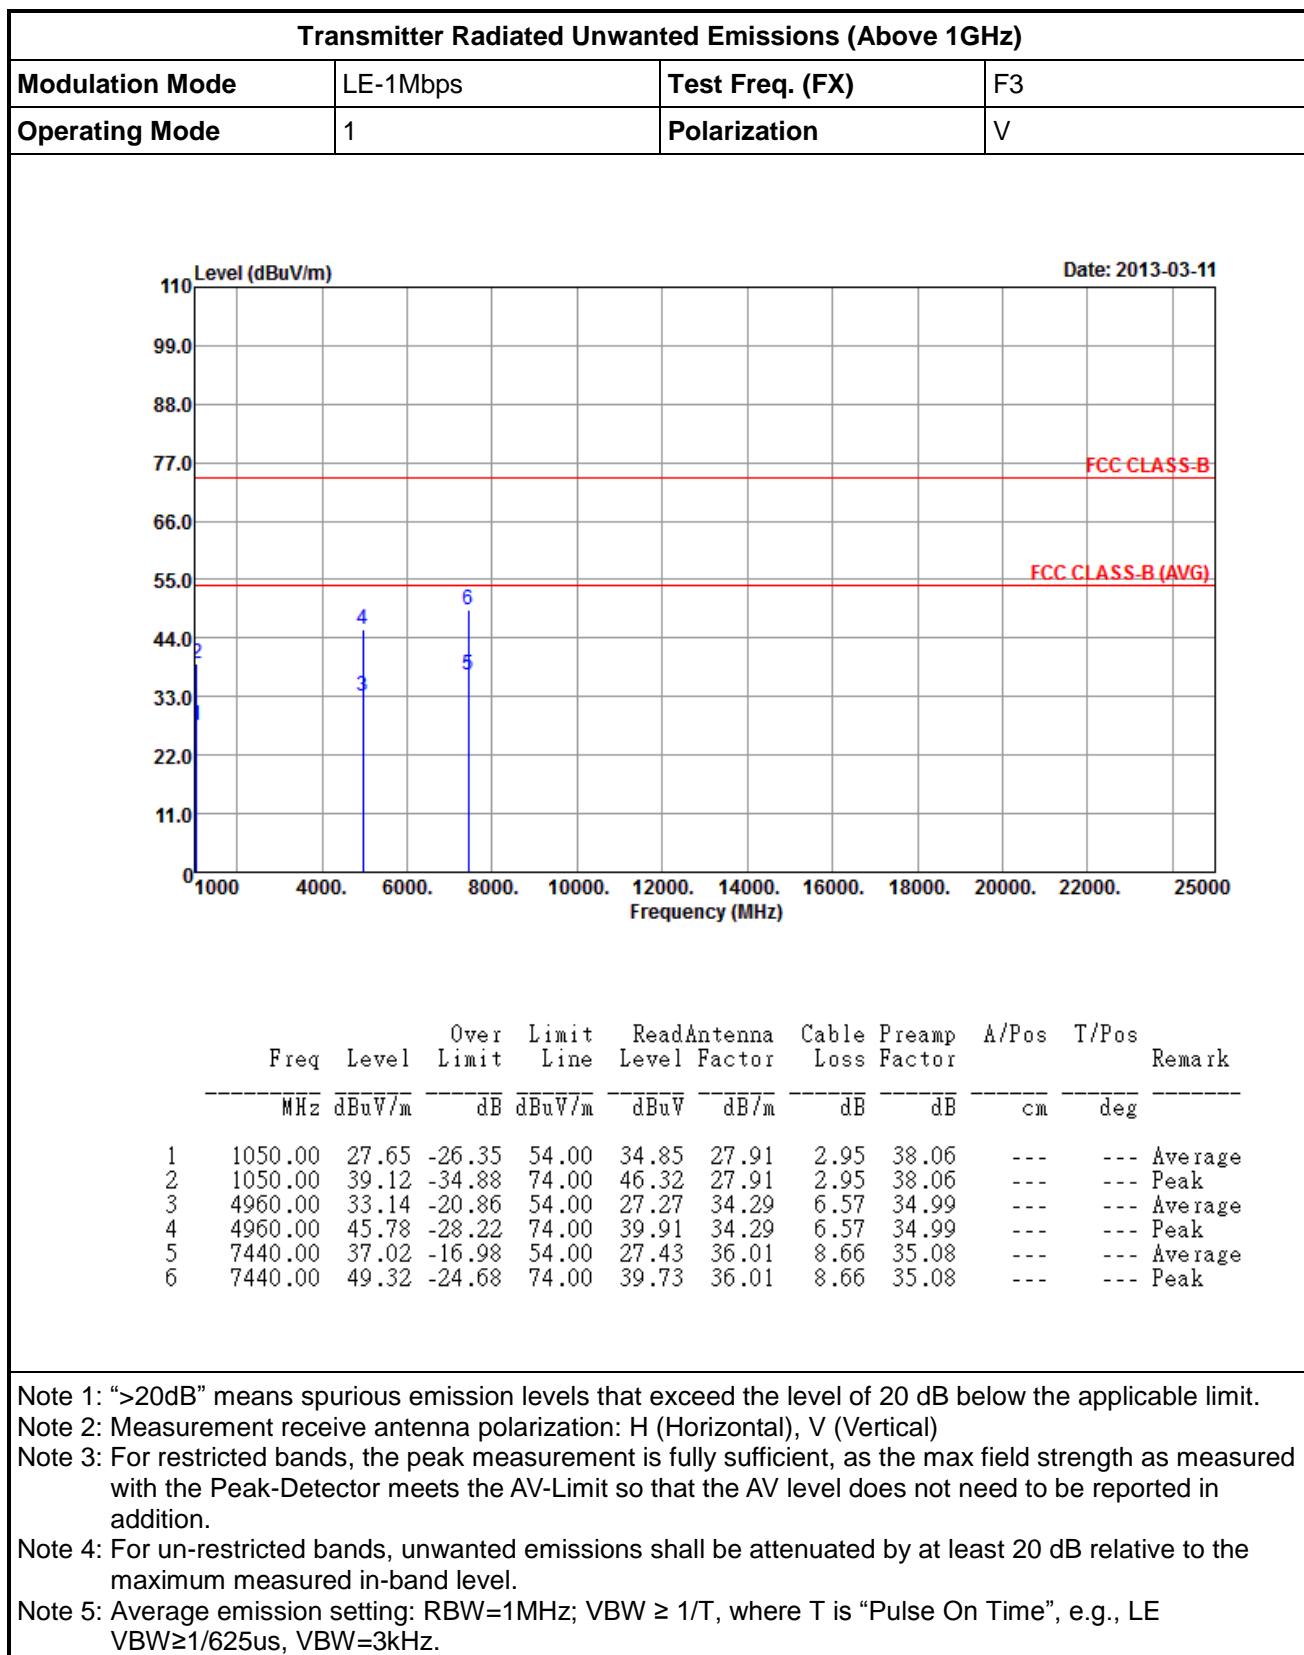



4 Test Equipment and Calibration Data

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Remark
EMC Receiver	R&S	ESCS 30	100174	9kHz ~ 2.75GHz	Nov. 22, 2012	Conduction (CO04-HY)
LISN	SCHWARZBECK MESS-ELEKTRONIK	NSLK 8127	8127-477	9kHz ~ 30MHz	Jan. 21, 2013	Conduction (CO04-HY)
LISN (Support Unit)	EMCO	3810/2NM	9703-1839	9kHz ~ 30MHz	Apr. 20, 2012	Conduction (CO04-HY)
RF Cable-CON	HUBER+SUHNER	RG213/U	7.61183201e+012	9kHz ~ 30MHz	Nov. 09, 2012	Conduction (CO04-HY)
EMI Filter	LINDGREN	LRE-2030	2651	< 450 Hz	N/A	Conduction (CO04-HY)

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Remark
Spectrum Analyzer	R&S	FSP 30	100023/030	9KHz ~ 30GHz	Apr. 27, 2012	Conducted (TH01-HY)
DC Power Source	G.W.	GPC-6030D	C671845	DC 1V ~ 60V	Jun. 19, 2012	Conducted (TH01-HY)
Temp. and Humidity Chamber	Giant Force	GTH-225-20-SP-SD	MAA1112-007	-20 ~ 100°C	Nov. 21, 2012	Conducted (TH01-HY)
Signal Generator	R&S	SMR40	100116	10MHz ~ 40GHz	Jun. 26, 2012	Conducted (TH01-HY)
Power Sensor	Anritsu	MA2411B	1027452	300MHz ~ 40GHz	Sep. 08, 2012	Conducted (TH01-HY)
Power Meter	Anritsu	ML2495A	1124009	300MHz ~ 40GHz	Sep. 08, 2012	Conducted (TH01-HY)
RF Cable-2m	HUBER+SUHNER	SUCOFLEX_104	SN 345675/4	1GHz ~ 26.5GHz	NA	Conducted (TH01-HY)
RF Cable-3m	HUBER+SUHNER	SUCOFLEX_104	SN 345669/4	1GHz ~ 26.5GHz	NA	Conducted (TH01-HY)

Note: Calibration Interval of instruments listed above is one year.

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Remark
AC Power Source	G.W	APS-9102	EL920581	AC 0V ~ 300V	Jul. 02, 2012	Conducted (TH01-HY)

Note: calibration interval of instruments listed above is two year.



Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Remark
Spectrum Analyzer	R&S	FSP	100055	9Kz – 40GHz	Jun. 06, 2012	Radiation (03CH05-HY)
Receiver	R&S	ESIB26	100337	20Hz – 26.5GHz	Jun. 21, 2012	Radiation (03CH05-HY)
3m Semi Anechoic Chamber	TDK	SAC-3M	03CH05-HY	30 MHz - 1 GHz 3m	N/A	Radiation (03CH05-HY)
Amplifier	COM-POWER	PA-103	161050	1 MHz ~ 1 GHz	Feb. 26, 2013	Radiation (03CH05-HY)
Amplifier	Agilent	8449B	3008A02665	1GHz – 26.5 GHz	Aug. 28, 2012	Radiation (03CH05-HY)
Horn Antenna	ETS-LINDGREN	3117	66584	1GHz~18GHz	Aug. 09, 2012	Radiation (03CH05-HY)
Horn Antenna	SCHWARZBECK	BBHA 9170	BBHA 9170517	18G~40G	Jan. 14, 2013	Radiation (03CH05-HY)
RF Cable-R03m	Jye Bao	RG142	03CH05-HY	30 MHz - 1 GHz	Oct. 14, 2012	Radiation (03CH05-HY)
RF Cable-HIGH	SUHNER	SUCOFLEX104	03CH05-HY	1GHz~40GHz	Oct. 14, 2012	Radiation (03CH05-HY)
Bilog Antenna	SCHAFFNER	CBL6111C	2725	30 MHz - 1 GHz	Oct. 06, 2012	Radiation (03CH05-HY)
Turn Table	HD	HD100	420/611	0 - 360 degree	N/A	Radiation (03CH05-HY)
Antenna Mast	HD	HD100	240/666	1 m - 4 m	N/A	Radiation (03CH05-HY)

Note: Calibration Interval of instruments listed above is one year.

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Remark
Loop Antenna *(note 1)	R&S	HFH2-Z2	860004/0001	9 kHz - 30 MHz	Jul. 03, 2012	Radiation (03CH05-HY)

Note: Calibration Interval of instruments listed above is two year.