

# FCC Part 15C Measurement and Test Report

For

**Shenzhen Sang Fei Consumer Communications Co., Ltd.**

**11 Science and Technology Road, Shenzhen Hi-tech Industrial Park, Nanshan**

**District, Shenzhen City, GuangDong province, 518057, China**

**FCC ID: VQRCTS338**

<b>FCC Rule(s):</b>	<u>FCC Part 15C</u>
<b>Product Description:</b>	<u>Smart Phone</u>
<b>Tested Model:</b>	<u>Philips S338</u>
<b>Report No.:</b>	<u>STR17098121I-3</u>
<b>Tested Date:</b>	<u>2017-09-11 to 2017-11-01</u>
<b>Issued Date:</b>	<u>2017-11-01</u>

<b>Tested By:</b>	<u>Jason Su / Engineer</u>	<i>Jason Su</i>
<b>Reviewed By:</b>	<u>Silin Chen / EMC Manager</u>	<i>Silin Chen</i>
<b>Approved &amp; Authorized By:</b>	<u>Jandy So / PSQ Manager</u>	<i>Jandy So</i>

**Prepared By:**

**Shenzhen SEM.Test Technology Co., Ltd.**

1/F, Building A, Hongwei Industrial Park, Liuxian 2nd Road,  
Bao'an District, Shenzhen, P.R.C. (518101)

Tel.: +86-755-33663308 Fax.: +86-755-33663309 Website: www.semtest.com.cn

Note: This test report is limited to the above client company and the product model only. It may not be duplicated without prior permitted by Shenzhen SEM.Test Technology Co., Ltd.

**TABLE OF CONTENTS**

<b>1. GENERAL INFORMATION</b>	<b>3</b>
1.1 PRODUCT DESCRIPTION FOR EQUIPMENT UNDER TEST (EUT)	3
1.2 TEST STANDARDS	4
1.3 TEST METHODOLOGY	4
1.4 TEST FACILITY	4
1.5 EUT SETUP AND TEST MODE	5
1.6 MEASUREMENT UNCERTAINTY	5
1.7 TEST EQUIPMENT LIST AND DETAILS	6
<b>2. SUMMARY OF TEST RESULTS</b>	<b>7</b>
<b>3. RF EXPOSURE</b>	<b>8</b>
3.1 STANDARD APPLICABLE	8
3.2 TEST RESULT	8
<b>4. ANTENNA REQUIREMENT</b>	<b>9</b>
4.1 STANDARD APPLICABLE	9
4.2 EVALUATION INFORMATION	9
<b>5. POWER SPECTRAL DENSITY</b>	<b>10</b>
5.1 STANDARD APPLICABLE	10
5.2 TEST PROCEDURE	10
5.3 ENVIRONMENTAL CONDITIONS	10
5.4 SUMMARY OF TEST RESULTS/PLOTS	11
<b>6. 6DB BANDWIDTH</b>	<b>18</b>
6.1 STANDARD APPLICABLE	18
6.2 TEST PROCEDURE	18
6.3 ENVIRONMENTAL CONDITIONS	18
6.4 SUMMARY OF TEST RESULTS/PLOTS	18
<b>7. RF OUTPUT POWER</b>	<b>25</b>
7.1 STANDARD APPLICABLE	25
7.2 TEST PROCEDURE	25
7.3 ENVIRONMENTAL CONDITIONS	25
7.4 SUMMARY OF TEST RESULTS/PLOTS	26
<b>8. FIELD STRENGTH OF SPURIOUS EMISSIONS</b>	<b>33</b>
8.1 STANDARD APPLICABLE	33
8.2 TEST PROCEDURE	33
8.3 CORRECTED AMPLITUDE & MARGIN CALCULATION	34
8.4 ENVIRONMENTAL CONDITIONS	34
8.5 SUMMARY OF TEST RESULTS/PLOTS	35
<b>9. OUT OF BAND EMISSIONS</b>	<b>63</b>
9.1 STANDARD APPLICABLE	63
9.2 TEST PROCEDURE	63
9.3 ENVIRONMENTAL CONDITIONS	64
9.4 SUMMARY OF TEST RESULTS/PLOTS	64
<b>10. CONDUCTED EMISSIONS</b>	<b>80</b>
10.1 TEST PROCEDURE	80
10.2 BASIC TEST SETUP BLOCK DIAGRAM	80
10.3 ENVIRONMENTAL CONDITIONS	80
10.4 TEST RECEIVER SETUP	81
10.5 SUMMARY OF TEST RESULTS/PLOTS	81
10.6 CONDUCTED EMISSIONS TEST DATA	81

## 1. GENERAL INFORMATION

### 1.1 Product Description for Equipment Under Test (EUT)

#### Client Information

Applicant:	Shenzhen Sang Fei Consumer Communications Co., Ltd.
Address of applicant:	11 Science and Technology Road, Shenzhen Hi-tech Industrial Park, Nanshan District, Shenzhen City, Guangdong province, 518057, China
Manufacturer:	Shenzhen Sang Fei Consumer Communications Co., Ltd.
Address of manufacturer:	11 Science and Technology Road, Shenzhen Hi-tech Industrial Park, Nanshan District, Shenzhen City, Guangdong province, 518057, China

General Description of EUT	
Product Name:	Smart Phone
Trade Name:	PHILIPS
Model No.:	Philips S338
Adding Model(s):	/
Rated Voltage:	DC 3.8V Li-ion Battery
Battery Capacity:	2000mAh
Power Adapter Model:	Model:A31-501000 Input:AC100V-240V, 50/60Hz, Output: DC5V,1A
Software Version:	Philips_S338_1734_V01_SA
Hardware Version:	ZH269-MB-V0.2
<i>Note: The test data is gathered from a production sample provided by the manufacturer.</i>	

Technical Characteristics of EUT	
Support Standards:	802.11b, 802.11g, 802.11n
Frequency Range:	2412-2462MHz
RF Output Power:	15.29dBm (Conducted)
Type of Modulation:	CCK, OFDM, QPSK, BPSK, 16QAM, 64QAM
Data Rate:	1-11Mbps, 6-54Mbps, up to 150Mbps
Quantity of Channels:	11
Channel Separation:	5MHz
Type of Antenna:	Integral
Antenna Gain:	1.3dBi
Lowest Internal Frequency	/

## 1.2 Test Standards

The following report is prepared on behalf of the Shenzhen Sang Fei Consumer Communications Co., Ltd. in accordance with FCC Part 15, Subpart C, and section 15.203, 15.205, 15.207, 15.209 and 15.247 of the Federal Communication Commissions rules.

The objective is to determine compliance with FCC Part 15, Subpart C, and section 15.203, 15.205, 15.207, 15.209 and 15.247 of the Federal Communication Commissions rules.

**Maintenance of compliance** is the responsibility of the manufacturer. Any modification of the product, which result in lowering the emission, should be checked to ensure compliance has been maintained.

## 1.3 Test Methodology

All measurements contained in this report were conducted with ANSI C63.10-2013, American National Standard for Testing Unlicensed Wireless Devices, and ANSI C63.4-2014, American National Standard for Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the range of 9 kHz to 40 GHz. The measurement guide KDB 558074 D01 v04 for digital transmission systems shall be performed also.

## 1.4 Test Facility

### **FCC – Registration No.: 125990**

Shenzhen SEM Test Technology Co., Ltd. Laboratory has been recognized to perform compliance testing on equipment subject to the Commissions Declaration Of Conformity (DOC). The Designation Number is CN5010, and Test Firm Registration Number is 125990.

### **Industry Canada (IC) Registration No.: 11464A**

The 3m Semi-anechoic chamber of Shenzhen SEM.Test Technology Co., Ltd. has been registered by Certification and Engineering Bureau of Industry Canada for radio equipment testing with Registration No.: 11464A.

## 1.5 EUT Setup and Test Mode

The EUT was operated in the engineering mode to fix the Tx frequency that was for the purpose of the measurements. All testing shall be performed under maximum output power condition, and to measure its highest possible emissions level, more detailed description as follows:

Test Mode List		
Test Mode	Description	Remark
TM1	802.11b	2412MHz, 2437MHz, 2462MHz
TM2	802.11g	2412MHz, 2437MHz, 2462MHz
TM3	802.11n-HT20	2412MHz, 2437MHz, 2462MHz
TM4	802.11n-HT40	2422MHz, 2437MHz, 2452MHz

Note: All test modes (different data rate and different modulation) are performed, but only the worst case is recorded in this report.

Accessories Equipment List and Details			
Description	Manufacturer	Model No.	Serial Number
/	/	/	/

Accessories Cable List and Details			
Cable Description	Length (m)	Shielded/Unshielded	With Core/Without Core
Earphone	1.2	Unshielded	Without Core

EUT Cable List and Details			
Cable Description	Length (m)	Shielded/Unshielded	With Core/Without Core
USB Cable	1.0	Shielded	Without Core

## 1.6 Measurement Uncertainty

Measurement uncertainty		
Parameter	Conditions	Uncertainty
RF Output Power	Conducted	$\pm 0.42\text{dB}$
Occupied Bandwidth	Conducted	$\pm 1.5\%$
Power Spectral Density	Conducted	$\pm 1.8\text{dB}$
Conducted Spurious Emission	Conducted	$\pm 2.17\text{dB}$
Conducted Emissions	Conducted	$\pm 2.88\text{dB}$
Transmitter Spurious Emissions	Radiated	$\pm 5.1\text{dB}$

## 1.7 Test Equipment List and Details

No.	Description	Manufacturer	Model	Serial No.	Cal Date	Due Date
SEMT-1072	Spectrum Analyzer	Agilent	E4407B	MY41440400	2017-06-12	2018-06-11
SEMT-1031	Spectrum Analyzer	Rohde & Schwarz	FSP30	836079/035	2017-06-12	2018-06-11
SEMT-1007	EMI Test Receiver	Rohde & Schwarz	ESVB	825471/005	2017-06-12	2018-06-11
SEMT-1008	Amplifier	Agilent	8447F	3113A06717	2017-06-12	2018-06-11
SEMT-1043	Amplifier	C&D	PAP-1G18	2002	2017-06-12	2018-06-11
SEMT-1011	Broadband Antenna	Schwarz beck	VULB9163	9163-333	2017-06-08	2018-06-07
SEMT-1042	Horn Antenna	ETS	3117	00086197	2017-06-08	2018-06-07
SEMT-1069	Loop Antenna	Schwarz beck	FMZB 1516	9773	2017-06-08	2018-06-07
SEMT-1001	EMI Test Receiver	Rohde & Schwarz	ESPI	101611	2017-06-12	2018-06-11
SEMT-1003	L.I.S.N	Schwarz beck	NSLK8126	8126-224	2017-06-12	2018-06-11
SEMT-1002	Pulse Limiter	Rohde & Schwarz	ESH3-Z2	100911	2017-06-12	2018-06-11
SEMT-1168	Pre-amplifier	Direction Systems Inc.	PAP-0126	14141-12838	2017-08-15	2018-08-14
SEMT-1169	Pre-amplifier	Direction Systems Inc.	PAP-2640	14145-14153	2017-08-15	2018-08-14
SEMT-1163	Spectrum Analyzer	Rohde & Schwarz	FSP40	100612	2017-06-12	2018-06-11
SEMT-1170	DRG Horn Antenna	A.H. SYSTEMS	SAS-574	571	2017-03-09	2018-03-08

## 2. SUMMARY OF TEST RESULTS

<b>FCC Rules</b>	<b>Description of Test Item</b>	<b>Result</b>
§ 2.1093	RF Exposure	Compliant
§ 15.203; § 15.247(b)(4)(i)	Antenna Requirement	Compliant
§15.205	Restricted Band of Operation	Compliant
§ 15.207(a)	Conducted Emission	Compliant
§ 15.247(e)	Power Spectral Density	Compliant
§ 15.247(a)(2)	6 dB Bandwidth	Compliant
§ 15.247(b)(3)	RF Output Power	Compliant
§ 15.209(a)	Radiated Emission	Compliant
§ 15.247(d)	Band Edge (Out of Band Emissions)	Compliant

N/A: not applicable

### **3. RF Exposure**

---

#### **3.1 Standard Applicable**

According to § 1.1307 and § 2.1093, the portable transmitter must comply the RF exposure requirements.

#### **3.2 Test Result**

This product complied with the requirement of the RF exposure, please see the RF Exposure Report.



## **4. Antenna Requirement**

---

### **4.1 Standard Applicable**

According to FCC Part 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section.

### **4.2 Evaluation Information**

This product has an integral antenna, fulfill the requirement of this section.

## 5. Power Spectral Density

### 5.1 Standard Applicable

According to 15.247(a)(1)(iii), For digitally modulated systems, the power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission.

### 5.2 Test Procedure

According to the KDB 558074 D01 v04, such specifications require that the same method as used to determine the conducted output power shall also be used to determine the power spectral density. The test method of power spectral density as below:

- a) Set instrument center frequency to DTS channel center frequency.
- b) Set span to at least 1.5 times the OBW.
- c) Set RBW to:  $3 \text{ kHz} \leq \text{RBW} \leq 100 \text{ kHz}$ .
- d) Set VBW  $\geq 3 \times \text{RBW}$ .
- e) Detector = power averaging (RMS) or sample detector (when RMS not available).
- f) Ensure that the number of measurement points in the sweep  $\geq 2 \times \text{span/RBW}$ .
- g) Sweep time = auto couple.
- h) Employ trace averaging (RMS) mode over a minimum of 100 traces.
- i) Use the peak marker function to determine the maximum amplitude level.
- j) If measured value exceeds limit, reduce RBW (no less than 3 kHz) and repeat (note that this may require zooming in on the emission of interest and reducing the span in order to meet the minimum measurement point requirement as the RBW is reduced).

### 5.3 Environmental Conditions


Temperature:	26° C
Relative Humidity:	54%
ATM Pressure:	1011 mbar

## 5.4 Summary of Test Results/Plots


Test Mode	Test Channel MHz	Power Spectral Density dBm/3kHz	Limit dBm/3kHz
802.11b	2412	-7.464	8
	2437	-6.389	8
	2462	-7.262	8
802.11g	2412	-12.26	8
	2437	-11.02	8
	2462	-11.12	8
802.11n HT20	2412	-11.94	8
	2437	-9.674	8
	2462	-10.15	8
802.11n HT40	2422	-14.51	8
	2437	-13.75	8
	2452	-14.71	8

Please refer to the following test plots:


802.11b-Low Channel

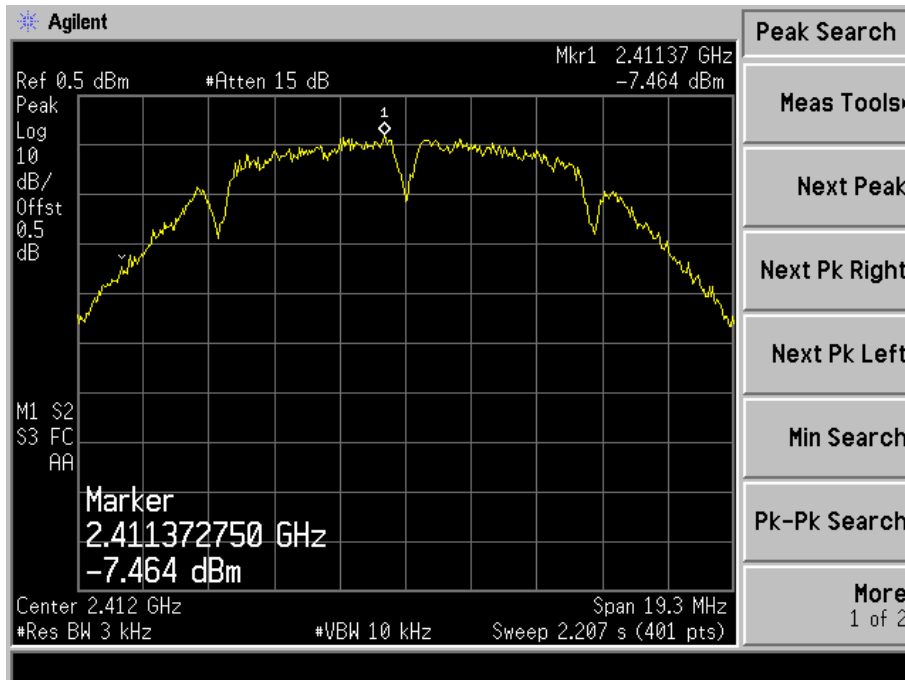


802.11b-Middle Channel

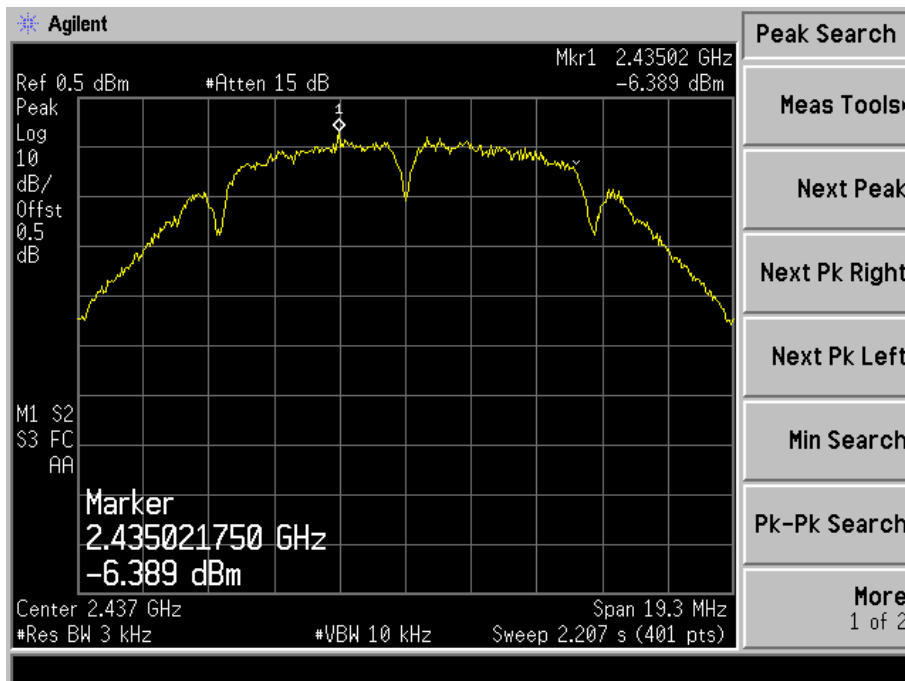


802.11b-High Channel

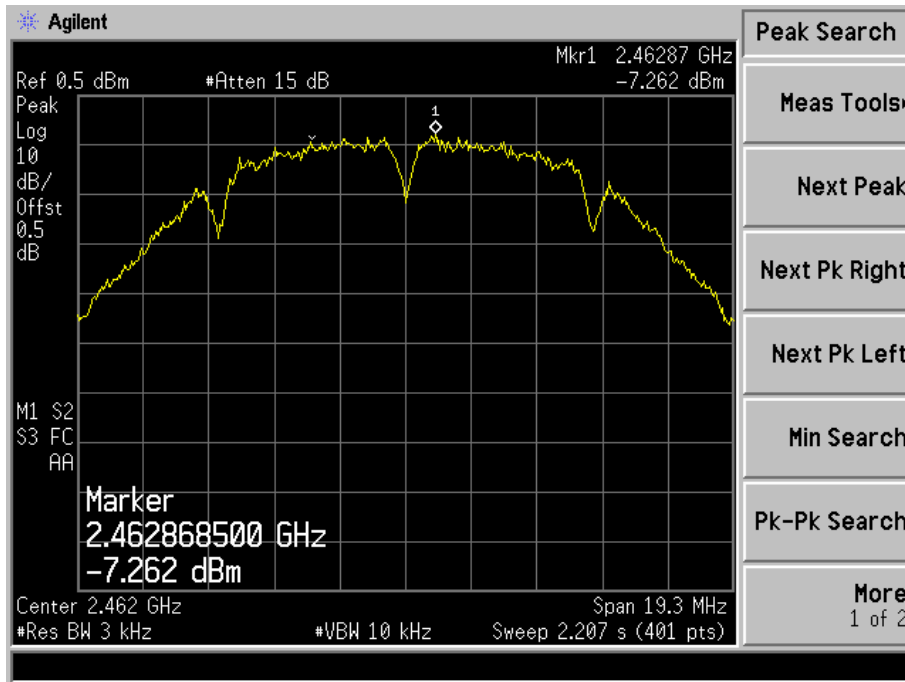


802.11g-Low Channel

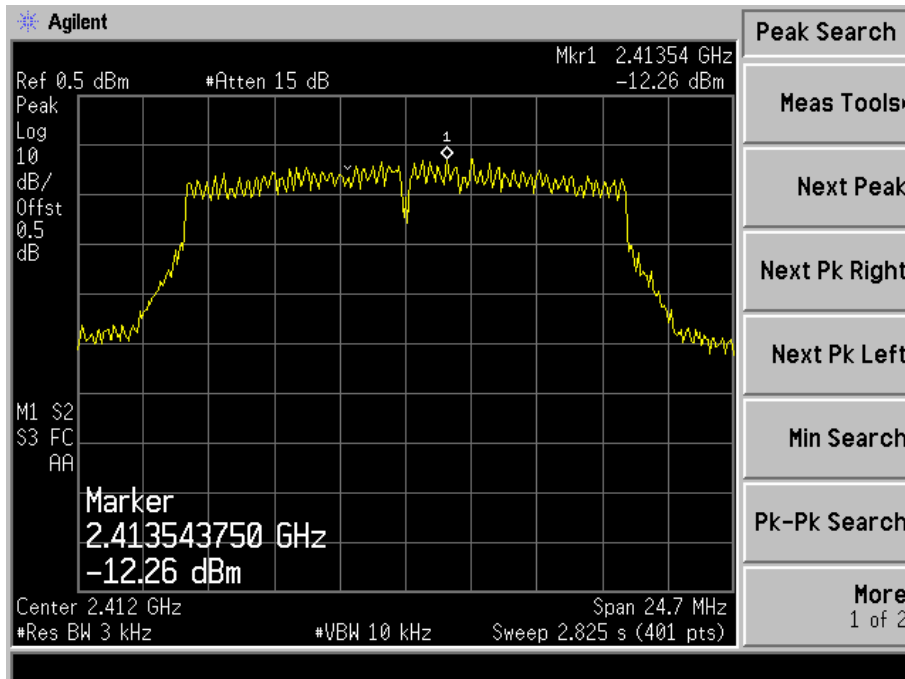


802.11g-Middle Channel

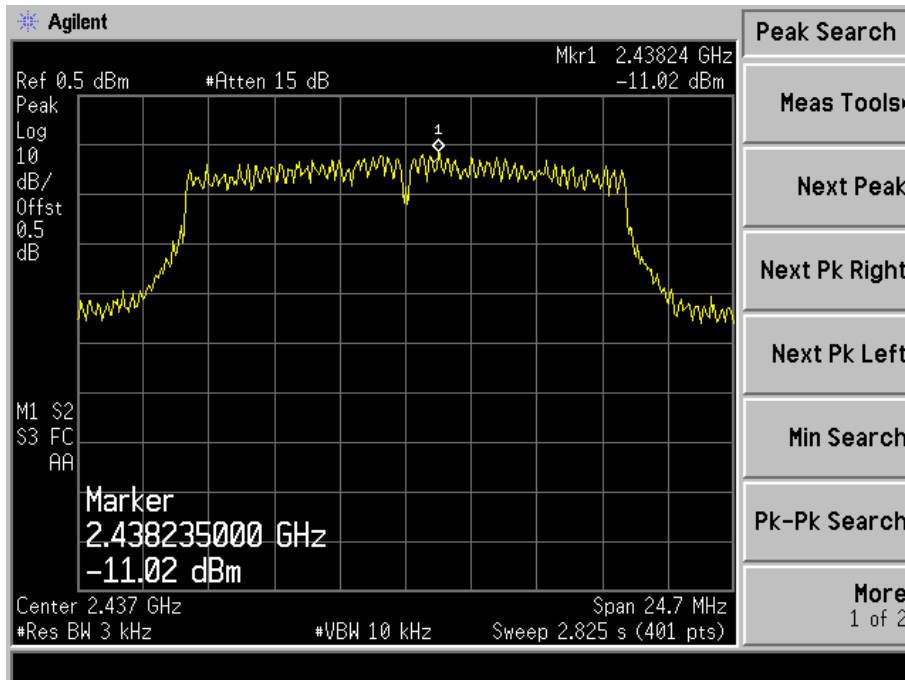


802.11g-High Channel

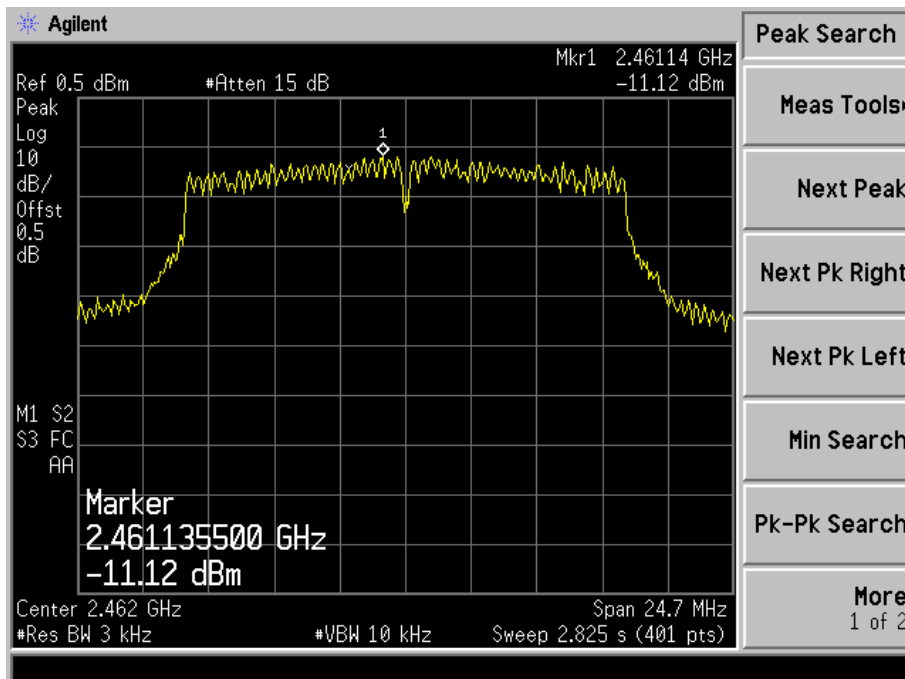


## 802.11n-HT20-Low Channel

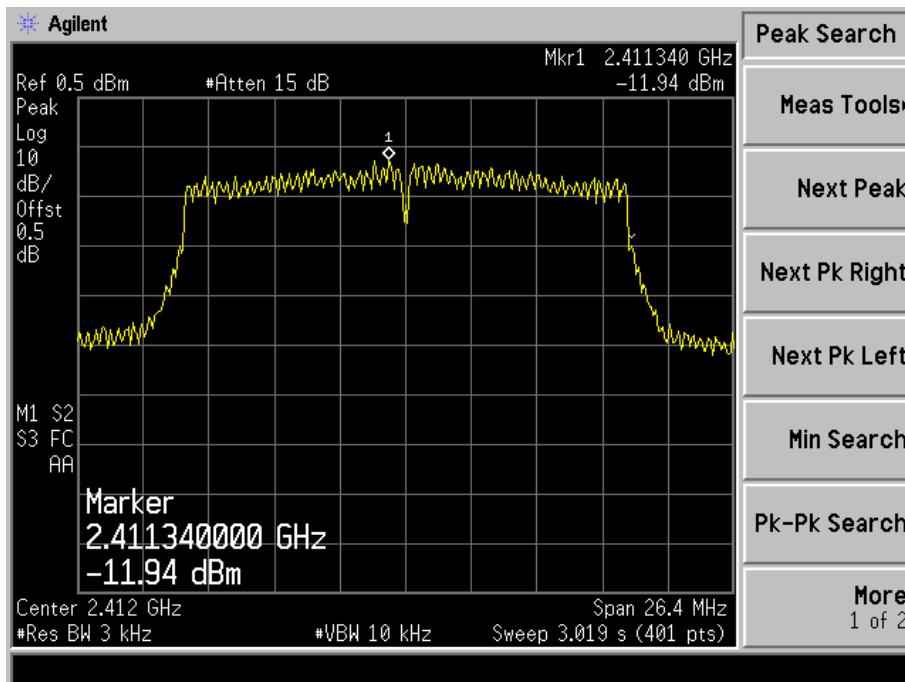


## 802.11n-HT20-Middle Channel

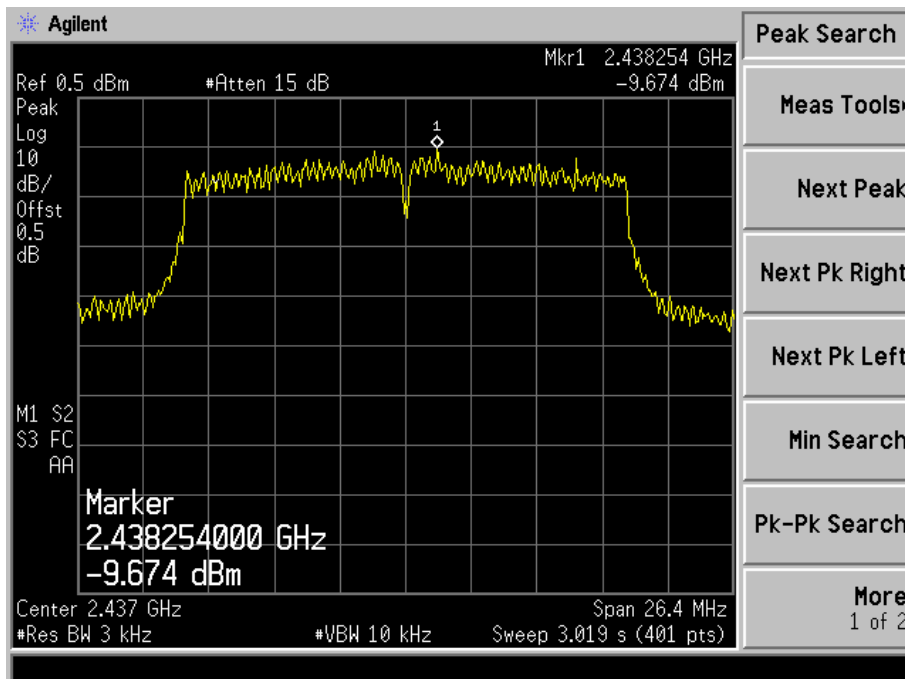

802.11n-HT20-High Channel

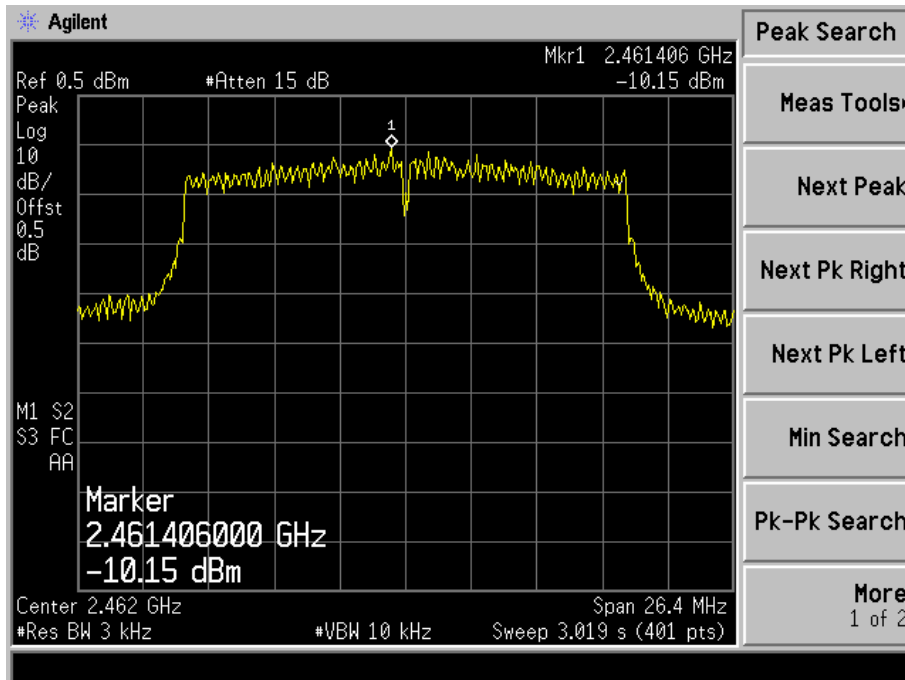


802.11n-HT40-Low Channel

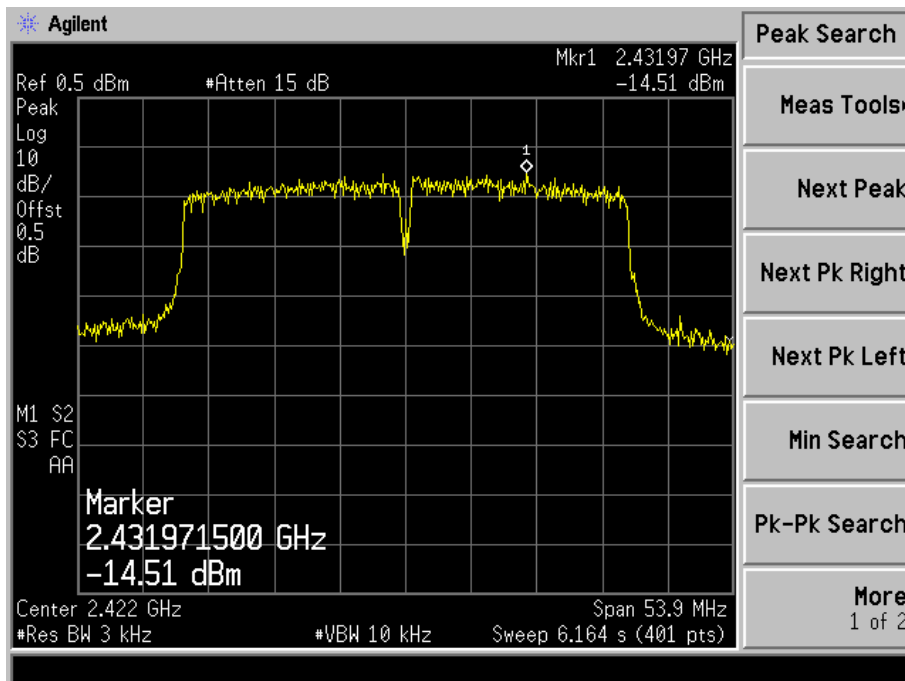




802.11n-HT40-Middle Channel

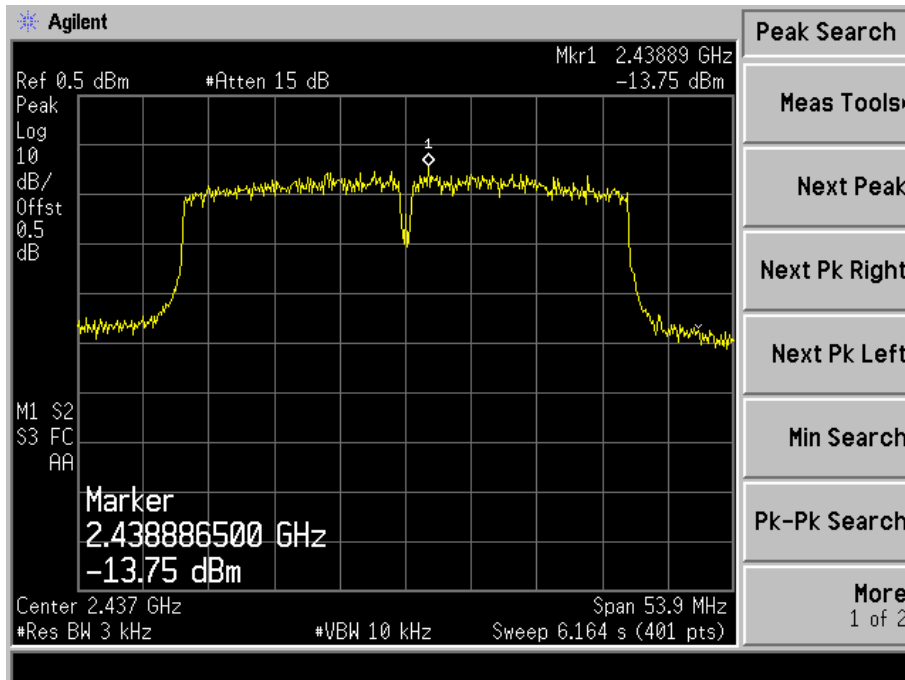

802.11n-HT40-High Channel

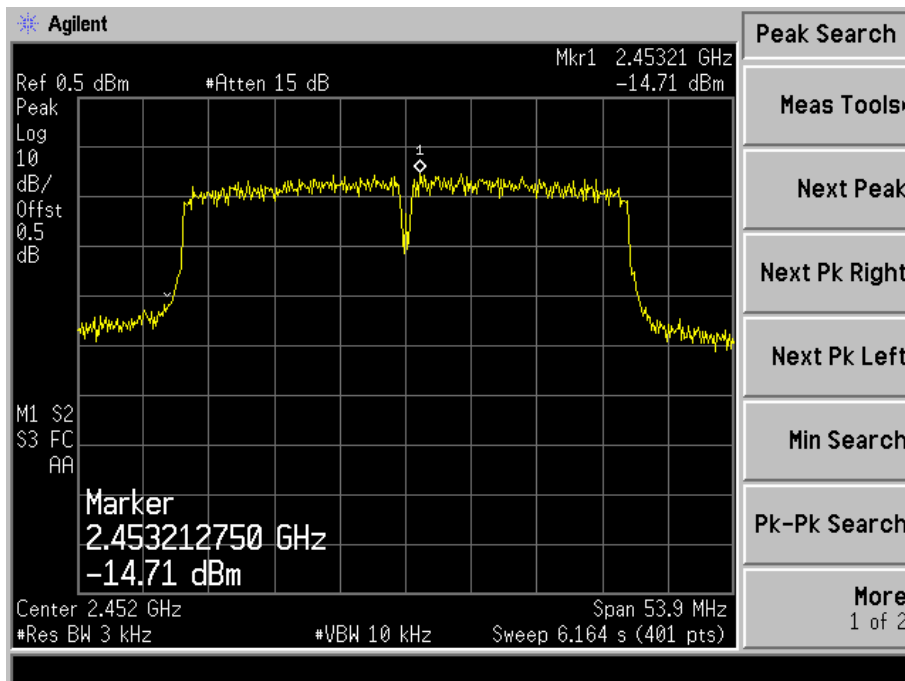

## 6. 6dB Bandwidth

### 6.1 Standard Applicable

According to 15.247(a)(2). Systems using digital modulation techniques may operate in the 902–928 MHz, 2400–2483.5 MHz, and 5725–5850 MHz bands. The minimum 6 dB bandwidth shall be at least 500 kHz.

### 6.2 Test Procedure

- a) Set RBW = 100 kHz.
- b) Set the video bandwidth (VBW)  $\geq 3 \times$  RBW.
- c) Detector = Peak.
- d) Trace mode = max hold.
- e) Sweep = auto couple.
- f) Allow the trace to stabilize.
- g) Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission.

### 6.3 Environmental Conditions


Temperature:	25° C
Relative Humidity:	53%
ATM Pressure:	1018 mbar

### 6.4 Summary of Test Results/Plots


Test Mode	Test Channel MHz	6 dB Bandwidth MHz	99% Bandwidth MHz	Limit kHz
802.11b	2412	9.166	12.8617	$\geq 500$
	2437	10.077	12.8324	$\geq 500$
	2462	9.137	12.8054	$\geq 500$
802.11g	2412	14.408	16.3732	$\geq 500$
	2437	15.392	16.4272	$\geq 500$
	2462	14.685	16.3846	$\geq 500$
802.11n-HT20	2412	15.930	17.4978	$\geq 500$
	2437	17.008	17.5501	$\geq 500$
	2462	15.976	17.5493	$\geq 500$
802.11n-HT40	2422	35.383	35.7956	$\geq 500$
	2437	35.378	35.7889	$\geq 500$
	2452	35.233	35.8321	$\geq 500$

Please refer to the following test plots:


## 802.11b-Low Channel

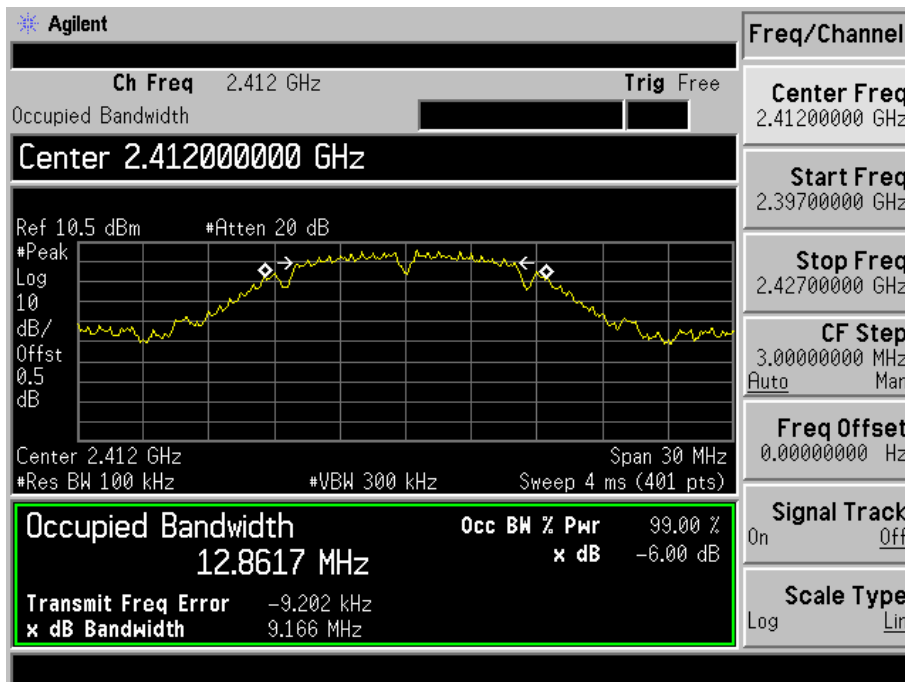


## 802.11b-Middle Channel

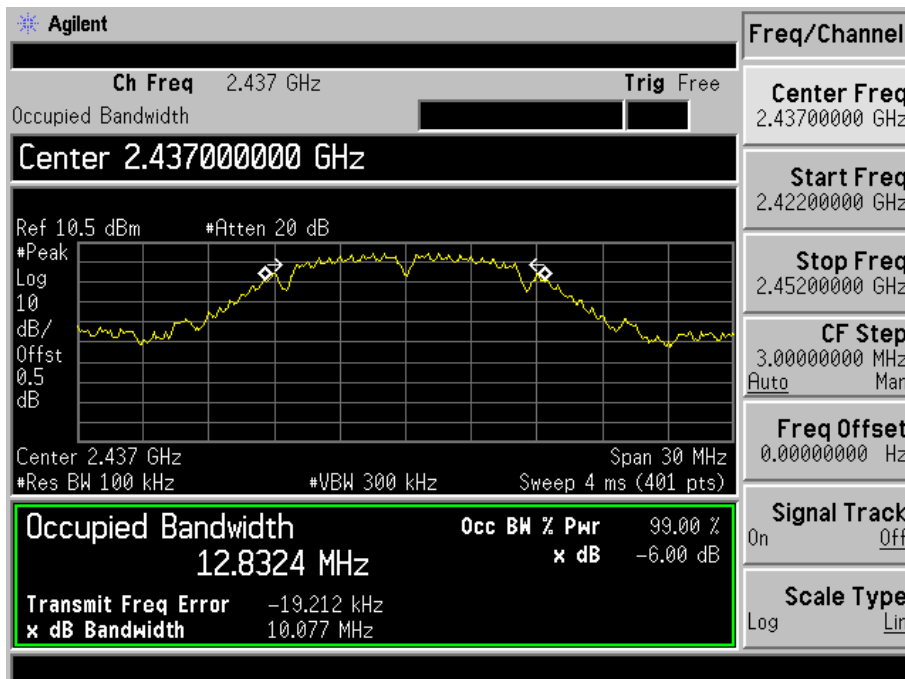


## 802.11b-High Channel

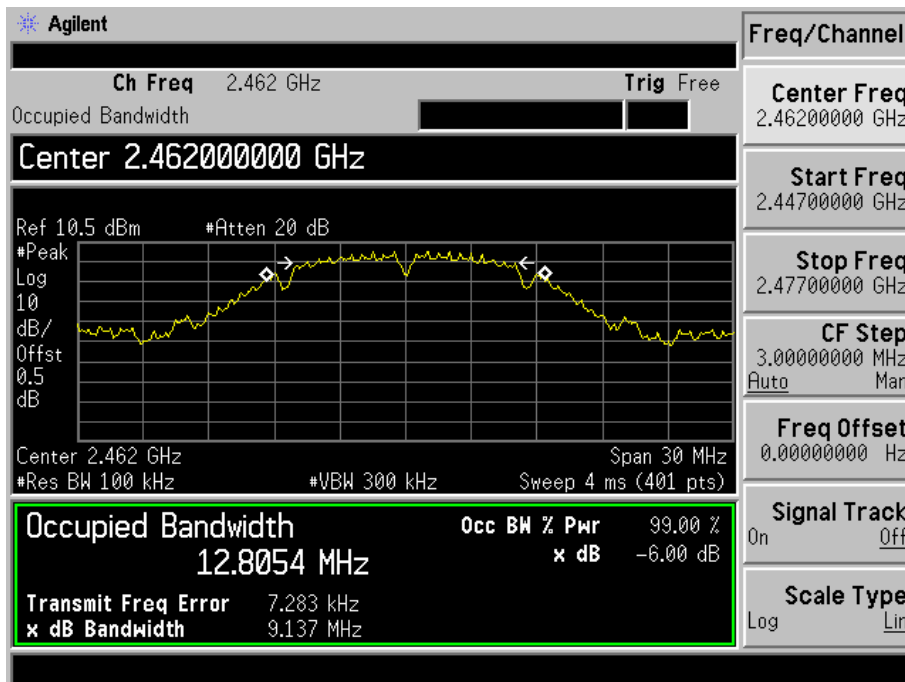


## 802.11g-Low Channel

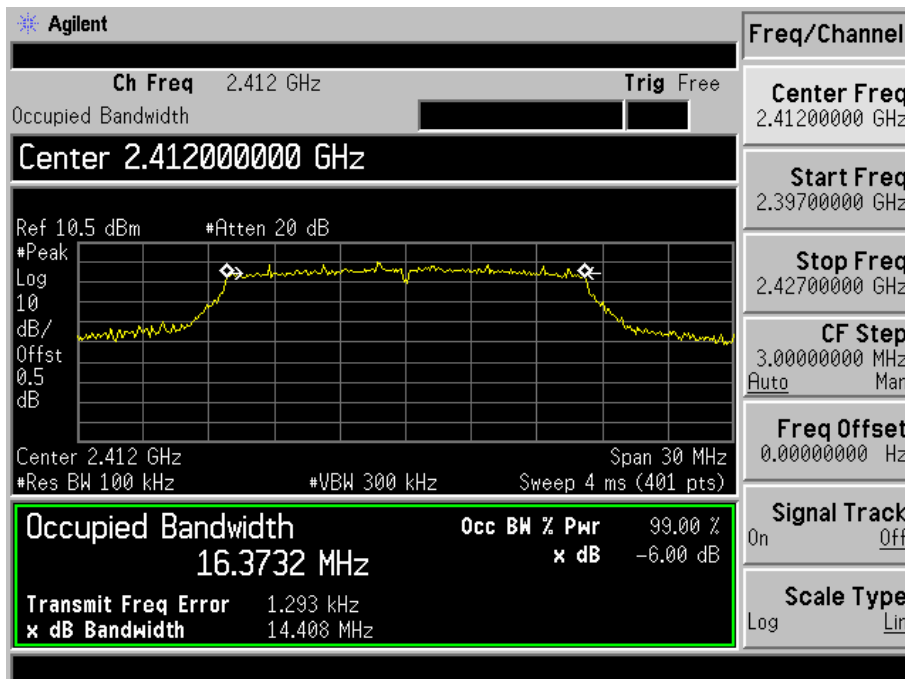


## 802.11g-Middle Channel

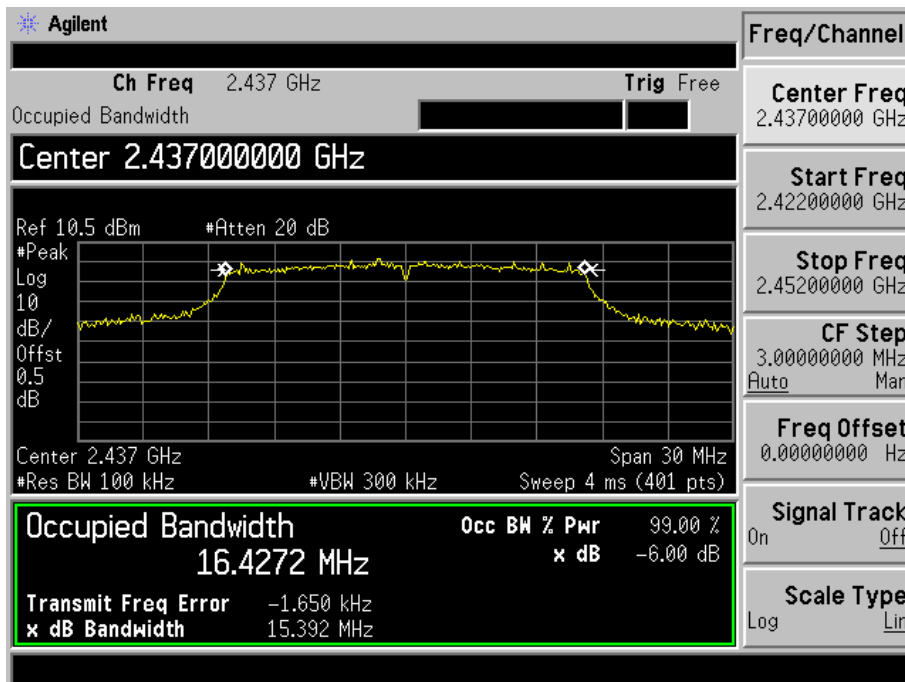


## 802.11g-High Channel

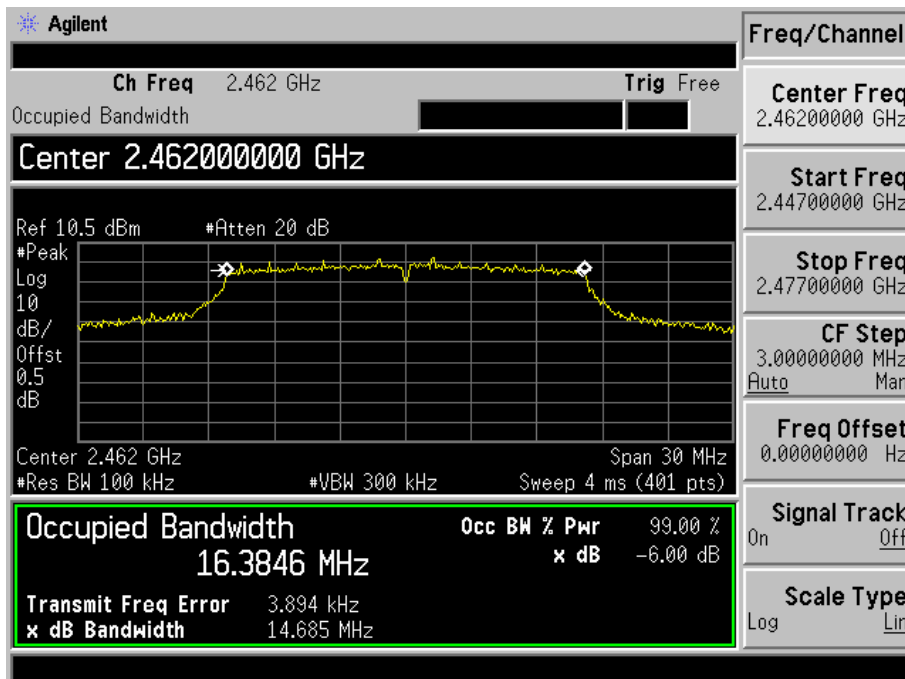


## 802.11n-HT20-Low Channel

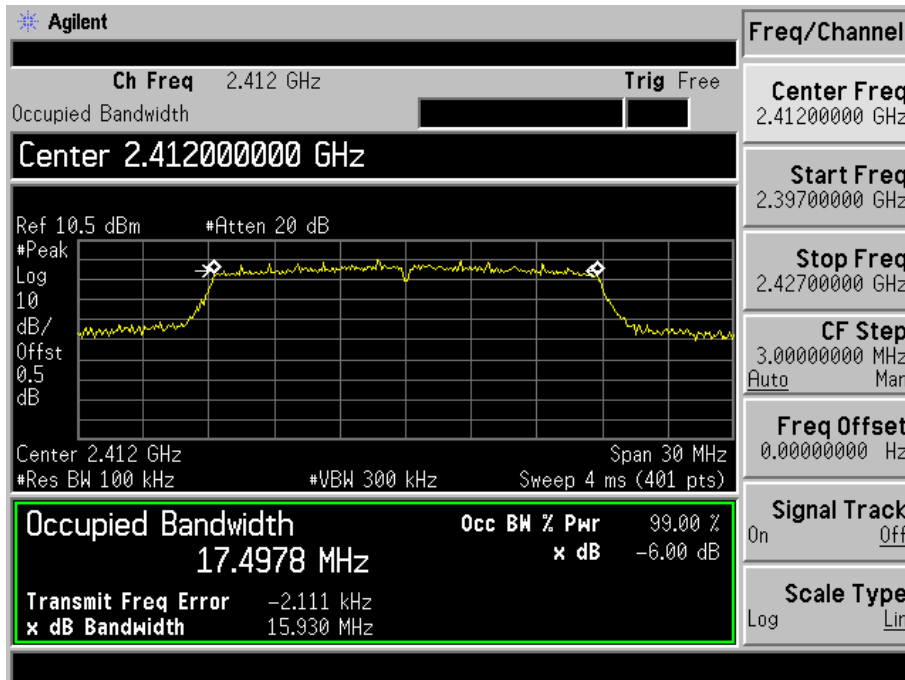


## 802.11n-HT20-Middle Channel

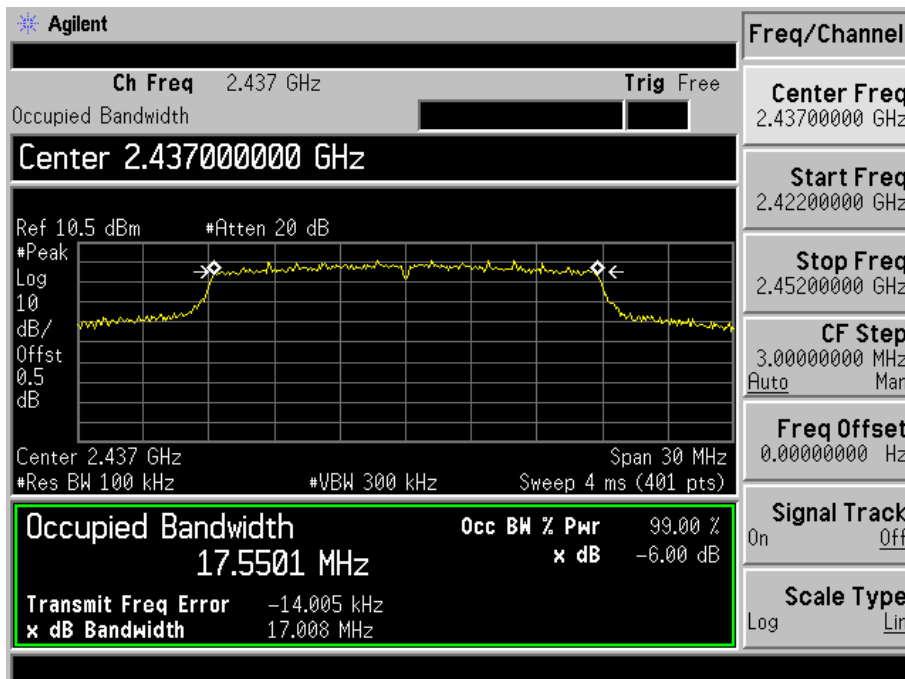


## 802.11n-HT20-High Channel

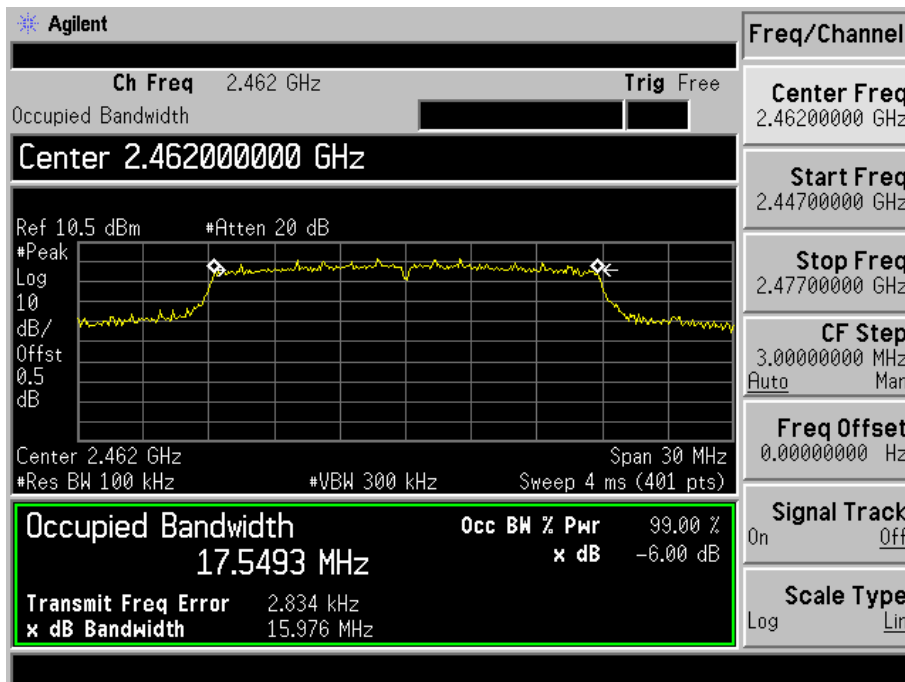


## 802.11n-HT40-Low Channel

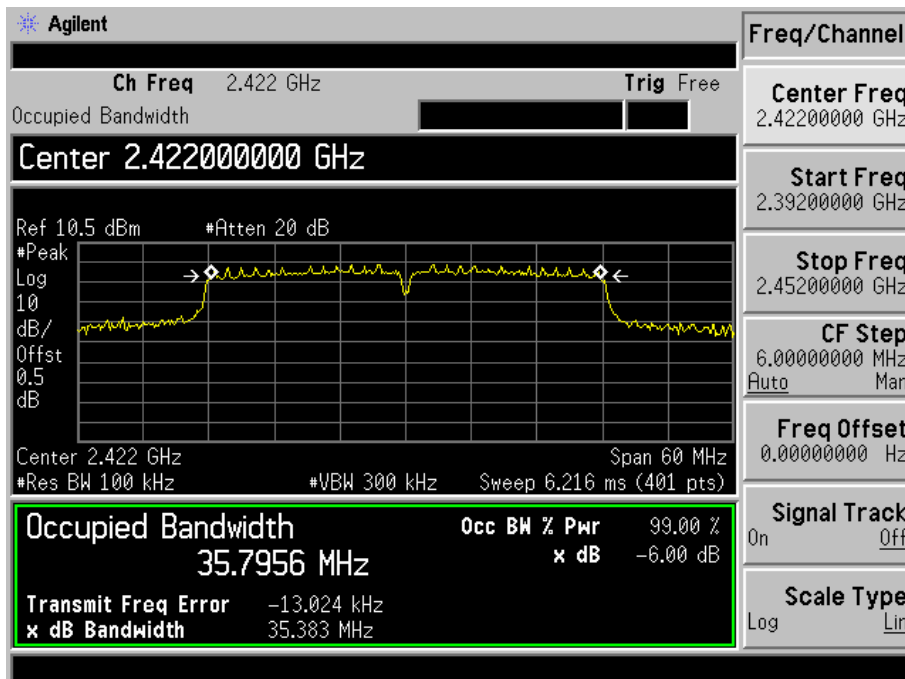

## 802.11n-HT40-Middle Channel

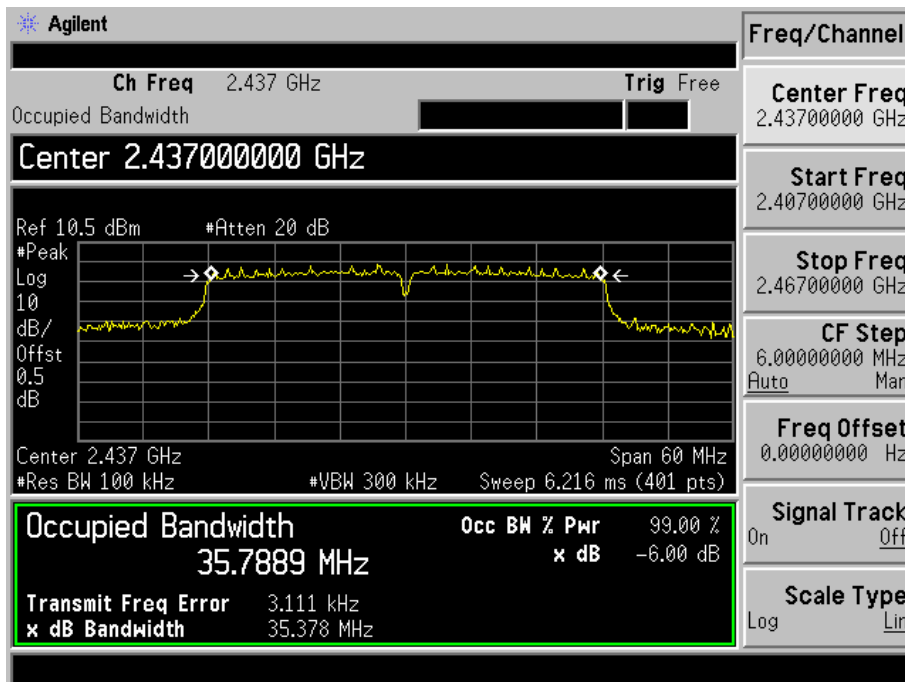

## 802.11n-HT40-High Channel

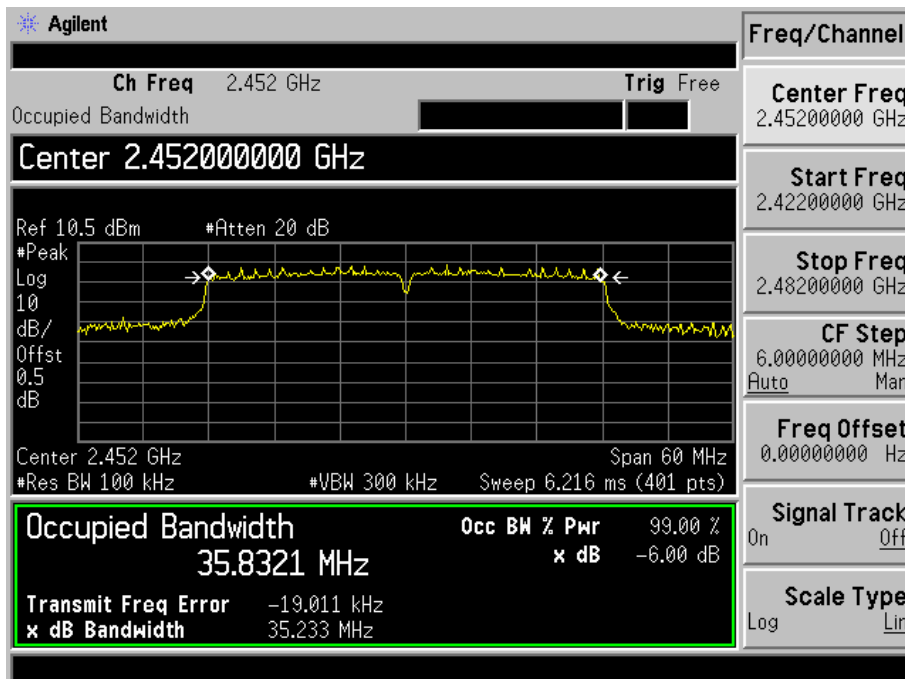



## 7. RF Output Power

### 7.1 Standard Applicable

According to 15.247(b)(3). For systems using digital modulation in the 902–928 MHz, 2400–2483.5 MHz, and 5725–5850 MHz bands: 1 Watt.

### 7.2 Test Procedure

According to the KDB-558074 D01 v04, 9.2.2.2, when this option is exercised, the measured power is to be referenced to the OBW rather than the DTS bandwidth

- a) Set span to at least 1.5 times the OBW.
- b) Set RBW = 1-5% of the OBW, not to exceed 1 MHz.
- c) Set VBW  $\geq 3 \times$  RBW.
- d) Number of points in sweep  $\geq 2 \times$  span / RBW. (This gives bin-to-bin spacing  $\leq$  RBW/2, so that narrowband signals are not lost between frequency bins.)
- e) Sweep time = auto.
- f) Detector = RMS (i.e., power averaging), if available. Otherwise, use sample detector mode.
- g) If transmit duty cycle  $< 98 \%$ , use a sweep trigger with the level set to enable triggering only on full power pulses. The transmitter shall operate at maximum power control level for the entire duration of every sweep. If the EUT transmits continuously (i.e., with no off intervals) or at duty cycle  $\geq 98 \%$ , and if each transmission is entirely at the maximum power control level, then the trigger shall be set to “free run” .
- h) Trace average at least 100 traces in power averaging (i.e., RMS) mode.
- i) Compute power by integrating the spectrum across the OBW of the signal using the instrument’s band power measurement function, with band limits set equal to the OBW band edges. If the instrument does not have a band power function, sum the spectrum levels (in power units) at intervals equal to the RBW extending across the entire OBW of the spectrum.

### 7.3 Environmental Conditions


Temperature:	26° C
Relative Humidity:	57%
ATM Pressure:	1011 mbar

#### 7.4 Summary of Test Results/Plots

Test Mode	Frequency MHz	Reading dBm	Output Power mW	Limit mW
802.11b_11Mbps	2412	15.29	33.806	1000
	2437	14.74	29.785	1000
	2462	15.02	31.769	1000
802.11g_54Mbps	2412	10.34	10.814	1000
	2437	12.88	19.409	1000
	2462	12.35	17.179	1000
802.11n HT20_MCS7	2412	10.70	11.749	1000
	2437	12.64	18.365	1000
	2462	11.96	15.704	1000
802.11n HT40_MCS7	2422	11.14	13.002	1000
	2437	11.95	15.668	1000
	2452	11.05	12.735	1000

Please refer to the following test plots:


## 802.11b-11Mbps-Low Channel

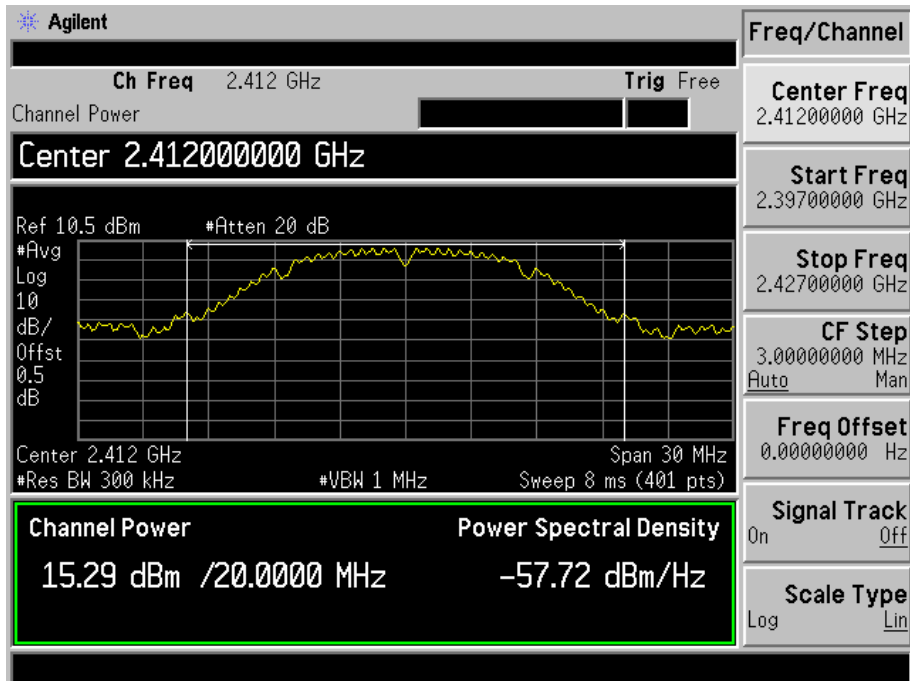


## 802.11b -11Mbps-Middle Channel




## 802.11b -11Mbps-High Channel

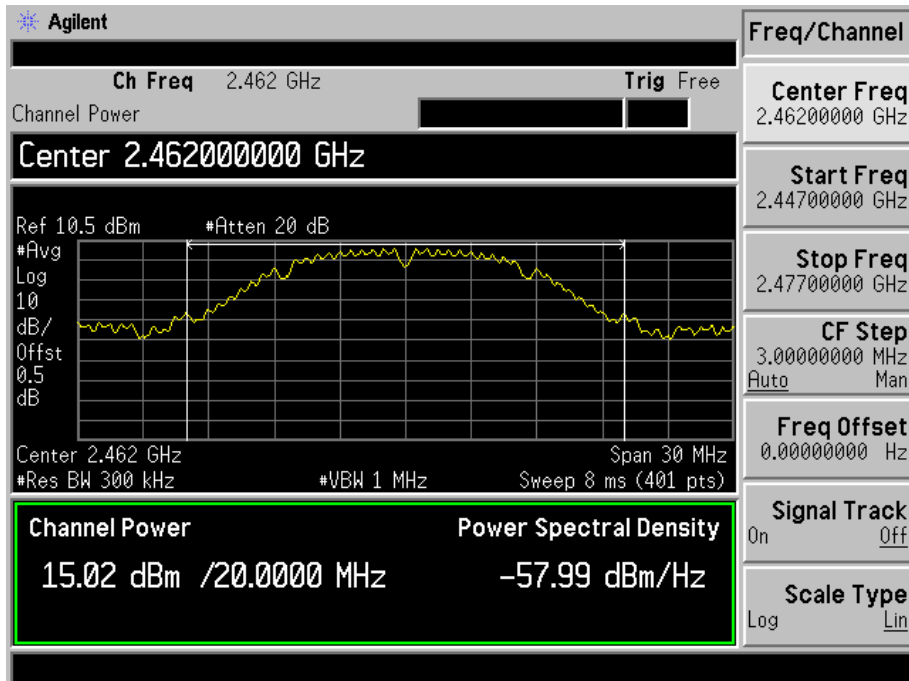


## 802.11g-54Mbps-Low Channel

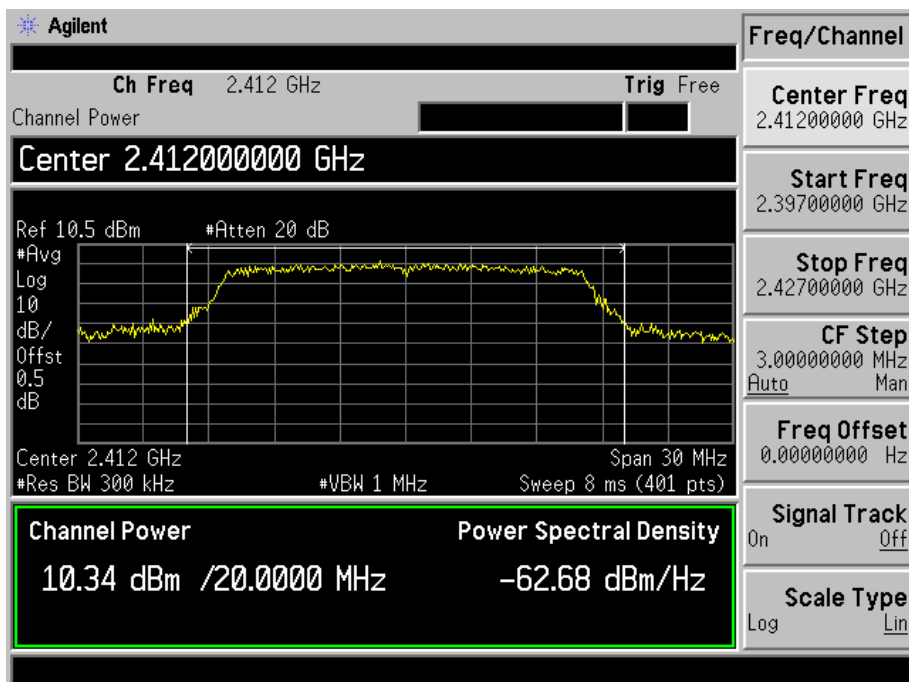


## 802.11g-54Mbps-Middle Channel

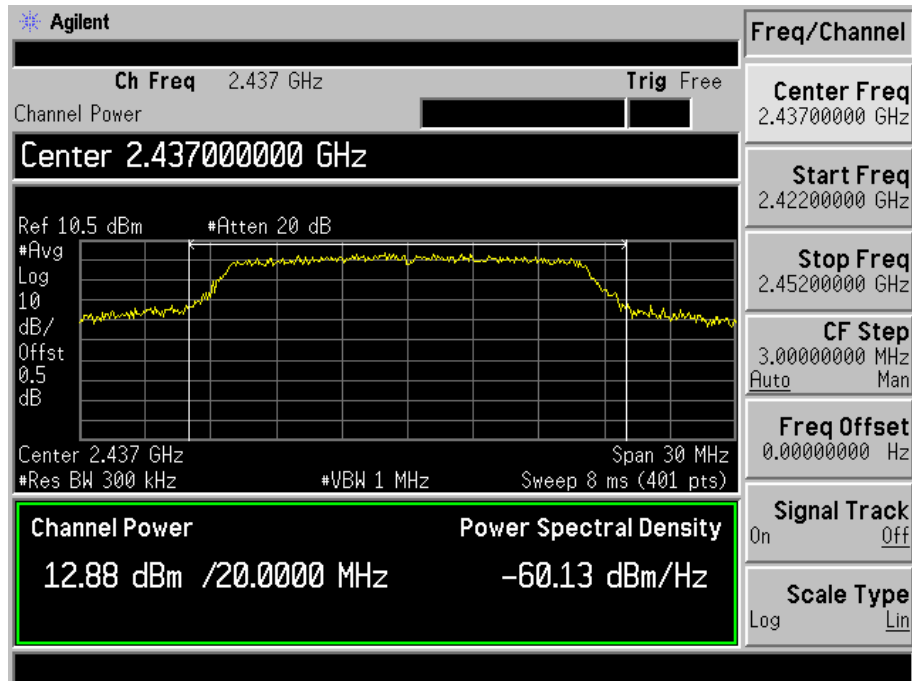


## 802.11g-54Mbps-High Channel

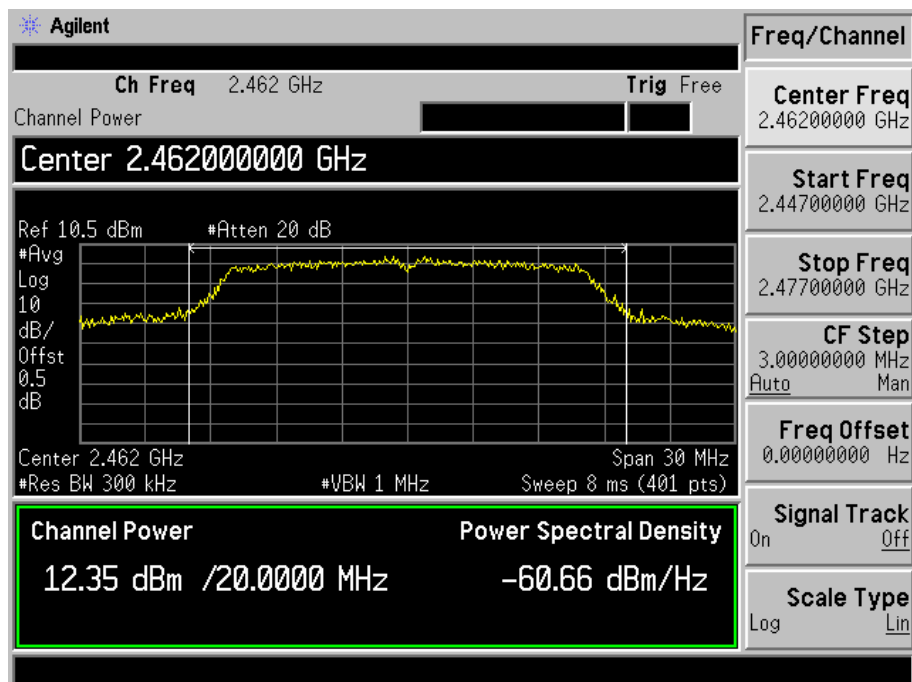


## 802.11n-HT20-MCS7-Low Channel

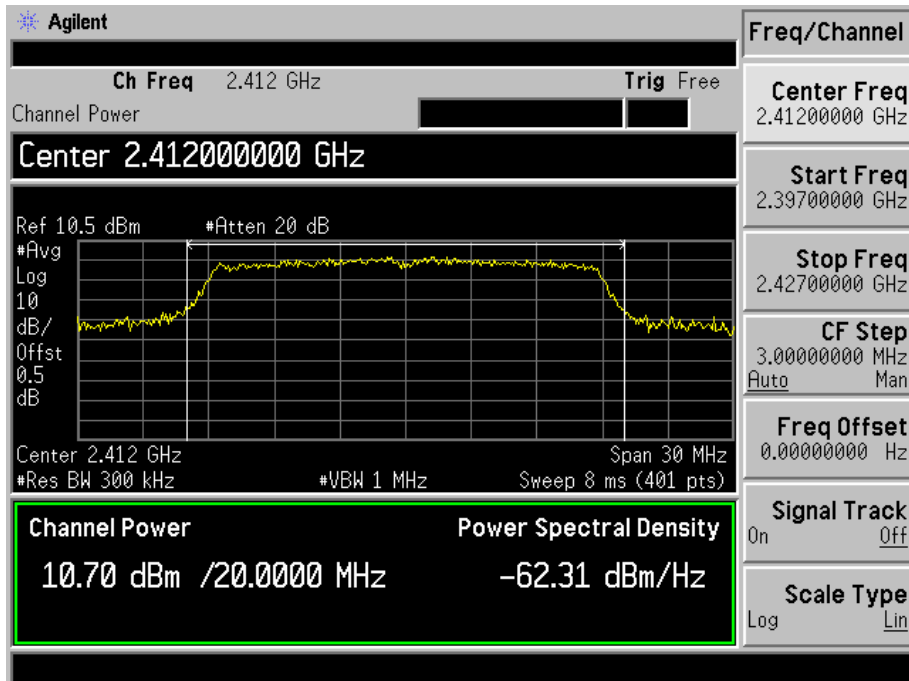


## 802.11n-HT20-MCS7-Middle Channel

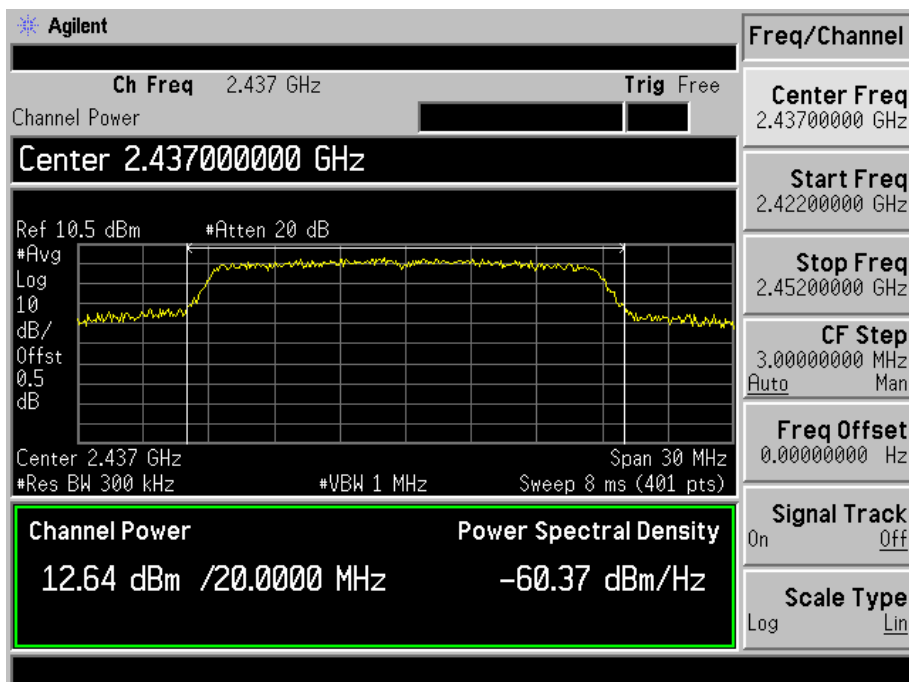


## 802.11n-HT20-MCS7-High Channel

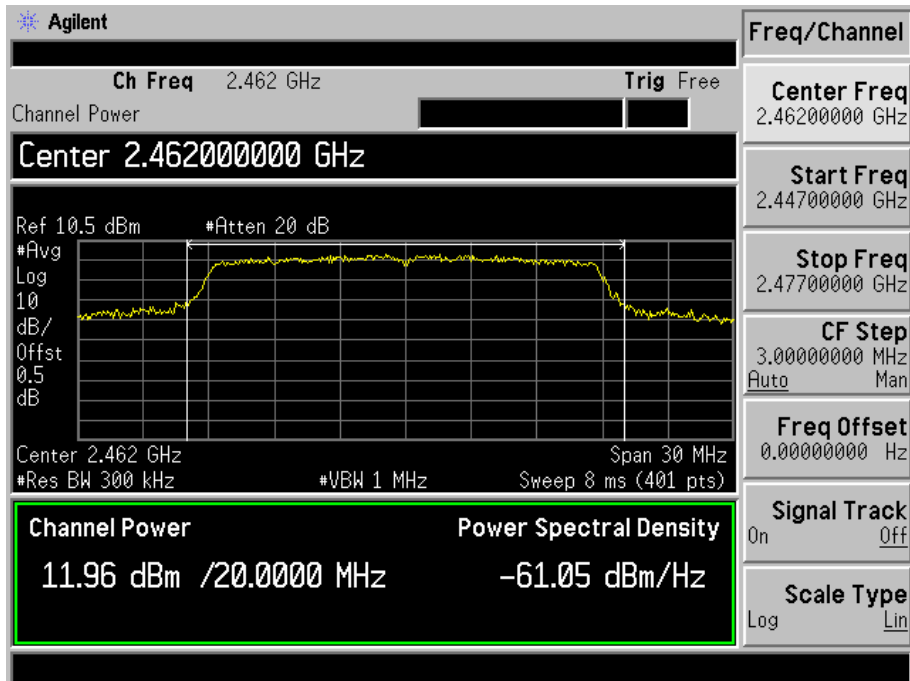


## 802.11n-HT40-MCS7-Low Channel

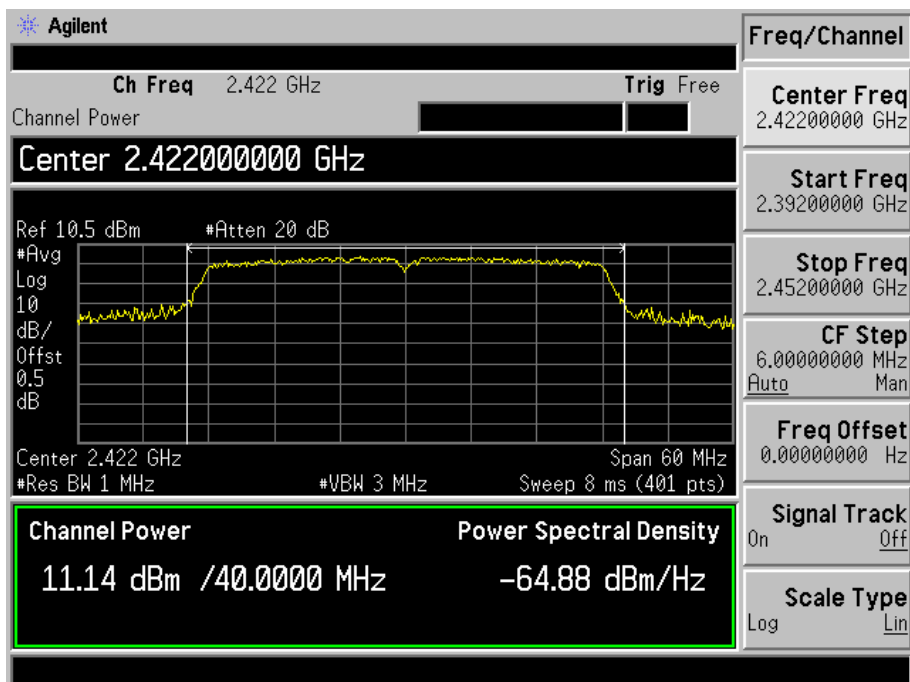

## 802.11n-HT40-MCS7-Middle Channel

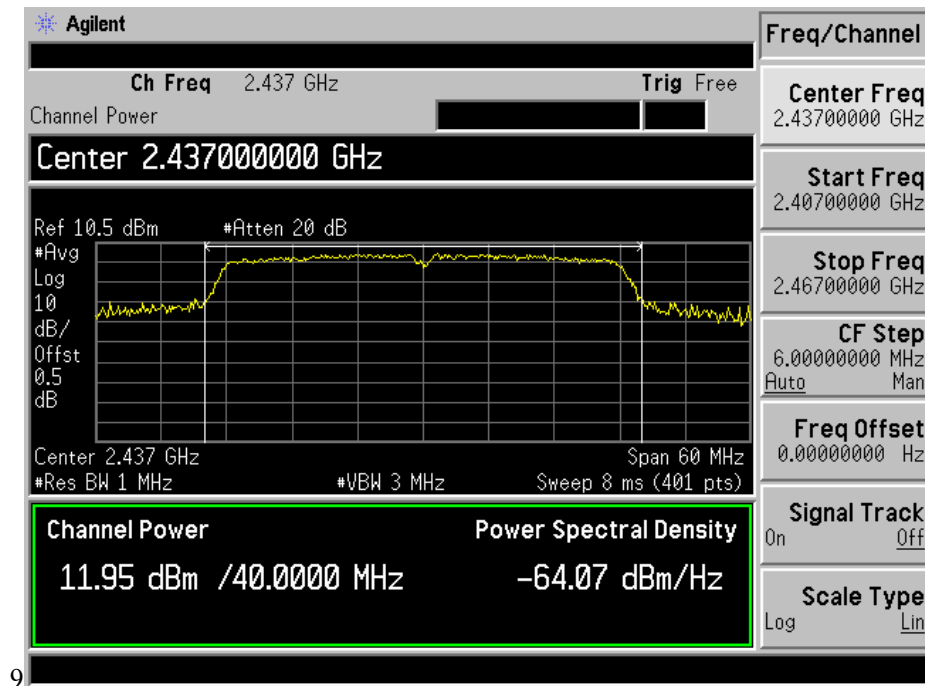

## 802.11n-HT40-MCS7-High Channel

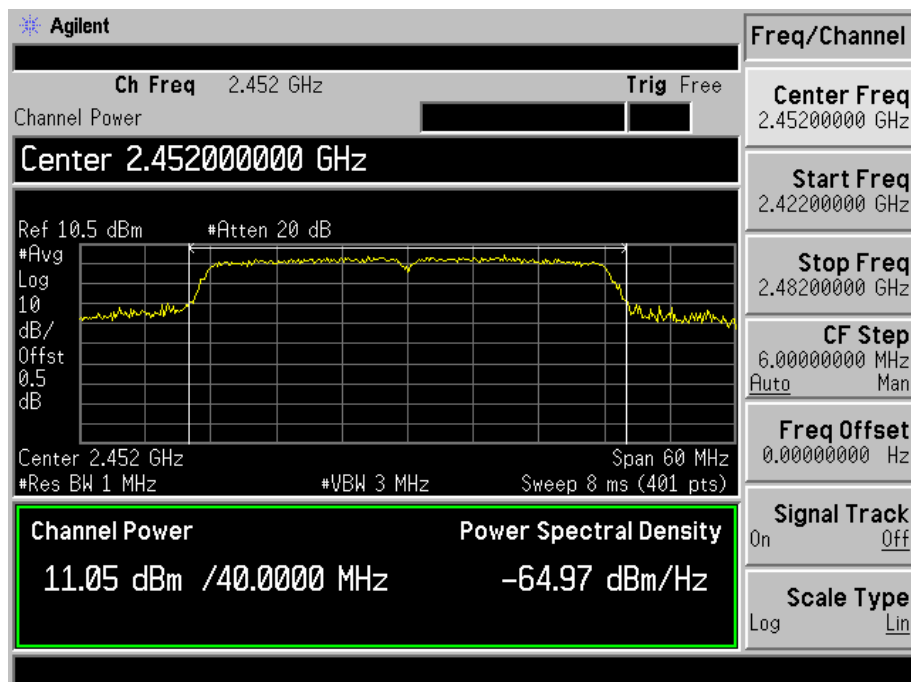



## 8. Field Strength of Spurious Emissions

### 8.1 Standard Applicable


According to §15.247(d), in any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a).


The emission limit in this paragraph is based on measurement instrumentation employing an average detector. The provisions in §15.35 for limiting peak emissions apply. Spurious Radiated Emissions measurements starting below or at the lowest crystal frequency.

### 8.2 Test Procedure

The setup of EUT is according with per ANSI C63.10-2013 measurement procedure. The specification used was with the FCC Part 15.205 15.247(a) and FCC Part 15.209 Limit.

The external I/O cables were draped along the test table and formed a bundle 30 to 40 cm long in the middle. The spacing between the peripherals was 10 cm.

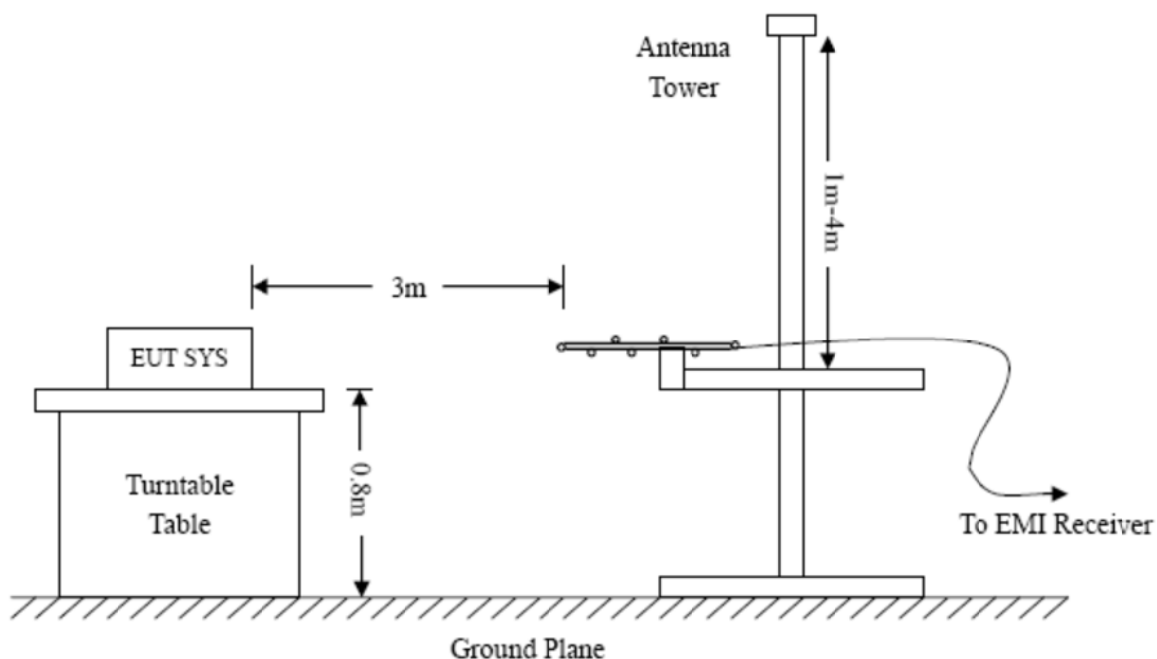

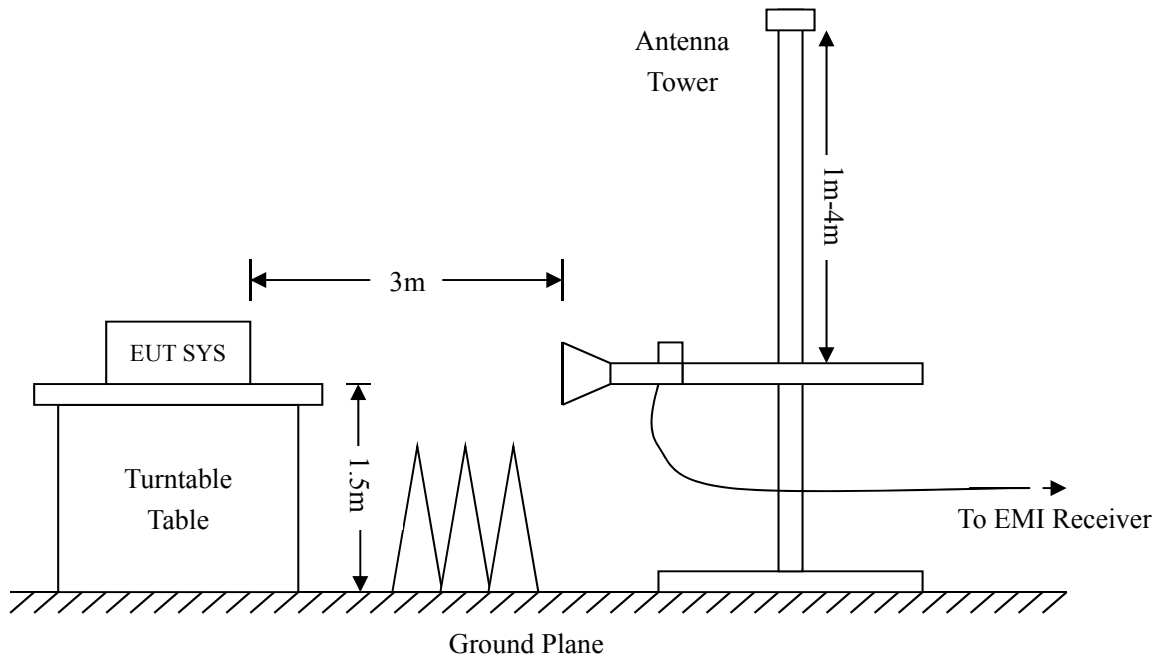

Frequency :9kHz-30MHz  
 RBW=10KHz,  
 VBW =30KHz  
 Sweep time= Auto  
 Trace = max hold  
 Detector function = peak

Frequency :30MHz-1GHz  
 RBW=120KHz,  
 VBW=360KHz  
 Sweep time= Auto  
 Trace = max hold  
 Detector function = peak, QP

Frequency :Above 1GHz  
 RBW=1MHz,  
 VBW=3MHz(Peak), 10Hz(AV)  
 Sweep time= Auto  
 Trace = max hold  
 Detector function = peak, AV

### 8.3 Corrected Amplitude & Margin Calculation

The Corrected Amplitude is calculated by adding the Antenna Factor and the Cable Factor, and subtracting the Amplifier Gain from the Amplitude reading. The basic equation is as follows:

$$\text{Corr. Ampl.} = \text{Indicated Reading} + \text{Ant. Factor} + \text{Cable Loss} - \text{Ampl. Gain}$$

The “**Margin**” column of the following data tables indicates the degree of compliance with the applicable limit. For example, a margin of -6dB $\mu$ V means the emission is 6dB $\mu$ V below the maximum limit. The equation for margin calculation is as follows:

$$\text{Margin} = \text{Corr. Ampl.} - \text{FCC Part 15 Limit}$$

### 8.4 Environmental Conditions

Temperature:	25 °C
Relative Humidity:	52%
ATM Pressure:	1012 mbar

### 8.5 Summary of Test Results/Plots


According to the data below, the FCC Part 15.205, 15.209 and 15.247 standards, and had the worst cases:

*Note: this EUT was tested in 3 orthogonal positions and the worst case position data was reported.*

#### Plot of Radiated Emissions Test Data (30MHz to 1GHz)


EUT: *Smart Phone*  
 Tested Model: *Philips S338*  
 Operating Condition: *802.11b Transmitting Low Channel-2412MHz*  
 Comment: *DC 3.7V*

Test Specification: *Horizontal*

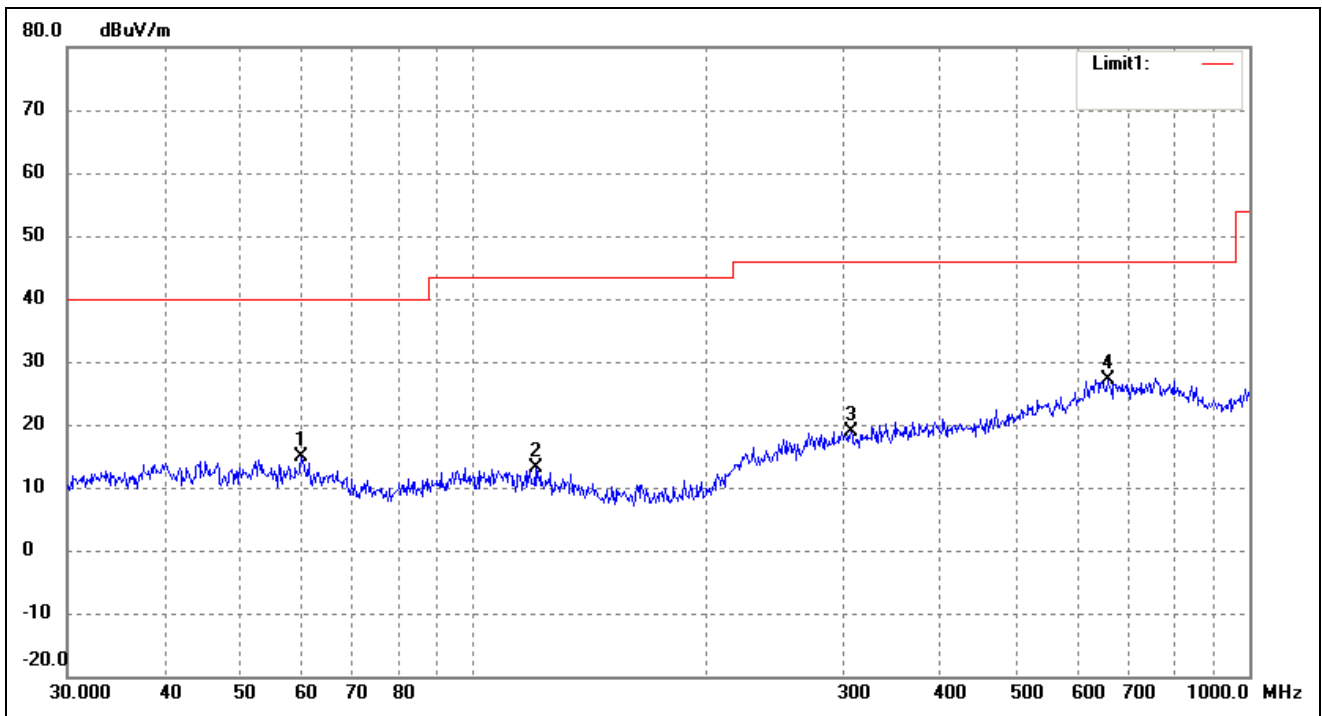

No.	Frequency (MHz)	Reading (dBuV/m)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree ( )	Height (cm)	Remark
1	60.0691	31.31	-16.52	14.79	40.00	-25.21	186	100	peak
2	120.2766	29.71	-16.69	13.02	43.50	-30.48	188	100	peak
3	306.7537	28.50	-9.51	18.99	46.00	-27.01	142	100	peak
4	656.5300	28.51	-1.41	27.10	46.00	-18.90	128	100	peak

Test Specification: Vertical

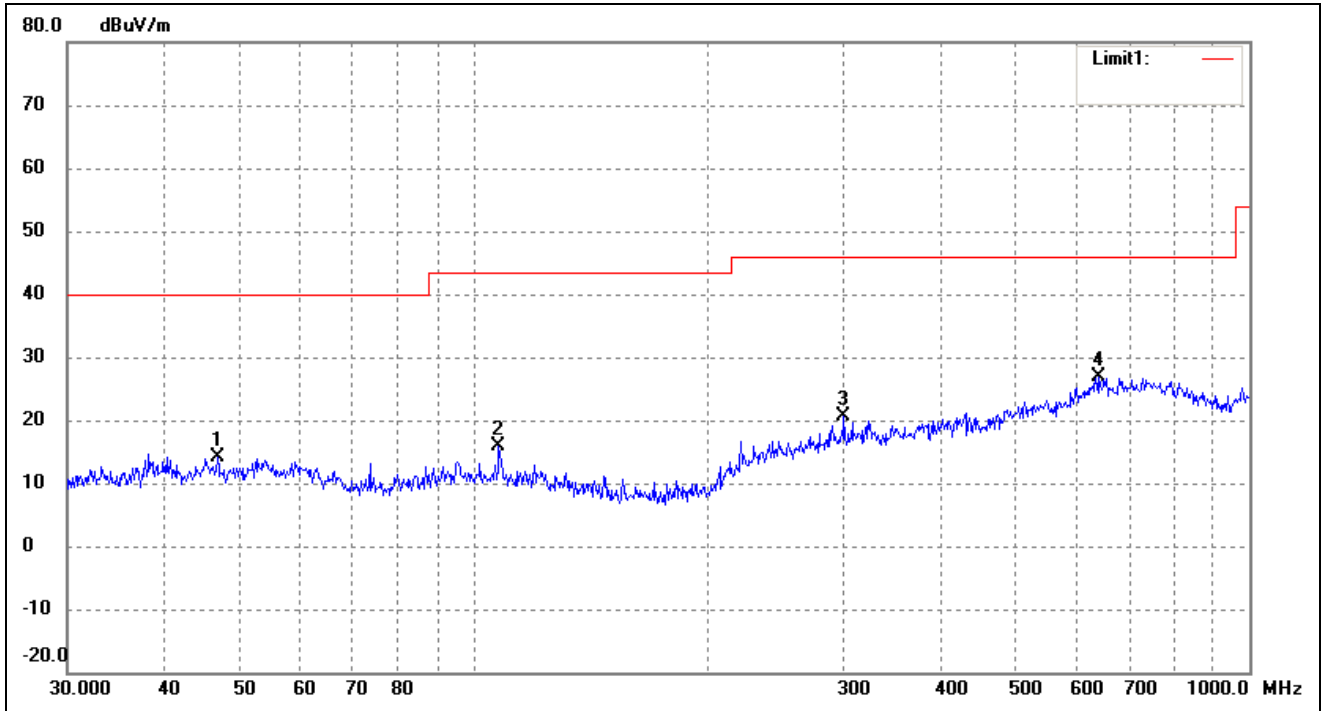


No.	Frequency (MHz)	Reading (dBuV/m)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree ( )	Height (cm)	Remark
1	46.8303	30.55	-16.51	14.04	40.00	-25.96	83	100	peak
2	107.8877	32.56	-16.61	15.95	43.50	-27.55	168	100	peak
3	300.3673	30.23	-9.59	20.64	46.00	-25.36	57	100	peak
4	640.6110	27.86	-1.03	26.83	46.00	-19.17	100	100	peak

Operating Condition: 802.11b Transmitting Middle Channel-2437MHz


Comment: DC 3.7V

Test Specification: Horizontal

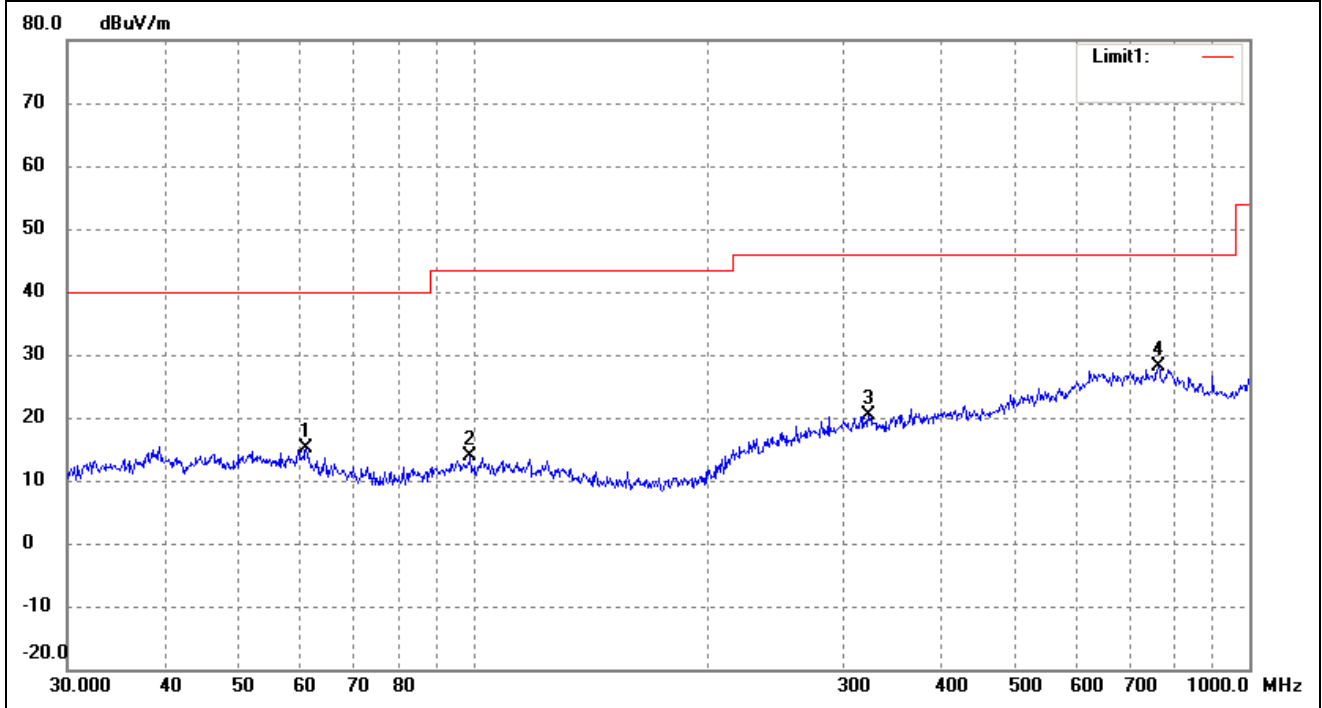

No.	Frequency (MHz)	Reading (dBuV/m)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree ( )	Height (cm)	Remark
1	60.9176	31.80	-16.70	15.10	40.00	-24.90	250	100	peak
2	99.1797	30.50	-16.68	13.82	43.50	-29.68	254	100	peak
3	323.3204	29.87	-9.41	20.46	46.00	-25.54	63	100	peak
4	763.3757	28.88	-0.78	28.10	46.00	-17.90	329	100	peak

Test Specification: Vertical

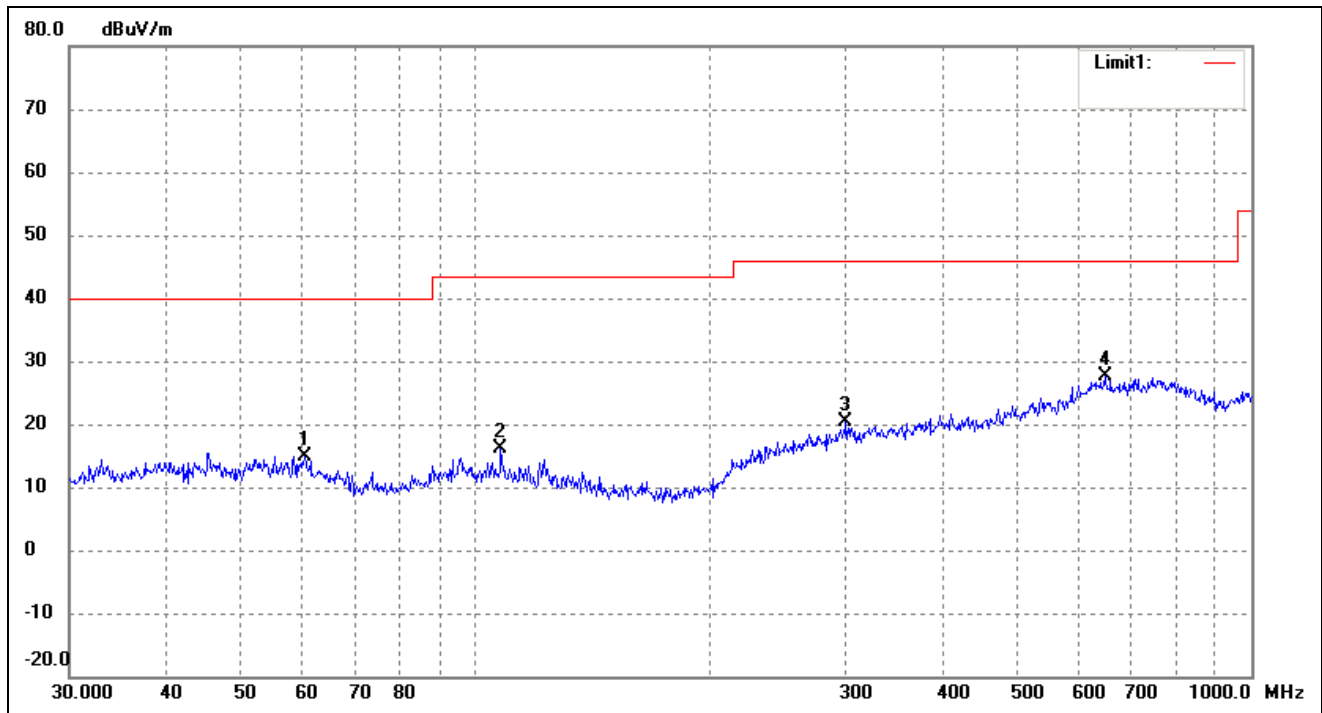


No.	Frequency (MHz)	Reading (dBuV/m)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree ( )	Height (cm)	Remark
1	60.2801	31.54	-16.56	14.98	40.00	-25.02	83	100	peak
2	107.8877	32.82	-16.61	16.21	43.50	-27.29	168	100	peak
3	300.3673	29.94	-9.59	20.35	46.00	-25.65	57	100	peak
4	647.3856	28.72	-1.19	27.53	46.00	-18.47	100	100	peak

Operating Condition: 802.11b Transmitting High Channel-2462MHz


Comment: DC 3.7V

Test Specification: Horizontal

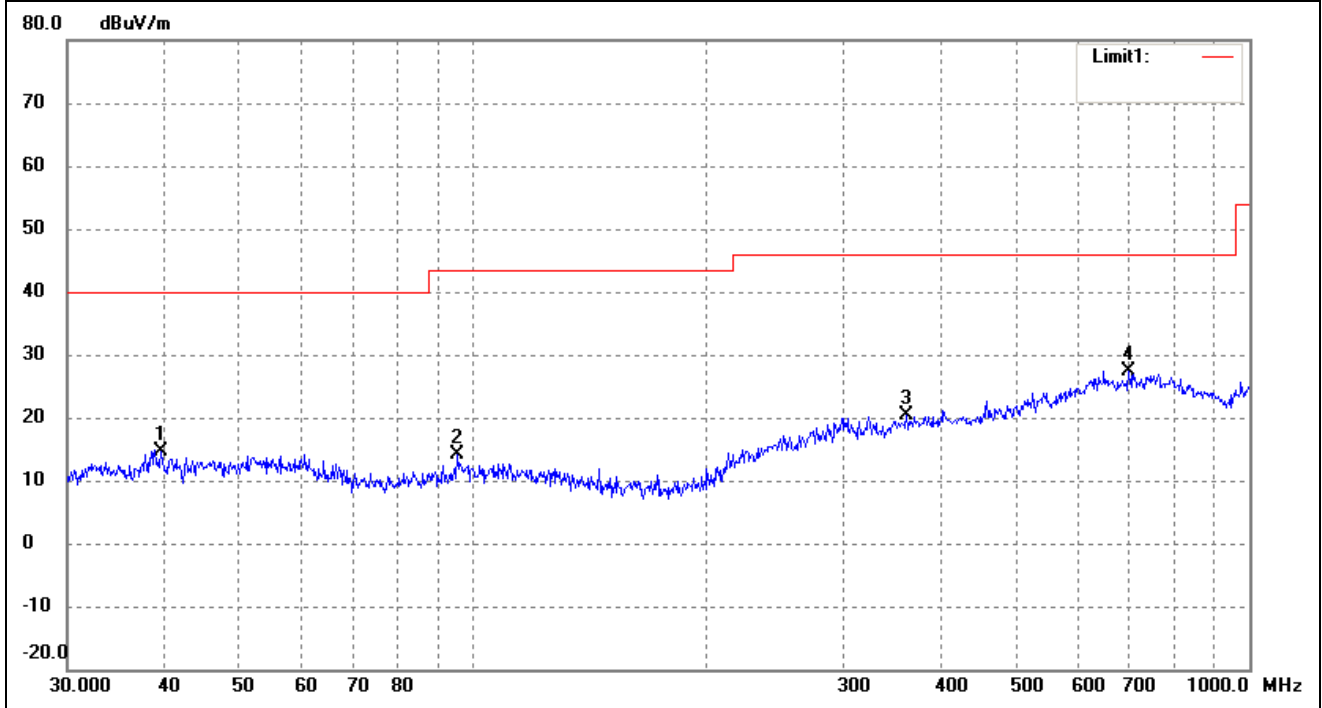

No.	Frequency (MHz)	Reading (dBuV/m)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree ( )	Height (cm)	Remark
1	39.5757	31.14	-16.59	14.55	40.00	-25.45	60	100	peak
2	95.4270	31.29	-17.23	14.06	43.50	-29.44	197	100	peak
3	361.7139	29.17	-8.91	20.26	46.00	-25.74	99	100	peak
4	699.3046	29.19	-1.78	27.41	46.00	-18.59	124	100	peak

Test Specification: Vertical

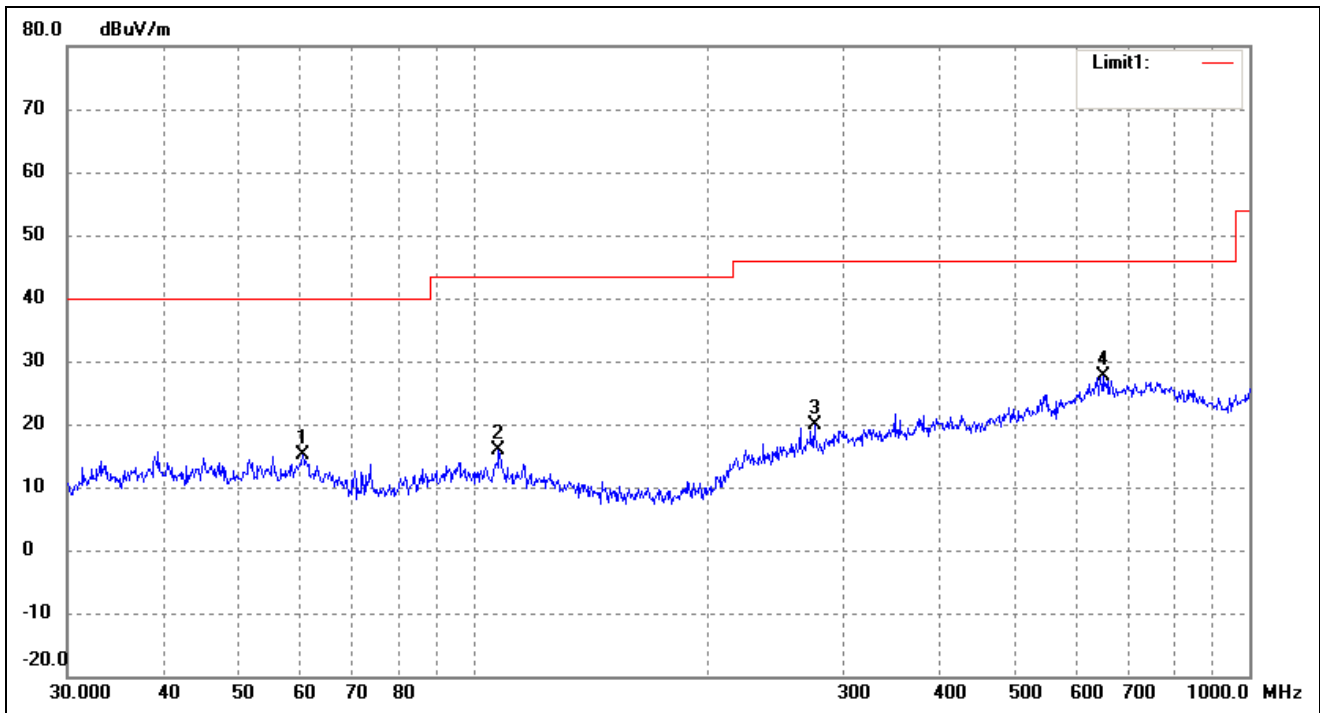


No.	Frequency (MHz)	Reading (dBuV/m)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree ( )	Height (cm)	Remark
1	60.2801	31.59	-16.56	15.03	40.00	-24.97	224	100	peak
2	107.8877	32.53	-16.61	15.92	43.50	-27.58	93	100	peak
3	275.1570	30.64	-10.70	19.94	46.00	-26.06	238	100	peak
4	647.3856	28.74	-1.19	27.55	46.00	-18.45	110	100	peak




**Plot of Radiated Emissions Test Data (30MHz to 1GHz)**

EUT: Smart Phone  
 Tested Model: Philips S338  
 Operating Condition: 802.11g Transmitting Low Channel-2412MHz  
 Comment: DC 3.7V  
 Test Specification: Horizontal

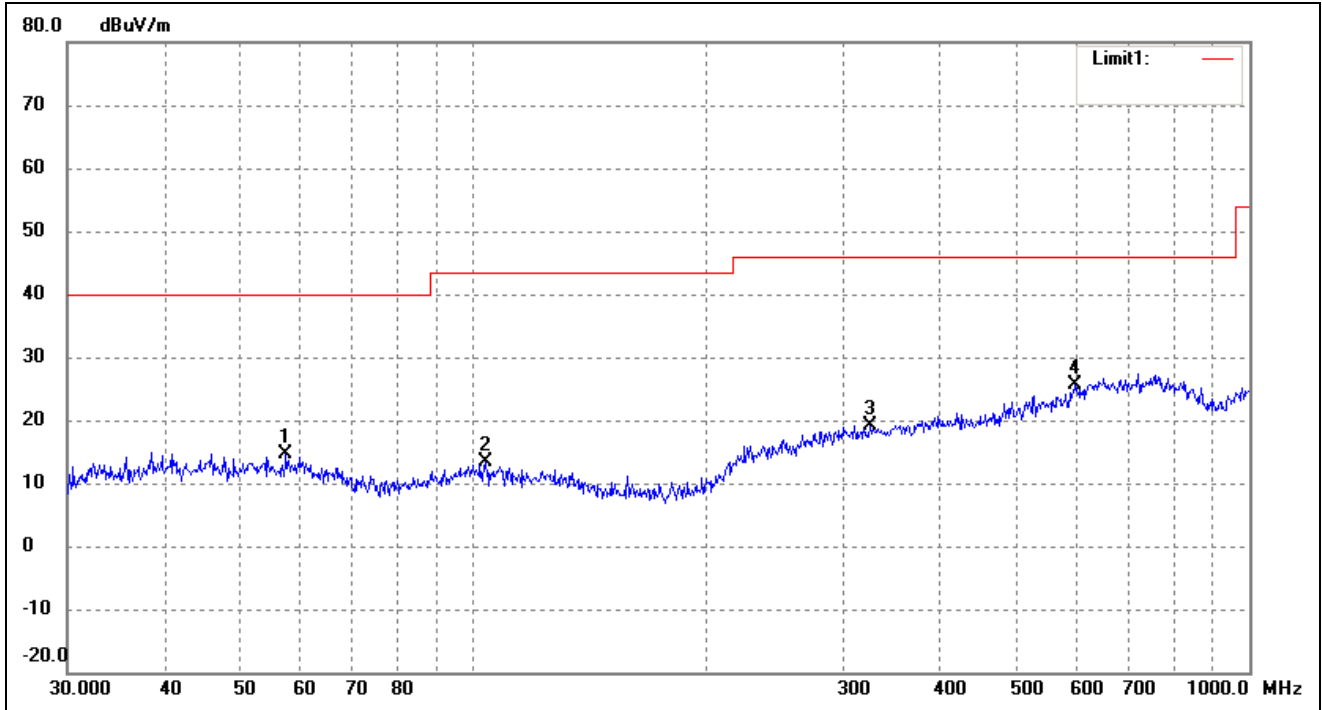

No.	Frequency (MHz)	Reading (dBuV/m)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree ( )	Height (cm)	Remark
1	57.3923	31.25	-16.54	14.71	40.00	-25.29	88	100	peak
2	103.8055	29.86	-16.60	13.26	43.50	-30.24	100	100	peak
3	324.4561	28.64	-9.44	19.20	46.00	-26.80	88	100	peak
4	595.1329	26.90	-1.16	25.74	46.00	-20.26	142	100	peak

Test Specification: Vertical

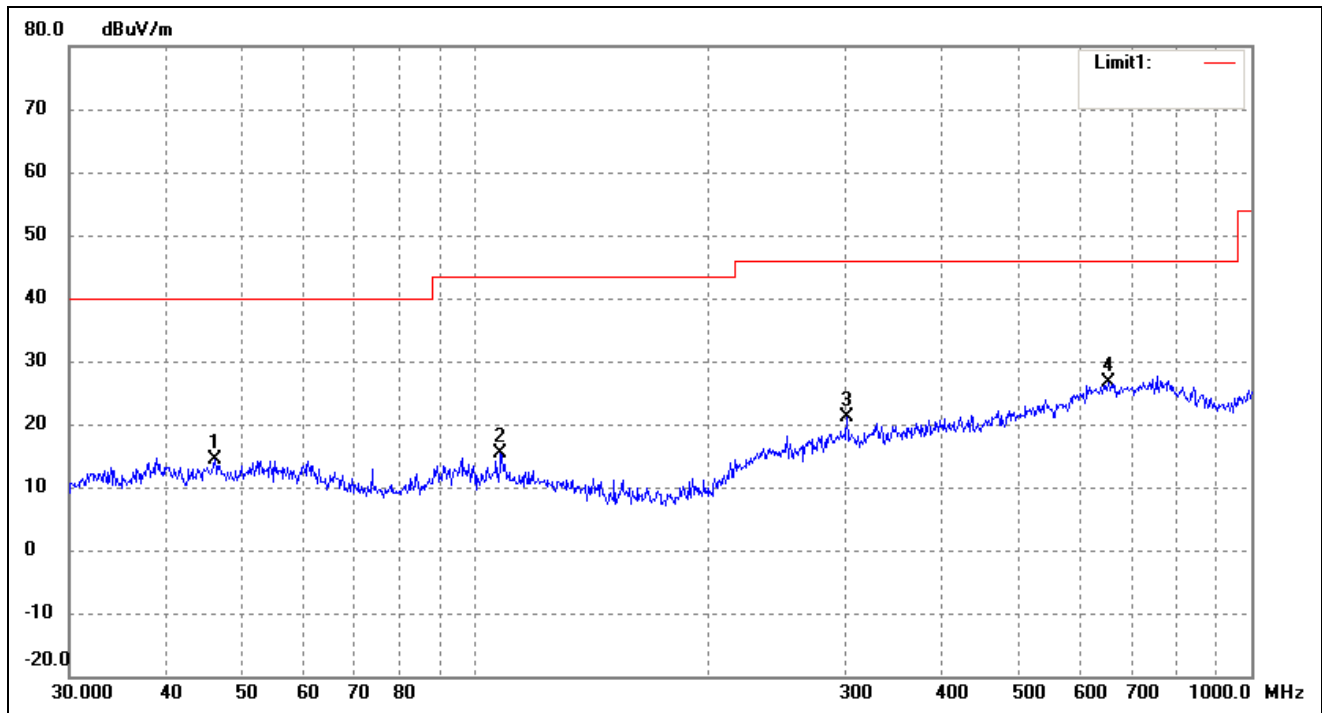


No.	Frequency (MHz)	Reading (dBuV/m)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree ( )	Height (cm)	Remark
1	46.1780	30.85	-16.49	14.36	40.00	-25.64	236	100	peak
2	107.8877	32.07	-16.61	15.46	43.50	-28.04	92	100	peak
3	301.4224	30.80	-9.59	21.21	46.00	-24.79	146	100	peak
4	654.2318	28.09	-1.38	26.71	46.00	-19.29	107	100	peak

Operating Condition: 802.11g Transmitting Middle Channel-2437MHz


Comment: DC 5V

Test Specification: Horizontal

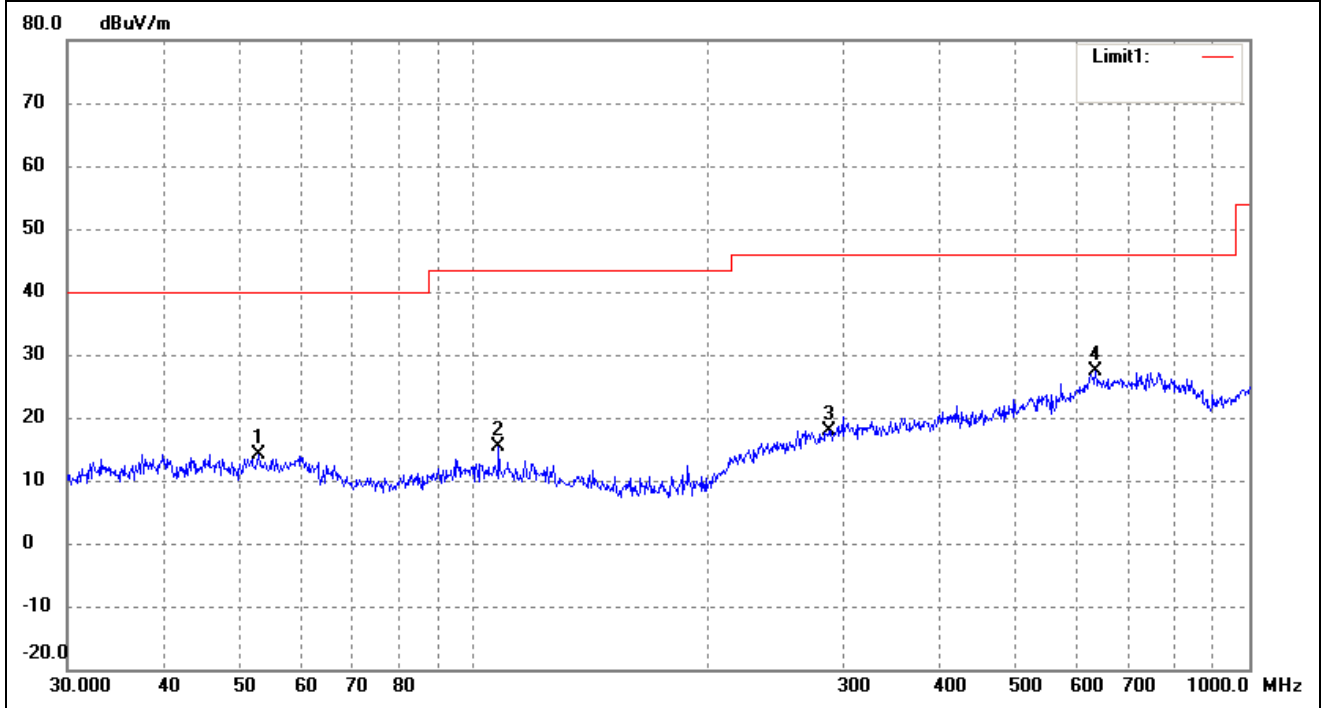

No.	Frequency (MHz)	Reading (dBuV/m)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree ( )	Height (cm)	Remark
1	52.9453	30.69	-16.48	14.21	40.00	-25.79	283	100	peak
2	107.8877	32.03	-16.61	15.42	43.50	-28.08	135	100	peak
3	286.9823	27.95	-10.09	17.86	46.00	-28.14	84	100	peak
4	633.9073	28.69	-1.21	27.48	46.00	-18.52	336	100	peak

Test Specification: Vertical

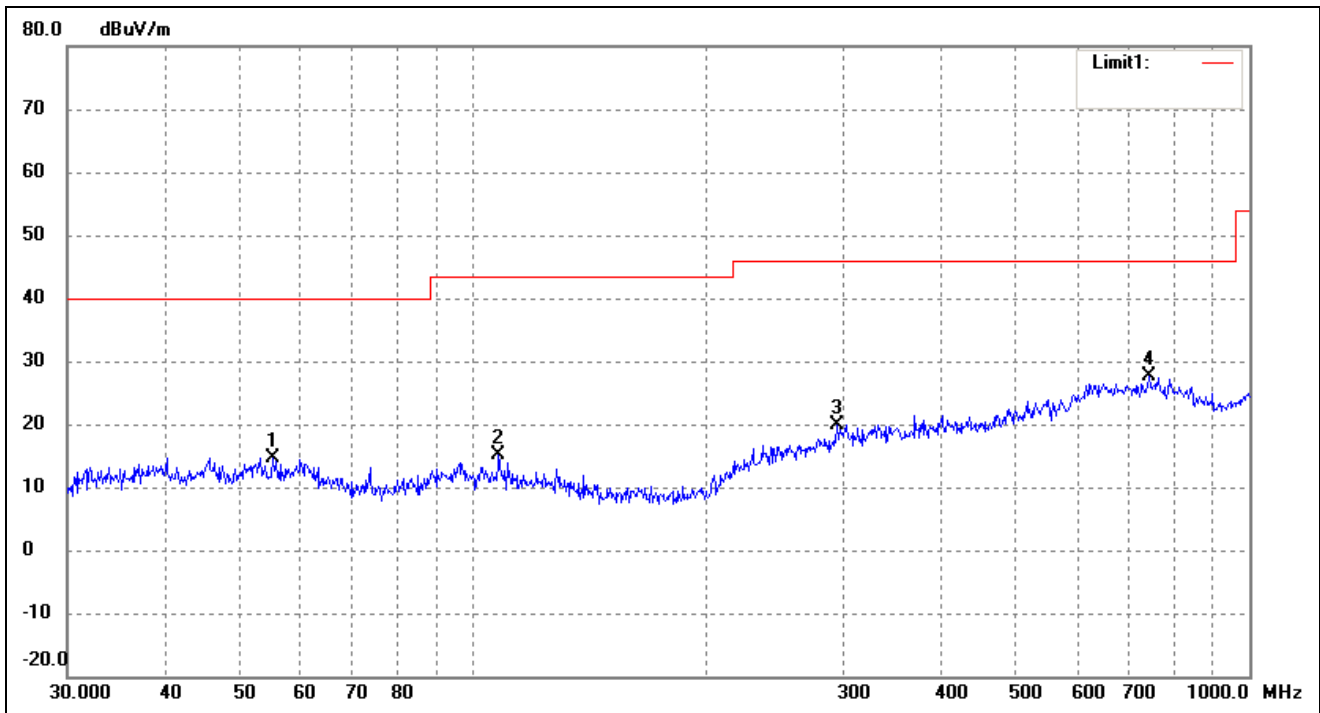


No.	Frequency (MHz)	Reading (dBuV/m)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree ( )	Height (cm)	Remark
1	55.2207	31.09	-16.51	14.58	40.00	-25.42	190	100	peak
2	107.8877	31.65	-16.61	15.04	43.50	-28.46	195	100	peak
3	294.1137	29.72	-9.79	19.93	46.00	-26.07	93	100	peak
4	742.2587	27.51	0.09	27.60	46.00	-18.40	93	100	peak

Operating Condition: 802.11g Transmitting High Channel-2462MHz


Comment: DC 3.7V

Test Specification: Horizontal

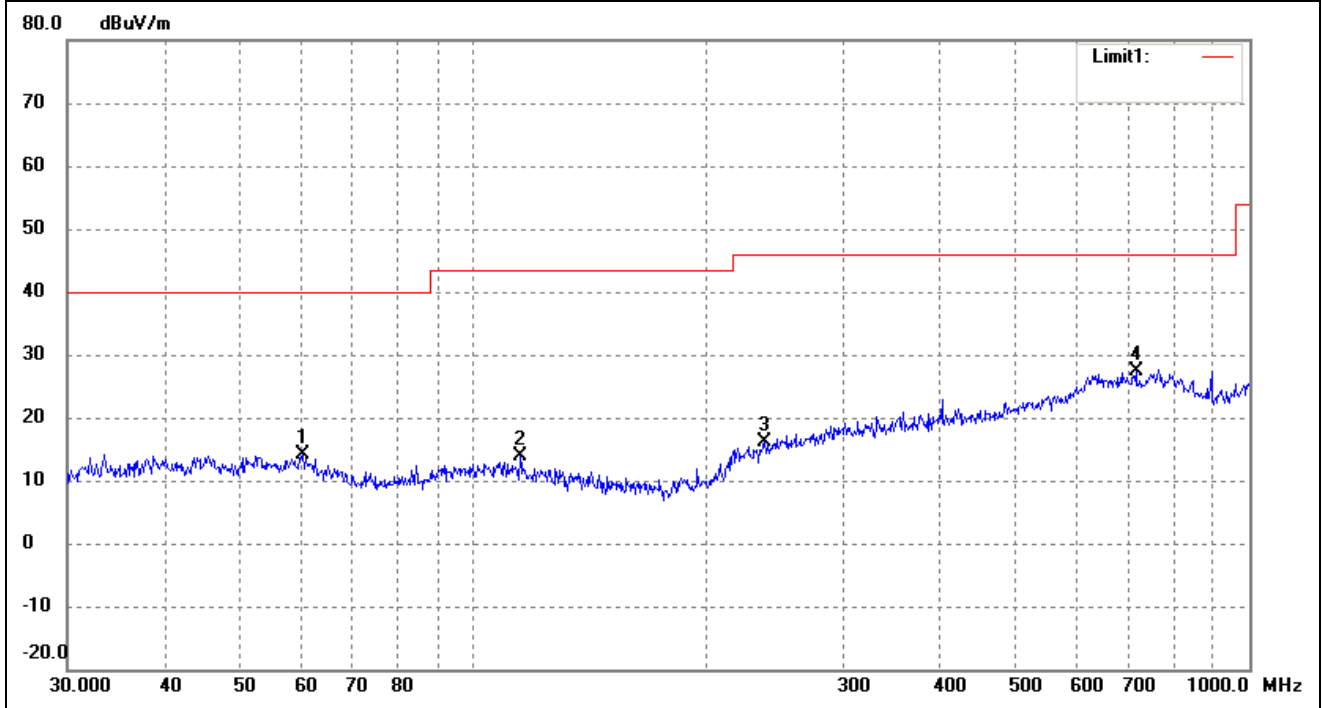

No.	Frequency (MHz)	Reading (dBuV/m)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree ( )	Height (cm)	Remark
1	60.2801	30.67	-16.56	14.11	40.00	-25.89	289	100	peak
2	114.9169	30.46	-16.64	13.82	43.50	-29.68	95	100	peak
3	237.4760	28.85	-12.71	16.14	46.00	-29.86	73	100	peak
4	714.1734	28.80	-1.32	27.48	46.00	-18.52	104	100	peak

Test Specification: Vertical

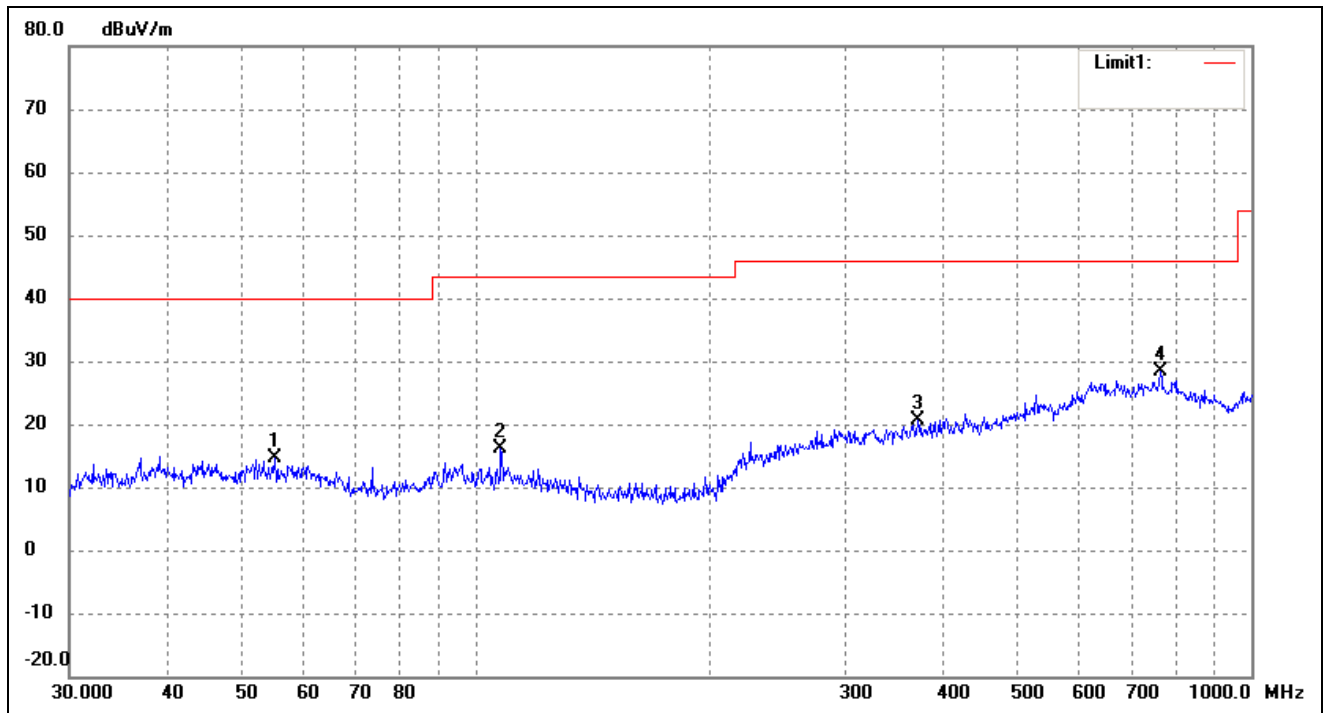


No.	Frequency (MHz)	Reading (dBuV/m)	Correct dB/m	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree ( )	Height (cm)	Remark
1	55.2207	31.08	-16.51	14.57	40.00	-25.43	216	100	peak
2	107.8877	32.85	-16.61	16.24	43.50	-27.26	95	100	peak
3	372.0045	29.42	-8.88	20.54	46.00	-25.46	186	100	peak
4	763.3757	29.18	-0.78	28.40	46.00	-17.60	113	100	peak

**Plot of Radiated Emissions Test Data (30MHz to 1GHz)**


EUT: *Smart Phone*  
 Tested Model: *Philips S338*  
 Operating Condition: *802.11n-HT20 Transmitting Low Channel-2412MHz*  
 Comment: *DC 3.7V*

Test Specification: *Horizontal*

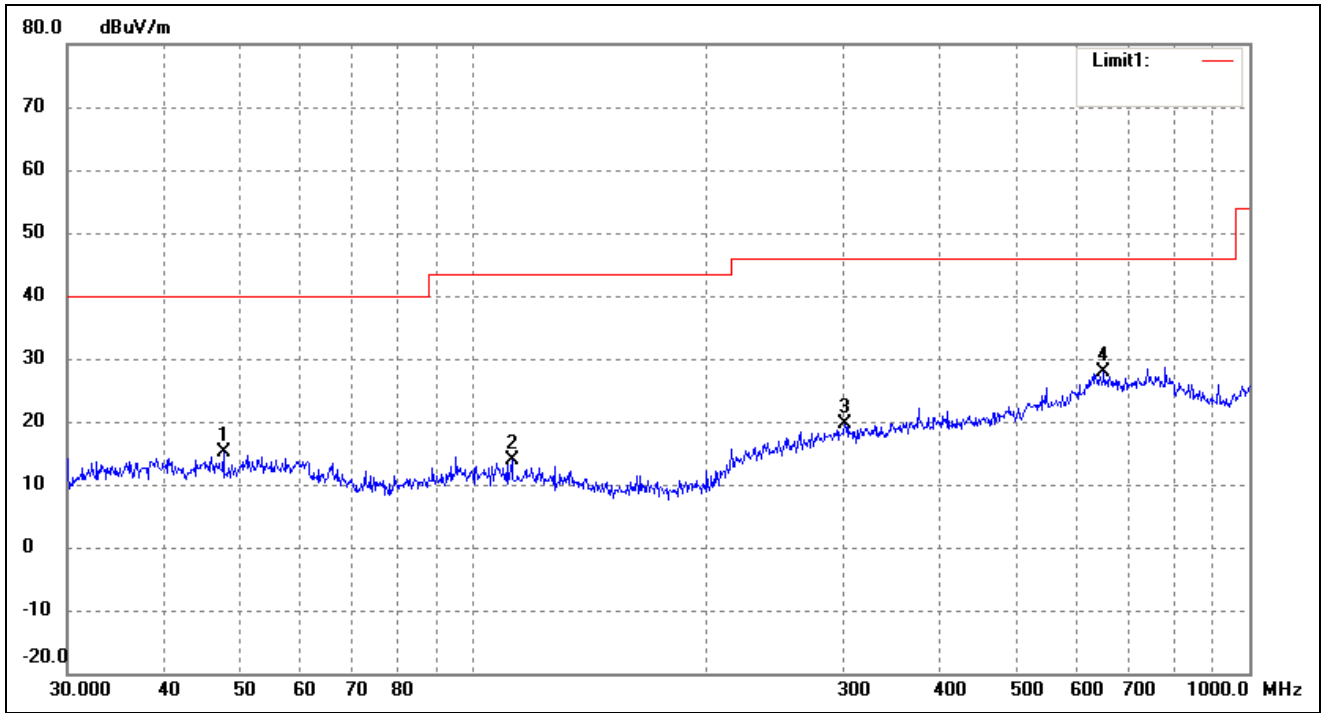

No.	Frequency (MHz)	Reading (dBuV/m)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree ( )	Height (cm)	Remark
1	47.6586	31.58	-16.52	15.06	40.00	-24.94	163	100	peak
2	112.1305	30.56	-16.63	13.93	43.50	-29.57	164	100	peak
3	301.4224	29.16	-9.59	19.57	46.00	-26.43	107	100	peak
4	649.6597	29.11	-1.26	27.85	46.00	-18.15	111	100	peak

Test Specification: Vertical

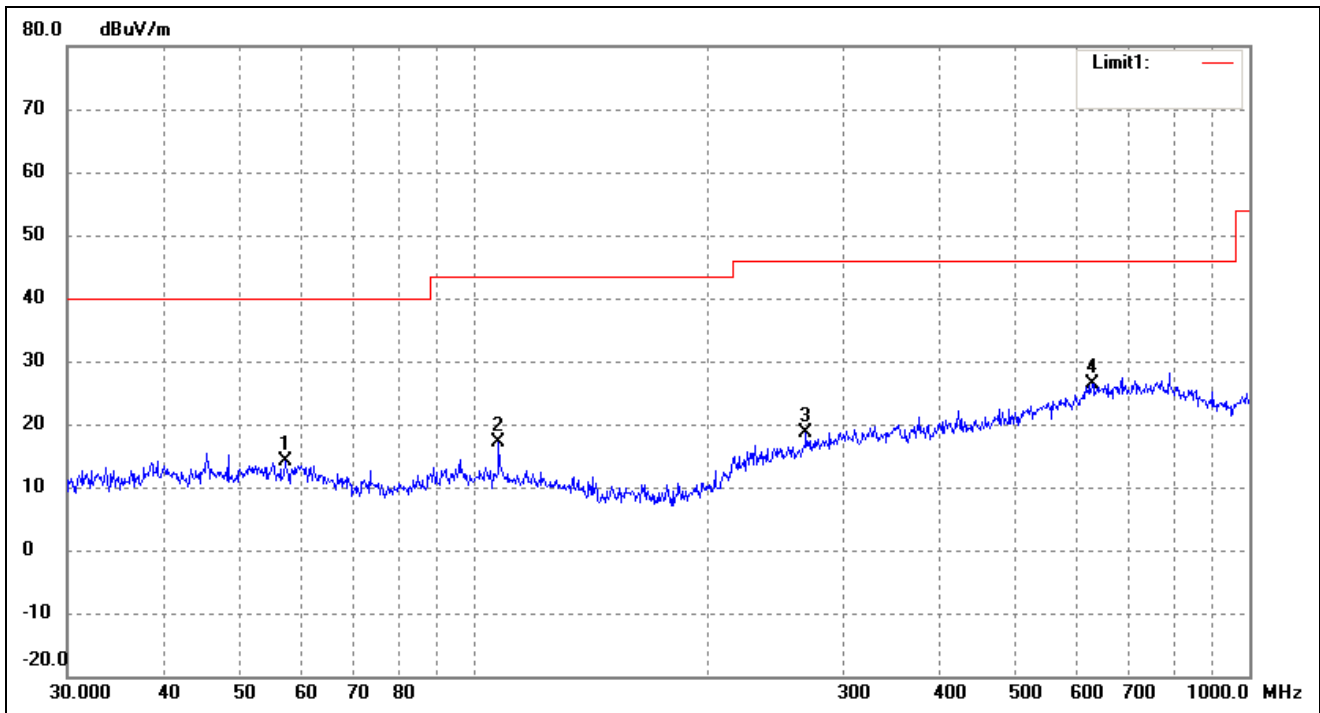


No.	Frequency (MHz)	Reading (dBuV/m)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree ( )	Height (cm)	Remark
1	57.1914	30.71	-16.54	14.17	40.00	-25.83	93	100	peak
2	107.8877	33.68	-16.61	17.07	43.50	-26.43	113	100	peak
3	268.4853	29.71	-11.18	18.53	46.00	-27.47	79	100	peak
4	627.2738	27.79	-1.45	26.34	46.00	-19.66	99	100	peak



Operating Condition: 802.11n-HT20 Transmitting Middle Channel-2437MHz


Comment: DC 3.7V

Test Specification: Horizontal

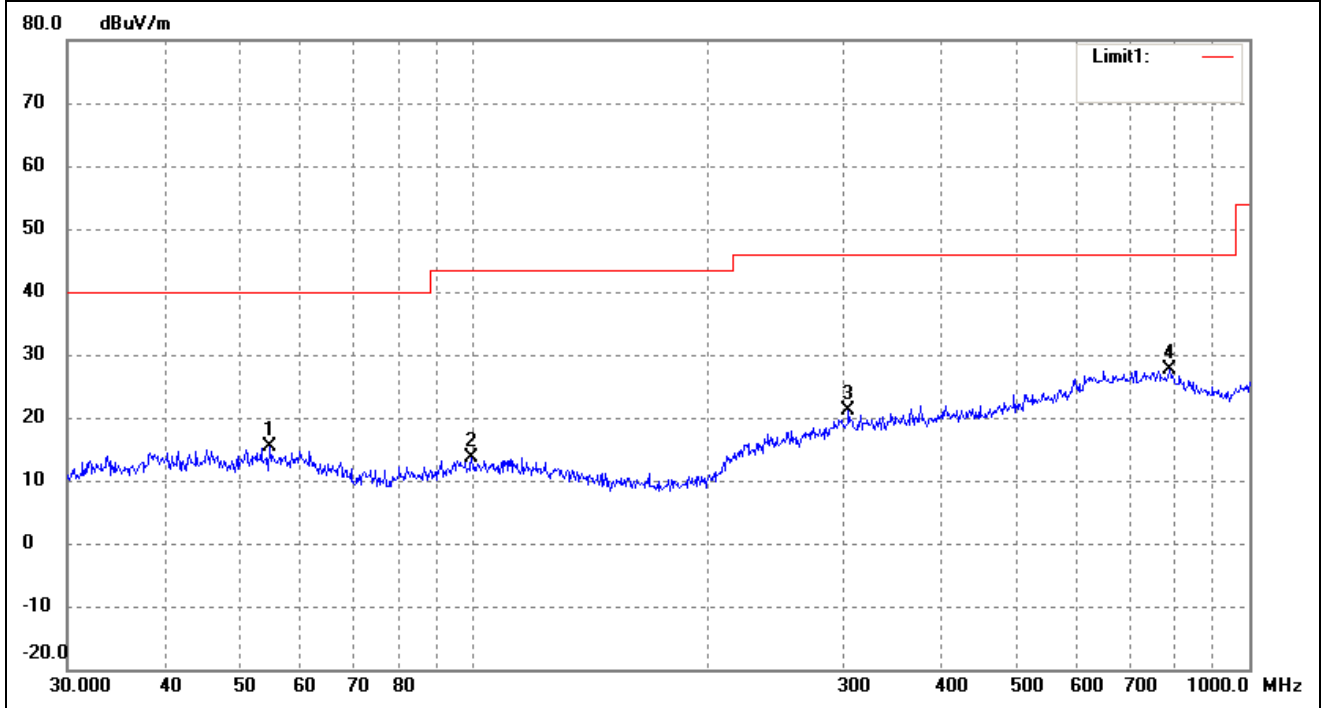

No.	Frequency (MHz)	Reading (dBuV/m)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree ( )	Height (cm)	Remark
1	54.6429	31.99	-16.50	15.49	40.00	-24.51	314	100	peak
2	99.5281	30.33	-16.63	13.70	43.50	-29.80	130	100	peak
3	304.6100	30.60	-9.54	21.06	46.00	-24.94	98	100	peak
4	790.6188	29.73	-2.04	27.69	46.00	-18.31	260	100	peak

Test Specification: Vertical

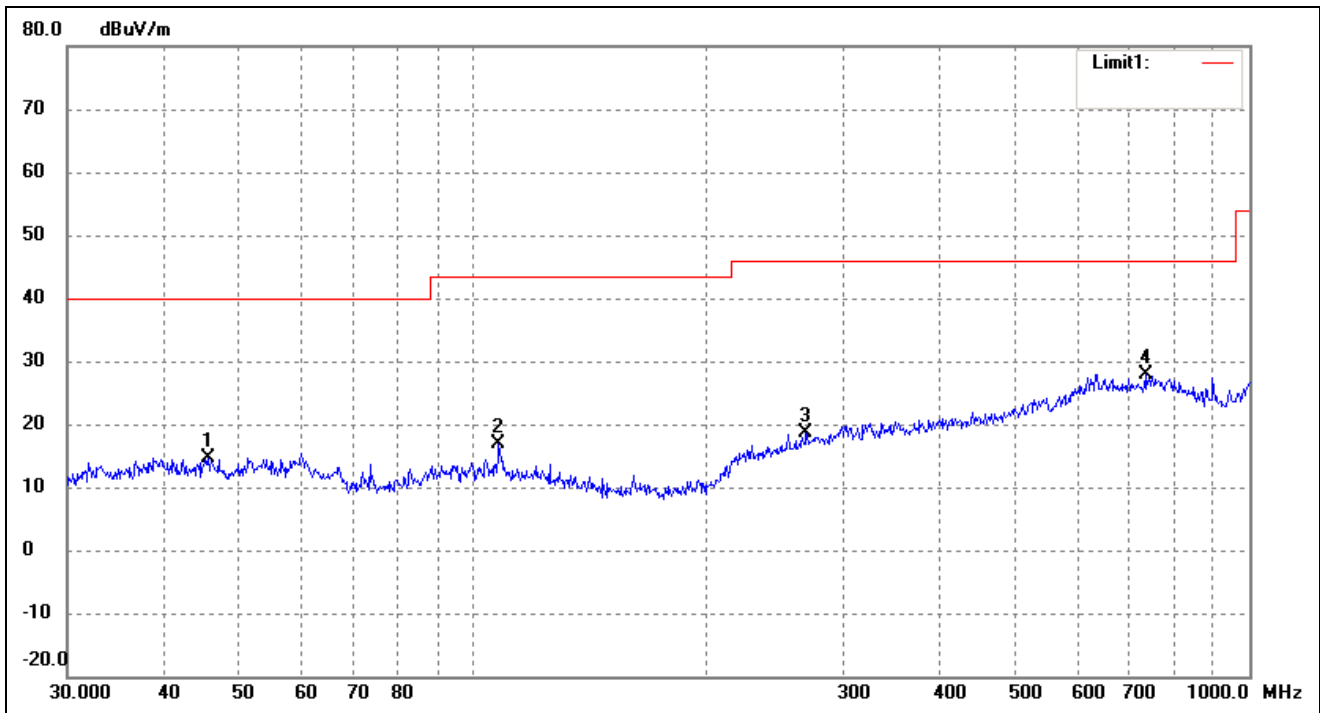


No.	Frequency (MHz)	Reading (dBuV/m)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree ( )	Height (cm)	Remark
1	45.5348	31.05	-16.49	14.56	40.00	-25.44	304	100	peak
2	107.8877	33.50	-16.61	16.89	43.50	-26.61	241	100	peak
3	268.4853	29.69	-11.18	18.51	46.00	-27.49	71	100	peak
4	734.4913	28.08	-0.18	27.90	46.00	-18.10	320	100	peak

Operating Condition: 802.11n-HT20 Transmitting High Channel-2462MHz


Comment: DC 3.7V

Test Specification: Horizontal

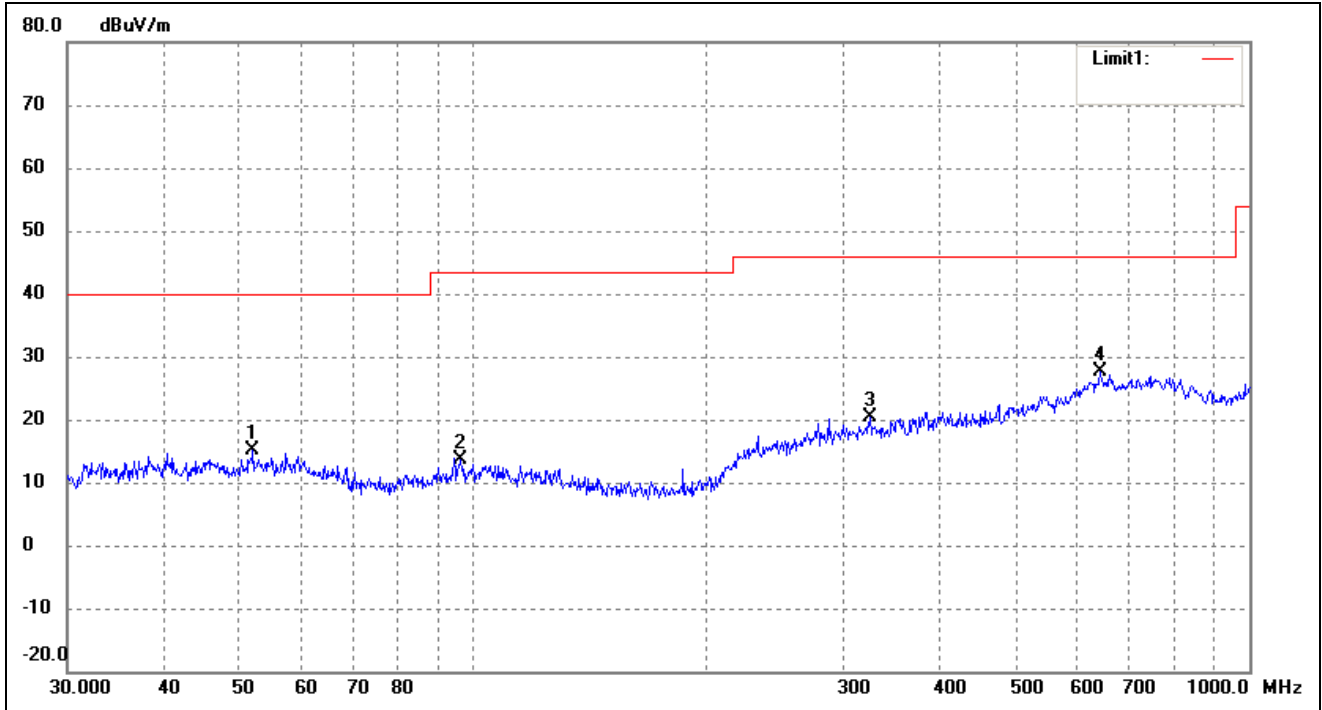

No.	Frequency (MHz)	Reading (dBuV/m)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree ( )	Height (cm)	Remark
1	52.0251	31.60	-16.50	15.10	40.00	-24.90	289	100	peak
2	96.4362	30.60	-17.08	13.52	43.50	-29.98	95	100	peak
3	324.4561	29.78	-9.44	20.34	46.00	-25.66	73	100	peak
4	642.8613	28.67	-1.08	27.59	46.00	-18.41	104	100	peak


Test Specification: Vertical

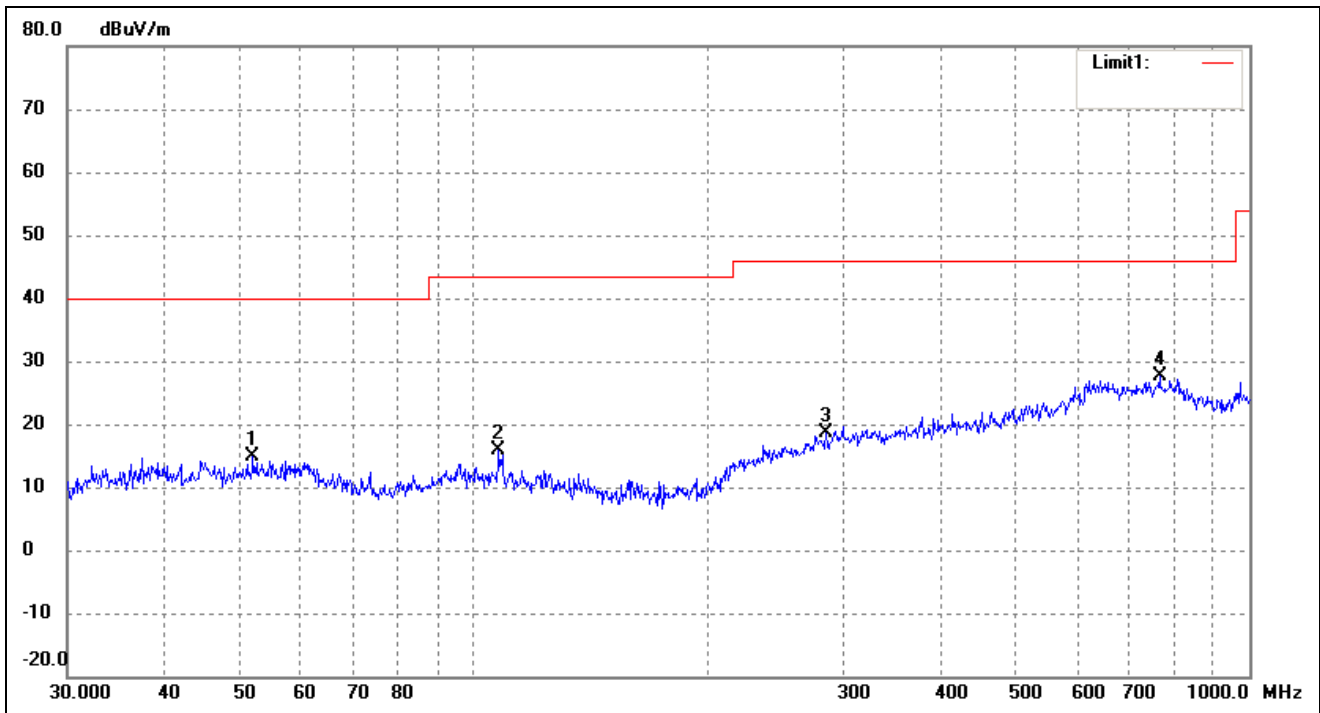

No.	Frequency (MHz)	Reading (dBuV/m)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree ( )	Height (cm)	Remark
1	52.0251	31.41	-16.50	14.91	40.00	-25.09	202	100	peak
2	107.8877	32.49	-16.61	15.88	43.50	-27.62	94	100	peak
3	284.9767	28.74	-10.17	18.57	46.00	-27.43	295	100	peak
4	766.0572	28.61	-0.93	27.68	46.00	-18.32	97	100	peak


EUT: *Smart Phone*  
 Tested Model: *Philips S338*  
 Operating Condition: *802.11n-HT40 Transmitting Low Channel-2422MHz*  
 Comment: *DC 3.7V*

Test Specification: *Horizontal*

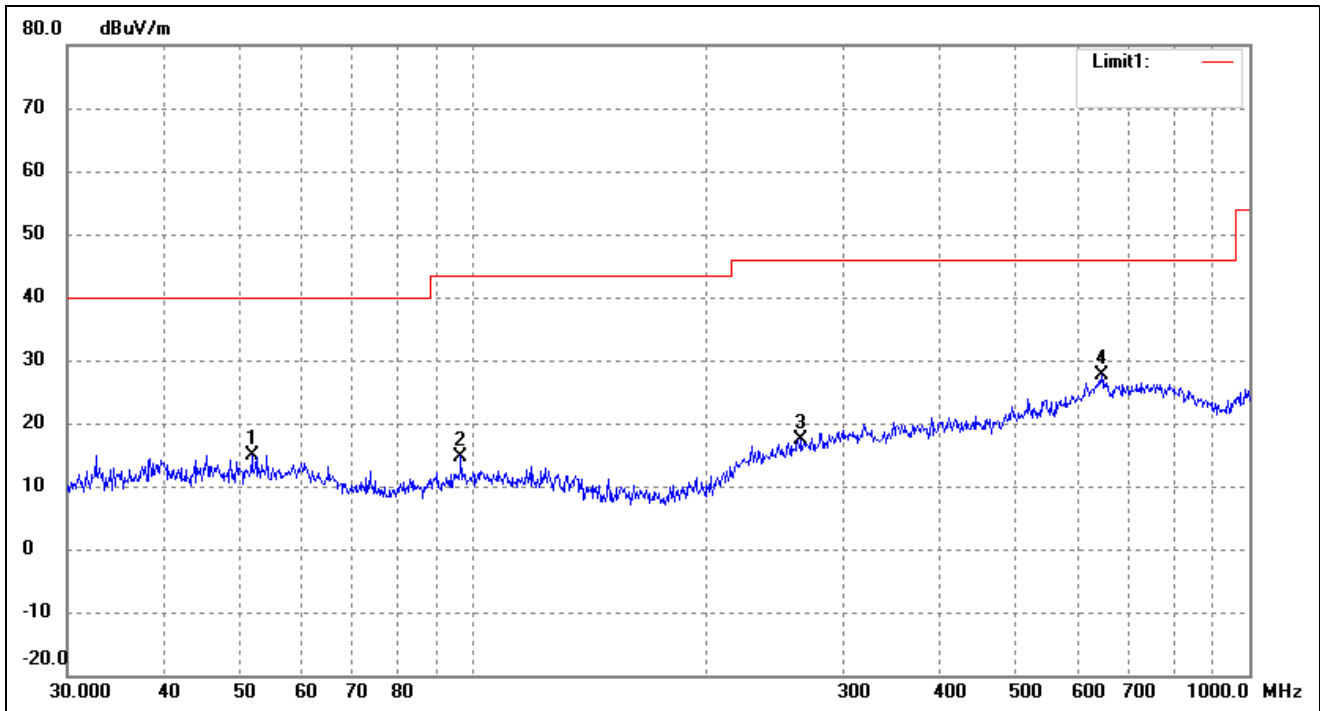

No.	Frequency (MHz)	Reading (dBuV/m)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree ( )	Height (cm)	Remark
1	51.8430	31.42	-16.50	14.92	40.00	-25.08	144	100	peak
2	96.4362	31.83	-17.08	14.75	43.50	-28.75	138	100	peak
3	264.7457	28.86	-11.44	17.42	46.00	-28.58	65	100	peak
4	645.1195	28.86	-1.15	27.71	46.00	-18.29	119	100	peak

Test Specification: Vertical

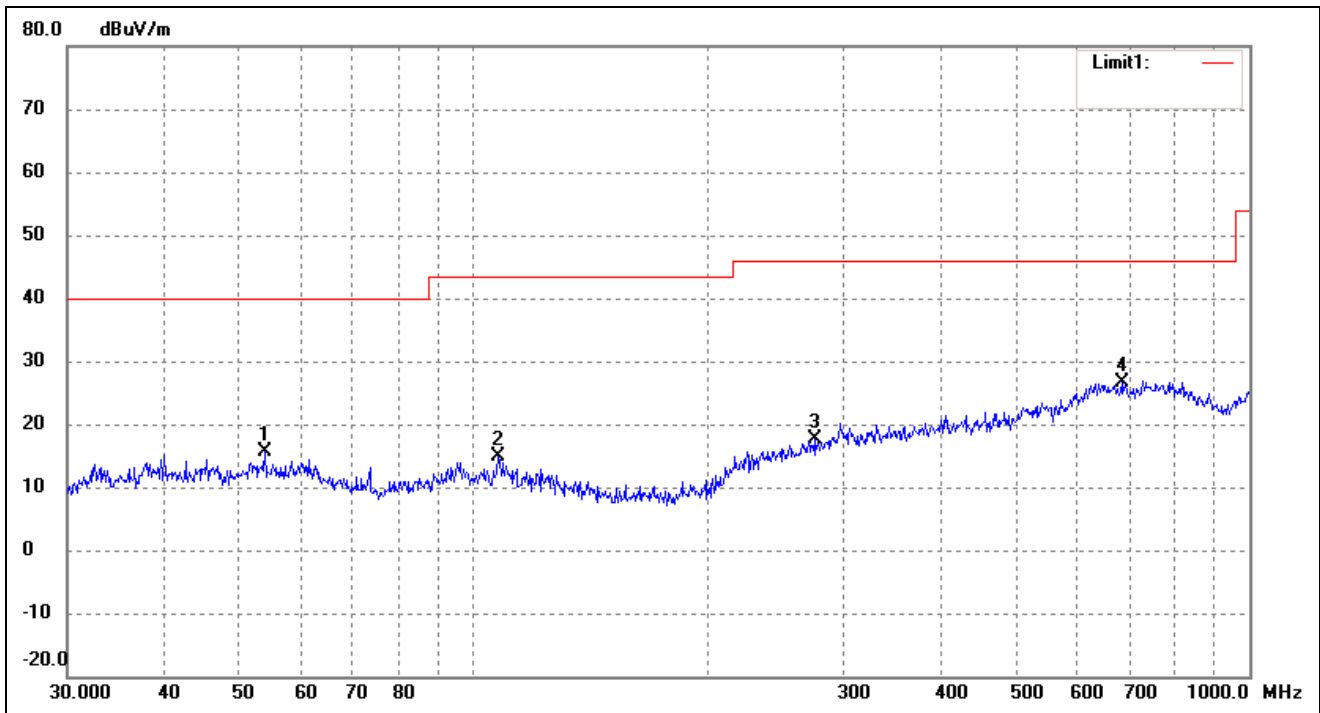


No.	Frequency (MHz)	Reading (dBuV/m)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree ( )	Height (cm)	Remark
1	53.8818	32.06	-16.49	15.57	40.00	-24.43	52	100	peak
2	107.8877	31.61	-16.61	15.00	43.50	-28.50	140	100	peak
3	275.1570	28.25	-10.70	17.55	46.00	-28.45	93	100	peak
4	684.7454	27.35	-0.71	26.64	46.00	-19.36	103	100	peak

Operating Condition: 802.11n-HT40 Transmitting Middle Channel-2437MHz


Comment: DC 3.7V

Test Specification: Horizontal

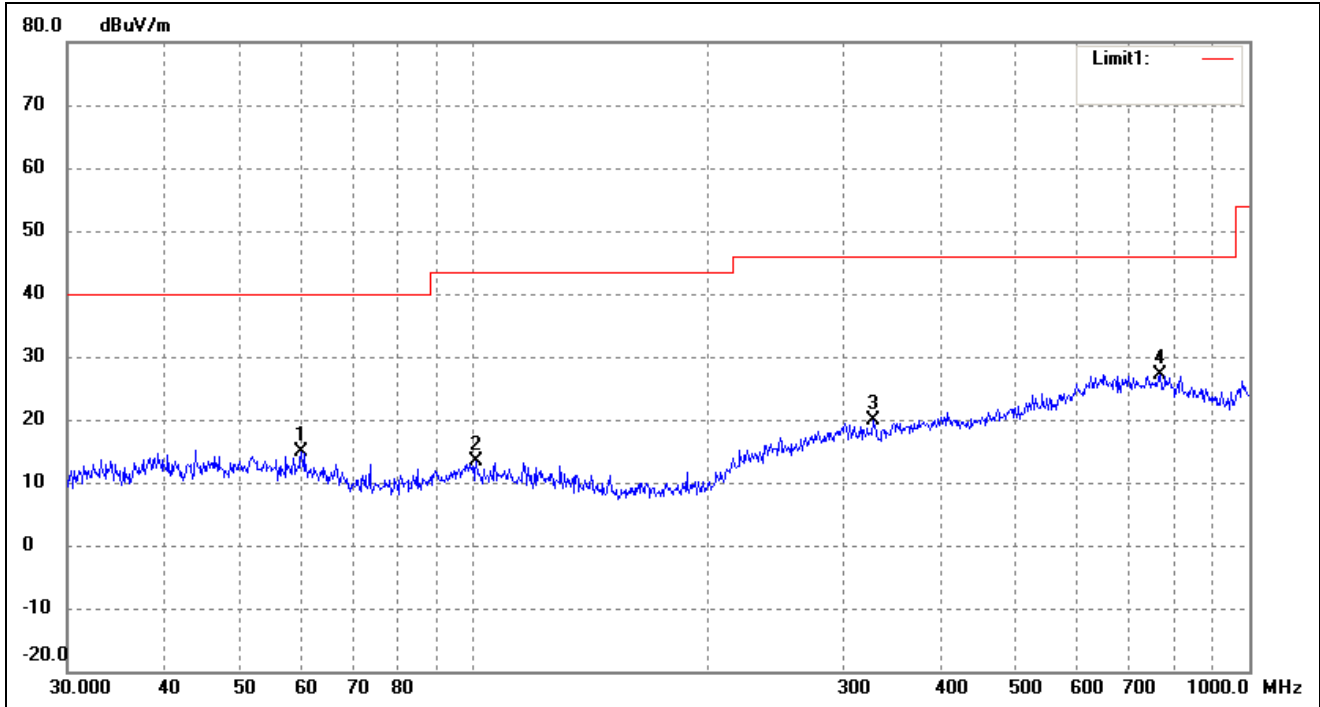

No.	Frequency (MHz)	Reading (dBuV/m)	Correct dB/m	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree ( )	Height (cm)	Remark
1	60.0691	31.37	-16.52	14.85	40.00	-25.15	302	100	peak
2	100.9340	29.88	-16.57	13.31	43.50	-30.19	91	100	peak
3	327.8873	29.29	-9.49	19.80	46.00	-26.20	205	100	peak
4	768.7482	28.33	-1.10	27.23	46.00	-18.77	120	100	peak

Test Specification: Vertical

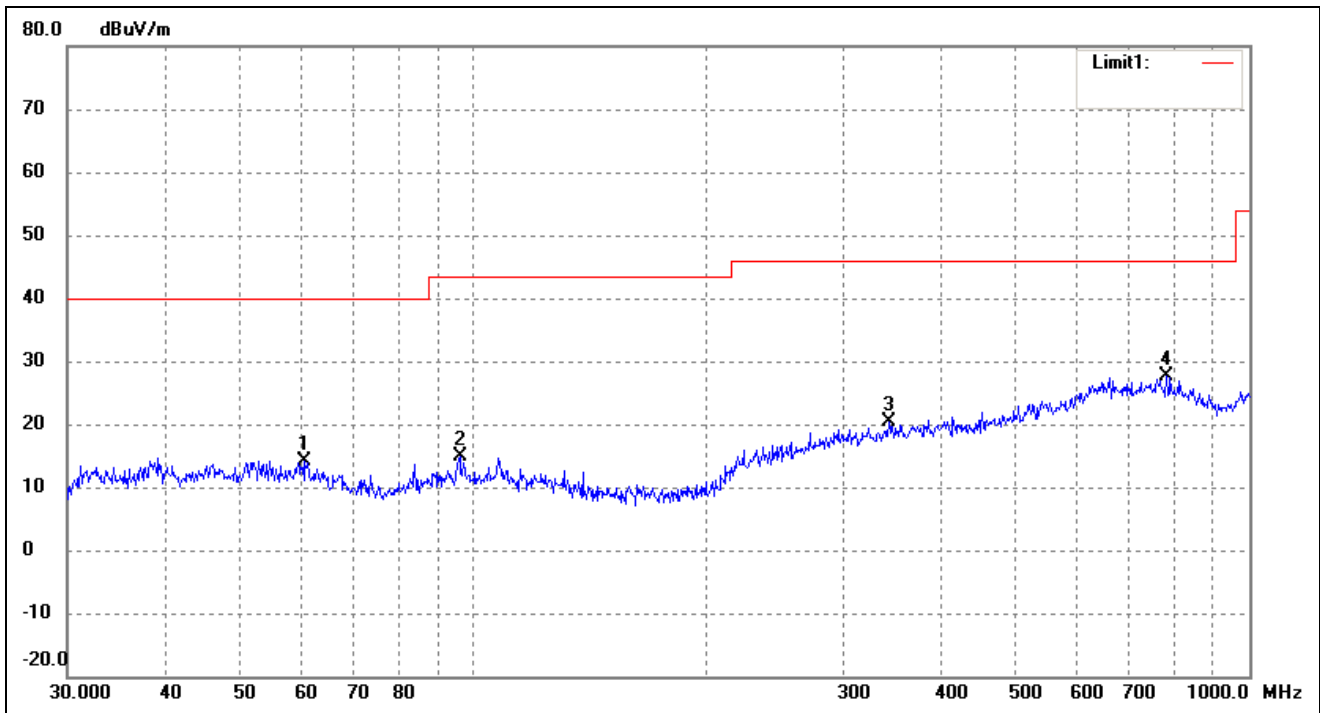


No.	Frequency (MHz)	Reading (dBuV/m)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree ( )	Height (cm)	Remark
1	60.7044	30.81	-16.64	14.17	40.00	-25.83	174	100	peak
2	96.0986	32.10	-17.14	14.96	43.50	-28.54	175	100	peak
3	343.1800	29.97	-9.55	20.42	46.00	-25.58	52	100	peak
4	782.3453	29.59	-1.89	27.70	46.00	-18.30	98	100	peak



Operating Condition: 802.11n-HT40 Transmitting High Channel-2452MHz


Comment: DC 3.7V

Test Specification: Horizontal

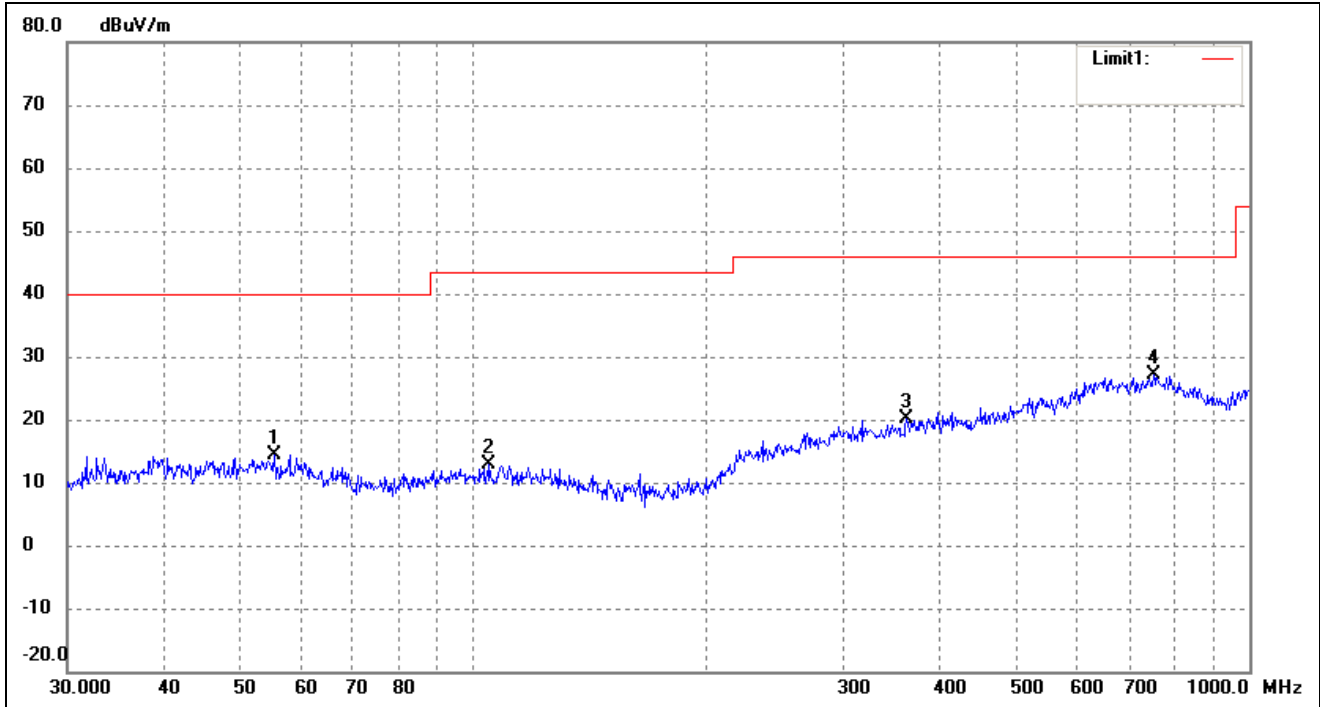

No.	Frequency (MHz)	Reading (dBuV/m)	Correct dB/m	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree ( )	Height (cm)	Remark
1	55.4147	30.97	-16.51	14.46	40.00	-25.54	336	100	peak
2	104.9033	29.57	-16.61	12.96	43.50	-30.54	99	100	peak
3	361.7139	29.11	-8.91	20.20	46.00	-25.80	281	100	peak
4	752.7432	27.39	-0.33	27.06	46.00	-18.94	117	100	peak

Test Specification: Vertical

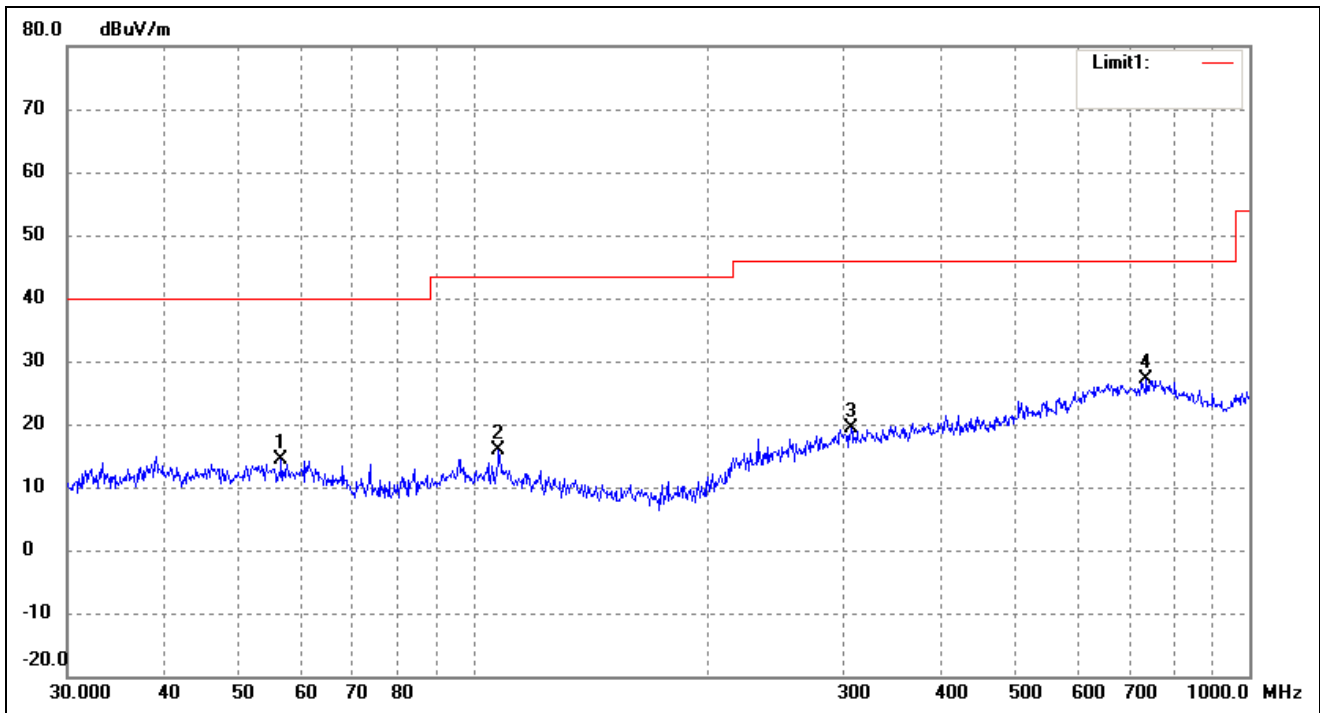

No.	Frequency (MHz)	Reading (dBuV/m)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree ( )	Height (cm)	Remark
1	56.5929	30.84	-16.52	14.32	40.00	-25.68	344	100	peak
2	107.8877	32.45	-16.61	15.84	43.50	-27.66	157	100	peak
3	306.7537	28.80	-9.51	19.29	46.00	-26.71	91	100	peak
4	737.0714	27.14	-0.02	27.12	46.00	-18.88	329	100	peak

*Spurious Emissions above 1GHz*

*Test Mode: 802.11b*

Frequency (MHz)	Reading (dBuV/m)	Correct dB	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Polar H/V	Detector
Low Channel-2412MHz							
4824.00	59.73	-3.87	55.86	74	-18.14	H	PK
4824.00	42.27	-3.87	38.4	54	-15.6	H	AV
7236.00	54.8	1.14	55.94	74	-18.06	H	PK
7236.00	40.83	1.19	42.02	54	-11.98	H	AV
4824.00	59.38	-3.86	55.52	74	-18.48	V	PK
4824.00	42.45	-3.86	38.59	54	-15.41	V	AV
7236.00	55.8	1.1	56.9	74	-17.1	V	PK
7236.00	39.41	1.1	40.51	54	-13.49	V	AV
Middle Channel-2437MHz							
4874.00	59.93	-3.74	56.19	74	-17.81	H	PK
4874.00	43.98	-3.74	40.24	54	-13.76	H	AV
7311.00	53.46	1.47	54.93	74	-19.07	H	PK
7311.00	40.08	1.47	41.55	54	-12.45	H	AV
4874.00	60.38	-3.74	56.64	74	-17.36	V	PK
4874.00	42.58	-3.74	38.84	54	-15.16	V	AV
7311.00	55.88	1.47	57.35	74	-16.65	V	PK
7311.00	39.58	1.47	41.05	54	-12.95	V	AV
High Channel-2462MHz							
4924.00	60.28	-3.59	56.69	74	-17.31	H	PK
4924.00	41.48	-3.59	37.89	54	-16.11	H	AV
7386.00	52.96	1.79	54.75	74	-19.25	H	PK
7386.00	40.74	1.79	42.53	54	-11.47	H	AV
4924.00	59.78	-3.59	56.19	74	-17.81	V	PK
4924.00	43.51	-3.59	39.92	54	-14.08	V	AV
7386.00	54.02	1.79	55.81	74	-18.19	V	PK
7386.00	38.59	1.79	40.38	54	-13.62	V	AV

Test Mode: 802.11g

Frequency	Reading	Correct	Result	Limit	Margin	Polar	Detector
(MHz)	(dBuV/m)	dB	(dBuV/m)	(dBuV/m)	(dB)	H/V	
Low Channel-2412MHz							
4824.00	58.22	-3.87	54.35	74	-19.65	H	PK
4824.00	41.79	-3.87	37.92	54	-16.08	H	AV
7236.00	53.75	1.14	54.89	74	-19.11	H	PK
7236.00	38.26	1.19	39.45	54	-14.55	H	AV
4824.00	58.96	-3.86	55.1	74	-18.9	V	PK
4824.00	41.6	-3.86	37.74	54	-16.26	V	AV
7236.00	52.36	1.1	53.46	74	-20.54	V	PK
7236.00	38.13	1.1	39.23	54	-14.77	V	AV
Middle Channel-2437MHz							
4874.00	61.25	-3.74	57.51	74	-16.49	H	PK
4874.00	43.95	-3.74	40.21	54	-13.79	H	AV
7311.00	53.22	1.47	54.69	74	-19.31	H	PK
7311.00	40.89	1.47	42.36	54	-11.64	H	AV
4874.00	60.99	-3.74	57.25	74	-16.75	V	PK
4874.00	42.61	-3.74	38.87	54	-15.13	V	AV
7311.00	55.25	1.47	56.72	74	-17.28	V	PK
7311.00	40.52	1.47	41.99	54	-12.01	V	AV
High Channel-2462MHz							
4924.00	59.44	-3.59	55.85	74	-18.15	H	PK
4924.00	42.03	-3.59	38.44	54	-15.56	H	AV
7386.00	53.19	1.79	54.98	74	-19.02	H	PK
7386.00	39.83	1.79	41.62	54	-12.38	H	AV
4924.00	60.39	-3.59	56.8	74	-17.2	V	PK
4924.00	43.17	-3.59	39.58	54	-14.42	V	AV
7386.00	55.76	1.79	57.55	74	-16.45	V	PK
7386.00	39.01	1.79	40.8	54	-13.2	V	AV

Test Mode: 802.11n-HT20

Frequency	Reading	Correct	Result	Limit	Margin	Polar	Detector
(MHz)	(dBuV/m)	dB	(dBuV/m)	(dBuV/m)	(dB)	H/V	
Low Channel-2412MHz							
4824.00	59.87	-3.87	56	74	-18	H	PK
4824.00	43.68	-3.87	39.81	54	-14.19	H	AV
7236.00	53.83	1.14	54.97	74	-19.03	H	PK
7236.00	38.25	1.19	39.44	54	-14.56	H	AV
4824.00	61.31	-3.86	57.45	74	-16.55	V	PK
4824.00	41.19	-3.86	37.33	54	-16.67	V	AV
7236.00	54.59	1.1	55.69	74	-18.31	V	PK
7236.00	38.63	1.1	39.73	54	-14.27	V	AV
Middle Channel-2437MHz							
4874.00	60.11	-3.74	56.37	74	-17.63	H	PK
4874.00	43.39	-3.74	39.65	54	-14.35	H	AV
7311.00	53.93	1.47	55.4	74	-18.6	H	PK
7311.00	38.28	1.47	39.75	54	-14.25	H	AV
4874.00	60.13	-3.74	56.39	74	-17.61	V	PK
4874.00	42.56	-3.74	38.82	54	-15.18	V	AV
7311.00	55.18	1.47	56.65	74	-17.35	V	PK
7311.00	38.92	1.47	40.39	54	-13.61	V	AV
High Channel-2462MHz							
4924.00	60.21	-3.59	56.62	74	-17.38	H	PK
4924.00	42.99	-3.59	39.4	54	-14.6	H	AV
7386.00	54.02	1.79	55.81	74	-18.19	H	PK
7386.00	38.98	1.79	40.77	54	-13.23	H	AV
4924.00	59.11	-3.59	55.52	74	-18.48	V	PK
4924.00	43.71	-3.59	40.12	54	-13.88	V	AV
7386.00	53.18	1.79	54.97	74	-19.03	V	PK
7386.00	40.76	1.79	42.55	54	-11.45	V	AV

Test Mode: 802.11n-HT40

Frequency	Reading	Correct	Result	Limit	Margin	Polar	Detector
(MHz)	(dBuV/m)	dB	(dBuV/m)	(dBuV/m)	(dB)	H/V	
Low Channel-2422MHz							
4844.00	57.15	-3.9	53.25	74	-20.75	H	PK
4824.00	41.07	-3.9	37.17	54	-16.83	H	AV
7266.00	53.05	1.06	54.11	74	-19.89	H	PK
7266.00	39.44	1.06	40.5	54	-13.50	H	AV
4844.00	59.91	-3.9	56.01	74	-17.99	V	PK
4824.00	40.52	-3.9	36.62	54	-17.38	V	AV
7266.00	52.57	1.06	53.63	74	-20.37	V	PK
7266.00	39.54	1.06	40.6	54	-13.40	V	AV
Middle Channel-2437MHz							
4874.00	58.29	-3.74	54.55	74	-19.45	H	PK
4874.00	40.95	-3.74	37.21	54	-16.79	H	AV
7311.00	52.86	1.47	54.33	74	-19.67	H	PK
7311.00	38.3	1.47	39.77	54	-14.23	H	AV
4874.00	58.13	-3.74	54.39	74	-19.61	V	PK
4874.00	41.97	-3.74	38.23	54	-15.77	V	AV
7311.00	54.34	1.47	55.81	74	-18.19	V	PK
7311.00	39.31	1.47	40.78	54	-13.22	V	AV
High Channel-2452MHz							
4904.00	58.45	-3.63	54.82	74	-19.18	H	PK
4904.00	40.93	-3.63	37.3	54	-16.7	H	AV
7356.00	51.2	1.62	52.82	74	-21.18	H	PK
7356.00	38.61	1.62	40.23	54	-13.77	H	AV
4904.00	57.38	-3.63	53.75	74	-20.25	V	PK
4904.00	40.43	-3.63	36.8	54	-17.2	V	AV
7356.00	52.75	1.62	54.37	74	-19.63	V	PK
7356.00	40.18	1.62	41.8	54	-12.2	V	AV

Note: Testing is carried out with frequency rang 9kHz to the tenth harmonics, other than listed in the table above are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.

---

## 9. Out of Band Emissions

---

### 9.1 Standard Applicable

According to §15.247 (d) In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a).

### 9.2 Test Procedure

According to the KDB 558074D01 v04, the band-edge radiated test method as follows:

Set span = wide enough to capture the peak level of the emission operating on the channel closest to the bandedge, as well as any modulation products which fall outside of the authorized band of operation (2310MHz to 2420MHz for low bandedge, 2460MHz to 2500MHz for the high bandedge)

RBW = 1MHz, VBW = 1MHz for peak value measured

RBW = 1MHz, VBW = 10Hz for average value measured

Sweep = auto; Detector function = peak/average; Trace = max hold

All the trace to stabilize, set the marker on the emission at the bandedge, or on the highest modulation product outside of the band, if this level is greater than that at the bandedge. Enable the marker-delta function, then use the marker-to-peak function to move the marker to the peak of the in-band emission. Those emission must comply with the 15.209 limit for fall in the restricted bands listed in section 15.205. Note that the method of measurement KDB publication number: 913591 may be used for the radiated bandedge measurements.

According to the KDB 558074 D01 v04, the conducted spurious emissions test method as follows:

1. Set start frequency to DTS channel edge frequency.
2. Set stop frequency so as to encompass the spectrum to be examined.
3. Set RBW = 100 kHz.
4. Set VBW  $\geq$  300 kHz.
5. Detector = peak.
6. Trace Mode = max hold.
7. Sweep = auto couple.
8. Allow the trace to stabilize (this may take some time, depending on the extent of the span).
9. Use peak marker function to determine maximum amplitude of all unwanted emissions within any 100 kHz bandwidth.

Ensure that the amplitude of all unwanted emissions outside of the authorized frequency band (excluding restricted frequency bands) are attenuated by at least the minimum requirements specified in section 8.1. Report the three highest emissions relative to the limit.


### 9.3 Environmental Conditions

Temperature:	23°C
Relative Humidity:	54%
ATM Pressure:	1011 mbar

### 9.4 Summary of Test Results/Plots

802.11b-Lowest Bandedge

Vertical (Worst case)

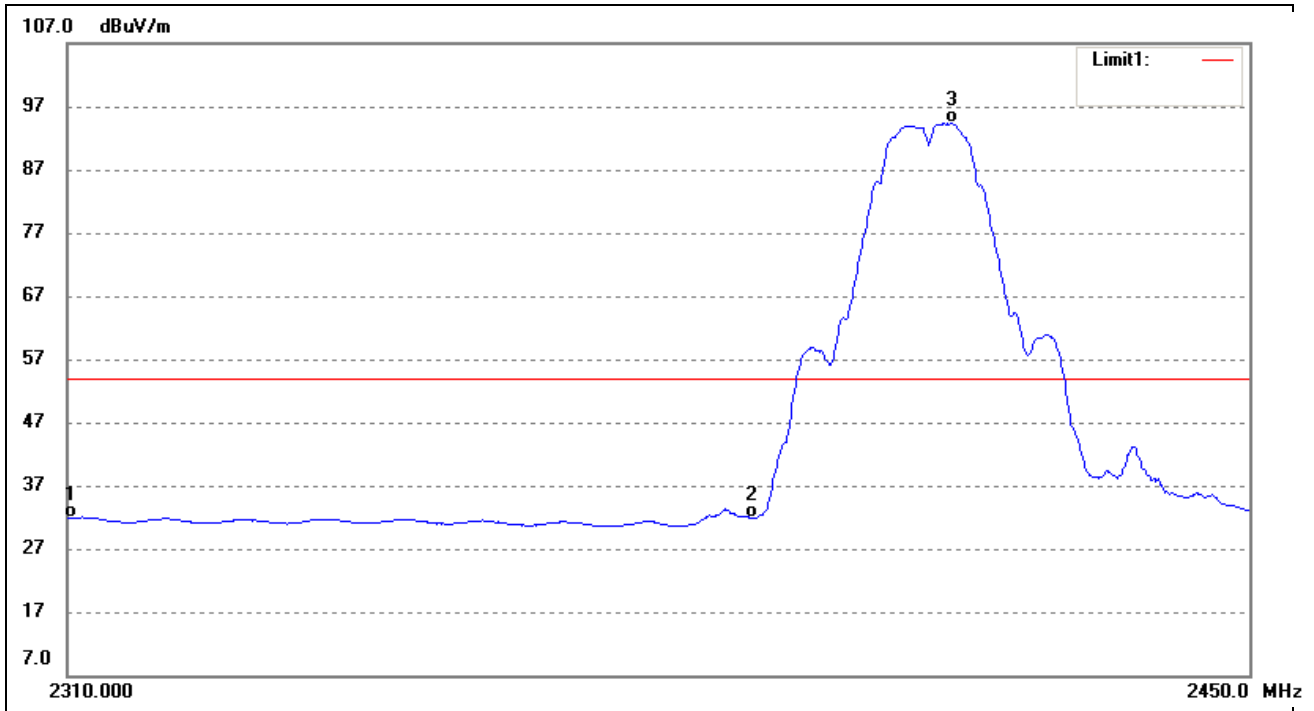


No.	Frequency (MHz)	Reading (dBuV/m)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2310.000	38.17	-6.38	31.79	54.00	-22.21	Average Detector
	2310.000	51.08	-6.38	44.70	74.00	-29.30	Peak Detector
2	2390.000	39.15	-7.26	31.89	54.00	-22.11	Average Detector
	2390.000	50.34	-7.26	43.08	74.00	-30.92	Peak Detector
3	2413.940	101.80	-7.40	94.40	/	/	Average Detector
	2412.804	106.17	-7.40	98.77	/	/	Peak Detector



802.11b-Highest Bandedge


Vertical (Worst case)

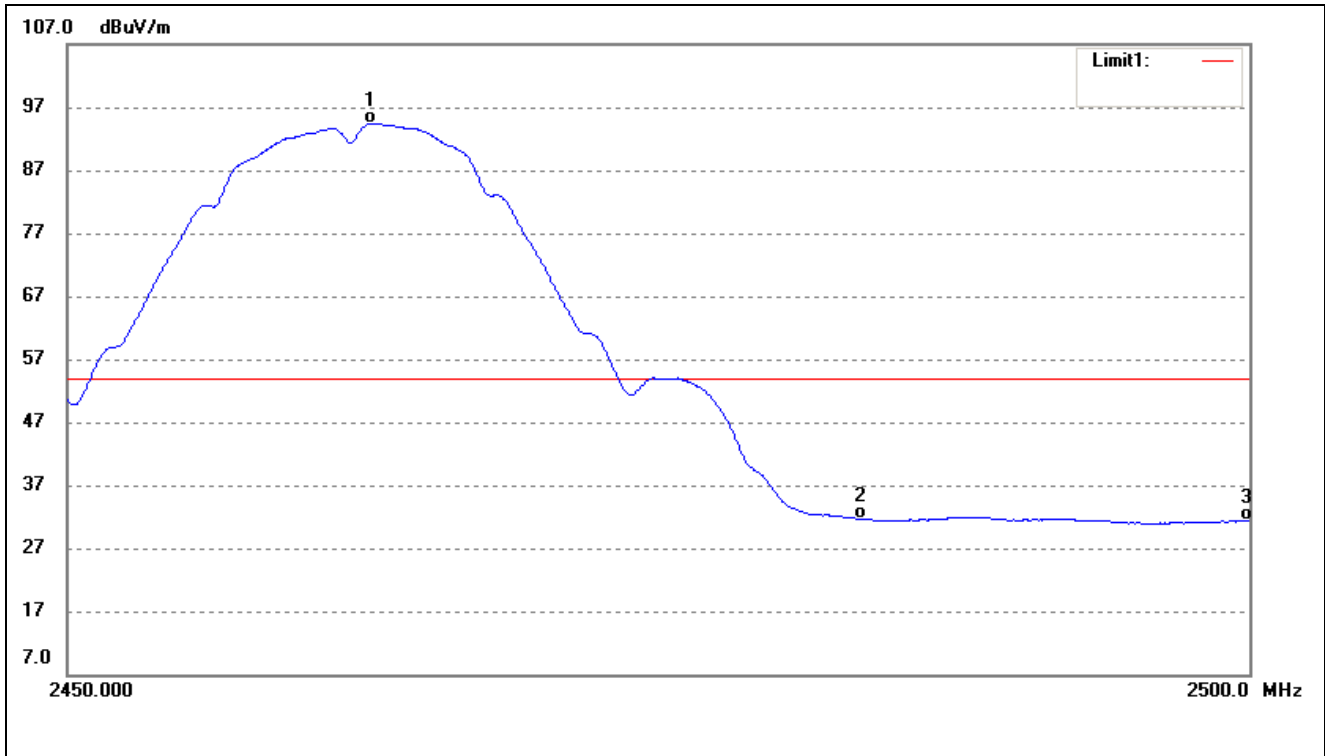

No.	Frequency (MHz)	Reading (dBuV/m)	Correct Factor(dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2462.704	101.74	-7.31	94.43	/	/	Average Detector
	2463.301	107.79	-7.31	100.48	/	/	Peak Detector
2	2483.500	38.90	-7.28	31.62	54.00	-22.38	Average Detector
	2483.500	52.58	-7.28	45.30	74.00	-28.70	Peak Detector
3	2500.000	38.68	-7.25	31.43	54.00	-22.57	Average Detector
	2500.000	51.68	-7.25	44.43	74.00	-29.57	Peak Detector

802.11g-Lowest Bandedge


Vertical (Worst case)

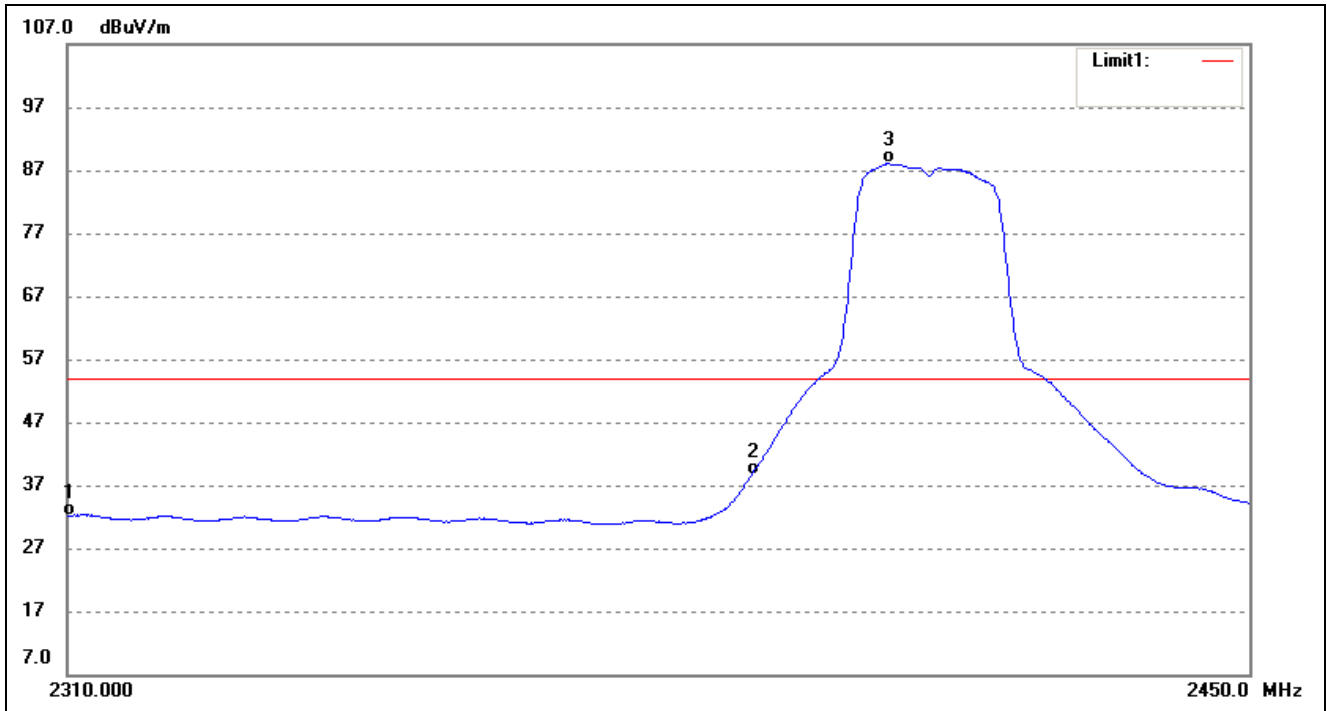

No.	Frequency (MHz)	Reading (dBuV/m)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2310.000	38.48	-6.38	32.10	54.00	-21.90	Average Detector
	2310.000	50.20	-6.38	43.82	74.00	-30.18	Peak Detector
2	2390.000	46.00	-7.26	38.74	54.00	-15.26	Average Detector
	2390.000	65.86	-7.26	58.60	74.00	-15.40	Peak Detector
3	2406.424	95.46	-7.42	88.04	/	/	Average Detector
	2407.557	106.19	-7.42	98.77	/	/	Peak Detector

802.11g-Highest Bandedge


Vertical (Worst case)

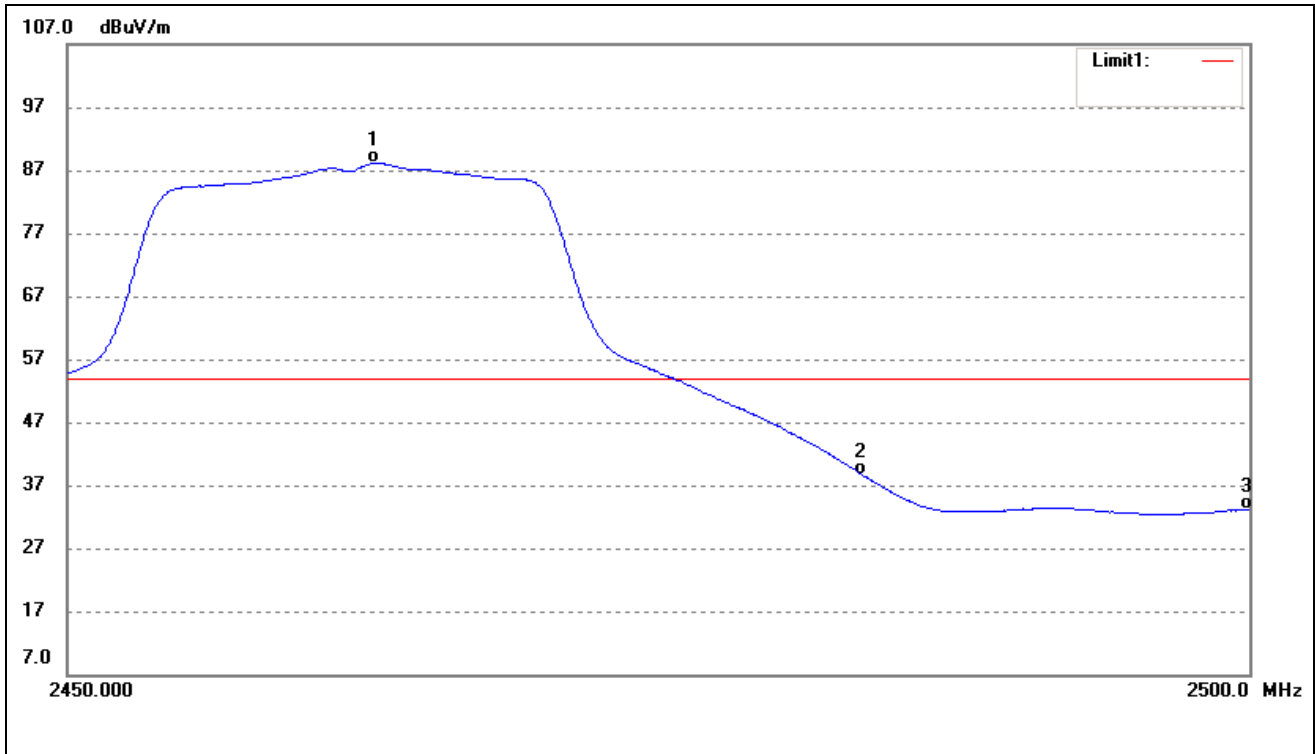

No.	Frequency (MHz)	Reading (dBuV/m)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2462.853	95.44	-7.31	88.13	/	/	Average Detector
	2463.301	105.33	-7.31	98.02	/	/	Peak Detector
2	2483.500	45.87	-7.28	38.59	54.00	-15.41	Average Detector
	2483.500	65.88	-7.28	58.60	74.00	-15.40	Peak Detector
3	2500.000	40.43	-7.25	33.18	54.00	-20.82	Average Detector
	2500.000	55.33	-7.25	48.08	74.00	-25.92	Peak Detector

## 802.11n-HT20-Lowest Bandedge


Vertical (Worst case)

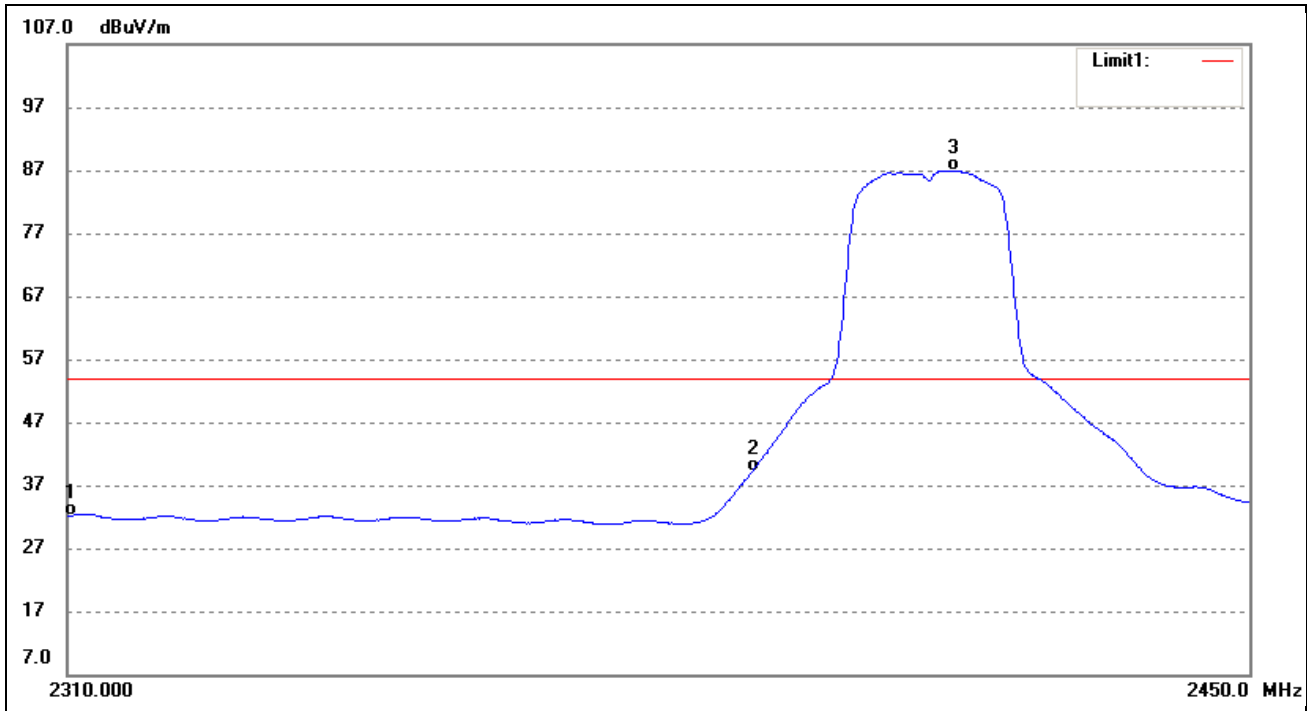

No.	Frequency (MHz)	Reading (dBuV/m)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2310.000	38.56	-6.38	32.18	54.00	-21.82	Average Detector
	2310.000	49.56	-6.38	43.18	74.00	-30.82	Peak Detector
2	2390.000	46.36	-7.26	39.10	54.00	-14.90	Average Detector
	2390.000	67.30	-7.26	60.04	74.00	-13.96	Peak Detector
3	2414.224	94.38	-7.40	86.98	/	/	Average Detector
	2414.366	105.18	-7.40	97.78	/	/	Peak Detector

## 802.11n-HT20-Highest Bandedge


Vertical (Worst case)

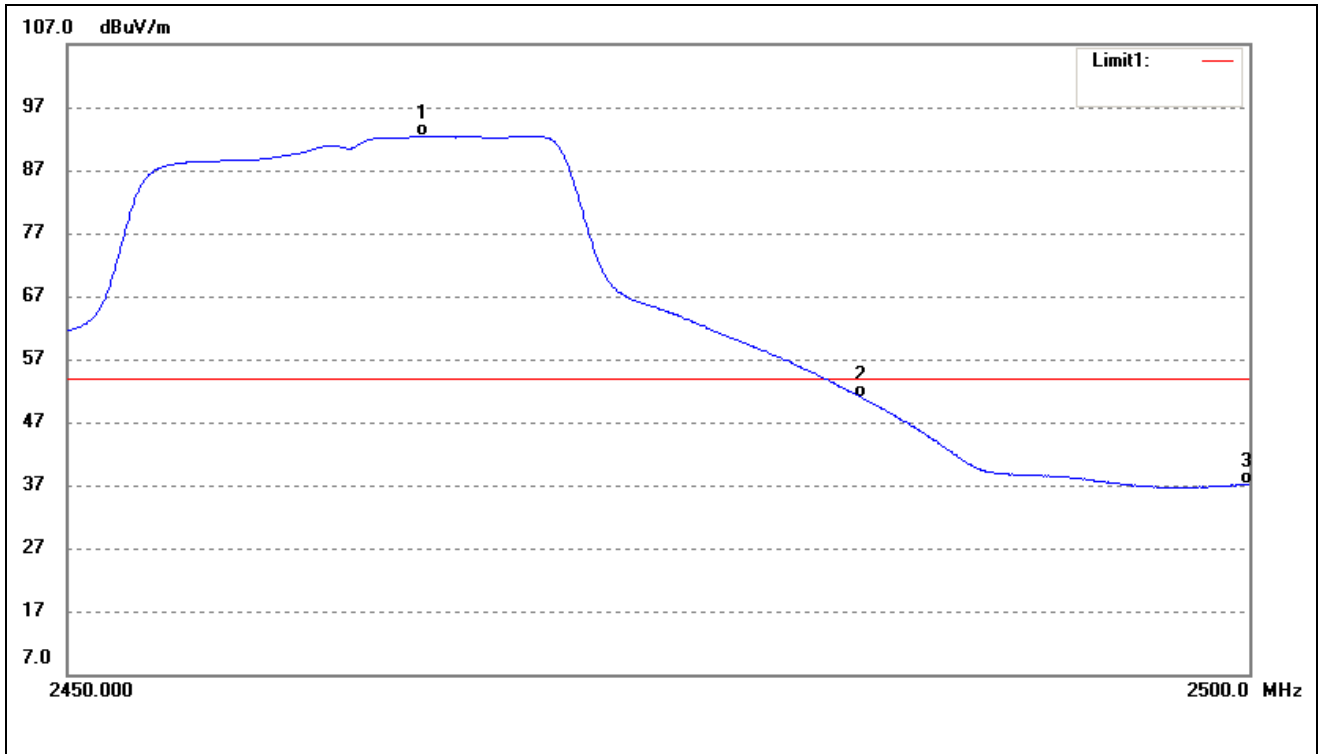

No.	Frequency (MHz)	Reading (dBuV/m)	Correct dB/m	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2464.894	99.78	-7.31	92.47	/	/	Average Detector
	2465.392	110.71	-7.31	103.40	/	/	Peak Detector
2	2483.500	58.06	-7.28	50.78	54.00	-3.22	Average Detector
	2483.500	77.53	-7.28	70.25	74.00	-3.75	Peak Detector
3	2500.000	44.30	-7.25	37.05	54.00	-16.95	Average Detector
	2500.000	56.31	-7.25	49.06	74.00	-24.94	Peak Detector

## 802.11n-HT40-Lowest Bandedge


Vertical (Worst case)

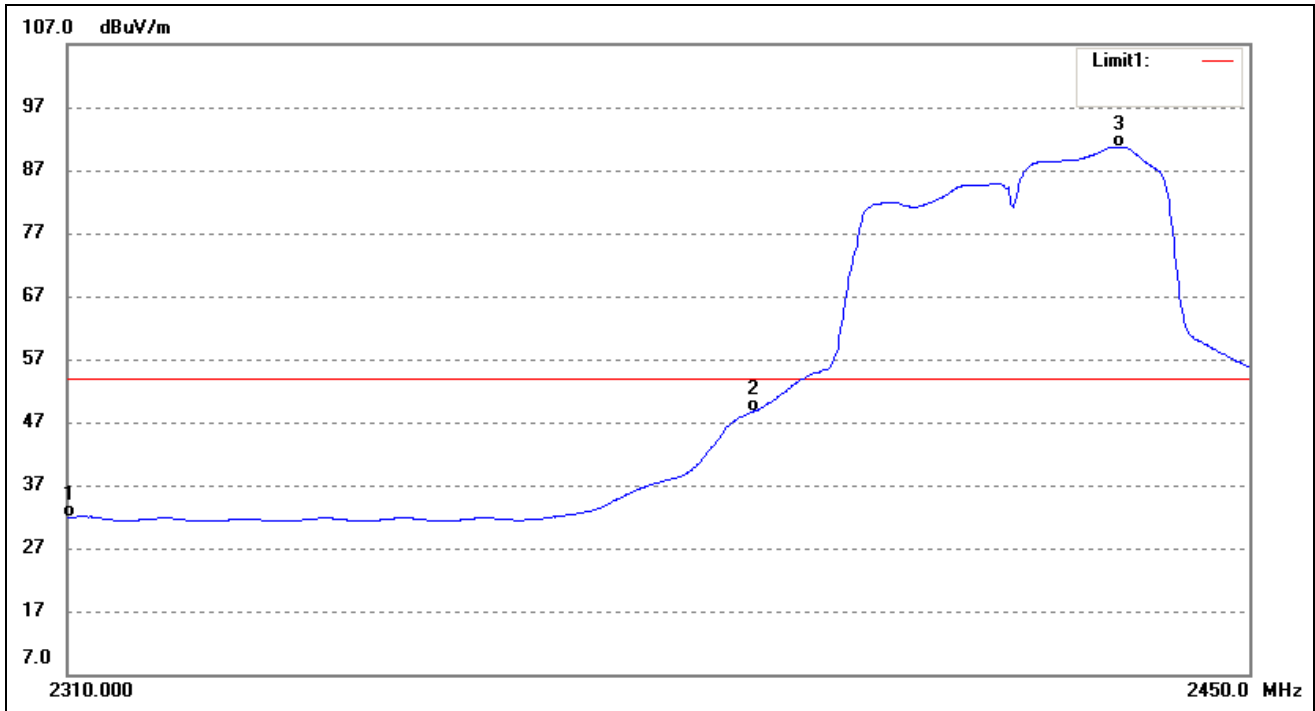

No.	Frequency (MHz)	Reading (dBuV/m)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2310.000	38.30	-6.38	31.92	54.00	-22.08	Average Detector
	2310.000	50.18	-6.38	43.80	74.00	-30.20	Peak Detector
2	2390.000	55.92	-7.26	48.66	54.00	-5.34	Average Detector
	2390.000	71.19	-7.26	63.93	74.00	-10.07	Peak Detector
3	2434.194	98.11	-7.37	90.74	/	/	Average Detector
	2434.767	108.40	-7.36	101.04	/	/	Peak Detector



802.11n-HT40-Highest Bandedge

Vertical (Worst case)

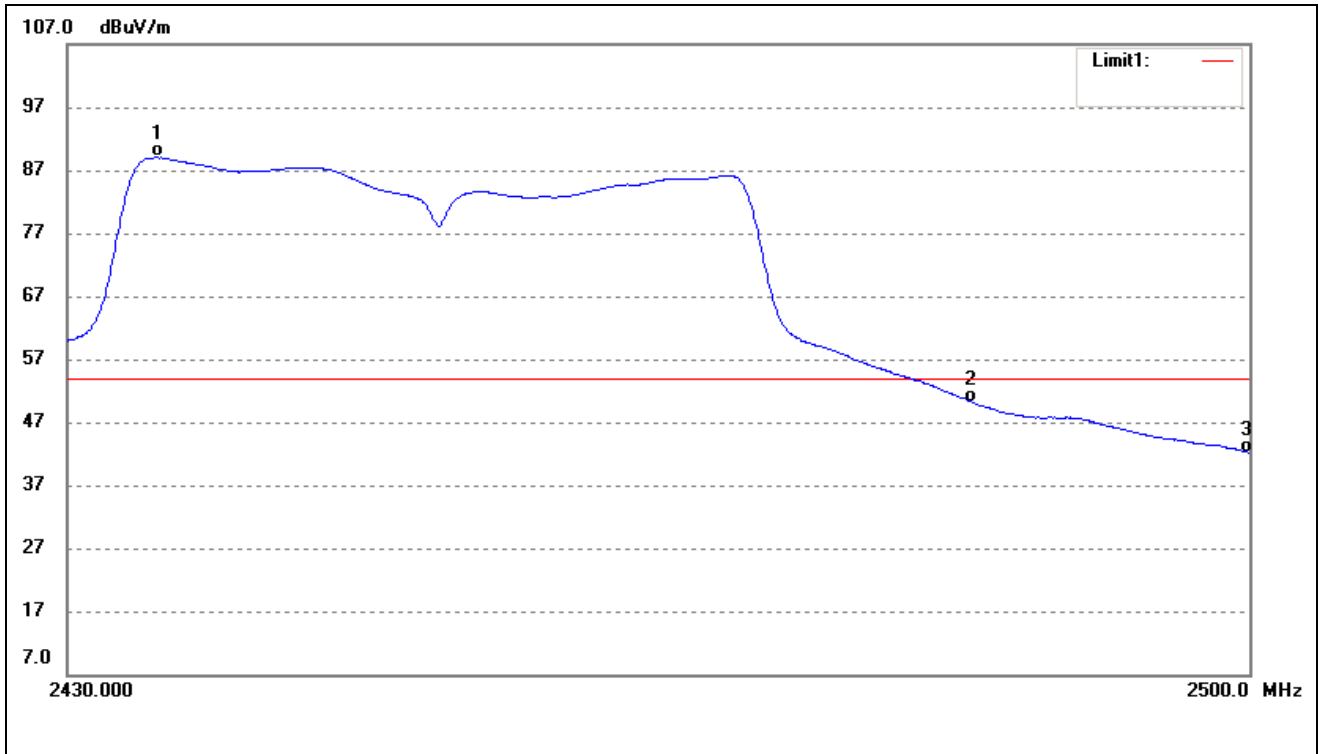



No.	Frequency (MHz)	Reading (dBuV/m)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2435.251	96.40	-7.37	89.03	/	/	Average Detector
	2436.081	107.07	-7.37	99.70	/	/	Peak Detector
2	2483.500	57.33	-7.28	50.05	54.00	-3.95	Average Detector
	2483.500	78.76	-7.28	71.48	74.00	-2.52	Peak Detector
3	2500.000	49.44	-7.25	42.19	54.00	-11.81	Average Detector
	2500.000	67.14	-7.25	59.89	74.00	-14.11	Peak Detector

Spurious (Conducted)  
 802.11b-Lowest  
 Lowest

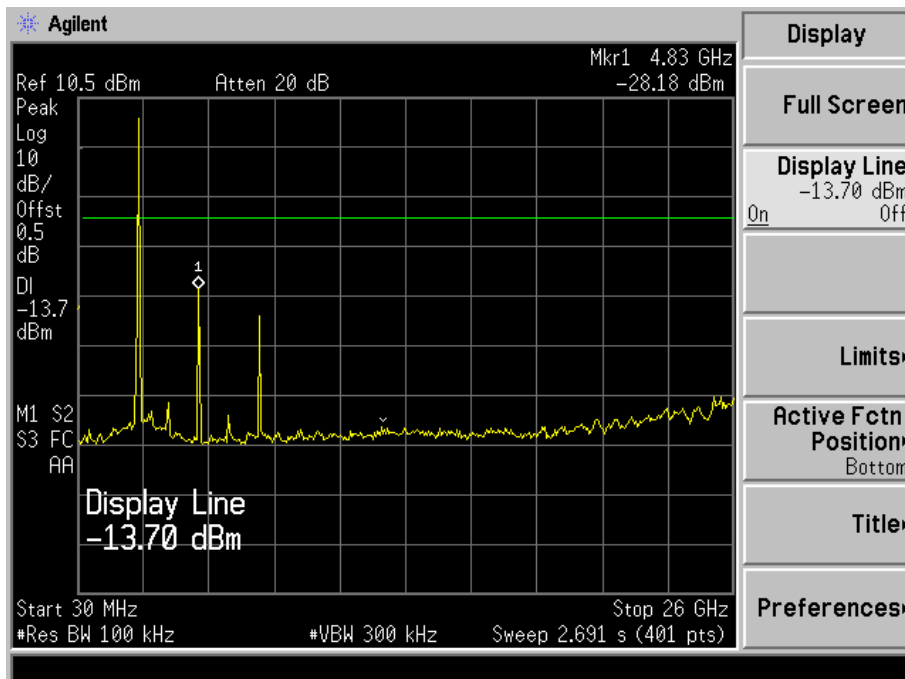
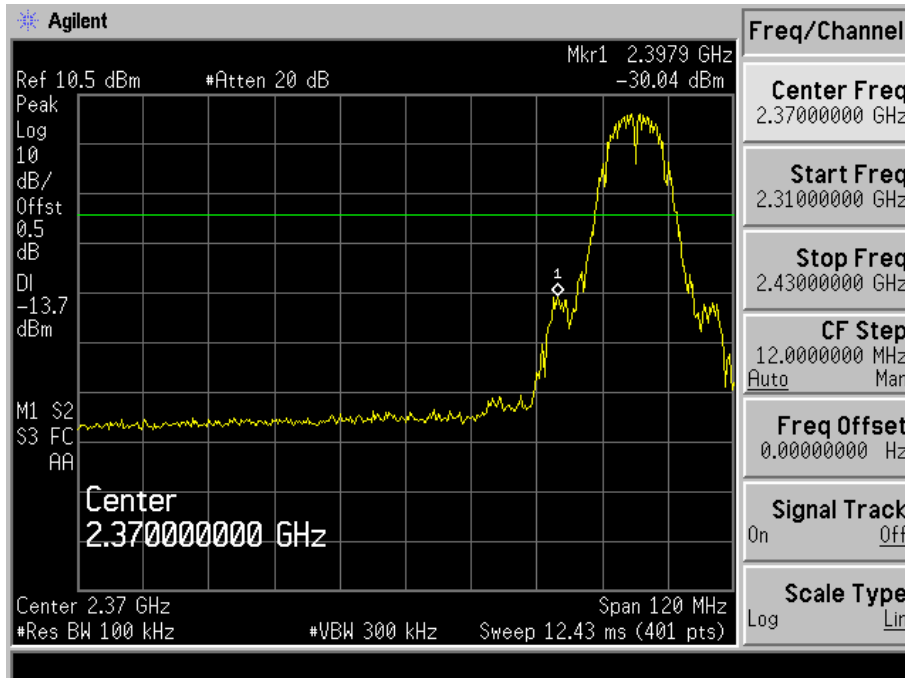






Highest

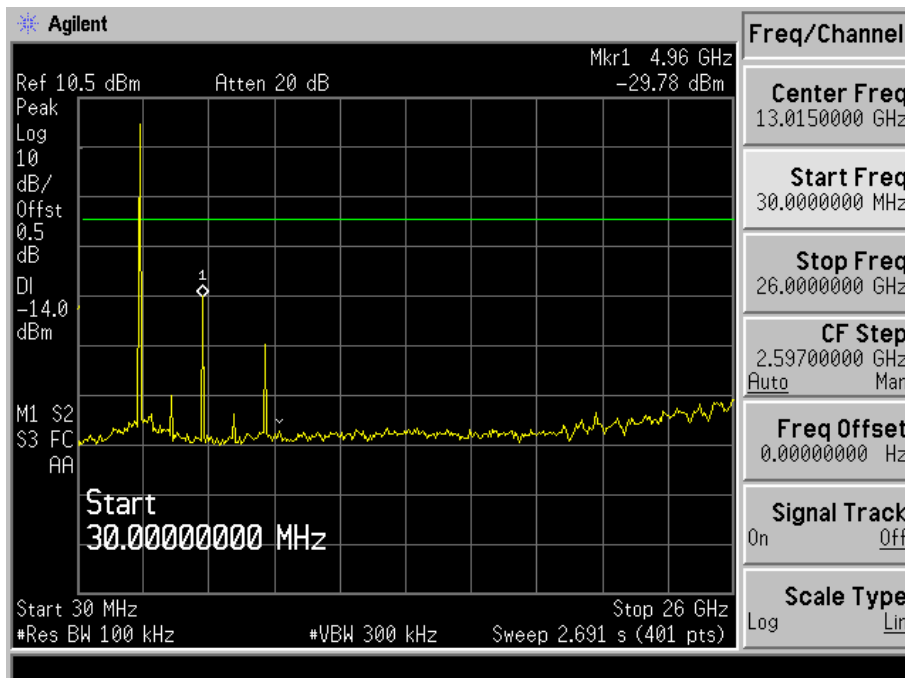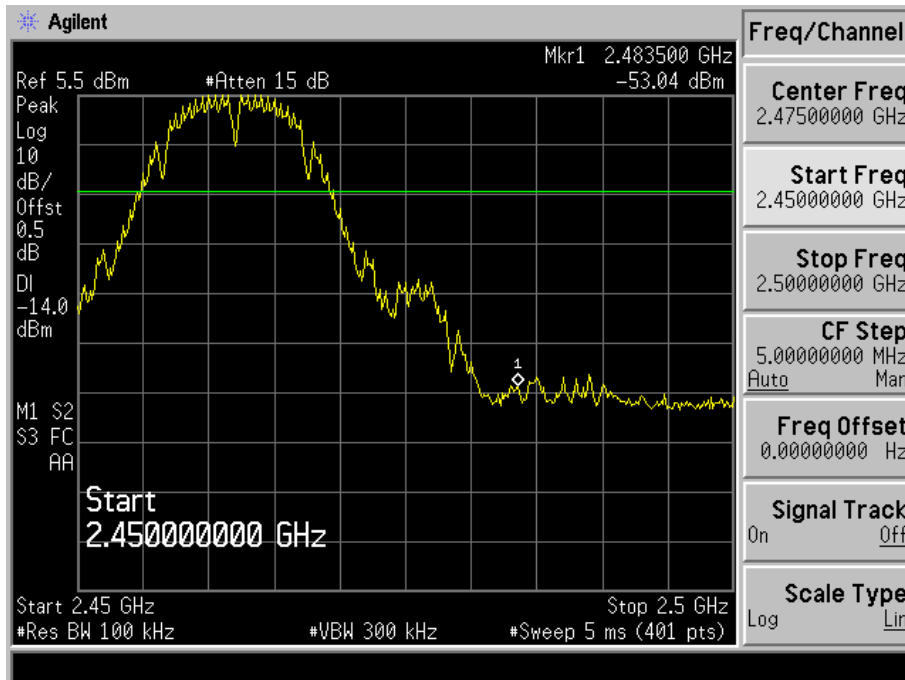



Spurious (Conducted)  
 802.11g-Lowest  
 Lowest

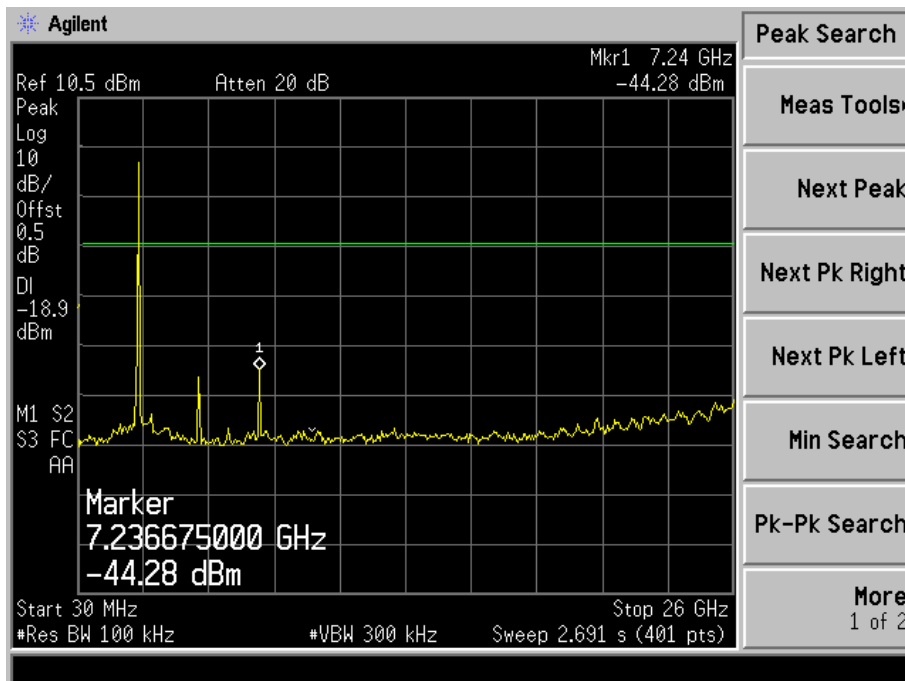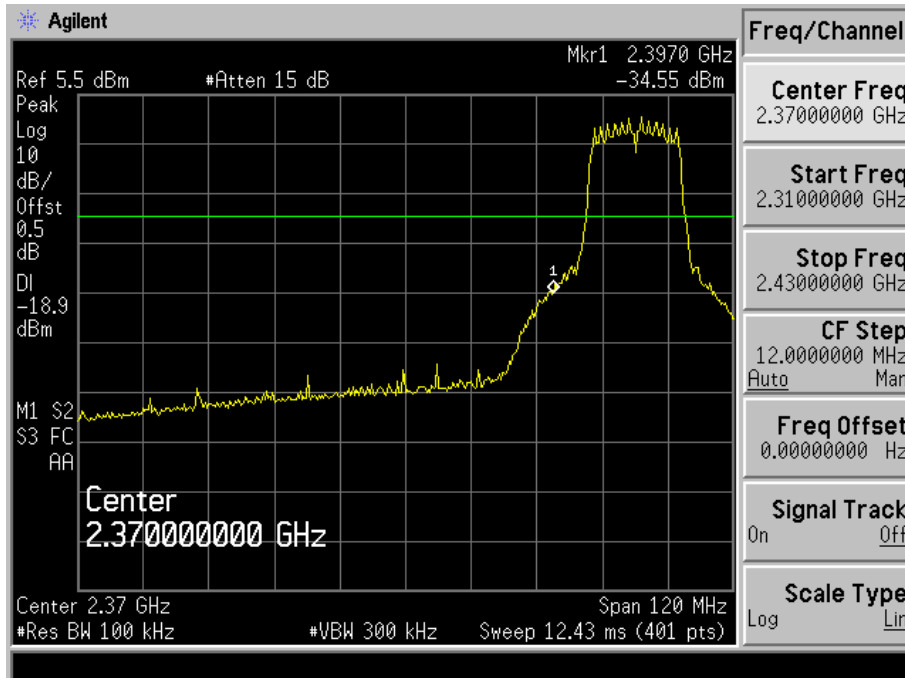



Highest

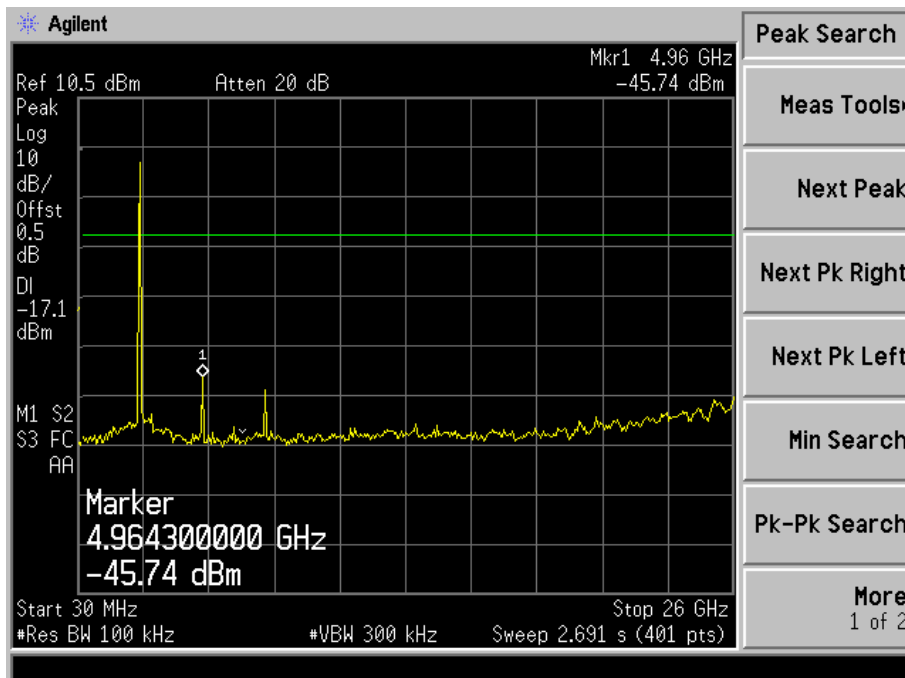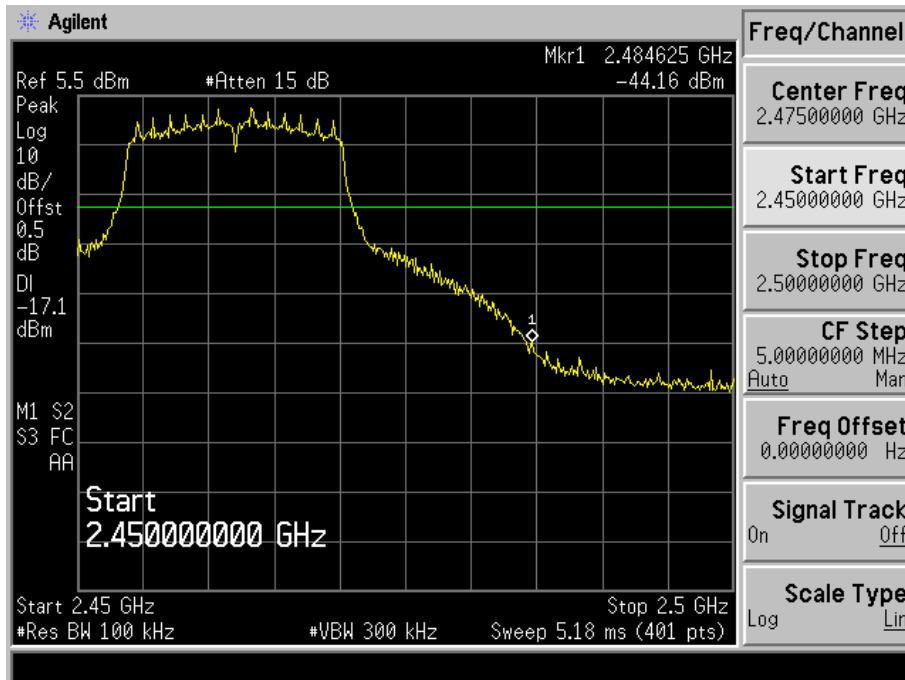



Spurious (Conducted)  
 802.11n-HT20-Lowest  
 Lowest

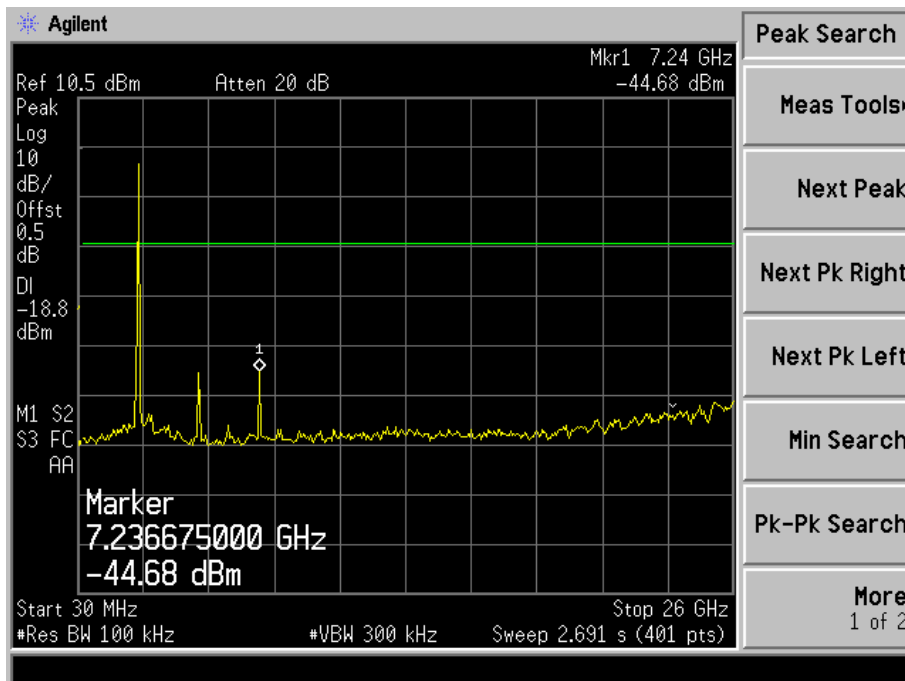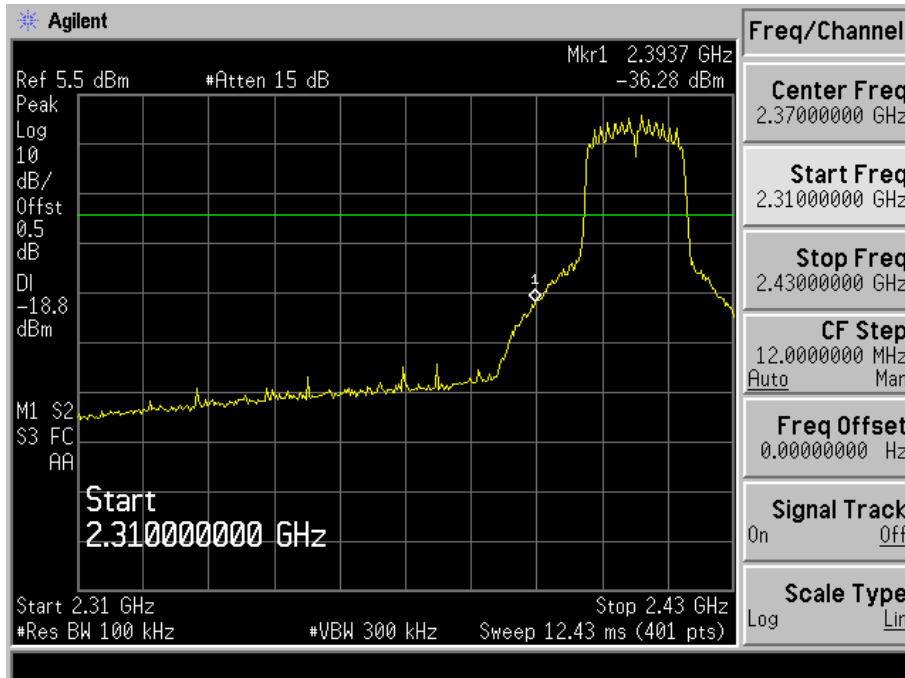



Highest

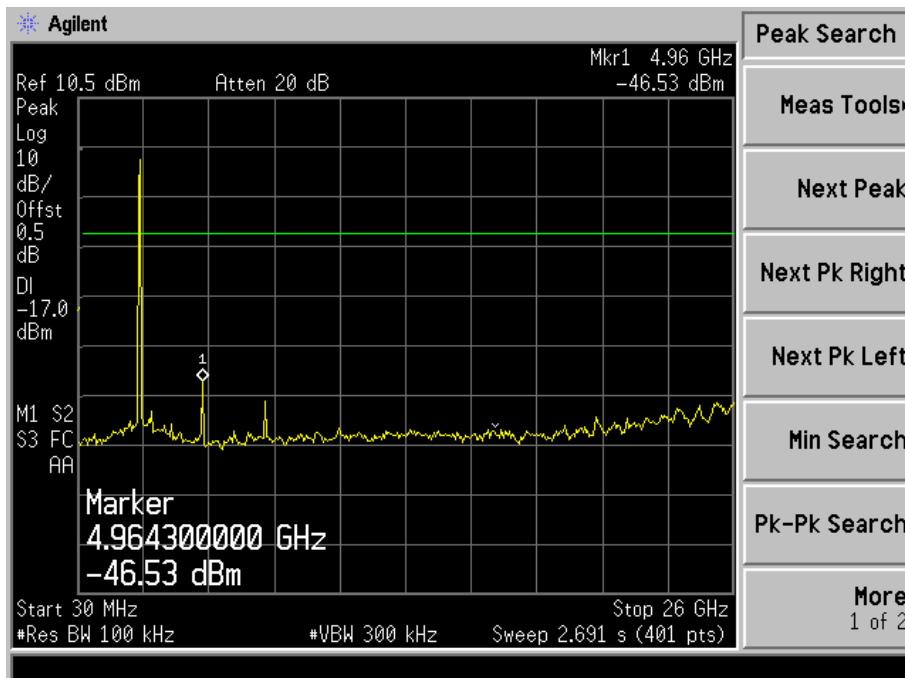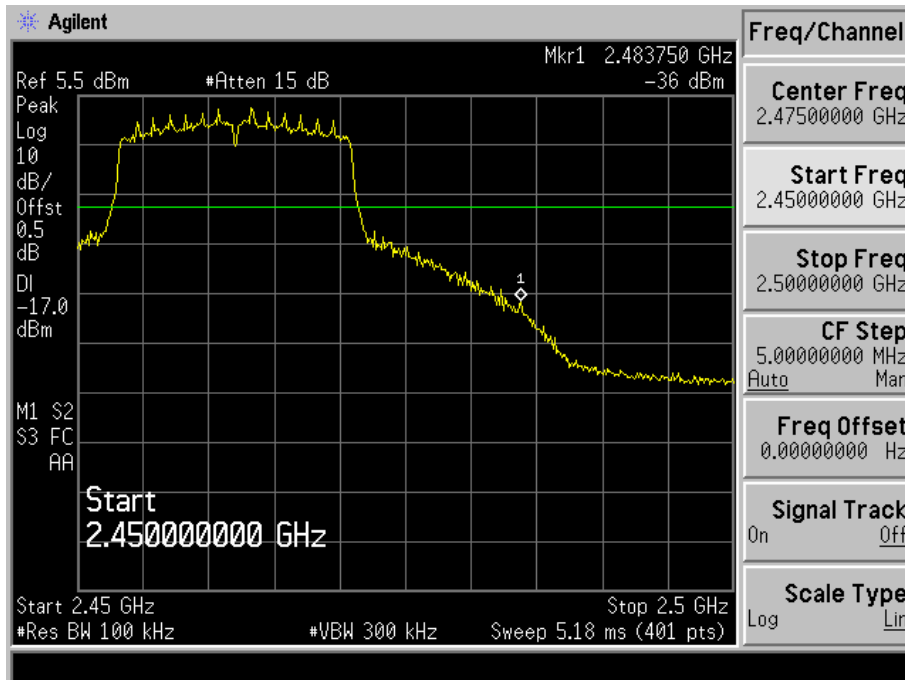

Spurious (Conducted)  
 802.11n-HT40-Lowest  
 Lowest

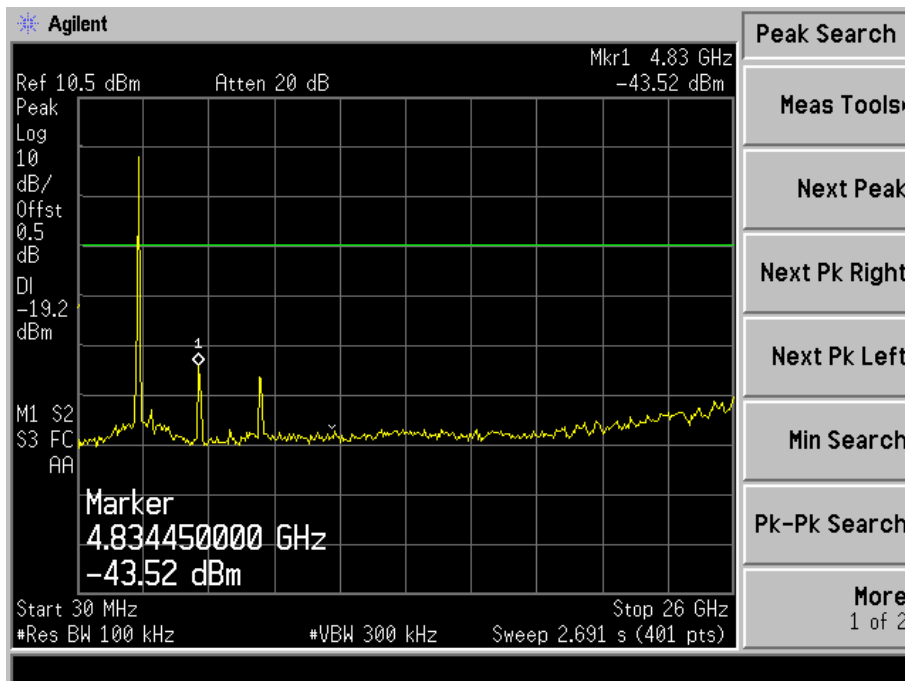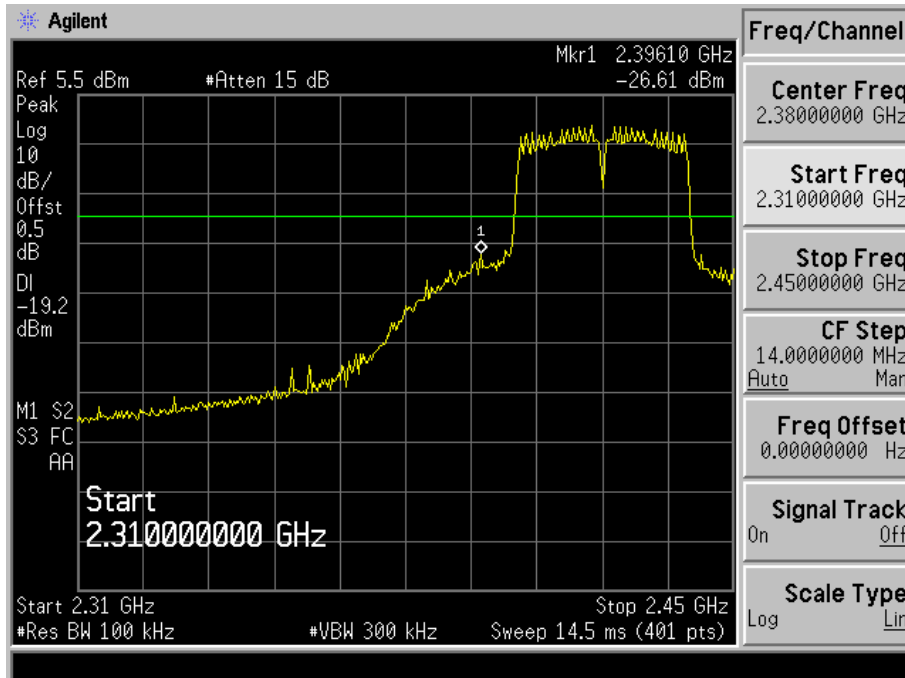

Highest

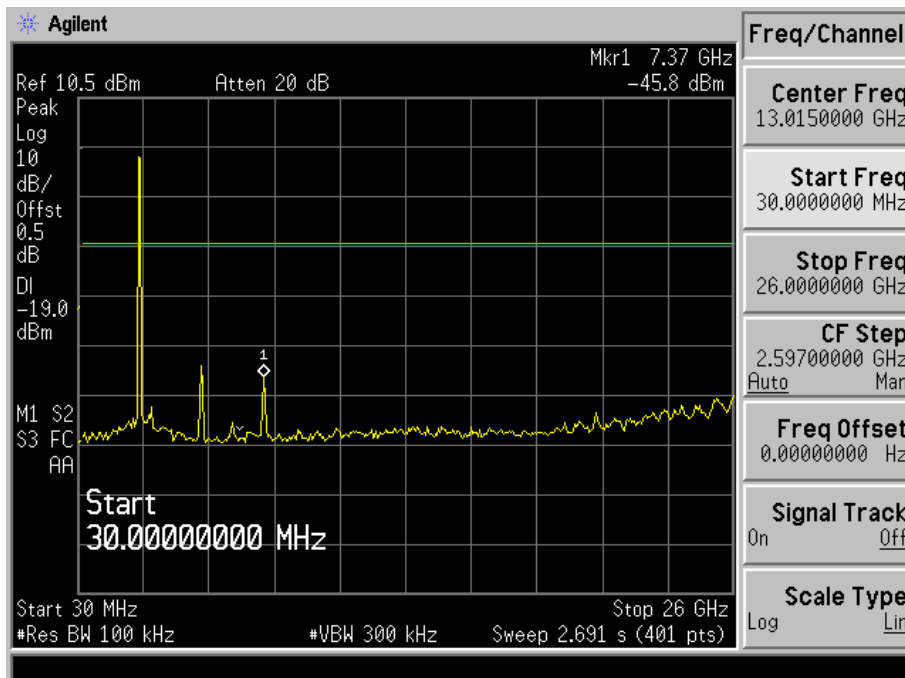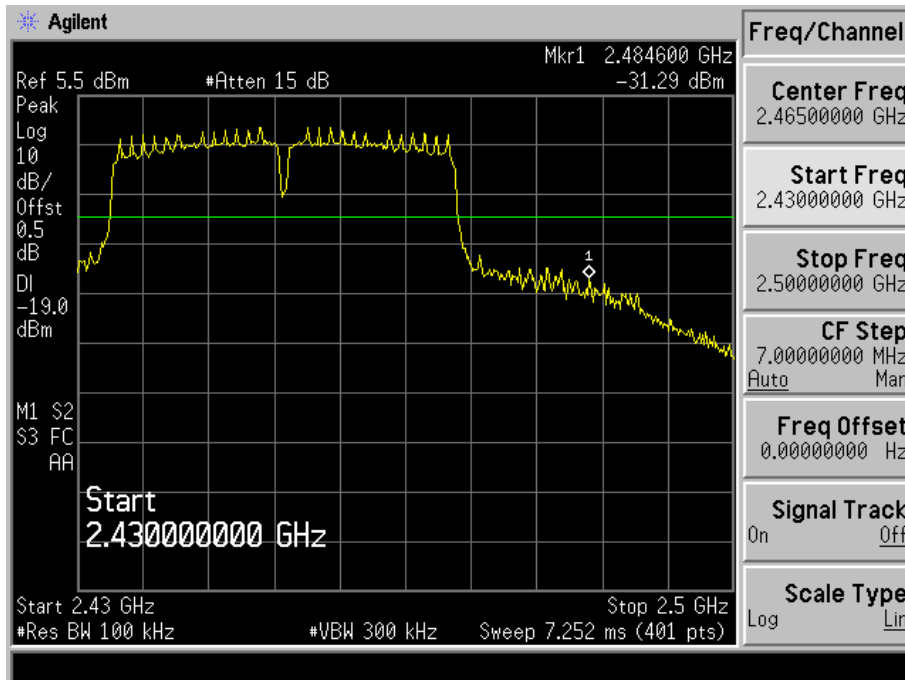


## 10. Conducted Emissions

### 10.1 Test Procedure

The setup of EUT is according with per ANSI C63.4-2014 measurement procedure. The specification used was with the FCC Part 15.207 Limit.

The external I/O cables were draped along the test table and formed a bundle 30 to 40 cm long in the middle. The spacing between the peripherals was 10 cm.

### 10.2 Basic Test Setup Block Diagram

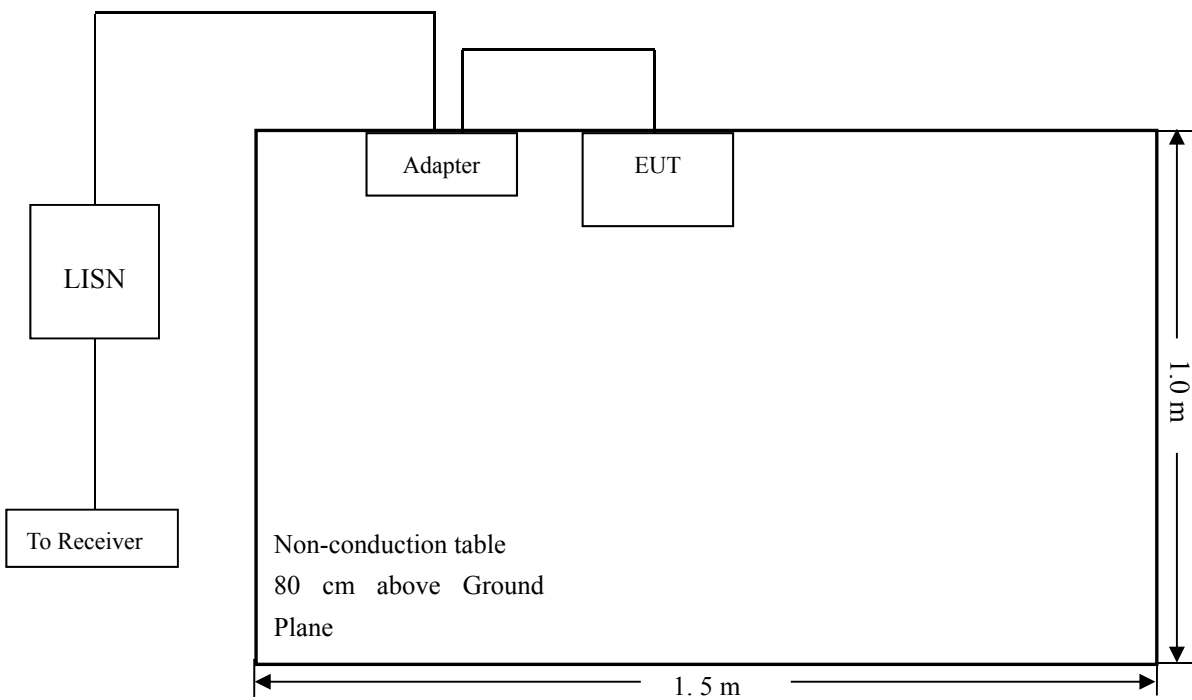

### 10.3 Environmental Conditions

Temperature:	25 °C
Relative Humidity:	52%
ATM Pressure:	1012 mbar



#### 10.4 Test Receiver Setup

During the conducted emission test, the test receiver was set with the following configurations:

Start Frequency ..... 150 kHz  
Stop Frequency ..... 30 MHz  
Sweep Speed ..... Auto  
IF Bandwidth..... 10 kHz  
Quasi-Peak Adapter Bandwidth ..... 9 kHz  
Quasi-Peak Adapter Mode ..... Normal

#### 10.5 Summary of Test Results/Plots

According to the data in section 10.6, the EUT complied with the FCC Part 15.207 Conducted margin for this device, with the *worst* margin reading of:


**-5.28 dB at 0.4900 MHz in the Neutral mode, QP detector, 0.15-30MHz**

#### 10.6 Conducted Emissions Test Data

**Plot of Conducted Emissions Test Data**


EUT: Smart Phone  
 Tested Model: Philips S338  
 Operating Condition: Transmitting(Wi-Fi)  
 Comment: AC 120V

Test Specification: Neutral

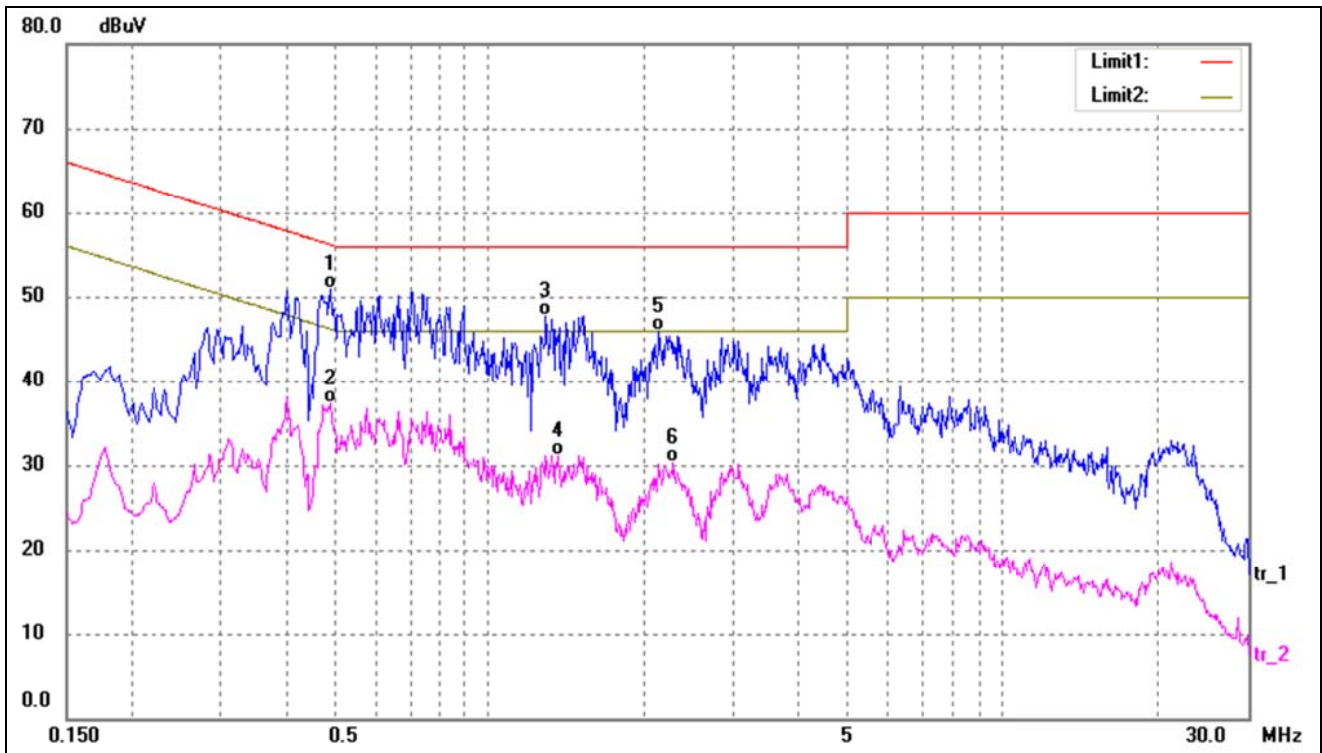

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV)	Limit (dBuV)	Margin (dB)	Detector
1*	0.4900	41.09	9.80	50.89	56.17	-5.28	QP
2	0.4900	27.46	9.80	37.26	46.17	-8.91	AVG
3	1.2860	38.04	9.75	47.79	56.00	-8.21	QP
4	1.3540	21.35	9.75	31.10	46.00	-14.90	AVG
5	2.1380	36.09	9.73	45.82	56.00	-10.18	QP
6	2.2780	20.60	9.73	30.33	46.00	-15.67	AVG

Test Specification: Live

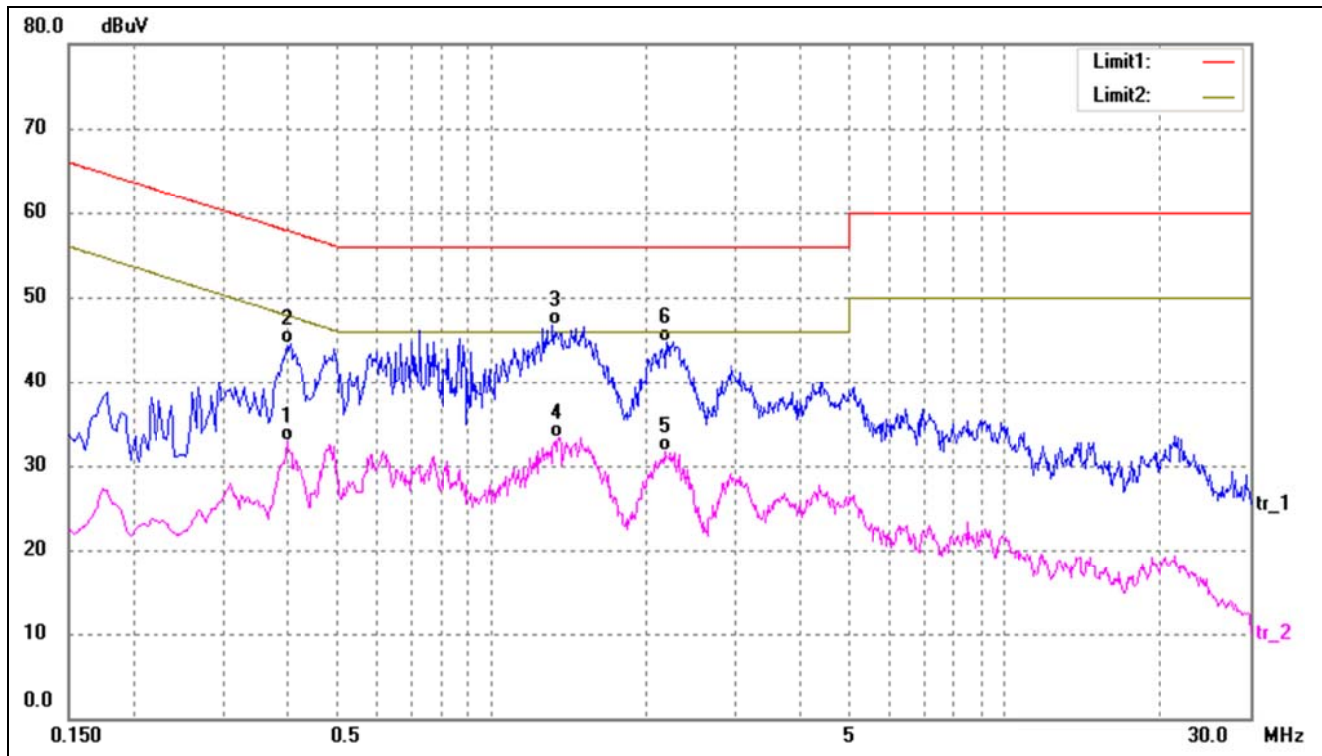

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV)	Limit (dBuV)	Margin (dB)	Detector
1	0.3980	23.09	9.80	32.89	47.90	-15.01	AVG
2	0.4060	34.67	9.80	44.47	57.73	-13.26	QP
3*	1.3100	36.96	9.75	46.71	56.00	-9.29	QP
4	1.3500	23.53	9.75	33.28	46.00	-12.72	AVG
5	2.1780	21.95	9.73	31.68	46.00	-14.32	AVG
6	2.1900	35.02	9.73	44.75	56.00	-11.25	QP

\*\*\*\*\* END OF REPORT \*\*\*\*\*